

承 认 书

SPECIFICATION FOR APPROVAL

客 户 名 称 Shenzhen Mingjingtian Electronics Co., Ltd
CUSTOMER`S NAME

客 户 料 号 _____
CUSTOMER`S P/N

产 品 规 格 _____ Y. A11. 333
PRODUCT SPEC

制 作 日 期 _____
ISSUE DATE

拟制 PREPARED BY	审核 CHECKED BY	批准 APPROVED BY	客户承认 CUSTOMER APPROVE
Li Bei	Cheng Jie	Li Bowen	

Company:DONGGUAN BOHONG TECHNOLOGY CO., LTD

ADD: 4th Floor, 533 Fumin Middle Road, Dalang Town,

Dongguan City

TEL: 0769-82866410

FAX: 0769-82866409

DONGGUAN BOHONG TECHNOLOGY CO.,LTD

SPECIFICATION FOR APPROVAL

[illegible]


东莞市博红科技有限公司

DONGGUAN BOHONG TECHNOLOGY CO.,LTD
SPECIFICATION FOR APPROVAL

CUSTOMER	Mingjingtian	CUSTOMER'S P/N	0
ISSUE DATE	2024/9/25	PRODUCT SPEC	Y. A11. 333

2.DIMENSION :

Unit:mm

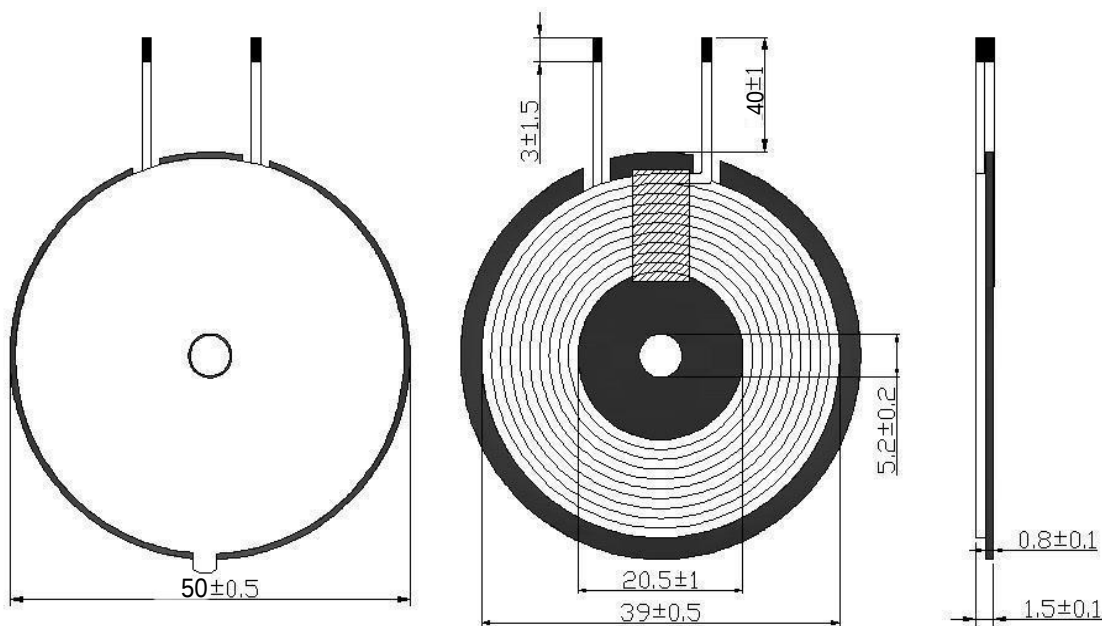

Note:


1. Double sided adhesive tape with hand tear tab;
2. The surface of the coil is clean and tidy, without loose wires, and the gap does not exceed 1/2 of the wire diameter;
3. Place the coil in the center of the magnetic sheet and start winding the wire into the slot;

ISSUE BY	Li Bei	CHECK BY	Cheng Jie	APPROVAL BY	Li Bowen
----------	--------	----------	-----------	-------------	----------

东莞市博红科技有限公司

DONGGUAN BOHONG TECHNOLOGY CO.,LTD
SPECIFICATION FOR APPROVAL

CUSTOMER	Mingjingtian	CUSTOMER'S P/N	0
ISSUE DATE	2024/9/25	PRODUCT SPEC	Y.A11.333

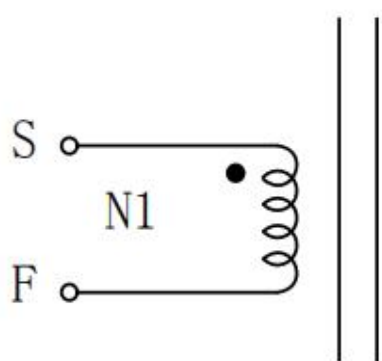3.CIRCUIT DIAGRAM					
 “ ● ”: POLARITY/极性					

4.WINDING					
NO	WINDING	WIRE	TURNS	TAPE	WINDING CONDITION
N1	S-F	Ø0.08*24P*2P	10	/	CCW

5.CHARACTERISTIC			
ITEM	MEASURED POINT	TECHNICAL DATA	TESTING CONDITION & INSTRUMENT
LS	S-F	6.3uH ±10%	LCR1062 100KHz/1V AT 25°C±2°C