

# **FCC Test Report**

Report No.: AGC12845221006FE06

FCC ID : 2A9RD-SVBR01CL

**APPLICATION PURPOSE**: Original Equipment

**PRODUCT DESIGNATION**: Cleaning Robot

**BRAND NAME** : Sveabot

**MODEL NAME** : SVBR01CL

**APPLICANT** : Sveabot Tek AB

**DATE OF ISSUE** : Jan. 17, 2023

STANDARD(S)

REPORT VERSION

**TEST PROCEDURE(S)** 

: V1.0

Attestation of Global Compliance (Shenzhen) Co., Ltd


FCC Part 15.247



Page 2 of 119

#### REPORT REVISE RECORD

Report Version	Revise Time	Issued Date	Valid Version	Notes
V1.0	/	Jan. 17, 2023	Valid	Initial Release





# **TABLE OF CONTENTS**

1. VERIFICATION OF CONFORMITY	5
2. GENERAL INFORMATION	6
2.1. PRODUCT DESCRIPTION	6
2.2. TABLE OF CARRIER FREQUENCYS	7
2.3. IEEE 802.11N MODULATION SCHEME	8
2.4. IEEE 802.11AX MODULATION SCHEME	9
2.5. RELATED SUBMITTAL(S) / GRANT (S)	11
2.6. TEST METHODOLOGY	11
2.7. SPECIAL ACCESSORIES	11
2.8. EQUIPMENT MODIFICATIONS	11
2.9. ANTENNA REQUIREMENT	11
3. MEASUREMENT UNCERTAINTY	13
4. DESCRIPTION OF TEST MODES	14
5. SYSTEM TEST CONFIGURATION	16
5.1. CONFIGURATION OF EUT SYSTEM	16
5.2. EQUIPMENT USED IN EUT SYSTEM	16
5.3. SUMMARY OF TEST RESULTS	
6. TEST FACILITY	17
7. RF OUTPUT POWER MEASUREMENT	18
7.1 MEASUREMENT LIMITS	18
7.2 MEASUREMENT PROCEDURE	18
7.3 MEASUREMENT SETUP (BLOCK DIAGRAM OF CONFIGURATION)	
7.4. LIMITS AND MEASUREMENT RESULT	19
8. 6DB BANDWIDTH MEASUREMENT	21
8.1 MEASUREMENT LIMITS	21
8.2 MEASUREMENT PROCEDURE	21
8.3 MEASUREMENT SETUP (BLOCK DIAGRAM OF CONFIGURATION)	21
8.4. MEASUREMENT RESULTS	22
9. CONDUCTED SPURIOUS EMISSION	47
9.1 MEASUREMENT LIMIT	47
9.2 MEASUREMENT PROCEDURE	47
9.3 MEASUREMENT SETUP (BLOCK DIAGRAM OF CONFIGURATION)	47
9.4 MEASUREMENT RESULTS.	48



Page 4 of 119

10. POWER SPECTRAL DENSITY MEASUREMENT	76
10.1 MEASUREMENT LIMITS	76
10.2 MEASUREMENT PROCEDURE	76
10.3 MEASUREMENT SETUP (BLOCK DIAGRAM OF CONFIGURATION)	77
10.4 MEASUREMENT RESULT	77
11. RADIATED EMISSION	91
11.1. MEASUREMENT PROCEDURE	91
11.2. TEST SETUP	92
11.3. LIMITS AND MEASUREMENT RESULT	93
11.4. TEST RESULT	93
12. LINE CONDUCTED EMISSION TEST	115
12.1. LIMITS OF LINE CONDUCTED EMISSION TEST	115
12.2. BLOCK DIAGRAM OF LINE CONDUCTED EMISSION TEST	115
12.3. PRELIMINARY PROCEDURE OF LINE CONDUCTED EMISSION TEST	116
12.4. FINAL PROCEDURE OF LINE CONDUCTED EMISSION TEST	
12.5. TEST RESULT OF LINE CONDUCTED EMISSION TEST	117
APPENDIX A: PHOTOGRAPHS OF TEST SETUP	119
APPENDIX B: PHOTOGRAPHS OF EUT	119



Page 5 of 119

# 1. VERIFICATION OF CONFORMITY

Applicant	Sveabot Tek AB
Address	Hogmossevagen 11, SE-641 39, Katrineholm, Sweden
manufacturer	Sveabot Tek AB
Address	Hogmossevagen 11, SE-641 39, Katrineholm, Sweden
Factory	FJ Dynamics Technology (Fujian) Co., Ltd.
Address	Unit 3, Yimei Zhineng Industrial Park, No. 30 Zhihui Avenue, Nanyu Town, Gaoxin District, Fuzhou City, Fujian Province, China
Product Designation	Cleaning Robot
Brand Name	Sveabot
Test Model	SVBR01CL
Date of receipt of test item	Nov. 17, 2022
Date of Test	Nov. 21, 2022 to Jan. 17, 2023
Deviation	No any deviation from the test method
Condition of Test Sample	Normal
Test Result	Pass
Report Template	AGCRT-US-BGN/RF

# We hereby certify that:

The above equipment was tested by Attestation of Global Compliance (Shenzhen) Co., Ltd. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.10 (2013) and the energy emitted by the sample EUT tested as described in this report is in compliance with radiated emission limits of FCC Rules Part 15.247.

Prepared By	Alan Duan	
	Alan Duan (Project Engineer)	Jan. 17, 2023
Reviewed By	Calin Lin	
	Calvin Liu (Reviewer)	Jan. 17, 2023
Approved By	Max Zhang	
-	Max Zhang (Authorized Officer)	Jan. 17, 2023



Page 6 of 119

# 2. GENERAL INFORMATION

#### 2.1. PRODUCT DESCRIPTION

The EUT is designed as "Cleaning Robot". It is designed by way of utilizing the DSSS and OFDM technology to achieve the system operation.

A major technical description of EUT is described as following

Equipment Type	WLAN 2.4G					
Frequency Band	2400MHz ~ 2483.5MHz					
Operation Frequency	2412MHz ~ 2462MHz					
Outnut Power (Average)	EEE 802.11b:15.94dBm; IEEE 802.11g:15.15dBm;					
Output Power (Average)	IEEE 802.11n(HT20):14.67dBm; IEEE 802.11ax (HE20):13.55dBm					
Output Power (Peak)	IEEE 802.11b:18.51dBm; IEEE 802.11g:23.41dBm;					
. ,	IEEE 802.11n(HT20):23.04dBm; IEEE 802.11ax (HE20):23.30dBm					
Output Power (MIMO-	IEEE 802.11n(HT20):17.48dBm; IEEE 802.11ax (HE20):16.46dBm					
Average)	, , , , , , , , , , , , , , , , , , , ,					
Output Power (MIMO-	IEEE 802.11n(HT20):25.82dBm; IEEE 802.11ax (HE20):26.17dBm					
Peak)	002 44h,Dece(DODCK_DDDCK_CCK)					
Modulation	802.11b:DSSS(DQPSK, DBPSK, CCK) 802.11g/n: OFDM(64-QAM, 16-QAM, QPSK, BPSK)					
Wiodulation	802.11g/ii. OFDM(04-QAM, 10-QAM, QFSK, BFSK) 802.11ax:OFDMA(1024-QAM,256-QAM,64-QAM, 16-QAM, QPSK, BPSK)					
	802.11b: 1/2/5.5/11Mbps					
	802.11g: 6/9/12/18/24/36/48/54Mbps					
Data Rate	802.11n: up to 300Mbps					
	802.11ax: up to 574Mbps					
Number of channels	11					
Hardware Version	V1.0					
Software Version	V1.0					
Antenna Designation	FPC Antenna (Comply with requirements of the FCC part 15.203)					
Antenna Gain	Refer to Chapter 2.10 of the report.					
Number of transmit chain	2(802.11b/g/n/ax all used two antennas,802.11n/ax support MIMO)					
Power Supply	DC 50.4V by battery or DC 58.8V by adapter					



Page 7 of 119

#### 2.2. TABLE OF CARRIER FREQUENCYS

Frequency Band	Channel Number	Frequency
	1	2412 MHZ
	2	2417 MHZ
	3	2422 MHZ
	4	2427 MHZ
	5	2432 MHZ
2400~2483.5MHZ	6	2437 MHZ
	7	2442 MHZ
	8	2447 MHZ
	9	2452 MHZ
	10	2457 MHZ
	11	2462 MHZ

Note: For 20MHZ bandwidth system use Channel 1 to Channel 11. For 40MHZ bandwidth system use Channel 3 to Channel 9



Page 8 of 119

#### 2.3. IEEE 802.11N MODULATION SCHEME

MCS Index	Nss	Modulation	R	NBPSC	NCI	3PS	NDBPS		rate(N	ata Mbps) nsGl
					20MHz	40MHz	20MHz	40MHz	20MHz	40MHz
0	1	BPSK	1/2	1	52	108	26	54	6.5	13.5
1	1	QPSK	1/2	2	104	216	52	108	13.0	27.0
2	1	QPSK	3/4	2	104	216	78	162	19.5	40.5
3	1	16-QAM	1/2	4	208	432	104	216	26.0	54.0
4	1	16-QAM	3/4	4	208	432	156	324	39.0	81.0
5	1	64-QAM	2/3	6	312	648	208	432	52.0	108.0
6	1	64-QAM	3/4	6	312	648	234	489	58.5	121.5
7	1	64-QAM	5/6	6	312	648	260	540	65.0	135.0

Symbol	Explanation		
NSS	Number of spatial streams		
R	Code rate		
NBPSC	Number of coded bits per single carrier		
NCBPS	Number of coded bits per symbol		
NDBPS	Number of data bits per symbol		
GI	Guard interval		




# 2.4. IEEE 802.11AX MODULATION SCHEME

# Table 27-79—HE-MCSs for 242-tone RU, $N_{SS} = 1$

HE MGG			R N <sub>BPSCS</sub>			N <sub>DBPS</sub>	Data rate (Mb/s)			
HE-MCS Index	DCM	Modulation		N <sub>SD</sub>	N <sub>CBPS</sub>		0.8 μs GI	1.6 μs GI	3.2 μs GI	
0	1	DDGW	1/2	1	117	117	58	4.3	4.0	3.6
U	0	BPSK	1/2	1	234	234	117	8.6	8.1	7.3
1	1		1/2		117	234	117	8.6	8.1	7.3
1	0	QPSK	1/2	2	234	468	234	17.2	16.3	14.6
2	N/A		3/4		234	468	351	25.8	24.4	21.9
3	1	16.011	1/2		117	468	234	17.2	16.3	14.6
3	0		1/2	4	234	936	468	34.4	32.5	29.3
4	1	16-QAM	3/4	4	117	468	351	25.8	24.4	21.9
4	0		3/4		234	936	702	51.6	48.8	43.9
5			2/3				936	68.8	65.0	58.5
6		64-QAM	3/4	6		1 404	1 053	77.4	73.1	65.8
7			5/6				1 170	86.0	81.3	73.1
8	N/A	256 0414	3/4	8	234	1.070	1 404	103.2	97.5	87.8
9		256-QAM	5/6	8		1 872	1 560	114.7	108.3	97.5
10		1024 0 434	3/4	10		2.240	1 755	129.0	121.9	109.7
11		1024-QAM	5/6	10		2 340	1 950	143.4	135.4	121.9

Symbol	Explanation		
NSS	Number of spatial streams		
R	Code rate		
NBPSC	Number of coded bits per single carrier		
NCBPS	Number of coded bits per symbol		
NDBPS	Number of data bits per symbol		
GI	Guard interval		





# Table 27-87—HE-MCSs for 484-tone RU, $N_{SS} = 1$

HE MCC								Da	ta rate (MI	b/s)	
HE-MCS Index	DCM	Modulation	R	N <sub>BPSCS</sub>	N <sub>SD</sub>	N <sub>CBPS</sub>	$N_{DBPS}$	0.8 μs GI	1.6 μs GI	3.2 μs GI	
0	1	BPSK	1/2	1	234	234	117	8.6	8.1	7.3	
U	0	Brsk	1/2	1	468	468	234	17.2	16.3	14.6	
1	1		1/2		234	468	234	17.2	16.3	14.6	
1	0	QPSK	1/2	2	468	936	468	34.4	32.5	29.3	
2	N/A		3/4		468	936	702	51.6	48.8	43.9	
3	1		1/2		234	936	468	34.4	32.5	29.3	
3	0	16 OAM	1/2	4	468	1 872	936	68.8	65.0	58.5	
4	1	16-QAM	3/4		234	936	702	51.6	48.8	43.9	
4	0		3/4		468	1 872	1 404	103.2	97.5	87.8	
5			2/3				1 872	137.6	130.0	117.0	
6		64-QAM 3/4	6	2 808	2 106	154.9	146.3	131.6			
7			5/6				2 340	172.1	162.5	146.3	
8	N/A	256 0414	3/4	8	468		2 808	206.5	195.0	175.5	
9		256-QAM	256-QAM	5/6	8		3 744	3 120	229.4	216.7	195.0
10		1024 0434	3/4	10		4.690	3 510	258.1	243.8	219.4	
11		1024-QAM 5/6	5/6	10		4 680	3 900	286.8	270.8	243.8	

Symbol	Explanation		
NSS	Number of spatial streams		
R	Code rate		
NBPSC	Number of coded bits per single carrier		
NCBPS	Number of coded bits per symbol		
NDBPS	Number of data bits per symbol		
GI Guard interval			



Page 11 of 119

# 2.5. RELATED SUBMITTAL(S) / GRANT (S)

This submittal(s) (test report) is intended for **FCC ID: 2A9RD-SVBR01CL** filing to comply with the FCC Part 15 requirements.

#### 2.6. TEST METHODOLOGY

KDB 558074 D01 15.247 Meas Guidance v05: Guidance for compliance measurements on Digital transmission system, frequency hopping spread spectrum system, and hybrid system devices operating under section 15.247 of the FCC rules

ANSI C63.10:2013: American National Standard for Testing Unlicensed Wireless Devices

#### 2.7. SPECIAL ACCESSORIES

Refer to section 5.2.

#### 2.8. EQUIPMENT MODIFICATIONS

Not available for this EUT intended for grant.

#### 2.9. ANTENNA REQUIREMENT

This intentional radiator is designed with a permanently attached antenna of an antenna to ensure that no antenna other than that furnished by the responsible party shall be used with the device. For more information of the antenna, please refer to the APPENDIX B: PHOTOGRAPHS OF EUT.



Page 12 of 119

#### 2.10. DESCRIPTION OF AVAILABLE ANTENNAS

Antenna	Frequency	TX	Bandwidth	Max Peak Gain (dBi)		Max Directional Gain		
Type	Band (MHz)	Paths	(MHz)	Ant 1	Ant 2	(dBi)		
2.4GWIFI FPC Antenna List (2.4GHz 2*2 MIMO)								
FPC Antenna	2400~2500	2	20	3.2	6.06	9.07		

Note 1: The EUT supports Cyclic Delay Diversity (CDD) technology for 802.11n/ax mode.

Note 2: The EUT supports Cyclic Delay Diversity (CDD) mode, and CDD signals are correlated.

If all antennas have the same gain, Gant, Directional gain = Gant + Array Gain, where Array Gain is as follows.

For power spectral density (PSD) measurements on devices:

Array Gain = 10 log (Nant/ Nss) dB = 3.01;

• For power measurements on IEEE 802.1devices:

Array Gain = 0 dB for  $N_{ANT} \le 4$ ;

Array Gain = 0 dB (i.e., no array gain) for channel widths ≥40 MHz for any NANT;

Array Gain = 5 log(Nant/Nss) dB or 3 dB, whichever is less, for 20 MHz channel widths with Nant ≥ 5.

If antenna gains are not equal, Directional gain may be calculated by using the formulas applicable to equal gain antennas with Gant set equal to the gain of the antenna having the highest gain..



Page 13 of 119

# 3. MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement y ±U, where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of k=2, providing a level of confidence of approximately 95%.

Item	Measurement Uncertainty
Uncertainty of Conducted Emission for AC Port	$U_c = \pm 3.1 \text{ dB}$
Uncertainty of Radiated Emission below 1GHz	$U_c = \pm 4.0 \text{ dB}$
Uncertainty of Radiated Emission above 1GHz	$U_c = \pm 4.8 \text{ dB}$
Uncertainty of total RF power, conducted	$U_c = \pm 0.8 \text{ dB}$
Uncertainty of RF power density, conducted	$U_c = \pm 2.6 \text{ dB}$
Uncertainty of spurious emissions, conducted	$U_c = \pm 2 \%$
Uncertainty of Occupied Channel Bandwidth	$U_c = \pm 2 \%$




Page 14 of 119

# 4. DESCRIPTION OF TEST MODES

	Summary table of Test Cases				
	Data Rate / Modulation				
Test Item	2.4G WLAN – 802.11b/g/n/ax(DSSS, OFDM,OFDMA)				
	Mode 1: 802.11b_TX CH01_2412 MHz_1 Mbps				
	Mode 2: 802.11b_TX CH06_2437 MHz_1 Mbps				
	Mode 3: 802.11b_TX CH11_2462 MHz_1 Mbps				
	Mode 4: 802.11g_TX CH01_2412 MHz_6 Mbps				
	Mode 5: 802.11g_TX CH06_2437 MHz_6 Mbps				
Radiated&Conducted	Mode 6: 802.11g_TX CH11_2462 MHz_6 Mbps				
Test Cases	Mode 7: 802.11n-HT20_TX CH01_2412 MHz_MCS0 Mbps				
	Mode 8: 802.11n-HT20_TX CH06_2437 MHz_ MCS0 Mbps				
	Mode 9: 802.11n-HT20_TX CH11_2462 MHz_ MCS0 Mbps				
	Mode 10: 802.11ax-HE20_TX CH01_2412 MHz_MCS0 Mbps				
	Mode 11: 802.11ax-HE20_TX CH06_2437 MHz_ MCS0 Mbps				
	Mode 12: 802.11ax-HE20_TX CH11_2462 MHz_ MCS0 Mbps				
AC Conducted Emission	Mode 1: 2.4G WLAN Link (Charging from AC Adapter)				


# Note:

- 1. The battery is full-charged during the test.
- 2. The EUT has been set to operate continuously on the lowest, middle and highest operation frequency Individually, and the EUT is operating at its maximum duty cycle>or equal 98%
- 3. For Radiated Emission, 3axis were chosen for testing for each applicable mode.
- 4. For Conducted Test method, a temporary antenna connector is provided by the manufacture.
- All radiated spurious emission and conducted interference modes have been pre scanned, and the report only records that antenna 1+antenna 2 work in the worst mode.





# Software Setting

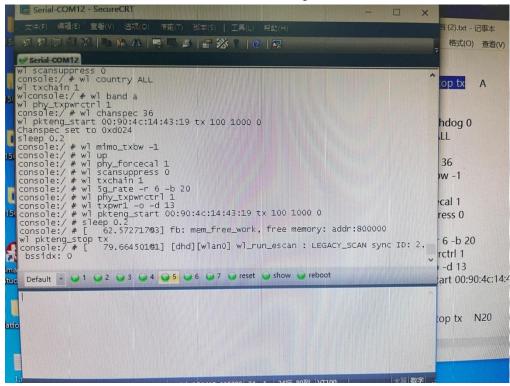




Page 16 of 119

# 5. SYSTEM TEST CONFIGURATION

# **5.1. CONFIGURATION OF EUT SYSTEM**

Configure:



#### **5.2. EQUIPMENT USED IN EUT SYSTEM**

Item	Equipment	Model No.	ID or Specification	Remark
1	Cleaning Robot	SVBR01CL	2A9RD-SVBR01CL	EUT
2	Bluetooth speaker	SRS-XB01	N/A	AE
3	Xiaomi router R4A		N/A	AE
4	Adapter	FY58809500	Input: 100-240V, 50/60Hz, 7.5A Output: DC 58.8V, 9.5A	AE

# **5.3. SUMMARY OF TEST RESULTS**

FCC RULES	FCC RULES DESCRIPTION OF TEST		
§15.247	RF Output Power	Compliant	
§15.247	6 dB Bandwidth	Compliant	
§15.247	Conducted Spurious Emission	Compliant	
§15.247	Maximum Conducted Output Power Spectral Density	Compliant	
§15.209	§15.209 Radiated Emission		
§15.247	§15.247 Band Edges		
§15.207	Line Conduction Emission	Compliant	



Page 17 of 119

# 6. TEST FACILITY

Test Site	Attestation of Global Compliance (Shenzhen) Co., Ltd
Location	1-2/F, Building 19, Junfeng Industrial Park, Chongqing Road, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China
Designation Number	CN1259
FCC Test Firm Registration Number	975832
A2LA Cert. No.	5054.02
Description	Attestation of Global Compliance(Shenzhen) Co., Ltd is accredited by A2LA

# **TEST EQUIPMENT OF CONDUCTED EMISSION TEST**

Equipment	Manufacturer	Model	S/N	Cal. Date	Cal. Due
TEST RECEIVER	R&S	ESPI	101206	Mar. 28, 2022	Mar. 27, 2023
LISN	R&S	ESH2-Z5	100086	Jun. 08, 2022	Jun. 07, 2023
Test software	R&S	ES-K1	Ver.V1.71	N/A	N/A

#### **TEST EQUIPMENT OF RADIATED EMISSION TEST**

Equipment	Manufacturer	Model	S/N	Cal. Date	Cal. Due		
TEST RECEIVER	R&S	ESCI	10096	Mar. 28, 2022	Mar. 27, 2023		
EXA Signal Analyzer	Aglient	N9010A	MY53470504	Aug. 04, 2022	Aug. 03, 2023		
Power sensor	Aglient	U2021XA	MY54110007	Mar. 04, 2022	Mar. 03, 2023		
2.4GHz Filter	EM Electronics	2400-2500MHz	N/A	N/A	N/A		
Attenuator	ZHINAN	E-002	N/A	Sep. 01, 2022	Aug. 31, 2023		
Horn antenna	SCHWARZBECK	BBHA 9170	#768	Oct. 31, 2021	Oct. 30, 2023		
Active loop antenna (9K-30MHz)	ZHINAN	ZN30900C	18051	Mar. 12, 2022	Mar. 11, 2024		
Double-Ridged Waveguide Horn	ETS LINDGREN	3117	00034609	Apr. 23, 2021	Apr. 22, 2023		
Broadband Preamplifier	ETS LINDGREN	3117PA	00225134	Sep. 01, 2022	Aug. 31, 2023		
ANTENNA	SCHWARZBECK	VULB9168	494	Jan. 08, 2021	Jan. 07, 2023		
ANTENNA	SCHWARZBECK	VULB9168	494	Jan. 08, 2021	Jan. 07, 2023		
Test software	Tonscend	JS32-RE	Ver.2.5	N/A	N/A		



Page 18 of 119

#### 7. RF OUTPUT POWER MEASUREMENT

# 7.1 MEASUREMENT LIMITS

According to Section (b)(3) of the FCC PART15.247 standard:

For DTSs employing digital modulation techniques operating in the bands 2400-2483.5 MHz, the maximum peak conducted output power shall not exceed 1 W.


#### 7.2 MEASUREMENT PROCEDURE

- For peak power test:
- 1. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
- 2. Set the RBW = 1 MHz.
- 3. Set the VBW  $\geq$  [3 × RBW].
- 4. Set the Span ≥ [1.5 × DTS bandwidth].
- 5. Sweep time=Auto couple.
- 6. Detector function=Peak.
- 7. Trace Mode=Max hold.
- 8. Allow trace to stabilize. Use the marker-to-peak function to set the marker to the peak of the emission.
- 9. The indicated level is the peak output power, after any corrections for external attenuators and cables.

# ⊠For Average power test:

- 1. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
- 2. Set Span to at least 1.5 times the OBW.
- 3. Set RBW = 1% to 5% of the OBW, not to exceed 1 MHz.
- 4. Set VBW≥[3×RBW].
- 5. Sweep Time=Auto couple.
- 6. Detector function=RMS (i.e., power averaging).
- 7. Trace average at least 100 traces in power averaging (rms) mode;
- 8. Determine according to the duty cycle of the equipment: when it is less than 98%, follow the steps below.
- Add [10 log (1 / D)], where D is the duty cycle, to the measured power to compute the average power during the actual transmission times (because the measurement represents an average over both the ON and OFF times of the transmission). For example, add [10 log (1/0.25)] = 6 dB if the duty cycle is 25%.
- 10. Record the test results in the report.

# 7.3 MEASUREMENT SETUP (BLOCK DIAGRAM OF CONFIGURATION)

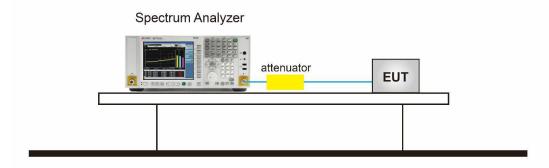

Any report having not been signed by additionable approver, or naving been altered without additionable in additionable ad



Page 19 of 119

#### 7.4. LIMITS AND MEASUREMENT RESULT

Test Data of Conducted Output Power-antenna 1							
Test Mode	Test Channel (MHz)	Average Power (dBm)	Peak Power (dBm)	Limits (dBm)	Pass or Fail		
	2412	15.94	18.51	≤30	Pass		
802.11b	2437	15.00	17.52	≤30	Pass		
	2462	14.78	17.50	≤30	Pass		
	2412	15.15	23.41	≤30	Pass		
802.11g	2437	14.05	22.28	≤30	Pass		
	2462	13.65	21.87	≤30	Pass		
	2412	14.67	23.04	≤30	Pass		
802.11n-HT20	2437	13.55	21.89	≤30	Pass		
	2462	13.21	21.57	≤30	Pass		
	2412	13.55	23.30	≤30	Pass		
802.11ax-HE20	2437	12.56	21.83	≤30	Pass		
	2462	12.40	22.13	≤30	Pass		

Test Data of Conducted Output Power-antenna 2							
Test Mode	Test Channel (MHz)	Average Power (dBm)	Peak Power (dBm)	Limits (dBm)	Pass or Fail		
	2412	15.69	18.11	≤29.94	Pass		
802.11b	2437	15.17	17.70	≤29.94	Pass		
	2462	15.17	17.92	≤29.94	Pass		
	2412	14.56	22.97	≤29.94	Pass		
802.11g	2437	14.04	22.25	≤29.94	Pass		
	2462	13.85	22.20	≤29.94	Pass		
	2412	14.26	22.56	≤29.94	Pass		
802.11n-HT20	2437	13.69	22.08	≤29.94	Pass		
	2462	13.57	22.04	≤29.94	Pass		
	2412	13.34	23.01	≤29.94	Pass		
802.11ax-HE20	2437	12.94	22.59	≤29.94	Pass		
	2462	12.64	22.37	≤29.94	Pass		



Page 20 of 119

Test Data of Conducted Output Power-MIMO							
Test Mode	Test Channel (MHz)	Average Power (dBm)	Peak Power (dBm)	Limits (dBm)	Pass or Fail		
	2412	17.48	25.82	≤26.93	Pass		
802.11n-HT20	2437	16.63	25.00	≤26.93	Pass		
	2462	16.40	24.82	≤26.93	Pass		
	2412	16.46	26.17	≤26.93	Pass		
802.11ax-HE20	2437	15.76	25.24	≤26.93	Pass		
	2462	15.53	25.26	≤26.93	Pass		



Page 21 of 119

#### 8. 6DB BANDWIDTH MEASUREMENT


#### **8.1 MEASUREMENT LIMITS**

The minimum 6dB bandwidth shall be at least 500 kHz.

#### **8.2 MEASUREMENT PROCEDURE**

- 1. The testing follows the ANSI C63.10 Section 6.9.3 (OBW) and 11.8.1 (6dB BW).
- 2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
- 3. Set to the maximum power setting and enable the EUT transmit continuously.
- 4. For 6dB Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. Set the Video bandwidth (VBW) = 300 kHz. In order to make an accurate measurement.
- 5. For 99% Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) is set 1-5% of the emission bandwidth and set the Video bandwidth (VBW) ≥ 3 \* RBW.
- 6. Detector = peak
- 7. Trace mode = max hold.
- 8. Sweep = auto couple.
- 9. Allow the trace to stabilize.
- 10. Measure and record the results in the test report.

# 8.3 MEASUREMENT SETUP (BLOCK DIAGRAM OF CONFIGURATION)

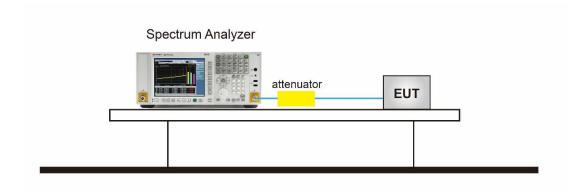




Page 22 of 119

#### **8.4. MEASUREMENT RESULTS**


Test Data of Occupied Bandwidth and DTS Bandwidth-ANT 1							
Test Mode	Test Channel (MHz)	99% Occupied Bandwidth (MHz)	-6dB Bandwidth (MHz)	Limits (MHz)	Pass or Fail		
802.11b	2412	11.237	7.543	≥0.5	Pass		
	2437	10.845	7.562	≥0.5	Pass		
	2462	10.871	7.560	≥0.5	Pass		
802.11g	2412	16.662	16.379	≥0.5	Pass		
	2437	16.645	16.376	≥0.5	Pass		
	2462	16.678	16.363	≥0.5	Pass		
802.11n20	2412	17.823	17.793	≥0.5	Pass		
	2437	17.806	17.791	≥0.5	Pass		
	2462	17.809	17.767	≥0.5	Pass		
802.11ax20	2412	18.904	18.816	≥0.5	Pass		
	2437	18.898	18.710	≥0.5	Pass		
	2462	18.923	18.731	≥0.5	Pass		

Test Data of Occupied Bandwidth and DTS Bandwidth-ANT 2							
Test Mode	Test Channel (MHz)	99% Occupied Bandwidth (MHz)	-6dB Bandwidth (MHz)	Limits (MHz)	Pass or Fail		
802.11b	2412	10.645	7.075	≥0.5	Pass		
	2437	10.707	7.567	≥0.5	Pass		
	2462	10.751	7.550	≥0.5	Pass		
802.11g	2412	16.658	16.375	≥0.5	Pass		
	2437	16.653	16.396	≥0.5	Pass		
	2462	16.640	16.376	≥0.5	Pass		
802.11n20	2412	17.797	17.764	≥0.5	Pass		
	2437	17.814	17.795	≥0.5	Pass		
	2462	17.813	17.778	≥0.5	Pass		
802.11ax20	2412	18.923	18.905	≥0.5	Pass		
	2437	18.918	18.843	≥0.5	Pass		
	2462	18.927	18.743	≥0.5	Pass		







#### Test Graphs of Occupied Bandwidth

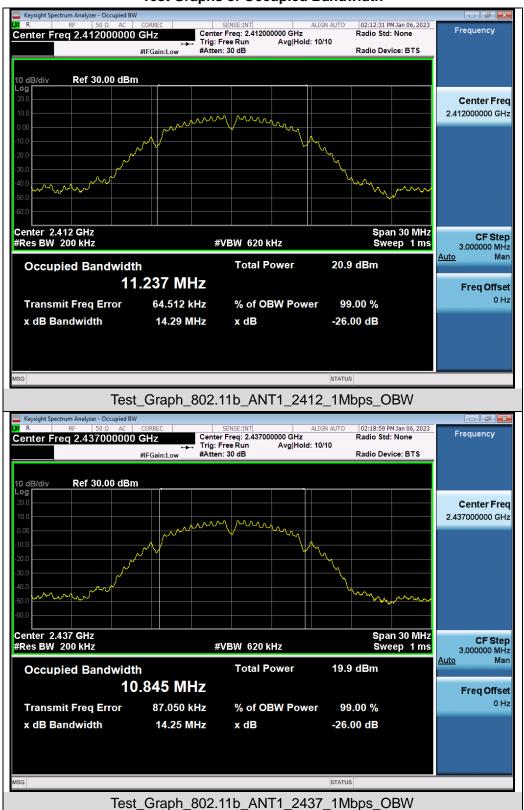




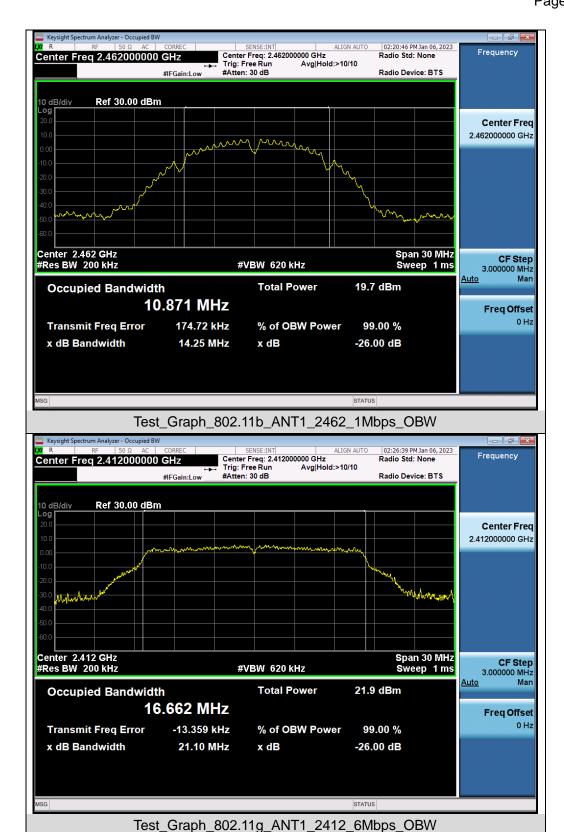




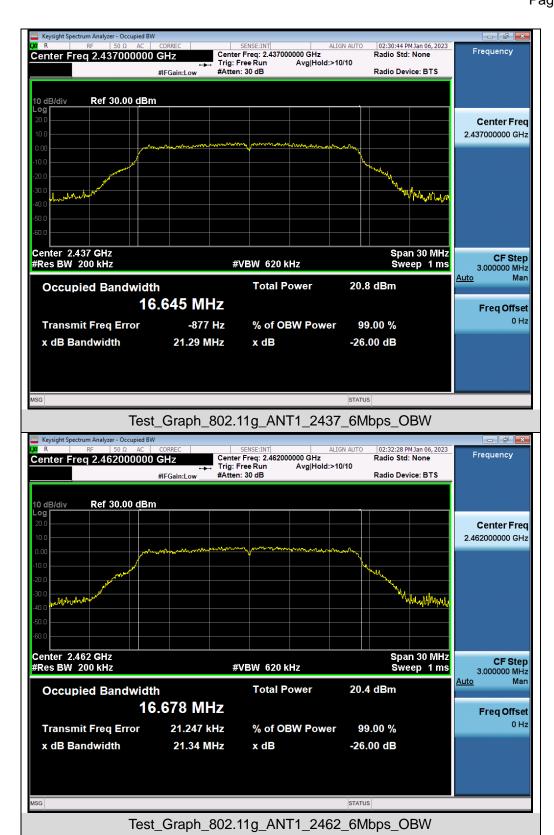




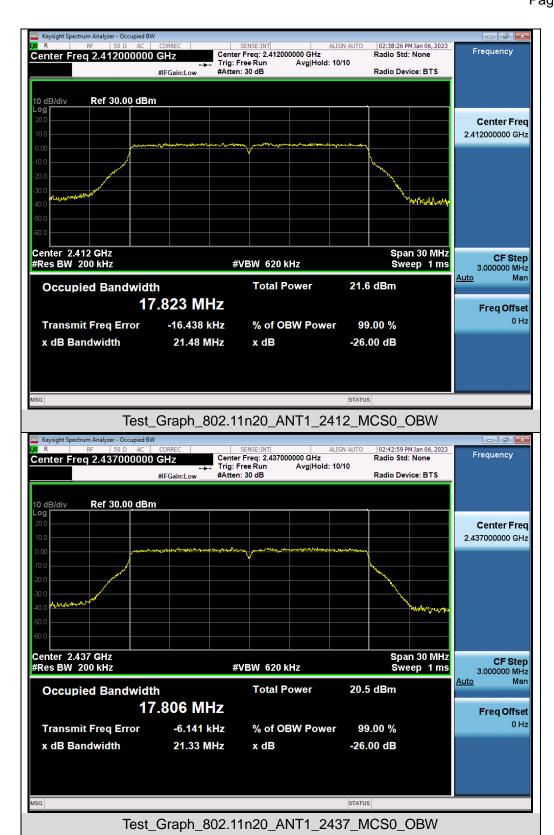














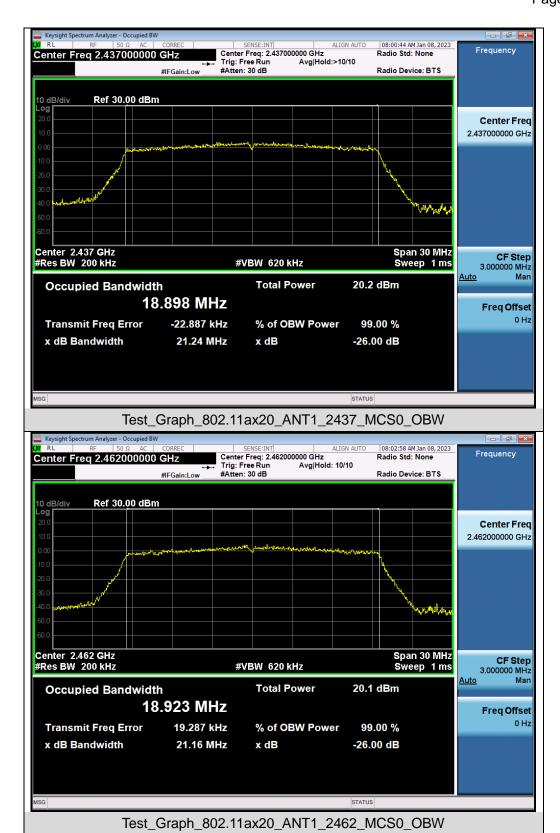




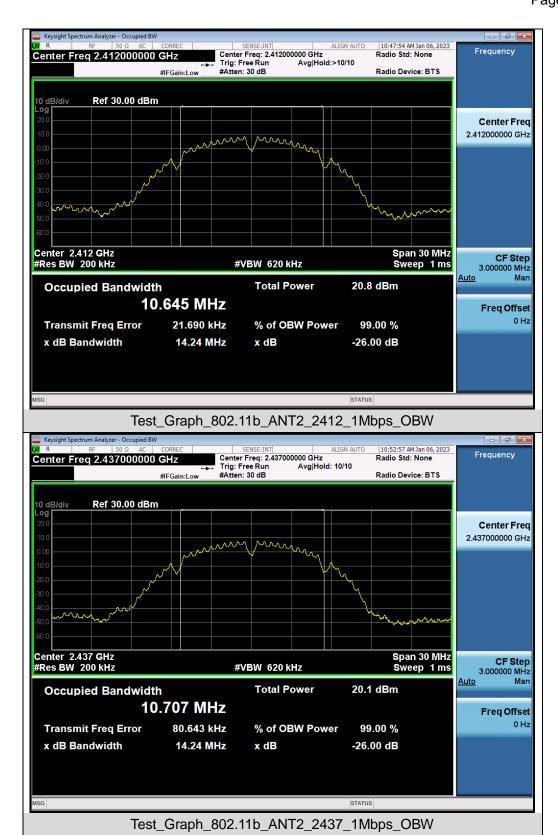



































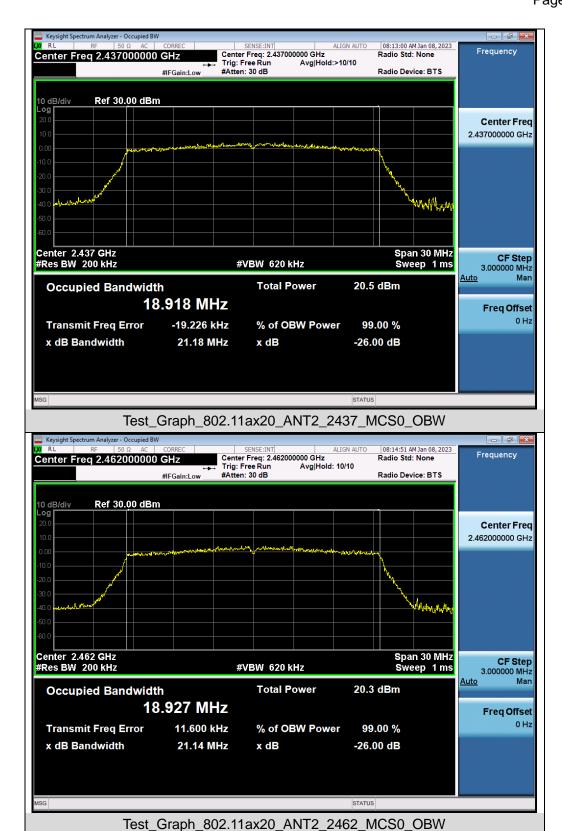







#### **Test Graphs of DTS Bandwidth**

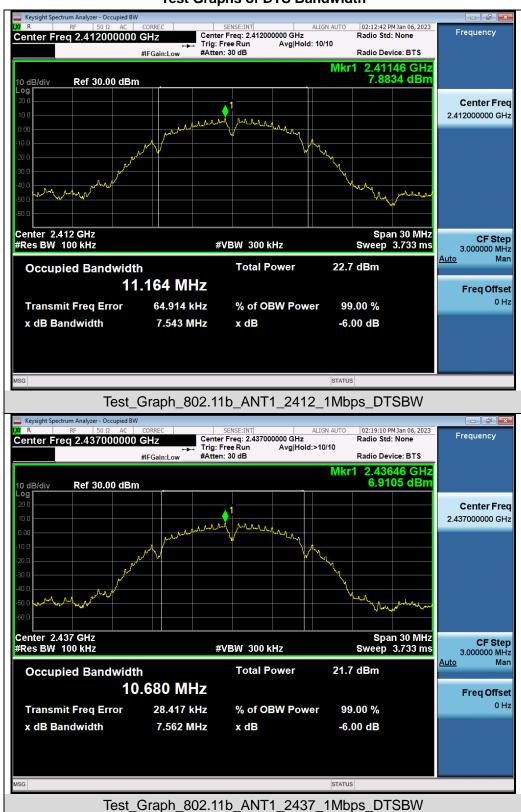

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.




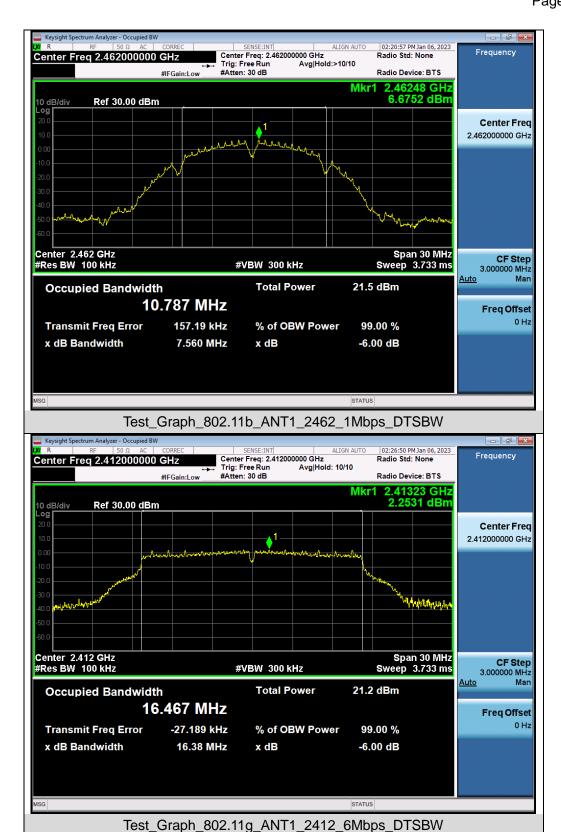
















Test Graph 802.11n20 ANT1 2437 MCS0 DTSBW





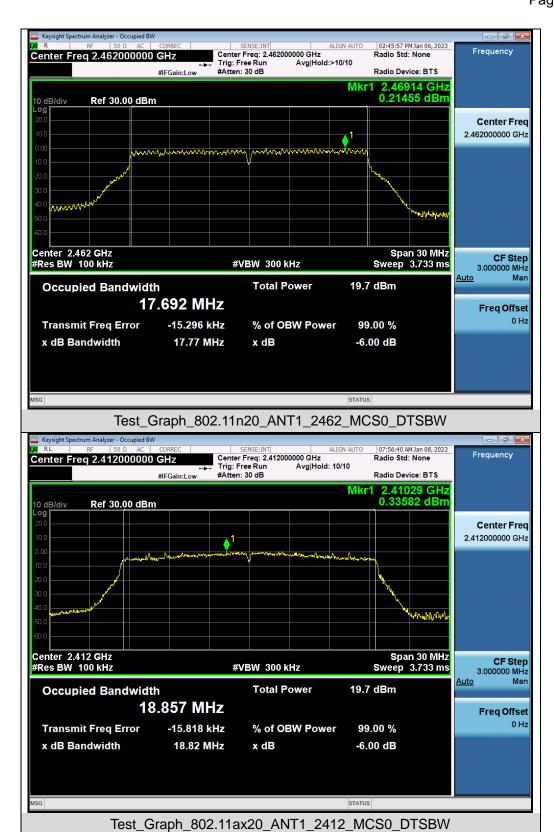




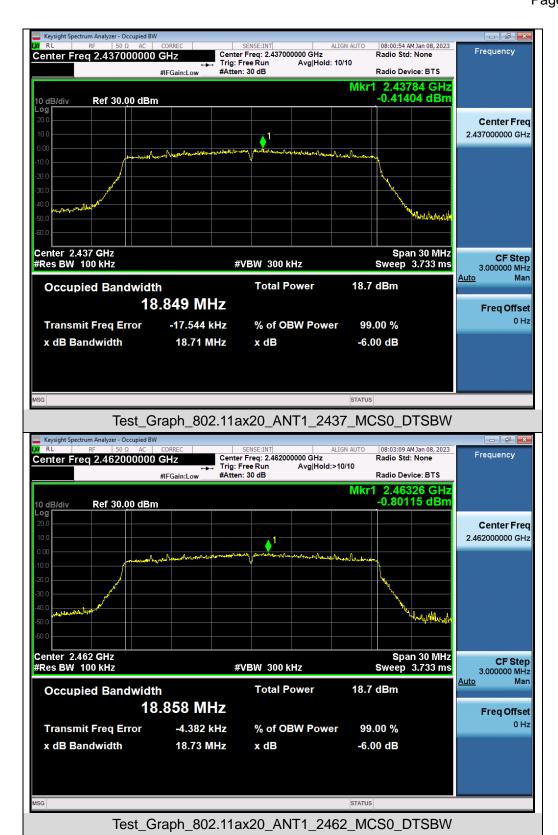












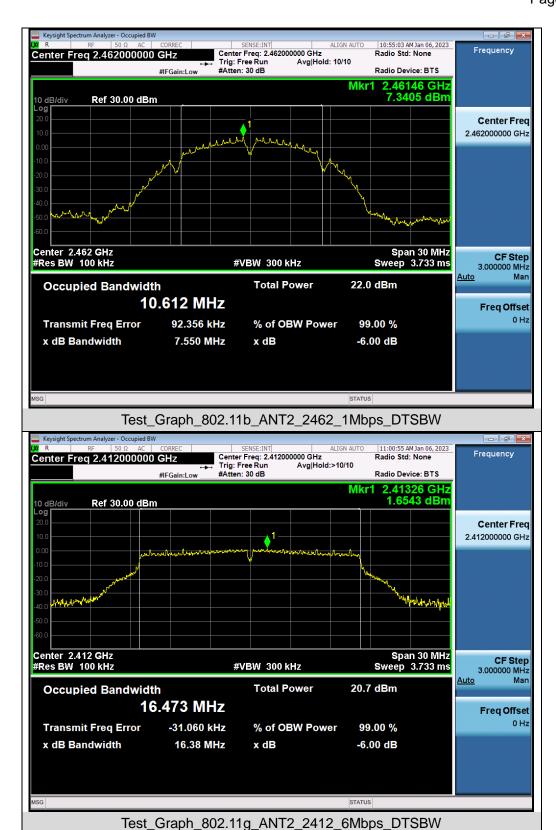







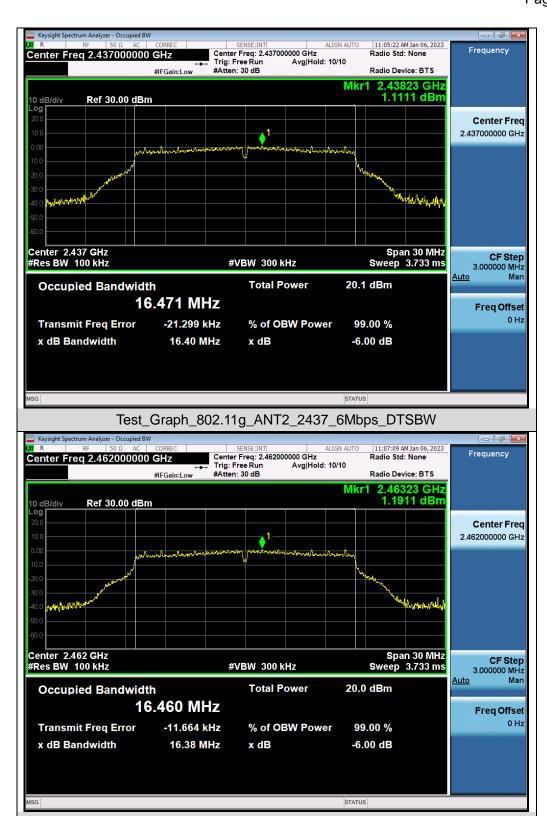


Test\_Graph\_802.11g\_ANT2\_2462\_6Mbps\_DTSBW






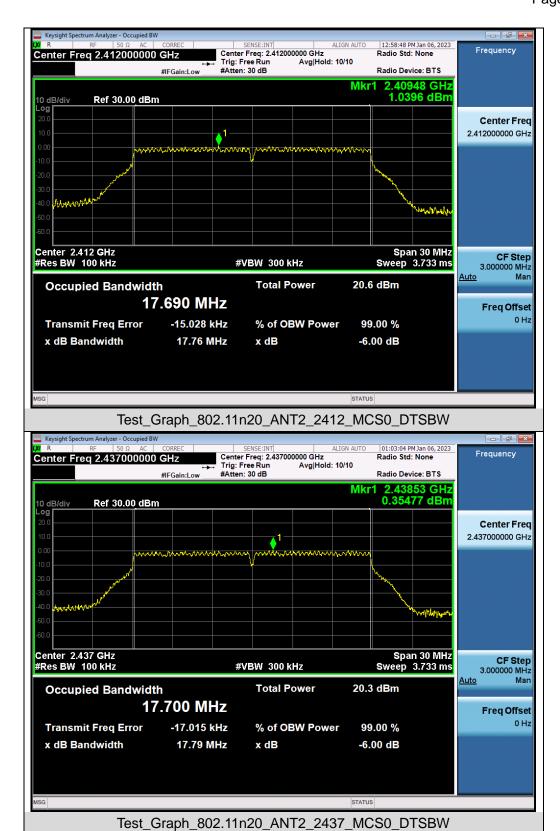



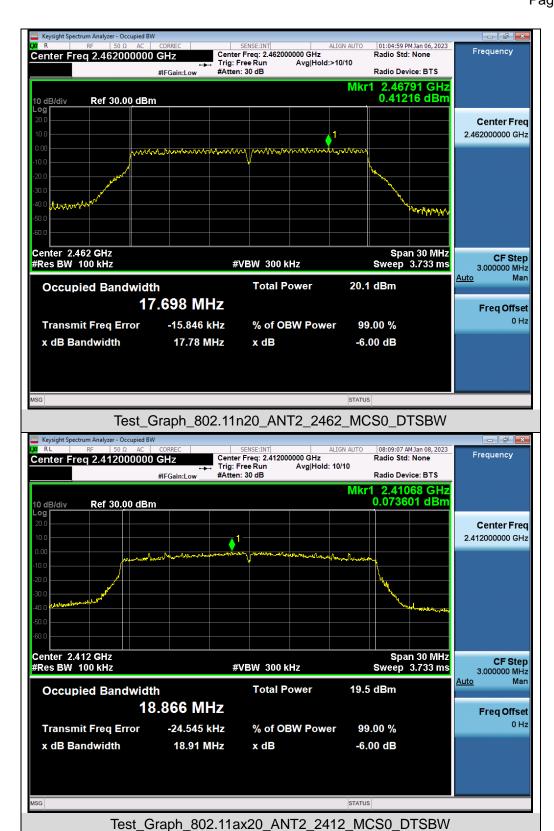



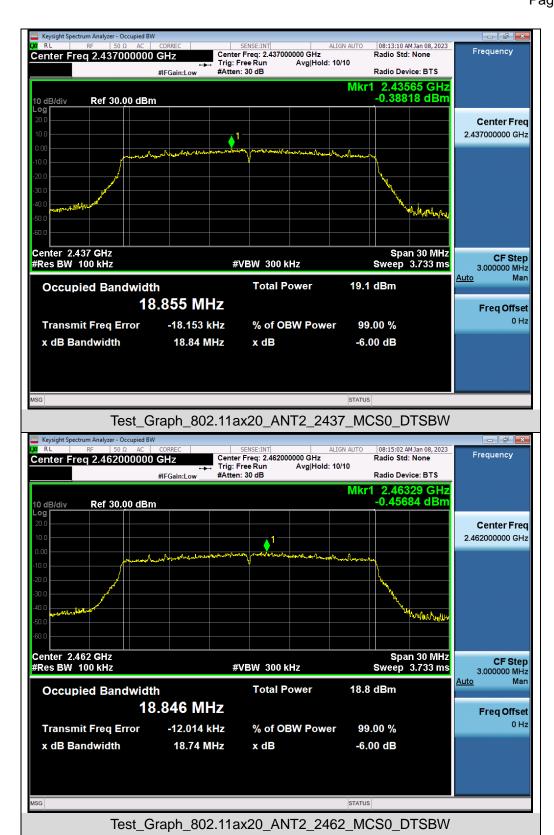



Report No.: AGC12845221006FE06

Page 47 of 119

## 9. CONDUCTED SPURIOUS EMISSION


### 9.1 MEASUREMENT LIMIT


LIMITS AND MEASUREMENT RESULT		
Applicable Limits	Measurement Result	
	Test Data	Criteria
In any 100 KHz Bandwidth Outside the	At least -20dBc than the limit	
frequency band in which the spread spectrum	Specified on the BOTTOM	PASS
intentional radiator is operating, the radio frequency	Channel	
power that is produce by the intentional radiator shall		
be at least 20 dB below that in 100KHz bandwidth		
within the band that contains the highest level of the		
desired power.	At least -20dBc than the limit	D4.00
In addition, radiation emissions which fall in the	Specified on the TOP Channel	PASS
restricted bands, as defined in §15.205(a), must also		
comply with the radiated emission limits specified		
in§15.209(a))		

#### 9.2 MEASUREMENT PROCEDURE

- 1. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
- 2. Set the EUT Work on the top, the Middle and the bottom operation frequency individually.
- 3. Set the Span = wide enough to capture the peak level of the in-band emission and all spurious emissions from the lowest frequency generated in the EUT up through the 10th harmonic.
- 4. RBW = 100 kHz; VBW= 300 kHz; Sweep = auto; Detector function = peak.(Test frequency below 1GHz)
- 5. RBW = 1 MHz; VBW= 3 MHz; Sweep = auto; Detector function = peak.(Test frequency Above 1GHz)
- 6. Set SPA Trace 1 Max hold, then View.
- 7. Mark the maximum useless stray point and compare it with the limit value to record the result.

#### 9.3 MEASUREMENT SETUP (BLOCK DIAGRAM OF CONFIGURATION)

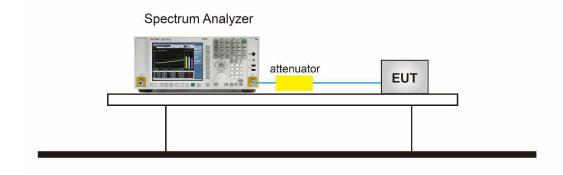






#### 9.4 MEASUREMENT RESULTS

# Test Graphs of Spurious Emissions in Non-Restricted Frequency Bands

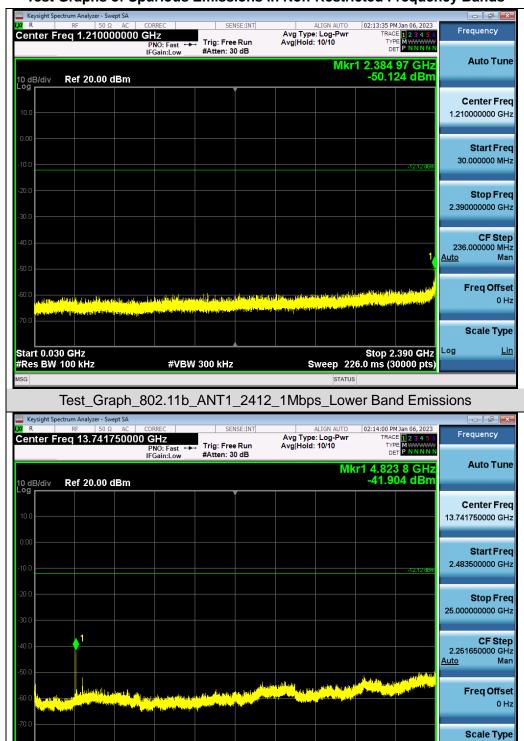

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Test\_Graph\_802.11b\_ANT1\_2412\_1Mbps\_Higher Band Emissions

**#VBW** 300 kHz

Log


Stop 25.00 GHz

Sweep 2.152 s (30000 pts)


Lin

Start 2.48 GHz


#Res BW 100 kHz





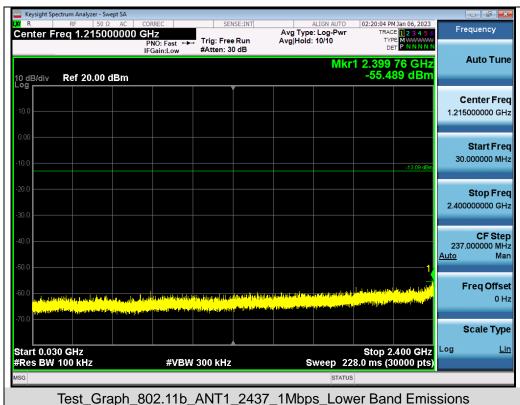



















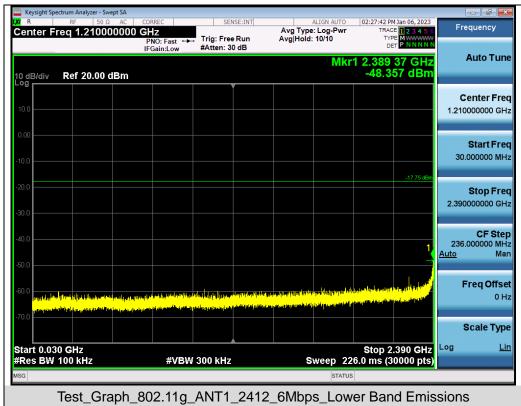







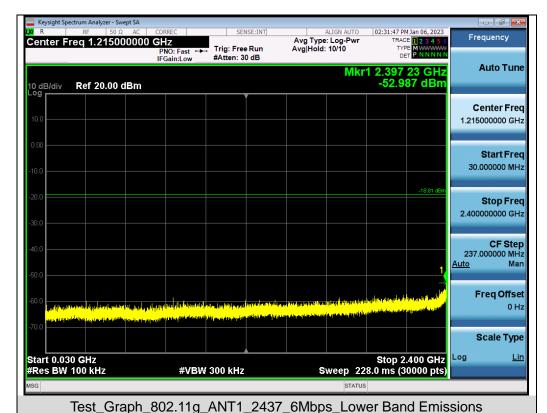







Test\_Graph\_802.11g\_ANT1\_2437\_6Mbps\_Higher Band Emissions


Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.






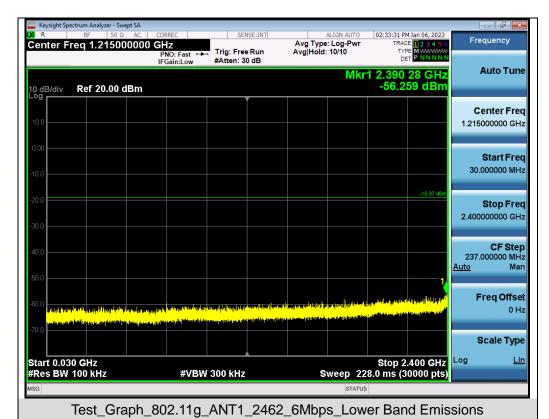









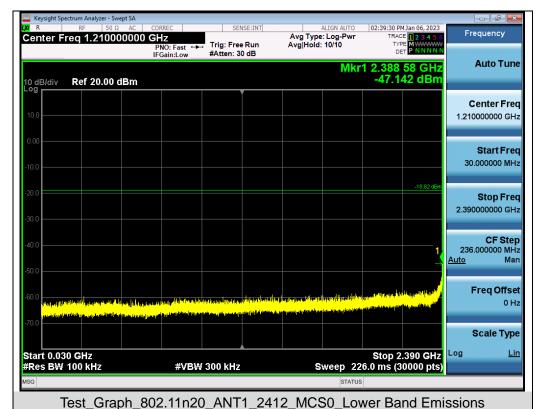








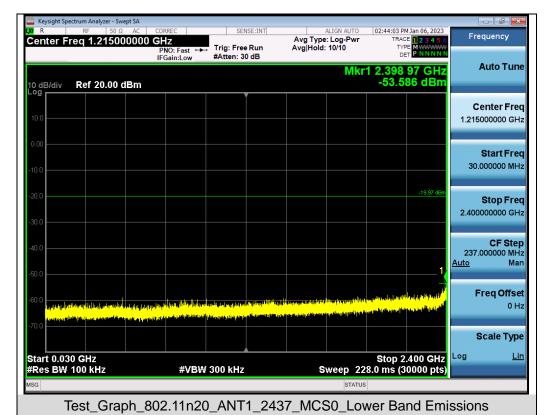


















07:57:57 AM Jan 08, 2023 Center Freq 13.741750000 GHz
PNO: Fast PIGain:Low Avg Type: Log-Pwr Avg|Hold: 10/10 Trig: Free Run #Atten: 30 dB **Auto Tune** Mkr1 24.973 0 GHz -50.157 dBm 10 dB/div Ref 20.00 dBm Center Freq 13.741750000 GHz Start Fred 2.483500000 GHz 25.000000000 GHz **CF Step** 2.251650000 GHz <u>Auto</u> Mar Freq Offset 0 Hz Scale Type Start 2.48 GHz #Res BW 100 kHz Stop 25.00 GHz Sweep 2.152 s (30000 pts) Log #VBW 300 kHz Test\_Graph\_802.11ax20\_ANT1\_2412\_MCS0\_Higher Band Emissions