

东莞市顶智电子科技有限公司
Dongguan Dingzhi Electronic Technology CO., Ltd.
承认书
Standards Document

Customer Name: DongGuan AnJu Electronic Technology Co.,Ltd

Customer PN: Y103000269

Material name: Earphone charging coil

Material specification: \ 43.5 * 0.8 mm, 6.3 uh, plus or minus 10%, 0.08 * 105 p silk covered wire, line length of 25 mm, 12 ts, top think tank

Supplier PN: TX-DZ43.505.3008-12T-K6.5-L25 (Double-slot)

Material name: Wireless charging coil

Material specification: Magnetic disc 43.5*5.3*0.8/ Coil 0.08*105P*12Ts/ line length 25mm/ back 43 round slot 3M glue, / sensitivity 6.5±10%

Brand:

Supplier PN:

Date	make	audit	approval	stamp
2023. 9. 22	钟建立 Zhong Jianli		马湘平 Ma Xiangping	

Please return to us one copy of "APPROVAL SHEET FOR SAMPLE" with you approved signature.

After confirmation, please sign and stamp and return a sample acknowledgement letter to our company.

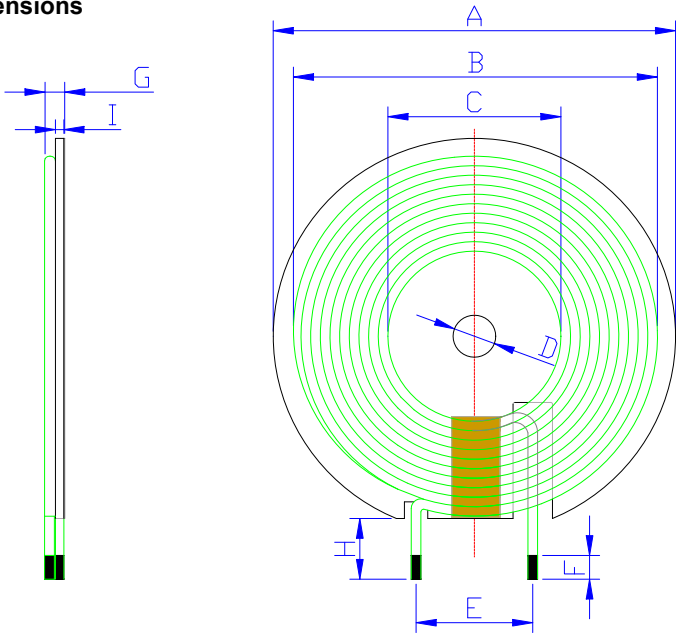
客户确认 Customer confirmation

Design department	R&D	Engineering	Quality department	stamp

Address: 7th Floor East of Building A, Xinbosheng Industrial Park, No.5 Xinyuan South Road, Tangxia Town, Dongguan City

TEL:13147097490

Product specification

Customer name	DongGuan AnJu Electronic Technology Co.,Ltd	Customer PN	Y103000269			
Dingzhi PN	TX-DZ43.505.3008-12T-K6.5-L25（开双槽）(Double slot)	Specification number		版本	01	
<div>◆ Overall dimensions</div> <div></div>			(单位: mm)			
			A	43.5 ±1.5		
			B	38.5 ±1.5		
			C	13.8 ±1.0		
			D	5.3 ±0.5		
			E	10.0 Ref		
			F	3.0 ±1.5		
			G	2.5 ±0.5		
			H	25.0 ±2.0		
			I	0.80 ±0.1(Disc thickness))		
			(1) Wire diameter: 0.08*105P silk-covered wire			
			(2) Winding number :12TS			
			(3) Whether the starting and ending lines cross: Yes			
			(4) Coil package 6mm wide high-temperature tape			
			(5) The coil and magnetic disc need to be pasted in the center			
			(6) The magnetic disc back 43 round slot 3M glue			
			◆、Electrical characteristic:			
Argument	specification	Test condition	ng instrument			
L0	6.5 ±10% μH	100KHz/1V	■TH1816B			
Q	>30 min	100KHz/1V	■TH1816B			
DCR	<90 mΩ	@ 25℃	■CH-502BC			
◆、temperature grade:						
erating temperatur	-40℃~ 125℃					
list of materials:						
NO	Name	aterial specificatio	supplier	remark		
1	Magnetic sheet	43.5*5.3*0.8T double-slotting	PC40 zinc			
2	Copper wire	0.08*105P	Acrylic copper silk-covered wire			
3	High-temperature tape	6MM	Eco-friendly adhesive tape			
4	glue	43 Round slotted 3M glue	Eco-friendly adhesive paper			
5	tin	107 h	Thousand island environmental tin			
6	glue	Yellow gum	Eco-friendly glue			
establishment		examine		Approval		
钟建立 Zhong Jianli				马湘平 Ma Xiangping		