



科信无线											
Frequency ID	1	2	3	4	5	6	7	8	9	10	11
Frequency (MHz)	2400.0	2410.0	2420.0	2430.0	2440.0	2450.0	2460.0	2470.0	2480.0	2490.0	2500.0
Efficiency (dBi)	-2.46	-2.53	-2.62	-2.74	-2.77	-2.69	-2.84	-2.95	-2.93	-2.95	-2.75
Gain (dBi)	2.63	2.46	2.54	2.56	2.68	2.85	2.70	2.63	2.41	2.22	2.31
Efficiency (%)	56.74	55.82	54.72	53.21	52.87	53.88	51.96	50.66	50.94	50.65	53.04
Directivity (dB)	5.09	4.99	5.15	5.30	5.45	5.54	5.54	5.48	5.34	5.18	5.06
Peak Gain Position (Theta)	152.00	136.00	136.00	136.00	137.00	137.00	137.00	137.00	137.00	137.00	137.00
Peak Gain Position (Phi)	144.00	39.00	40.00	40.00	39.00	39.00	40.00	40.00	41.00	41.00	42.00
Efficiency ThetaPol (%)	32.26	31.64	30.98	29.98	29.71	30.38	29.53	29.08	29.64	29.95	31.79
Efficiency PhiPol (%)	24.48	24.18	23.75	23.23	23.16	23.50	22.43	21.58	21.31	20.70	21.25
Upper Hem. Efficiency (%)	22.39	22.43	22.07	21.75	21.78	22.36	21.83	21.08	22.48	24.10	
Lower Hem. Efficiency (%)	34.15	33.39	32.65	31.46	31.09	31.52	30.13	29.04	28.87	28.17	28.94
T90(H)	4.90	4.97	5.12	5.34	5.76	6.09	5.98	5.79	5.72	5.48	5.11
Gain 15deg (dBi)	26.00	24.00	24.00	23.00	23.00	23.00	24.00	23.00	23.00	23.00	23.00
E1(XZ)	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
E2(YZ)	60.00	56.00	55.00	57.00	75.00	76.00	87.00	91.00	92.00	92.00	91.00
E2(YZ)	0.90	1.26	1.49	1.68	1.89	1.88	1.73	1.44	1.23	1.11	1.16
Maximum benefit axis ratio(P)	1.50	1.50	1.50	1.50	1.50	1.50	1.50	1.50	1.50	1.50	1.50
Elevation 10 degrees worst (large) axis ratio(P)	1.50	1.50	1.50	1.50	1.50	1.50	1.50	1.50	1.50	1.50	1.50
Hc(XY)Lobe width	120.00	119.00	121.00	121.00	121.00	122.00	125.00	128.00	132.00	132.00	132.00
Hc(XY)Front-to-back ratio	1.17	1.34	1.56	1.76	1.84	1.70	1.48	1.21	0.90	0.82	0.87
Empty											

Model: JB24G0001-1

Shenzhen Kexin Wireless Technology Co., Ltd.

301, building h, hongyongli Industrial Zone, shabeili, Longxin community, Baolong street, Longgang District, Shenzhen, China

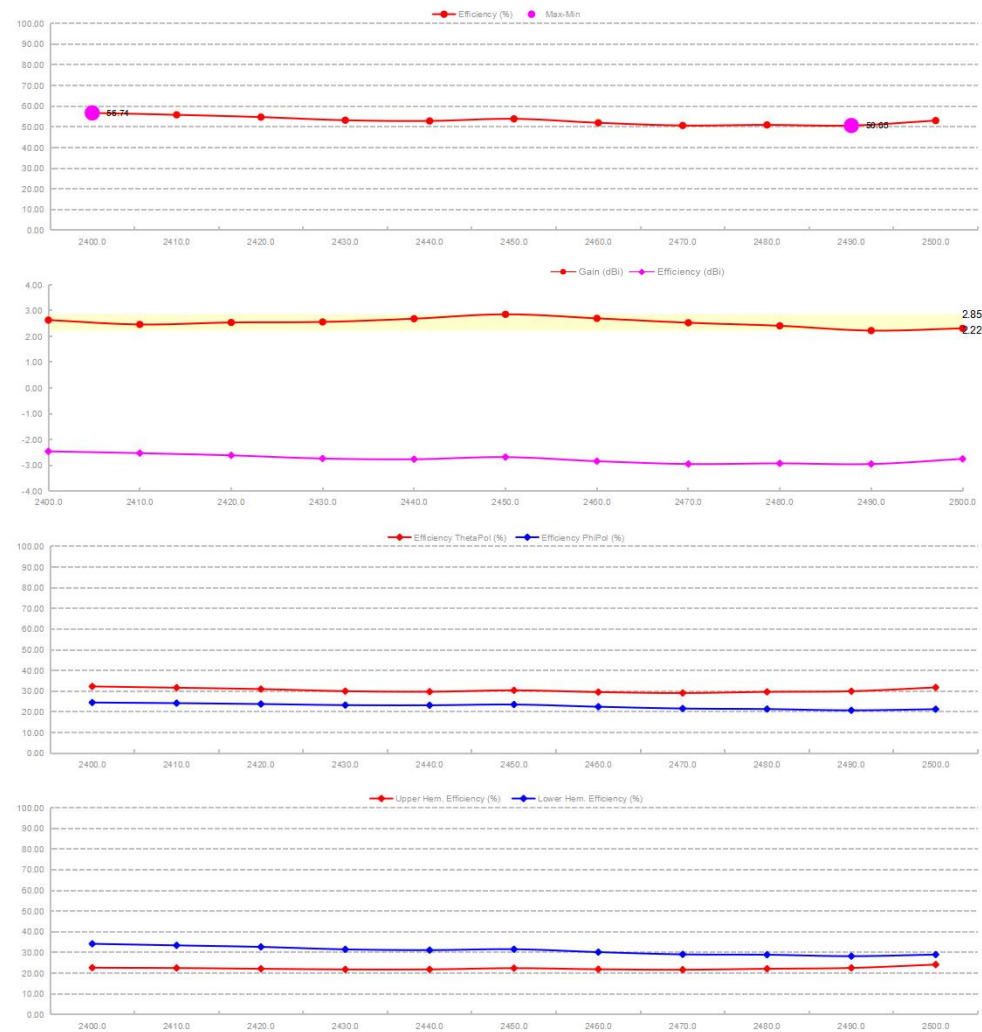

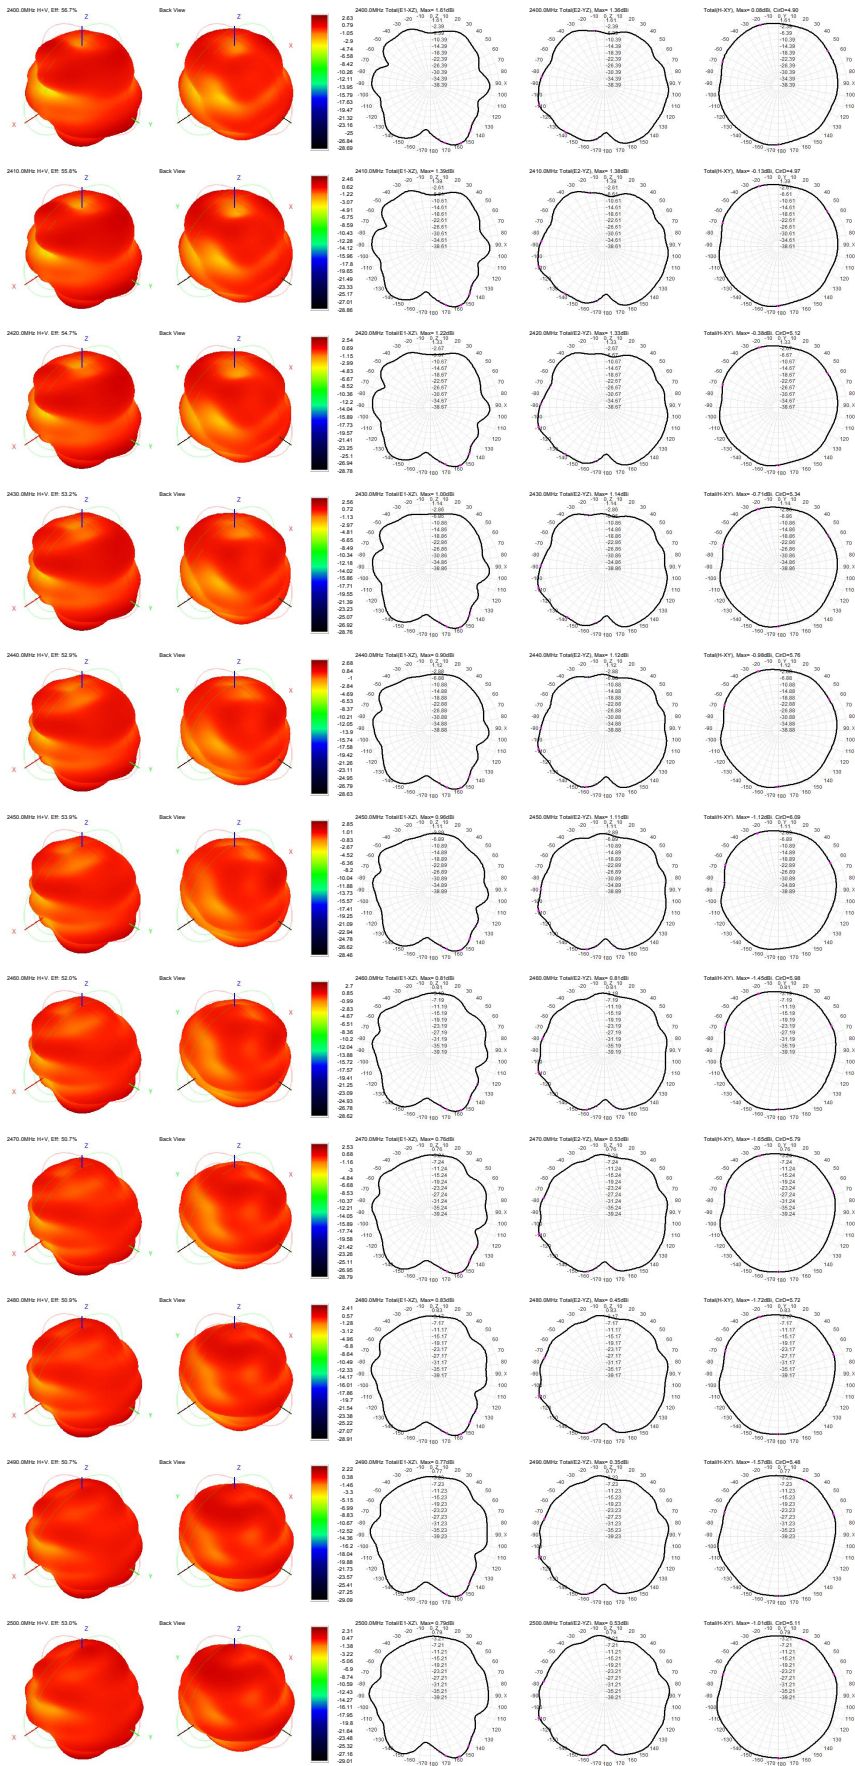

3、产品规格图【5CM/2. 4G 内孔弯头天线】

