

Shaanxi ShengKe Electronic Technology Co., Ltd

RF TEST REPORT

Report Type:

FCC Part 15.256 RF report

Model:

SK-R800N

REPORT NUMBER:

2409B0616SHA-001

ISSUE DATE:

January 15, 2025

DOCUMENT CONTROL NUMBER:

TTRF15.256-01_V1 © 2023 Intertek



Applicant: Shaanxi ShengKe Electronic Technology Co., Ltd
Room 1911, Junminronghe Building, No25 Fazhan Road , Gaoxin zone

Manufacturer: Shaanxi ShengKe Electronic Technology Co., Ltd
Room 1911, Junminronghe Building, No25 Fazhan Road , Gaoxin zone

Manufacturer Site: Shaanxi ShengKe Electronic Technology Co., Ltd
Room 1911, Junminronghe Building, No25 Fazhan Road , Gaoxin zone

Product Name: 80GHz Radar Level Sensor

Type/Model: SK-R800N

FCC ID: 2BK46SK-R800N


SUMMARY:

The equipment complies with the requirements according to the following standard(s) or Specification:

47CFR Part 15 (2023): Radio Frequency Devices (Subpart C)

ANSI C63.10 (2020): American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices

PREPARED BY:



Project Engineer
Dylan Tang

REVIEWED BY:



Reviewer
Wakeyou Wang

This report is for the exclusive use of Intertek's Client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Client is authorized to permit copying or distribution of this report and then only in its entirety. Any use of the Intertek name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. The observations and test results in this report are relevant only to the sample tested. This report by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program.

TEST REPORT

Content

REVISION HISTORY	4
MEASUREMENT RESULT SUMMARY	5
1 GENERAL INFORMATION	6
1.1 DESCRIPTION OF EQUIPMENT UNDER TEST (EUT)	6
1.2 TECHNICAL SPECIFICATION	6
1.3 DESCRIPTION OF TEST FACILITY	7
2 TEST SPECIFICATIONS	8
2.1 STANDARDS OR SPECIFICATION	8
2.2 MODE OF OPERATION DURING THE TEST	8
2.3 TEST SOFTWARE LIST	8
2.4 TEST PERIPHERALS LIST	8
2.5 TEST ENVIRONMENT CONDITION	8
2.6 INSTRUMENT LIST	10
2.7 MEASUREMENT UNCERTAINTY	11
3 FUNDAMENTAL EMISSIONS	12
3.1 LIMIT	12
3.2 MEASUREMENT PROCEDURE	12
3.3 TEST CONFIGURATION	15
3.4 TEST RESULTS OF RADIATED EMISSIONS	16
4 UNWANTED EMISSIONS	17
4.1 LIMIT	17
4.2 MEASUREMENT PROCEDURE	17
4.3 TEST CONFIGURATION	19
4.4 TEST RESULTS OF RADIATED EMISSIONS	21
5 FREQUENCY STABILITY	25
5.1 LIMIT	25
5.2 TEST RESULT	25
6 ANTENNA BEAMWIDTH AND ANTENNA SIDE LOBE GAIN	26
6.1 LIMIT	26
6.2 TEST CONFIGURATION	26
6.3 MEASUREMENT PROCEDURE	27
6.4 TEST RESULTS	28
7 FUNDAMENTAL BANDWIDTH	29
7.1 LIMIT	29
7.2 MEASUREMENT PROCEDURE	29
7.3 TEST CONFIGURATION	29
7.4 THE RESULTS	30
8 ANTENNA REQUIREMENT	31

Revision History

Report No.	Version	Description	Issued Date
2409B0616SHA-001	Rev. 01	Initial issue of report	January 15, 2025

Measurement result summary

TEST ITEM	FCC REFERENCE	RESULT
Fundamental emissions	15.256(g)	Pass
Unwanted Emissions	15.256(h)&15.209	Pass
Antenna beamwidth	15.255(i)	Pass
Fundamental bandwidth	15.256 (f) (1) (2)	Pass
Frequency Stability	15.215 (c)	Pass
Antenna requirement	15.203	Pass

Notes: 1: NA =Not Applicable

1 GENERAL INFORMATION

1.1 Description of Equipment Under Test (EUT)

Product name:	80GHz Radar Level Sensor
Type/Model/PMN/HVIN:	SK-R800N
Description of EUT:	The EUT is a 80GHz Radar Level Sensor, it supports 80G Radar functions, there is only one model. We test and list the worst results in this report.
Rating:	DC 24V
EUT type:	<input checked="" type="checkbox"/> Table top <input type="checkbox"/> Floor standing
Software Version:	vx11
Hardware Version:	SK-LR-P21-V2.1.0
Sample received date:	September 20, 2024
Date of test:	September 20, 2024 ~ December 10, 2024

1.2 Technical Specification

Frequency Range:	76000MHz ~ 81000MHz
Type of Modulation:	FMCW
Channel Number:	1
Antenna Information:	Lens Horn antenna
Antenna Gain	30.3 dBi

1.3 Description of Test Facility

Name:	Intertek Testing Services (Shanghai FTZ) Co., Ltd.
Address:	Building 86, No. 1198 Qinzhou Road(North), Shanghai 200233, P.R. China
Telephone:	86 21 61278200
Telefax:	86 21 54262353

The test facility is recognized, certified, or accredited by these organizations:	CNAS Accreditation Lab Registration No. CNAS L21189
	FCC Accredited Lab Designation Number: CN0175
	IC Registration Lab CAB identifier.: CN0014
	VCCI Registration Lab Registration No.: R-4243, G-845, C-4723, T-2252
	NVLAP Accreditation Lab NVLAP LAB CODE: 200849-0
	A2LA Accreditation Lab Certificate Number: 3309.02

2 TEST SPECIFICATIONS

2.1 Standards or specification

47CFR Part 15 (2023)
ANSI C63.10 (2020)
KDB 890966 D01 V01r01

2.2 Mode of operation during the test

The channel was tested as representatives.

Frequency Band (MHz)				76000 ~ 81000			
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	79000	-	-	-	-	-	-

2.3 Test software list

Test Items	Software	Manufacturer	Version
Conducted emission	ESxS-K1	R&S	V2.1.0
Radiated emission	ES-K1	R&S	V1.71

2.4 Test peripherals list

Item No.	Name	Band and Model	Description
1	DC REGULATED POWER SUPPLY	QJE/QJ3003H	0-30V, 0-3A

2.5 Test environment condition:

Test items	Temperature	Humidity
Fundamental emissions	22°C	55% RH
Unwanted Emissions		

Antenna beamwidth		
Fundamental bandwidth		
Frequency Stability		
Antenna requirement		
Power line conducted emission	21°C	52% RH

TEST REPORT

2.6 Instrument list

Radiated Emission					
Used	Equipment	Manufacturer	Type	Internal no.	Due date
<input checked="" type="checkbox"/>	Test Receiver	R&S	ESIB 26	EC 3045	2025-08-18
<input checked="" type="checkbox"/>	Test Receiver	R&S	ESR	EC6501	2025-09-10
<input checked="" type="checkbox"/>	PXA Signal Analyzer	Keysight	N9030A	EC 5338	2025-03-05
<input checked="" type="checkbox"/>	Bilog Antenna	TESEQ	CBL 6112B	EC 6411	2025-09-11
<input type="checkbox"/>	Pre-amplifier	R&S	AFS42-00101800-25-S-42	EC 5262	2025-11-06
<input checked="" type="checkbox"/>	Pre-amplifier	Tonscend	tap01018050	EC 6432-1	2025-12-03
<input checked="" type="checkbox"/>	Horn antenna	Tonscend	bha9120d	EC 6432-2	2025-03-20
<input checked="" type="checkbox"/>	Horn antenna	ETS	3116c	EC 5955	2025-08-14
<input checked="" type="checkbox"/>	WW wave antenna (40-60G)	HengDa	M19RH	EC 6529-1	2025-03-09
<input checked="" type="checkbox"/>	Mixer (40-60G)	VDi		EC 6529-2	2026-03-05
<input checked="" type="checkbox"/>	WW wave antenna (60-90G)	HengDa	M12RH	EC 6382-1	2025-03-14
<input checked="" type="checkbox"/>	Mixer (60-90G)	VDi		EC 6382-2	2026-03-05
<input checked="" type="checkbox"/>	WW wave antenna (90-140G)	HengDa	M15RH	EC 6383-1	2025-03-12
<input checked="" type="checkbox"/>	Mixer (90-140G)	VDi		EC 6383-2	2026-03-05
<input checked="" type="checkbox"/>	WW wave antenna (140-220G)	HengDa	M5RH	EC 6384	2025-03-27
<input checked="" type="checkbox"/>	Mixer (140-220G)	VDi		EC 6384-1	2026-03-05
<input checked="" type="checkbox"/>	Semi-anechoic chamber	Albatross project	-	EC 3048	2026-07-11
Additional instrument					
Used	Equipment	Manufacturer	Type	Internal no.	Due date
<input checked="" type="checkbox"/>	Therom-Hygrograph	Testo	175h1	EC 6640	2025-08-29
<input checked="" type="checkbox"/>	Pressure meter	YM3	Shanghai Mengde	EC 3320	2025-08-16

2.7 Measurement uncertainty

The measurement uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

Test item	Measurement uncertainty
Maximum peak output power	$\pm 0.74\text{dB}$
Radiated Emissions in restricted frequency bands below 1GHz	$\pm 4.90\text{dB}$
Radiated Emissions in restricted frequency bands above 1GHz	$\pm 5.02\text{dB}$
Emission outside the frequency band	$\pm 2.89\text{dB}$

3 Fundamental Emissions

Test result: Pass

3.1 Limit

The EIRP limits for LPR operations in the bands authorized by this rule section are provided below. The emission limits are based on boresight measurements (i.e., measurements performed within the main beam of an LPR antenna).

Frequencies (GHz)	Average emission limit (EIRP in dBm/1 MHz)	Peak emission limit (EIRP in dBm/50 MHz)
5.925 ~ 7.250	-33	7
24.05 ~ 29.00	-14	26
75 ~ 85	-3	34

3.2 Measurement Procedure

For Radiated emission above 1000MHz:

- The measurements were performed at 3m test site.
- The EUT is placed on a non-conductive table is 1.6 meter above test site ground plane.
- The measurement procedure described in ANSI C63.10-2013 Section 9.9 was followed, to find maximum signal.
- The average and peak voltages was recorded from the DSO.
- Replace the EUT with mm-wave source to the RF input port of the instrumentation system.
- The mm-wave source is unmodulated.
- Adjust the amplitude of the mm-wave source such that the DSO indicates a voltage equal to the peak voltage recorded in step 4).
- Without changing any settings, replace the DSO with the mm-wave power meter.
- Measure and note the power.

Analyzer settings (EIRP in 1 MHz):

- Resolution Bandwidth (RBW): 1 MHz
- Video Bandwidth (VBW): 3 MHz
- Span: 8 GHz
- Trace: Maxhold
- Sweeps: allow the trace to stabilize
- Sweep time: $TD = Ts / \Delta F$ (where Ts is the signal sweep frequency time in seconds; ΔF is the signal sweep frequency in MHz)
- Detector: Peak

Analyzer settings (EIRP in 50 MHz):

- Resolution Bandwidth (RBW): 50 MHz
- Video Bandwidth (VBW): 50 MHz
- Span: 8 GHz

TEST REPORT

- d) Trace: Maxhold
- e) Sweeps: allow the trace to stabilize
- f) Sweep time: $TD = T_s / \Delta F$ (where T_s is the signal sweep frequency time in seconds; ΔF is the signal sweep frequency in MHz)
- g) Detector: Peak

Fundamental emission for Pulsed Transmitters

1. For radiated emission measurements, locate the receive test antenna at a far field distance boresighted on the LPR transmit antenna. Adjust the LPR and the test antenna for maximum main beam coupling.
2. For conducted measurements, connect the output of the LPR transmitter through an appropriate attenuator to the downconverter or external harmonic mixer, if necessary, to the spectrum analyzer.
3. Set the spectrum analyzer for power averaging (RMS) detector and 1 MHz RBW.
4. Record the maximum level and frequency of the signal within the fundamental emission bandwidth, which must be contained entirely within the authorized frequency band.
5. Centered on the frequency of the maximum signal recorded in step 4, select peak detector, 50 MHz RBW and at least 50 MHz VBW. a. If 50 MHz RBW is not available on the spectrum analyzer, determine the maximum of the spectrum trace in a narrower RBW which is greater than or less than the PRF by a factor of 3, but not less than 1 MHz, and calculate the maximum signal level in 50 MHz by adding the appropriate correction factor shown below to the maximum measured signal level. For pulsed LPRs

20 Log (50/RBW) dB, if $PRF < RBW/3$

20 Log (50/PRF) dB, if $PRF > 3 \cdot RBW$

where:

RBW is the resolution bandwidth in MHz

PRF is the pulse repetition frequency in MHz

b. It may be necessary to offset the measurement frequency in order to ensure that the measurement is made within the fundamental emission bandwidth because the 3 dB bandwidth of the RBW is not entirely within the fundamental emission bandwidth. The measurement shall be made at the nearest frequency to the frequency identified in step 4 when the 3 dB point of the RBW closest to the fundamental emission band edge is at the frequency of the band edge.

c. If the measurement must be performed with a RBW greater than 3 MHz because the PRF is between 1 MHz and 3 MHz or for any other reason, the test report must contain a detailed description of the test procedure, calibration of the test setup, and the instrumentation used.

6. Determine the conducted power output of the EUT or the field strength produced by the EUT at a given distance from the measurements in steps 1 to 5 by calculation taking into account all attenuators, amplifier gains, antenna factor, measurement distance extrapolation, conversion loss, cable losses, etc. as applicable or the signal substitution method.

7. The EIRP is then calculated by applying the appropriate equation as follows: a. For conducted measurements $EIRP \text{ (dBm)} = \text{conducted power (dBm)} + \text{antenna gain (dBi)}$ where the conducted power is the conducted power output of the EUT and antenna gain is the gain of the EUT antenna.

b. For radiated emission measurements $EIRP \text{ (dBm)} = E \text{ (dB}\mu\text{V/m)} - 104.8 + 20 \text{ Log } D$ where E is the field

TEST REPORT

strength at the far field distance D.

Fundamental Emissions for FMCW transmitters

When making the following measurements, it is important to recognize that there is a sweep frequency time and sweep frequency span for both the LPR signal and the spectrum analyzer which are independent of each other.

1. For radiated emission measurements, locate the receive test antenna at a far field distance boresighted on the LPR transmit antenna. Adjust the LPR and the test antenna for maximum main beam coupling.
2. For conducted measurements, connect the output of the LPR transmitter through an appropriate attenuator to the downconverter or external harmonic mixer, if necessary, to the spectrum analyzer.
3. Set the spectrum analyzer frequency span to enable viewing the entire sweep frequency span of the LPR signal.
4. Calculate the dwell time, TD, of the sweep frequency signal per MHz of the sweep frequency span
$$TD = TS/\Delta F$$
where:
TS is the signal sweep frequency time in seconds
 ΔF is the signal sweep frequency span in MHz
5. Set the detector to peak mode.
6. Set the RBW to 1 MHz.
7. Perform sufficient multiple scans on the spectrum analyzer in maximum hold with a sweep time suitable for displaying the variation in the signal level over the frequency span.
8. Record the maximum signal level. This is the peak value of the LPR signal.
9. Calculate the average factor

Average factor = (TD) / cycle time

where:


cycle time is the total time for a complete cycle of the signal including retrace and any other latency times.

10. Determine the average by multiplying the maximum signal level obtained in Step 8 by the average factor.
11. Determine the conducted power output of the EUT or the field strength produced by the EUT at a given distance from the measurements in steps 1 to 10 by calculation taking into account all attenuators, amplifier gains, antenna factor, measurement distance extrapolation, conversion loss, cable losses, etc. as applicable or the signal substitution method.
12. The EIRP is then calculated by applying the appropriate equation as follows:
 - a. For conducted measurements $EIRP \text{ (dBm)} = \text{conducted power (dBm)} + \text{antenna gain (dBi)}$ where the conducted power is the conducted power output of the EUT and antenna gain is the gain of the EUT antenna.
 - b. For radiated emission measurements $EIRP \text{ (dBm)} = E \text{ (dB}\mu\text{V/m)} - 104.8 + 20 \text{ Log D}$

where E is the field strength at the far field distance D.

3.3 Test Configuration

For Radiated emission above 40GHz:

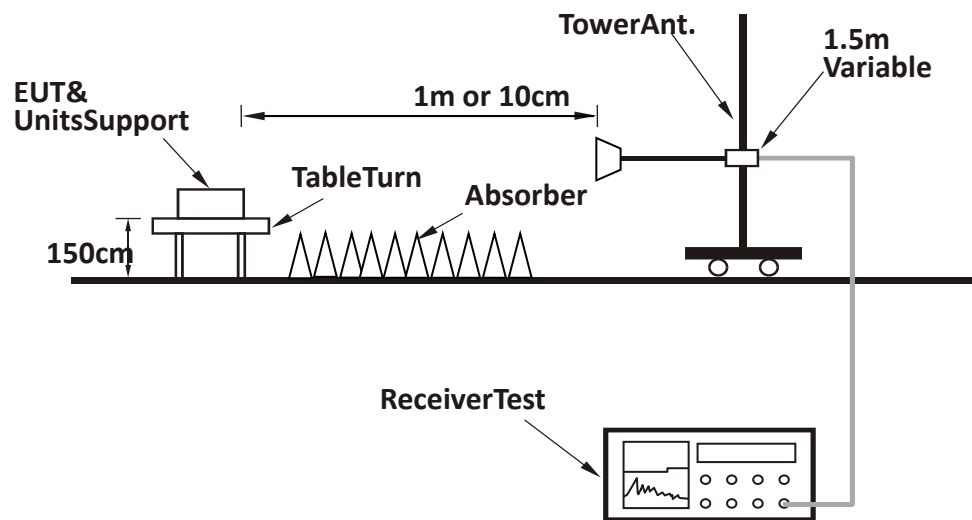

3.4 Test Results of Radiated Emissions

Peak Power(e.i.r.p)

Frequency (GHz)	P (dBm)	G (dBi)	E (dBμV/m)	d- Meas (m)	Desensitization factor (dB)	EIRP@8M (dBm)	EIRP@50M (dBm)	Limit (dBm)
78.36	-38.93	23.42	112.789	1	0.35	8.44	24.44	34

Note.

1. Sample calculation.

$$E = 126.8 - 20\log(\lambda) + P - G$$

where

E is the field strength of the emission at the measurement distance, in dBμV/m

P is the power measured at the output of the test antenna, in dBm

λ is the wavelength of the emission under investigation [300/fMHz], in m

G is the gain of the test antenna, in dBi

$$EIRP = E_{Meas} + 20\log(d_{Meas}) - 104.7 + \text{Desensitization factor}$$

where

EIRP is the equivalent isotropically radiated power, in dBm

E_{Meas} is the field strength of the emission at the measurement distance, in dBμV/m

d_{Meas} is the measurement distance, in m

$$\text{FMCW desensitization factor} = -20 * \log(\alpha) = 0.35\text{dB}$$

$$\alpha = \frac{1}{\sqrt[4]{1 + \left(\frac{2\ln(2)}{\pi}\right)^2 \left(\frac{F_s}{T_s B^2}\right)^2}}$$

$$F_s = \text{Sweep width} = 4065.7\text{MHz}$$

$$T_s = \text{Sweep time} = 4560 \mu\text{s}$$

$$B = 3 \text{ dB IF bandwidth} = 8\text{MHz}$$

Average Power(e.i.r.p):

Frequency (GHz)	ERIP (dBm)	Average Factor (dB)	ERIP (dBm)	Limit (dBm)
76.98	6.36	-60.64	-54.28	-3.0

Note.

$$\text{Frequency Sweep Time } T_s = 4560 \mu\text{s}$$

$$\text{Signal Sweep Frequency Span } \Delta F = 4065.7 \text{ MHz}$$

$$\text{Re-trace Time} = 1.295\text{s}$$

$$\text{Total-cycle Time} = 1.3\text{s}$$

$$\text{Average-Factor} = -60.64 \text{ dB}$$

$$\text{Average factor} = (\text{sweep freq.time/sweep span in MHz})/\text{cycle time}$$

4 Unwanted emissions

Test result: Pass

4.1 Limit

The radiated emissions which fall in the restricted bands, must also comply with the radiated emission limits specified showed as below:

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

4.2 Measurement Procedure

For Radiated emission below 30MHz:

- The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter chamber room. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- Both X and Y axes of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to Quasi-Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

NOTE:

- The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 9kHz at frequency below 30MHz.

For Radiated emission above 30MHz:

- The EUT was placed on the top of a rotating table 0.01 meters (for 30MHz ~ 1GHz) / 1.5 meters (for above 1GHz) above the ground at 3 meter chamber room for test. The table was rotated 360

TEST REPORT

degrees to determine the position of the highest radiation.


- k) The EUT was set 3 or 1 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- l) The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- m) For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- n) The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- o) The test-receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.

Note:


- 1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection (QP) at frequency below 1GHz.
- 2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) at frequency above 1GHz.
- 3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is $\geq 1/T$ (Duty cycle $< 98\%$) or $3 \times \text{RBW}$ (Duty cycle $\geq 98\%$) for Average detection (AV) at frequency above 1GHz.
- 4. All modes of operation were investigated and the worst-case emissions are reported

4.3 Test Configuration


For Radiated emission below 30MHz:

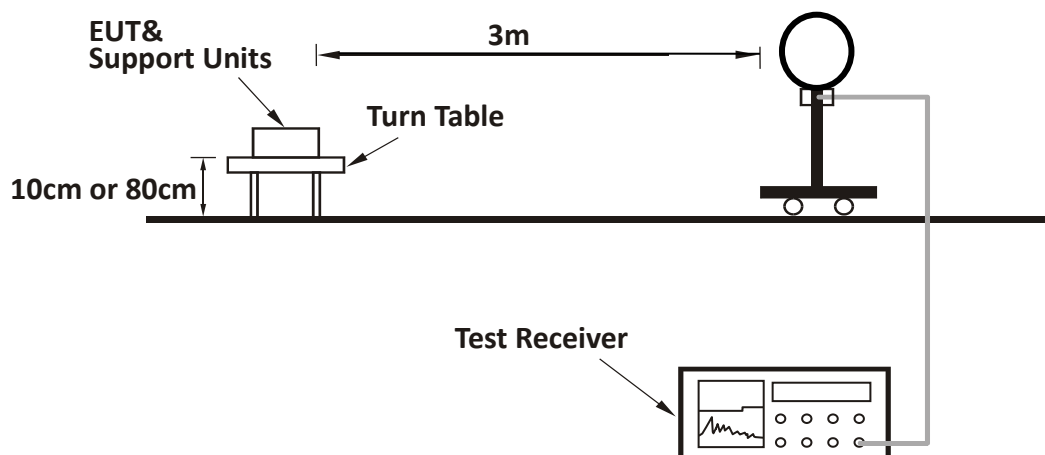


For Radiated emission 30MHz to 1GHz:

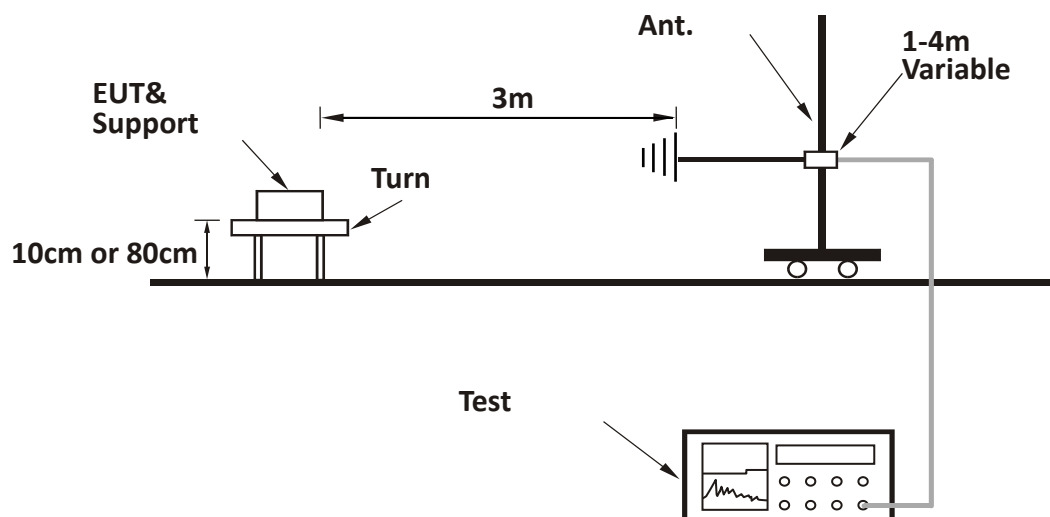

For Radiated emission 1GHz to 40GHz:

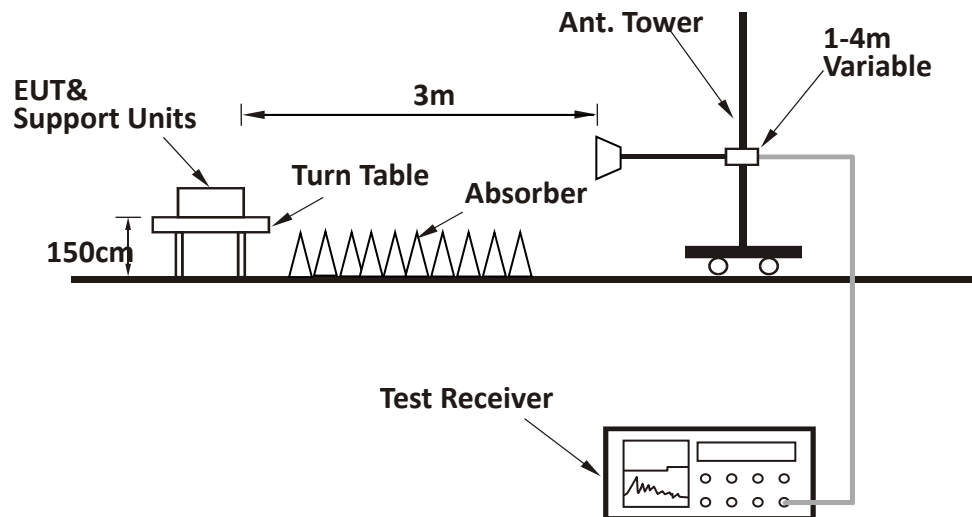

For Radiated emission above 40GHz:


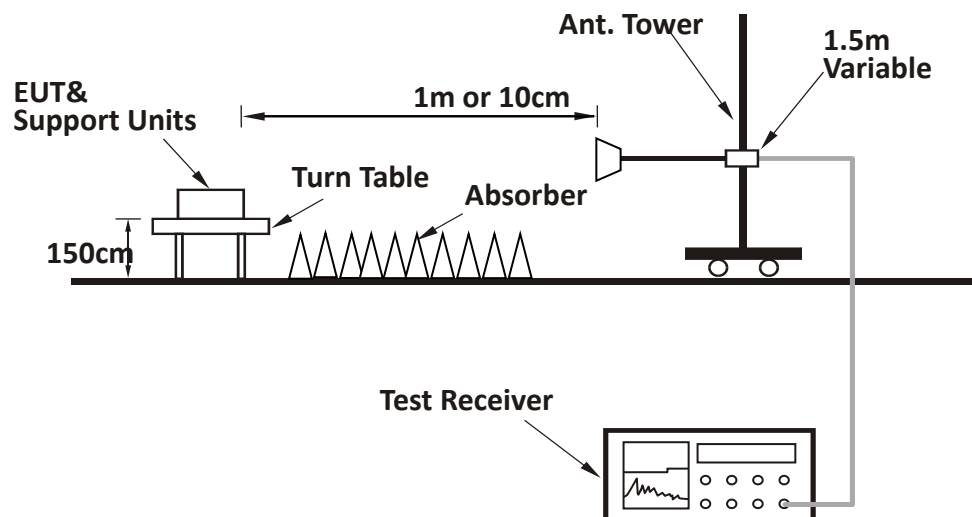


TEST REPORT

4.4 Test Results of Radiated Emissions

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line per 15.31(o) was not reported.

The worst waveform from 30MHz to 1000MHz is listed as below:

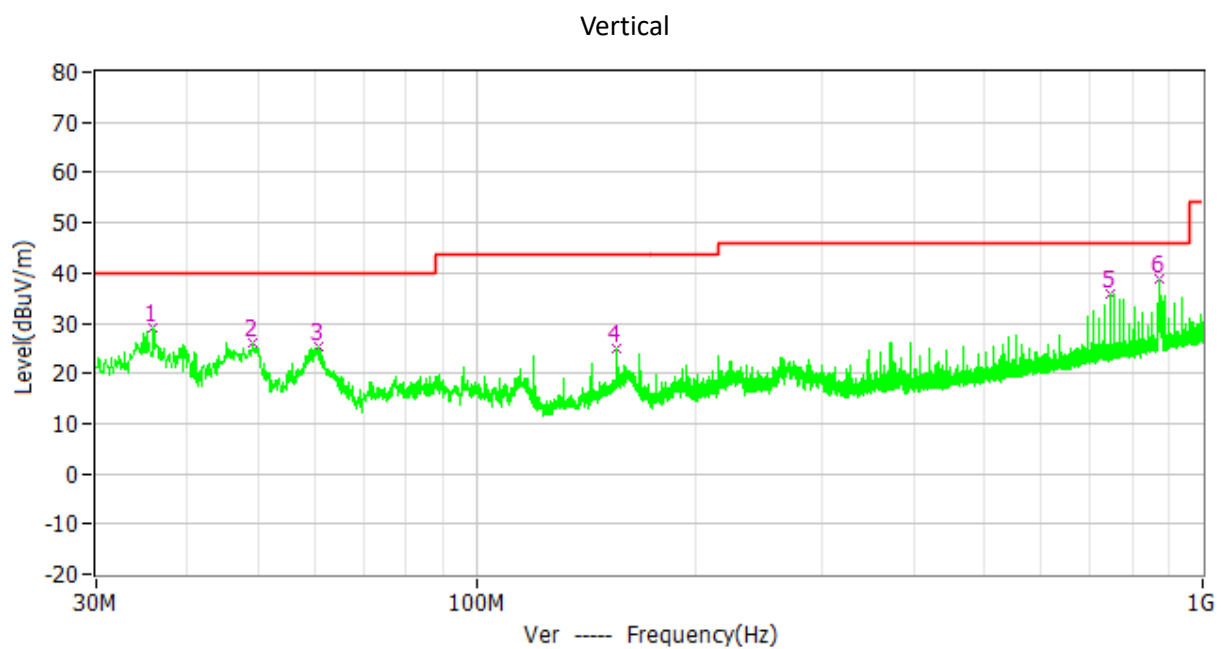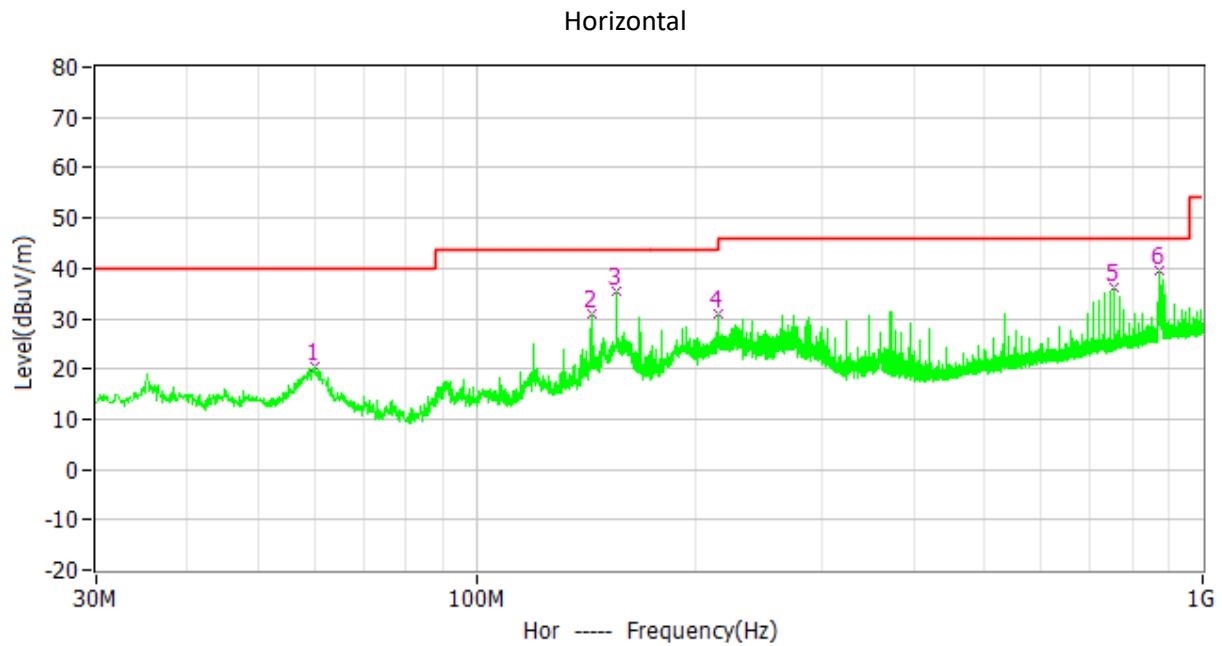

TEST REPORT

Test data below 1GHz

Antenna	Frequency (MHz)	Corrected Reading (dBuV/m)	Correct Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector
H	59.973	20.40	13.85	40.00	19.60	QP
H	143.975	30.81	14.29	43.50	12.69	QP
H	156.003	35.47	14.70	43.50	8.03	QP
H	215.949	30.89	12.19	43.50	12.61	QP
H	756.142	36.00	25.04	46.00	10.00	QP
H	869.147	39.50	26.73	46.00	6.50	QP
V	35.917	29.00	13.23	40.00	11.00	QP
V	49.109	26.20	14.51	40.00	13.80	QP
V	60.555	25.31	13.77	40.00	14.69	QP
V	156.003	25.10	14.70	43.50	18.40	QP
V	744.211	35.74	24.84	46.00	10.26	QP
V	869.147	38.63	26.73	46.00	7.37	QP

The emission was conducted from 1GHz to 40GHz

Antenna	Frequency (MHz)	Corrected Reading (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
H	6826	41.23	74.00	32.77	PK
H	6826	29.28	54.00	24.72	AV
H	9790	41.54	74.00	32.46	PK
H	9790	28.56	54.00	25.44	AV
H	12856	42.15	74.00	31.85	PK
H	12856	29.83	54.00	24.17	AV
H	18680	58.26	74.00	15.74	PK
H	18680	46.64	54.00	7.36	AV
H	38218	53.98	74.00	20.02	PK
H	38218	38.71	54.00	15.29	AV
V	6962	40.77	74.00	33.23	PK
V	6962	28.88	54.00	25.12	AV
V	9790	41.45	74.00	32.55	PK
V	9790	28.74	54.00	25.26	AV
V	13503	42.02	74.00	31.98	PK
V	13503	29.42	54.00	24.58	AV
V	18660	59.34	74.00	14.66	PK

TEST REPORT

V	18660	46.93	54.00	7.07	AV
V	38592	52.57	74.00	21.43	PK
V	38592	38.84	54.00	15.16	AV

Remark: 1. Correct Factor = Antenna Factor + Cable Loss (- Amplifier, for higher than 1GHz), the value was added to Original Receiver Reading by the software automatically.
2. Corrected Reading = Original Receiver Reading + Correct Factor
3. Margin = Limit - Corrected Reading
4. If the PK Corrected Reading is lower than AV limit, the AV test can be elided.

Example: Assuming Antenna Factor = 30.20dB/m, Cable Loss = 2.00dB,
Gain of Preamplifier = 32.00dB, Original Receiver Reading = 10.00dBuV,
Limit = 40.00dBuV/m.
Then Correct Factor = 30.20 + 2.00 – 32.00 = 0.20dB/m;
Corrected Reading = 10dBuV + 0.20dB/m = 10.20dBuV/m;
Margin = 40.00dBuV/m - 10.20dBuV/m = 29.80dB.

The emission was conducted from 40GHz to 220GHz

Antenna	Frequency (GHz)	E (dBμV/m)	Limit (dBuV/m)	Margin (dB)	Detector
H	57280	65.33	74.00	8.67	PK
H	57280	50.07	54.00	3.93	AV
H	60240	66.92	74.00	7.08	PK
H	60240	50.62	54.00	3.38	AV
H	123250	70.41	74.00	3.59	PK
H	123250	51.64	54.00	2.36	AV
H	197440	72.07	74.00	1.93	PK
H	197440	52.95	54.00	1.05	AV
V	57150	64.05	74.00	9.95	PK
V	57150	49.88	54.00	4.12	AV
V	60360	65.73	74.00	8.27	PK
V	60360	49.95	54.00	4.05	AV
V	123220	69.86	74.00	4.14	PK
V	123220	50.89	54.00	3.11	AV
V	198210	71.59	74.00	2.41	PK
V	198210	52.02	54.00	1.98	AV

Remark: 1. Correct Factor = Antenna Factor + Cable Loss + Mixer Conversion Loss, the value was added to Original Receiver Reading by the software automatically.
2. Sample calculation.
 $E = 126.8 - 20\log(\lambda) + P - G$
where
E is the field strength of the emission at the measurement distance, in dBμV/m
P is the power measured at the output of the test antenna, in dBm

λ is the wavelength of the emission under investigation [300/fMHz], in m

G is the gain of the test antenna, in dBi

5 Frequency stability

Test result: Pass

5.1 Limit

Fundamental emissions must be contained within the frequency bands specified in this section during all conditions of operation. Equipment is presumed to operate over the temperature range -20 to + 50 degrees Celsius with an input voltage variation of 85% to 115% of rated input voltage, unless justification is presented to demonstrate otherwise.

5.2 Test Result

VOLTAGE (%)	POWER (V DC)	TEMP (°C)	Tested Frequency: 79 GHz	
			Measured low frequency(FL) (GHz)	Measured High frequency(FH) (GHz)
100%	24.0	-20	76.93205	80.99762
100%		-10	76.93198	80.99755
100%		0	76.93212	80.99802
100%		+10	76.93202	80.99758
100%		+20	76.93206	80.99769
100%		+30	76.93201	80.99755
100%		+40	76.93255	80.99795
100%		+50	76.93261	80.99801
115%	27.6	+20	76.93199	80.99728
85%	20.4	+20	76.93208	80.99792

Note: Fundamental emissions were contained within the frequency bands

6 Antenna Beamwidth and Antenna Side Lobe Gain

Test result: Pass


6.1 Limit

LPR devices operating under the provisions of this section within the 5.925-7.250 GHz and 24.05-29.00 GHz bands must use an antenna with a -3 dB beamwidth no greater than 12 degrees.

LPR devices operating under the provisions of this section within the 75-85 GHz band must use an antenna with a -3 dB beamwidth no greater than 8 degrees.

Frequency range (GHz)	Antenna sidelobe gain limit relative to main beam gain (dB)
5.925-7.250	-22
24.05-29.00	-27
75-85	-38

6.2 Test Configuration

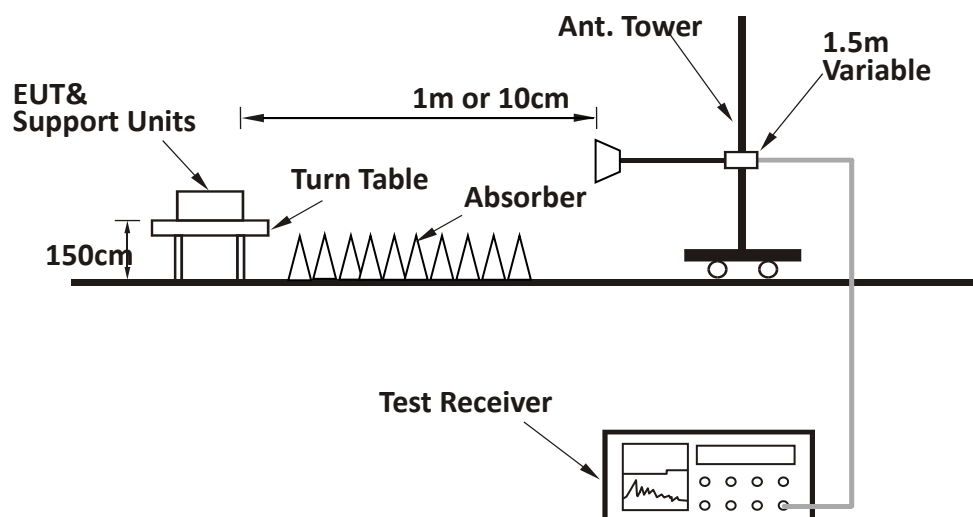

6.3 Measurement Procedure

1) The EUT was placed on the top of a rotating table 0.01 meters (for 30MHz ~ 1GHz) / 1.5 meters (for above 1GHz) above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.

2) The EUT was set 3 or 1 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.

3) The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.


4) For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1.5 meter and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.

5) The test-receiver system was set to peak detect function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz.

Note:

The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) at frequency above 1GHz.

6.4 Test Results

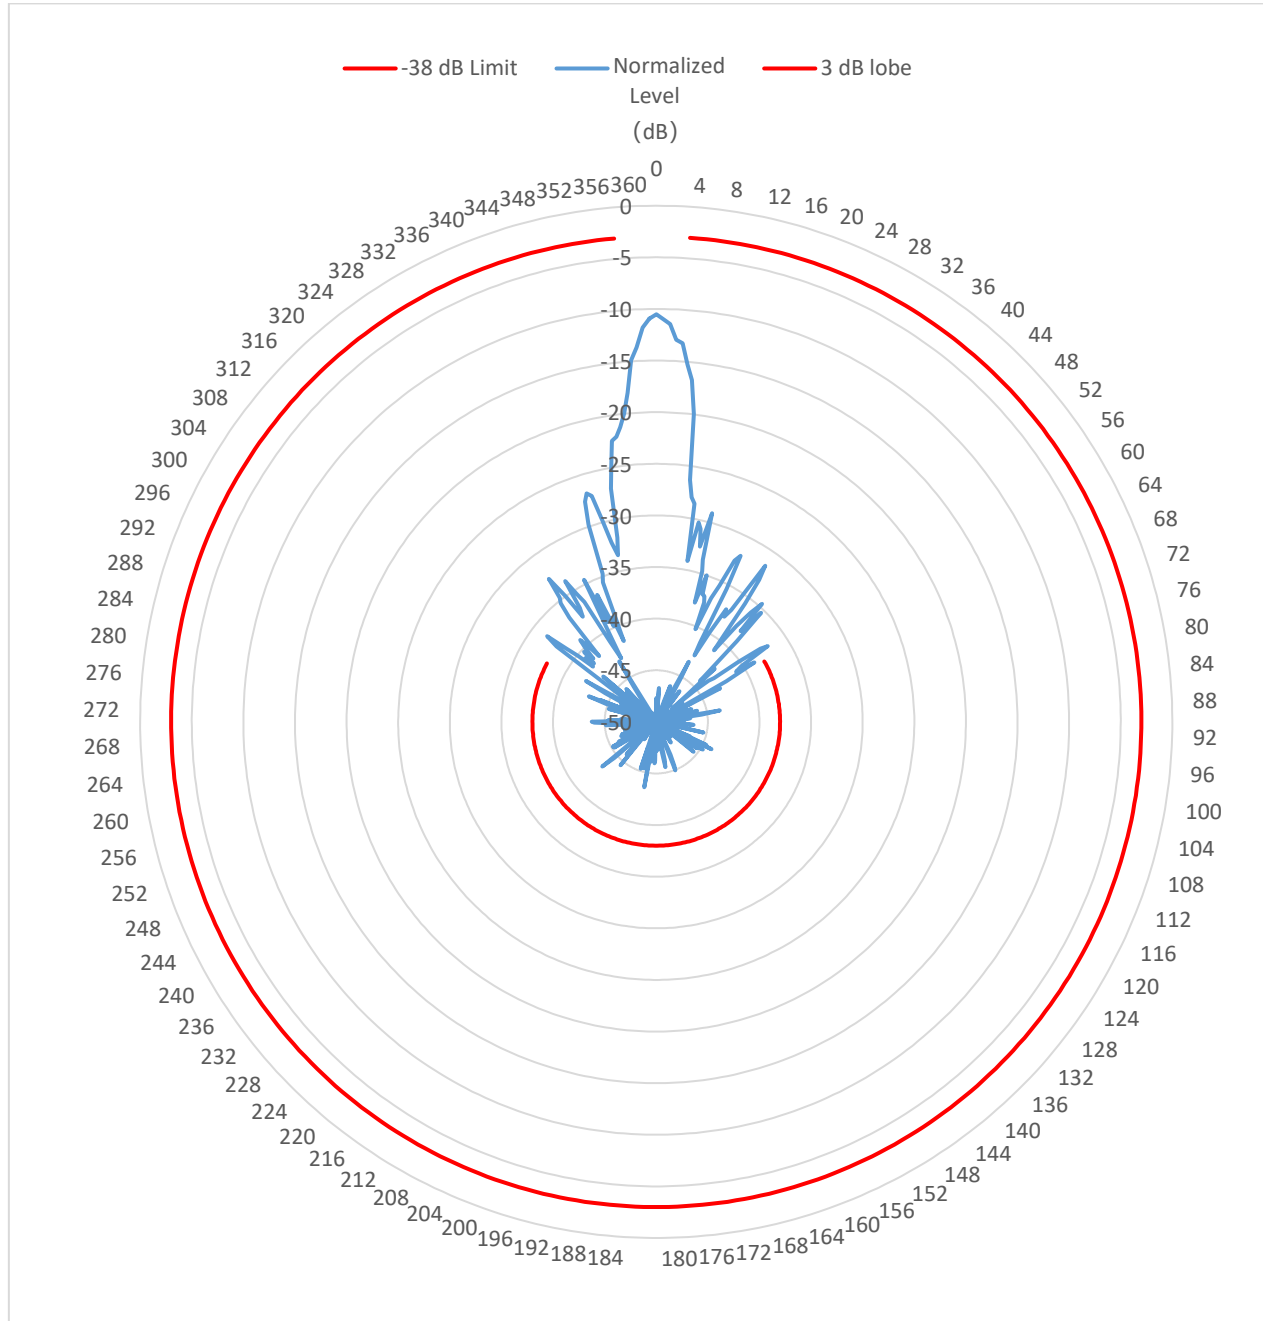

7 Fundamental bandwidth

Test result: Pass

7.1 Limit

Intentional radiators must be designed to ensure that the 10 dB bandwidth of the emission is contained within the allocated frequency band.


7.2 Measurement Procedure

The 10dB Bandwidth is measured using the Spectrum Analyzer.

Set Span = 2 to 3 times the 10 dB bandwidth, RBW = approximately 1% to 5% of the actual occupied, VBW > 3xRBW, Sweep = auto, Detector = peak, Trace = max hold.

The test was performed at one channel.

7.3 Test Configuration

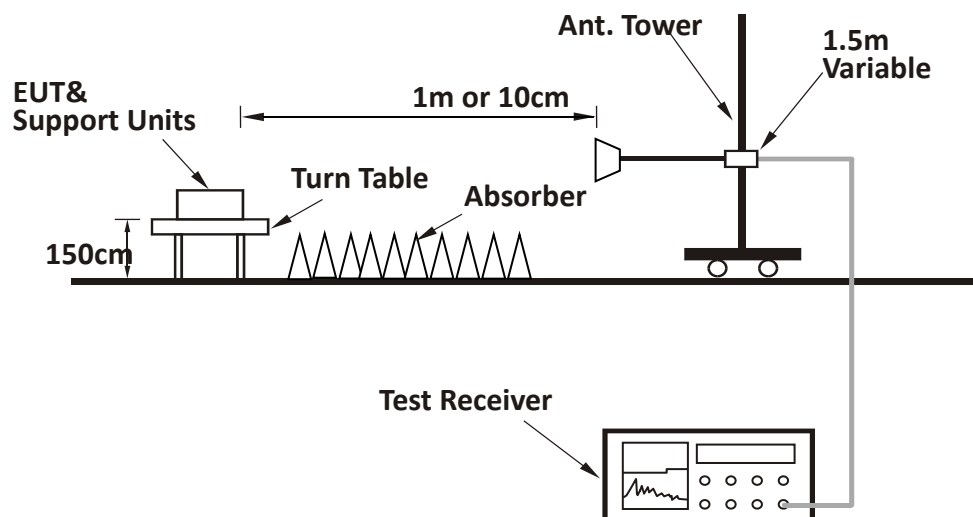

7.4 The results

Frequency band (MHz)	10dB Bandwidth (MHz)	99% Bandwidth (MHz)	F _L at 20dB BW (MHz)	F _H at 20dB BW (MHz)
75000 ~ 82000	76913.86	76931.85	>75000	/
	81027.36	80997.50	/	<82000
Limit	N/A	N/A	F _L >75000	F _H <82000
Result	Complied			



8 Antenna requirement

Requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

Result:

EUT uses permanently attached antenna to the intentional radiator, so it can comply with the provisions of this section.

***** END *****