Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T345 (dB/m)	Amp/Cbl/ Fltr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 1.078	36.04	PK2	27.5	-23	0	40.54	-	-	74	-33.46	119	213	H
	* 1.079	24.58	MAv1	27.6	-23	0	29.18	54	-24.82	-	-	119	213	H
2	* 1.097	41.98	PK2	27.6	-22.9	0	46.68	-	-	74	-27.32	289	182	H
	* 1.095	31.62	MAv1	27.6	-22.9	0	36.32	54	-17.68	-	-	289	182	H
3	* 1.495	40.47	PK2	28.7	-21.5	0	47.67	-	-	74	-26.33	173	202	H
	* 1.494	27.92	MAv1	28.7	-21.5	0	35.12	54	-18.88	-	-	173	202	H
4	* 1.699	40.39	PK2	29.7	-21.2	0	48.89	-	-	74	-25.11	80	263	H
	* 1.699	28.48	MAv1	29.8	-21.2	0	37.08	54	-16.92	-	-	80	263	H
7	* 2.488	47.13	PK2	32.5	-20.9	0	58.73	-	-	74	-15.27	168	254	H
	* 2.486	33.13	MAv1	32.5	-20.9	0	44.73	54	-9.27	-	-	168	254	H
10	* 1.099	41.28	PK2	27.6	-22.8	0	46.08	-	-	74	-27.92	13	191	V
	* 1.099	30.63	MAv1	27.6	-22.9	0	35.33	54	-18.67	-	-	13	191	V
11	* 1.699	37.16	PK2	29.8	-21.2	0	45.76	-	-	74	-28.24	66	167	V
	* 1.698	25.44	MAv1	29.7	-21.2	0	33.94	54	-20.06	-	-	66	167	V
12	* 2.378	47.79	PK2	31.9	-20.9	0	58.79	-	-	74	-15.21	11	301	V
	* 2.38	30.34	MAv1	31.9	-20.9	0	41.34	54	-12.66	-	-	11	301	V
8	* 4.884	48.22	PK2	34.2	-30.4	0	52.02	-	-	74	-21.98	21	239	H
	* 4.884	44.54	MAv1	34.2	-30.4	0	48.34	54	-5.66	-	-	21	239	H
13	* 4.884	46.6	PK2	34.2	-30.4	0	50.4	-	-	74	-23.6	68	108	V
	* 4.884	42.27	MAv1	34.2	-30.4	0	46.07	54	-7.93	-	-	68	108	V
14	* 7.325	42.01	PK2	35.3	-28.1	0	49.21	-	-	74	-24.79	113	281	V
	* 7.325	33.59	MAv1	35.3	-28.1	0	40.79	54	-13.21	-	-	113	281	V
5	2.124	33.61	PK	31.6	-20.9	0	44.31	-	-	-	-	0-360	100	H
6	2.391	36.97	PK	32	-20.9	0	48.07	-	-	-	-	0-360	100	H
9	9.768	31.45	PK	36.9	-24	0	44.35	-	-	-	-	0-360	199	H
15	9.768	34.86	PK	36.9	-24	0	47.76	-	-	-	-	0-360	199	V

* - indicates frequency in CFR15.205/IC8.10 Restricted Band

-Compliance for emissions in non-restricted bands shown in conducted out of band testing

PK - Peak detector
PK2 - KDB558074 Method: Maximum Peak
MAv1 - KDB558074 Option 1 Maximum RMS Average

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

HIGH CHANNEL

HORIZONTAL

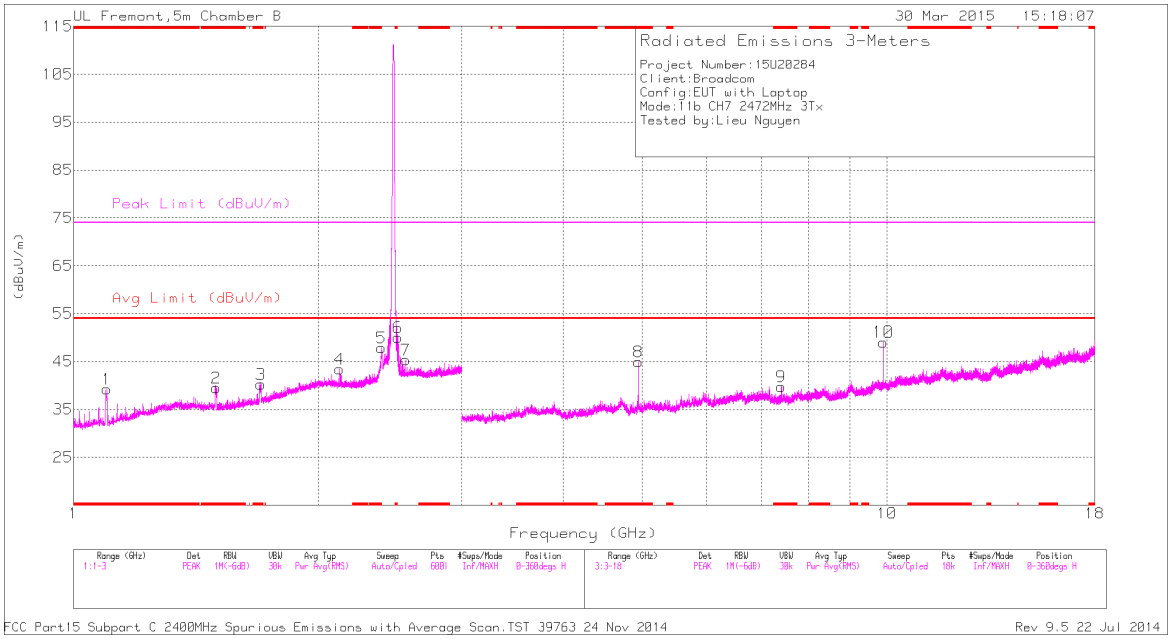

VERTICAL

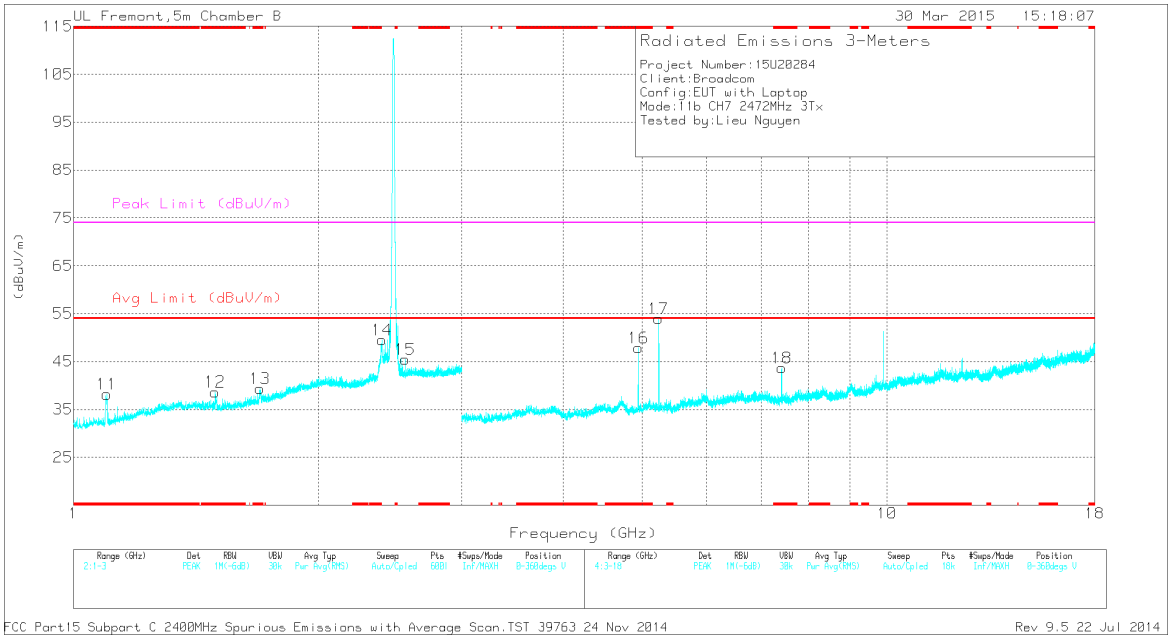

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T345 (dB/m)	Amp/Cbl/Fltr /Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 1.099	44.03	PK2	27.6	-22.9	0	48.73	-	-	74	-25.27	15	249	H
	* 1.099	35.09	MAv1	27.6	-22.9	0	39.79	54	-14.21	-	-	15	249	H
2	* 1.498	40.55	PK2	28.7	-21.4	0	47.85	-	-	74	-26.15	173	151	H
	* 1.499	28.01	MAv1	28.6	-21.4	0	35.21	54	-18.79	-	-	173	151	H
3	* 1.7	40.25	PK2	29.8	-21.2	0	48.85	-	-	74	-25.15	9	246	H
	* 1.699	28.12	MAv1	29.7	-21.2	0	36.62	54	-17.38	-	-	9	246	H
11	* 1.098	40.91	PK2	27.6	-22.9	0	45.61	-	-	74	-28.39	228	236	V
	* 1.099	30.55	MAv1	27.6	-22.9	0	35.25	54	-18.75	-	-	228	236	V
12	* 1.494	39.91	PK2	28.7	-21.5	0	47.11	-	-	74	-26.89	243	297	V
	* 1.494	27.39	MAv1	28.7	-21.5	0	34.59	54	-19.41	-	-	243	297	V
13	* 1.697	39.22	PK2	29.7	-21.2	0	47.72	-	-	74	-26.28	141	183	V
	* 1.693	26.79	MAv1	29.7	-21.3	0	35.19	54	-18.81	-	-	141	183	V
8	* 4.944	47.92	PK2	34.1	-30.4	0	51.62	-	-	74	-22.38	17	258	H
	* 4.944	43.59	MAv1	34.1	-30.4	0	47.29	54	-6.71	-	-	17	258	H
9	* 7.416	41.02	PK2	35.4	-27.3	0	49.12	-	-	74	-24.88	316	217	H
	* 7.417	32.54	MAv1	35.4	-27.3	0	40.64	54	-13.36	-	-	316	217	H
16	* 4.944	49.07	PK2	34.1	-30.4	0	52.77	-	-	74	-21.23	246	113	V
	* 4.944	45.18	MAv1	34.1	-30.4	0	48.88	54	-5.12	-	-	246	113	V
18	* 7.418	41.93	PK2	35.4	-27.3	0	50.03	-	-	74	-23.97	98	214	V
	* 7.417	34.23	MAv1	35.4	-27.3	0	42.33	54	-11.67	-	-	98	214	V
4	2.124	32.76	PK	31.6	-20.9	0	43.46	-	-	-	-	0-360	101	H
5	2.391	36.77	PK	32	-20.9	0	47.87	-	-	-	-	0-360	101	H
14	2.394	38.51	PK	32	-21	0	49.51	-	-	-	-	0-360	200	V
6	2.504	38.4	PK	32.5	-20.8	0	50.1	-	-	-	-	0-360	200	H
15	2.557	33.64	PK	32.7	-20.9	0	45.44	-	-	-	-	0-360	101	V
7	2.562	33.57	PK	32.7	-20.9	0	45.37	-	-	-	-	0-360	200	H
17	5.238	49.88	PK	34.3	-30.2	0	53.98	-	-	-	-	0-360	101	V
10	9.888	35.89	PK	37.1	-23.9	0	49.09	-	-	-	-	0-360	101	H

* - indicates frequency in CFR15.205/IC8.10 Restricted Band

-Compliance for emissions in non-restricted bands shown in conducted out of band testing

PK - Peak detector
PK2 - KDB558074 Method: Maximum Peak
MAv1 - KDB558074 Option 1 Maximum RMS Average

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

9.3. TX ABOVE 1 GHz 802.11g LEGACY MODE IN THE 2.4 GHz BAND

RESTRICTED BANDEDGE (CHANNEL 1)

CHANNEL1 RESTRICTED, HORIZ

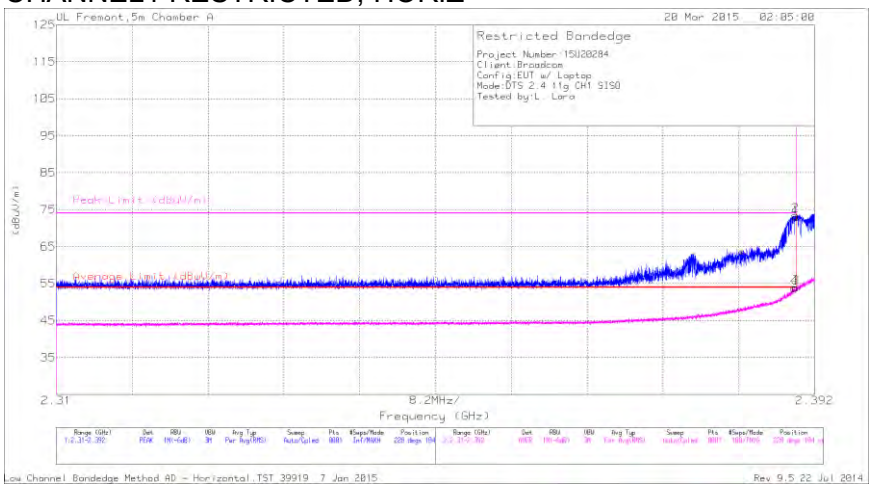

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T136 (dB/m)	Bypass (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	35.26	PK	32	5.7	72.96	-	-	74	-1.04	228	104	H
2	* 2.39	35.69	PK	32	5.7	73.39	-	-	74	-.61	228	104	H
3	* 2.39	16.24	RMS	32	5.7	53.94	54	-.06	-	-	228	104	H
4	* 2.39	16.12	RMS	32	5.7	53.82	54	-.18	-	-	228	104	H

* - indicates frequency in CFR15.205/IC8.10 Restricted Band

PK - Peak detector
RMS - RMS detection

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

RESTRICTED BANDEDGE (CHANNEL 2)

CHANNEL 2 RESTRICTED, HORIZ

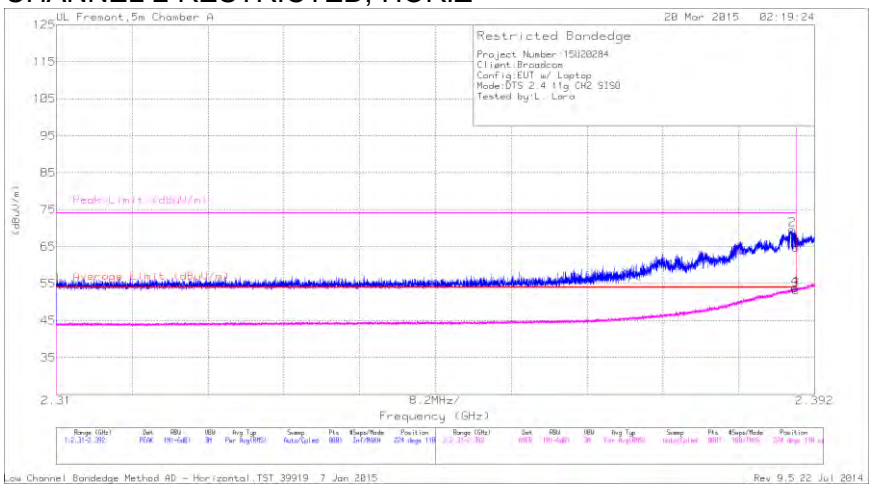

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T136 (dB/m)	Bypass (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	27.06	PK	32	5.7	64.76	-	-	74	-9.24	224	110	H
2	* 2.39	31.95	PK	32	5.7	69.65	-	-	74	-4.35	224	110	H
3	* 2.39	15.58	RMS	32	5.7	53.28	54	-.72	-	-	224	110	H
4	* 2.39	15.98	RMS	32	5.7	53.68	54	-.32	-	-	224	110	H

* - indicates frequency in CFR15.205/IC8.10 Restricted Band

PK - Peak detector
RMS - RMS detection

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

RESTRICTED BANDEDGE (CHANNEL 10)

CHANNEL 10 RESTRICTED, HORIZ

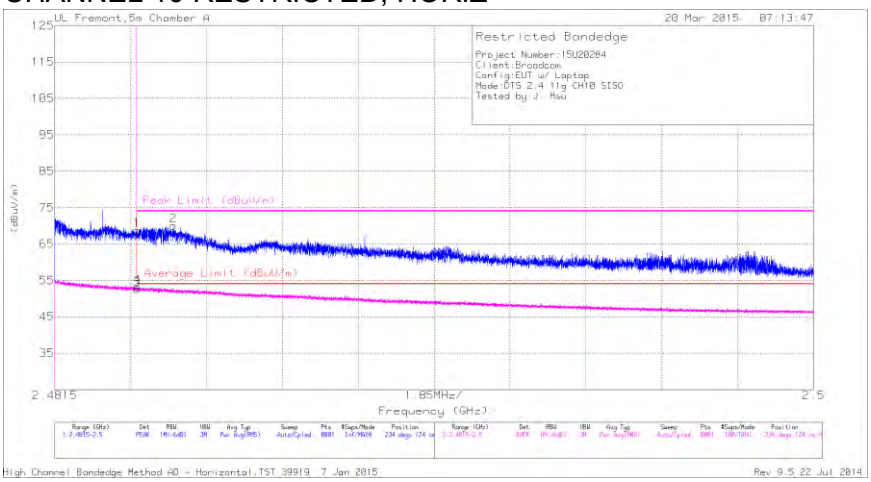

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T136 (dB/m)	Bypass (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	30.74	PK	32.1	5.9	68.74	-	-	74	-5.26	234	124	H
2	* 2.484	32.01	PK	32.1	5.9	70.01	-	-	74	-3.99	234	124	H
3	* 2.484	14.6	RMS	32.1	5.9	52.6	54	-1.4	-	-	234	124	H
4	* 2.484	15.12	RMS	32.1	5.9	53.12	54	-.88	-	-	234	124	H

* - indicates frequency in CFR15.205/IC8.10 Restricted Band

PK - Peak detector
RMS - RMS detection

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

AUTHORIZED BANDEDGE (CHANNEL 11)

CHANNEL 11 BANDEDGE, HORIZ

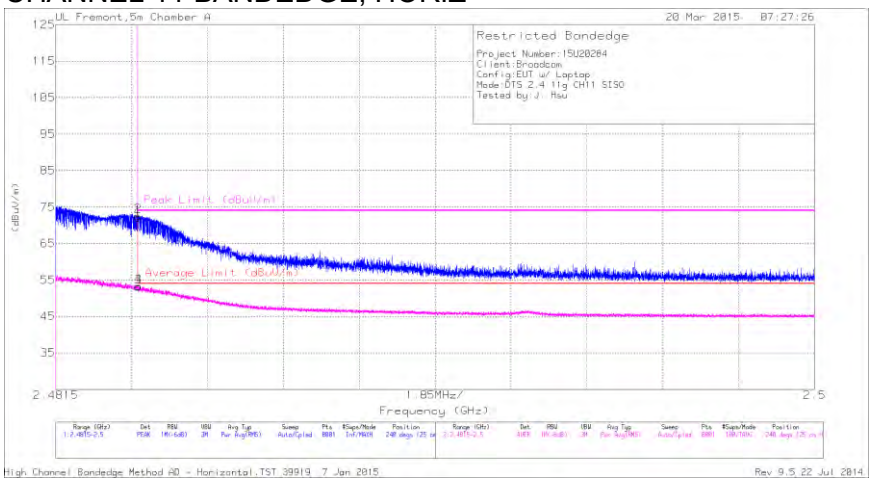

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T136 (dB/m)	Bypass (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	34.19	PK	32.1	5.9	72.19	-	-	74	-1.81	240	125	H
2	* 2.484	34.51	PK	32.1	5.9	72.51	-	-	74	-1.49	240	125	H
3	* 2.484	15.14	RMS	32.1	5.9	53.14	54	-.86	-	-	240	125	H
4	* 2.484	15.24	RMS	32.1	5.9	53.24	54	-.76	-	-	240	125	H

* - indicates frequency in CFR15.205/IC8.10 Restricted Band

PK - Peak detector
RMS - RMS detection

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

AUTHORIZED BANDEDGE (CHANNEL 12)

CHANNEL 12 BANDEDGE, HORIZ

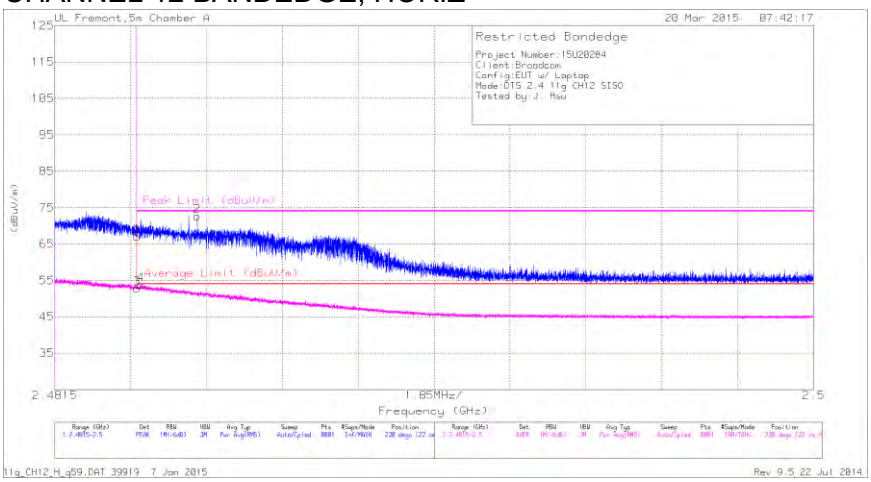

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T136 (dB/m)	Bypass (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	29	PK	32.1	5.9	67	-	-	74	-7	230	122	H
2	* 2.485	34.65	PK	32.1	5.9	72.65	-	-	74	-1.35	230	122	H
3	* 2.484	14.77	RMS	32.1	5.9	52.77	54	-1.23	-	-	230	122	H
4	* 2.484	15.73	RMS	32.1	5.9	53.73	54	-.27	-	-	230	122	H

* - indicates frequency in CFR15.205/IC8.10 Restricted Band

PK - Peak detector
RMS - RMS detection

UL VERIFICATION SERVICES INC. FORM NO: CCSUP4701J
47173 BENICIA STREET, FREMONT, CA 94538, USA TEL: (510) 771-1000 FAX: (510) 661-0888
This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

AUTHORIZED BANDEDGE (CHANNEL 13)

CHANNEL 13 BANDEDGE, HORIZ

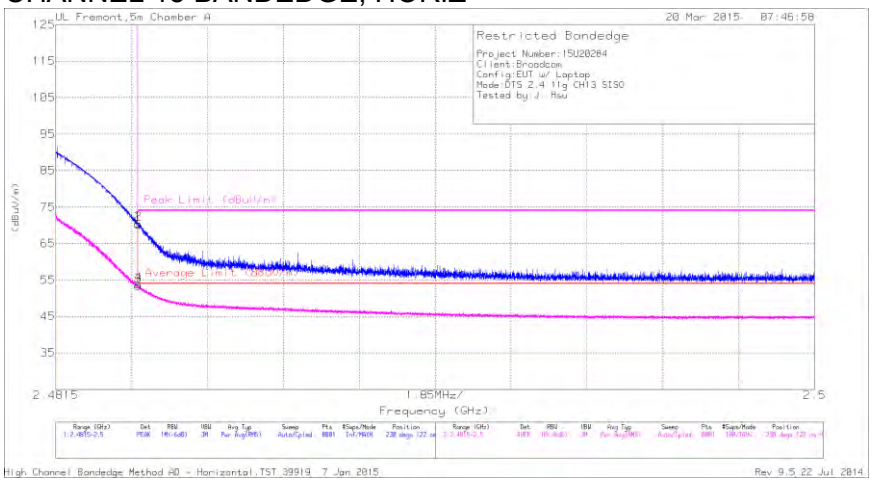

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T136 (dB/m)	Bypass (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	32.34	PK	32.1	5.9	70.34	-	-	74	-3.66	230	122	H
2	* 2.484	32.41	PK	32.1	5.9	70.41	-	-	74	-3.59	230	122	H
3	* 2.484	15.45	RMS	32.1	5.9	53.45	54	-.55	-	-	230	122	H
4	* 2.484	15.75	RMS	32.1	5.9	53.75	54	-.25	-	-	230	122	H

* - indicates frequency in CFR15.205/IC8.10 Restricted Band

PK - Peak detector
RMS - RMS detection

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

9.4. TX ABOVE 1 GHz 802.11n HT20 CDD 3Tx MODE IN THE 2.4 GHz BAND

RESTRICTED BANDEDGE (CHANNEL 1)

CHANNEL1 RESTRICTED, VERT

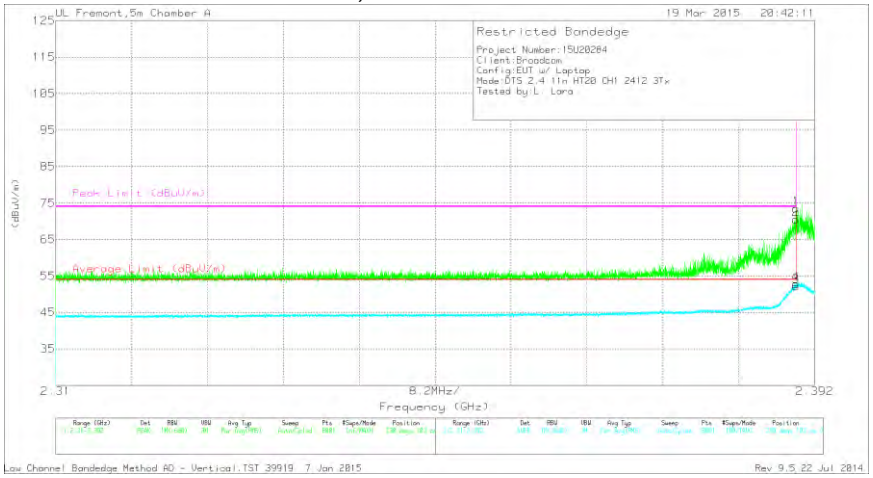

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T136 (dB/m)	Bypass (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	35.77	PK	32	5.7	73.47	-	-	74	-.53	230	103	V
2	* 2.39	32.82	PK	32	5.7	70.52	-	-	74	-3.48	230	103	V
3	* 2.39	14.44	RMS	32	5.7	52.14	54	-1.86	-	-	230	103	V
4	* 2.39	15.11	RMS	32	5.7	52.81	54	-1.19	-	-	230	103	V

* - indicates frequency in CFR15.205/IC8.10 Restricted Band

PK - Peak detector
RMS - RMS detection

UL VERIFICATION SERVICES INC. FORM NO: CCSUP4701J
47173 BENICIA STREET, FREMONT, CA 94538, USA TEL: (510) 771-1000 FAX: (510) 661-0888
This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

RESTRICTED BANDEDGE (CHANNEL 2)

CHANNEL 2 RESTRICTED, VERT

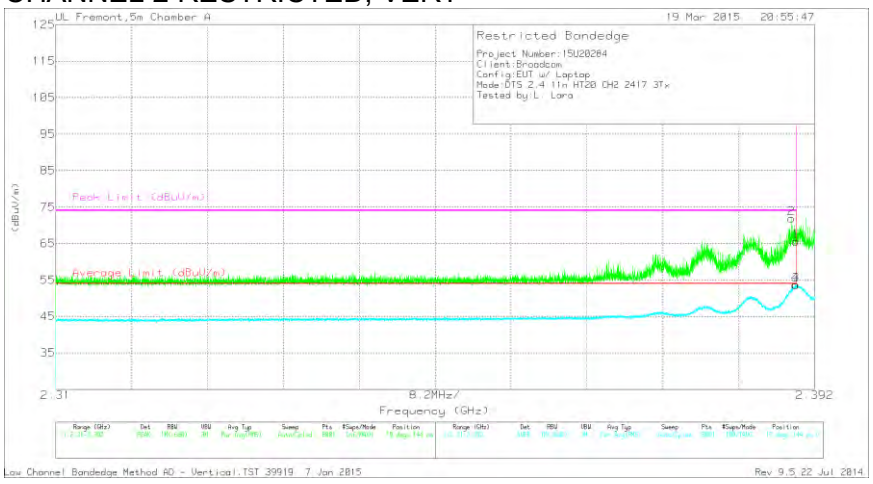

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T136 (dB/m)	Bypass (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	* 2.389	34.19	PK	32	5.7	71.89	-	-	74	-2.11	19	144	V
1	* 2.39	27.92	PK	32	5.7	65.62	-	-	74	-8.38	19	144	V
3	* 2.39	16	RMS	32	5.7	53.7	54	-.3	-	-	19	144	V
4	* 2.39	15.92	RMS	32	5.7	53.62	54	-.38	-	-	19	144	V

* - indicates frequency in CFR15.205/IC8.10 Restricted Band

PK - Peak detector
RMS - RMS detection

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

AUTHORIZED BANDEDGE (CHANNEL 10)

CHANNEL 10 BANDEDGE, VERT

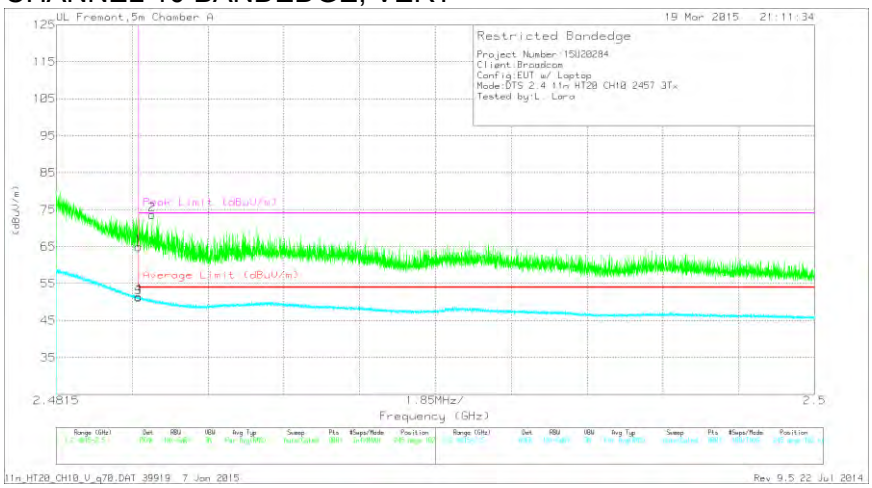

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T136 (dB/m)	Bypass (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	26.93	PK	32.1	5.9	64.93	-	-	74	-9.07	245	102	V
2	* 2.484	35.64	PK	32.1	5.9	73.64	-	-	74	-.36	245	102	V
3	* 2.484	13.21	RMS	32.1	5.9	51.21	54	-2.79	-	-	245	102	V
4	* 2.484	13.53	RMS	32.1	5.9	51.53	54	-2.47	-	-	245	102	V

* - indicates frequency in CFR15.205/IC8.10 Restricted Band

PK - Peak detector
RMS - RMS detection

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

AUTHORIZED BANDEDGE (CHANNEL 11)

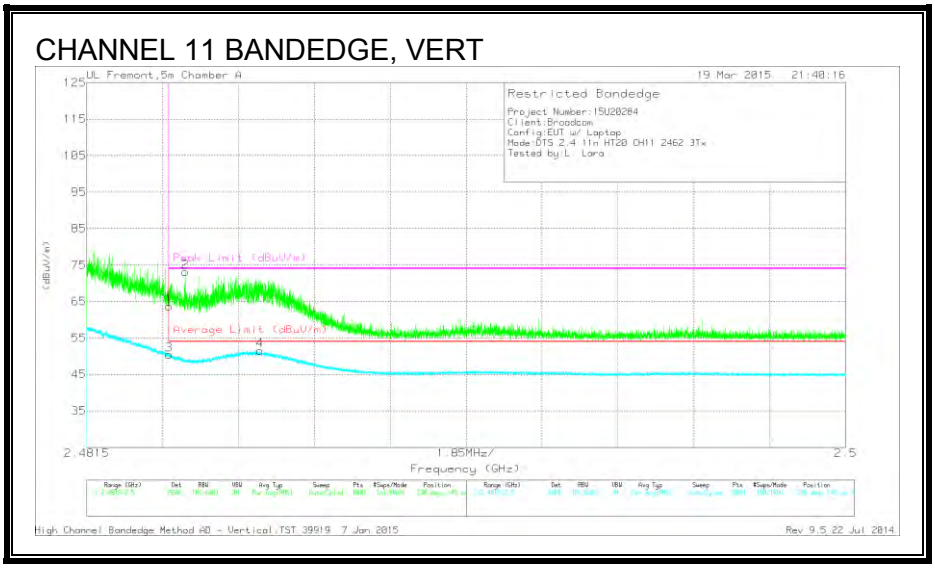

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T136 (dB/m)	Bypass (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	25.71	PK	32.1	5.9	63.71	-	-	74	-10.29	238	149	V
2	* 2.484	35.19	PK	32.1	5.9	73.19	-	-	74	-.81	238	149	V
3	* 2.484	12.41	RMS	32.1	5.9	50.41	54	-3.59	-	-	238	149	V
4	* 2.486	13.59	RMS	32.1	5.9	51.59	54	-2.41	-	-	238	149	V

* - indicates frequency in CFR15.205/IC8.10 Restricted Band

PK - Peak detector
RMS - RMS detection

UL VERIFICATION SERVICES INC. FORM NO: CCSUP4701J
47173 BENICIA STREET, FREMONT, CA 94538, USA TEL: (510) 771-1000 FAX: (510) 661-0888
This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

AUTHORIZED BANDEDGE (CHANNEL 12)

CHANNEL 12 BANDEDGE, VERT

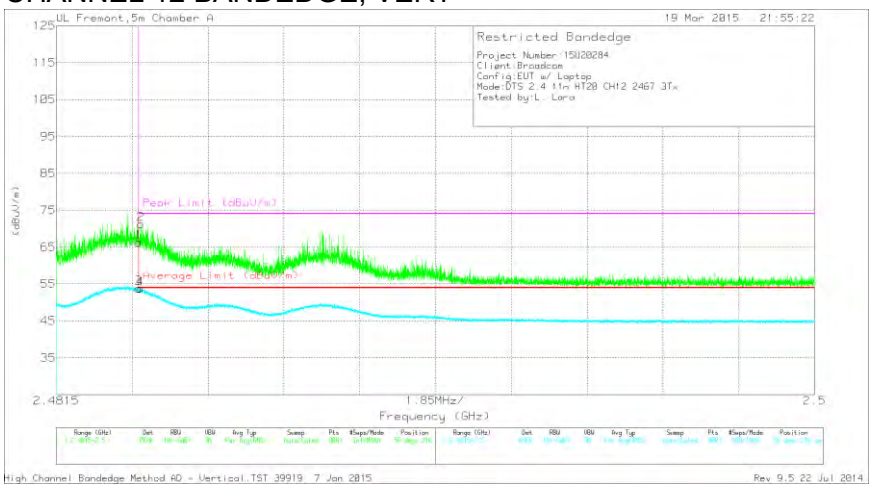

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T136 (dB/m)	Bypass (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	28.32	PK	32.1	5.9	66.32	-	-	74	-7.68	56	216	V
2	* 2.484	33.21	PK	32.1	5.9	71.21	-	-	74	-2.79	56	216	V
3	* 2.484	15.84	RMS	32.1	5.9	53.84	54	-.16	-	-	56	216	V
4	* 2.484	15.66	RMS	32.1	5.9	53.66	54	-.34	-	-	56	216	V

* - indicates frequency in CFR15.205/IC8.10 Restricted Band

PK - Peak detector
RMS - RMS detection

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

AUTHORIZED BANDEDGE (CHANNEL 13)

CHANNEL 13 BANDEDGE, VERT

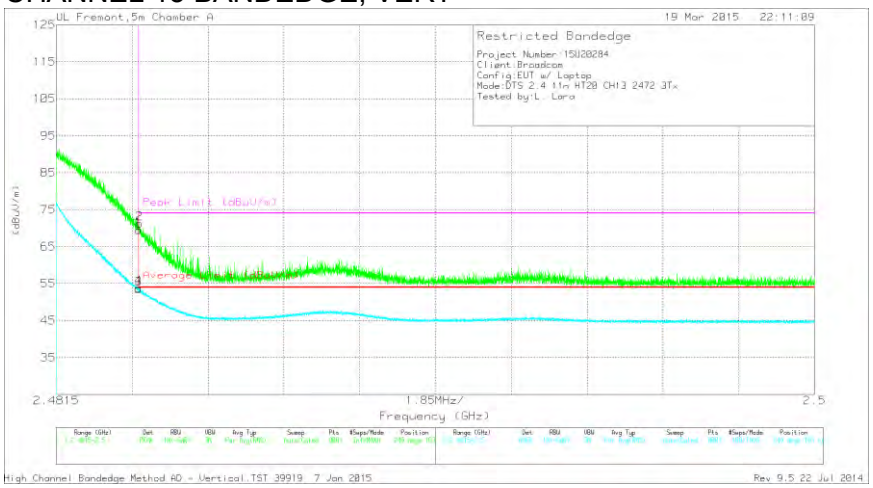

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T136 (dB/m)	Bypass (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	31.55	PK	32.1	5.9	69.55	-	-	74	-4.45	249	103	V
2	* 2.484	33.2	PK	32.1	5.9	71.2	-	-	74	-2.8	249	103	V
3	* 2.484	15.52	RMS	32.1	5.9	53.52	54	-.48	-	-	249	103	V
4	* 2.484	15.78	RMS	32.1	5.9	53.78	54	-.22	-	-	249	103	V

* - indicates frequency in CFR15.205/IC8.10 Restricted Band

PK - Peak detector
RMS - RMS detection

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

HARMONICS AND SPURIOUS EMISSIONS

LOW CHANNEL

HORIZONTAL

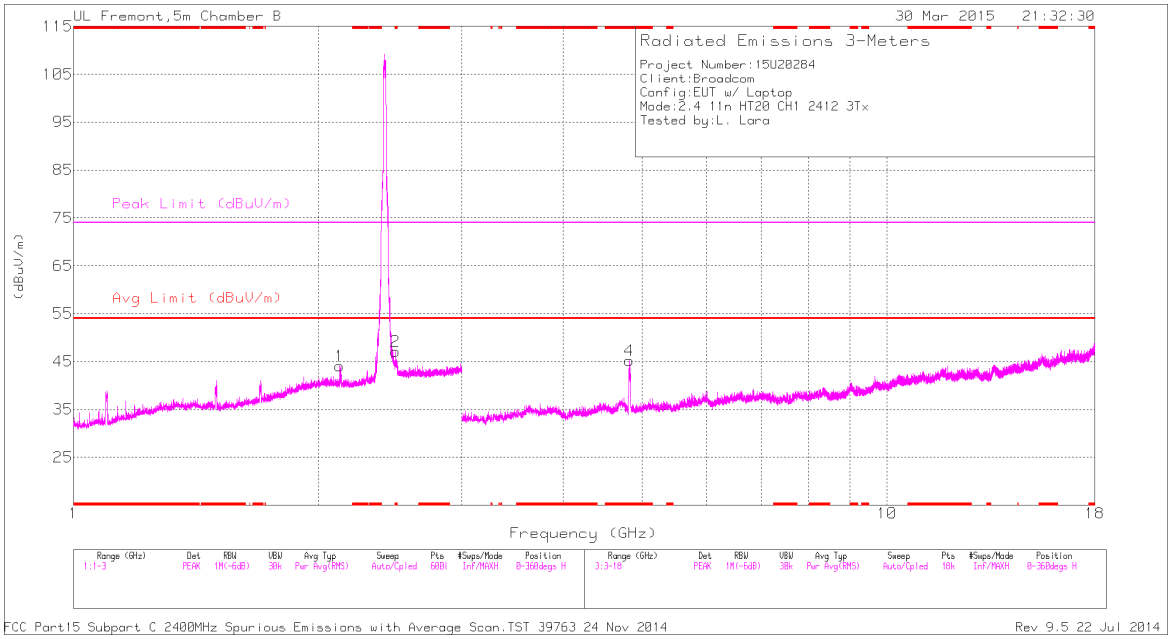

VERTICAL

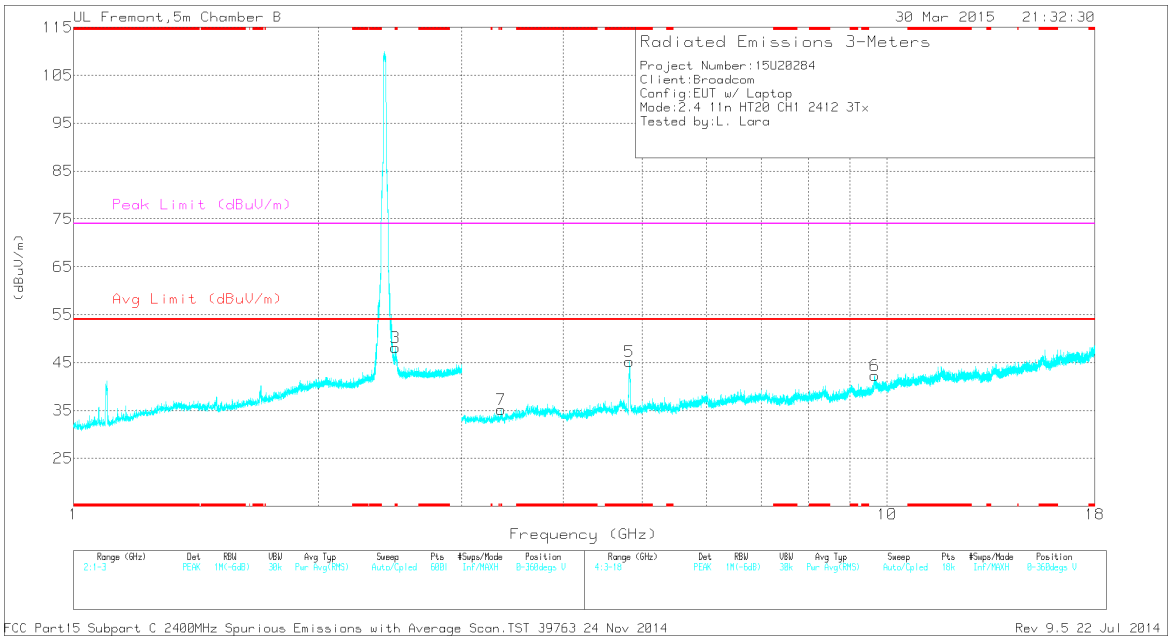

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T345 (dB/m)	Amp/Cbl/Fltr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	* 2.487	45.2	PK2	32.5	-20.9	56.8	-	-	74	-17.2	57	210	H
	* 2.487	35.52	MAv1	32.5	-20.9	47.12	54	-6.88	-	-	57	210	H
3	* 2.487	44.73	PK2	32.5	-20.9	56.33	-	-	74	-17.67	208	293	V
	* 2.487	34.7	MAv1	32.5	-20.9	46.3	54	-7.7	-	-	208	293	V
4	* 4.816	51.88	PK2	34.3	-29.6	56.58	-	-	74	-17.42	280	224	H
	* 4.826	38.79	MAv1	34.3	-29.7	43.39	54	-10.61	-	-	280	224	H
5	* 4.825	49.28	PK2	34.3	-29.7	53.88	-	-	74	-20.12	337	140	V
	* 4.825	36.19	MAv1	34.3	-29.7	40.79	54	-13.21	-	-	337	140	V
7	* 3.353	40.63	PK2	32.9	-31	42.53	-	-	74	-31.47	314	167	V
	* 3.354	28.64	MAv1	32.9	-31	30.54	54	-23.46	-	-	314	167	V
1	2.124	33.32	PK	31.6	-20.9	44.02	-	-	-	-	0-360	101	H
6	9.655	29.41	PK	36.7	-23.8	42.31	-	-	-	-	0-360	101	V

* - indicates frequency in CFR15.205/IC8.10 Restricted Band

-Compliance for emissions in non-restricted bands shown in conducted out of band testing

PK - Peak detector
PK2 - KDB558074 Method: Maximum Peak
MAv1 - KDB558074 Option 1 Maximum RMS Average

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

MID CHANNEL

HORIZONTAL

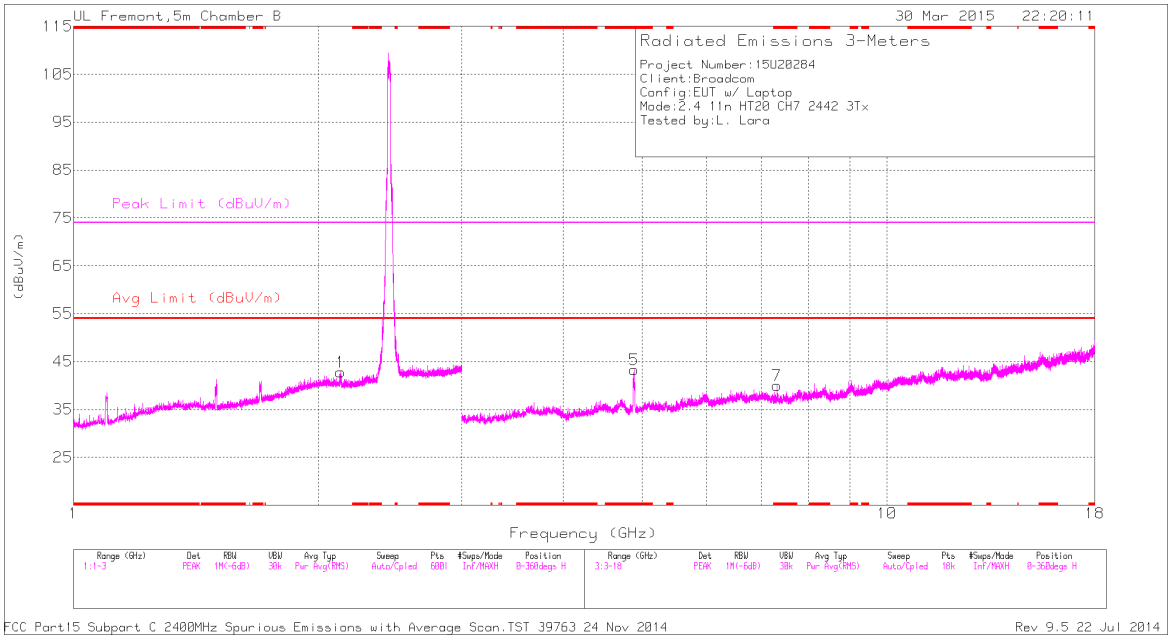

VERTICAL

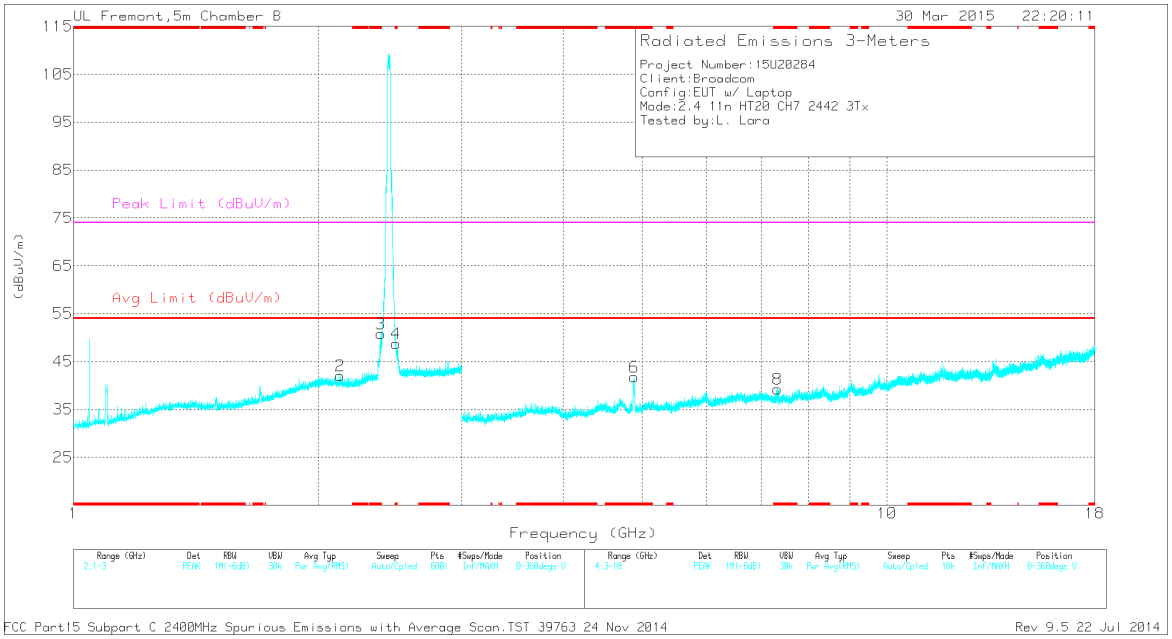

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T345 (dB/m)	Amp/Cbl/Fltr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
3	* 2.386	55.01	PK2	32	-20.9	66.11	-	-	74	-7.89	274	193	V
	* 2.386	34.34	MAv1	32	-20.9	45.44	54	-8.56	-	-	274	193	V
4	* 2.49	50.52	PK2	32.5	-20.9	62.12	-	-	74	-11.88	85	192	V
	* 2.49	34.41	MAv1	32.5	-20.9	46.01	54	-7.99	-	-	85	192	V
5	* 4.882	49.67	PK2	34.2	-30.4	53.47	-	-	74	-20.53	280	221	H
	* 4.881	37.6	MAv1	34.2	-30.4	41.4	54	-12.6	-	-	280	221	H
7	* 7.319	41.86	PK2	35.3	-28.2	48.96	-	-	74	-25.04	299	189	H
	* 7.323	30.39	MAv1	35.3	-28.2	37.49	54	-16.51	-	-	299	189	H
6	* 4.884	48.66	PK2	34.2	-30.4	52.46	-	-	74	-21.54	247	128	V
	* 4.884	35.72	MAv1	34.2	-30.4	39.52	54	-14.48	-	-	247	128	V
8	* 7.331	39.28	PK2	35.3	-28.1	46.48	-	-	74	-27.52	270	228	V
	* 7.326	28.68	MAv1	35.3	-28.1	35.88	54	-18.12	-	-	270	228	V
2	2.126	31.32	PK	31.6	-20.9	42.02	-	-	-	-	0-360	199	V
1	2.129	32.11	PK	31.6	-20.9	42.81	-	-	-	-	0-360	101	H

* - indicates frequency in CFR15.205/IC8.10 Restricted Band

-Compliance for emissions in non-restricted bands shown in conducted out of band testing

PK - Peak detector
PK2 - KDB558074 Method: Maximum Peak
MAv1 - KDB558074 Option 1 Maximum RMS Average

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

HIGH CHANNEL

HORIZONTAL

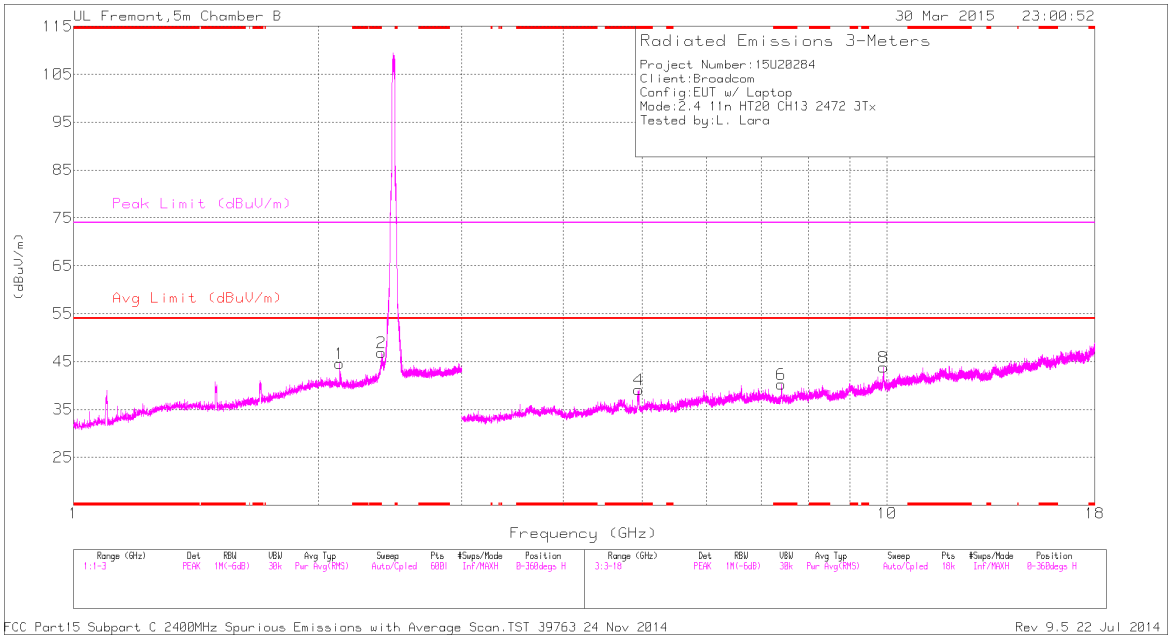

VERTICAL

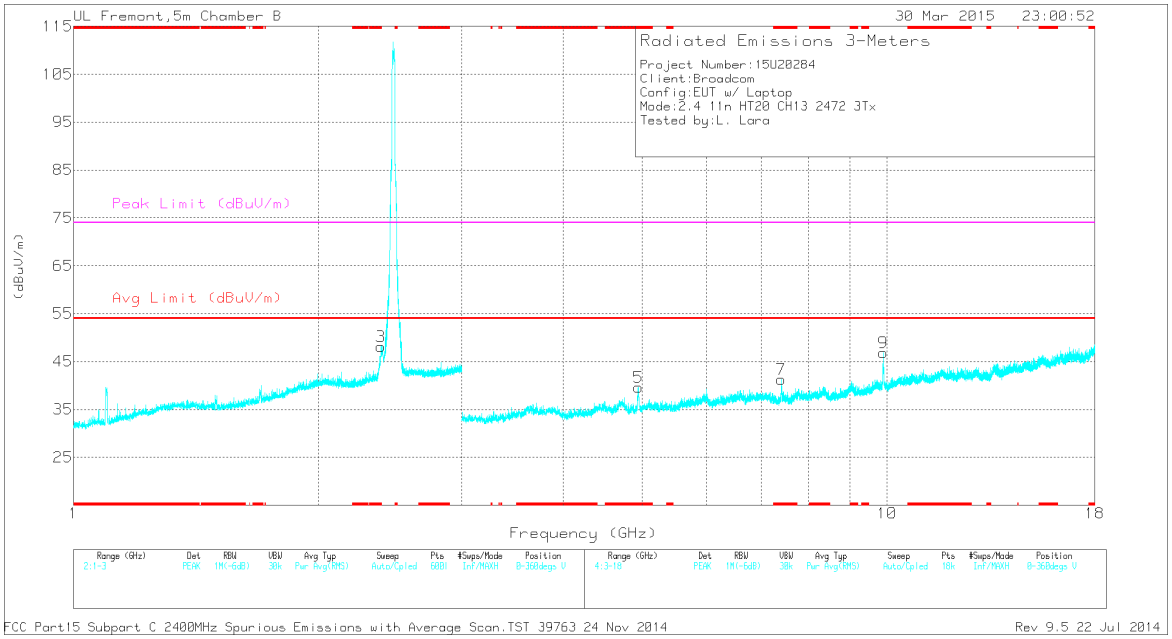

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T345 (dB/m)	Amp/Cbl/Fltr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	* 2.385	43.41	PK2	32	-20.9	54.51	-	-	74	-19.49	105	299	H
	* 2.39	32.55	MAv1	32	-20.9	43.65	54	-10.35	-	-	105	299	H
3	* 2.387	45.36	PK2	32	-20.9	56.46	-	-	74	-17.54	269	196	V
	* 2.386	34.77	MAv1	32	-20.9	45.87	54	-8.13	-	-	269	196	V
4	* 4.942	46.49	PK2	34.1	-30.4	50.19	-	-	74	-23.81	282	214	H
	* 4.947	34.9	MAv1	34.1	-30.4	38.6	54	-15.4	-	-	282	214	H
6	* 7.419	42.82	PK2	35.4	-27.3	50.92	-	-	74	-23.08	301	196	H
	* 7.418	31.59	MAv1	35.4	-27.3	39.69	54	-14.31	-	-	301	196	H
5	* 4.933	46.64	PK2	34.1	-30.5	50.24	-	-	74	-23.76	245	161	V
	* 4.944	34.59	MAv1	34.1	-30.4	38.29	54	-15.71	-	-	245	161	V
7	* 7.419	41.3	PK2	35.4	-27.3	49.4	-	-	74	-24.6	52	161	V
	* 7.418	30.57	MAv1	35.4	-27.3	38.67	54	-15.33	-	-	52	161	V
1	2.124	33.84	PK	31.6	-20.9	44.54	-	-	-	-	0-360	101	H
9	9.89	33.62	PK	37.1	-23.9	46.82	-	-	-	-	0-360	101	V
8	9.9	30.57	PK	37.1	-23.8	43.87	-	-	-	-	0-360	200	H

* - indicates frequency in CFR15.205/IC8.10 Restricted Band

-Compliance for emissions in non-restricted bands shown in conducted out of band testing

PK - Peak detector
PK2 - KDB558074 Method: Maximum Peak
MAv1 - KDB558074 Option 1 Maximum RMS Average

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

9.5. TX ABOVE 1 GHz 802.11n HT20 TxBF 3Tx MODE IN THE 2.4 GHz BAND

RESTRICTED BANDEDGE (CHANNEL 1)

CHANNEL1 RESTRICTED, VERT

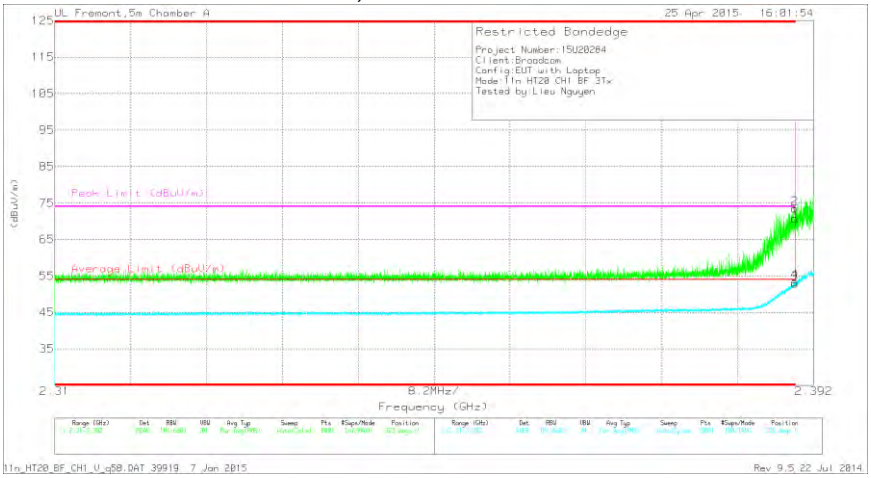

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T136 (dB/m)	Bypass (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	33.23	PK	32	4.9	0	70.13	-	-	74	-3.87	323	180	V
2	* 2.39	36.03	PK	32	4.9	0	72.93	-	-	74	-1.07	323	180	V
3	* 2.39	15.35	RMS	32	4.9	.55	52.8	54	-1.2	-	-	323	180	V
4	* 2.39	15.94	RMS	32	4.9	.55	53.39	54	-.61	-	-	323	180	V

* - indicates frequency in CFR15.205/IC8.10 Restricted Band

PK - Peak detector
RMS - RMS detection

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

RESTRICTED BANDEDGE (CHANNEL 2)

CHANNEL2 RESTRICTED, VERT

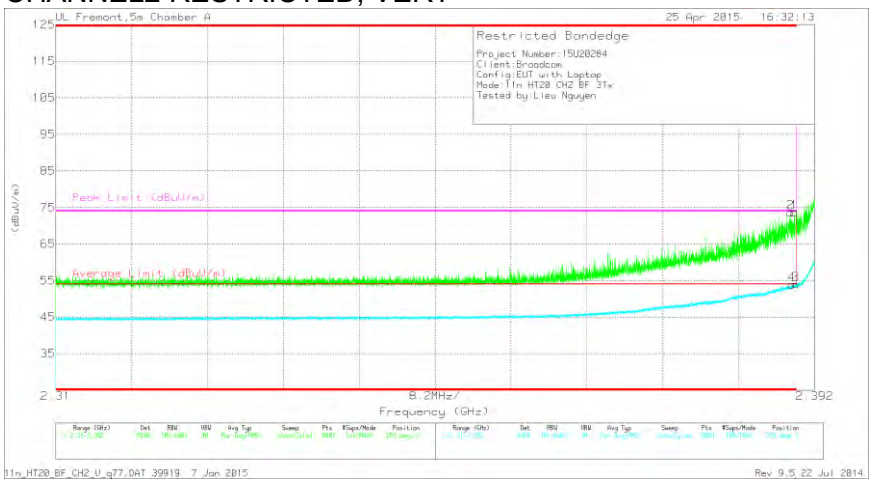

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T136 (dB/m)	Bypass (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	36.18	PK	32	4.9	0	73.08	-	-	74	-.92	293	162	V
2	* 2.389	36.08	PK	32	4.9	0	72.98	-	-	74	-1.02	293	162	V
3	* 2.39	16.53	RMS	32	4.9	.55	53.98	54	-.02	-	-	293	162	V
4	* 2.39	16.43	RMS	32	4.9	.55	53.88	54	-.12	-	-	293	162	V

* - indicates frequency in CFR15.205/IC8.10 Restricted Band

PK - Peak detector
RMS - RMS detection

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

AUTHORIZED BANDEDGE (CHANNEL 10)

CHANNEL 10 BANDEDGE, VERT

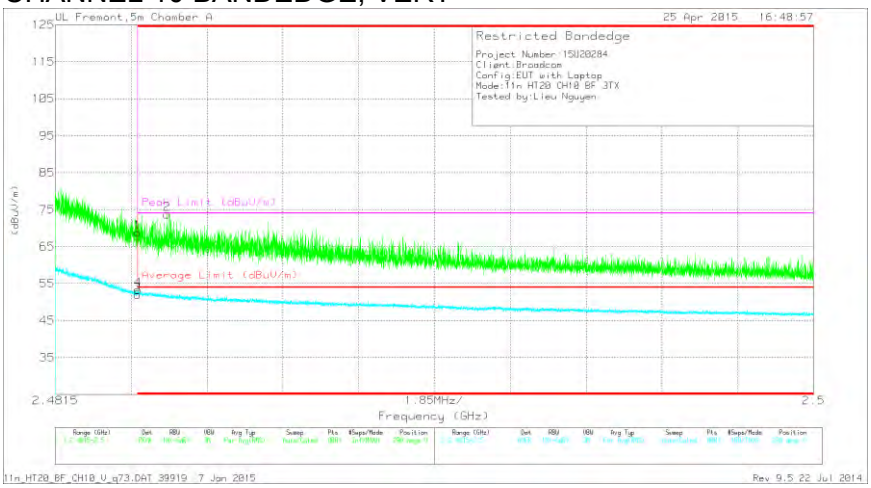

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T136 (dB/m)	Bypass (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	31.72	PK	32.1	5	0	68.82	-	-	74	-5.18	298	228	V
2	* 2.484	36.66	PK	32.1	5	0	73.76	-	-	74	-.24	298	228	V
3	* 2.484	14.29	RMS	32.1	5	.55	51.94	54	-2.06	-	-	298	228	V
4	* 2.484	15.69	RMS	32.1	5	.55	53.34	54	-.66	-	-	298	228	V

* - indicates frequency in CFR15.205/IC8.10 Restricted Band

PK - Peak detector
RMS - RMS detection

UL VERIFICATION SERVICES INC. FORM NO: CCSUP4701J
47173 BENICIA STREET, FREMONT, CA 94538, USA TEL: (510) 771-1000 FAX: (510) 661-0888
This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

AUTHORIZED BANDEDGE (CHANNEL 11)

CHANNEL 11 BANDEDGE, VERT

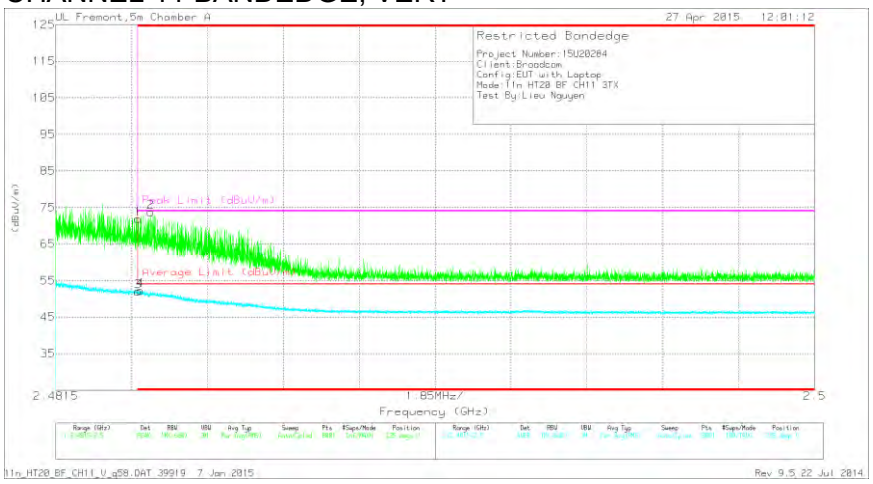

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T345 (dB/m)	Bypass (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	33.04	PK	32.5	5.7	0	71.24	-	-	74	-2.76	235	332	V
2	* 2.484	34.89	PK	32.5	5.7	0	73.09	-	-	74	-.91	235	332	V
3	* 2.484	13.2	RMS	32.5	5.7	.55	51.95	54	-2.05	-	-	235	332	V
4	* 2.484	13.47	RMS	32.5	5.7	.55	52.22	54	-1.78	-	-	235	332	V

* - indicates frequency in CFR15.205/IC8.10 Restricted Band

PK - Peak detector
RMS - RMS detection

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

AUTHORIZED BANDEDGE (CHANNEL 12)

CHANNEL 12 BANDEDGE, VERT

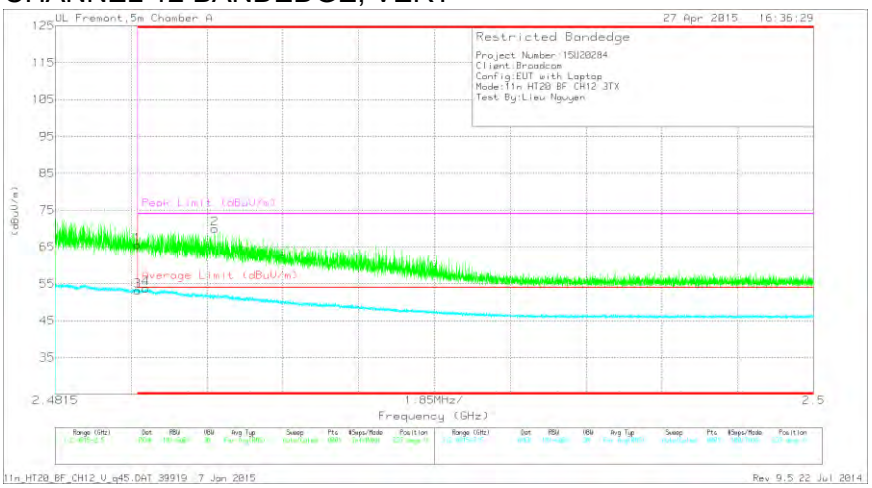

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T345 (dB/m)	Bypass (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	26.74	PK	32.5	5.7	0	64.94	-	-	74	-9.06	237	128	V
3	* 2.484	14.34	RMS	32.5	5.7	.55	53.09	54	-.91	-	-	237	128	V
4	* 2.484	14.94	RMS	32.5	5.7	.55	53.69	54	-.31	-	-	237	128	V
2	* 2.485	31.14	PK	32.5	5.7	0	69.34	-	-	74	-4.66	237	128	V

* - indicates frequency in CFR15.205/IC8.10 Restricted Band

PK - Peak detector
RMS - RMS detection

UL VERIFICATION SERVICES INC. FORM NO: CCSUP4701J
47173 BENICIA STREET, FREMONT, CA 94538, USA TEL: (510) 771-1000 FAX: (510) 661-0888
This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

AUTHORIZED BANDEDGE (CHANNEL 13)

CHANNEL 13 BANDEDGE, VERT

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T345 (dB/m)	Bypass (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	32.34	PK	32.5	5.7	0	70.54	-	-	74	-3.46	180	348	V
2	* 2.484	34.42	PK	32.5	5.7	0	72.62	-	-	74	-1.38	180	348	V
3	* 2.484	14.96	RMS	32.5	5.7	.55	53.71	54	-.29	-	-	180	348	V
4	* 2.484	14.9	RMS	32.5	5.7	.55	53.65	54	-.35	-	-	180	348	V

* - indicates frequency in CFR15.205/IC8.10 Restricted Band

PK - Peak detector
RMS - RMS detection

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

HARMONICS AND SPURIOUS EMISSIONS

LOW CHANNEL

HORIZONTAL

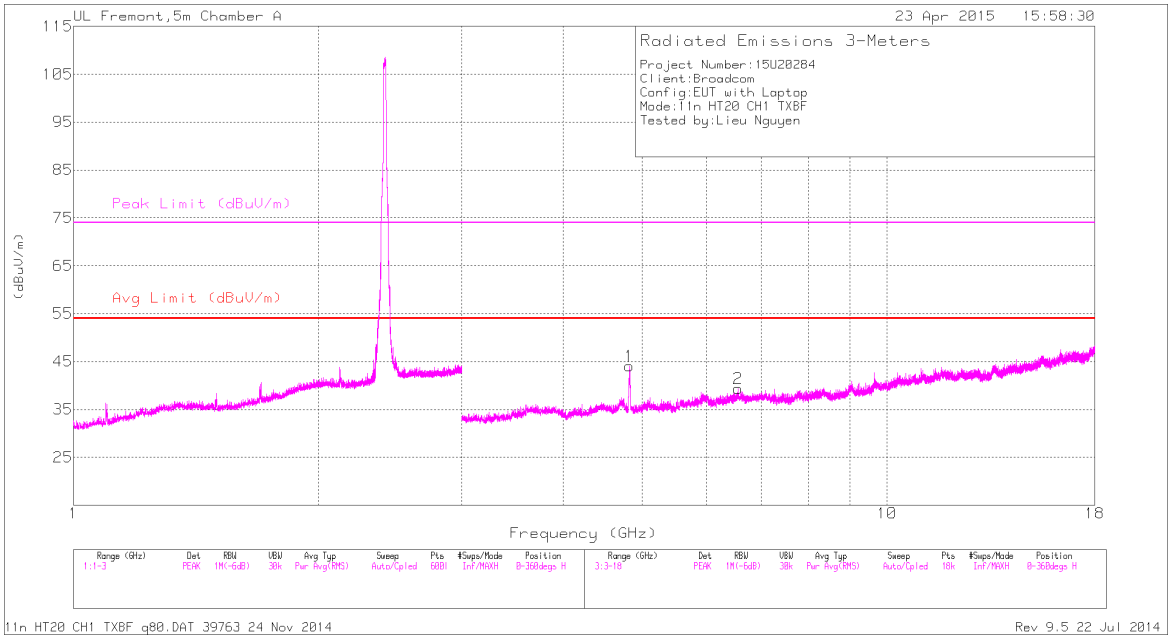

VERTICAL

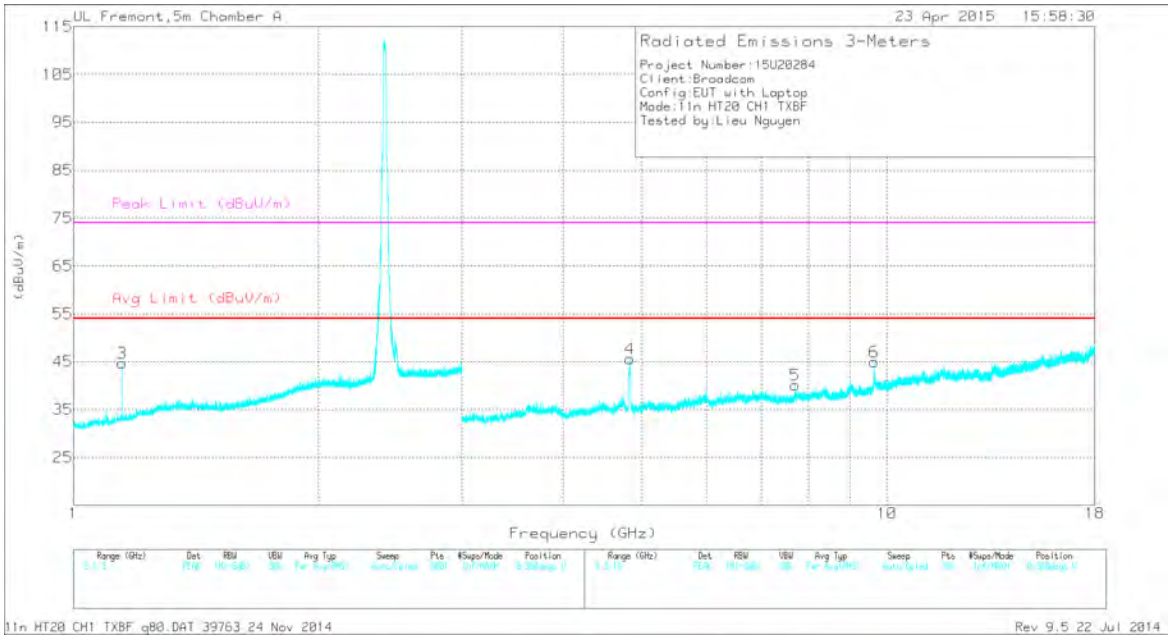

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T345 (dB/m)	Amp/Cbl/Fltr /Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
3	* 1.146	36.4	PK2	28	-22.6	0	41.8	-	-	74	-32.2	75	137	V
	* 1.146	24.59	MAv1	28	-22.6	.55	30.54	54	-23.46	-	-	75	137	V
1	* 4.824	54.29	PK2	34.3	-29.7	0	58.89	-	-	74	-15.11	131	264	H
	* 4.824	40.36	MAv1	34.3	-29.7	.55	45.51	54	-8.49	-	-	131	264	H
4	* 4.83	50.53	PK2	34.3	-29.8	0	55.03	-	-	74	-18.97	127	104	V
	* 4.829	35.75	MAv1	34.3	-29.8	.55	40.8	54	-13.2	-	-	127	104	V
5	* 7.708	37.13	PK2	35.5	-26.4	0	46.23	-	-	74	-27.77	212	199	V
	* 7.71	26.01	MAv1	35.5	-26.4	.55	35.66	54	-18.34	-	-	212	199	V
2	6.556	31.61	PK	35.9	-28.1	0	39.41	-	-	-	-	0-360	101	H
6	9.644	32.06	PK	36.7	-23.8	0	44.96	-	-	-	-	0-360	101	V

* - indicates frequency in CFR15.205/IC8.10 Restricted Band

-Compliance for emissions in non-restricted bands shown in conducted out of band testing

PK - Peak detector
PK2 - KDB558074 Method: Maximum Peak
MAv1 - KDB558074 Option 1 Maximum RMS Average

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

MID CHANNEL

HORIZONTAL

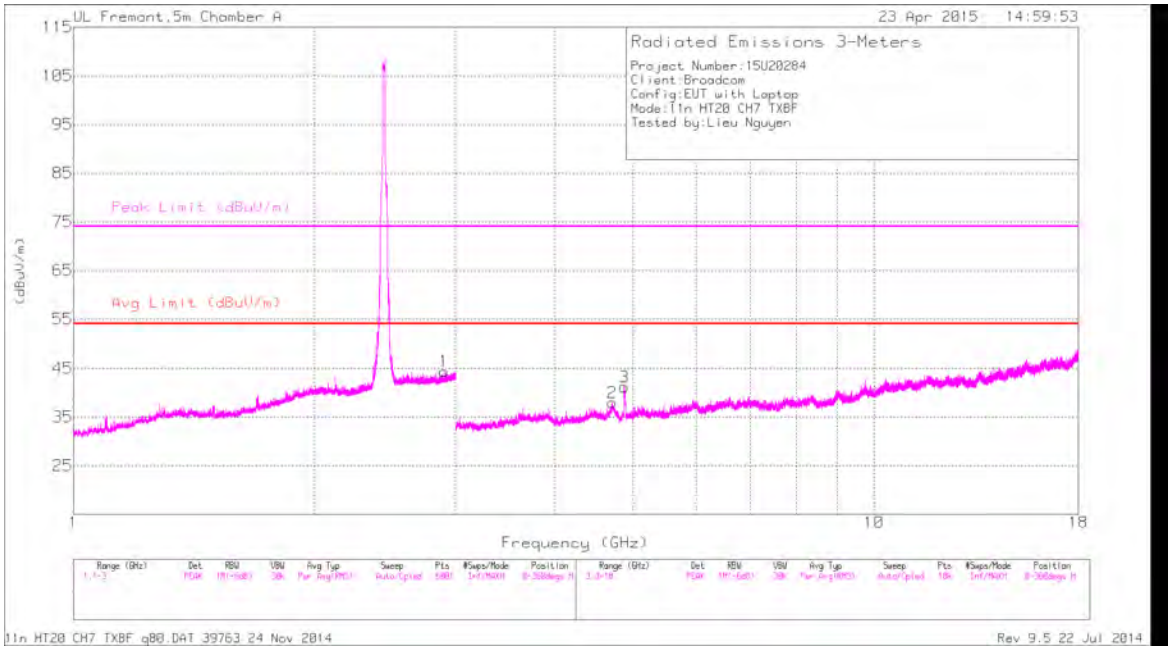

VERTICAL

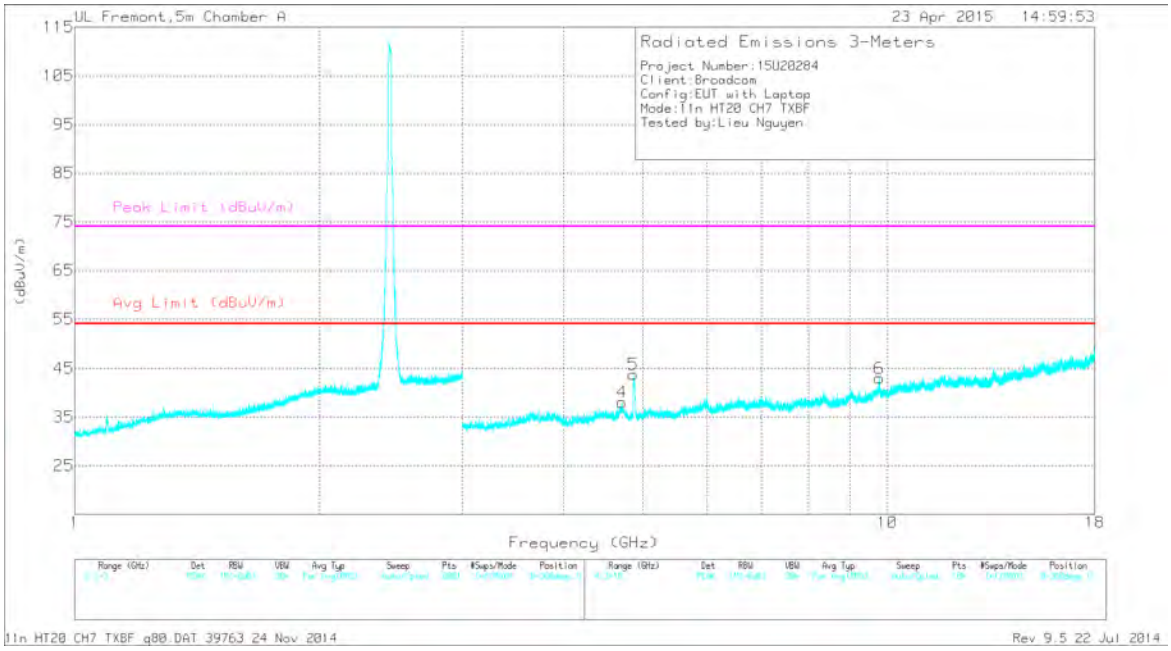

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T345 (dB/m)	Amp/Cbl/Fltr /Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	* 4.712	40.4	PK2	34.2	-29.2	0	45.4	-	-	74	-28.6	80	137	H
	* 4.713	28.74	MAv1	34.2	-29.2	.55	34.29	54	-19.71	-	-	80	137	H
3	* 4.882	47.06	PK2	34.2	-30.4	0	50.86	-	-	74	-23.14	239	282	H
	* 4.882	33.65	MAv1	34.2	-30.4	.55	38	54	-16	-	-	239	282	H
4	* 4.718	40.36	PK2	34.2	-29.1	0	45.46	-	-	74	-28.54	3	378	V
	* 4.718	28.68	MAv1	34.2	-29.1	.55	34.33	54	-19.67	-	-	3	378	V
5	* 4.864	43.36	PK2	34.2	-30.2	0	47.36	-	-	74	-26.64	142	236	V
	* 4.864	31.01	MAv1	34.2	-30.2	.55	35.56	54	-18.44	-	-	142	236	V
1	2.904	31.89	PK	32.6	-20.1	0	44.39	-	-	-	-	0-360	101	H
6	9.776	30.08	PK	36.9	-24	0	42.98	-	-	-	-	0-360	101	V

* - indicates frequency in CFR15.205/IC8.10 Restricted Band

-Compliance for emissions in non-restricted bands shown in conducted out of band testing

PK - Peak detector
PK2 - KDB558074 Method: Maximum Peak
MAv1 - KDB558074 Option 1 Maximum RMS Average

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

HIGH CHANNEL

HORIZONTAL

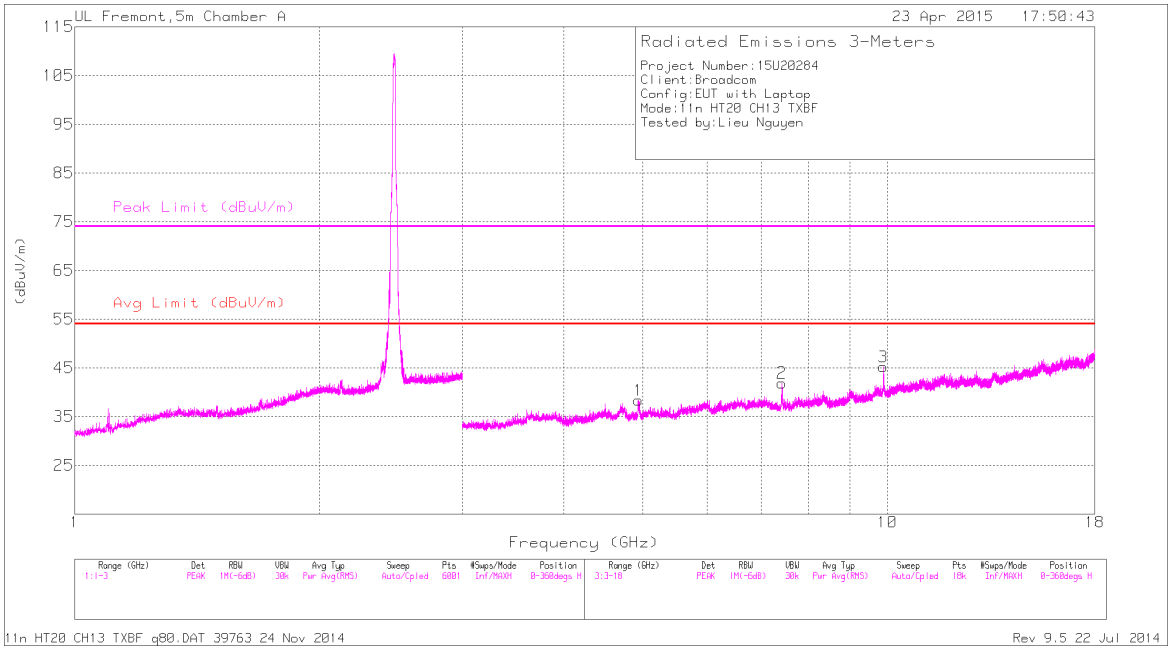

VERTICAL

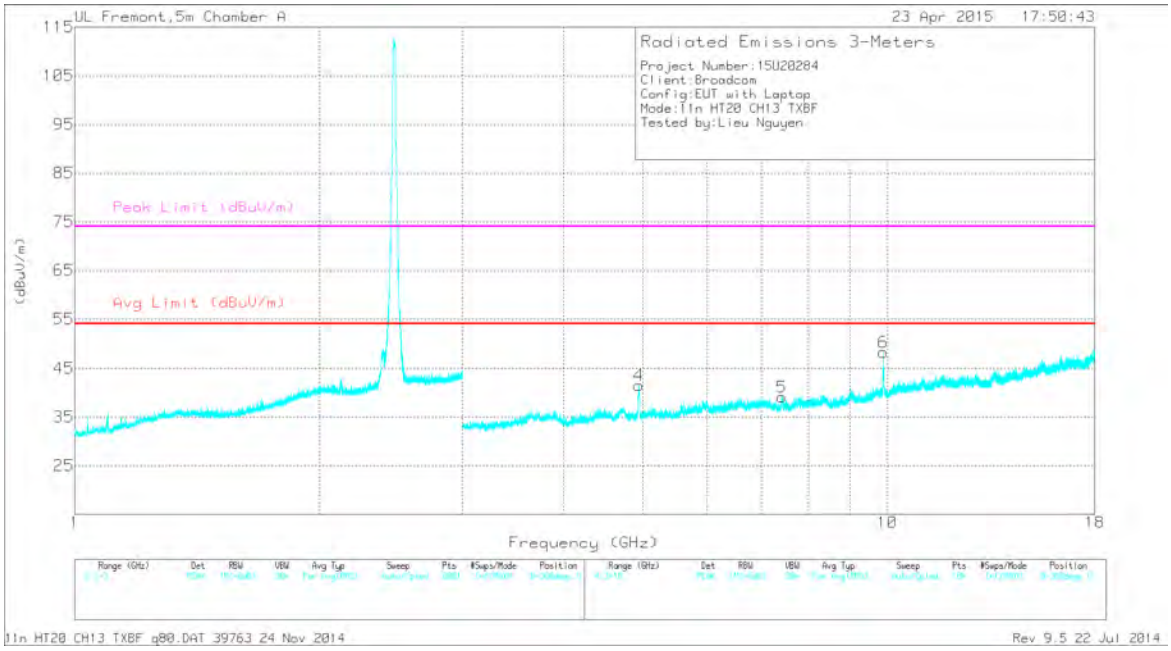

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T345 (dB/m)	Amp/Cbl/Fltr /Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 4.942	47.03	PK2	34.1	-30.4	0	50.73	-	-	74	-23.27	285	335	H
	* 4.943	32.85	MAv1	34.1	-30.4	.55	37.1	54	-16.9	-	-	285	335	H
2	* 7.422	39.48	PK2	35.4	-27.2	0	47.68	-	-	74	-26.32	169	367	H
	* 7.419	27.8	MAv1	35.4	-27.3	.55	36.45	54	-17.55	-	-	169	367	H
4	* 4.947	49.24	PK2	34.1	-30.4	0	52.94	-	-	74	-21.06	130	141	V
	* 4.945	35.46	MAv1	34.1	-30.4	.55	39.71	54	-14.29	-	-	130	141	V
5	* 7.416	40.18	PK2	35.4	-27.3	0	48.28	-	-	74	-25.72	328	329	V
	* 7.414	27.89	MAv1	35.4	-27.3	.55	36.54	54	-17.46	-	-	328	329	V
3	9.888	32.03	PK	37.1	-23.9	0	45.23	-	-	-	-	0-360	200	H
6	9.888	35.1	PK	37.1	-23.9	0	48.3	-	-	-	-	0-360	200	V

* - indicates frequency in CFR15.205/IC8.10 Restricted Band

-Compliance for emissions in non-restricted bands shown in conducted out of band testing

PK - Peak detector
PK2 - KDB558074 Method: Maximum Peak
MAv1 - KDB558074 Option 1 Maximum RMS Average

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

9.6. TX ABOVE 1 GHz 802.11n HT40 CDD 1Tx MODE IN THE 2.4 GHz BAND

RESTRICTED BANDEDGE (CHANNEL 3)

CHANNEL 3 RESTRICTED, VERT

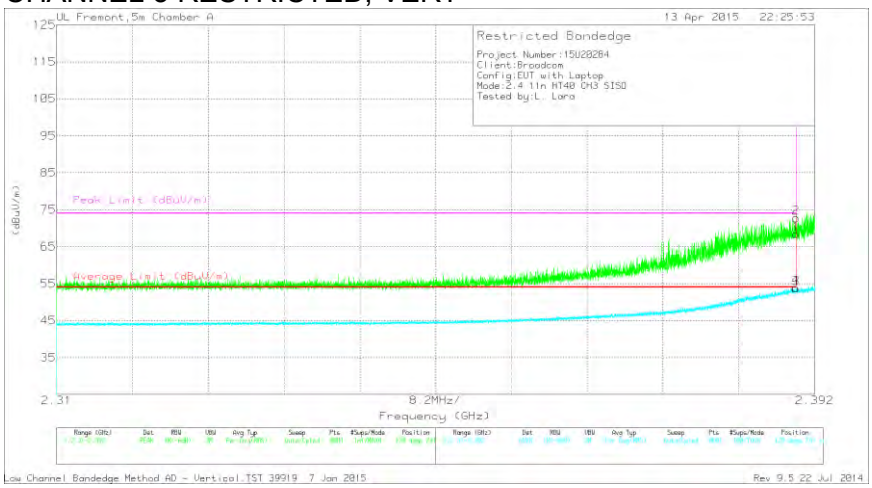

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T136 (dB/m)	Bypass (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	31.53	PK	32	4.9	0	68.43	-	-	74	-5.57	129	241	V
2	* 2.39	35.85	PK	32	4.9	0	72.75	-	-	74	-1.25	129	241	V
3	* 2.39	16.71	RMS	32	4.9	.13	53.74	54	-.26	-	-	129	241	V
4	* 2.39	16.76	RMS	32	4.9	.13	53.79	54	-.21	-	-	129	241	V

* - indicates frequency in CFR15.205/IC8.10 Restricted Band

PK - Peak detector
RMS - RMS detection

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

RESTRICTED BANDEDGE (CHANNEL 4)

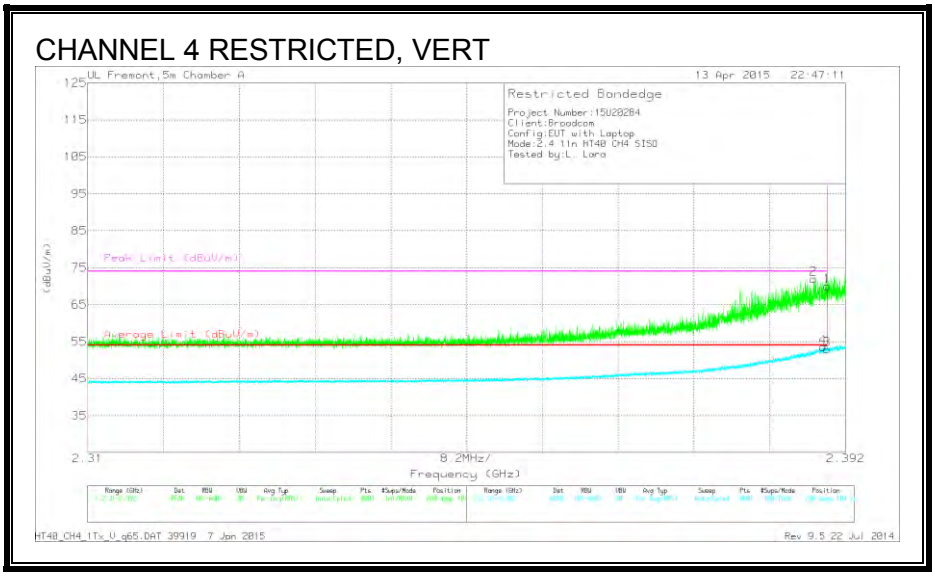

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T136 (dB/m)	Bypass (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	* 2.389	35.1	PK	32	4.9	0	72	-	-	74	-2	280	104	V
1	* 2.39	33.13	PK	32	4.9	0	70.03	-	-	74	-3.97	280	104	V
3	* 2.39	15.9	RMS	32	4.9	.13	52.93	54	-1.07	-	-	280	104	V
4	* 2.39	16.46	RMS	32	4.9	.13	53.49	54	-.51	-	-	280	104	V

* - indicates frequency in CFR15.205/IC8.10 Restricted Band

PK - Peak detector
RMS - RMS detection

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

RESTRICTED BANDEDGE (CHANNEL 5)

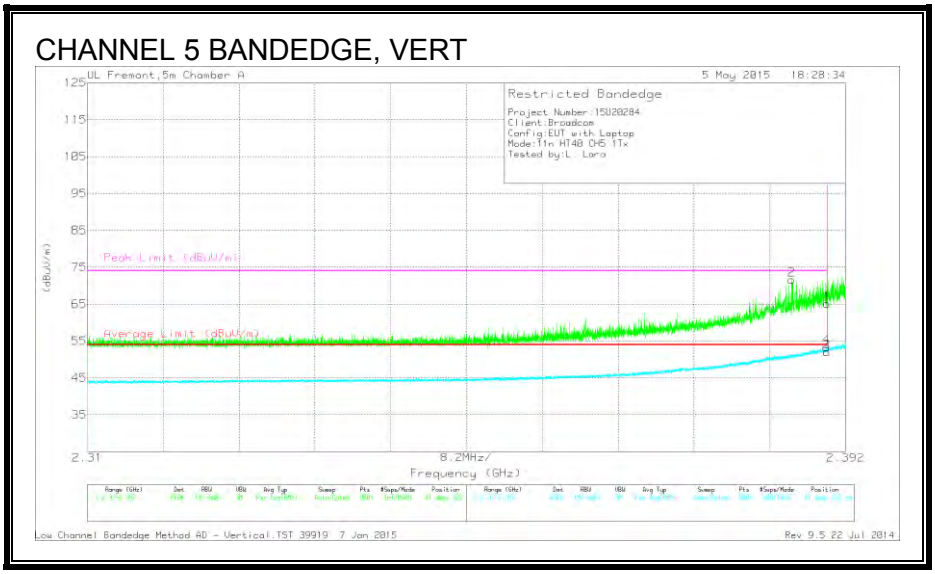

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T136 (dB/m)	Bypass (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	* 2.386	34.73	PK	32	4.9	0	71.63	-	-	74	-2.37	41	222	V
1	* 2.39	28.24	PK	32	4.9	0	65.14	-	-	74	-8.86	41	222	V
3	* 2.39	15.01	RMS	32	4.9	.13	52.04	54	-1.96	-	-	41	222	V
4	* 2.39	16.24	RMS	32	4.9	.13	53.27	54	-.73	-	-	41	222	V

* - indicates frequency in CFR15.205/IC8.10 Restricted Band

PK - Peak detector
RMS - RMS detection

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

RESTRICTED BANDEDGE (CHANNEL 6)

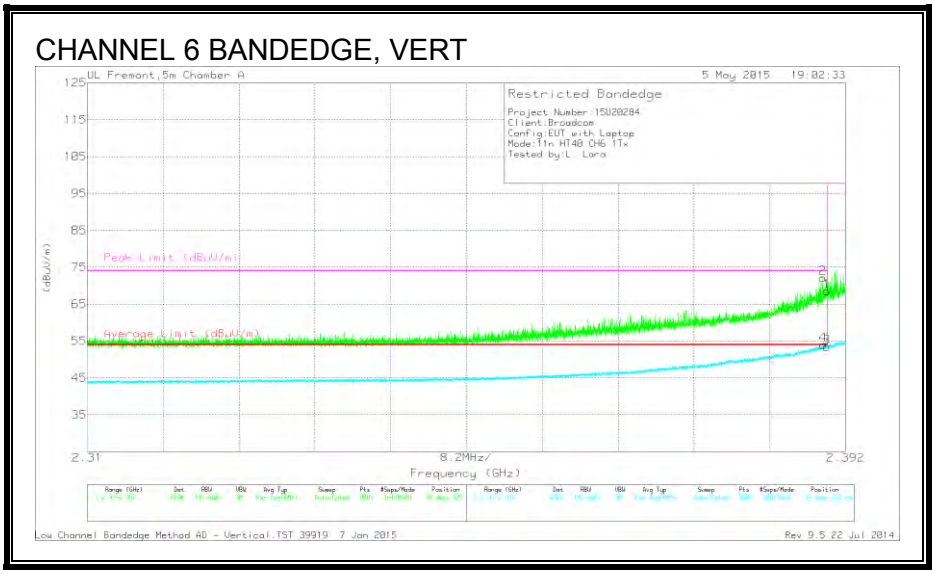

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T136 (dB/m)	Bypass (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	31.61	PK	32	4.9	0	68.51	-	-	74	-5.49	39	225	V
2	* 2.39	35.16	PK	32	4.9	0	72.06	-	-	74	-1.94	39	225	V
3	* 2.39	16.33	RMS	32	4.9	.13	53.36	54	-.64	-	-	39	225	V
4	* 2.39	16.95	RMS	32	4.9	.13	53.98	54	-.02	-	-	39	225	V

* - indicates frequency in CFR15.205/IC8.10 Restricted Band

PK - Peak detector
RMS - RMS detection

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

AUTHORIZED BANDEDGE (CHANNEL 7)

CHANNEL 7 BANDEDGE, VERT

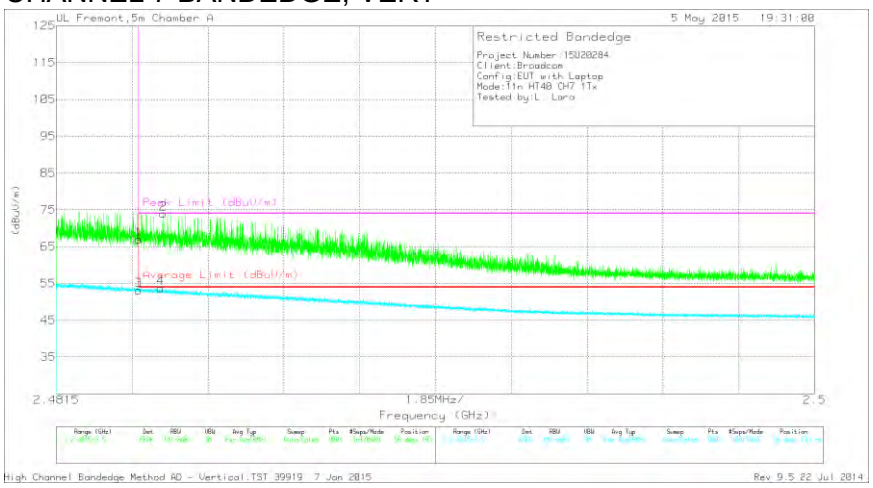

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T136 (dB/m)	Bypass (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	29.84	PK	32.1	5	0	66.94	-	-	74	-7.06	56	193	V
2	* 2.484	36.83	PK	32.1	5	0	73.93	-	-	74	-.07	56	193	V
3	* 2.484	15.93	RMS	32.1	5	.13	53.16	54	-.84	-	-	56	193	V
4	* 2.484	16.48	RMS	32.1	5	.13	53.71	54	-.29	-	-	56	193	V

* - indicates frequency in CFR15.205/IC8.10 Restricted Band

PK - Peak detector
RMS - RMS detection

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

AUTHORIZED BANDEDGE (CHANNEL 8)

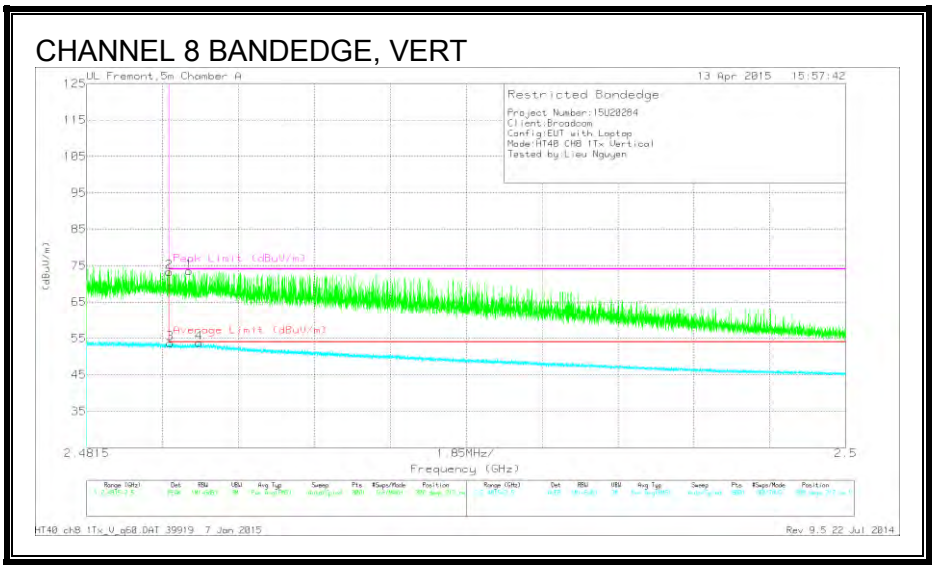

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T136 (dB/m)	Bypass (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	36.43	PK	32.1	5	0	73.53	-	-	74	-.47	308	212	V
2	* 2.484	36.12	PK	32.1	5	0	73.22	-	-	74	-.78	308	212	V
3	* 2.484	16.55	RMS	32.1	5	.13	53.78	54	-.22	-	-	308	212	V
4	* 2.484	16.68	RMS	32.1	5	.13	53.91	54	-.09	-	-	308	212	V

* - indicates frequency in CFR15.205/IC8.10 Restricted Band

PK - Peak detector
RMS - RMS detection

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

AUTHORIZED BANDEDGE (CHANNEL 9)

CHANNEL 9 BANDEDGE, VERT

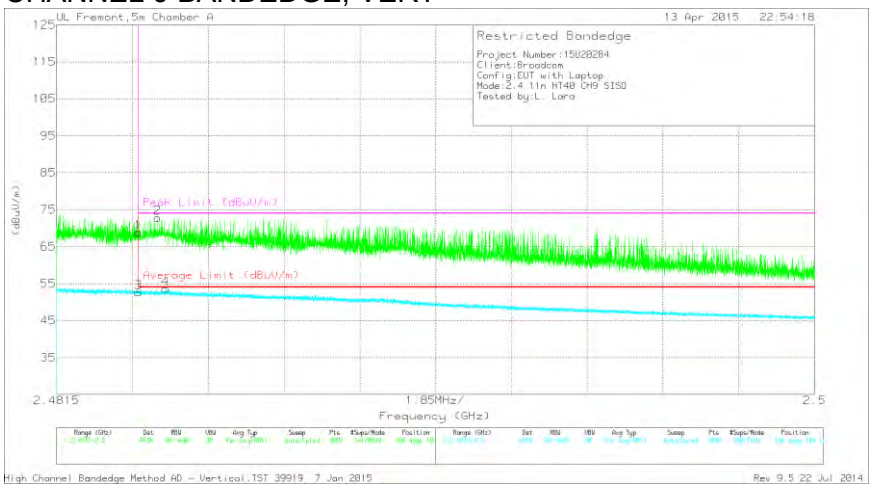

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T136 (dB/m)	Bypass (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	31.74	PK	32.1	5	0	68.84	-	-	74	-5.16	106	104	V
2	* 2.484	35.7	PK	32.1	5	0	72.8	-	-	74	-1.2	106	104	V
3	* 2.484	15.4	RMS	32.1	5	.13	52.63	54	-1.37	-	-	106	104	V
4	* 2.484	16.37	RMS	32.1	5	.13	53.6	54	-.4	-	-	106	104	V

* - indicates frequency in CFR15.205/IC8.10 Restricted Band

PK - Peak detector
RMS - RMS detection

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

AUTHORIZED BANDEDGE (CHANNEL 10)

CHANNEL 10 BANDEDGE, VERT

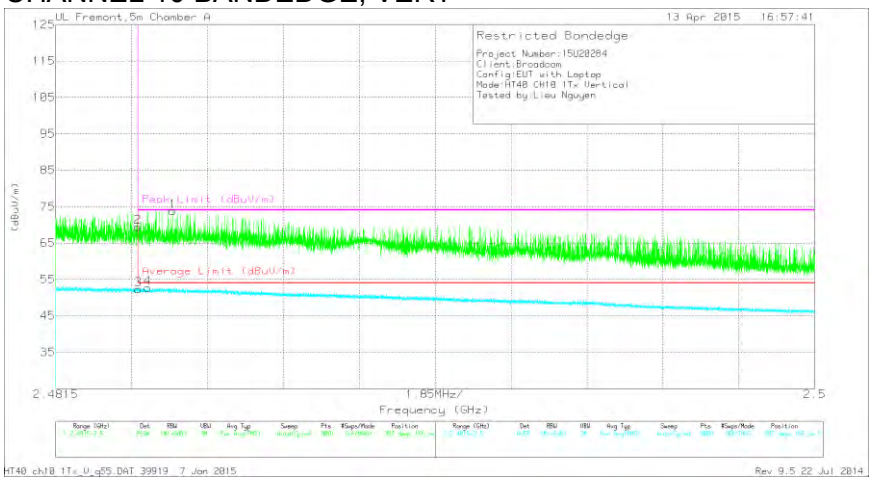

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T136 (dB/m)	Bypass (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	36.69	PK	32.1	5	0	73.79	-	-	74	-.21	307	166	V
2	* 2.484	32.28	PK	32.1	5	0	69.38	-	-	74	-4.62	307	166	V
3	* 2.484	15.19	RMS	32.1	5	.13	52.42	54	-1.58	-	-	307	166	V
4	* 2.484	15.5	RMS	32.1	5	.13	52.73	54	-1.27	-	-	307	166	V

* - indicates frequency in CFR15.205/IC8.10 Restricted Band

PK - Peak detector
RMS - RMS detection

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

AUTHORIZED BANDEDGE (CHANNEL 11)

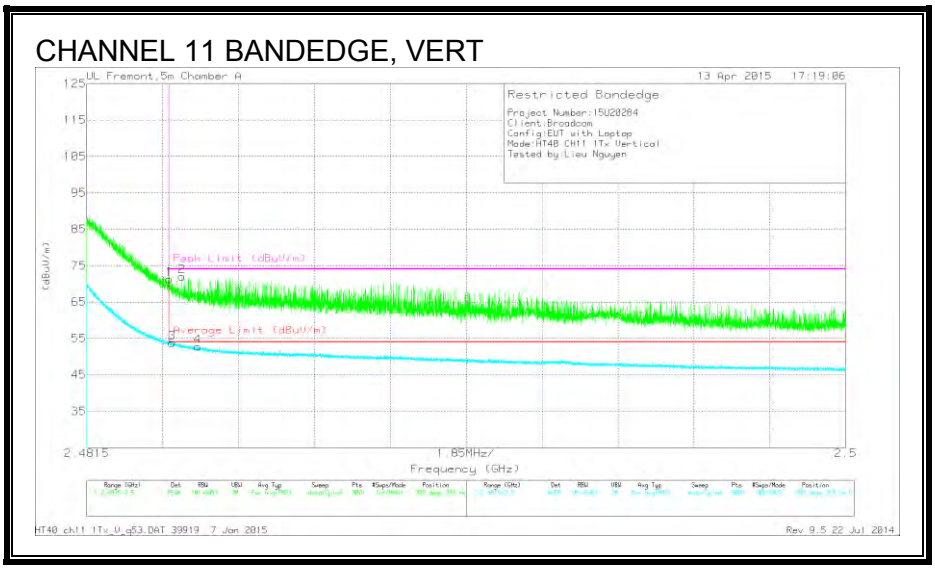

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T136 (dB/m)	Bypass (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	34.14	PK	32.1	5	0	71.24	-	-	74	-2.76	309	268	V
2	* 2.484	34.87	PK	32.1	5	0	71.97	-	-	74	-2.03	309	268	V
3	* 2.484	16.67	RMS	32.1	5	.13	53.9	54	-.1	-	-	309	268	V
4	* 2.484	15.68	RMS	32.1	5	.13	52.91	54	-1.09	-	-	309	268	V

* - indicates frequency in CFR15.205/IC8.10 Restricted Band

PK - Peak detector
RMS - RMS detection

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

9.7. TX ABOVE 1 GHz 802.11n HT40 CDD 2Tx MODE IN THE 2.4 GHz BAND

RESTRICTED BANDEDGE (CHANNEL 3)

CHANNEL 3 RESTRICTED, VERT

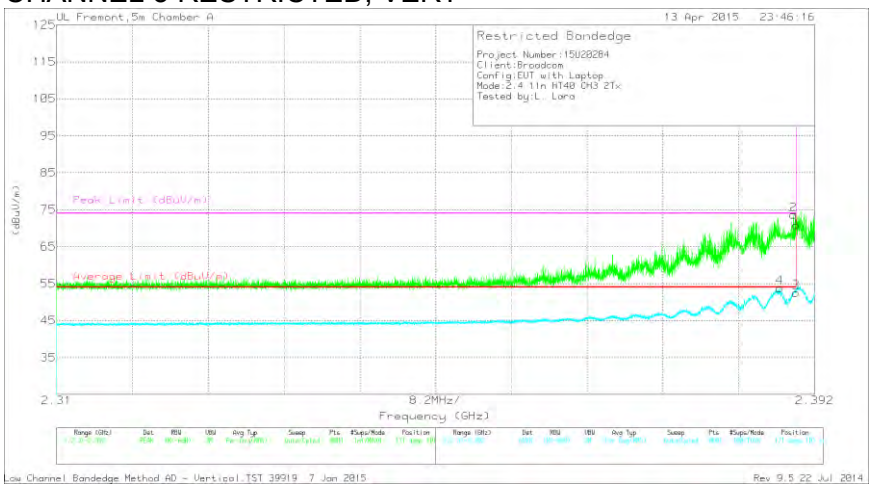

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T136 (dB/m)	Bypass (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
4	* 2.388	16.77	RMS	32	4.9	.13	53.8	54	-.2	-	-	171	101	V
1	* 2.39	33.94	PK	32	4.9	0	70.84	-	-	74	-3.16	171	101	V
2	* 2.39	36.74	PK	32	4.9	0	73.64	-	-	74	-.36	171	101	V
3	* 2.39	15.52	RMS	32	4.9	.13	52.55	54	-1.45	-	-	171	101	V

* - indicates frequency in CFR15.205/IC8.10 Restricted Band

PK - Peak detector
RMS - RMS detection

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

RESTRICTED BANDEDGE (CHANNEL 4)

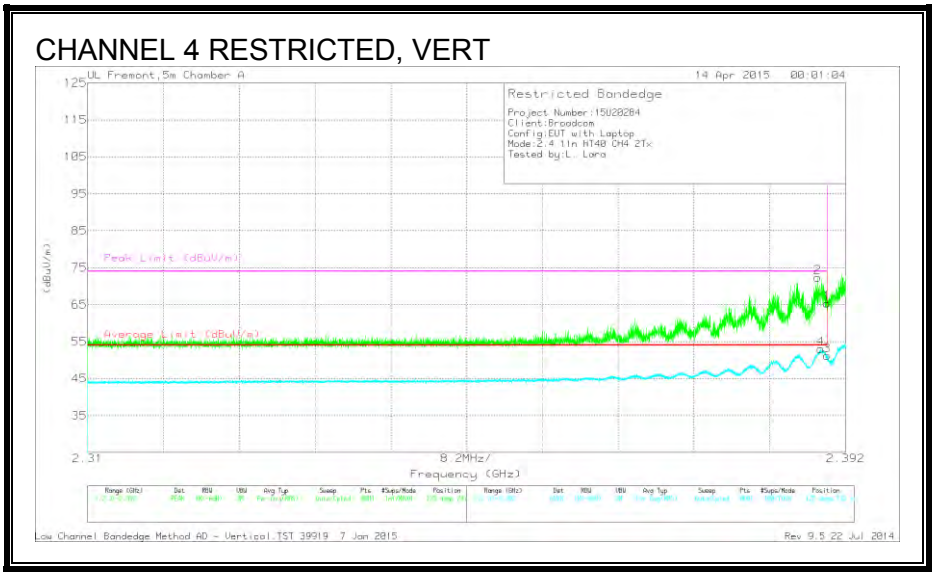

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T136 (dB/m)	Bypass (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	* 2.389	35.46	PK	32	4.9	0	72.36	-	-	74	-1.64	125	242	V
4	* 2.389	16.05	RMS	32	4.9	.13	53.08	54	-.92	-	-	125	242	V
1	* 2.39	28.49	PK	32	4.9	0	65.39	-	-	74	-8.61	125	242	V
3	* 2.39	14.21	RMS	32	4.9	.13	51.24	54	-2.76	-	-	125	242	V

* - indicates frequency in CFR15.205/IC8.10 Restricted Band

PK - Peak detector
RMS - RMS detection

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

AUTHORIZED BANDEDGE (CHANNEL 8)

CHANNEL 8 BANDEDGE, VERT

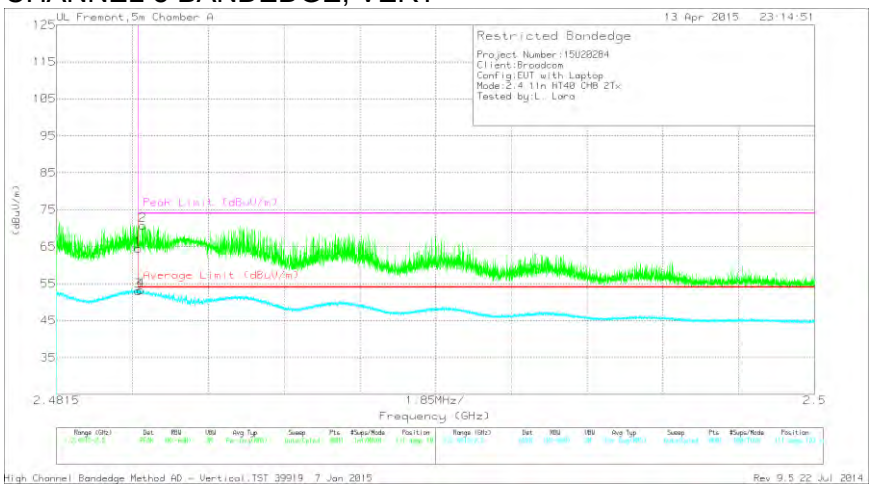

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T136 (dB/m)	Bypass (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	27.41	PK	32.1	5	0	64.51	-	-	74	-9.49	111	183	V
2	* 2.484	33.69	PK	32.1	5	0	70.79	-	-	74	-3.21	111	183	V
3	* 2.484	15.83	RMS	32.1	5	.13	53.06	54	-.94	-	-	111	183	V
4	* 2.484	16.03	RMS	32.1	5	.13	53.26	54	-.74	-	-	111	183	V

* - indicates frequency in CFR15.205/IC8.10 Restricted Band

PK - Peak detector
RMS - RMS detection

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

AUTHORIZED BANDEDGE (CHANNEL 9)

CHANNEL 9 BANDEDGE, VERT

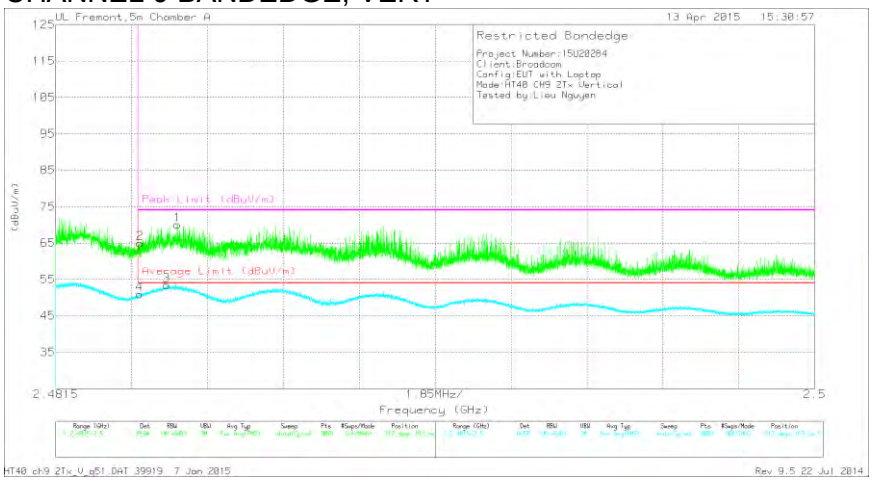

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T136 (dB/m)	Bypass (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	32.96	PK	32.1	5	0	70.06	-	-	74	-3.94	312	163	V
2	* 2.484	27.84	PK	32.1	5	0	64.94	-	-	74	-9.06	312	163	V
3	* 2.484	16.35	RMS	32.1	5	.13	53.58	54	-.42	-	-	312	163	V
4	* 2.484	13.79	RMS	32.1	5	.13	51.02	54	-2.98	-	-	312	163	V

* - indicates frequency in CFR15.205/IC8.10 Restricted Band

PK - Peak detector
RMS - RMS detection

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

AUTHORIZED BANDEDGE (CHANNEL 10)

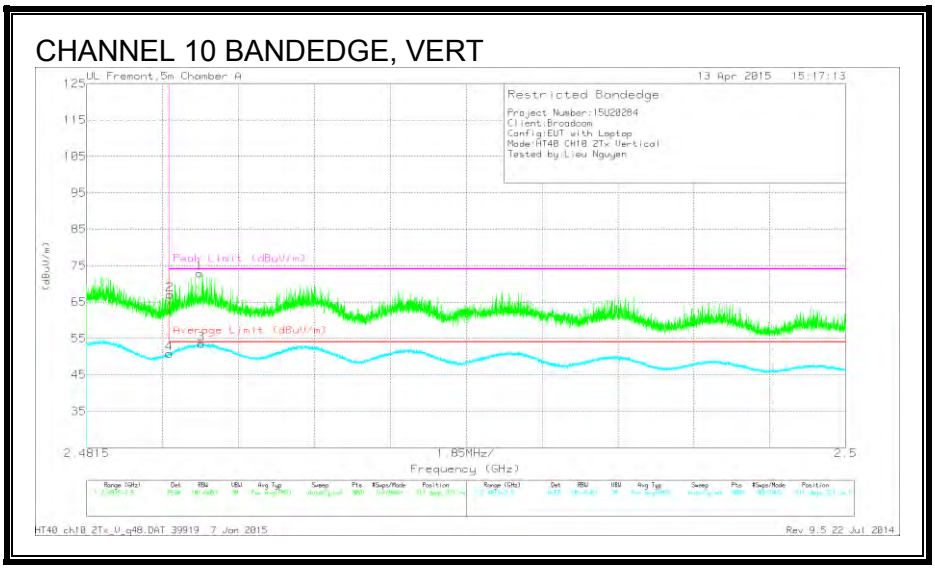

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T136 (dB/m)	Bypass (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	35.75	PK	32.1	5	0	72.85	-	-	74	-1.15	311	221	V
2	* 2.484	29.99	PK	32.1	5	0	67.09	-	-	74	-6.91	311	221	V
3	* 2.484	16.45	RMS	32.1	5	.13	53.68	54	-.32	-	-	311	221	V
4	* 2.484	13.67	RMS	32.1	5	.13	50.9	54	-3.1	-	-	311	221	V

* - indicates frequency in CFR15.205/IC8.10 Restricted Band

PK - Peak detector
RMS - RMS detection

UL VERIFICATION SERVICES INC. FORM NO: CCSUP4701J
47173 BENICIA STREET, FREMONT, CA 94538, USA TEL: (510) 771-1000 FAX: (510) 661-0888
This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

AUTHORIZED BANDEDGE (CHANNEL 11)

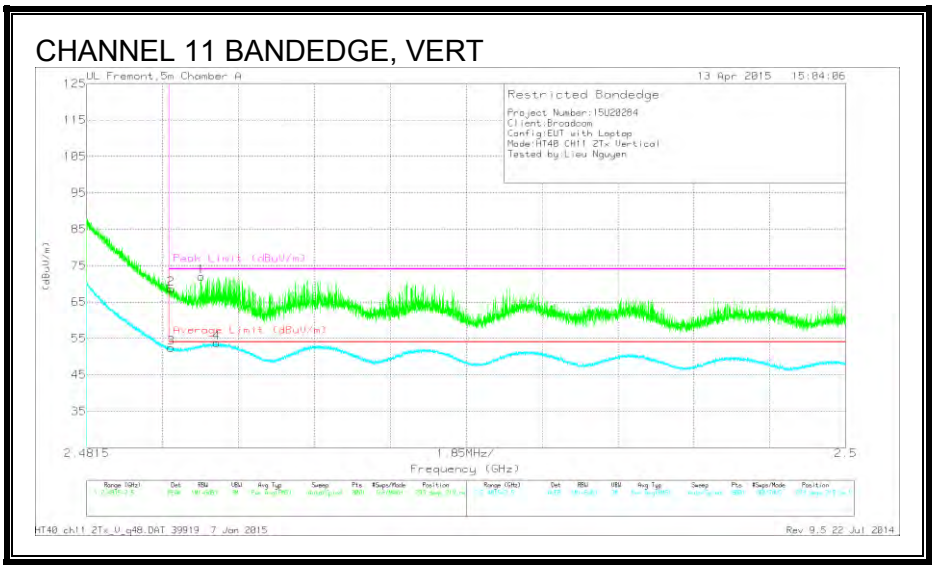

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T136 (dB/m)	Bypass (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	34.92	PK	32.1	5	0	72.02	-	-	74	-1.98	293	219	V
2	* 2.484	31.6	PK	32.1	5	0	68.7	-	-	74	-5.3	293	219	V
3	* 2.484	15.35	RMS	32.1	5	.13	52.58	54	-1.42	-	-	293	219	V
4	* 2.485	16.72	RMS	32.1	5	.13	53.95	54	-.05	-	-	293	219	V

* - indicates frequency in CFR15.205/IC8.10 Restricted Band

PK - Peak detector
RMS - RMS detection

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

HARMONICS AND SPURIOUS EMISSIONS

LOW CHANNEL

HORIZONTAL

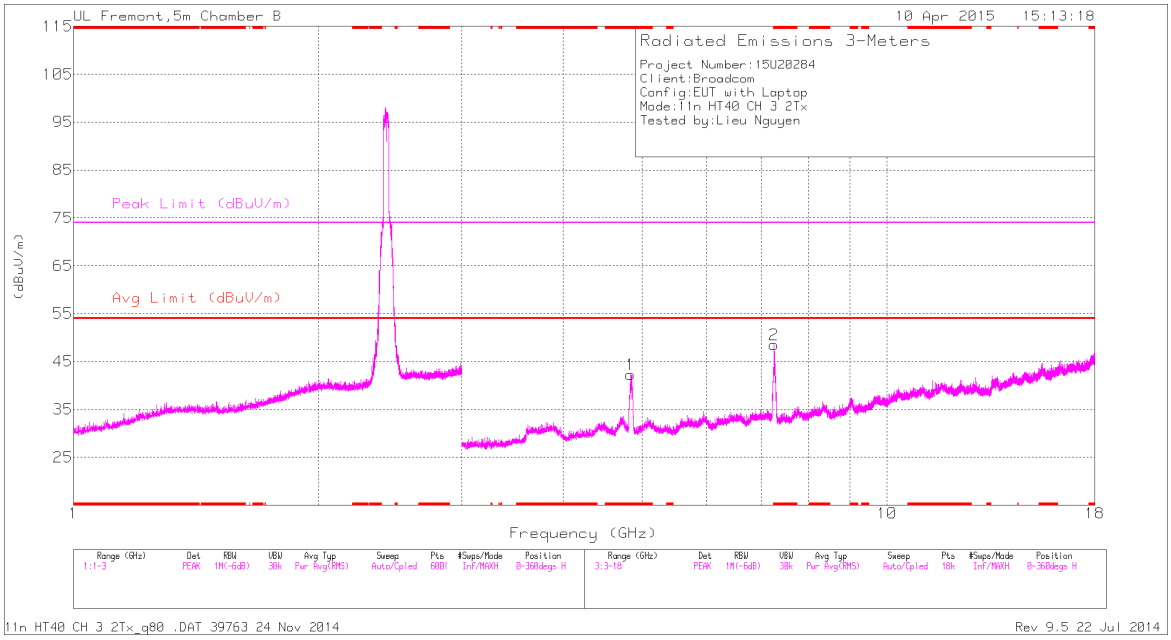

VERTICAL

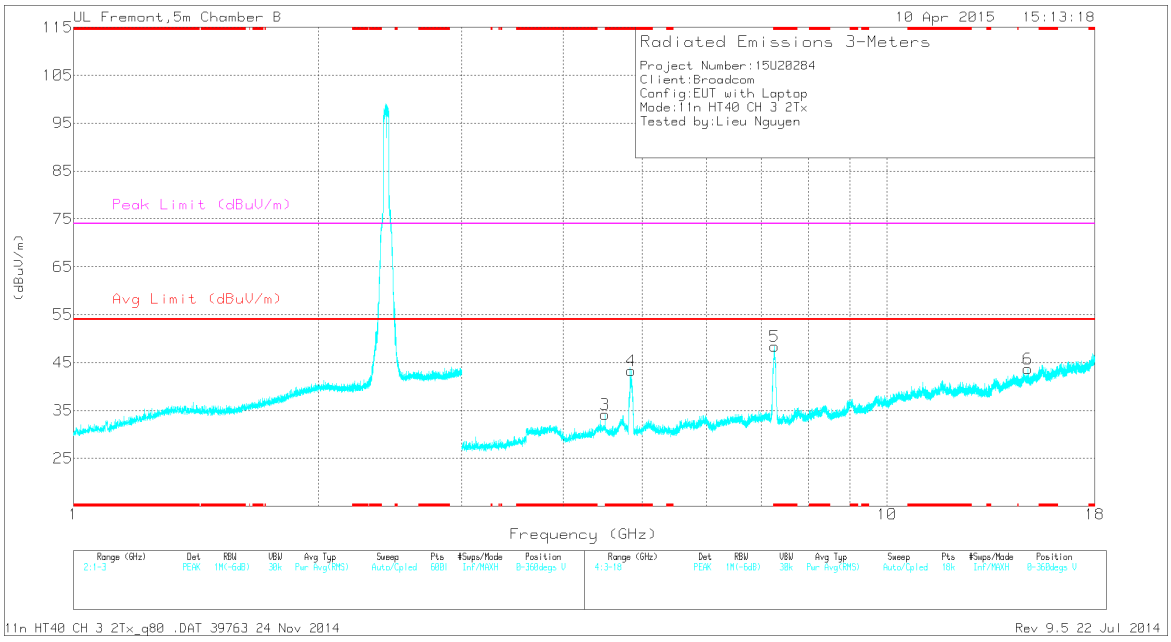

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T345 (dB/m)	Amp/Cbl/Fltr /Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 4.841	41.95	PK2	34.2	-29.8	0	46.35	-	-	74	-27.65	279	198	H
	* 4.84	31.45	MAv1	34.2	-29.8	.13	35.98	54	-18.02	-	-	279	198	H
2	* 7.258	48.75	PK2	35.3	-27.8	0	56.25	-	-	74	-17.75	213	274	H
	* 7.256	35.86	MAv1	35.3	-27.9	.13	43.39	54	-10.61	-	-	213	274	H
4	* 4.846	41.18	PK2	34.2	-30	0	45.38	-	-	74	-28.62	261	236	V
	* 4.845	30.67	MAv1	34.2	-29.9	.13	35.1	54	-18.9	-	-	261	236	V
5	* 7.271	45.49	PK2	35.3	-27.8	0	52.99	-	-	74	-21.01	45	273	V
	* 7.271	34.9	MAv1	35.3	-27.9	.13	42.43	54	-11.57	-	-	45	273	V
3	4.5	29.5	PK	34	-29.3	0	34.2	-	-	-	-	0-360	199	V
6	14.894	25.25	PK	39.9	-21.5	0	43.65	-	-	-	-	0-360	199	V

* - indicates frequency in CFR15.205/IC8.10 Restricted Band

-Compliance for emissions in non-restricted bands shown in conducted out of band testing

PK - Peak detector
PK2 - KDB558074 Method: Maximum Peak
MAv1 - KDB558074 Option 1 Maximum RMS Average

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

MID CHANNEL

HORIZONTAL

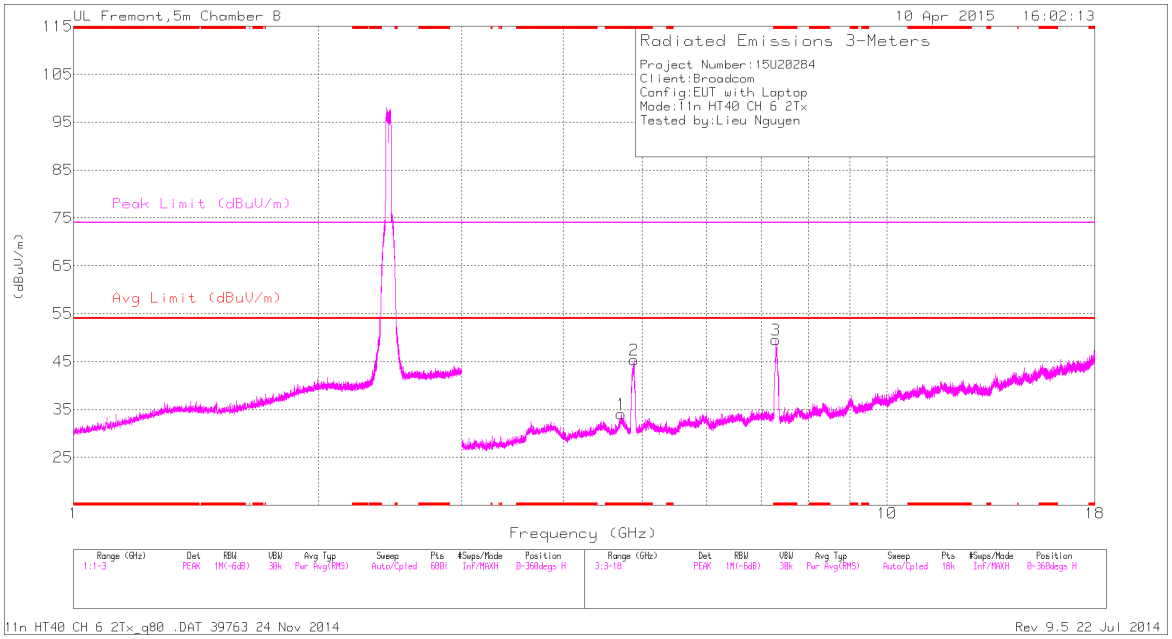

VERTICAL

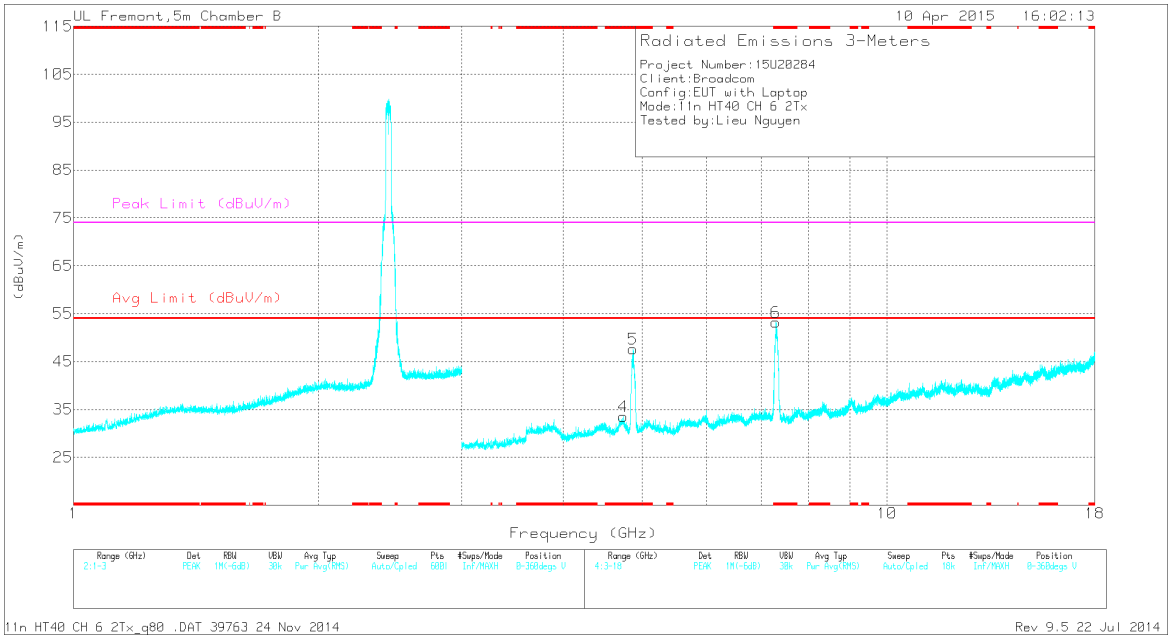

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T345 (dB/m)	Amp/Cbl/Fltr /Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 4.71	36.12	PK2	34.2	-29.2	0	41.12	-	-	74	-32.88	197	111	H
	* 4.71	24.46	MAv1	34.2	-29.2	.13	29.59	54	-24.41	-	-	197	111	H
2	* 4.885	43.62	PK2	34.2	-30.4	0	47.42	-	-	74	-26.58	85	268	H
	* 4.883	32.28	MAv1	34.2	-30.4	.13	36.21	54	-17.79	-	-	85	268	H
3	* 7.301	47.04	PK2	35.3	-28.1	0	54.24	-	-	74	-19.76	230	215	H
	* 7.301	33.73	MAv1	35.3	-28.1	.13	41.06	54	-12.94	-	-	230	215	H
4	* 4.742	36.09	PK2	34.3	-29.1	0	41.29	-	-	74	-32.71	271	110	V
	* 4.741	24.38	MAv1	34.3	-29.1	.13	29.71	54	-24.29	-	-	271	110	V
5	* 4.871	43.31	PK2	34.2	-30.3	0	47.21	-	-	74	-26.79	353	264	V
	* 4.873	31.54	MAv1	34.2	-30.4	.13	35.47	54	-18.53	-	-	353	264	V
6	* 7.301	44.53	PK2	35.3	-28.1	0	51.73	-	-	74	-22.27	47	213	V
	* 7.301	32.88	MAv1	35.3	-28.1	.13	40.21	54	-13.79	-	-	47	213	V

* - indicates frequency in CFR15.205/IC8.10 Restricted Band

-Compliance for emissions in non-restricted bands shown in conducted out of band testing

PK - Peak detector
PK2 - KDB558074 Method: Maximum Peak
MAv1 - KDB558074 Option 1 Maximum RMS Average

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

HIGH CHANNEL

HORIZONTAL

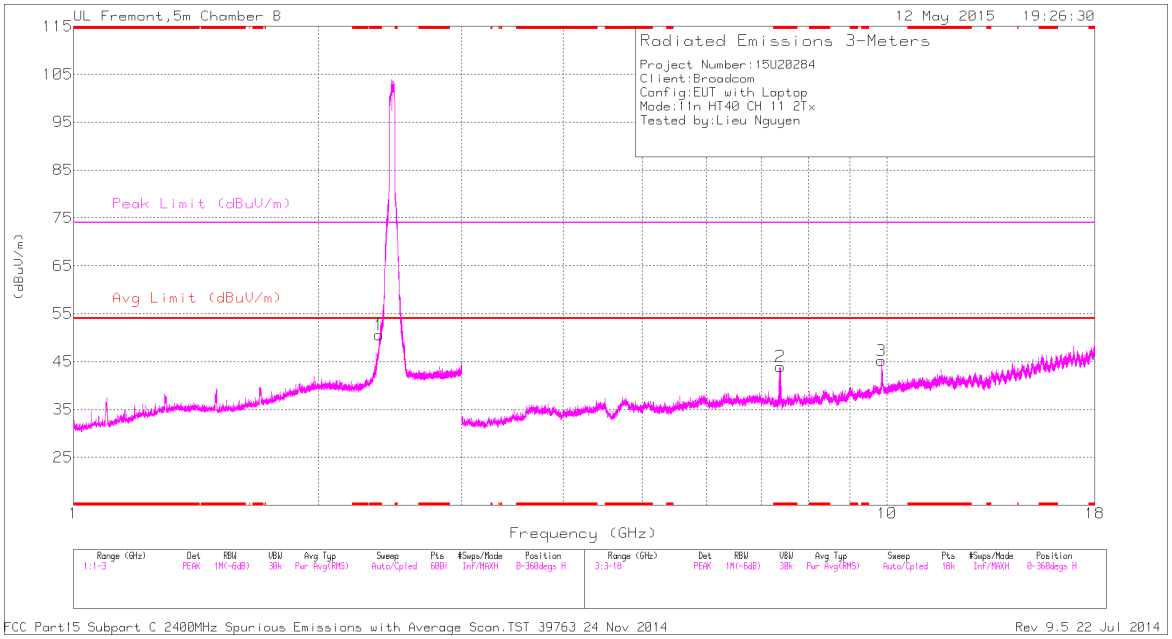

VERTICAL

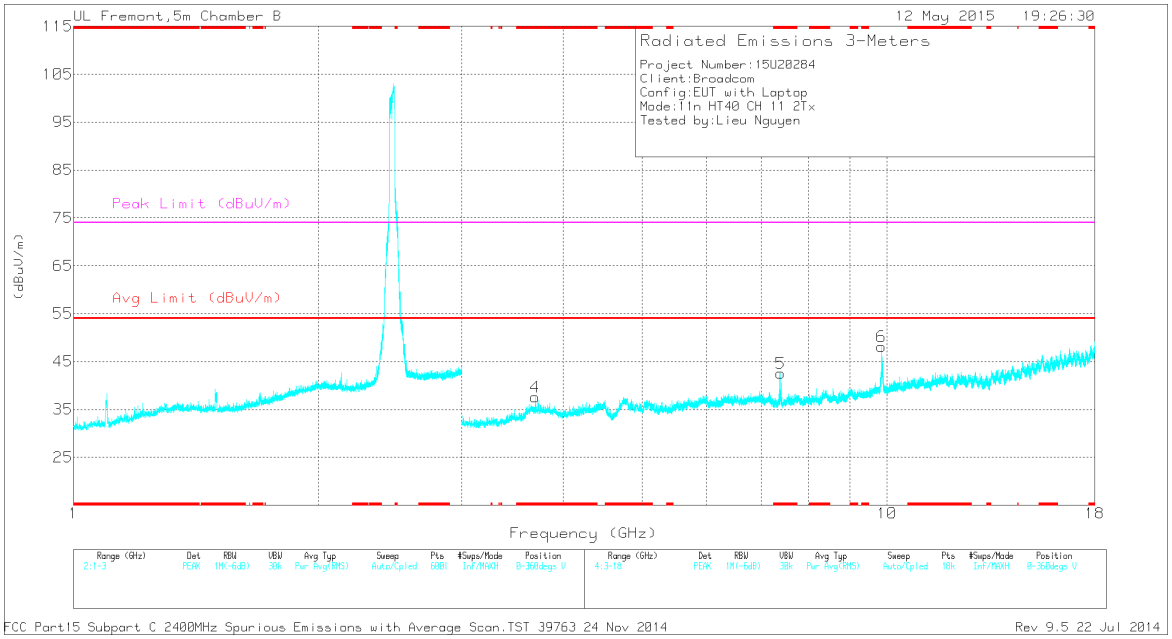

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T345 (dB/m)	Amp/Cbl/Fltr /Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.372	50.24	PK2	31.9	-20.9	0	61.24	-	-	74	-12.76	163	229	H
	* 2.374	35.24	MAv1	31.9	-20.9	.13	46.37	54	-7.63	-	-	163	229	H
2	* 7.393	50.16	PK2	35.4	-27.5	0	58.06	-	-	74	-15.94	174	178	H
	* 7.392	27.98	MAv1	35.4	-27.5	.13	36.01	54	-17.99	-	-	174	178	H
4	* 3.693	42.01	PK2	33.6	-31.1	0	44.51	-	-	74	-29.49	245	242	V
	* 3.693	32.34	MAv1	33.6	-31.1	.13	34.97	54	-19.03	-	-	245	242	V
5	* 7.397	44.37	PK2	35.4	-27.4	0	52.37	-	-	74	-21.63	358	294	V
	* 7.396	27.66	MAv1	35.4	-27.4	.13	35.79	54	-18.21	-	-	358	294	V
3	9.848	32.28	PK	37	-24.1	0	45.18	-	-	-	-	0-360	200	H
6	9.848	35.28	PK	37	-24.1	0	48.18	-	-	-	-	0-360	200	V

* - indicates frequency in CFR15.205/IC8.10 Restricted Band

-Compliance for emissions in non-restricted bands shown in conducted out of band testing

PK - Peak detector
PK2 - KDB558074 Method: Maximum Peak
MAv1 - KDB558074 Option 1 Maximum RMS Average

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

9.8. TX ABOVE 1 GHz 802.11n HT40 CDD 3Tx MODE IN THE 2.4 GHz BAND

RESTRICTED BANDEDGE (CHANNEL 3)

CHANNEL 3 RESTRICTED, VERT

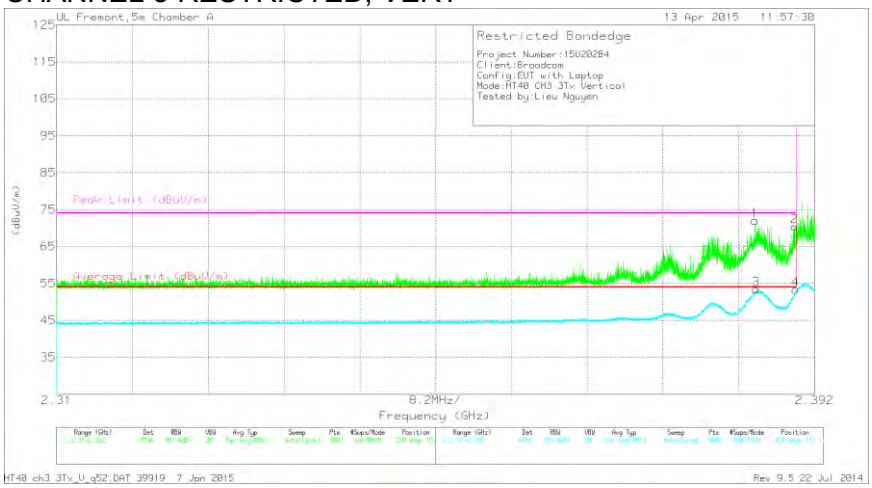

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T136 (dB/m)	Bypass (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.386	35.09	PK	32	4.9	0	71.99	-	-	74	-2.01	318	157	V
3	* 2.386	16.28	RMS	32	4.9	.13	53.31	54	-.69	-	-	318	157	V
2	* 2.39	33.48	PK	32	4.9	0	70.38	-	-	74	-3.62	318	157	V
4	* 2.39	16.23	RMS	32	4.9	.13	53.26	54	-.74	-	-	318	157	V

* - indicates frequency in CFR15.205/IC8.10 Restricted Band

PK - Peak detector
RMS - RMS detection

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

RESTRICTED BANDEDGE (CHANNEL 4)

CHANNEL 4 RESTRICTED, VERT

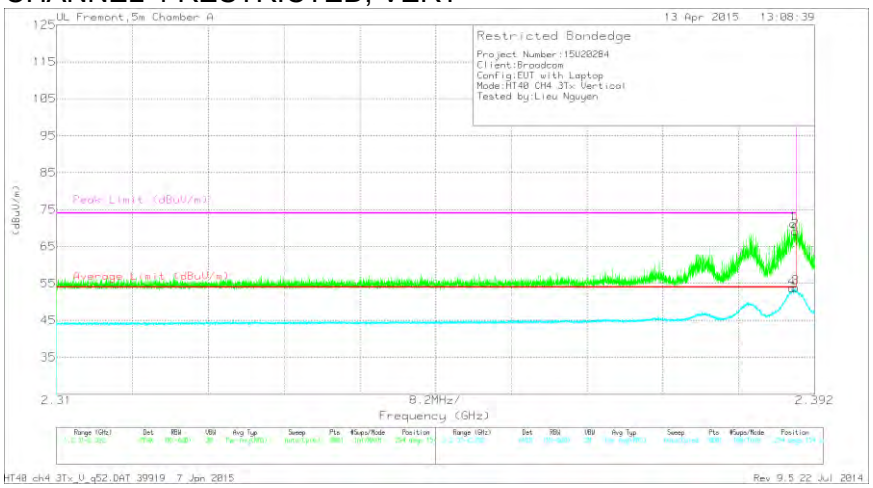

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T136 (dB/m)	Bypass (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	34.25	PK	32	4.9	0	71.15	-	-	74	-2.85	294	154	V
2	* 2.39	32.23	PK	32	4.9	0	69.13	-	-	74	-4.87	294	154	V
3	* 2.39	16.73	RMS	32	4.9	.13	53.76	54	-.24	-	-	294	154	V
4	* 2.39	16.54	RMS	32	4.9	.13	53.57	54	-.43	-	-	294	154	V

* - indicates frequency in CFR15.205/IC8.10 Restricted Band

PK - Peak detector
RMS - RMS detection

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

RESTRICTED BANDEDGE (CHANNEL 5)

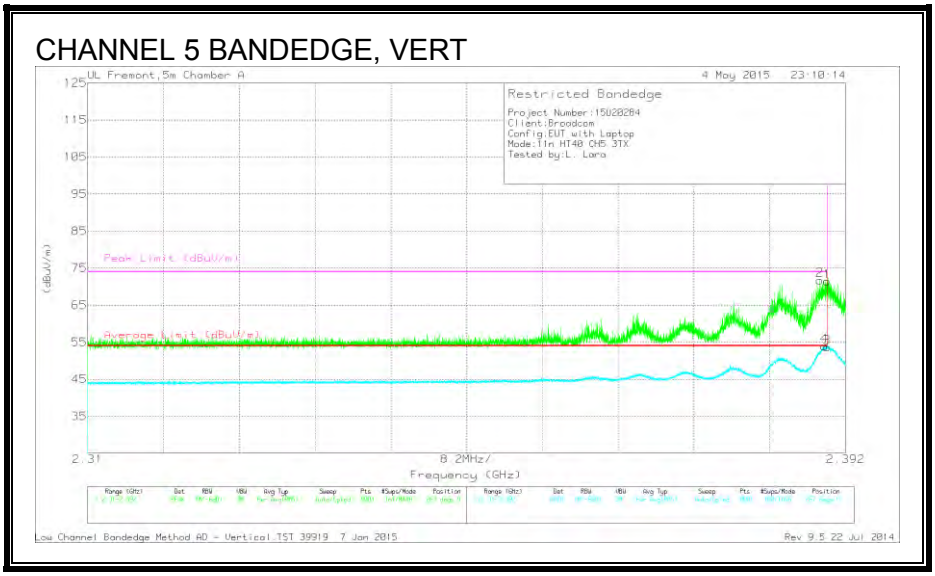

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T136 (dB/m)	Bypass (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	34.55	PK	32	4.9	0	71.45	-	-	74	-2.55	267	138	V
2	* 2.389	34.83	PK	32	4.9	0	71.73	-	-	74	-2.27	267	138	V
3	* 2.39	16.6	RMS	32	4.9	.13	53.63	54	-.37	-	-	267	138	V
4	* 2.39	16.9	RMS	32	4.9	.13	53.93	54	-.07	-	-	267	138	V

* - indicates frequency in CFR15.205/IC8.10 Restricted Band

PK - Peak detector
RMS - RMS detection

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

AUTHORIZED BANDEDGE (CHANNEL 6)

CHANNEL 6 BANDEDGE, VERT

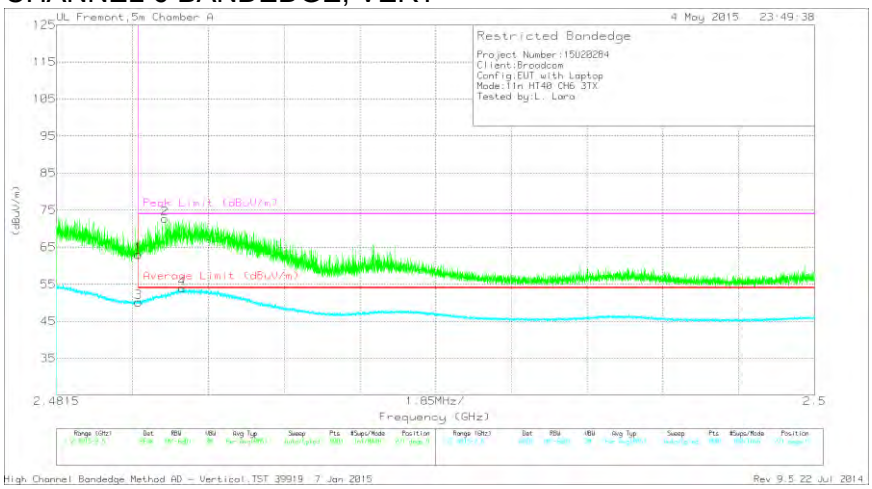

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T136 (dB/m)	Bypass (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	25.89	PK	32.1	5	0	62.99	-	-	74	-11.01	271	194	V
2	* 2.484	35.56	PK	32.1	5	0	72.66	-	-	74	-1.34	271	194	V
3	* 2.484	12.93	RMS	32.1	5	.13	50.16	54	-3.84	-	-	271	194	V
4	* 2.485	16.63	RMS	32.1	5	.13	53.86	54	-.14	-	-	271	194	V

* - indicates frequency in CFR15.205/IC8.10 Restricted Band

PK - Peak detector
RMS - RMS detection

UL VERIFICATION SERVICES INC. FORM NO: CCSUP4701J
47173 BENICIA STREET, FREMONT, CA 94538, USA TEL: (510) 771-1000 FAX: (510) 661-0888
This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

AUTHORIZED BANDEDGE (CHANNEL 7)

CHANNEL 7 BANDEDGE, VERT

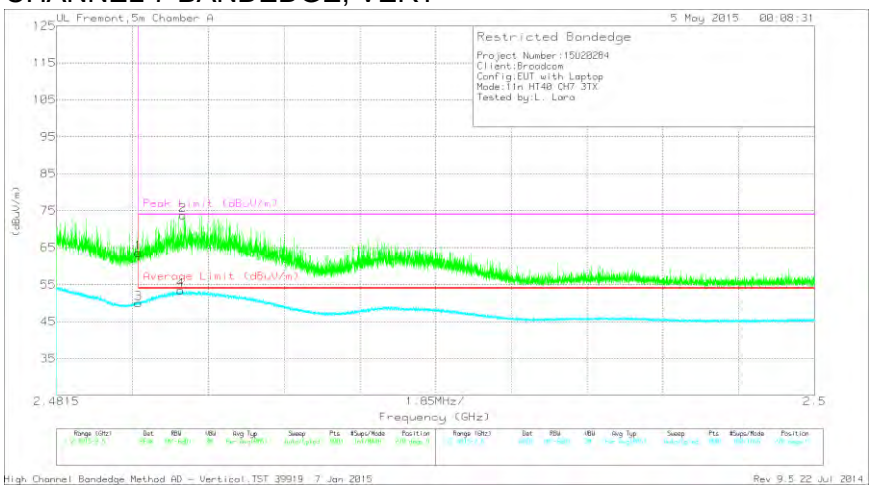

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T136 (dB/m)	Bypass (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	26.5	PK	32.1	5	0	63.6	-	-	74	-10.4	270	152	V
3	* 2.484	12.7	RMS	32.1	5	.13	49.93	54	-4.07	-	-	270	152	V
2	* 2.485	36.68	PK	32.1	5	0	73.78	-	-	74	-.22	270	152	V
4	* 2.485	16.22	RMS	32.1	5	.13	53.45	54	-.55	-	-	270	152	V

* - indicates frequency in CFR15.205/IC8.10 Restricted Band

PK - Peak detector
RMS - RMS detection

UL VERIFICATION SERVICES INC. FORM NO: CCSUP4701J
47173 BENICIA STREET, FREMONT, CA 94538, USA TEL: (510) 771-1000 FAX: (510) 661-0888
This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

AUTHORIZED BANDEDGE (CHANNEL 8)

CHANNEL 8 BANDEDGE, VERT

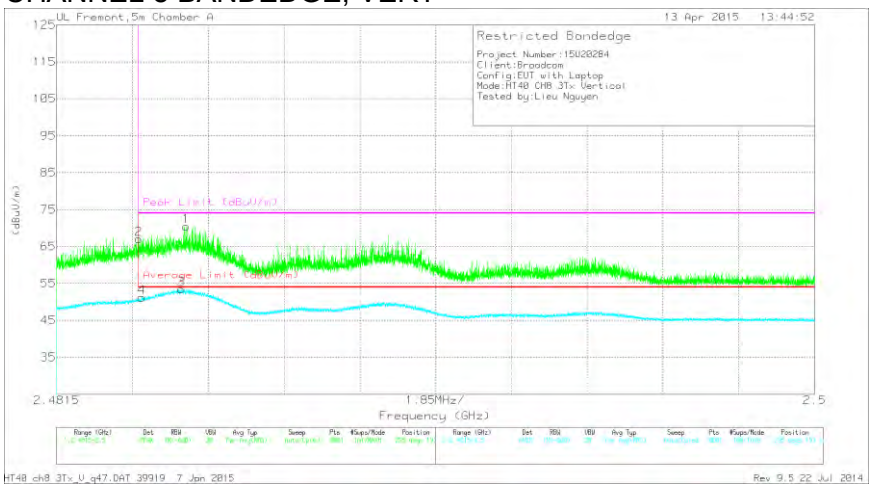

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T136 (dB/m)	Bypass (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	* 2.484	29.89	PK	32.1	5	0	66.99	-	-	74	-7.01	295	193	V
4	* 2.484	14.1	RMS	32.1	5	.13	51.33	54	-2.67	-	-	295	193	V
1	* 2.485	33.38	PK	32.1	5	0	70.48	-	-	74	-3.52	295	193	V
3	* 2.485	16.39	RMS	32.1	5	.13	53.62	54	-.38	-	-	295	193	V

* - indicates frequency in CFR15.205/IC8.10 Restricted Band

PK - Peak detector
RMS - RMS detection

UL VERIFICATION SERVICES INC. FORM NO: CCSUP4701J
47173 BENICIA STREET, FREMONT, CA 94538, USA TEL: (510) 771-1000 FAX: (510) 661-0888
This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

AUTHORIZED BANDEDGE (CHANNEL 9)

CHANNEL 9 BANDEDGE, VERT

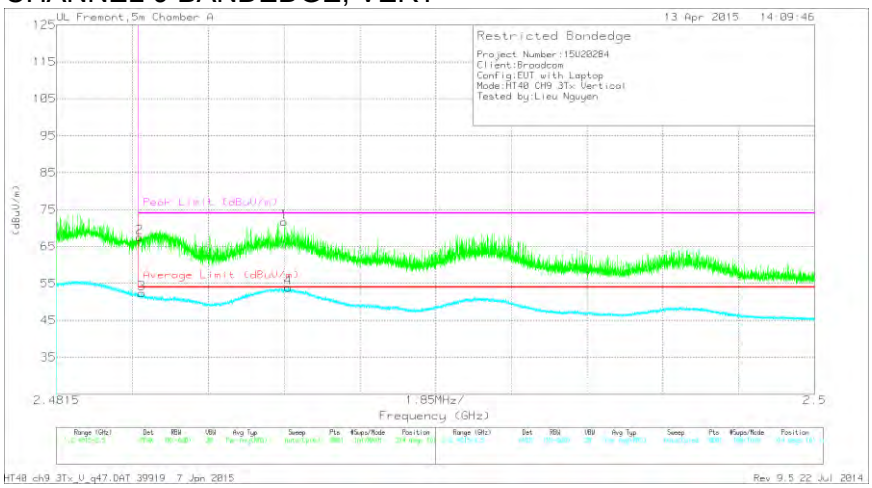

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T136 (dB/m)	Bypass (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	* 2.484	30.43	PK	32.1	5	0	67.53	-	-	74	-6.47	314	161	V
3	* 2.484	15.25	RMS	32.1	5	.13	52.48	54	-1.52	-	-	314	161	V
1	* 2.487	34.59	PK	32.1	5	0	71.69	-	-	74	-2.31	314	161	V
4	* 2.487	16.74	RMS	32.1	5	.13	53.97	54	-.03	-	-	314	161	V

* - indicates frequency in CFR15.205/IC8.10 Restricted Band

PK - Peak detector
RMS - RMS detection

UL VERIFICATION SERVICES INC. FORM NO: CCSUP4701J
47173 BENICIA STREET, FREMONT, CA 94538, USA TEL: (510) 771-1000 FAX: (510) 661-0888
This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

AUTHORIZED BANDEDGE (CHANNEL 10)

CHANNEL 10 BANDEDGE, VERT

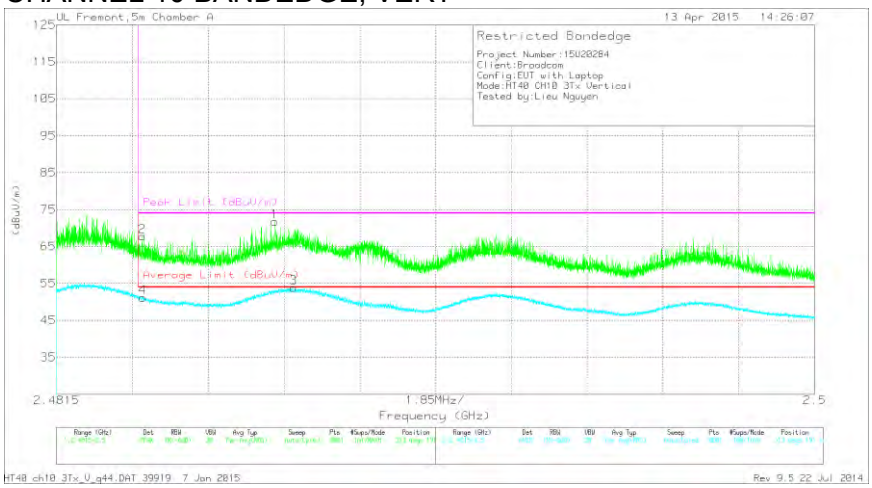

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T136 (dB/m)	Bypass (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	* 2.484	30.66	PK	32.1	5	0	67.76	-	-	74	-6.24	313	191	V
4	* 2.484	14.08	RMS	32.1	5	.13	51.31	54	-2.69	-	-	313	191	V
1	* 2.487	34.64	PK	32.1	5	0	71.74	-	-	74	-2.26	313	191	V
3	* 2.487	16.75	RMS	32.1	5	.13	53.98	54	-.02	-	-	313	191	V

* - indicates frequency in CFR15.205/IC8.10 Restricted Band

PK - Peak detector
RMS - RMS detection

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

AUTHORIZED BANDEDGE (CHANNEL 11)

CHANNEL 11 BANDEDGE, VERT

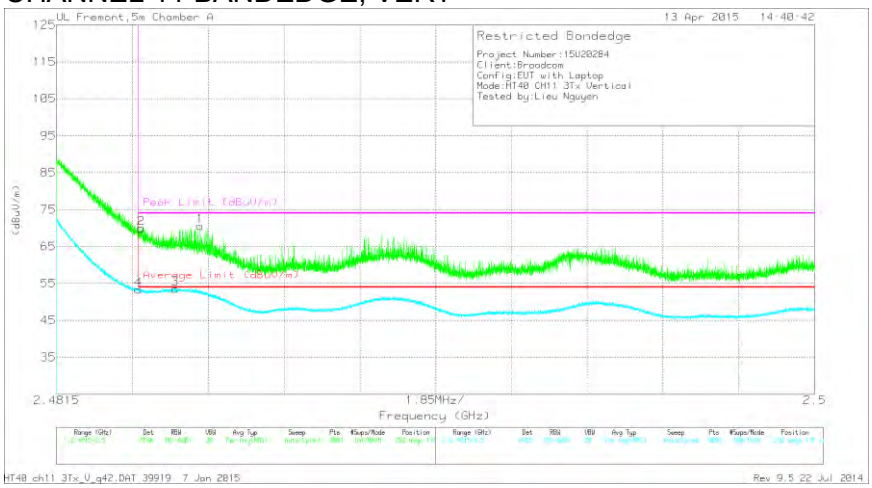

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T136 (dB/m)	Bypass (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	* 2.484	32.81	PK	32.1	5	0	69.91	-	-	74	-4.09	292	178	V
3	* 2.484	16.5	RMS	32.1	5	.13	53.73	54	-.27	-	-	292	178	V
4	* 2.484	16.23	RMS	32.1	5	.13	53.46	54	-.54	-	-	292	178	V
1	* 2.485	33.44	PK	32.1	5	0	70.54	-	-	74	-3.46	292	178	V

* - indicates frequency in CFR15.205/IC8.10 Restricted Band

PK - Peak detector
RMS - RMS detection

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

HARMONICS AND SPURIOUS EMISSIONS

LOW CHANNEL

HORIZONTAL

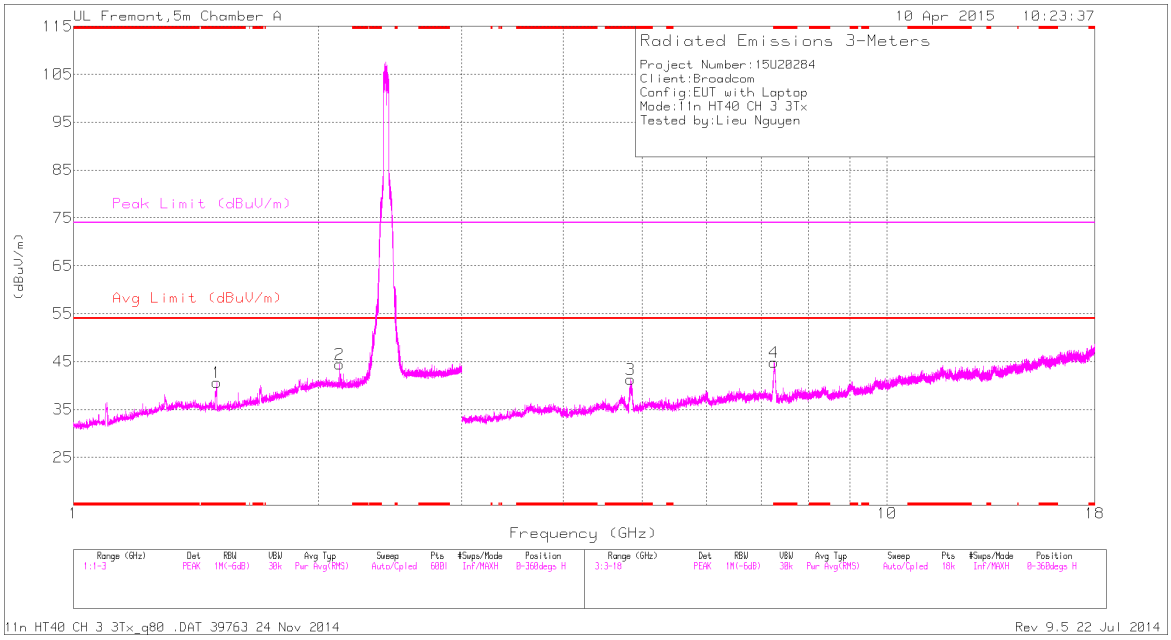

VERTICAL

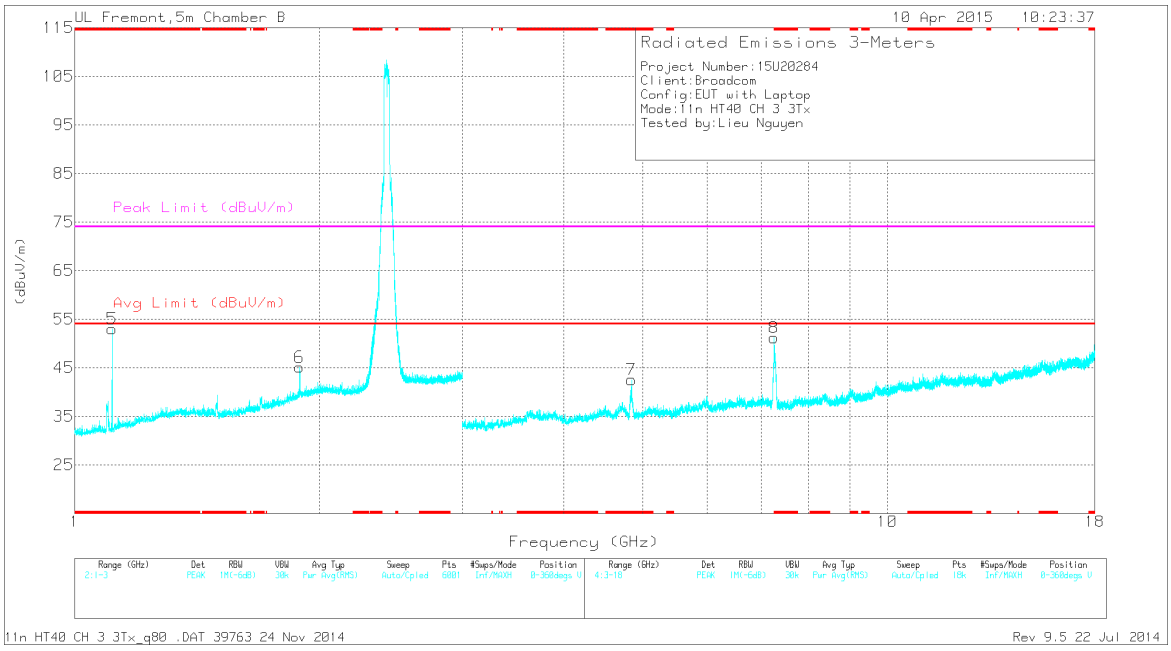

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T345 (dB/m)	Amp/Cbl/Fltr /Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 1.5	40.88	PK2	28.6	-21.4	0	48.08	-	-	74	-25.92	27	223	H
	* 1.499	28.43	MAv1	28.6	-21.4	.13	35.76	54	-18.24	-	-	27	223	H
5	* 1.114	36.02	PK2	27.7	-22.7	0	41.02	-	-	74	-32.98	164	272	V
	* 1.114	24.17	MAv1	27.7	-22.7	.13	29.3	54	-24.7	-	-	164	272	V
3	* 4.837	47.54	PK2	34.3	-29.8	0	52.04	-	-	74	-21.96	68	202	H
	* 4.837	33.59	MAv1	34.3	-29.8	.13	38.22	54	-15.78	-	-	68	202	H
4	* 7.258	42.06	PK2	35.3	-27.8	0	49.56	-	-	74	-24.44	230	217	H
	* 7.257	30.27	MAv1	35.3	-27.9	.13	37.8	54	-16.2	-	-	230	217	H
7	* 4.841	47.25	PK2	34.2	-29.8	0	51.65	-	-	74	-22.35	272	155	V
	* 4.836	34.98	MAv1	34.3	-29.8	0	39.48	54	-14.52	-	-	272	155	V
8	* 7.272	49.42	PK2	35.3	-27.9	0	56.82	-	-	74	-17.18	91	300	V
	* 7.267	35.57	MAv1	35.3	-27.8	0	43.07	54	-10.93	-	-	91	300	V
6	1.891	34.52	PK	31.7	-21.1	0	45.12	-	-	-	-	0-360	101	V
2	2.123	33.85	PK	31.6	-21	0	44.45	-	-	-	-	0-360	101	H

* - indicates frequency in CFR15.205/IC8.10 Restricted Band

-Compliance for emissions in non-restricted bands shown in conducted out of band testing

PK - Peak detector
PK2 - KDB558074 Method: Maximum Peak
MAv1 - KDB558074 Option 1 Maximum RMS Average

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

MID CHANNEL

HORIZONTAL

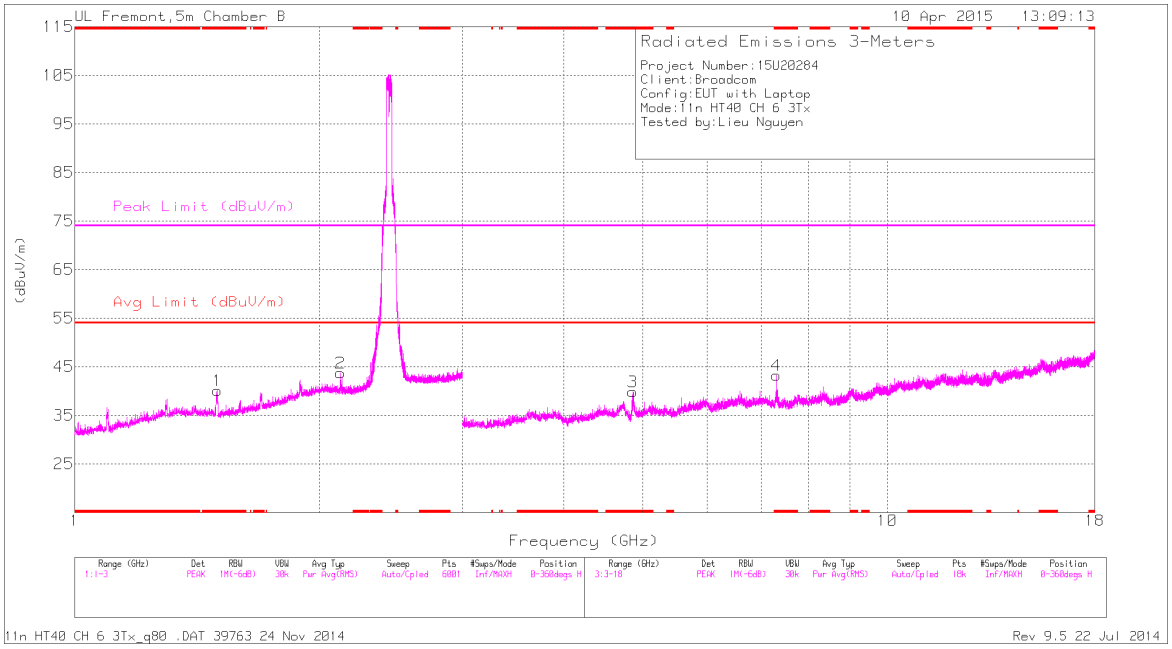

VERTICAL

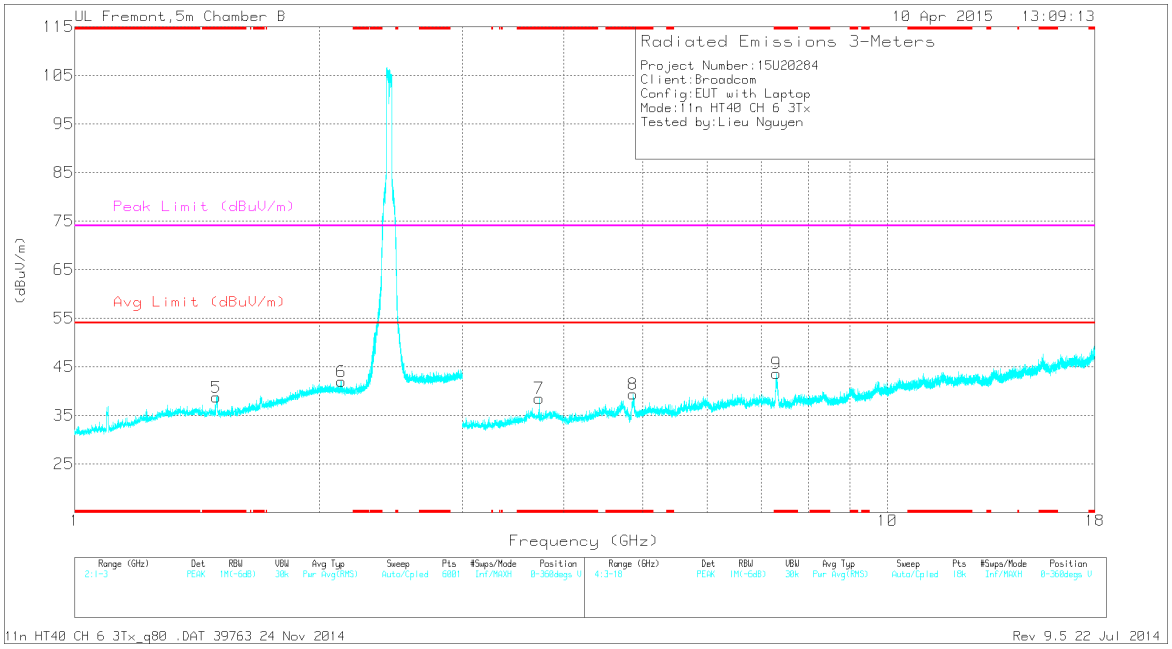

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T345 (dB/m)	Amp/Cbl/Fltr /Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 1.497	41.47	PK2	28.7	-21.4	0	48.77	-	-	74	-25.23	18	221	H
	* 1.499	28.56	MAv1	28.6	-21.4	.13	35.89	54	-18.11	-	-	18	221	H
5	* 1.493	39.07	PK2	28.7	-21.5	0	46.27	-	-	74	-27.73	205	203	V
	* 1.493	27.37	MAv1	28.7	-21.5	.13	34.7	54	-19.3	-	-	205	203	V
3	* 4.863	45.09	PK2	34.2	-30.2	0	49.09	-	-	74	-24.91	307	218	H
	* 4.864	32.02	MAv1	34.2	-30.2	.13	36.15	54	-17.85	-	-	307	218	H
4	* 7.302	42.75	PK2	35.3	-28.1	0	49.95	-	-	74	-24.05	143	230	H
	* 7.303	31.47	MAv1	35.3	-28.2	.13	38.7	54	-15.3	-	-	143	230	H
7	* 3.728	41.26	PK2	33.5	-31.1	0	43.66	-	-	74	-30.34	353	319	V
	* 3.731	29.27	MAv1	33.5	-31.1	.13	31.8	54	-22.2	-	-	353	319	V
8	* 4.864	43.36	PK2	34.2	-30.2	0	47.36	-	-	74	-26.64	142	236	V
	* 4.864	31.01	MAv1	34.2	-30.2	.13	35.14	54	-18.86	-	-	142	236	V
9	* 7.303	45.24	PK2	35.3	-28.2	0	52.34	-	-	74	-21.66	41	199	V
	* 7.304	33.83	MAv1	35.3	-28.2	.13	41.06	54	-12.94	-	-	41	199	V
2	2.124	32.99	PK	31.6	-20.9	0	43.69	-	-	-	-	0-360	101	H
6	2.129	31.25	PK	31.6	-20.9	0	41.95	-	-	-	-	0-360	200	V

* - indicates frequency in CFR15.205/IC8.10 Restricted Band

-Compliance for emissions in non-restricted bands shown in conducted out of band testing

PK - Peak detector
PK2 - KDB558074 Method: Maximum Peak
MAv1 - KDB558074 Option 1 Maximum RMS Average

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

HIGH CHANNEL

HORIZONTAL

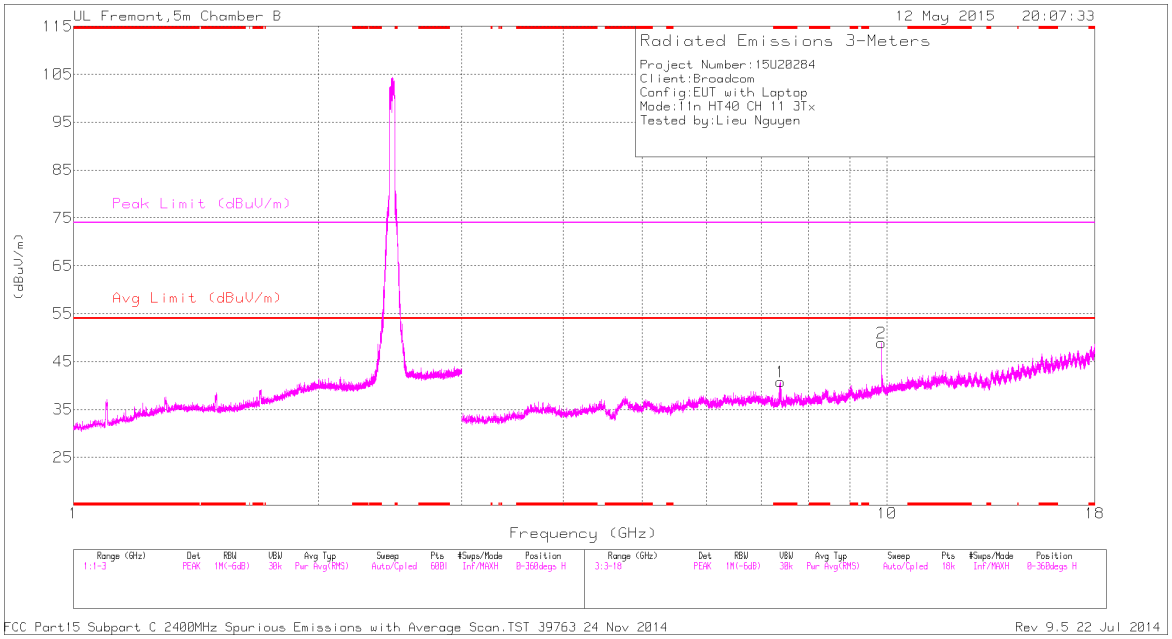

VERTICAL

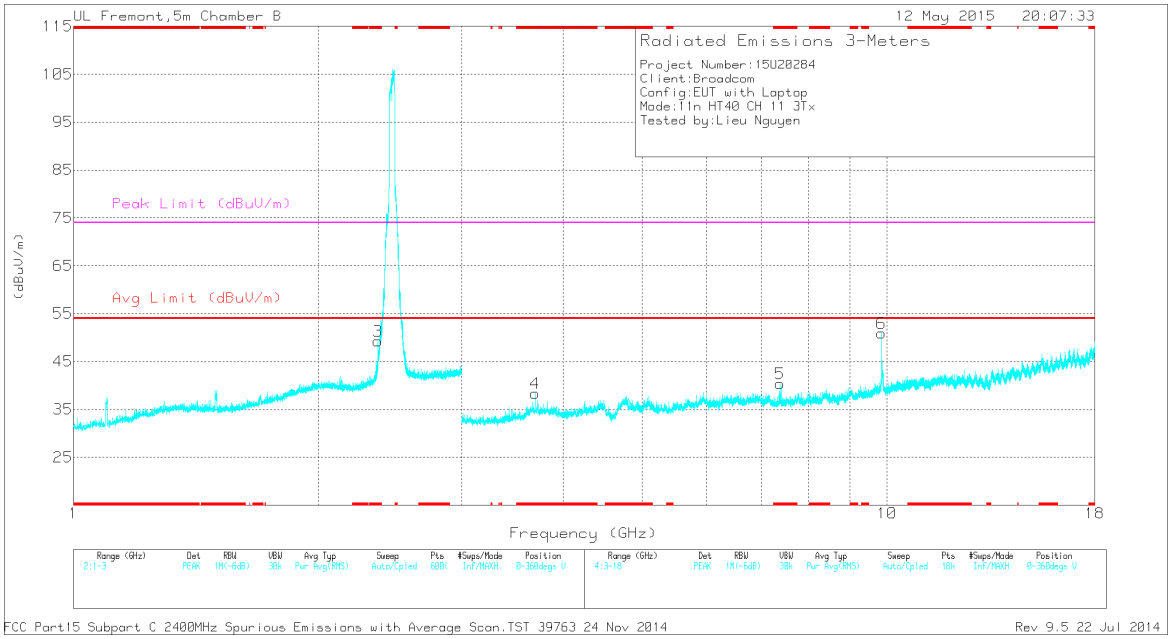

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T345 (dB/m)	Amp/Cbl/Fltr /Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
3	* 2.367	51.54	PK2	31.9	-20.8	0	62.64	-	-	74	-11.36	22	192	V
	* 2.366	30.75	MAv1	31.9	-20.8	.13	41.98	54	-12.02	-	-	22	192	V
1	* 7.4	44.59	PK2	35.4	-27.4	0	52.59	-	-	74	-21.41	36	287	H
	* 7.399	27.1	MAv1	35.4	-27.4	.13	35.23	54	-18.77	-	-	36	287	H
4	* 3.693	41.21	PK2	33.6	-31.1	0	43.71	-	-	74	-30.29	171	265	V
	* 3.693	32.33	MAv1	33.6	-31.1	.13	34.96	54	-19.04	-	-	171	265	V
5	* 7.38	45.72	PK2	35.4	-27.6	0	53.52	-	-	74	-20.48	338	236	V
	* 7.38	27.05	MAv1	35.4	-27.6	.13	34.98	54	-19.02	-	-	338	236	V
2	9.848	36.02	PK	37	-24.1	0	48.92	-	-	-	-	0-360	199	H
6	9.849	38.09	PK	37	-24.1	0	50.99	-	-	-	-	0-360	199	V

* - indicates frequency in CFR15.205/IC8.10 Restricted Band

-Compliance for emissions in non-restricted bands shown in conducted out of band testing

PK - Peak detector
PK2 - KDB558074 Method: Maximum Peak
MAv1 - KDB558074 Option 1 Maximum RMS Average

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

9.9. TX ABOVE 1 GHz 802.11n HT40 TxBF 3Tx MODE IN THE 2.4 GHz BAND

RESTRICTED BANDEDGE (CHANNEL 3)

CHANNEL 3 RESTRICTED, HORIZ

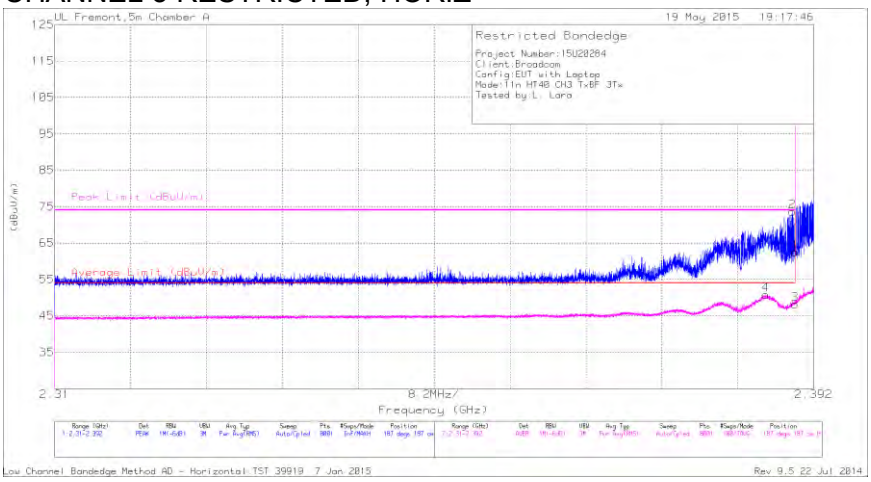

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T136 (dB/m)	Bypass (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	25.55	PK	32	4.9	0	62.45	-	-	74	-11.55	187	187	H
2	* 2.39	36.74	PK	32	4.9	0	73.64	-	-	74	-.36	187	187	H
3	* 2.39	10.75	RMS	32	4.9	.53	48.18	54	-5.82	-	-	187	187	H
4	* 2.387	13.38	RMS	32	4.9	.53	50.81	54	-3.19	-	-	187	187	H

* - indicates frequency in CFR15.205/IC8.10 Restricted Band

PK - Peak detector
RMS - RMS detection

UL VERIFICATION SERVICES INC. FORM NO: CCSUP4701J
47173 BENICIA STREET, FREMONT, CA 94538, USA TEL: (510) 771-1000 FAX: (510) 661-0888
This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

RESTRICTED BANDEDGE (CHANNEL 4)

CHANNEL 4 RESTRICTED, HORIZ

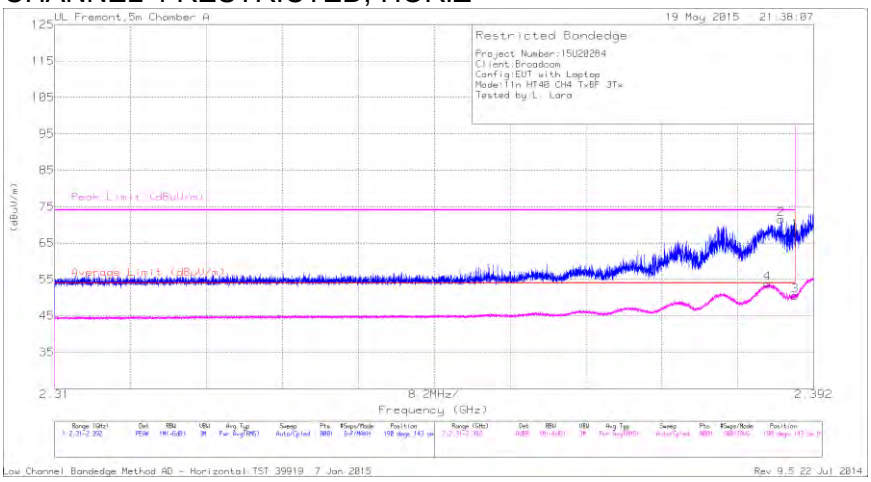

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T136 (dB/m)	Bypass (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
4	* 2.387	16.41	RMS	32	4.9	.53	53.84	54	-.16	-	-	190	143	H
2	* 2.388	34.65	PK	32	4.9	0	71.55	-	-	74	-2.45	190	143	H
1	* 2.39	31.36	PK	32	4.9	0	68.26	-	-	74	-5.74	190	143	H
3	* 2.39	13.14	RMS	32	4.9	.53	50.57	54	-3.43	-	-	190	143	H

* - indicates frequency in CFR15.205/IC8.10 Restricted Band

PK - Peak detector
RMS - RMS detection

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

AUTHORIZED BANDEDGE (CHANNEL 8)

CHANNEL 8 BANDEDGE, HORIZ

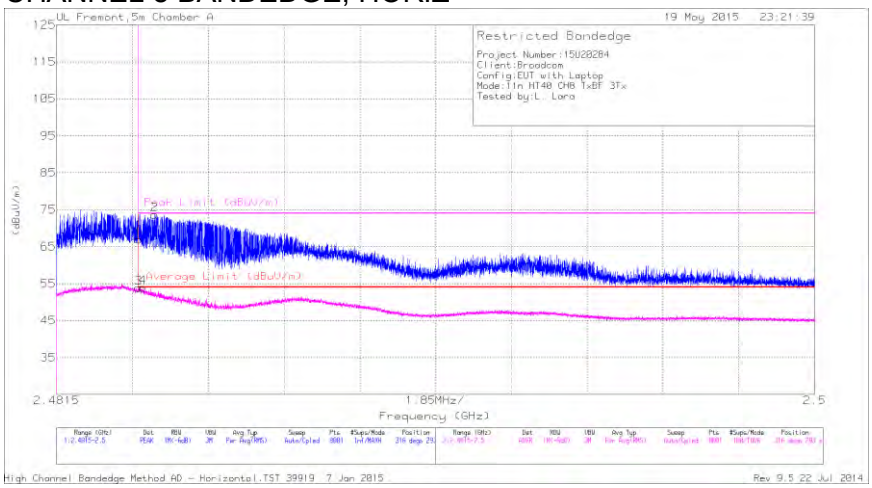

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T136 (dB/m)	Bypass (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	29.85	PK	32.1	5	0	66.95	-	-	74	-7.05	316	293	H
2	* 2.484	36.55	PK	32.1	5	0	73.65	-	-	74	-.35	316	293	H
3	* 2.484	16.25	RMS	32.1	5	.53	53.88	54	-.12	-	-	316	293	H
4	* 2.484	16.3	RMS	32.1	5	.53	53.93	54	-.07	-	-	316	293	H

* - indicates frequency in CFR15.205/IC8.10 Restricted Band

PK - Peak detector
RMS - RMS detection

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

AUTHORIZED BANDEDGE (CHANNEL 9)

CHANNEL 9 BANDEDGE, HORIZ

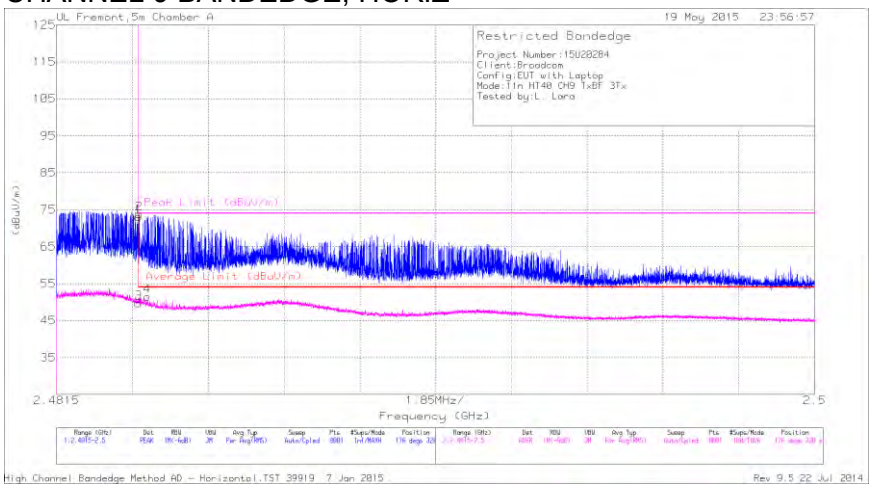

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T136 (dB/m)	Bypass (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	35.98	PK	32.1	5	0	73.08	-	-	74	-.92	176	320	H
2	* 2.484	36.74	PK	32.1	5	0	73.84	-	-	74	-.16	176	320	H
3	* 2.484	12.1	RMS	32.1	5	.53	49.73	54	-4.27	-	-	176	320	H
4	* 2.484	13.86	RMS	32.1	5	.53	51.49	54	-2.51	-	-	176	320	H

* - indicates frequency in CFR15.205/IC8.10 Restricted Band

PK - Peak detector
RMS - RMS detection

UL VERIFICATION SERVICES INC. FORM NO: CCSUP4701J
47173 BENICIA STREET, FREMONT, CA 94538, USA TEL: (510) 771-1000 FAX: (510) 661-0888
This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

AUTHORIZED BANDEDGE (CHANNEL 10)

CHANNEL 10 BANDEDGE, HORIZ

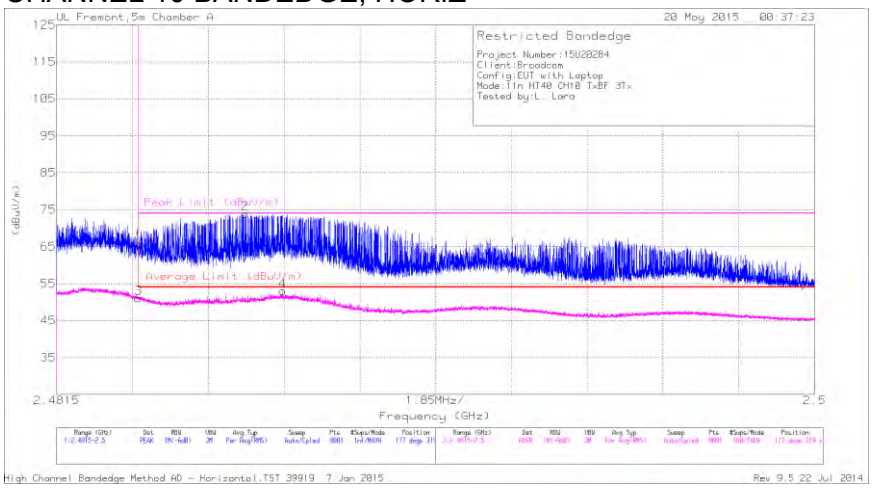

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T136 (dB/m)	Bypass (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	28.66	PK	32.1	5	0	65.76	-	-	74	-8.24	177	319	H
3	* 2.484	13.48	RMS	32.1	5	.53	51.11	54	-2.89	-	-	177	319	H
2	* 2.486	36.86	PK	32.1	5	0	73.96	-	-	74	-.04	177	319	H
4	* 2.487	15.37	RMS	32.1	5	.53	53	54	-1	-	-	177	319	H

* - indicates frequency in CFR15.205/IC8.10 Restricted Band

PK - Peak detector
RMS - RMS detection

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

AUTHORIZED BANDEDGE (CHANNEL 11)

CHANNEL 11 BANDEDGE, HORIZ

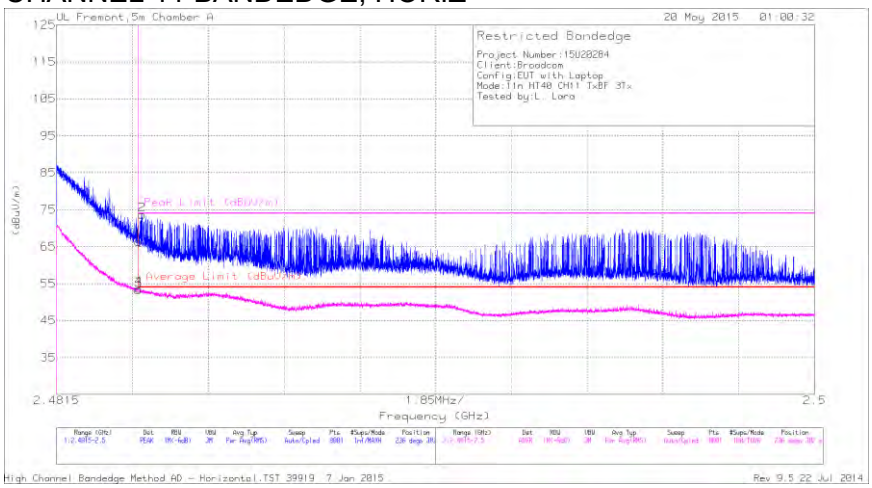

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T136 (dB/m)	Bypass (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	29.21	PK	32.1	5	0	66.31	-	-	74	-7.69	236	382	H
2	* 2.484	36.54	PK	32.1	5	0	73.64	-	-	74	-.36	236	382	H
3	* 2.484	15.68	RMS	32.1	5	.53	53.31	54	-.69	-	-	236	382	H
4	* 2.484	16.03	RMS	32.1	5	.53	53.66	54	-.34	-	-	236	382	H

* - indicates frequency in CFR15.205/IC8.10 Restricted Band

PK - Peak detector
RMS - RMS detection

UL VERIFICATION SERVICES INC. FORM NO: CCSUP4701J
47173 BENICIA STREET, FREMONT, CA 94538, USA TEL: (510) 771-1000 FAX: (510) 661-0888
This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

HARMONICS AND SPURIOUS EMISSIONS

LOW CHANNEL

HORIZONTAL

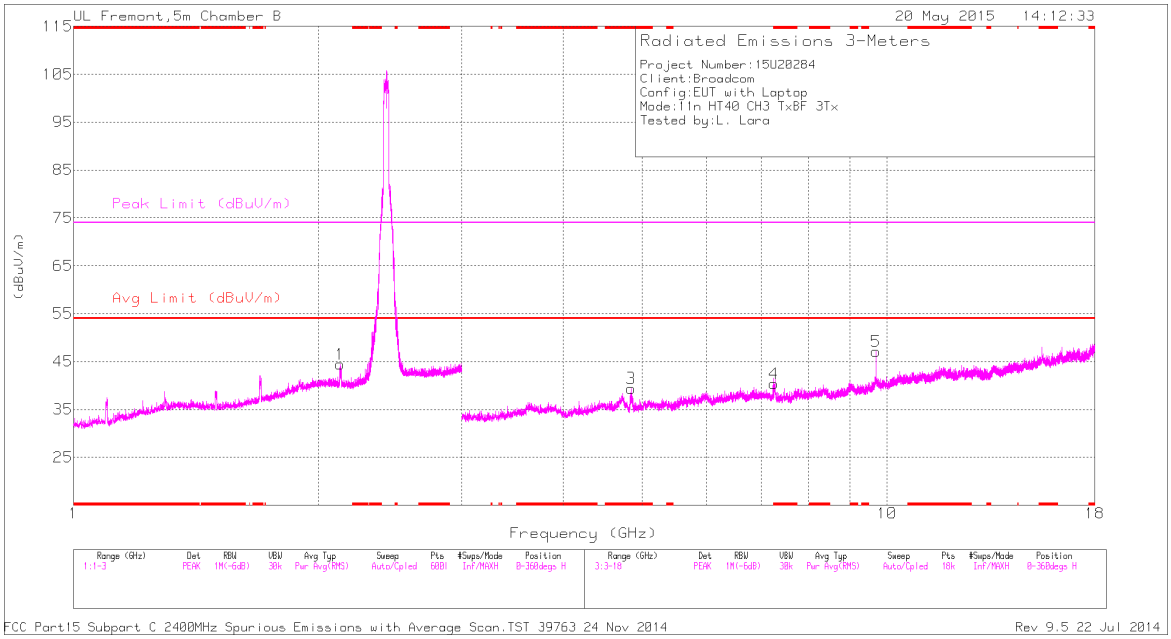

VERTICAL

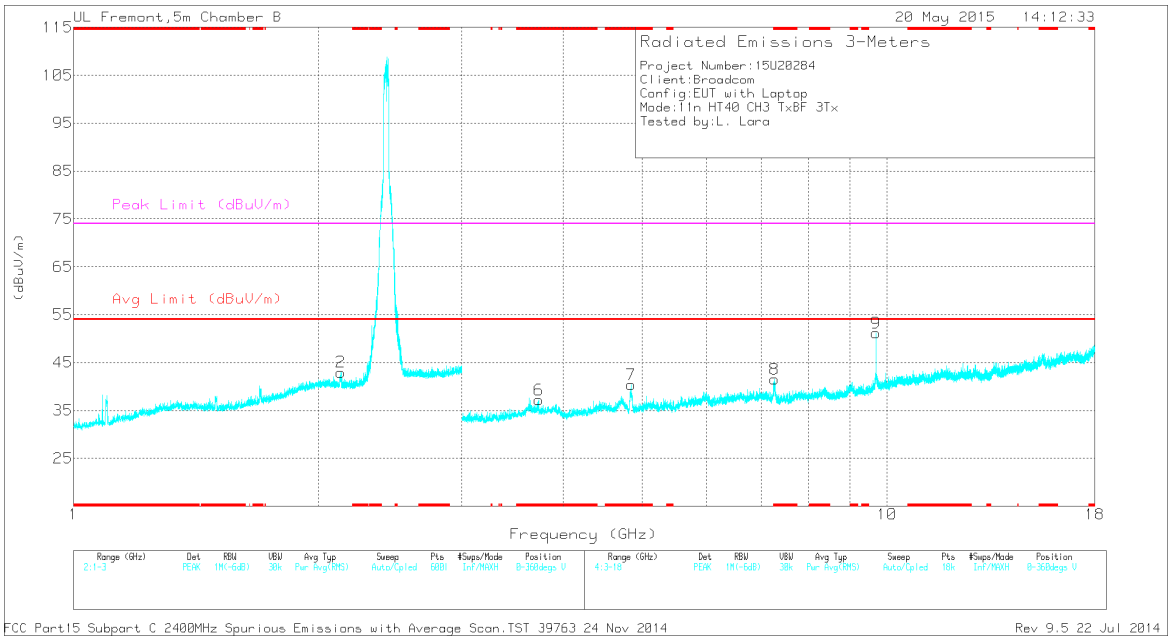

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T345 (dB/m)	Amp/Cbl/Fltr /Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
3	* 4.838	44.76	PK2	34.3	-29.8	0	49.26	-	-	74	-24.74	32	202	H
	* 4.848	31.98	MAv1	34.2	-30	.53	36.71	54	-17.29	-	-	32	202	H
4	* 7.257	42.48	PK2	35.3	-27.9	0	49.88	-	-	74	-24.12	280	280	H
	* 7.266	30.43	MAv1	35.3	-27.8	.53	38.46	54	-15.54	-	-	280	280	H
6	* 3.732	43.56	PK2	33.5	-31.1	0	45.96	-	-	74	-28.04	258	228	V
	* 3.73	30.31	MAv1	33.5	-31.1	.53	33.24	54	-20.76	-	-	258	228	V
7	* 4.834	44.17	PK2	34.3	-29.8	0	48.67	-	-	74	-25.33	300	248	V
	* 4.844	32.15	MAv1	34.2	-29.9	.53	36.98	54	-17.02	-	-	300	248	V
8	* 7.276	42.26	PK2	35.3	-27.9	0	49.66	-	-	74	-24.34	331	210	V
	* 7.276	30.77	MAv1	35.3	-27.9	.53	38.7	54	-15.3	-	-	331	210	V
1	2.125	33.71	PK	31.6	-20.9	0	44.41	-	-	-	-	0-360	101	H
2	2.132	32.3	PK	31.6	-20.9	0	43	-	-	-	-	0-360	101	V
5	9.688	33.87	PK	36.8	-23.6	0	47.07	-	-	-	-	0-360	101	H
9	9.688	37.99	PK	36.8	-23.6	0	51.19	-	-	-	-	0-360	199	V

* - indicates frequency in CFR15.205/IC8.10 Restricted Band

-Compliance for emissions in non-restricted bands shown in conducted out of band testing

PK - Peak detector
PK2 - KDB558074 Method: Maximum Peak
MAv1 - KDB558074 Option 1 Maximum RMS Average

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

MID CHANNEL

HORIZONTAL

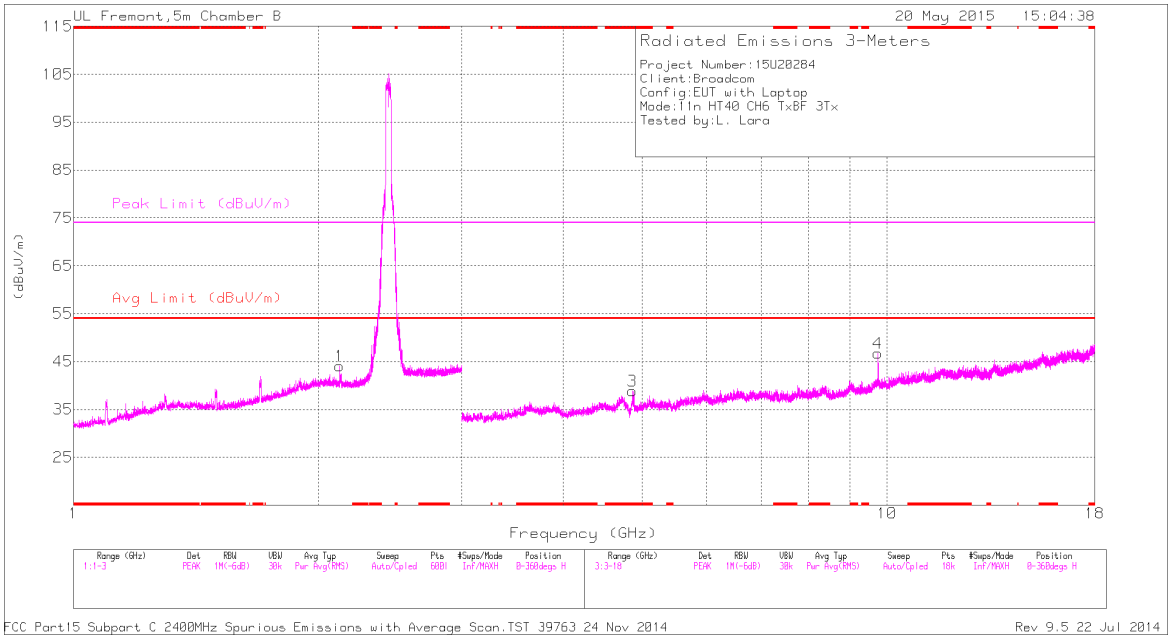

VERTICAL

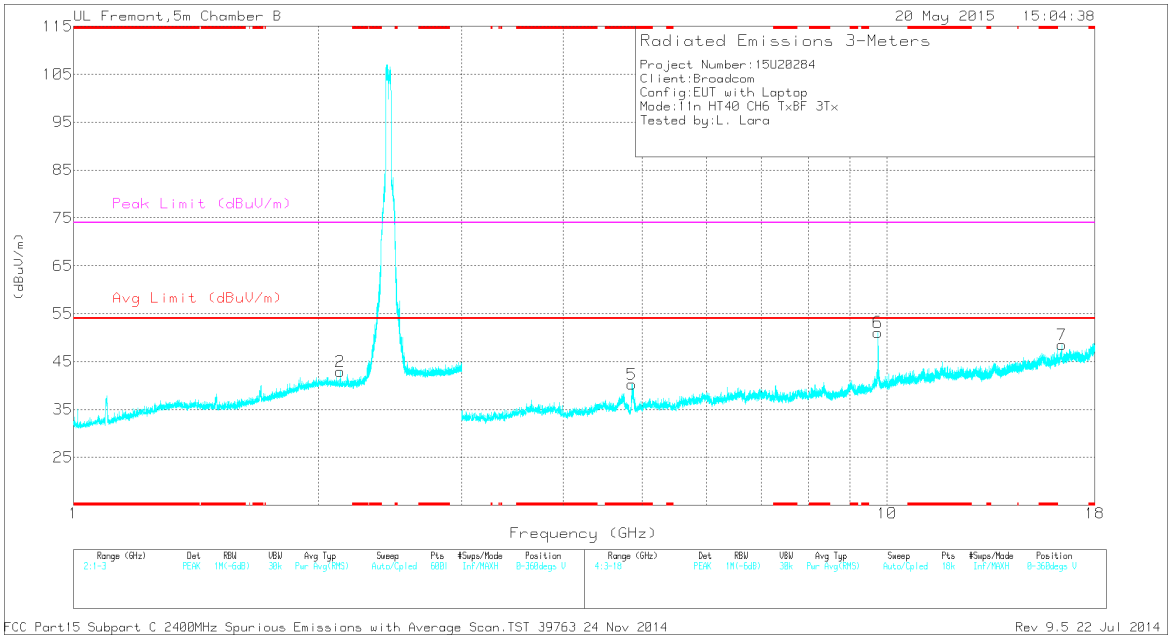

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T345 (dB/m)	Amp/Cbl/Fltr /Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
3	* 4.868	44.95	PK2	34.2	-30.3	0	48.85	-	-	74	-25.15	32	197	H
	* 4.873	31.34	MAv1	34.2	-30.4	.53	35.67	54	-18.33	-	-	32	197	H
5	* 4.859	44.33	PK2	34.2	-30.2	0	48.33	-	-	74	-25.67	259	245	V
	* 4.863	31.14	MAv1	34.2	-30.2	.53	35.67	54	-18.33	-	-	259	245	V
1	2.124	33.37	PK	31.6	-20.9	0	44.07	-	-	-	-	0-360	101	H
2	2.126	32.18	PK	31.6	-20.9	0	42.88	-	-	-	-	0-360	101	V
4	9.748	33.65	PK	36.9	-23.8	0	46.75	-	-	-	-	0-360	200	H
6	9.748	38.02	PK	36.9	-23.8	0	51.12	-	-	-	-	0-360	200	V
7	16.389	27.47	PK	41.2	-20.2	0	48.47	-	-	-	-	0-360	200	V

* - indicates frequency in CFR15.205/IC8.10 Restricted Band

-Compliance for emissions in non-restricted bands shown in conducted out of band testing

PK - Peak detector
PK2 - KDB558074 Method: Maximum Peak
MAv1 - KDB558074 Option 1 Maximum RMS Average

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

HIGH CHANNEL

HORIZONTAL

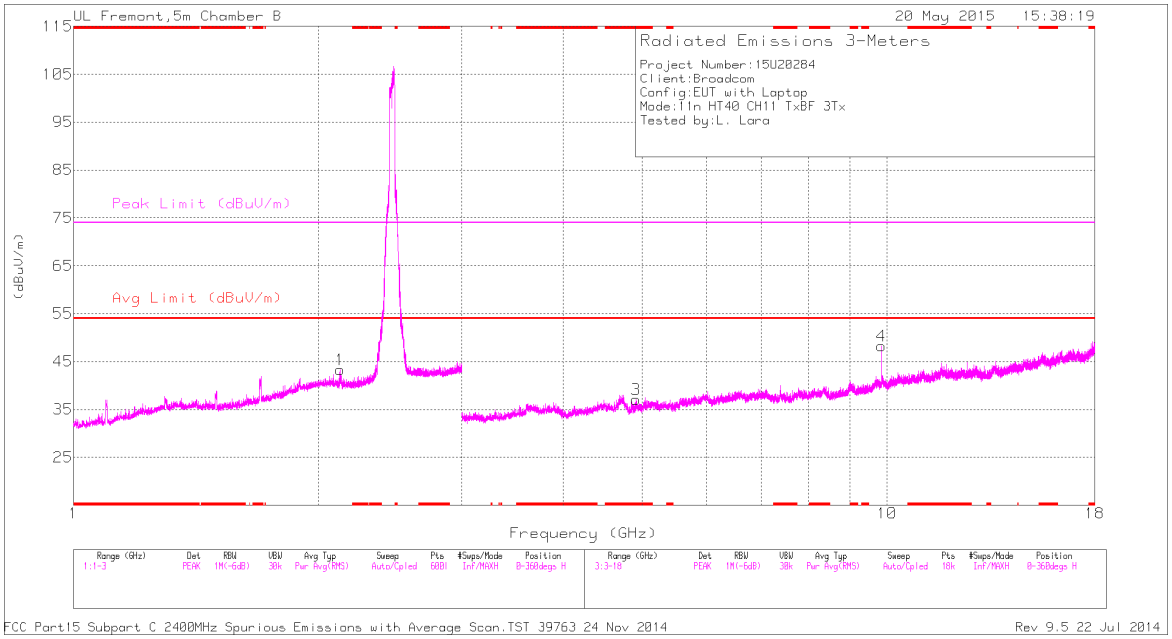

VERTICAL

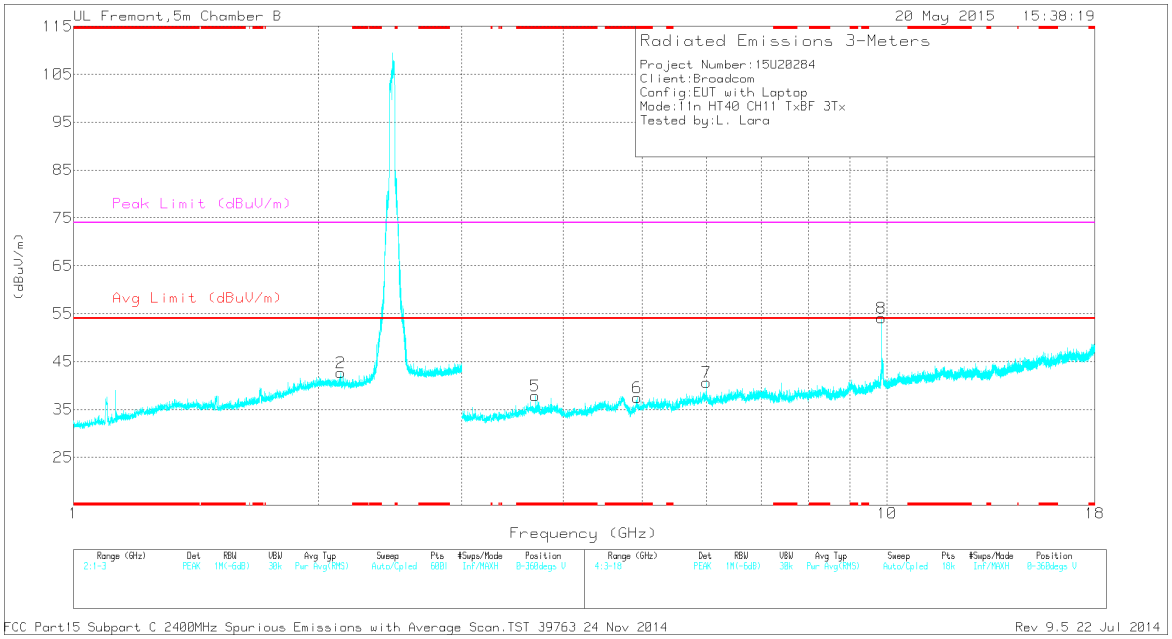

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T345 (dB/m)	Amp/Cbl/Fltr /Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
3	* 4.927	42.53	PK2	34.1	-30.5	0	46.13	-	-	74	-27.87	34	217	H
	* 4.923	30.47	MAv1	34.1	-30.5	.53	34.6	54	-19.4	-	-	34	217	H
5	* 3.693	42.23	PK2	33.6	-31.1	0	44.73	-	-	74	-29.27	289	137	V
	* 3.693	34.37	MAv1	33.6	-31.1	.53	37.4	54	-16.6	-	-	289	137	V
6	* 4.928	40.7	PK2	34.1	-30.5	0	44.3	-	-	74	-29.7	225	199	V
	* 4.927	30.1	MAv1	34.1	-30.5	.53	34.23	54	-19.77	-	-	225	199	V
1	2.125	32.64	PK	31.6	-20.9	0	43.34	-	-	-	-	0-360	101	H
2	2.129	31.96	PK	31.6	-20.9	0	42.66	-	-	-	-	0-360	200	V
7	6	33.76	PK	35.7	-28.8	0	40.66	-	-	-	-	0-360	101	V
4	9.848	35.31	PK	37	-24.1	0	48.21	-	-	-	-	0-360	199	H
8	9.848	41.26	PK	37	-24.1	0	54.16	-	-	-	-	0-360	199	V

* - indicates frequency in CFR15.205/IC8.10 Restricted Band

-Compliance for emissions in non-restricted bands shown in conducted out of band testing

PK - Peak detector
PK2 - KDB558074 Method: Maximum Peak
MAv1 - KDB558074 Option 1 Maximum RMS Average

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

9.10. TX ABOVE 1 GHz 802.11n HT20 CDD 3Tx MODE IN THE 5.8 GHz BAND

HARMONICS AND SPURIOUS EMISSIONS

LOW CHANNEL

HORIZONTAL

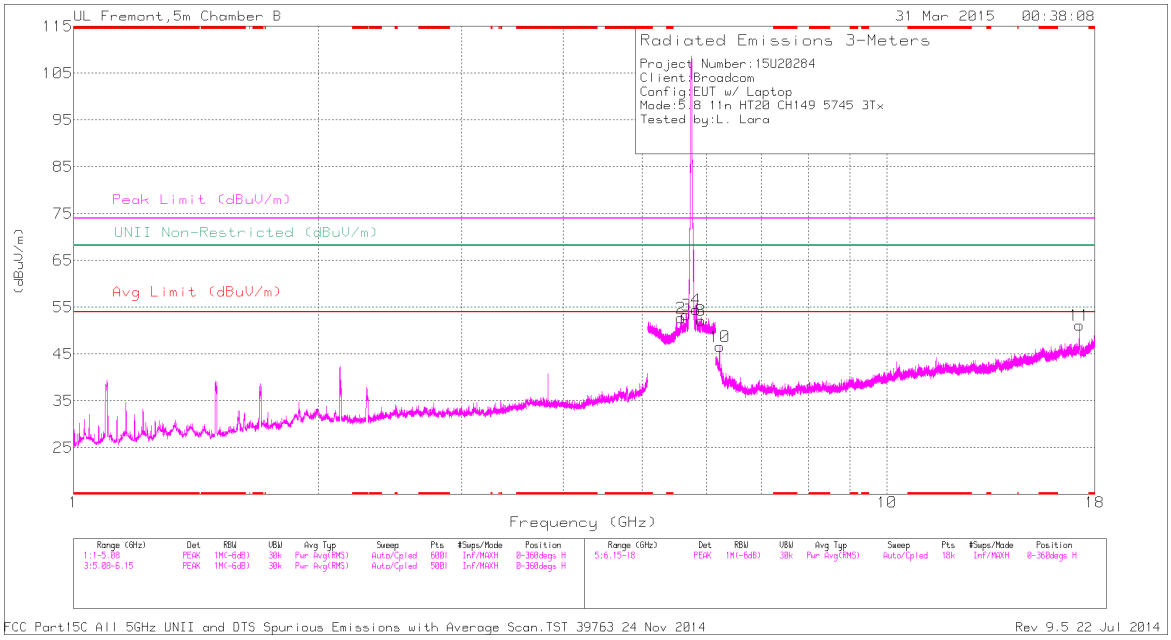

VERTICAL

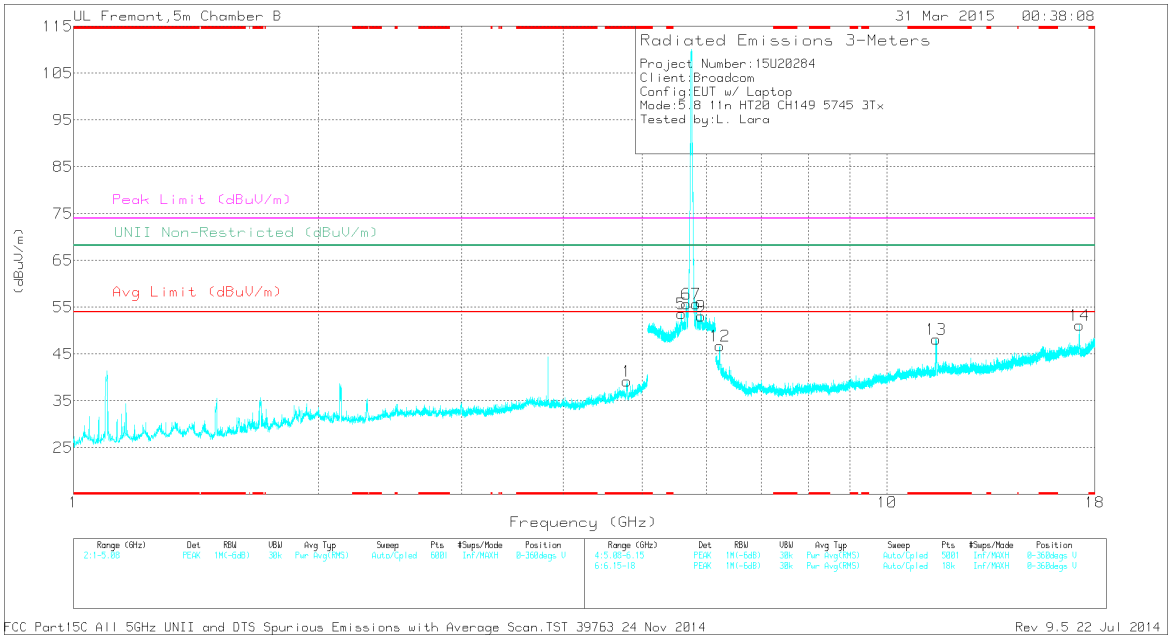

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T345 (dB/m)	Amp/Cbl/Fltr /Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 4.788	42.65	PK2	34.3	-29.4	47.55	-	-	74	-26.45	62	248	V
	* 4.788	33.09	MAv1	34.3	-29.4	37.99	54	-16.01	-	-	62	248	V
13	* 11.494	42.8	PK2	38.3	-22.5	58.6	-	-	74	-15.4	313	262	V
	* 11.489	31.81	MAv1	38.3	-22.5	47.61	54	-6.39	-	-	313	262	V
2	5.584	36.06	PK	34.7	-18	52.76	-	-	-	-	0-360	200	H
5	5.587	36.98	PK	34.7	-18	53.68	-	-	-	-	0-360	200	V
3	5.664	36.36	PK	34.9	-17.9	53.36	-	-	-	-	0-360	200	H
6	5.664	38.72	PK	34.9	-17.9	55.72	-	-	-	-	0-360	200	V
4	5.825	36.61	PK	35.3	-17.4	54.51	-	-	-	-	0-360	200	H
7	5.827	37.81	PK	35.3	-17.4	55.71	-	-	-	-	0-360	200	V
9	5.906	35.15	PK	35.5	-17.5	53.15	-	-	-	-	0-360	200	V
8	5.907	34.17	PK	35.5	-17.5	52.17	-	-	-	-	0-360	200	H
10	6.226	39.47	PK	35.5	-28.4	46.57	-	-	-	-	0-360	199	H
12	6.226	39.66	PK	35.5	-28.4	46.76	-	-	-	-	0-360	199	V
11	17.23	30.03	PK	41.1	-20	51.13	-	-	-	-	0-360	199	H
14	17.236	30.1	PK	41.1	-20.1	51.1	-	-	-	-	0-360	199	V

* - indicates frequency in CFR15.205/IC8.10 Restricted Band

-Compliance for emissions in non-restricted bands is shown in conducted out of band testing

PK - Peak detector
PK2 - KDB558074 Method: Maximum Peak
MAv1 - KDB558074 Option 1 Maximum RMS Average

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

MID CHANNEL

HORIZONTAL

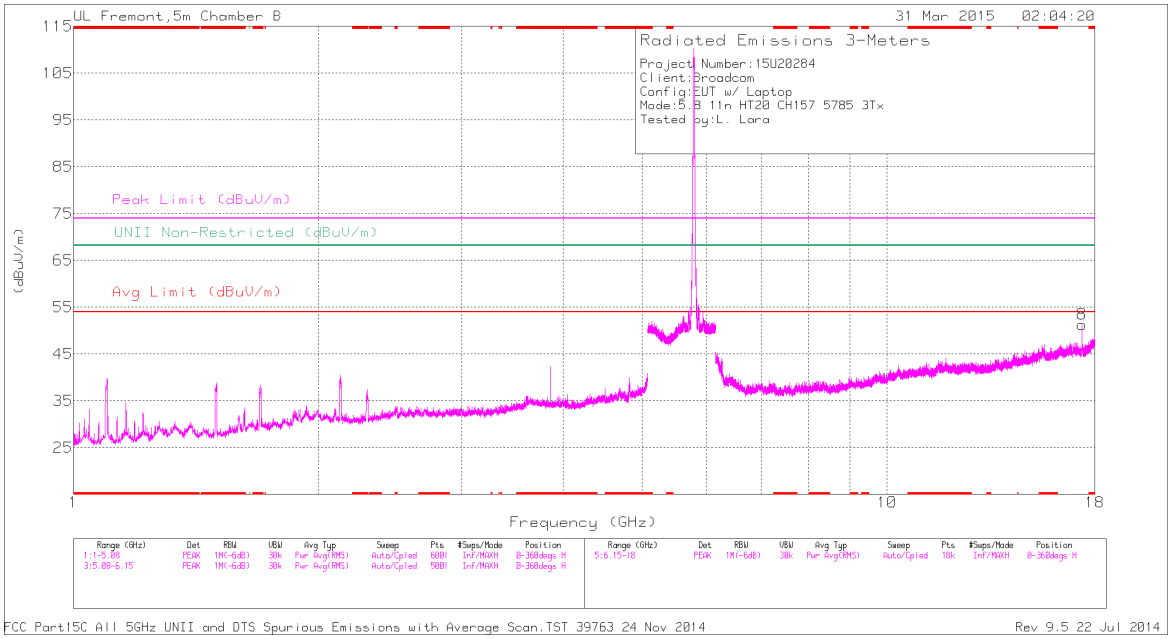

VERTICAL

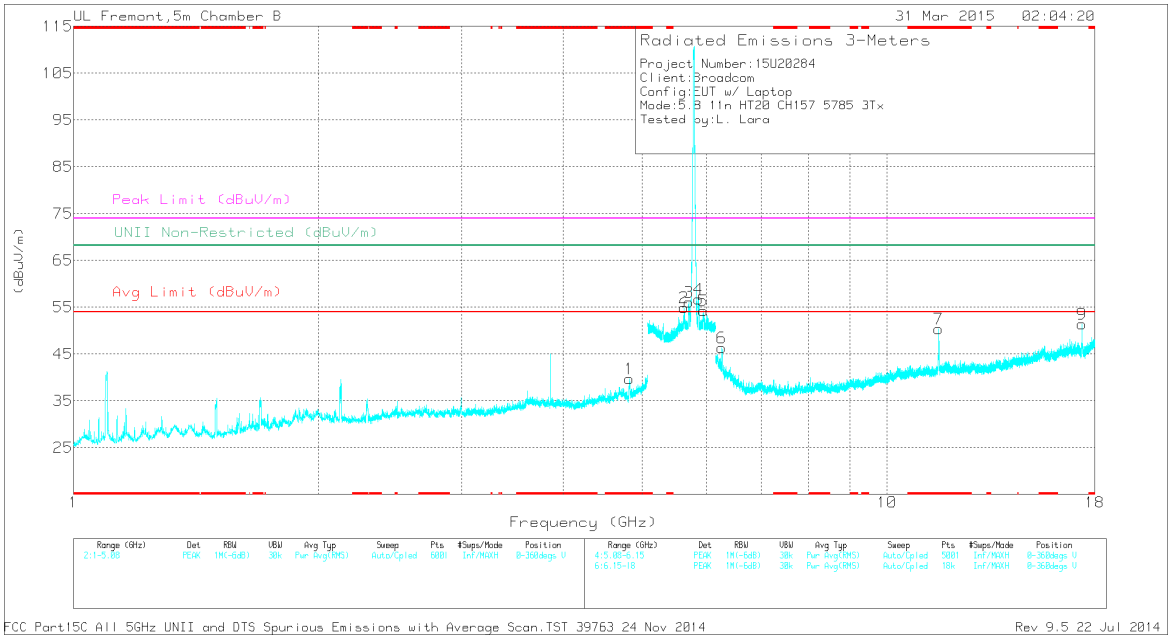

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T345 (dB/m)	Amp/Cbl/Fltr /Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 4.821	42.84	PK2	34.3	-29.7	47.44	-	-	74	-26.56	67	244	V
	* 4.821	33.41	MAv1	34.3	-29.7	38.01	54	-15.99	-	-	67	244	V
7	* 11.573	42.1	PK2	38.4	-22.1	58.4	-	-	74	-15.6	316	283	V
	* 11.573	31.34	MAv1	38.4	-22.1	47.64	54	-6.36	-	-	316	283	V
2	5.627	38.21	PK	34.8	-18.1	54.91	-	-	-	-	0-360	200	V
3	5.704	38.98	PK	35	-17.9	56.08	-	-	-	-	0-360	101	V
4	5.865	38.63	PK	35.4	-17.3	56.73	-	-	-	-	0-360	101	V
5	5.948	36.18	PK	35.6	-17.5	54.28	-	-	-	-	0-360	101	V
6	6.264	39.8	PK	35.5	-28.9	46.4	-	-	-	-	0-360	199	V
8	17.359	30.65	PK	40.8	-20.1	51.35	-	-	-	-	0-360	101	H
9	17.359	30.7	PK	40.8	-20.1	51.4	-	-	-	-	0-360	101	V

* - indicates frequency in CFR15.205/IC8.10 Restricted Band

-Compliance for emissions in non-restricted bands is shown in conducted out of band testing

PK - Peak detector
PK2 - KDB558074 Method: Maximum Peak
MAv1 - KDB558074 Option 1 Maximum RMS Average

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

HIGH CHANNEL

HORIZONTAL

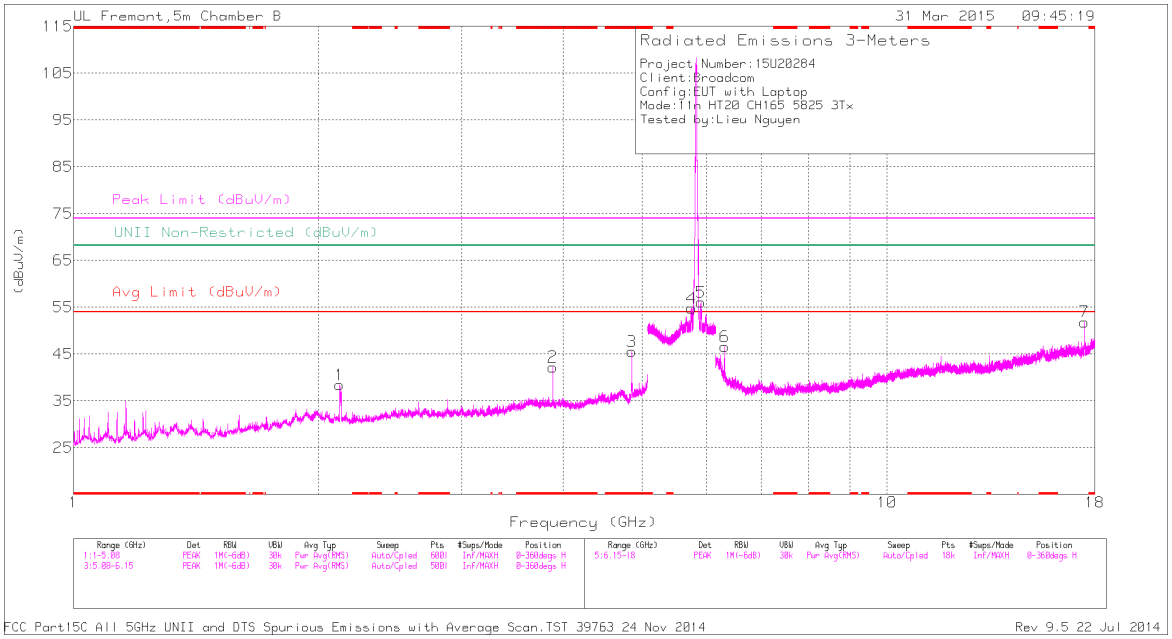

VERTICAL

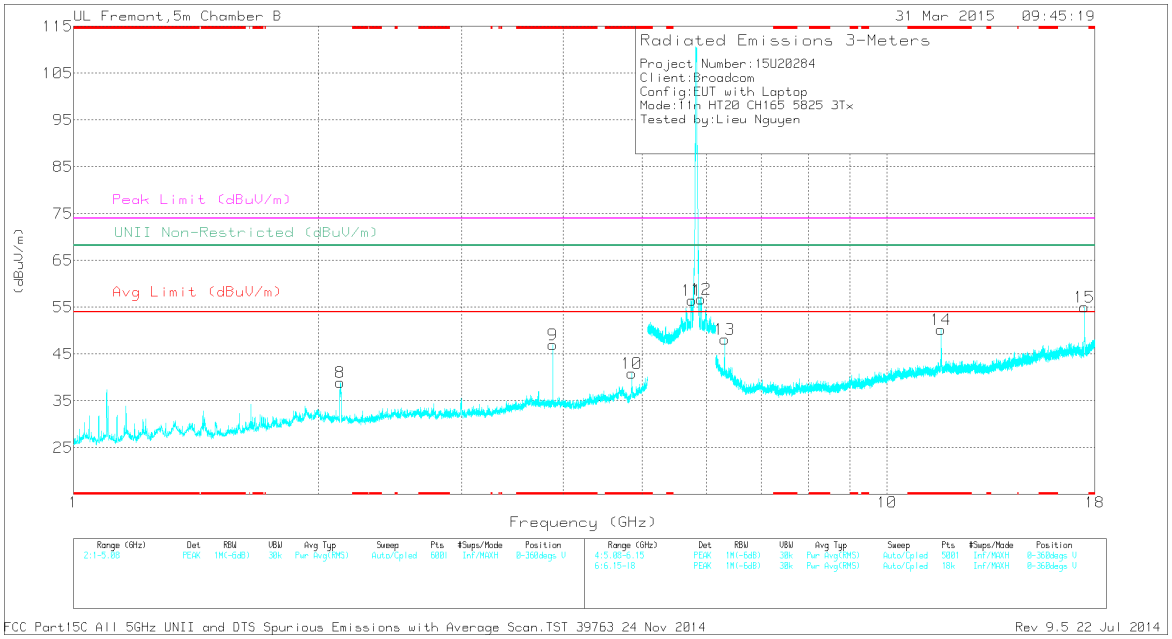

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T345 (dB/m)	Amp/Cbl/Fltr /Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	* 3.884	46.01	PK2	33.5	-31.2	48.31	-	-	74	-25.69	244	219	H
	* 3.884	40.97	MAv1	33.5	-31.2	43.27	54	-10.73	-	-	244	219	H
3	* 4.855	47.52	PK2	34.2	-30	51.72	-	-	74	-22.28	10	222	H
	* 4.855	41.3	MAv1	34.2	-30	45.5	54	-8.5	-	-	10	222	H
9	* 3.884	48.66	PK2	33.5	-31.2	50.96	-	-	74	-23.04	196	114	V
	* 3.884	44.93	MAv1	33.5	-31.2	47.23	54	-6.77	-	-	196	114	V
10	* 4.855	44.08	PK2	34.2	-30	48.28	-	-	74	-25.72	159	265	V
	* 4.855	36.5	MAv1	34.2	-30	40.7	54	-13.3	-	-	159	265	V
14	* 11.652	40.86	PK2	38.5	-22.7	56.66	-	-	74	-17.34	42	218	V
	* 11.653	29.79	MAv1	38.5	-22.7	45.59	54	-8.41	-	-	42	218	V
1	2.123	39.64	PK	31.6	-32.8	38.44	-	-	-	-	0-360	199	H
8	2.128	40.08	PK	31.6	-32.7	38.98	-	-	-	-	0-360	199	V
4	5.75	37.41	PK	35.1	-17.7	54.81	-	-	-	-	0-360	199	H
11	5.753	39.04	PK	35.1	-17.7	56.44	-	-	-	-	0-360	101	V
5	5.903	38.09	PK	35.5	-17.5	56.09	-	-	-	-	0-360	199	H
12	5.903	38.68	PK	35.5	-17.5	56.68	-	-	-	-	0-360	101	V
6	6.311	39.72	PK	35.6	-28.7	46.62	-	-	-	-	0-360	199	H
13	6.311	41.3	PK	35.6	-28.7	48.2	-	-	-	-	0-360	101	V
15	17.479	34.47	PK	40.7	-20.1	55.07	-	-	-	-	0-360	101	V
7	17.483	31.27	PK	40.7	-20.1	51.87	-	-	-	-	0-360	101	H

* - indicates frequency in CFR15.205/IC8.10 Restricted Band

-Compliance for emissions in non-restricted bands is shown in conducted out of band testing

PK - Peak detector
PK2 - KDB558074 Method: Maximum Peak
MAv1 - KDB558074 Option 1 Maximum RMS Average

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

9.11. TX ABOVE 1 GHz 802.11n HT20 TxBF 3Tx MODE IN THE 5.8 GHz BAND

HARMONICS AND SPURIOUS EMISSIONS

LOW CHANNEL

HORIZONTAL

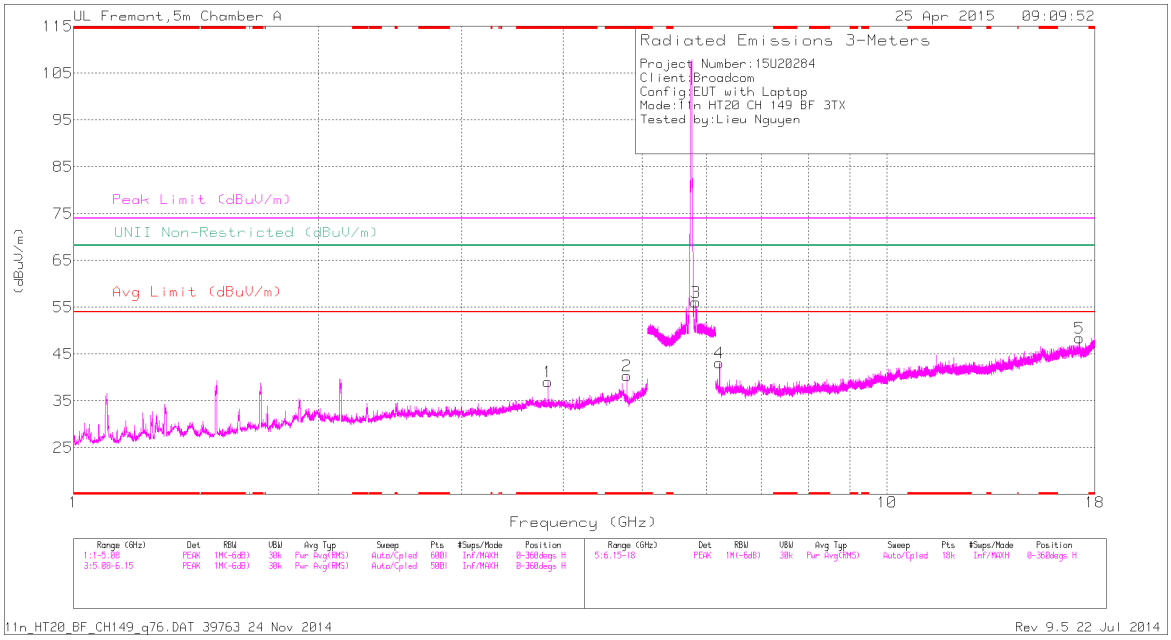

VERTICAL

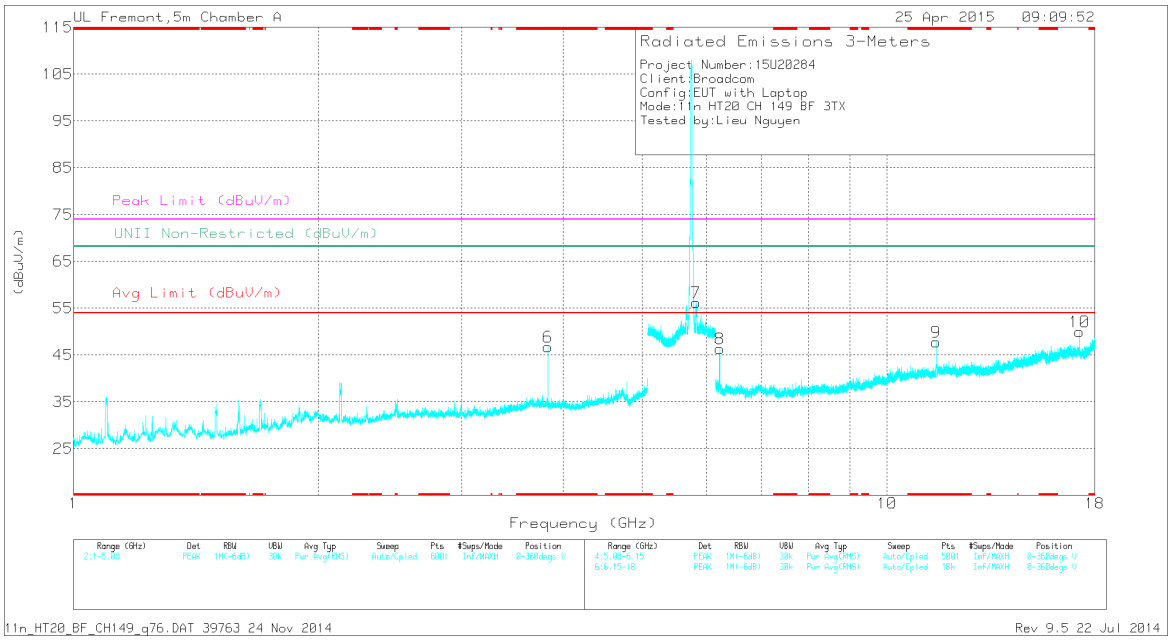

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T345 (dB/m)	Amp/Cbl/ Fltr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 3.83	39.16	PK1	33.4	-30.9	0	41.66	-	-	74	-32.34	278	295	H
	* 3.83	34.14	AD1	33.4	-30.9	.65	37.29	54	-16.71	-	-	278	295	H
2	* 4.787	40.83	PK1	34.3	-29.4	0	45.73	-	-	74	-28.27	302	268	H
	* 4.787	30.72	AD1	34.3	-29.4	.65	36.27	54	-17.73	-	-	302	268	H
6	* 3.83	47.07	PK1	33.4	-30.9	0	49.57	-	-	74	-24.43	252	169	V
	* 3.83	40.71	AD1	33.4	-30.9	.65	43.86	54	-10.14	-	-	252	169	V
9	* 11.489	37.81	PK1	38.3	-22.5	0	53.61	-	-	74	-20.39	32	201	V
	* 11.489	25.79	AD1	38.3	-22.5	.65	42.24	54	-11.76	-	-	32	201	V
3	5.82	38.22	PK	35.3	-17.4	0	56.12	-	-	-	-	0-360	199	H
7	5.828	38.29	PK	35.3	-17.4	0	56.19	-	-	-	-	0-360	101	V
4	6.217	35.86	PK	35.5	-28.3	0	43.06	-	-	-	-	0-360	199	H
8	6.225	39.36	PK	35.5	-28.5	0	46.36	-	-	-	-	0-360	101	V
10	17.23	29.01	PK	41.1	-20.1	0	50.01	-	-	-	-	0-360	101	V
5	17.238	27.47	PK	41.1	-20.1	0	48.47	-	-	-	-	0-360	101	H

* - indicates frequency in CFR15.205/IC8.10 Restricted Band

-Compliance for emissions in non-restricted bands is shown in conducted out of band testing

PK - Peak detector
PK2 - KDB558074 Method: Maximum Peak
MAv1 - KDB558074 Option 1 Maximum RMS Average

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

MID CHANNEL

HORIZONTAL

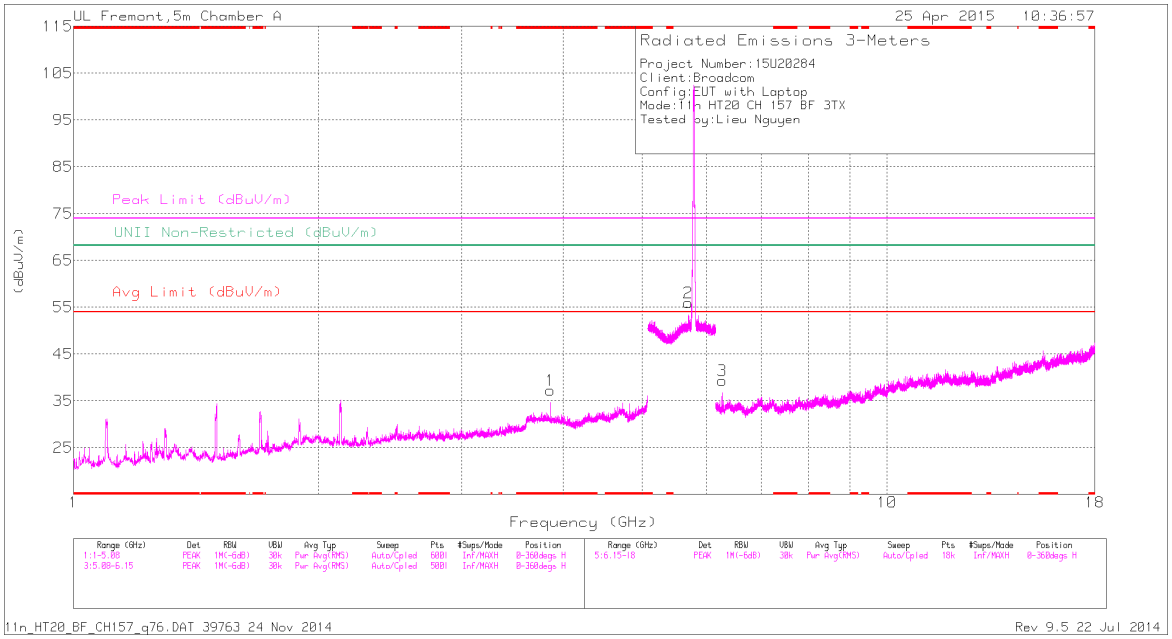

VERTICAL

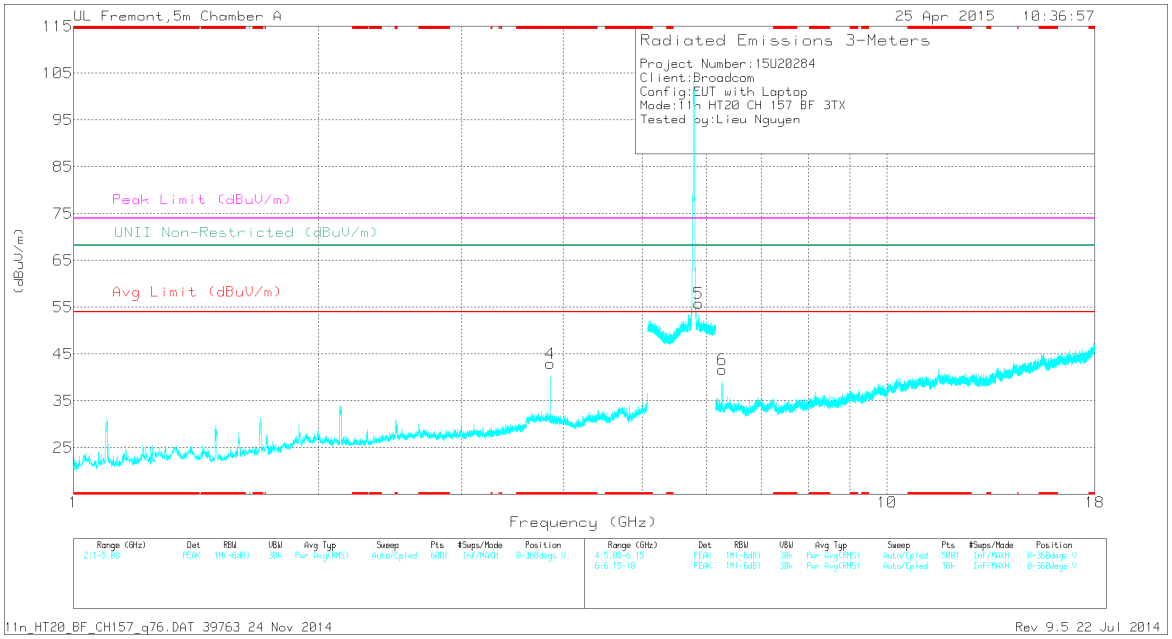

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T345 (dB/m)	Amp/Cbl/ Fltr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 3.857	38.82	PK1	33.4	-31.2	0	41.02	-	-	74	-32.98	273	266	H
	* 3.857	29.41	AD1	33.4	-31.2	.65	32.26	54	-21.74	-	-	273	266	H
4	* 3.856	42.04	PK1	33.4	-31.2	0	44.24	-	-	74	-29.76	246	216	V
	* 3.857	34.82	AD1	33.4	-31.2	.65	37.67	54	-16.33	-	-	246	216	V
2	5.7	35.66	PK	35	-17.9	0	52.76	-	-	-	-	0-360	200	H
5	5.865	34.62	PK	35.4	-17.3	0	52.72	-	-	-	-	0-360	101	V
3	6.269	29.63	PK	35.5	-29	0	36.13	-	-	-	-	0-360	199	H
6	6.274	31.98	PK	35.5	-29	0	38.48	-	-	-	-	0-360	101	V

* - indicates frequency in CFR15.205/IC8.10 Restricted Band

-Compliance for emissions in non-restricted bands is shown in conducted out of band testing

PK - Peak detector
PK2 - KDB558074 Method: Maximum Peak
MAv1 - KDB558074 Option 1 Maximum RMS Average

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

HIGH CHANNEL

HORIZONTAL

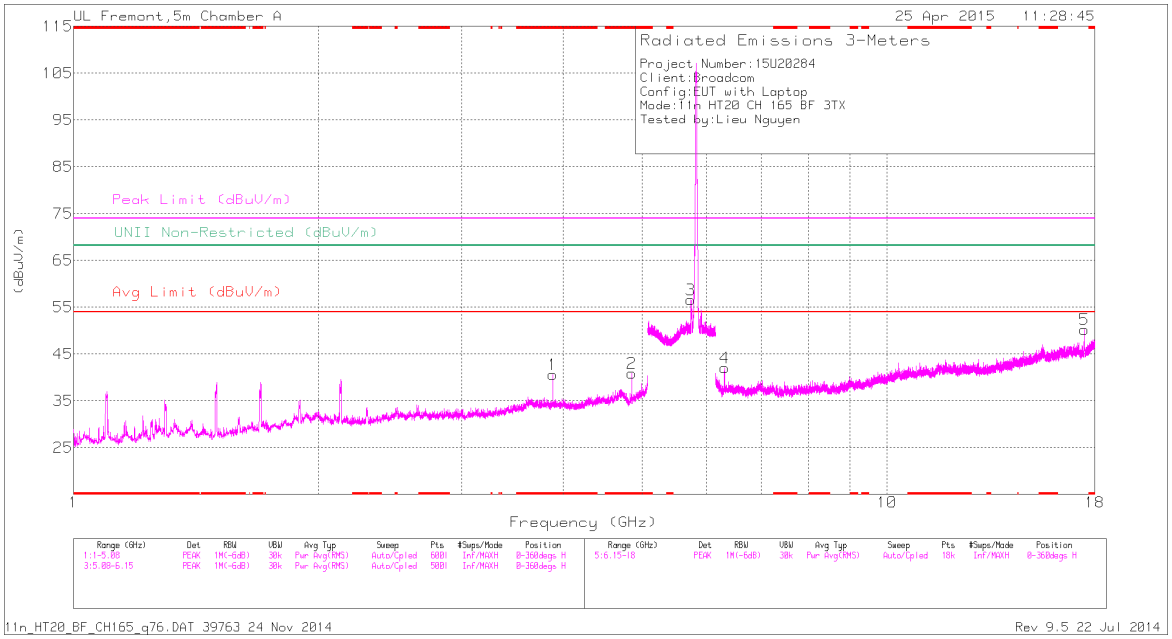

VERTICAL

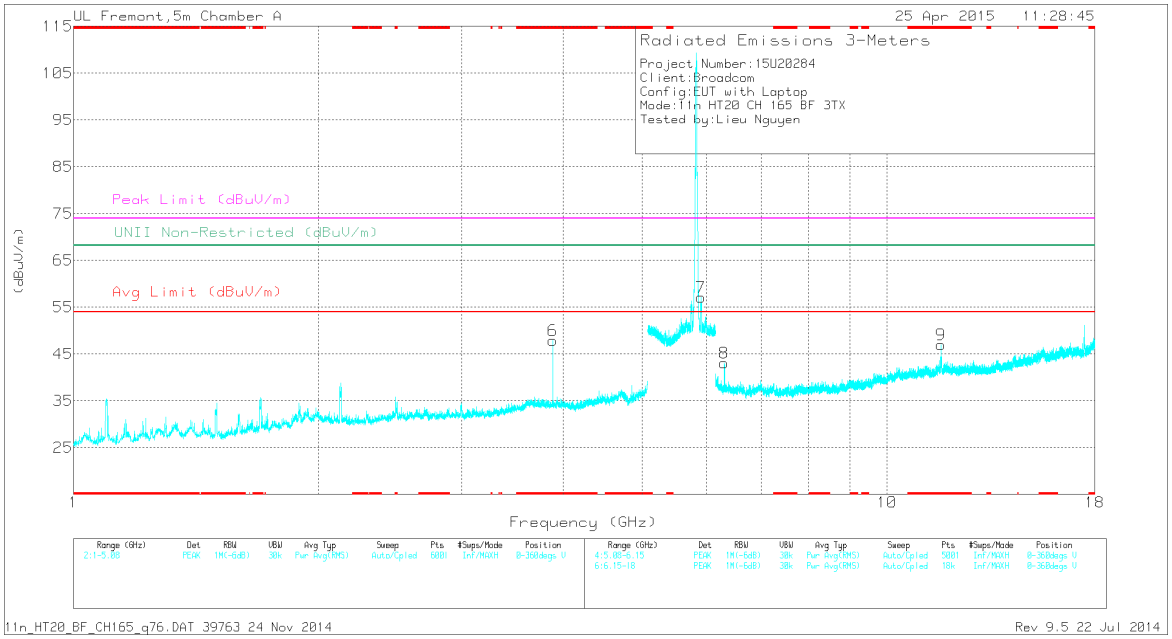

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.