

Appendix B

Highest Test Plots

Table of Contents

1.	BDR+EDR Back 3DH5 39-channel body 0mm	3
2.	SRD Back 2DH5 5-channel body 0mm	4
3.	BLE Back 39-channel body 0mm	5

1. BDR+EDR Back 3DH5 39-channel body 0mm

Date: 26.04.2022

Test Laboratory: Tianjin Dongdian Testing Service Co., Ltd.

BT Mode Back Side

DUT: Portable Bluetooth Speaker PULSE5; Serial: ND0914-CM0000158

Communication System: UID 0, Bluetooth (0); Communication System Band: Bluetooth; Frequency: 2441 MHz; Communication System PAR: 0 dB; PMF: 1.12202e-005

Medium parameters used (interpolated): $f = 2441$ MHz; $\sigma = 1.872$ S/m; $\epsilon_r = 37.836$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY Configuration:

- Probe: EX3DV4 - SN3906; ConvF(7.69, 7.69, 7.69); Calibrated: 27.02.2022;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1366; Calibrated: 21.01.2022
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:1197
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/BT Back Side CH39/Area Scan (10x11x1): Measurement grid: $dx=12$ mm, $dy=12$ mm

Maximum value of SAR (measured) = 0.0361 W/kg


Configuration/BT Back Side CH39/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 4.065 V/m; Power Drift = -0.16 dB

Peak SAR (extrapolated) = 0.0560 W/kg

SAR(1 g) = 0.033 W/kg; SAR(10 g) = 0.019 W/kg

Maximum value of SAR (measured) = 0.0476 W/kg

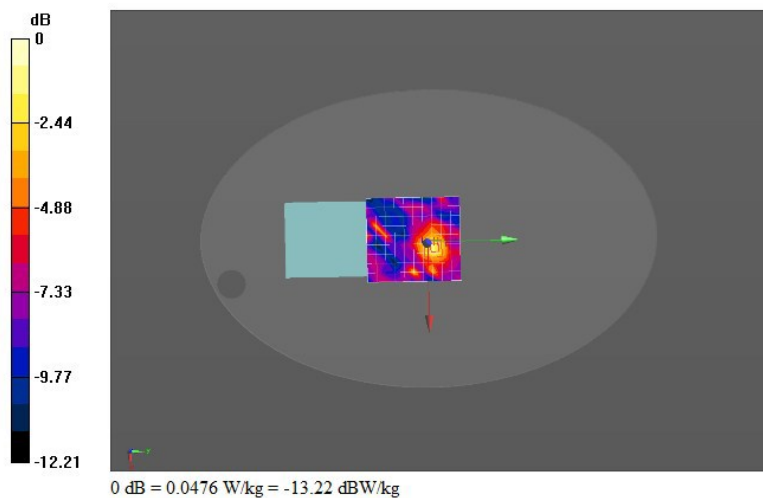

2. SRD Back 2DH5 5-channel body 0mm

Date: 26.04.2022

Test Laboratory: Tianjin Dongdian Testing Service Co., Ltd.

SRD Mode Back Side

DUT: Portable Bluetooth Speaker PULSE5; Serial: ND0914-CM0000158

Communication System: UID 0, Bluetooth (0); Communication System Band: Bluetooth; Frequency: 2407 MHz; Communication System PAR: 0 dB; PMF: 1.12202e-005

Medium parameters used (interpolated): $f = 2407$ MHz; $\sigma = 1.83$ S/m; $\epsilon_r = 37.882$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY Configuration:

- Probe: EX3DV4 - SN3906; ConvF(7.69, 7.69, 7.69); Calibrated: 27.02.2022;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1366; Calibrated: 21.01.2022
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:1197
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/SRD Back Side CH5/Area Scan (10x11x1): Measurement grid: $dx=12$ mm, $dy=12$ mm

Maximum value of SAR (measured) = 0.0460 W/kg


Configuration/SRD Back Side CH5/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 3.584 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 0.0720 W/kg

SAR(1 g) = 0.039 W/kg; SAR(10 g) = 0.023 W/kg

Maximum value of SAR (measured) = 0.0586 W/kg

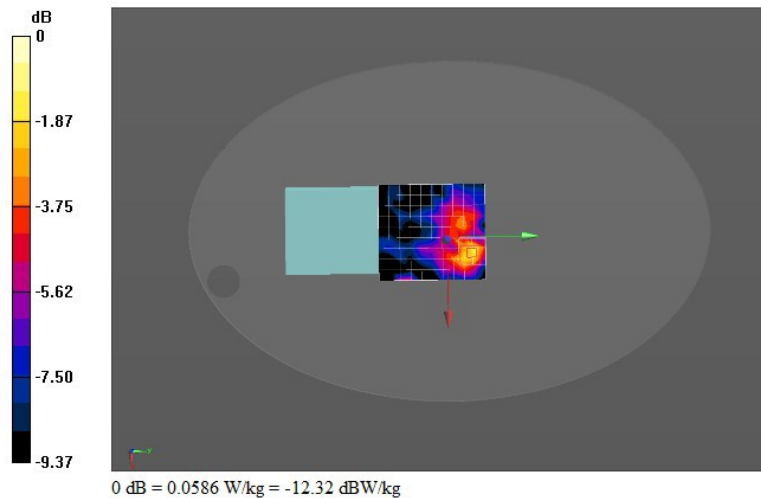

3. BLE Back 39-channel body 0mm

Date: 26.04.2022

Test Laboratory: Tianjin Dongdian Testing Service Co., Ltd.

BLE Mode Back Side

DUT: Portable Bluetooth Speaker PULSE5; Serial: ND0914-CM0000158

Communication System: UID 0, Bluetooth (0); Communication System Band: Bluetooth; Frequency: 2480 MHz; Communication System PAR: 0 dB; PMF: 1.12202e-005

Medium parameters used: $f = 2480$ MHz; $\sigma = 1.907$ S/m; $\epsilon_r = 37.722$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY Configuration:

- Probe: EX3DV4 - SN3906; ConvF(7.69, 7.69, 7.69); Calibrated: 27.02.2022;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1366; Calibrated: 21.01.2022
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:1197
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/BLE Back Side CH39/Area Scan (10x11x1): Measurement grid: $dx=12$ mm, $dy=12$ mm

Maximum value of SAR (measured) = 0.0125 W/kg

Configuration/BLE Back Side CH39/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 2.023 V/m; Power Drift = -0.19 dB

Peak SAR (extrapolated) = 0.0230 W/kg

SAR(1 g) = 0.013 W/kg; SAR(10 g) = 0.010 W/kg

Maximum value of SAR (measured) = 0.0233 W/kg

