

Date: 2024/8/14

GSM 850 Head

Communication System: UID 0, GPRS 2TS (0); Communication System Band: GSM 850;

Frequency: 836.6 MHz;

Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.885$ S/m; $\epsilon_r = 40.599$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY Configuration:

- Probe: EX3DV4 - SN7733; ConvF(10.05, 10.05, 10.05); Calibrated: 2024/2/21;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1739; Calibrated: 2024/1/23
- Phantom: SAM; Type: QD000P40CD; Serial: 1805
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (11x18x1): Measurement grid: $dx=12$ mm, $dy=12$ mm

Maximum value of SAR (measured) = 0.145 W/kg


Configuration/Head/Zoom Scan (7x8x4)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 5.063 V/m; Power Drift = 0.02dB

Peak SAR (extrapolated) = 0.194 W/kg

SAR(1 g) = 0.112 W/kg; SAR(10 g) = 0.084 W/kg

Maximum value of SAR (measured) = 0.146 W/kg

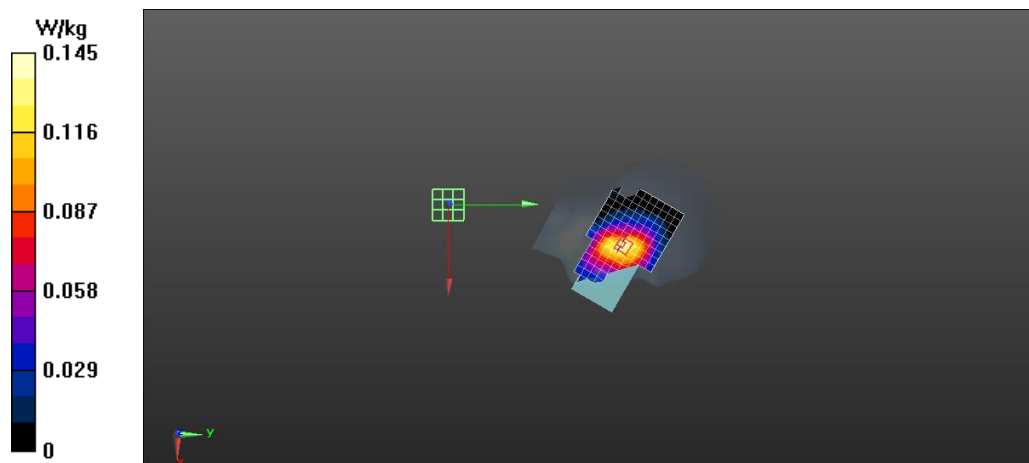

GSM 850 Body

Communication System: UID 0, GPRS 2TS (0); Communication System Band: GSM 850;

Frequency: 836.6 MHz;

Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.888$ S/m; $\epsilon_r = 41.099$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN7733; ConvF(10.05, 10.05, 10.05); Calibrated: 2024/2/21;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = -9.0, 31.0$
- Electronics: DAE4 Sn1739; Calibrated: 2024/1/23
- Phantom: SAM; Type: QD000P40CD; Serial: 1805
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (10x15x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.382 W/kg


Configuration/Body/Zoom Scan (6x6x4)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 14.73 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 0.587 W/kg

SAR(1 g) = 0.310 W/kg; SAR(10 g) = 0.176 W/kg

Maximum value of SAR (measured) = 0.470 W/kg

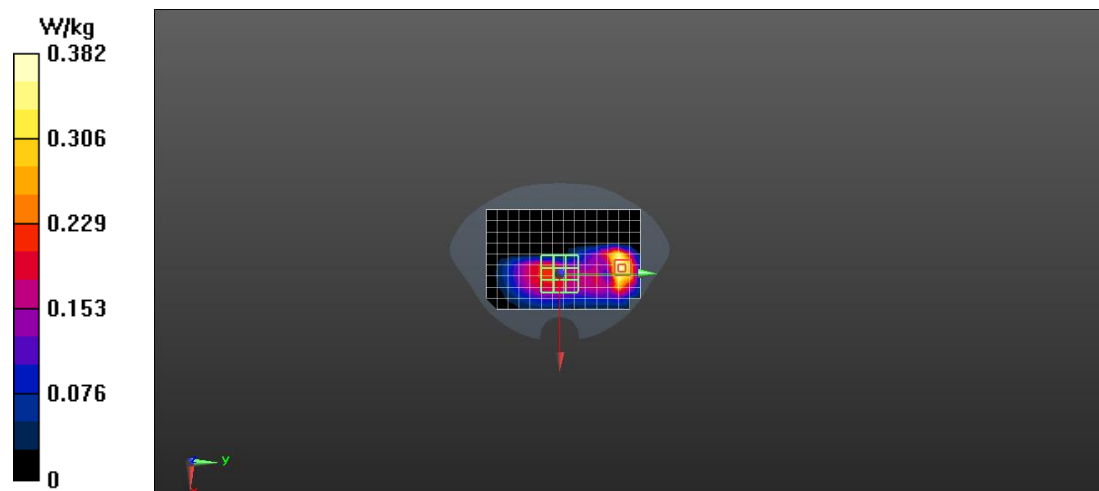

GSM 1900 Head

Communication System: UID 0, GPRS 3TS (0); Communication System Band: GSM 1900;

Frequency: 1880 MHz;

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.451$ S/m; $\epsilon_r = 39.062$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY Configuration:

- Probe: EX3DV4 - SN7733; ConvF(8.45, 8.45, 8.45); Calibrated: 2024/2/21;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1739; Calibrated: 2024/1/23
- Phantom: SAM; Type: QD000P40CD; Serial: 1805
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (11x18x1): Measurement grid: $dx=12$ mm, $dy=12$ mm

Maximum value of SAR (measured) = 0.136 W/kg


Configuration/Head/Zoom Scan (7x7x4)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 2.091 V/m; Power Drift = 0.15 dB

Peak SAR (extrapolated) = 0.166 W/kg

SAR(1 g) = 0.101 W/kg; SAR(10 g) = 0.062 W/kg

Maximum value of SAR (measured) = 0.140 W/kg

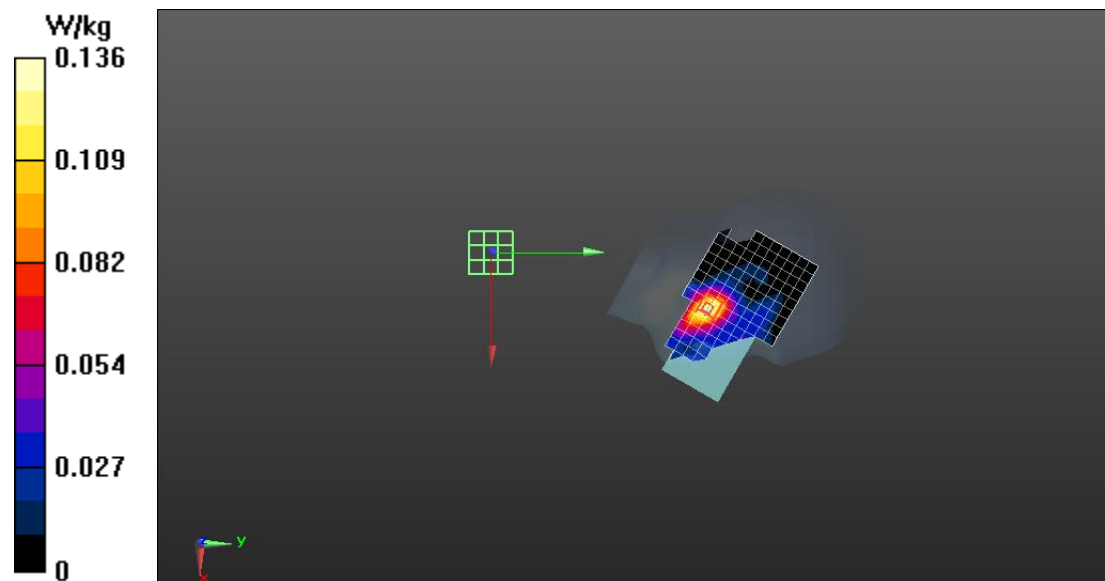

GSM 1900 Body

Communication System: UID 0, GPRS 3TS (0); Communication System Band: GSM 1900;

Frequency: 1880 MHz;

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.451$ S/m; $\epsilon_r = 39.974$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN7733; ConvF(8.45, 8.45, 8.45); Calibrated: 2024/2/21;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = -9.0, 31.0$
- Electronics: DAE4 Sn1739; Calibrated: 2024/1/23
- Phantom: SAM; Type: QD000P40CD; Serial: 1805
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (7x11x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 1.00 W/kg


Configuration/Body/Zoom Scan (5x5x4)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 27.82 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 1.30 W/kg

SAR(1 g) = 0.721 W/kg; SAR(10 g) = 0.387 W/kg

Maximum value of SAR (measured) = 1.09 W/kg

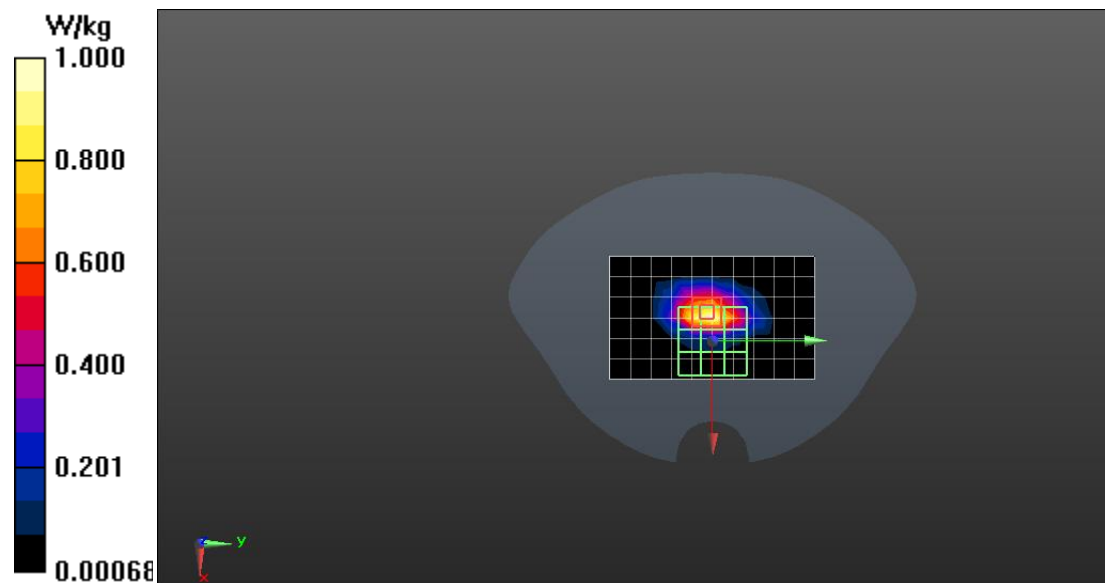

Date: 2024/8/14

WCDMA B2 Head

Communication System: UID 0, UMTS-FDD(WCDMA) (0); Communication System Band:

Band 2; Frequency: 1880 MHz;

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.451$ S/m; $\epsilon_r = 39.062$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY Configuration:

- Probe: EX3DV4 - SN7733; ConvF(8.45, 8.45, 8.45); Calibrated: 2024/2/21;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1739; Calibrated: 2024/1/23
- Phantom: SAM; Type: QD000P40CD; Serial: 1805
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (11x18x1): Measurement grid: $dx=12$ mm, $dy=12$ mm

Maximum value of SAR (measured) = 0.113 W/kg


Configuration/Head/Zoom Scan (7x7x4)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 1.897 V/m; Power Drift = -0.10 dB

Peak SAR (extrapolated) = 0.138 W/kg

SAR(1 g) = 0.082 W/kg; SAR(10 g) = 0.049 W/kg

Maximum value of SAR (measured) = 0.117 W/kg

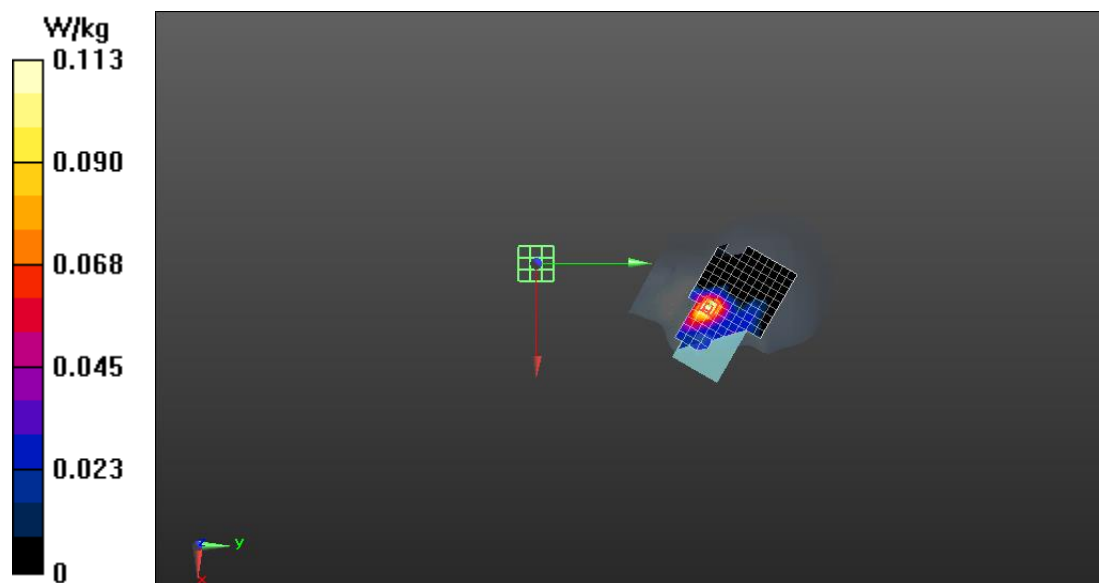

WCDMA B2 Body

Communication System: UID 0, UMTS-FDD(WCDMA) (0); Communication System Band:

Band 2; Frequency: 1907.6 MHz;

Medium parameters used (extrapolated): $f = 1907.6$ MHz; $\sigma = 1.446$ S/m; $\epsilon_r = 39.956$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN7733; ConvF(8.45, 8.45, 8.45); Calibrated: 2024/2/21;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = -9.0, 31.0$
- Electronics: DAE4 Sn1739; Calibrated: 2024/1/23
- Phantom: SAM; Type: QD000P40CD; Serial: 1805
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (7x11x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.959 W/kg


Configuration/Body/Zoom Scan (5x5x4)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 26.39 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 1.34 W/kg

SAR(1 g) = 0.741 W/kg; SAR(10 g) = 0.396 W/kg

Maximum value of SAR (measured) = 1.12 W/kg

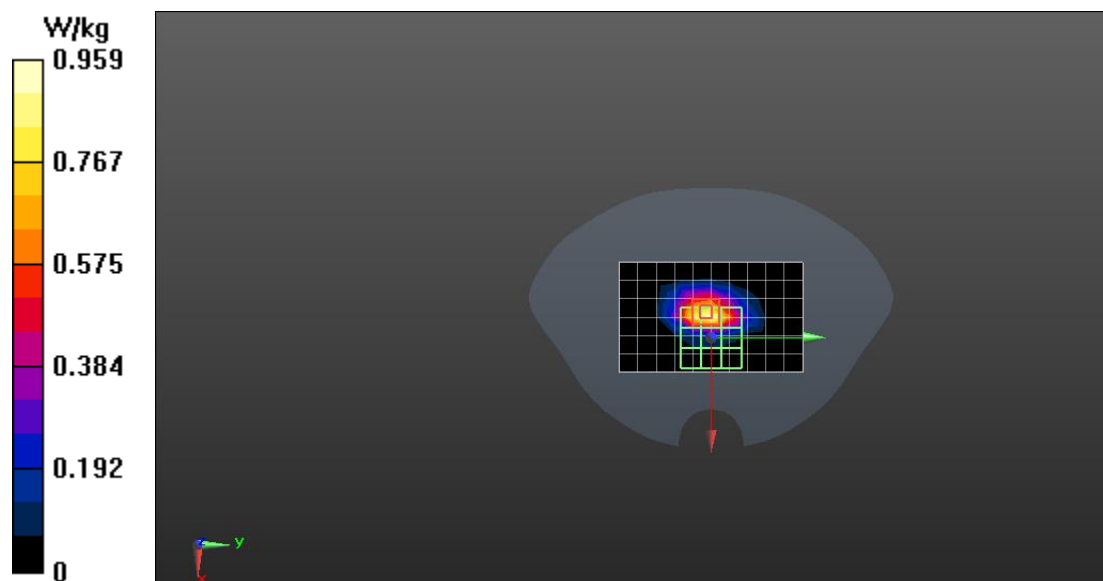

WCDMA B4 Head

Communication System: UID 0, UMTS-FDD(WCDMA) (0); Communication System Band:

Band 4; Frequency: 1732.6 MHz;

Medium parameters used (interpolated): $f = 1732.6$ MHz; $\sigma = 1.403$ S/m; $\epsilon_r = 39.049$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY Configuration:

- Probe: EX3DV4 - SN7733; ConvF(8.76, 8.76, 8.76); Calibrated: 2024/2/21;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1739; Calibrated: 2024/1/23
- Phantom: SAM; Type: QD000P40CD; Serial: 1805
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (11x18x1): Measurement grid: $dx=12$ mm, $dy=12$ mm

Maximum value of SAR (measured) = 0.125 W/kg


Configuration/Head/Zoom Scan (7x7x4)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 4.422 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.147 W/kg

SAR(1 g) = 0.099 W/kg; SAR(10 g) = 0.064 W/kg

Maximum value of SAR (measured) = 0.131 W/kg

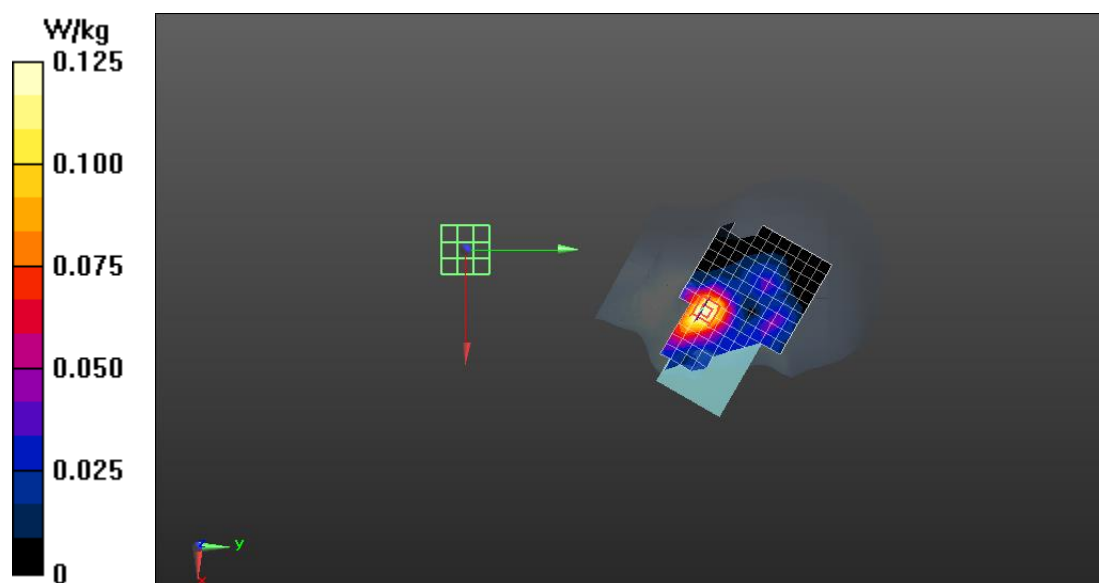

WCDMA B4 Body

Communication System: UID 0, UMTS-FDD(WCDMA) (0); Communication System Band:

Band 4; Frequency: 1732.6 MHz;

Medium parameters used (interpolated): $f = 1732.6$ MHz; $\sigma = 1.409$ S/m; $\epsilon_r = 39.549$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN7733; ConvF(8.76, 8.76, 8.76); Calibrated: 2024/2/21;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = -9.0, 31.0$
- Electronics: DAE4 Sn1739; Calibrated: 2024/1/23
- Phantom: SAM; Type: QD000P40CD; Serial: 1805
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (7x11x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.418 W/kg


Configuration/Body/Zoom Scan (5x5x4)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 18.49 V/m; Power Drift = -0.15 dB

Peak SAR (extrapolated) = 0.689 W/kg

SAR(1 g) = 0.422 W/kg; SAR(10 g) = 0.228 W/kg

Maximum value of SAR (measured) = 0.594 W/kg

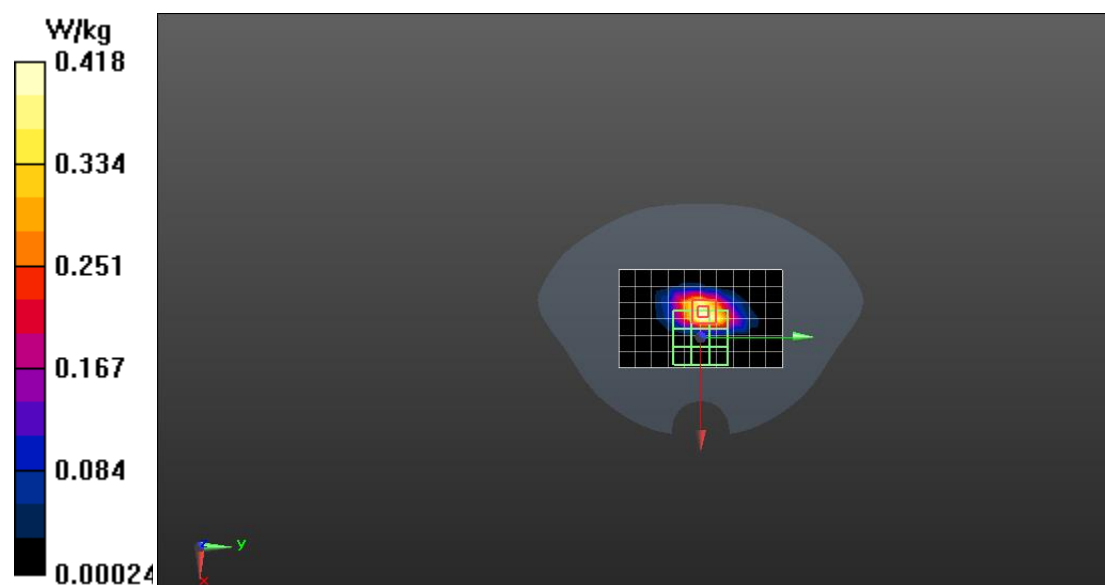

WCDMA B5 Head

Communication System: UID 0, UMTS-FDD(WCDMA) (0); Communication System Band:

Band 5; Frequency: 836.6 MHz;

Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.885$ S/m; $\epsilon_r = 40.599$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY Configuration:

- Probe: EX3DV4 - SN7733; ConvF(10.05, 10.05, 10.05); Calibrated: 2024/2/21;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1739; Calibrated: 2024/1/23
- Phantom: SAM; Type: QD000P40CD; Serial: 1805
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (11x18x1): Measurement grid: $dx=12$ mm, $dy=12$ mm

Maximum value of SAR (measured) = 0.154 W/kg


Configuration/Head/Zoom Scan (7x7x4)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 4.298 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 0.171 W/kg

SAR(1 g) = 0.121 W/kg; SAR(10 g) = 0.088 W/kg

Maximum value of SAR (measured) = 0.153 W/kg

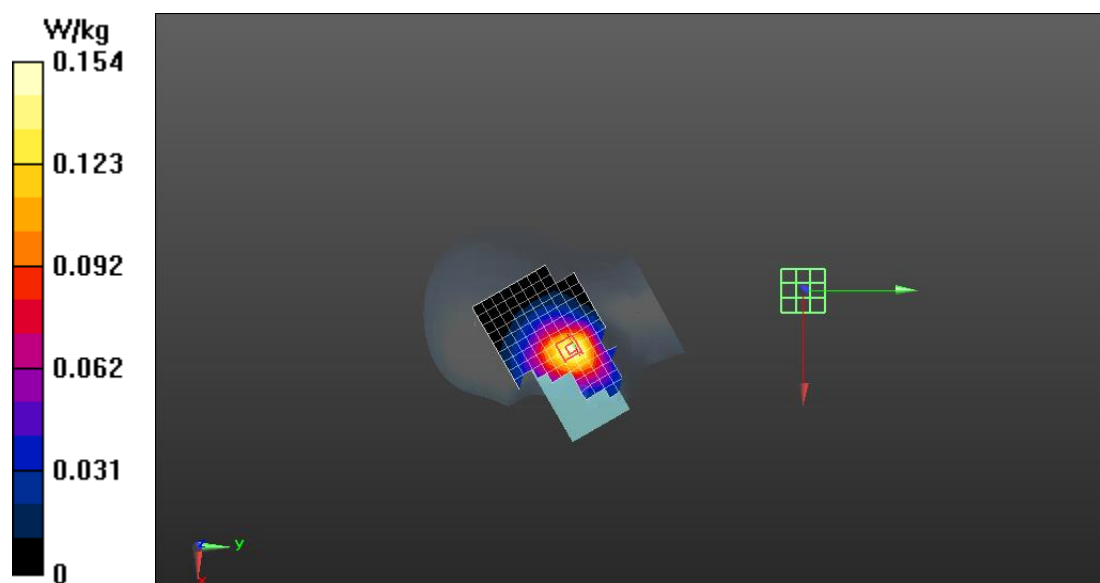

WCDMA B5 Body

Communication System: UID 0, UMTS-FDD(WCDMA) (0); Communication System Band:

Band 5; Frequency: 836.6 MHz;

Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.888$ S/m; $\epsilon_r = 41.099$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN7733; ConvF(10.05, 10.05, 10.05); Calibrated: 2024/2/21;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = -9.0, 31.0$
- Electronics: DAE4 Sn1739; Calibrated: 2024/1/23
- Phantom: SAM; Type: QD000P40CD; Serial: 1805
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (10x15x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.282 W/kg


Configuration/Body/Zoom Scan (5x5x4)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 12.76 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 0.442 W/kg

SAR(1 g) = 0.240 W/kg; SAR(10 g) = 0.137 W/kg

Maximum value of SAR (measured) = 0.363 W/kg

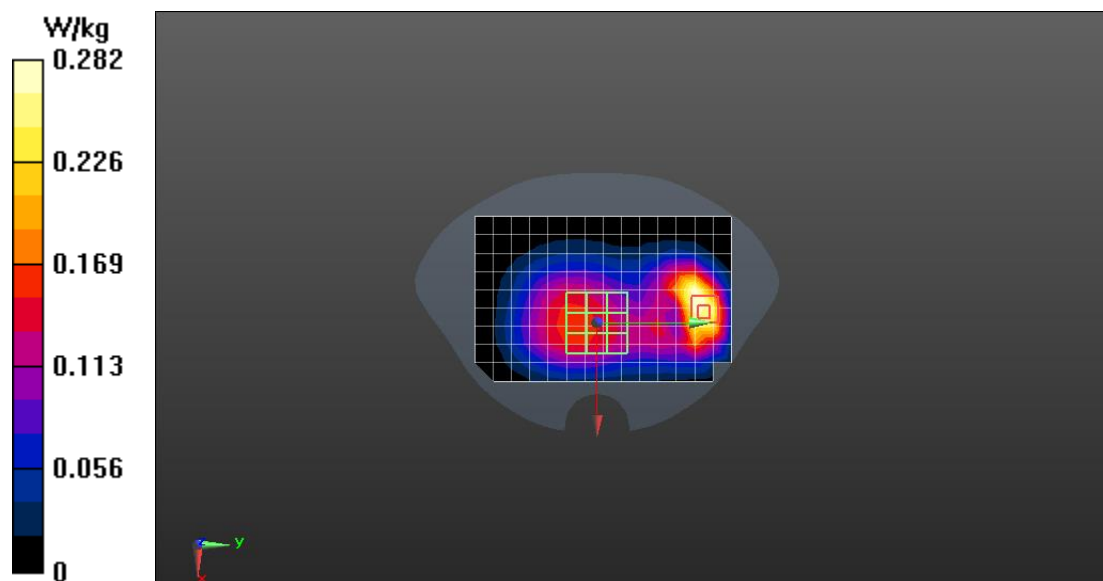

LTE B2 Head

Communication System: UID 0, LTE (0); Communication System Band: Band 2; Frequency: 1900 MHz;

Medium parameters used: $f = 1900$ MHz; $\sigma = 1.401$ S/m; $\epsilon_r = 39.069$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY Configuration:

- Probe: EX3DV4 - SN7733; ConvF(8.45, 8.45, 8.45); Calibrated: 2024/2/21;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1739; Calibrated: 2024/1/23
- Phantom: SAM; Type: QD000P40CD; Serial: 1805
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (11x18x1): Measurement grid: $dx=12$ mm, $dy=12$ mm

Maximum value of SAR (measured) = 0.0441 W/kg


Configuration/Head/Zoom Scan (8x10x4)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 0 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.0710 W/kg

SAR(1 g) = 0.031 W/kg; SAR(10 g) = 0.019 W/kg

Maximum value of SAR (measured) = 0.0444 W/kg

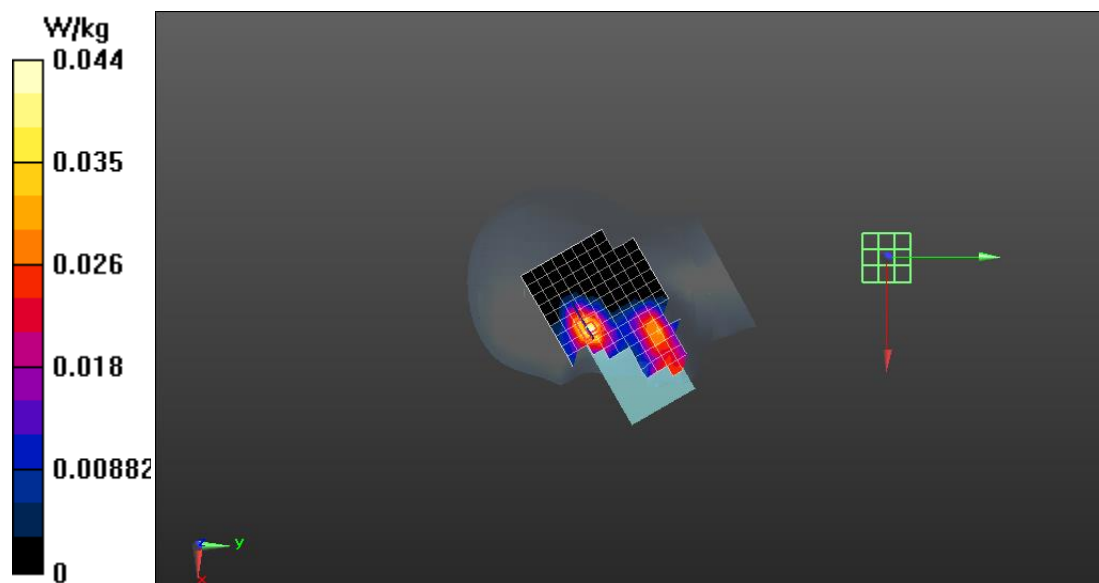

Date: 2024/8/29

LTE B2 Body

Communication System: UID 0, LTE (0); Communication System Band: Band 2; Frequency: 1900 MHz;

Medium parameters used: $f = 1900$ MHz; $\sigma = 1.408$ S/m; $\epsilon_r = 39.481$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN7733; ConvF(8.45, 8.45, 8.45); Calibrated: 2024/2/21;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = -9.0, 31.0$
- Electronics: DAE4 Sn1739; Calibrated: 2024/1/23
- Phantom: SAM; Type: QD000P40CD; Serial: 1805
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (7x11x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 1.07 W/kg


Configuration/Body/Zoom Scan (5x5x4)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 28.34 V/m; Power Drift = -0.15 dB

Peak SAR (extrapolated) = 1.53 W/kg

SAR(1 g) = 0.848 W/kg; SAR(10 g) = 0.454 W/kg

Maximum value of SAR (measured) = 1.28 W/kg

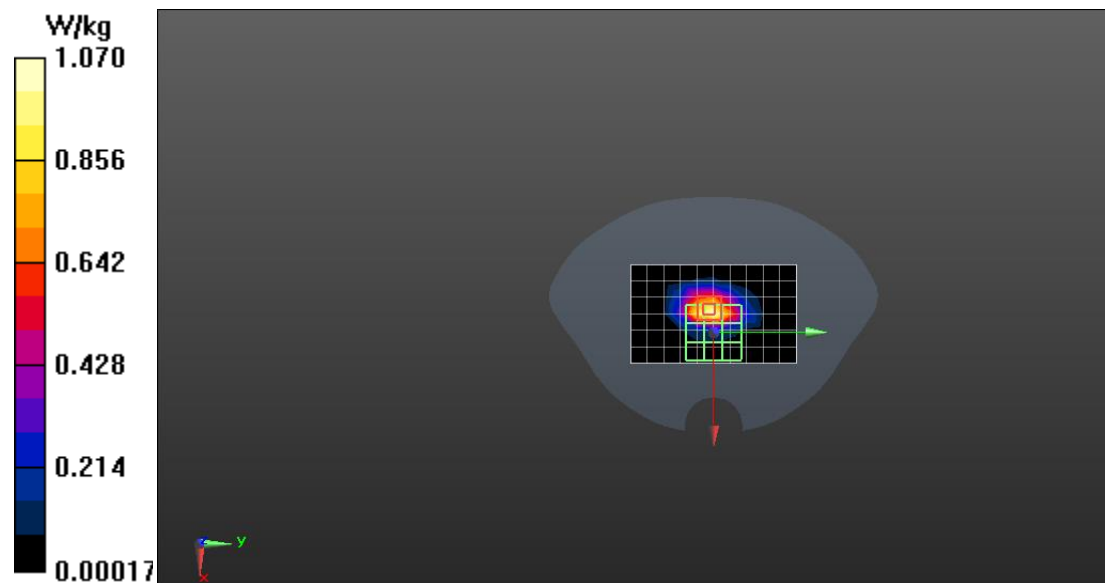

LTE B4 Body

Communication System: UID 0, LTE (0); Communication System Band: Band 4; Frequency: 1720 MHz;

Medium parameters used: $f = 1720$ MHz; $\sigma = 1.403$ S/m; $\epsilon_r = 39.592$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN7733; ConvF(8.76, 8.76, 8.76); Calibrated: 2024/2/21;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = -9.0, 31.0$
- Electronics: DAE4 Sn1739; Calibrated: 2024/1/23
- Phantom: SAM; Type: QD000P40CD; Serial: 1805
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (7x11x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.421 W/kg


Configuration/Body/Zoom Scan (5x5x4)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 18.52 V/m; Power Drift = 0.15 dB

Peak SAR (extrapolated) = 0.733 W/kg

SAR(1 g) = 0.451 W/kg; SAR(10 g) = 0.244 W/kg

Maximum value of SAR (measured) = 0.646 W/kg

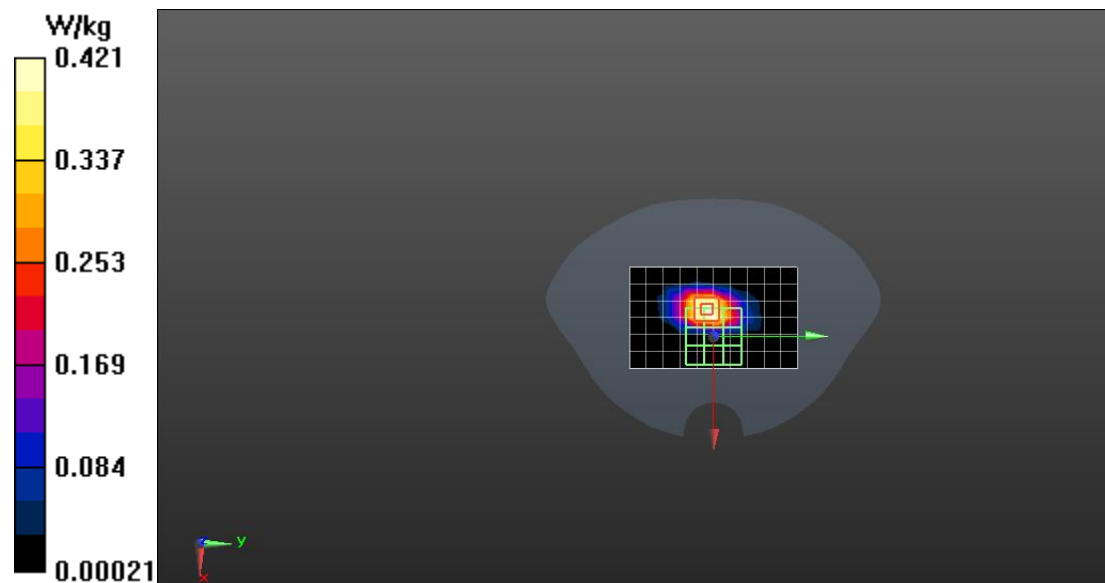

LTE B5 Head

Communication System: UID 0, LTE (0); Communication System Band: Band 5; Frequency: 836.5 MHz;

Medium parameters used (interpolated): $f = 836.5$ MHz; $\sigma = 0.885$ S/m; $\epsilon_r = 40.599$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY Configuration:

- Probe: EX3DV4 - SN7733; ConvF(10.05, 10.05, 10.05); Calibrated: 2024/2/21;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1739; Calibrated: 2024/1/23
- Phantom: SAM; Type: QD000P40CD; Serial: 1805
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (11x18x1): Measurement grid: $dx=12$ mm, $dy=12$ mm

Maximum value of SAR (measured) = 0.160 W/kg


Configuration/Head/Zoom Scan (8x8x4)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 4.667 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 0.346 W/kg

SAR(1 g) = 0.136 W/kg; SAR(10 g) = 0.097 W/kg

Maximum value of SAR (measured) = 0.171 W/kg

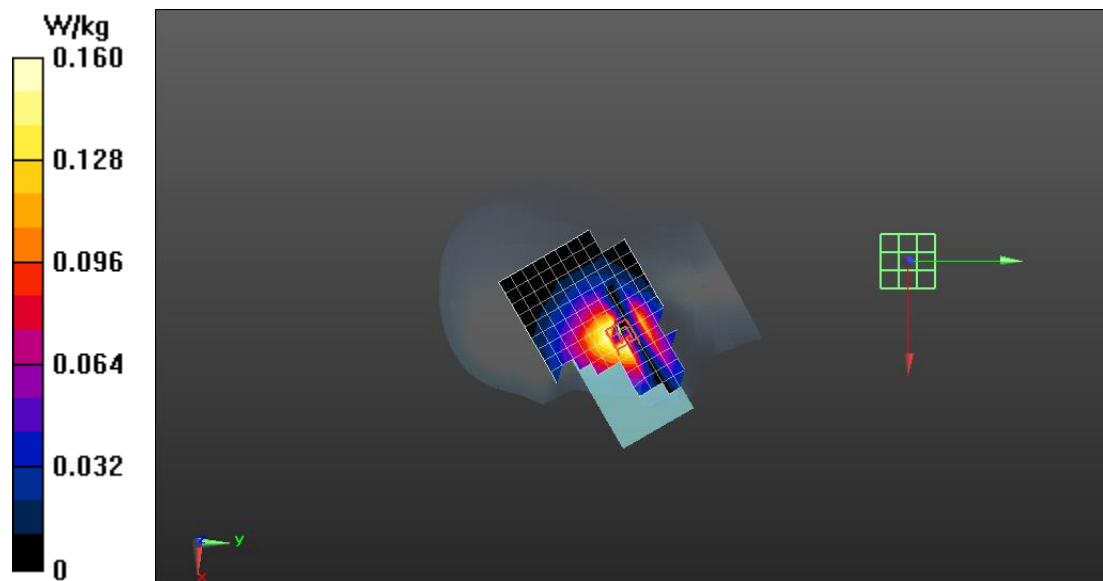

LTE B5 Body

Communication System: UID 0, LTE (0); Communication System Band: Band 5; Frequency: 836.5 MHz;

Medium parameters used (interpolated): $f = 836.5$ MHz; $\sigma = 0.888$ S/m; $\epsilon_r = 41.099$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN7733; ConvF(10.05, 10.05, 10.05); Calibrated: 2024/2/21;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = -9.0, 31.0$
- Electronics: DAE4 Sn1739; Calibrated: 2024/1/23
- Phantom: SAM; Type: QD000P40CD; Serial: 1805
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (10x15x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.459 W/kg


Configuration/Body/Zoom Scan (5x5x4)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 14.39 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 0.581 W/kg

SAR(1 g) = 0.312 W/kg; SAR(10 g) = 0.179 W/kg

Maximum value of SAR (measured) = 0.471 W/kg

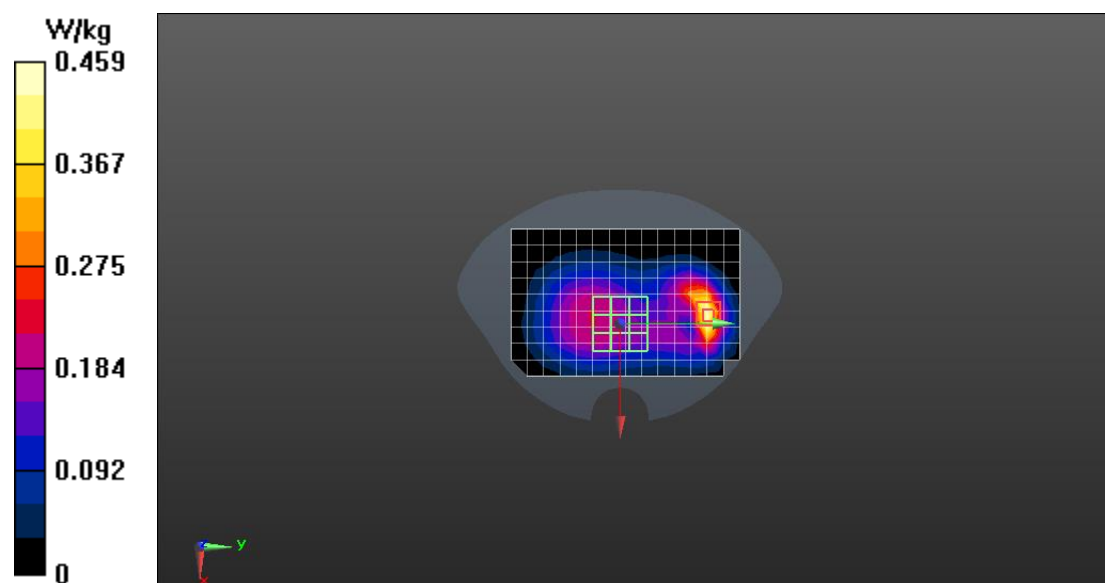

LTE B12 Head

Communication System: UID 0, LTE (0); Communication System Band: Band 12; Frequency: 707.5 MHz;

Medium parameters used (interpolated): $f = 707.5$ MHz; $\sigma = 0.882$ S/m; $\epsilon_r = 41.81$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY Configuration:

- Probe: EX3DV4 - SN7733; ConvF(10.45, 10.45, 10.45); Calibrated: 2024/2/21;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1739; Calibrated: 2024/1/23
- Phantom: SAM; Type: QD000P40CD; Serial: 1805
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (11x18x1): Measurement grid: $dx=12$ mm, $dy=12$ mm

Maximum value of SAR (measured) = 0.162 W/kg


Configuration/Head/Zoom Scan (8x7x4)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 5.033 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 0.181 W/kg

SAR(1 g) = 0.134 W/kg; SAR(10 g) = 0.101 W/kg

Maximum value of SAR (measured) = 0.164 W/kg

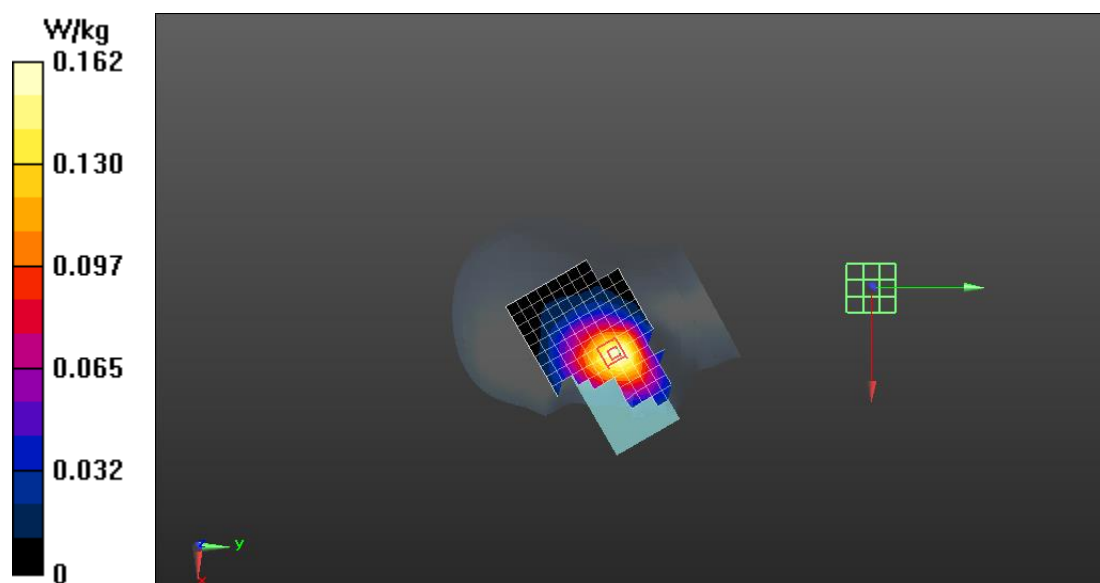

LTE B12 Body

Communication System: UID 0, LTE (0); Communication System Band: Band 12; Frequency: 707.5 MHz;

Medium parameters used (interpolated): $f = 707.5$ MHz; $\sigma = 0.884$ S/m; $\epsilon_r = 42.31$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN7733; ConvF(10.45, 10.45, 10.45); Calibrated: 2024/2/21;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = -9.0, 31.0$
- Electronics: DAE4 Sn1739; Calibrated: 2024/1/23
- Phantom: SAM; Type: QD000P40CD; Serial: 1805
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (10x15x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.398 W/kg


Configuration/Body/Zoom Scan (5x5x4)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 21.58 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 0.429 W/kg

SAR(1 g) = 0.321 W/kg; SAR(10 g) = 0.250 W/kg

Maximum value of SAR (measured) = 0.390 W/kg

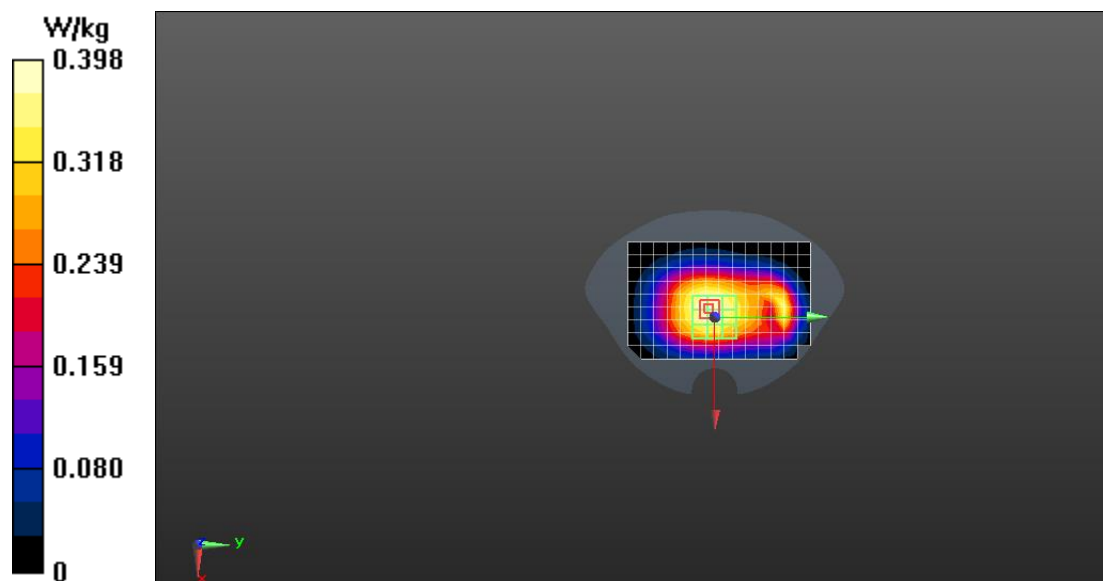

LTE B25 Head

Communication System: UID 0, LTE (0); Communication System Band: Band 25; Frequency: 1905 MHz;

Medium parameters used: $f = 1905$ MHz; $\sigma = 1.391$ S/m; $\epsilon_r = 38.519$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY Configuration:

- Probe: EX3DV4 - SN7733; ConvF(8.45, 8.45, 8.45); Calibrated: 2024/2/21;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1739; Calibrated: 2024/1/23
- Phantom: SAM; Type: QD000P40CD; Serial: 1805
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (11x18x1): Measurement grid: $dx=12$ mm, $dy=12$ mm

Maximum value of SAR (measured) = 0.124 W/kg


Configuration/Head/Zoom Scan (7x8x4)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 2.334 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 0.158 W/kg

SAR(1 g) = 0.094 W/kg; SAR(10 g) = 0.056 W/kg

Maximum value of SAR (measured) = 0.135 W/kg

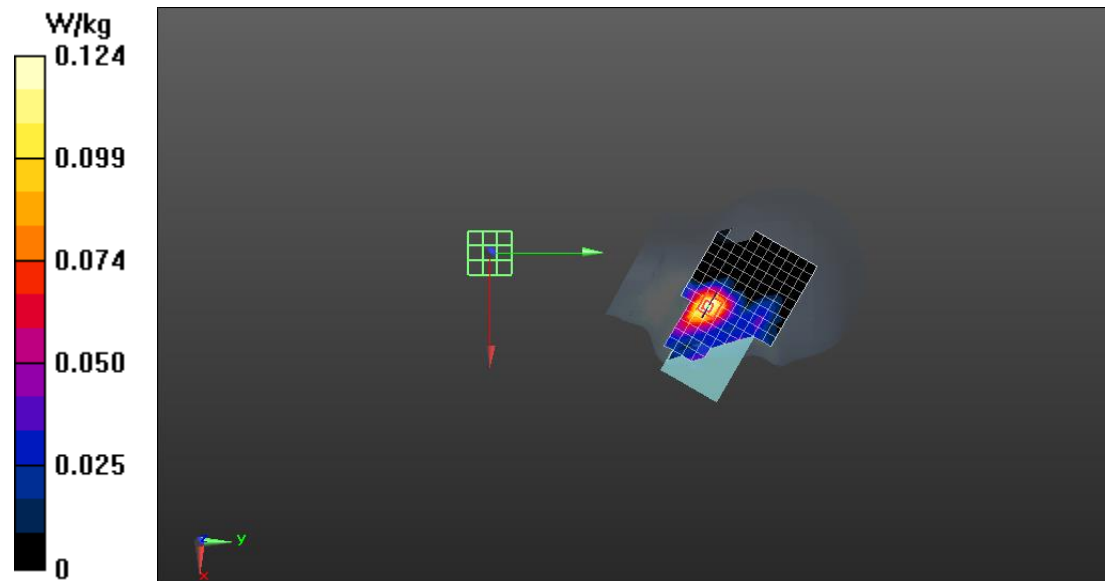

Date: 2024/8/29

LTE B25 Body

Communication System: UID 0, LTE (0); Communication System Band: Band 25; Frequency: 1905 MHz;

Medium parameters used: $f = 1905$ MHz; $\sigma = 1.404$ S/m; $\epsilon_r = 39.432$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN7733; ConvF(8.45, 8.45, 8.45); Calibrated: 2024/2/21;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = -9.0, 31.0$
- Electronics: DAE4 Sn1739; Calibrated: 2024/1/23
- Phantom: SAM; Type: QD000P40CD; Serial: 1805
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (7x11x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 1.13 W/kg


Configuration/Body/Zoom Scan (5x5x4)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 29.37 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 1.60 W/kg

SAR(1 g) = 0.888 W/kg; SAR(10 g) = 0.476 W/kg

Maximum value of SAR (measured) = 1.34 W/kg

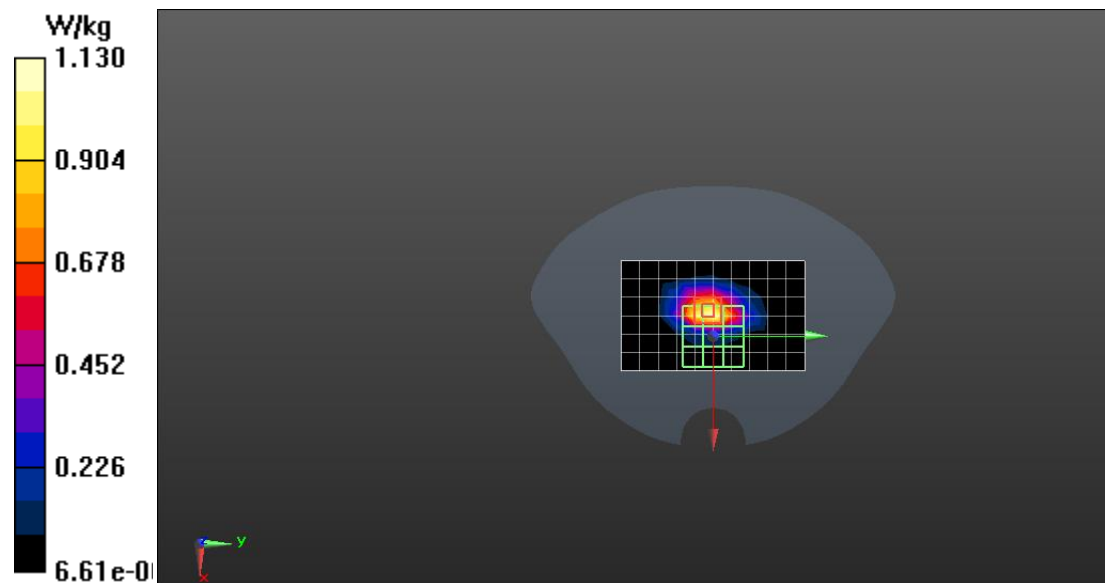

LTE B26 Head

Communication System: UID 0, LTE (0); Communication System Band: Band 26; Frequency: 831.5 MHz;

Medium parameters used (interpolated): $f = 831.5$ MHz; $\sigma = 0.886$ S/m; $\epsilon_r = 40.575$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY Configuration:

- Probe: EX3DV4 - SN7733; ConvF(10.05, 10.05, 10.05); Calibrated: 2024/2/21;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1739; Calibrated: 2024/1/23
- Phantom: SAM; Type: QD000P40CD; Serial: 1805
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (11x18x1): Measurement grid: $dx=12$ mm, $dy=12$ mm

Maximum value of SAR (measured) = 0.178 W/kg


Configuration/Head/Zoom Scan (7x7x4)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 4.921 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.192 W/kg

SAR(1 g) = 0.137 W/kg; SAR(10 g) = 0.101 W/kg

Maximum value of SAR (measured) = 0.172 W/kg

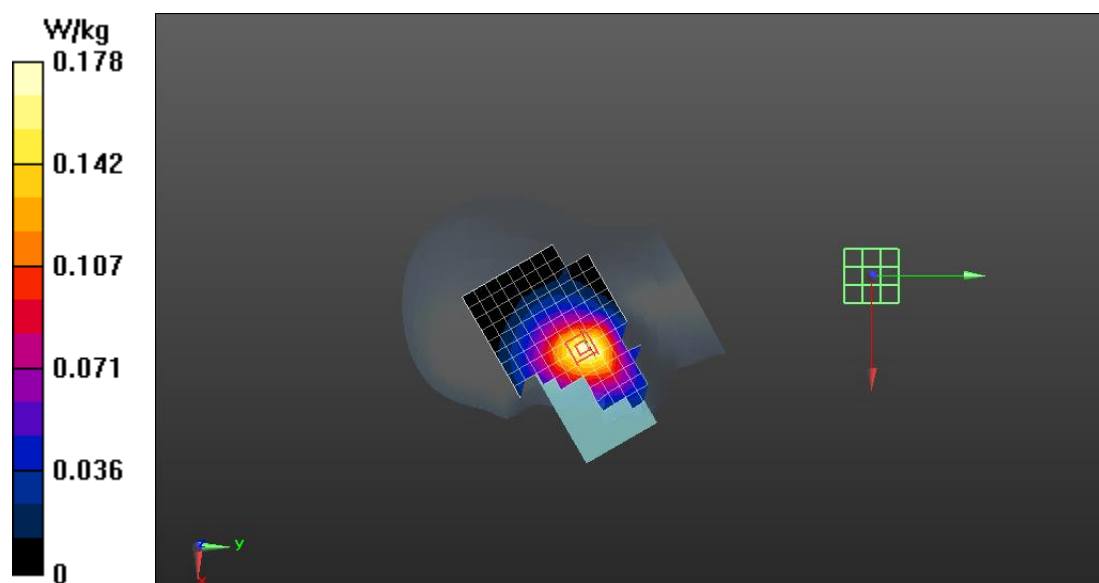

LTE B26 Body

Communication System: UID 0, LTE (0); Communication System Band: Band 26; Frequency: 831.5 MHz;

Medium parameters used (interpolated): $f = 831.5$ MHz; $\sigma = 0.888$ S/m; $\epsilon_r = 41.075$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN7733; ConvF(10.05, 10.05, 10.05); Calibrated: 2024/2/21;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = -9.0, 31.0$
- Electronics: DAE4 Sn1739; Calibrated: 2024/1/23
- Phantom: SAM; Type: QD000P40CD; Serial: 1805
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (7x11x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.350 W/kg


Configuration/Body/Zoom Scan (5x5x4)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 17.98 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.711 W/kg

SAR(1 g) = 0.345 W/kg; SAR(10 g) = 0.177 W/kg

Maximum value of SAR (measured) = 0.553 W/kg

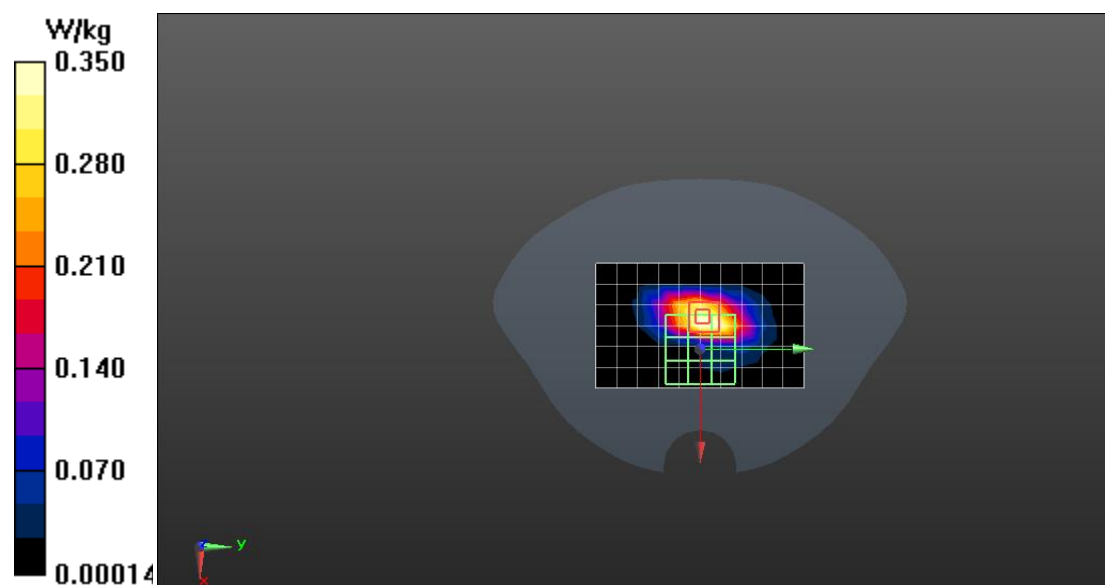

LTE B41 Body

Communication System: UID 0, TDD-LTE (0); Communication System Band: Band 41;

Frequency: 2593 MHz;

Medium parameters used (interpolated): $f = 2593$ MHz; $\sigma = 1.863$ S/m; $\epsilon_r = 37.641$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN7733; ConvF(7.72, 7.72, 7.72); Calibrated: 2024/2/21;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = -9.0, 31.0$
- Electronics: DAE4 Sn1739; Calibrated: 2024/1/23
- Phantom: SAM; Type: QD000P40CD; Serial: 1805
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (7x11x1): Measurement grid: $dx=12$ mm, $dy=12$ mm

Maximum value of SAR (measured) = 0.270 W/kg


Configuration/Body/Zoom Scan (5x5x4)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 9.040 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.563 W/kg

SAR(1 g) = 0.249 W/kg; SAR(10 g) = 0.103 W/kg

Maximum value of SAR (measured) = 0.442 W/kg

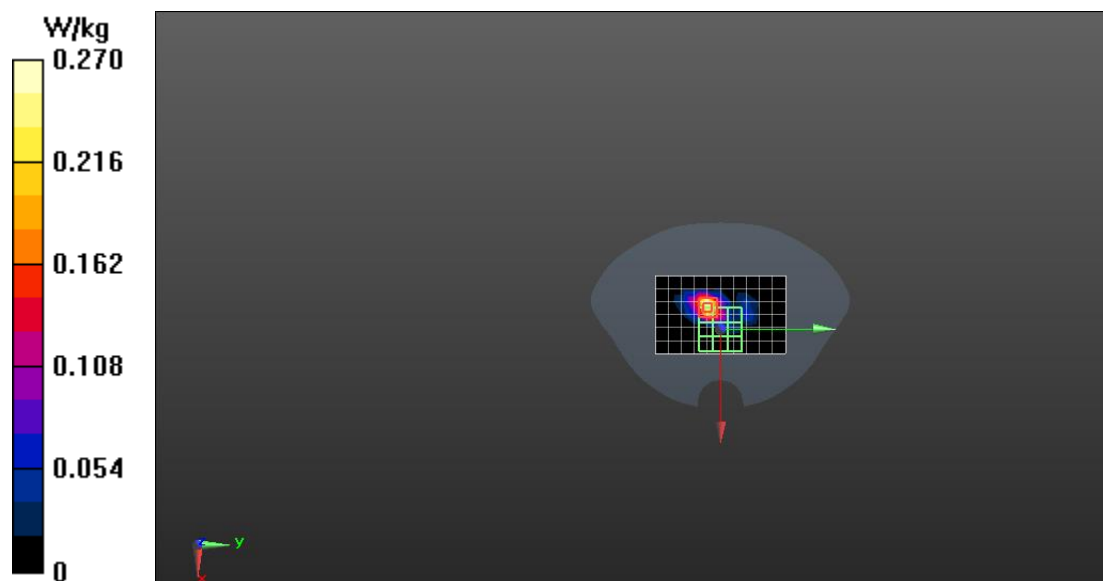

LTE B66 Head

Communication System: UID 0, LTE (0); Communication System Band: Band 66; Frequency: 1720 MHz;

Medium parameters used: $f = 1720$ MHz; $\sigma = 1.398$ S/m; $\epsilon_r = 39.092$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY Configuration:

- Probe: EX3DV4 - SN7733; ConvF(8.76, 8.76, 8.76); Calibrated: 2024/2/21;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1739; Calibrated: 2024/1/23
- Phantom: SAM; Type: QD000P40CD; Serial: 1805
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (11x18x1): Measurement grid: $dx=12$ mm, $dy=12$ mm

Maximum value of SAR (measured) = 0.159 W/kg


Configuration/Head/Zoom Scan (7x7x4)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 5.183 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 0.186 W/kg

SAR(1 g) = 0.128 W/kg; SAR(10 g) = 0.083 W/kg

Maximum value of SAR (measured) = 0.168 W/kg

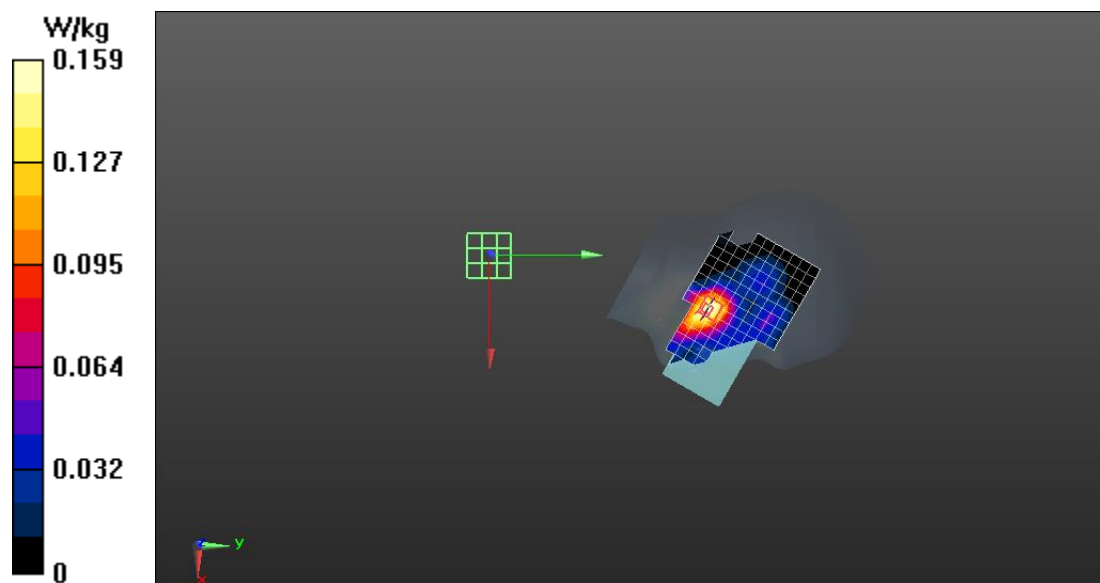

LTE B66 Body

Communication System: UID 0, LTE (0); Communication System Band: Band 66; Frequency: 1720 MHz;

Medium parameters used: $f = 1720$ MHz; $\sigma = 1.403$ S/m; $\epsilon_r = 39.592$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN7733; ConvF(8.76, 8.76, 8.76); Calibrated: 2024/2/21;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = -9.0, 31.0$
- Electronics: DAE4 Sn1739; Calibrated: 2024/1/23
- Phantom: SAM; Type: QD000P40CD; Serial: 1805
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (7x11x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.455 W/kg


Configuration/Body/Zoom Scan (5x5x4)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 19.11 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.713 W/kg

SAR(1 g) = 0.436 W/kg; SAR(10 g) = 0.237 W/kg

Maximum value of SAR (measured) = 0.613 W/kg

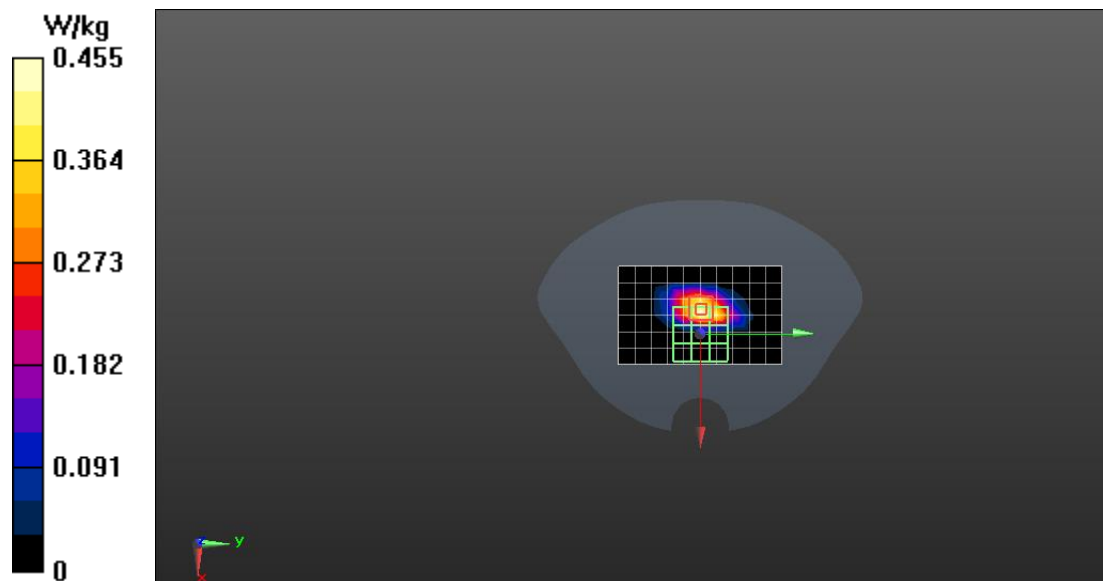

LTE B71 Head

Communication System: UID 0, LTE (0); Communication System Band: Band 71; Frequency: 673 MHz;

Medium parameters used (interpolated): $f = 673$ MHz; $\sigma = 0.874$ S/m; $\epsilon_r = 41.87$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY Configuration:

- Probe: EX3DV4 - SN7733; ConvF(10.45, 10.45, 10.45); Calibrated: 2024/2/21;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1739; Calibrated: 2024/1/23
- Phantom: SAM; Type: QD000P40CD; Serial: 1805
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (11x18x1): Measurement grid: $dx=12$ mm, $dy=12$ mm

Maximum value of SAR (measured) = 0.115 W/kg


Configuration/Head/Zoom Scan (7x7x4)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 3.447 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 0.129 W/kg

SAR(1 g) = 0.095 W/kg; SAR(10 g) = 0.072 W/kg

Maximum value of SAR (measured) = 0.117 W/kg

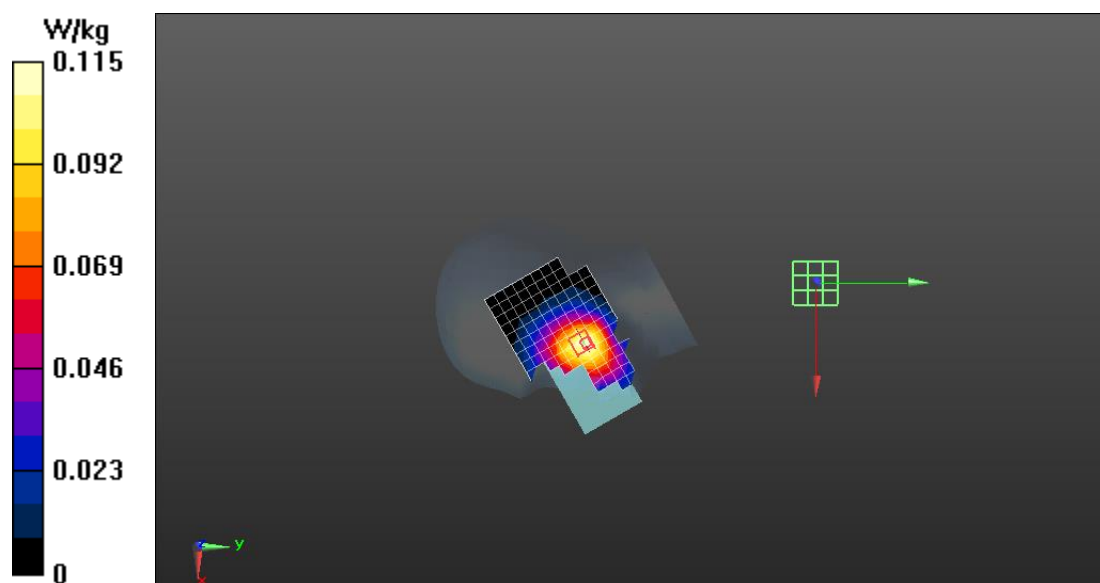

LTE B71 Body

Communication System: UID 0, LTE (0); Communication System Band: Band 71; Frequency: 673 MHz;

Medium parameters used (interpolated): $f = 673$ MHz; $\sigma = 0.876$ S/m; $\epsilon_r = 42.37$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN7733; ConvF(10.45, 10.45, 10.45); Calibrated: 2024/2/21;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = -9.0, 31.0$
- Electronics: DAE4 Sn1739; Calibrated: 2024/1/23
- Phantom: SAM; Type: QD000P40CD; Serial: 1805
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (10x15x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.305 W/kg


Configuration/Body/Zoom Scan (5x5x4)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 19.21 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.335 W/kg

SAR(1 g) = 0.250 W/kg; SAR(10 g) = 0.196 W/kg

Maximum value of SAR (measured) = 0.304 W/kg

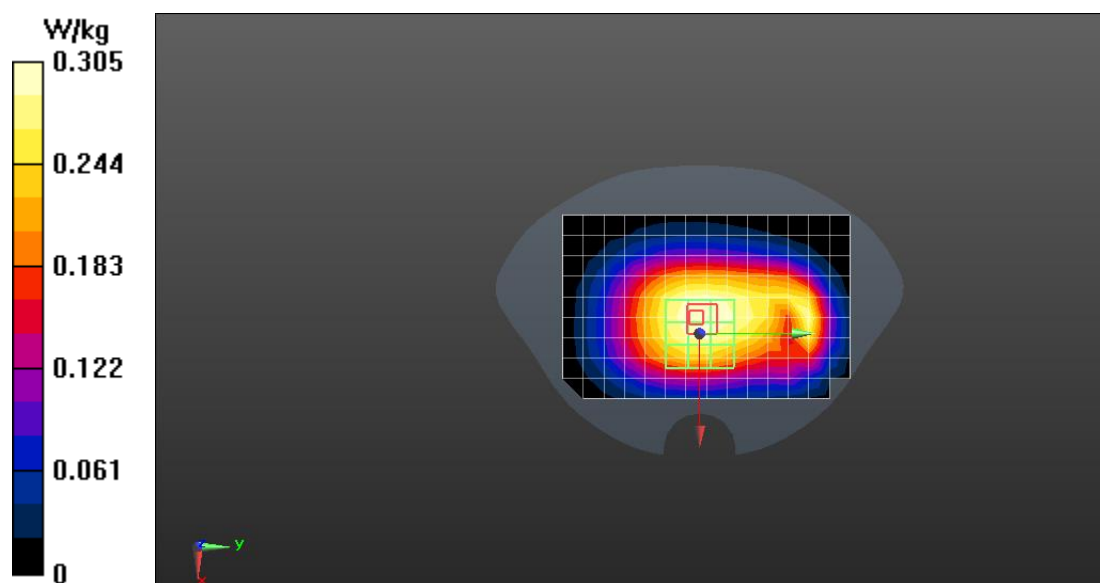

2.4G WIFI Head

Communication System: UID 0, 2.45GHz Wi-Fi (0); Communication System Band: ISM

2.4GHz; Frequency: 2462 MHz;

Medium parameters used (interpolated): $f = 2462$ MHz; $\sigma = 1.766$ S/m; $\epsilon_r = 38.282$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY Configuration:

- Probe: EX3DV4 - SN7733; ConvF(7.98, 7.98, 7.98); Calibrated: 2024/2/21;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1739; Calibrated: 2024/1/23
- Phantom: SAM; Type: QD000P40CD; Serial: 1805
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (11x18x1): Measurement grid: $dx=12$ mm, $dy=12$ mm

Maximum value of SAR (measured) = 0.988 W/kg


Configuration/Head/Zoom Scan (7x7x4)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 11.82 V/m; Power Drift = -0.10 dB

Peak SAR (extrapolated) = 1.70 W/kg

SAR(1 g) = 0.620 W/kg; SAR(10 g) = 0.223 W/kg

Maximum value of SAR (measured) = 1.18 W/kg

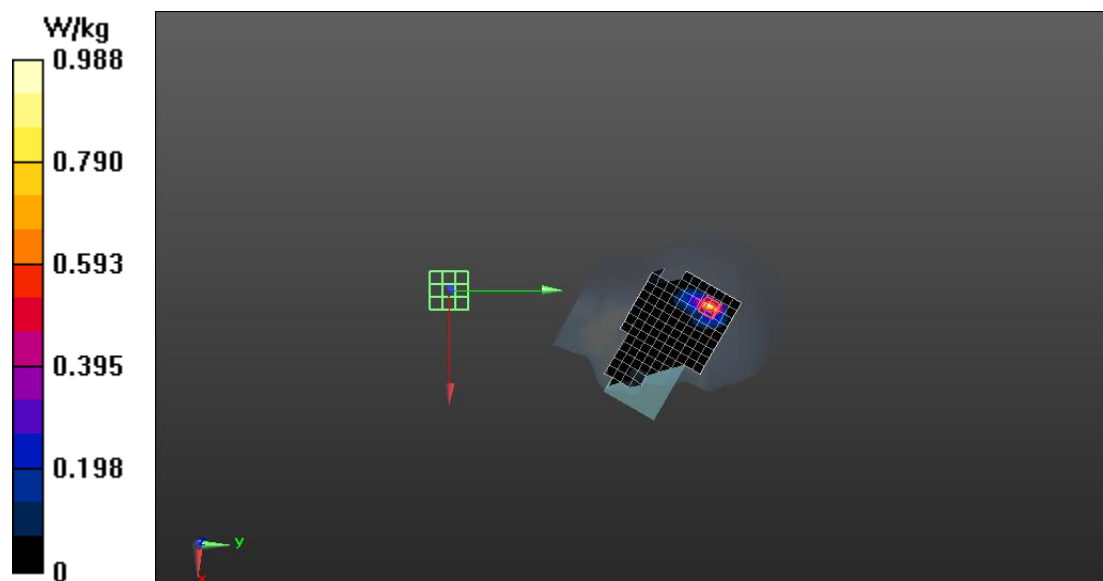

2.4G WIFI Body

Communication System: UID 0, 2.45GHz Wi-Fi (0); Communication System Band: ISM

2.4GHz; Frequency: 2462 MHz;

Medium parameters used (interpolated): $f = 2462$ MHz; $\sigma = 1.766$ S/m; $\epsilon_r = 38.282$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN7733; ConvF(7.98, 7.98, 7.98); Calibrated: 2024/2/21;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = -9.0, 31.0$
- Electronics: DAE4 Sn1739; Calibrated: 2024/1/23
- Phantom: SAM; Type: QD000P40CD; Serial: 1805
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (8x13x1): Measurement grid: $dx=12$ mm, $dy=12$ mm

Maximum value of SAR (measured) = 0.250 W/kg


Configuration/Body/Zoom Scan (7x9x4)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 10.26 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 0.354 W/kg

SAR(1 g) = 0.168 W/kg; SAR(10 g) = 0.077 W/kg

Maximum value of SAR (measured) = 0.285 W/kg

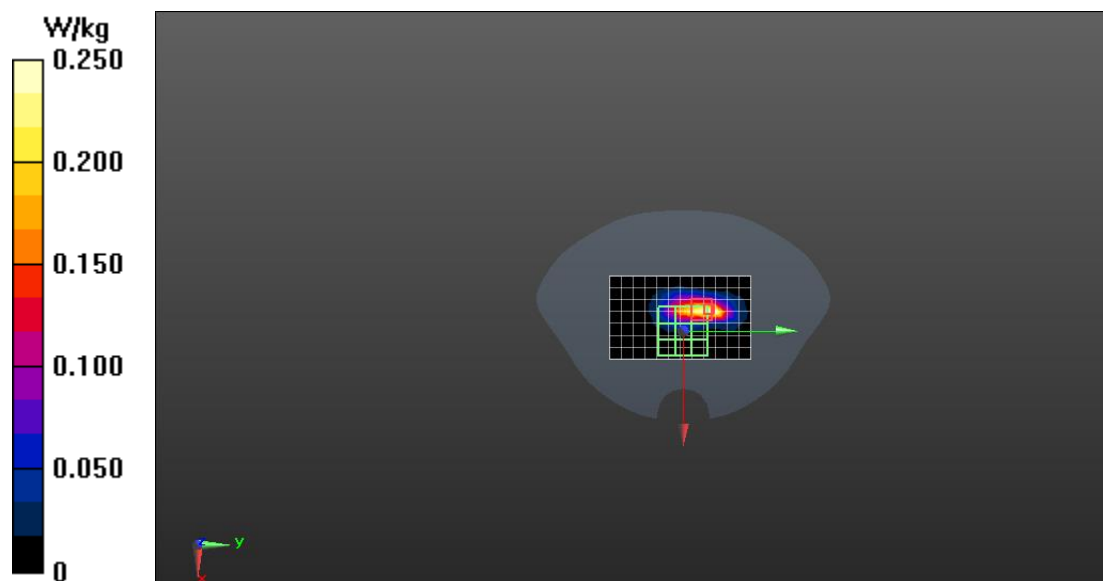

U-NII-1 Body


Communication System: UID 0, 5GHz Wi-Fi (0); Communication System Band: 5G Band(5030.0 - 5825.0 MHz); Frequency: 5180 MHz;
Medium parameters used: $f = 5180$ MHz; $\sigma = 4.496$ S/m; $\epsilon_r = 34.77$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN7733; ConvF(5.64, 5.64, 5.64); Calibrated: 2024/2/21;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = -9.0, 29.0$
- Electronics: DAE4 Sn1739; Calibrated: 2024/1/23
- Phantom: SAM; Type: QD000P40CD; Serial: 1805
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (7x13x1): Measurement grid: $dx=10$ mm, $dy=10$ mm
Maximum value of SAR (measured) = 0.252 W/kg

Configuration/Body/Zoom Scan (8x8x6)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm
Reference Value = 4.346 V/m; Power Drift = 0.04 dB
Peak SAR (extrapolated) = 0.427 W/kg
SAR(1 g) = 0.121 W/kg; SAR(10 g) = 0.040 W/kg
Maximum value of SAR (measured) = 0.274 W/kg

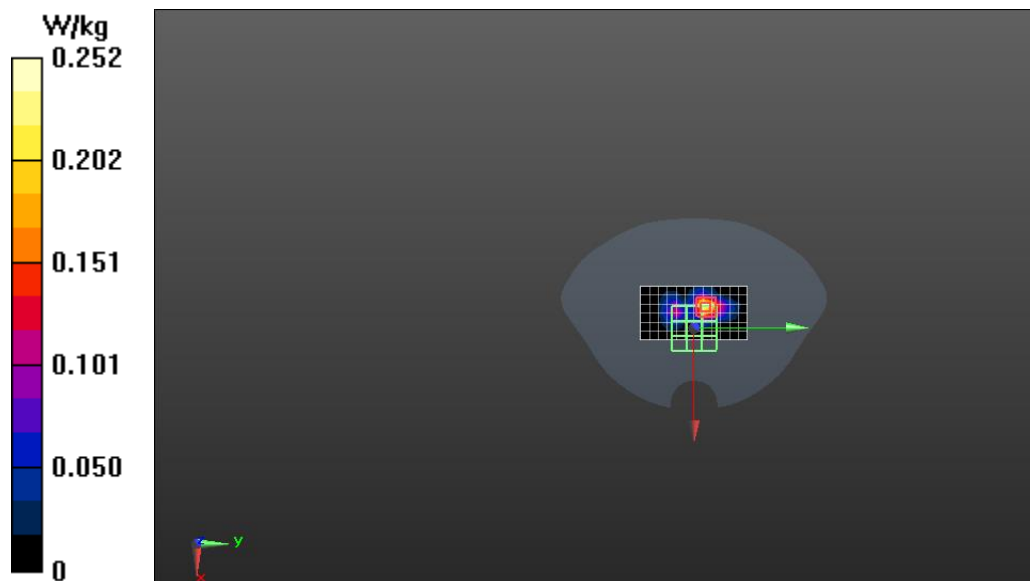

U-NII-2A Head

Communication System: UID 0, 5GHz Wi-Fi (0); Communication System Band: 5G Band(5030.0 - 5825.0 MHz); Frequency: 5320 MHz;
Medium parameters used: $f = 5320$ MHz; $\sigma = 4.627$ S/m; $\epsilon_r = 34.554$; $\rho = 1000$ kg/m³
Phantom section: Left Section

DASY Configuration:

- Probe: EX3DV4 - SN7733; ConvF(5.64, 5.64, 5.64); Calibrated: 2024/2/21;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = -9.0, 29.0$
- Electronics: DAE4 Sn1739; Calibrated: 2024/1/23
- Phantom: SAM; Type: QD000P40CD; Serial: 1805
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Left Tilt/Head/Area Scan (13x22x1): Measurement grid: $dx=10$ mm, $dy=10$ mm

Maximum value of SAR (measured) = 0.815 W/kg


Left Tilt/Head/Zoom Scan (8x8x6)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm

Reference Value = 9.550 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 1.79 W/kg

SAR(1 g) = 0.368 W/kg; SAR(10 g) = 0.099 W/kg

Maximum value of SAR (measured) = 1.02 W/kg

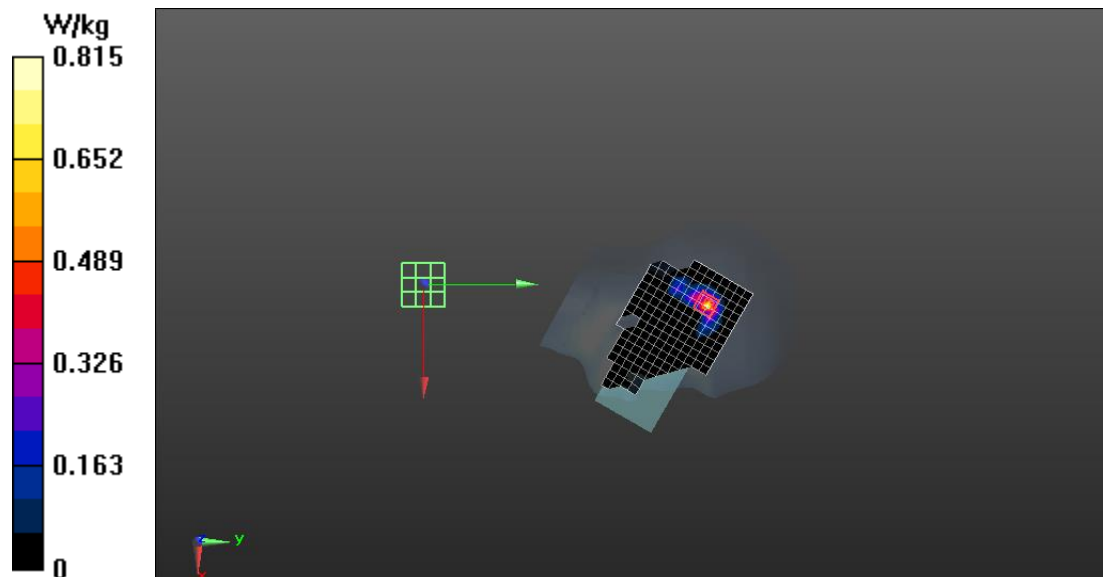

U-NII-2A Body


Communication System: UID 0, 5GHz Wi-Fi (0); Communication System Band: 5G Band(5030.0 - 5825.0 MHz); Frequency: 5320 MHz;
Medium parameters used: $f = 5320$ MHz; $\sigma = 4.627$ S/m; $\epsilon_r = 34.554$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN7733; ConvF(5.64, 5.64, 5.64); Calibrated: 2024/2/21;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = -9.0, 29.0$
- Electronics: DAE4 Sn1739; Calibrated: 2024/1/23
- Phantom: SAM; Type: QD000P40CD; Serial: 1805
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (13x22x1): Measurement grid: $dx=10$ mm, $dy=10$ mm
Maximum value of SAR (measured) = 0.206 W/kg

Configuration/Body/Zoom Scan (10x9x6)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm
Reference Value = 0.6310 V/m; Power Drift = 0.10 dB
Peak SAR (extrapolated) = 0.382 W/kg
SAR(1 g) = 0.085 W/kg; SAR(10 g) = 0.028 W/kg
Maximum value of SAR (measured) = 0.216 W/kg

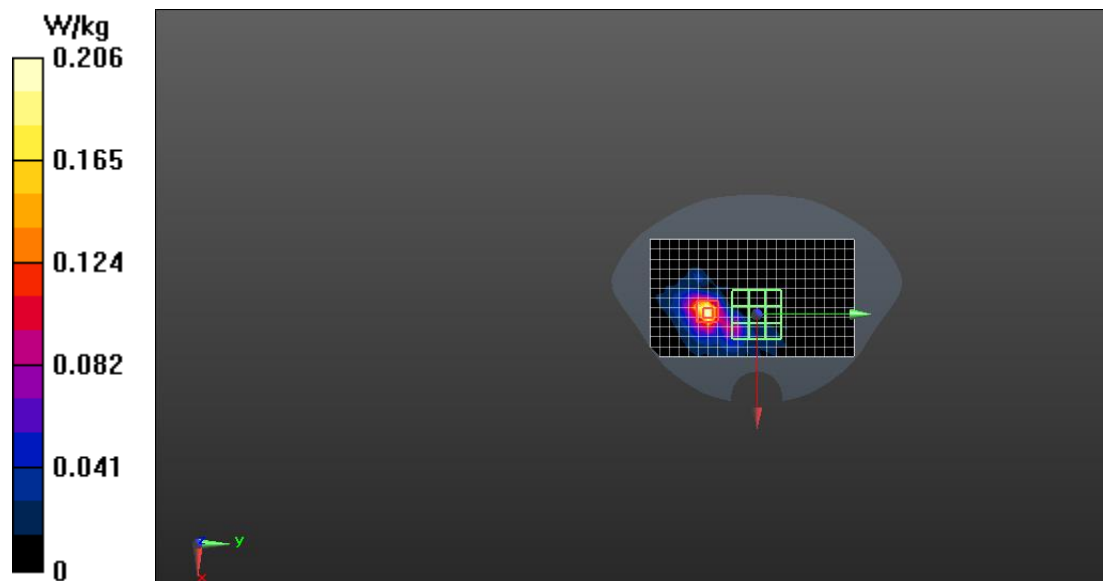

Date: 2024/8/28

U-NII-2A Limb


Communication System: UID 0, 5GHz Wi-Fi (0); Communication System Band: 5G Band(5030.0 - 5825.0 MHz); Frequency: 5320 MHz;
Medium parameters used: $f = 5320$ MHz; $\sigma = 4.627$ S/m; $\epsilon_r = 34.554$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN7733; ConvF(5.64, 5.64, 5.64); Calibrated: 2024/2/21;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = -9.0, 29.0$
- Electronics: DAE4 Sn1739; Calibrated: 2024/1/23
- Phantom: SAM; Type: QD000P40CD; Serial: 1805
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (7x13x1): Measurement grid: $dx=10$ mm, $dy=10$ mm
Maximum value of SAR (measured) = 4.73 W/kg

Configuration/Body/Zoom Scan (8x8x6)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm
Reference Value = 5.304 V/m; Power Drift = -0.01 dB
Peak SAR (extrapolated) = 28.9 W/kg
SAR(1 g) = 4.56 W/kg; SAR(10 g) = 0.926 W/kg
Maximum value of SAR (measured) = 12.2 W/kg

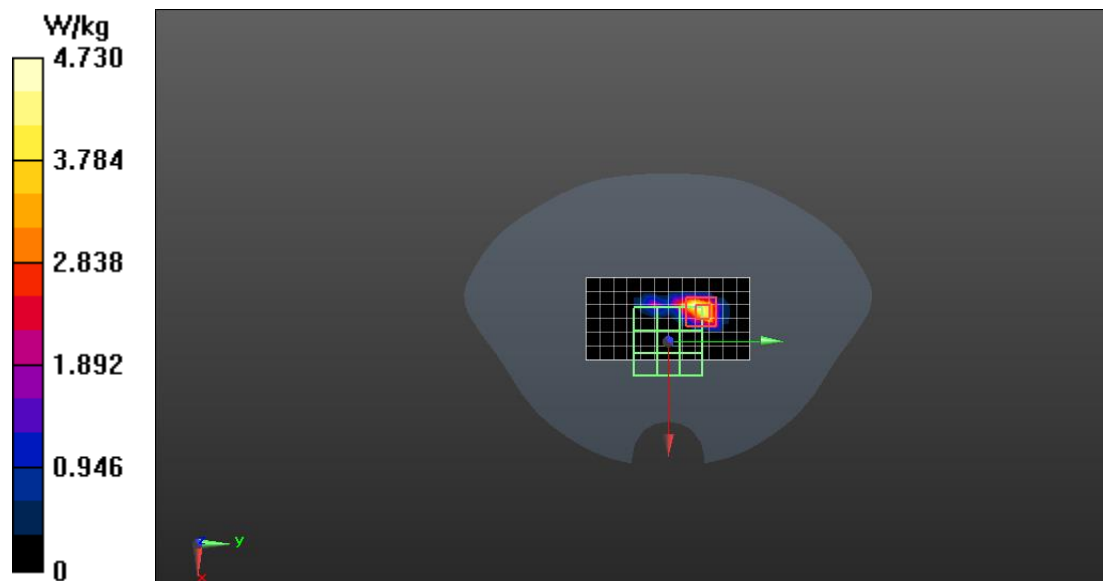

U-NII-2C Head

Communication System: UID 0, 5GHz Wi-Fi (0); Communication System Band: 5G Band(5030.0 - 5825.0 MHz); Frequency: 5700 MHz;
Medium parameters used: $f = 5700$ MHz; $\sigma = 4.985$ S/m; $\epsilon_r = 35.291$; $\rho = 1000$ kg/m³
Phantom section: Left Section

DASY Configuration:

- Probe: EX3DV4 - SN7733; ConvF(5.01, 5.01, 5.01); Calibrated: 2024/2/21;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = -9.0, 29.0$
- Electronics: DAE4 Sn1739; Calibrated: 2024/1/23
- Phantom: SAM; Type: QD000P40CD; Serial: 1805
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Left Tilt/Head/Area Scan (13x22x1): Measurement grid: $dx=10$ mm, $dy=10$ mm

Maximum value of SAR (measured) = 0.605 W/kg


Left Tilt/Head/Zoom Scan (8x8x6)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm

Reference Value = 6.380 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 1.40 W/kg

SAR(1 g) = 0.265 W/kg; SAR(10 g) = 0.059 W/kg

Maximum value of SAR (measured) = 0.822 W/kg

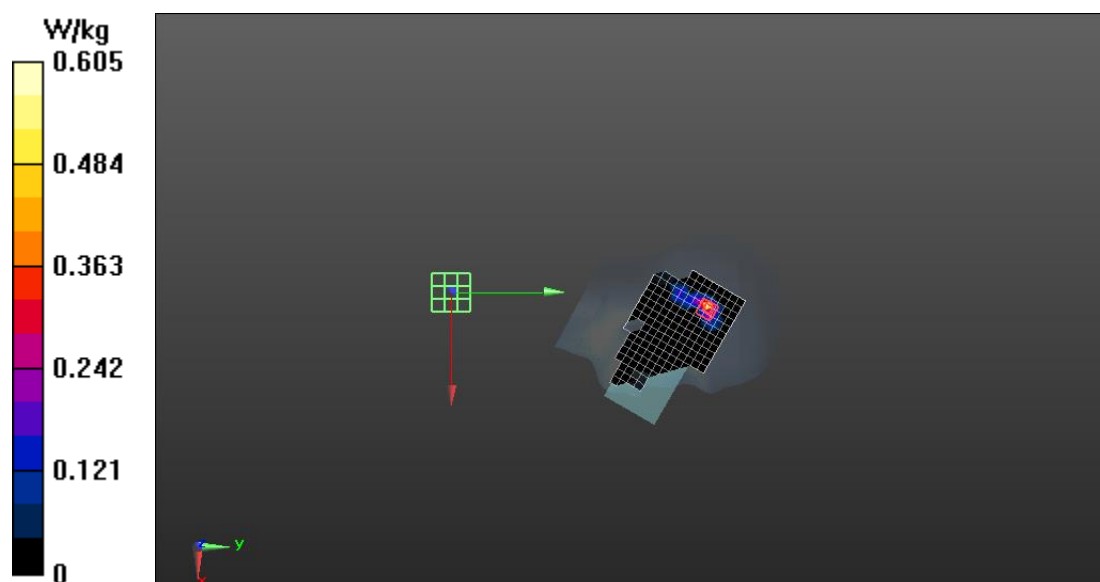

Date: 2024/8/29

U-NII-2C Body


Communication System: UID 0, 5GHz Wi-Fi (0); Communication System Band: 5G Band(5030.0 - 5825.0 MHz); Frequency: 5700 MHz;
Medium parameters used: $f = 5700$ MHz; $\sigma = 4.985$ S/m; $\epsilon_r = 35.291$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN7733; ConvF(5.01, 5.01, 5.01); Calibrated: 2024/2/21;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = -9.0, 29.0$
- Electronics: DAE4 Sn1739; Calibrated: 2024/1/23
- Phantom: SAM; Type: QD000P40CD; Serial: 1805
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (13x22x1): Measurement grid: $dx=10$ mm, $dy=10$ mm
Maximum value of SAR (measured) = 0.0624 W/kg

Configuration/Body/Zoom Scan (8x8x6)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm
Reference Value = 0 V/m; Power Drift = 0.00 dB
Peak SAR (extrapolated) = 0.308 W/kg
SAR(1 g) = 0.026 W/kg; SAR(10 g) = 0.00723 W/kg
Maximum value of SAR (measured) = 0.0837 W/kg

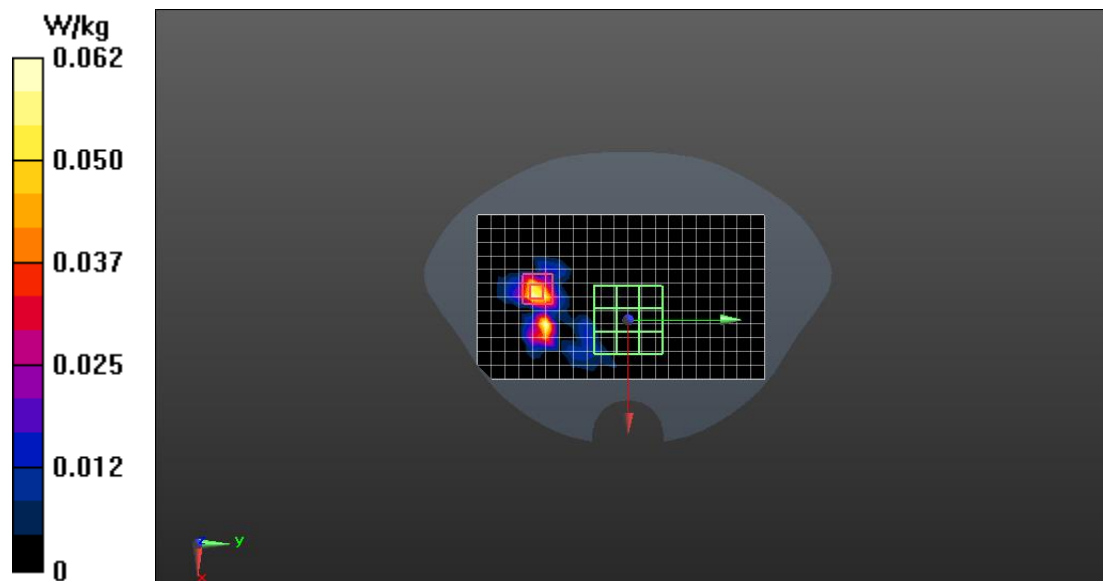

Date: 2024/8/29

U-NII-2C Limb


Communication System: UID 0, 5GHz Wi-Fi (0); Communication System Band: 5G Band(5030.0 - 5825.0 MHz); Frequency: 5700 MHz;
Medium parameters used: $f = 5700$ MHz; $\sigma = 4.985$ S/m; $\epsilon_r = 35.291$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN7733; ConvF(5.01, 5.01, 5.01); Calibrated: 2024/2/21;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = -9.0, 29.0$
- Electronics: DAE4 Sn1739; Calibrated: 2024/1/23
- Phantom: SAM; Type: QD000P40CD; Serial: 1805
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (7x13x1): Measurement grid: $dx=10$ mm, $dy=10$ mm
Maximum value of SAR (measured) = 2.07 W/kg

Configuration/Body/Zoom Scan (8x8x6)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm
Reference Value = 2.912 V/m; Power Drift = -0.08 dB
Peak SAR (extrapolated) = 11.4 W/kg
SAR(1 g) = 1.7 W/kg; SAR(10 g) = 0.323 W/kg
Maximum value of SAR (measured) = 5.45 W/kg

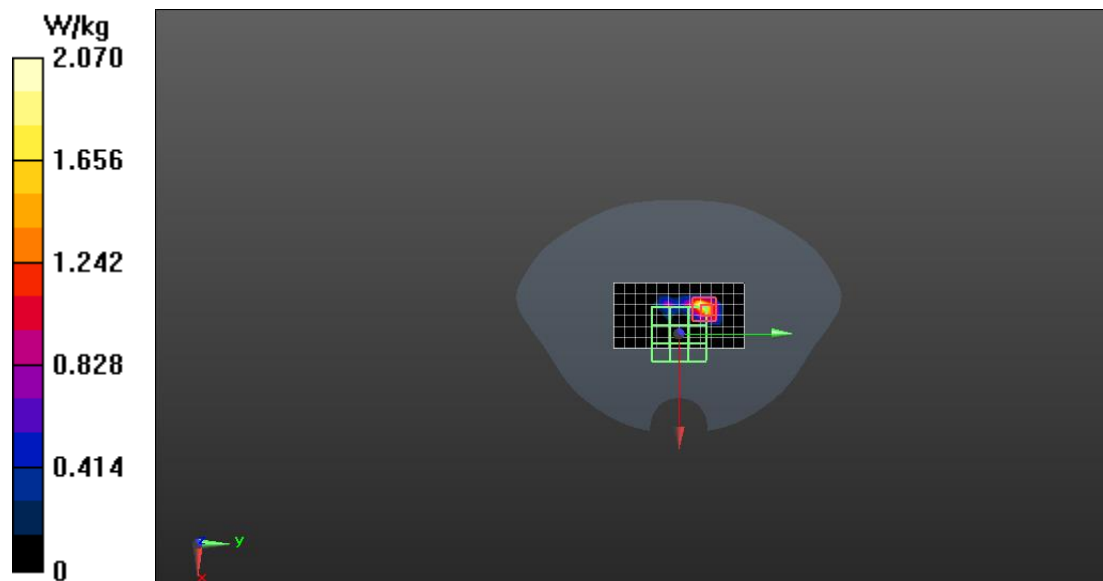

U-NII-3 Head

Communication System: UID 0, 5GHz Wi-Fi (0); Communication System Band: 5G Band(5030.0 - 5825.0 MHz); Frequency: 5795 MHz;
Medium parameters used: $f = 5795$ MHz; $\sigma = 5.353$ S/m; $\epsilon_r = 33.956$; $\rho = 1000$ kg/m³
Phantom section: Left Section

DASY Configuration:

- Probe: EX3DV4 - SN7733; ConvF(5.05, 5.05, 5.05); Calibrated: 2024/2/21;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = -9.0, 29.0$
- Electronics: DAE4 Sn1739; Calibrated: 2024/1/23
- Phantom: SAM; Type: QD000P40CD; Serial: 1805
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Left Tilt/Head/Area Scan (13x22x1): Measurement grid: $dx=10$ mm, $dy=10$ mm

Maximum value of SAR (measured) = 0.838 W/kg


Left Tilt/Head/Zoom Scan (8x8x6)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm

Reference Value = 5.980 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 4.05 W/kg

SAR(1 g) = 0.385 W/kg; SAR(10 g) = 0.089 W/kg

Maximum value of SAR (measured) = 1.13 W/kg

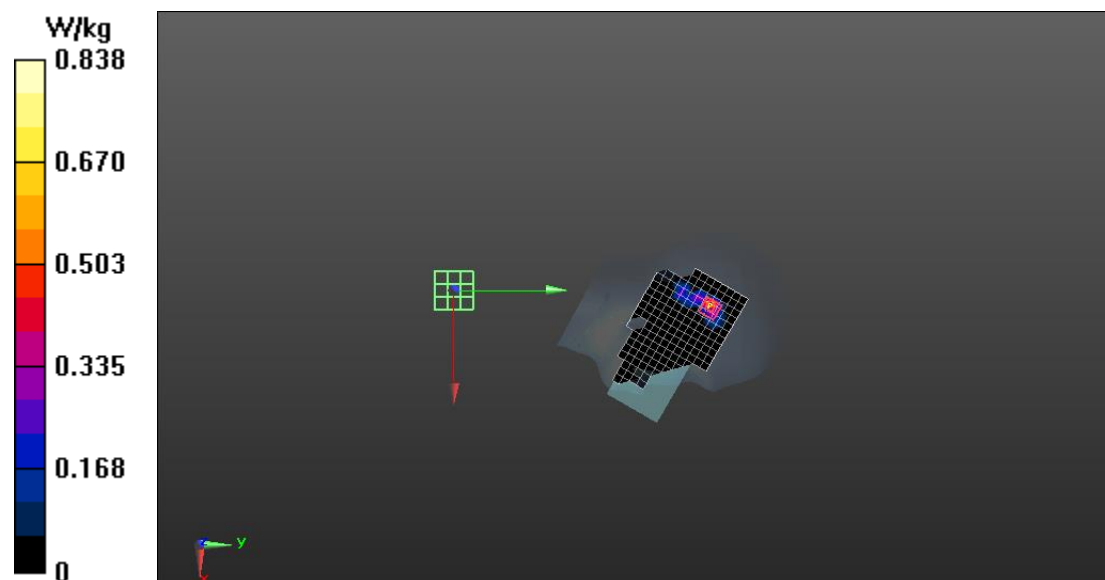

Date: 2024/8/29

U-NII-3 Body


Communication System: UID 0, 5GHz Wi-Fi (0); Communication System Band: 5G Band(5030.0 - 5825.0 MHz); Frequency: 5795 MHz;
Medium parameters used: $f = 5795$ MHz; $\sigma = 5.353$ S/m; $\epsilon_r = 33.956$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN7733; ConvF(5.05, 5.05, 5.05); Calibrated: 2024/2/21;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = -9.0, 29.0$
- Electronics: DAE4 Sn1739; Calibrated: 2024/1/23
- Phantom: SAM; Type: QD000P40CD; Serial: 1805
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (13x22x1): Measurement grid: $dx=10$ mm, $dy=10$ mm
Maximum value of SAR (measured) = 0.177 W/kg

Configuration/Body/Zoom Scan (9x9x6)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm
Reference Value = 0 V/m; Power Drift = 0.00 dB
Peak SAR (extrapolated) = 0.346 W/kg
SAR(1 g) = 0.075 W/kg; SAR(10 g) = 0.023 W/kg
Maximum value of SAR (measured) = 0.224 W/kg

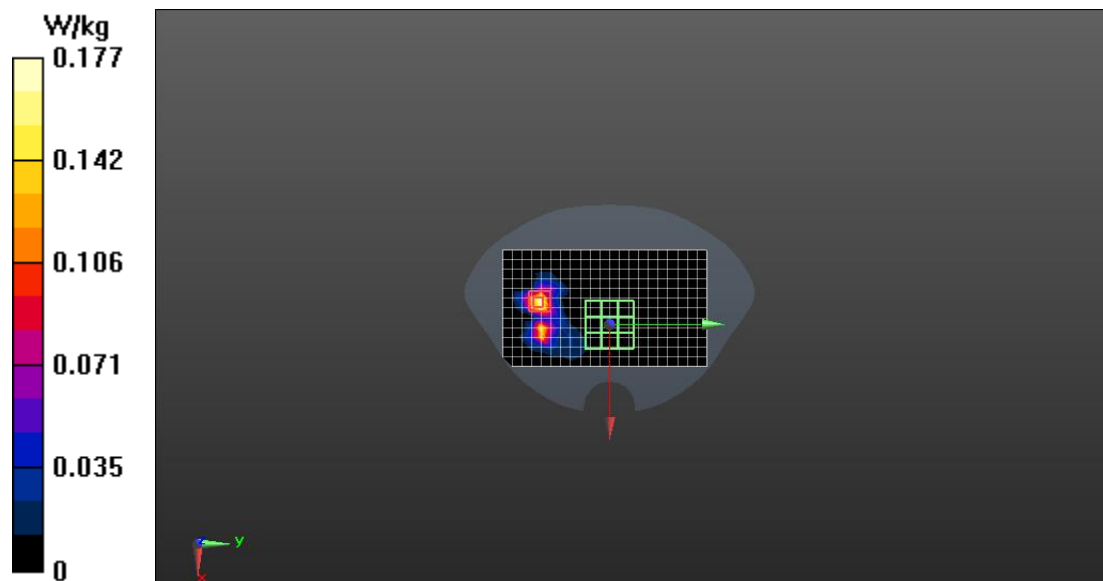

BT Head

Communication System: UID 0, BT(0) (0); Communication System Band: BT; Frequency: 2402 MHz;

Medium parameters used (interpolated): $f = 2402$ MHz; $\sigma = 1.71$ S/m; $\epsilon_r = 38.276$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY Configuration:

- Probe: EX3DV4 - SN7733; ConvF(7.98, 7.98, 7.98); Calibrated: 2024/2/21;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1739; Calibrated: 2024/1/23
- Phantom: SAM; Type: QD000P40CD; Serial: 1805
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (11x18x1): Measurement grid: $dx=12$ mm, $dy=12$ mm

Maximum value of SAR (measured) = 0.173 W/kg


Configuration/Head/Zoom Scan (7x7x4)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 4.005 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.260 W/kg

SAR(1 g) = 0.093 W/kg; SAR(10 g) = 0.033 W/kg

Maximum value of SAR (measured) = 0.164 W/kg

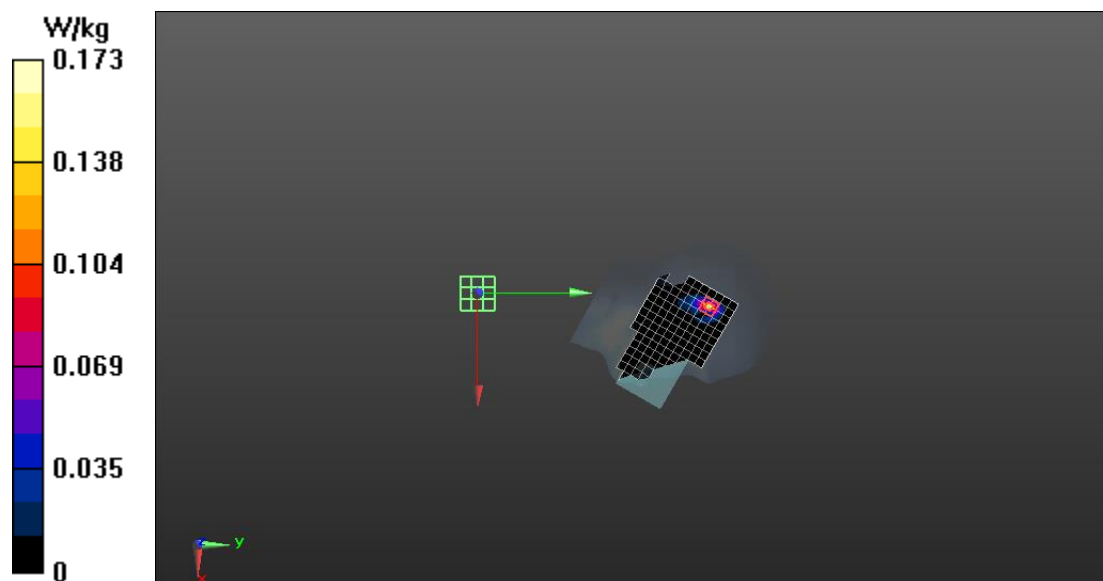

Date: 2024/8/29

BT Body

Communication System: UID 0, BT(0) (0); Communication System Band: BT; Frequency: 2402 MHz;

Medium parameters used (interpolated): $f = 2402$ MHz; $\sigma = 1.71$ S/m; $\epsilon_r = 38.276$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN7733; ConvF(7.98, 7.98, 7.98); Calibrated: 2024/2/21;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = -9.0, 31.0$
- Electronics: DAE4 Sn1739; Calibrated: 2024/1/23
- Phantom: SAM; Type: QD000P40CD; Serial: 1805
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (11x18x1): Measurement grid: $dx=12$ mm, $dy=12$ mm

Maximum value of SAR (measured) = 0.0190 W/kg

Configuration/Body/Zoom Scan (8x8x4)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 0.6710 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.0450 W/kg

SAR(1 g) = 0.014 W/kg; SAR(10 g) = 0.00621 W/kg

Maximum value of SAR (measured) = 0.0220 W/kg

