



Partial FCC RF Test Report

APPLICANT : Motorola Mobility LLC
EQUIPMENT : Mobile Cellular Phone
BRAND NAME : Motorola
MODEL NAME : XT2363-2, XT2363-1
FCC ID : IHDT56AQ1
STANDARD : 47 CFR Part 2, 22(H), 24(E), 27(L), 27(M), 27(Q), 90(S)
CLASSIFICATION : PCS Licensed Transmitter Held to Ear (PCE)
TEST DATE(S) : Oct. 07, 2023

We, Sporton International Inc. (KunShan), would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI C63.26-2015 and shown compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. (KunShan), the test report shall not be reproduced except in full.

Jason Jia

Approved by: Jason Jia



Sporton International Inc. (Kunshan)

**No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300
People's Republic of China**



TABLE OF CONTENTS

REVISION HISTORY	3
SUMMARY OF TEST RESULT	4
1 GENERAL DESCRIPTION	5
1.1 Applicant	5
1.2 Manufacturer	5
1.3 Product Feature of Equipment Under Test	5
1.4 Product Specification of Equipment Under Test	5
1.5 Modification of EUT	6
1.6 Testing Location	7
1.7 Test Software	7
1.8 Applicable Standards	7
1.9 Specification of Accessory	8
2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST	9
2.1 Test Mode	9
2.2 Connection Diagram of Test System	10
2.3 Support Unit used in test configuration and system	10
2.4 Frequency List of Low/Middle/High Channels	11
3 RADIATED TEST ITEMS	16
3.1 Measuring Instruments	16
3.2 Test Setup	16
3.3 Test Result of Radiated Test	17
3.4 Radiated Spurious Emission	18
4 LIST OF MEASURING EQUIPMENT	19
5 MEASUREMENT UNCERTAINTY	20
APPENDIX A. TEST RESULTS OF RADIATED TEST	
APPENDIX B. TEST SETUP PHOTOGRAPHS	



REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FG392114G	Rev. 01	Initial issue of report	Oct. 31, 2023



SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.4	§2.1053 §22.917(a) §24.238(a) §27.53(h)	Radiated Spurious Emission (5G NR n5, n26) (5G NR n2) (5G NR n66)	$< 43+10\log_{10}(P[\text{Watts}])$	PASS	Under limit 25.23 dB at 2480.00 MHz
	§2.1053 §27.53(m)(4)	Radiated Spurious Emission (5G NR n7, n41, n38)	$< 55+10\log_{10}(P[\text{Watts}])$		
	§2.1053 §27.53 (n)(2)	Radiated Spurious Emission (5G NR n78)	-13dBm/MHz		
	§2.1053 §90.691	Field Strength of Spurious Radiation (5G NR n26)	$< 43+10\log_{10}(P[\text{Watts}])$		

Note: This is a partial report which only assess Radiated Spurious Emission, the other test results will be included in a separate report provided by manufacturer.

Conformity Assessment Condition:

1. The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacturer who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
2. The measurement uncertainty please refer to each test result in the section "Measurement Uncertainty"

Disclaimer:

The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.



1 General Description

1.1 Applicant

Motorola Mobility LLC
222 W,Merchandise Mart Plaza, Chicago IL 60654 USA

1.2 Manufacturer

Motorola Mobility LLC
222 W,Merchandise Mart Plaza, Chicago IL 60654 USA

1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	Mobile Cellular Phone
Brand Name	Motorola
Model Name	XT2363-2, XT2363-1
FCC ID	IHDT56AQ1
IMEI Code	Radiation: 350735340018255/350735340018263
HW Version	DVT2
SW Version	UUG34.30
EUT Stage	Identical Prototype

Remark:

1. The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.
2. The two model name is only for different market segment purpose.

1.4 Product Specification of Equipment Under Test

Standards-related Product Specification	
Tx Frequency	5G NR n2 : 1850 MHz ~ 1910 MHz 5G NR n5 : 824 MHz ~ 849 MHz 5G NR n7 : 2500 MHz ~ 2570 MHz 5G NR n26 : 814 MHz ~ 824 MHz (Part 90S) 5G NR n26 : 824 MHz ~ 849 MHz (Part 22H) 5G NR n38 : 2570 MHz ~ 2620 MHz 5G NR n41 : 2496 MHz ~ 2690 MHz 5G NR n66 : 1710 MHz ~ 1780 MHz 5G NR n78: 3450 MHz ~ 3550 MHz (Part 27Q)
Rx Frequency	5G NR n2 : 1930 MHz ~ 1990 MHz 5G NR n5 : 869 MHz ~ 894 MHz 5G NR n7 : 2620 MHz ~ 2690 MHz 5G NR n26 : 859 MHz ~ 869 MHz (Part 90S) 5G NR n26 : 869 MHz ~ 894 MHz (Part 22H) 5G NR n38: 2570 MHz ~ 2620 MHz 5G NR n41 : 2496 MHz ~ 2690 MHz

	5G NR n66 : 2110 MHz~ 2200 MHz 5G NR n78: 3450 MHz ~ 3550 MHz (Part 27Q)
Bandwidth	n2, n5, n26: 5MHz / 10MHz / 15MHz / 20MHz n7: 5MHz / 10MHz / 15MHz / 20MHz / 25MHz / 30MHz / 40MHz n38: 20MHz / 30MHz / 40MHz n66: 5MHz / 10MHz / 15MHz / 20MHz / 30MHz / 40MHz n41, n78: 20MHz / 30MHz / 40MHz / 50MHz / 60MHz / 70MHz / 80MHz / 90MHz / 100MHz
SCS	n2, n5, n7, n26, n66: 15kHz n38, n41, n78: 30kHz
Antenna Gain	<Ant. 0>: n2: -0.7 dBi n5: -4.1 dBi n26: -4.11 dBi n66: -0.9 dBi <Ant. 1>: n7: -0.5 dBi <Ant. 4>: n2: -1.9 dBi n5: -6.6 dBi n26: -6.9 dBi n38: -0.3 dBi n41: -0.3 dBi n66: -4.7 dBi <Ant. 5>: n78: -1.3 dBi
Type of Modulation	CP-OFDM: QPSK / 16QAM / 64QAM / 256QAM DFT-s-OFDM: PI/2 BPSK / QPSK / 16QAM / 64QAM / 256QAM

Remark:

1. 5G NR n2/n5/n7/n38/n41/n66/n78 support SA mode and NSA mode, n26 supports SA mode only.
2. The device supports two PAs for 5G NR n2 (main PA for SA mode and ENDC_4/5/7A_n2A, other PA for ENDC_66A_n2A).
3. The device supports two PAs for 5G NR n66 (main PA for SA mode and ENDC_2/5A_n66A, other PA for ENDC_7A_n66A).
4. The EN-DC mode combination could be referred to the product spec.
5. 5G NR n41 cover n38.
6. For RSE testing of 5G NR n78, all the supported ENDC combinations are verified conducted power, only the ENDC combinations with higher power are shown in the report.

1.5 Modification of EUT

No modifications are made to the EUT during all test items.



1.6 Testing Location

Sporton International Inc. (Kunshan) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.02.

Test Firm	Sporton International Inc. (Kunshan)		
Test Site Location	No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300 People's Republic of China TEL : +86-512-57900158		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	03CH04-KS	CN1257	314309

1.7 Test Software

Item	Site	Manufacture	Name	Version
1.	03CH04-KS	AUDIX	E3	210616

1.8 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- 47 CFR Part 2, 22(H), 24(E), 27(L), 27(M), 27(Q), 90(S)
- ANSI C63.26-2015
- FCC KDB 971168 D01 Power Meas License Digital Systems v03r01
- FCC KDB 412172 D01 Determining ERP and EIRP v01r01

Remark:

All test items were verified and recorded according to the standards and without any deviation during the test.

1.9 Specification of Accessory

Specification of Accessory				
AC Adapter 1(US)	Brand Name	Motorola (Aohai)	Model Name	MC-201L
AC Adapter 1(EU)	Brand Name	Motorola (Aohai)	Model Name	MC-202L
AC Adapter 1(UK)	Brand Name	Motorola (Aohai)	Model Name	MC-203L
AC Adapter 1(AU)	Brand Name	Motorola (Aohai)	Model Name	MC-205L
AC Adapter 1(AR)	Brand Name	Motorola (Aohai)	Model Name	MC-206L
AC Adapter 1(IN)	Brand Name	Motorola (Aohai)	Model Name	MC-204
AC Adapter 2(US)	Brand Name	Motorola (Salcomp)	Model Name	MC-201L
AC Adapter 2(EU)	Brand Name	Motorola (Salcomp)	Model Name	MC-202L
AC Adapter 2(UK)	Brand Name	Motorola (Salcomp)	Model Name	MC-203L
AC Adapter 2(AU)	Brand Name	Motorola (Salcomp)	Model Name	MC-205L
AC Adapter 2(AR)	Brand Name	Motorola (Salcomp)	Model Name	MC-206L
AC Adapter 2(BR)	Brand Name	Motorola (Salcomp)	Model Name	MC-207L
AC Adapter 2(Chile)	Brand Name	Motorola (Salcomp)	Model Name	MC-209L
AC Adapter 3(BR)	Brand Name	Motorola (Chenyang)	Model Name	MC-207L
AC Adapter 4(BR local)	Brand Name	Motorola (Cliptech)	Model Name	MC-207L
AC Adapter 5(IN local)	Brand Name	Motorola (XIH)	Model Name	MC-204
Battery 1	Brand Name	Motorola (ATL)	Model Name	QF50
Battery 2	Brand Name	Motorola (SCUD)	Model Name	QF50
Battery 3	Brand Name	Motorola (Sunwoda)	Model Name	QF50
USB Cable 1	Brand Name	Motorola (Saibao)	Model Name	SZN-A026A
USB Cable 2	Brand Name	Motorola (Ju wei)	Model Name	JWUB1606-ZN01H
USB Cable 3	Brand Name	Motorola (Washin)	Model Name	HX-ZN-19

2 Test Configuration of Equipment Under Test

2.1 Test Mode

Antenna port conducted and radiated test items are performed according to KDB 971168 D01 Power Meas License Digital Systems v03r01 with maximum output power.


For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (Y plane) were recorded in this report.

The device is investigated from 30MHz to 10 times of fundamental signal for radiated spurious emission test under different RB size/offset and modulations in exploratory test. Subsequently, only the worst case emissions are reported.

Orthogonal Planes of EUT	X Plane	Y Plane	Z Plane
			

Test Items	5G NR	Bandwidth (MHz)													Modulation					RB #		Test Channel		
		5	10	15	20	25	30	40	50	60	70	80	90	100	PI/2 BPSK	QPSK	16 QAM	64 QAM	256 QAM	1	Full	L	M	H
Radiated Spurious Emission	n2	Worst Case																				v		
	n5	Worst Case																				v		
	n7	Worst Case																				v		
	n26	Worst Case																				v		
	n41	Worst Case																				v		
	n66	Worst Case																				v		
	n78	Worst Case																				v		
Note	1. The mark “v “ means that this configuration is chosen for testing 2. The mark “-“ means that this bandwidth is not supported. 3. The device is investigated from 30MHz to 10 times of fundamental signal for radiated spurious emission test under different RB size/offset and modulations in exploratory test. Subsequently, only the worst case emissions are reported. 4. 5G NR n38 covered by n41.																							

2.2 Connection Diagram of Test System

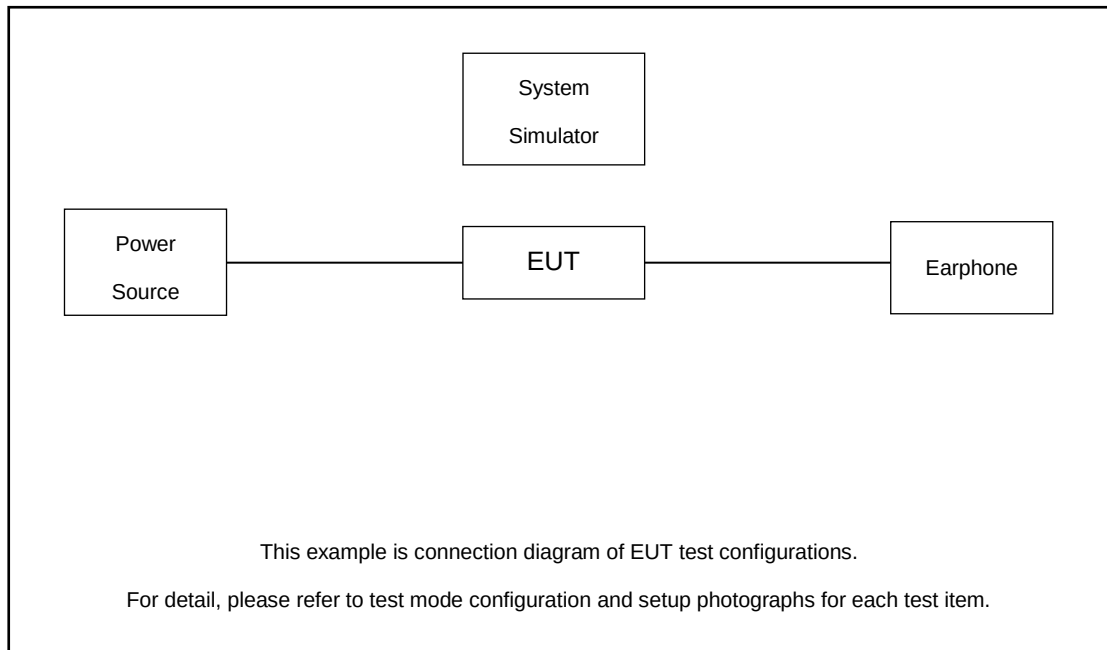

The EUT has been configuration operated in a manner tended to maximize its emission characteristics in a typical application.

2.3 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model No.	FCC ID	Data Cable	Power Cord
1.	DC Power Supply	GW	GPS-3030D	N/A	N/A	Unshielded, 1.8 m
2.	LTE Base Station	Anritsu	MT8821C	N/A	N/A	Unshielded, 1.8 m
3.	NR Base Station	Anritsu	MT8000A	N/A	N/A	Unshielded, 1.8 m
4.	Earphone	N/A	N/A	N/A	N/A	N/A

2.4 Frequency List of Low/Middle/High Channels

5G NR n2 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
20	Channel	372000	376000	380000
	Frequency	1860	1880	1900
15	Channel	371500	376000	380500
	Frequency	1857.5	1880	1902.5
10	Channel	371000	376000	381000
	Frequency	1855	1880	1905
5	Channel	370500	376000	381500
	Frequency	1852.5	1880	1907.5

5G NR n5 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
20	Channel	166800	167300	167800
	Frequency	834	836.5	839
15	Channel	166300	167300	168300
	Frequency	831.5	836.5	841.5
10	Channel	165800	167300	168800
	Frequency	829	836.5	844
5	Channel	165300	167300	169300
	Frequency	826.5	836.5	846.5



5G NR n7 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
40	Channel	504000	507000	510000
	Frequency	2520	2535	2550
30	Channel	503000	507000	511000
	Frequency	2515	2535	2555
25	Channel	502500	507000	511500
	Frequency	2512.5	2535	2557.5
20	Channel	502000	507000	512000
	Frequency	2510	2535	2560
15	Channel	501500	507000	512500
	Frequency	2507.5	2535	2562.5
10	Channel	501000	507000	513000
	Frequency	2505	2535	2565
5	Channel	500500	507000	513500
	Frequency	2502.5	2535	2567.5

5G NR n26(22H) Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
20	Channel	166800	167300	167800
	Frequency	834	836.5	839
15	Channel	166300	167300	168300
	Frequency	831.5	836.5	841.5
10	Channel	165800	167300	168800
	Frequency	829	836.5	844
5	Channel	165300	167300	169300
	Frequency	826.5	836.5	846.5

5G NR n26(90S) Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
10	Channel	-	163800	-
	Frequency	-	819	-
5	Channel	163300	163800	164300
	Frequency	816.5	819	821.5

5G NR n26(90S) Cross-rule Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	-	Middle	-
20	Channel	-	164800	-
	Frequency	-	824	-
15	Channel	-	164300	-
	Frequency	-	821.5	-

5G NR n38 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
40	Channel	518000	519000	520000
	Frequency	2590	2595	2600
30	Channel	517000	519000	521000
	Frequency	2585	2595	2605
20	Channel	516000	519000	522000
	Frequency	2580	2595	2610



5G NR n41 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
100	Channel	509202	518598	528000
	Frequency	2546.01	2592.99	2640
90	Channel	508200	518598	528996
	Frequency	2541	2592.99	2644.98
80	Channel	507204	518598	529998
	Frequency	2536.02	2592.99	2649.99
70	Channel	506202	518598	531000
	Frequency	2531.01	2592.99	2655
60	Channel	505200	518598	531996
	Frequency	2526	2592.99	2659.98
50	Channel	504204	518598	532998
	Frequency	2521.02	2592.99	2664.99
40	Channel	503202	518598	534000
	Frequency	2516.01	2592.99	2670
30	Channel	502200	518598	534996
	Frequency	2511	2592.99	2674.98
20	Channel	501204	518598	535998
	Frequency	2506.02	2592.99	2679.99

5G NR n66 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
40	Channel	346000	349000	352000
	Frequency	1730	1745	1760
30	Channel	345000	349000	353000
	Frequency	1725	1745	1765
20	Channel	344000	349000	354000
	Frequency	1720	1745	1770
15	Channel	343500	349000	354500
	Frequency	1717.5	1745	1772.5
10	Channel	343000	349000	355000
	Frequency	1715	1745	1775
5	Channel	342500	349000	355500
	Frequency	1712.5	1745	1777.5



5G n78 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
100	Channel	-	633334	-
	Frequency	-	3500.01	-
90	Channel	633000	633334	633666
	Frequency	3495	3500.01	3504.99
80	Channel	632668	633334	634000
	Frequency	3490.02	3500.01	3510
70	Channel	632334	633334	634332
	Frequency	3485.01	3500.01	3514.98
60	Channel	632000	633334	634666
	Frequency	3480	3500.01	3519.99
50	Channel	631668	633334	635000
	Frequency	3475.02	3500.01	3525
40	Channel	631334	633334	635332
	Frequency	3470.01	3500.01	3529.98
30	Channel	631000	633334	635666
	Frequency	3465	3500.01	3534.99
20	Channel	630668	633334	636000
	Frequency	3460.02	3500.01	3540


3 Radiated Test Items

3.1 Measuring Instruments


See list of measuring instruments of this test report.

3.2 Test Setup


3.2.1 For radiated test below 30MHz

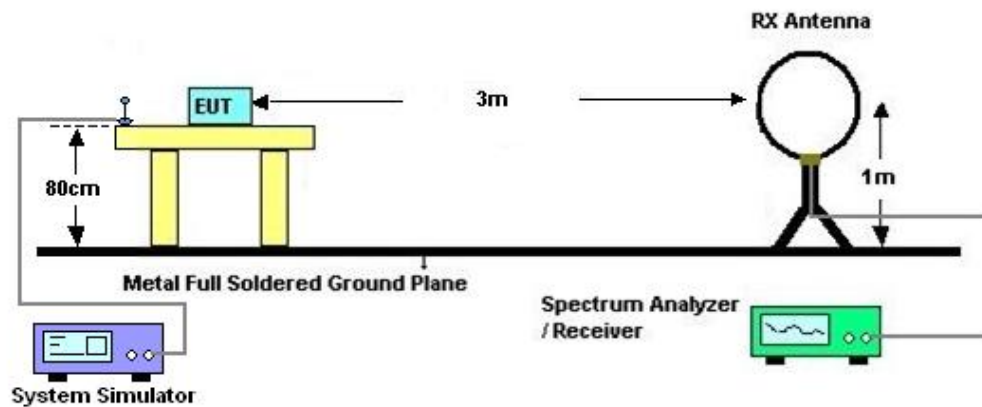

3.2.2 For radiated test from 30MHz to 1GHz

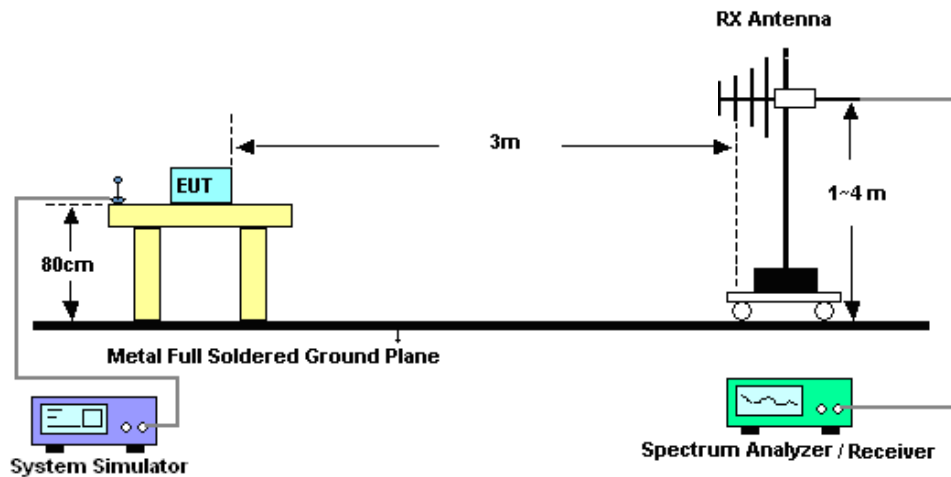

3.2.3 For radiated test above 1GHz

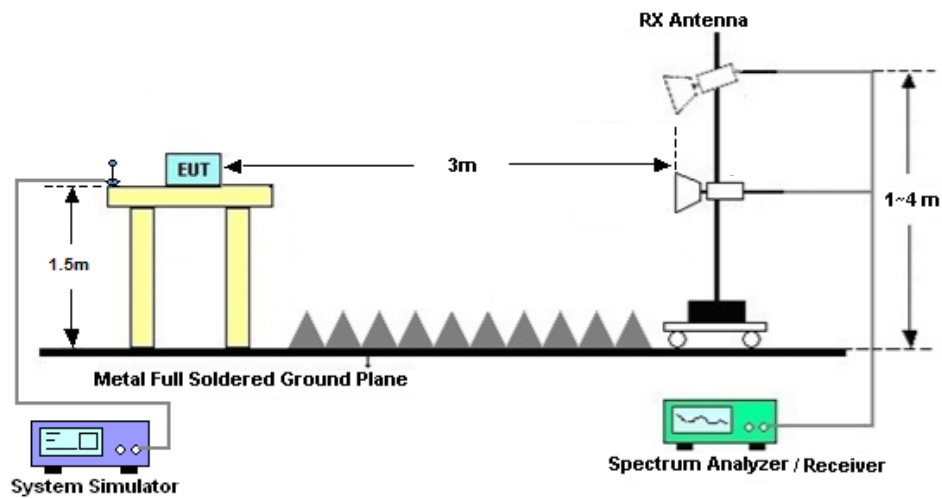

3.3 Test Result of Radiated Test

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

Please refer to Appendix B.

3.4 Radiated Spurious Emission

3.4.1 Description of Radiated Spurious Emission

The radiated spurious emission was measured by substitution method according to ANSI C63.26. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB.

For 5G NR n7/n38/n41:

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least $55 + 10 \log (P)$ dB.

The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic.

3.4.2 Test Procedures

1. The testing follows ANSI C63.26 Section 5.5
2. The EUT was placed on a turntable with 0.8 meter height for frequency below 1GHz and 1.5 meter height for frequency above 1GHz respectively above ground.
3. The EUT was set 3 meters from the receiving antenna mounted on the antenna tower.
4. The table was rotated 360 degrees to determine the position of the highest spurious emission.
5. The height of the receiving antenna is varied between 1m to 4m to search the maximum spurious emission for both horizontal and vertical polarizations.
6. During the measurement, the system simulator parameters were set to force the EUT transmitting at maximum output power.
7. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, taking the record of maximum spurious emission.
8. A horn antenna was substituted in place of the EUT and was driven by a signal generator.
9. Tune the output power of signal generator to the same emission level with EUT maximum spurious emission.
10. $EIRP \text{ (dBm)} = S.G. \text{ Power} - Tx \text{ Cable Loss} + Tx \text{ Antenna Gain}$
11. $ERP \text{ (dBm)} = EIRP - 2.15$
12. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.



4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
EXA Spectrum Analyzer	Keysight	N9010B	MY57471079	10Hz-44G,MAX 30dB	Oct. 12, 2022	Oct. 07, 2023	Oct. 11, 2023	Radiation (03CH04-KS)
Loop Antenna	R&S	HFH2-Z2E	101125	9kHz~30MHz	Sep. 11 2023	Oct. 07, 2023	Sep. 10, 2024	Radiation (03CH04-KS)
Bilog Antenna	TeseQ	CBL6111D	49922	30MHz-1GHz	Apr. 09, 2023	Oct. 07, 2023	Apr. 08, 2024	Radiation (03CH04-KS)
Horn Antenna	Schwarzbeck	BBHA9120D	1284	1GHz~18GHz	Oct. 16, 2022	Oct. 07, 2023	Oct. 15, 2023	Radiation (03CH04-KS)
SHF-EHF Horn	Com-power	AH-840	101070	18GHz~40GHz	Jan. 08, 2023	Oct. 07, 2023	Jan. 07, 2024	Radiation (03CH04-KS)
Amplifier	SONOMA	310N	380827	9KHz-1GHz	Jul. 06, 2023	Oct. 07, 2023	Jul. 05, 2024	Radiation (03CH04-KS)
Amplifier	MITEQ	EM18G40G GA	060728	18~40GHz	Jan. 05, 2023	Oct. 07, 2023	Jan. 04, 2024	Radiation (03CH04-KS)
high gain Amplifier	EM	EM01G18G A	060840	1Ghz-18Ghz	Oct. 12, 2022	Oct. 07, 2023	Oct. 11, 2023	Radiation (03CH04-KS)
Amplifier	Agilent	8449B	3008A02370	1Ghz-18Ghz	Oct. 12, 2022	Oct. 07, 2023	Oct. 11, 2023	Radiation (03CH04-KS)
AC Power Source	Chroma	61601	F104090004	N/A	NCR	Oct. 07, 2023	NCR	Radiation (03CH04-KS)
Turn Table	ChamPro	EM 1000-T	060762-T	0~360 degree	NCR	Oct. 07, 2023	NCR	Radiation (03CH04-KS)
Antenna Mast	ChamPro	EM 1000-A	060762-A	1 m~4 m	NCR	Oct. 07, 2023	NCR	Radiation (03CH04-KS)

NCR: No Calibration Required

5 Measurement Uncertainty

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI 63.26-2015. All the measurement uncertainty value were shown with a coverage $K=2$ to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2U_c(y)$)	3.82dB
--	--------

Uncertainty of Radiated Emission Measurement (1 GHz ~ 18 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2U_c(y)$)	3.56dB
--	--------

Uncertainty of Radiated Emission Measurement (18 GHz ~ 40 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2U_c(y)$)	3.54dB
--	--------

----- THE END -----



Appendix A. Test Results of Radiated Test

Radiated Spurious Emission

Test Engineer :	Chris Chen	Temperature :	23~25°C
		Relative Humidity :	41~42%

Note: Pre-scanned harmonic for the different antenna combinations, we choose the worst antenna mode to perform final test.

n2 SA / NR 20MHz / QPSK(ANT0)								
Channel	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Middle	3735	-57.08	-13	-44.08	-69.34	2.64	14.90	H
	5610	-56.06	-13	-43.06	-67.92	2.94	14.80	H
	7485	-52.87	-13	-39.87	-62.64	3.39	13.16	H
	3735	-57.09	-13	-44.09	-69.35	2.64	14.90	V
	5610	-56.54	-13	-43.54	-68.40	2.94	14.80	V
	7485	-53.05	-13	-40.05	-62.82	3.39	13.16	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

EN-DC_4A_n2A / LTE 20MHz + NR 20MHz / QPSK (ANT0+4)								
Channel	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Middle	3735	-57.67	-13	-44.67	-69.93	2.64	14.90	H
	5610	-56.51	-13	-43.51	-68.37	2.94	14.80	H
	7485	-53.00	-13	-40.00	-62.77	3.39	13.16	H
	3735	-57.98	-13	-44.98	-70.24	2.64	14.90	V
	5610	-56.56	-13	-43.56	-68.42	2.94	14.80	V
	7485	-53.05	-13	-40.05	-62.82	3.39	13.16	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

EN-DC_5A_n2A / LTE 10MHz + NR 20MHz / QPSK (ANT4+0)								
Channel	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Middle	3735	-57.48	-13	-44.48	-69.74	2.64	14.90	H
	5610	-55.93	-13	-42.93	-67.79	2.94	14.80	H
	7485	-53.16	-13	-40.16	-62.93	3.39	13.16	H
	3735	-57.41	-13	-44.41	-69.67	2.64	14.90	V
	5610	-56.46	-13	-43.46	-68.32	2.94	14.80	V
	7485	-53.59	-13	-40.59	-63.36	3.39	13.16	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

EN-DC_7A_n2A / LTE 20MHz + NR 20MHz / QPSK (ANT1+4)								
Channel	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Middle	3735	-57.74	-13	-44.74	-70.00	2.64	14.90	H
	5610	-56.30	-13	-43.30	-68.16	2.94	14.80	H
	7485	-53.11	-13	-40.11	-62.88	3.39	13.16	H
	3735	-57.66	-13	-44.66	-69.92	2.64	14.90	V
	5610	-56.71	-13	-43.71	-68.57	2.94	14.80	V
	7485	-53.53	-13	-40.53	-63.30	3.39	13.16	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

EN-DC_66A_n2A / LTE 20MHz + NR 20MHz / QPSK (ANT0+4) – other PA								
Channel	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Middle	3735	-57.59	-13	-44.59	-69.85	2.64	14.90	H
	5610	-56.36	-13	-43.36	-68.22	2.94	14.80	H
	7485	-53.40	-13	-40.40	-63.17	3.39	13.16	H
	3735	-57.29	-13	-44.29	-69.55	2.64	14.90	V
	5610	-56.56	-13	-43.56	-68.42	2.94	14.80	V
	7485	-53.33	-13	-40.33	-63.10	3.39	13.16	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

n5 SA / NR 20MHz / QPSK(ANT0)								
Channel	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Middle	1656	-63.94	-13	-50.94	-70.91	1.58	10.70	H
	2480	-52.61	-13	-39.61	-60.86	2.102	12.50	H
	3312	-59.66	-13	-46.66	-68.55	2.856	13.90	H
	1656	-62.96	-13	-49.96	-69.93	1.58	10.70	V
	2480	-44.20	-13	-31.20	-52.45	2.10	12.50	V
	3312	-59.93	-13	-46.93	-68.82	2.86	13.90	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

EN-DC_2A_n5A / LTE 20MHz + NR 20MHz / QPSK (ANT0+4)								
Channel	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Middle	1656	-44.49	-13	-31.49	-51.46	1.58	10.70	H
	2480	-40.41	-13	-27.41	-48.66	2.102	12.50	H
	3312	-39.52	-13	-26.52	-48.41	2.856	13.90	H
	1656	-43.14	-13	-30.14	-50.11	1.58	10.70	V
	2480	-38.23	-13	-25.23	-46.48	2.10	12.50	V
	3312	-39.59	-13	-26.59	-48.48	2.86	13.90	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

n7 SA / NR 40MHz / QPSK(ANT1)								
Channel	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Middle	5036	-62.26	-25	-37.26	-72.47	3.03	13.24	H
	7556	-63.28	-25	-38.28	-72.73	3.56	13.01	H
	10062	-61.63	-25	-36.63	-71.15	3.92	13.44	H
	5036	-63.09	-25	-38.09	-73.30	3.03	13.24	V
	7556	-63.10	-25	-38.10	-72.55	3.56	13.01	V
	10062	-62.16	-25	-37.16	-71.68	3.92	13.44	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

EN-DC_2A_n7A / LTE 20MHz + NR 40MHz / QPSK (ANT0+4)								
Channel	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Middle	5036	-62.72	-25	-37.72	-72.93	3.03	13.24	H
	7556	-63.85	-25	-38.85	-73.30	3.56	13.01	H
	10062	-62.21	-25	-37.21	-71.73	3.92	13.44	H
	5036	-62.95	-25	-37.95	-73.16	3.03	13.24	V
	7556	-63.36	-25	-38.36	-72.81	3.56	13.01	V
	10062	-62.38	-25	-37.38	-71.90	3.92	13.44	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

EN-DC_4A_n7A / LTE 20MHz + NR 40MHz / QPSK (ANT0+4)								
Channel	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Middle	5036	-63.12	-25	-38.12	-73.33	3.03	13.24	H
	7556	-63.26	-25	-38.26	-72.71	3.56	13.01	H
	10062	-62.13	-25	-37.13	-71.65	3.92	13.44	H
	5036	-63.34	-25	-38.34	-73.55	3.03	13.24	V
	7556	-63.35	-25	-38.35	-72.80	3.56	13.01	V
	10062	-61.69	-25	-36.69	-71.21	3.92	13.44	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

EN-DC_5A_n7A / LTE 10MHz + NR 40MHz / QPSK (ANT0+4)								
Channel	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Middle	5036	-62.69	-25	-37.69	-72.90	3.03	13.24	H
	7556	-63.38	-25	-38.38	-72.83	3.56	13.01	H
	10062	-61.49	-25	-36.49	-71.01	3.92	13.44	H
	5036	-62.98	-25	-37.98	-73.19	3.03	13.24	V
	7556	-63.08	-25	-38.08	-72.53	3.56	13.01	V
	10062	-62.07	-25	-37.07	-71.59	3.92	13.44	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

EN-DC_66A n7A / LTE 20MHz + NR 40MHz / QPSK (ANT0+4)								
Channel	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Middle	5036	-62.69	-25	-37.69	-72.90	3.03	13.24	H
	7556	-63.21	-25	-38.21	-72.66	3.56	13.01	H
	10062	-61.19	-25	-36.19	-70.71	3.92	13.44	H
	5036	-62.93	-25	-37.93	-73.14	3.03	13.24	V
	7556	-62.80	-25	-37.80	-72.25	3.56	13.01	V
	10062	-62.11	-25	-37.11	-71.63	3.92	13.44	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

n26(Part 22H) SA / NR 20MHz / QPSK(ANT0)								
Channel	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Middle	1656	-63.93	-13	-50.93	-70.90	1.58	10.70	H
	2480	-49.01	-13	-36.01	-57.26	2.102	12.50	H
	3312	-59.86	-13	-46.86	-68.75	2.856	13.90	H
	1656	-63.09	-13	-50.09	-70.06	1.58	10.70	V
	2480	-49.38	-13	-36.38	-57.63	2.10	12.50	V
	3312	-59.86	-13	-46.86	-68.75	2.86	13.90	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

n26(Part 90S) SA / NR 15MHz / QPSK(ANT0)								
Channel	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Middle	1632	-64.96	-13	-51.96	-71.93	1.58	10.70	H
	2440	-59.46	-13	-46.46	-67.71	2.102	12.50	H
	3256	-59.39	-13	-46.39	-68.28	2.856	13.90	H
	1632	-63.92	-13	-50.92	-70.89	1.58	10.70	V
	2440	-58.25	-13	-45.25	-66.50	2.10	12.50	V
	3256	-59.41	-13	-46.41	-68.30	2.86	13.90	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

n41 SA / NR 100MHz / QPSK(ANT4)								
Channel	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Middle	5092	-63.23	-25	-38.23	-73.44	3.03	13.24	H
	7640	-62.41	-25	-37.41	-71.86	3.56	13.01	H
	10188	-60.97	-25	-35.97	-70.49	3.92	13.44	H
	5092	-63.34	-25	-38.34	-73.55	3.03	13.24	V
	7640	-62.46	-25	-37.46	-71.91	3.56	13.01	V
	10188	-61.92	-25	-36.92	-71.44	3.92	13.44	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

EN-DC_2A_n41A / LTE 20MHz + NR 100MHz / QPSK (ANT0+4)								
Channel	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Middle	5092	-62.92	-25	-37.92	-73.13	3.03	13.24	H
	7640	-62.15	-25	-37.15	-71.60	3.56	13.01	H
	10188	-60.73	-25	-35.73	-70.25	3.92	13.44	H
	5092	-62.73	-25	-37.73	-72.94	3.03	13.24	V
	7640	-62.23	-25	-37.23	-71.68	3.56	13.01	V
	10188	-60.87	-25	-35.87	-70.39	3.92	13.44	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

EN-DC_4A_n41A / LTE 20MHz + NR 100MHz / QPSK (ANT0+4)								
Channel	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Middle	5092	-62.88	-25	-37.88	-73.09	3.03	13.24	H
	7640	-62.49	-25	-37.49	-71.94	3.56	13.01	H
	10188	-61.01	-25	-36.01	-70.53	3.92	13.44	H
	5092	-63.06	-25	-38.06	-73.27	3.03	13.24	V
	7640	-62.64	-25	-37.64	-72.09	3.56	13.01	V
	10188	-61.25	-25	-36.25	-70.77	3.92	13.44	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

EN-DC_26A_41A / LTE 15MHz + NR 100MHz / QPSK (ANT0+4)								
Channel	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Middle	5092	-62.85	-25	-37.85	-73.06	3.03	13.24	H
	7640	-62.70	-25	-37.70	-72.15	3.56	13.01	H
	10202	-61.24	-25	-36.24	-70.76	3.92	13.44	H
	5092	-62.58	-25	-37.58	-72.79	3.03	13.24	V
	7640	-62.79	-25	-37.79	-72.24	3.56	13.01	V
	10202	-61.29	-25	-36.29	-70.81	3.92	13.44	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

EN-DC_66A_n41A / LTE 20MHz + NR 100MHz / QPSK (ANT0+4)								
Channel	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Middle	5092	-62.78	-25	-37.78	-72.99	3.03	13.24	H
	7640	-62.73	-25	-37.73	-72.18	3.56	13.01	H
	10188	-60.93	-25	-35.93	-70.45	3.92	13.44	H
	5092	-63.07	-25	-38.07	-73.28	3.03	13.24	V
	7640	-62.32	-25	-37.32	-71.77	3.56	13.01	V
	10188	-61.04	-25	-36.04	-70.56	3.92	13.44	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



n66 SA / NR 40MHz / QPSK(ANT4)								
Channel	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Middle	3450	-58.55	-13	-45.55	-69.29	2.604	13.34	H
	5175	-56.57	-13	-43.57	-67.08	3.011	13.52	H
	6915	-55.91	-13	-42.91	-66.11	3.271	13.47	H
	3450	-58.23	-13	-45.23	-68.97	2.604	13.34	V
	5175	-56.54	-13	-43.54	-67.05	3.011	13.52	V
	6915	-55.56	-13	-42.56	-65.76	3.271	13.47	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

EN-DC_2A_n66A / LTE 20MHz + NR 40MHz / QPSK (ANT0+4)								
Channel	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Middle	3450	-58.24	-13	-45.24	-68.98	2.604	13.34	H
	5175	-56.73	-13	-43.73	-67.24	3.011	13.52	H
	6915	-55.63	-13	-42.63	-65.83	3.271	13.47	H
	3450	-58.80	-13	-45.80	-69.54	2.604	13.34	V
	5175	-56.10	-13	-43.10	-66.61	3.011	13.52	V
	6915	-55.64	-13	-42.64	-65.84	3.271	13.47	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

EN-DC_5A_n66A / LTE 10MHz + NR 40MHz / QPSK (ANT4+0)								
Channel	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Middle	3450	-58.43	-13	-45.43	-69.17	2.604	13.34	H
	5175	-56.23	-13	-43.23	-66.74	3.011	13.52	H
	6915	-55.64	-13	-42.64	-65.84	3.271	13.47	H
	3450	-58.70	-13	-45.70	-69.44	2.604	13.34	V
	5175	-56.91	-13	-43.91	-67.42	3.011	13.52	V
	6915	-55.79	-13	-42.79	-65.99	3.271	13.47	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

EN-DC_7A_n66A / LTE 20MHz + NR 40MHz / QPSK (ANT1+4) – other PA								
Channel	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Middle	3450	-58.55	-13	-45.55	-69.29	2.604	13.34	H
	5175	-56.57	-13	-43.57	-67.08	3.011	13.52	H
	6915	-55.91	-13	-42.91	-66.11	3.271	13.47	H
	3450	-58.23	-13	-45.23	-68.97	2.604	13.34	V
	5175	-56.54	-13	-43.54	-67.05	3.011	13.52	V
	6915	-55.56	-13	-42.56	-65.76	3.271	13.47	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



n78 SA / NR 100MHz / QPSK(ANT5)								
Channel	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Middle	6900	-53.21	-13	-40.21	-63.42	3.03	13.24	H
	10356	-56.61	-13	-43.61	-66.06	3.56	13.01	H
	13824	-59.95	-13	-46.95	-69.47	3.92	13.44	H
	6900	-55.93	-13	-42.93	-66.14	3.03	13.24	V
	10356	-58.60	-13	-45.60	-68.05	3.56	13.01	V
	13824	-60.10	-13	-47.10	-69.62	3.92	13.44	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

EN-DC_7A n78A / LTE 10MHz + NR 100MHz / QPSK (ANT0+5)								
Channel	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Middle	6900	-59.97	-13	-46.97	-70.18	3.03	13.24	H
	10368	-61.72	-13	-48.72	-71.17	3.56	13.01	H
	13824	-60.05	-13	-47.05	-69.57	3.92	13.44	H
	6900	-60.97	-13	-47.97	-71.18	3.03	13.24	V
	10368	-62.26	-13	-49.26	-71.71	3.56	13.01	V
	13824	-60.24	-13	-47.24	-69.76	3.92	13.44	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

EN-DC_41A n78A / LTE 10MHz + NR 100MHz / QPSK (ANT1+5)								
Channel	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Middle	6900	-53.56	-13	-40.56	-63.77	3.03	13.24	H
	10356	-55.39	-13	-42.39	-64.84	3.56	13.01	H
	13824	-60.26	-13	-47.26	-69.78	3.92	13.44	H
	6900	-58.22	-13	-45.22	-68.43	3.03	13.24	V
	10356	-59.10	-13	-46.10	-68.55	3.56	13.01	V
	13824	-60.30	-13	-47.30	-69.82	3.92	13.44	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.