

S

T

S

L

A

B



FCC SAR TEST REPORT

Report No.: STS1911194H01

Issued for

Sun Cupid Technology (HK) Ltd.

16/F, CEO Tower, 77 Wing Hong St, Cheung Sha Wan,
Kowloon, Hong Kong, China.

Product Name:	Smart phone
Brand Name:	NUU
Model Name:	X6
Series Model:	N/A
FCC ID:	2ADINS5702L
Test Standard:	ANSI/IEEE Std. C95.1
	FCC 47 CFR Part 2 (2.1093)
	IEEE 1528: 2013
Max. Report SAR (1g):	Head: 0.446 W/kg
	Body: 1.253 W/kg

Any reproduction of this document must be done in full. No single part of this document may be reproduced without permission from STS, All Test Data Presented in this report is only applicable to presented Test sample.

ShenZhen STS Test Services Co.,Ltd.

A 1/F, Building B, Zhuoke Science Park, No.190 Chongqing Road, HepingShequ, Fuyong Sub-District, Bao'an District, Shenzhen, Guang Dong, China

TEL: +86-755 3688 6288 FAX: +86-755 3688 6277 E-mail: sts@stsapp.com





Test Report Certification

Applicant's name : Sun Cupid Technology (HK) Ltd.
Address : 16/F, CEO Tower, 77 Wing Hong St, Cheung Sha Wan, Kowloon, Hong Kong, China.
Manufacture's Name : Sun Cupid Technology (HK) Ltd.
Address : 16/F, CEO Tower, 77 Wing Hong St, Cheung Sha Wan, Kowloon, Hong Kong, China.

Product description

Product name : Smart phone
Brand name : NUU
Model name : X6
Series Model : N/A

Standards : ANSI/IEEE Std. C95.1-1992
FCC 47 CFR Part 2 (2.1093)
IEEE 1528: 2013

The device was tested by Shenzhen STS Test Services Co., Ltd. in accordance with the measurement methods and procedures specified in KDB 865664 The test results in this report apply only to the tested sample of the stated device/equipment. Other similar device/equipment will not necessarily produce the same results due to production tolerance and measurement uncertainties.

Date of Test :

Date (s) of performance of tests : 13 Nov. 2019~20 Nov. 2019

Date of Issue : 21 Nov. 2019

Test Result : **Pass**

Testing Engineer :

Aaron Bu

(Aaron Bu)

Technical Manager :

Jason Lu

(Jason Lu)

Authorized Signatory :

Vita Li

(Vita Li)





Table of Contents

1.General Information	5
1.1 EUT Description	5
1.2 Test Environment	7
1.3 Test Factory	7
2.Test Standards And Limits	8
3. SAR Measurement System	9
3.1 Definition Of Specific Absorption Rate (SAR)	9
3.2 SAR System	9
4. Tissue Simulating Liquids	12
4.1 Simulating Liquids Parameter Check	12
5. SAR System Validation	14
5.1 Validation System	14
5.2 Validation Result	15
6. SAR Evaluation Procedures	16
7. EUT Antenna Location Sketch	17
7.1 SAR test exclusion consider table	18
8. EUT Test Position	19
8.1 Define Two Imaginary Lines On The Handset	19
8.2 Hotspot mode exposure position condition	20
9. Uncertainty	21
9.1 Measurement Uncertainty	21
9.2 System validation Uncertainty	22
10. Conducted Power Measurement	23
10.1 Test Result	23
10.2 Tune-up Power	40
10.3 SAR Test Exclusions Applied	44
11. EUT And Test Setup Photo	45
11.1 EUT Photo	45
11.2 Setup Photo	48
12. SAR Result Summary	54
12.1 Head SAR	54
12.2 Body-worn and Hotspot SAR	56
12.3 repeated SAR measurement	60
13. Equipment List	63
Appendix A. System Validation Plots	64
Appendix B. SAR Test Plots	88
Appendix C. Probe Calibration And Dipole Calibration Report	110

**Revision History**

Rev.	Issue Date	Report No.	Effect Page	Contents
00	21 Nov. 2019	STS1911194H01	ALL	Initial Issue
Note: Format version of the report -V01				





1. General Information

Environmental evaluation measurements of specific absorption rate (SAR) distributions in emulated human head and body tissues exposed to radio frequency (RF) radiation from wireless portable devices for compliance with the rules and regulations of the U.S. Federal Communications Commission (FCC).

1.1 EUT Description

Product Name	Smart phone
Brand Name	NUU
Model Name	X6
Series Model	N/A
FCC ID	2ADINS5702L
Model Difference	N/A
Battery	Rated Voltage: 3.8V; Charge Limit: 4.35V; Capacity: 2800mAh
Device Category	Portable
Product stage	Production unit
RF Exposure Environment	General Population / Uncontrolled
IMEI	354707100100348/78 354707100100355/78 868969010014520/78
Hardware Version	E557_MAIN_PCB_V1.2
Software Version	9052NUU-S5702L-AM-P-MV03203-02
Frequency Range	GSM 850:824.2~848.8MHz PCS1900:1850.2~1909.8MHz WCDMA Band II:1852.4~1907.6MHz WCDMA Band V:826.4~846.6MHz LTE Band 2:1850.7~1909.3MHz LTE Band 4:1710.7~1754.3MHz LTE Band 5:824.7~848.3MHz LTE Band 7:2502.5~2567.5MHz LTE Band 12:699.7~715.3MHz LTE Band 17:706.5~713.5MHz WLAN 802.11b/g/n(HT20):2412~2462MHz WLAN 802.11n(HT40):2422~2452MHz Bluetooth:2402~ 2480MHz GPS: 1575.42MHz FM: 87.5 MHz~108 MHz



Max. Reported SAR(1g): (Limit:1.6W/kg)	Band	Mode	Head (W/kg)	Body Worn and Hotspot(W/kg)
	PCE	GSM 850	0.419	0.447
	PCE	GSM 1900	0.230	0.563
	PCE	WCDMA Band II	0.426	0.774
	PCE	WCDMA Band V	0.326	0.369
	PCE	LTE Band 2	0.430	0.742
	PCE	LTE Band 4	0.446	1.253
	PCE	LTE Band 5	0.315	0.310
	PCE	LTE Band 7	0.440	0.823
	PCE	LTE Band 12	0.109	0.183
	PCE	LTE Band 17	0.101	0.155
	DTS	2.4G WLAN	0.281	0.131
	DTS	Bluetooth ^{Note}	0.334	0.167
1-g Sum SAR			0.780	1.420
FCC Equipment Class	Licensed Portable Transmitter Held to Ear (PCE) Part 15 Spread Spectrum Transmitter (DSS) Digital Transmission System (DTS)			
Operating Mode:	GSM: GSM Voice; GPRS; EGPRS Class 12 WCDMA:RMC,HSDPA,HSUPA Release 6 LTE:QPSK,16QAM WLAN: 802.11 b/g/n(HT20/40) Bluetooth: 5.0+EDR (GFSK + π /4DQPSK+8DPSK) BLE			
Antenna Specification:	GSM,WCDMA,LTE: PIFA Antenna BT,WLAN: PIFA Antenna			
SIM Card	Support dual-SIM, dual standby, the multiple SIM card with two lines cannot transmitting at the same time			
Hotspot Mode:	Support			
DTM Mode:	Not Support			
Note: 1. Bluetooth SAR was estimated 2. The dual SIM card mobile has 2 SIM slots and supports dual SIM dual standby. The WWAN radio transmission will be enabled by either one SIM at a time (Single active) 3. After pre-scan two SIM cards power, we found test result of the SIM1 was the worse, so we chose SIM1 card to perform all tests. 4. The EUT battery must be fully charged and checked periodically during the test to ascertain uniform power				



1.2 Test Environment

Ambient conditions in the SAR laboratory:

Items	Required
Temperature (°C)	18-25
Humidity (%RH)	30-70

1.3 Test Factory

ShenZhen STS Test Services Co.,Ltd.

A 1/F, Building B, Zhuoke Science Park, No.190 Chongqing Road, HepingShequ, Fuyong Sub-District, Bao'an District, Shenzhen, Guang Dong, China

FCC test Firm Registration No.: 625569

IC Registration No.: 12108A

A2LA Certificate No.: 4338.01





2. Test Standards And Limits

No.	Identity	Document Title
1	47 CFR Part 2	Frequency Allocations and Radio Treaty Matters; General Rules and Regulations
2	ANSI/IEEE Std. C95.1-1992	IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz
3	IEEE Std. 1528-2013	Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques
4	FCC KDB 447498 D01 v06	Mobile and Portable Device RF Exposure Procedures and Equipment Authorization Policies
5	FCC KDB 865664 D01 v01r04	SAR Measurement 100 MHz to 6 GHz
6	FCC KDB 865664 D02 v01r02	RF Exposure Reporting
7	FCC KDB 941225 D01 v03r01	SAR Measurement Procedures for 3G Devices
8	FCC KDB 941225 D05 v02r05	SAR for LTE Devices
9	FCC KDB 941225 D06 v02r01	Hotspot Mode SAR
10	FCC KDB 648474 D04 v01r03	SAR Evaluation Considerations for Wireless Handsets
11	FCC KDB 248227 D01 Wi-Fi SAR v02r02	SAR Considerations for 802.11 Devices

(A). Limits for Occupational/Controlled Exposure (W/kg)

Whole-Body	Partial-Body	Hands, Wrists, Feet and Ankles
0.4	8.0	20.0

(B). Limits for General Population/Uncontrolled Exposure (W/kg)

Whole-Body	Partial-Body	Hands, Wrists, Feet and Ankles
0.08	1.6	4.0

NOTE: Whole-Body SAR is averaged over the entire body, partial-body SAR is averaged over any 1 gram of tissue defined as a tissue volume in the shape of a cube. SAR for hands, wrists, feet and ankles is averaged over any 10 grams of tissue defined as a tissue volume in the shape of a cube.

Population/Uncontrolled Environments:

are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure.

Occupational/Controlled Environments:

are defined as locations where there is exposure that may be incurred by people who are aware of the potential for exposure, (i.e. as a result of employment or occupation).

NOTE

GENERAL POPULATION/UNCONTROLLED EXPOSURE

PARTIAL BODY LIMIT

1.6 W/kg

3. SAR Measurement System

3.1 Definition Of Specific Absorption Rate (SAR)

SAR is related to the rate at which energy is absorbed per unit mass in an object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational/controlled and general population/uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational/controlled exposure limits are higher than the limits for general population/uncontrolled.

The SAR definition is the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dv) of a given density (ρ). The equation description is as below:

$$SAR = \frac{d}{dt} \left(\frac{dW}{dm} \right) = \frac{d}{dt} \left(\frac{dW}{\rho dv} \right)$$


SAR is expressed in units of Watts per kilogram (W/kg) SAR measurement can be related to the electrical field in the tissue by

$$SAR = \frac{\sigma E^2}{\rho}$$

Where: σ is the conductivity of the tissue,
ρ is the mass density of the tissue and E is the RMS electrical field strength.

3.2 SAR System

MVG SAR System Diagram:

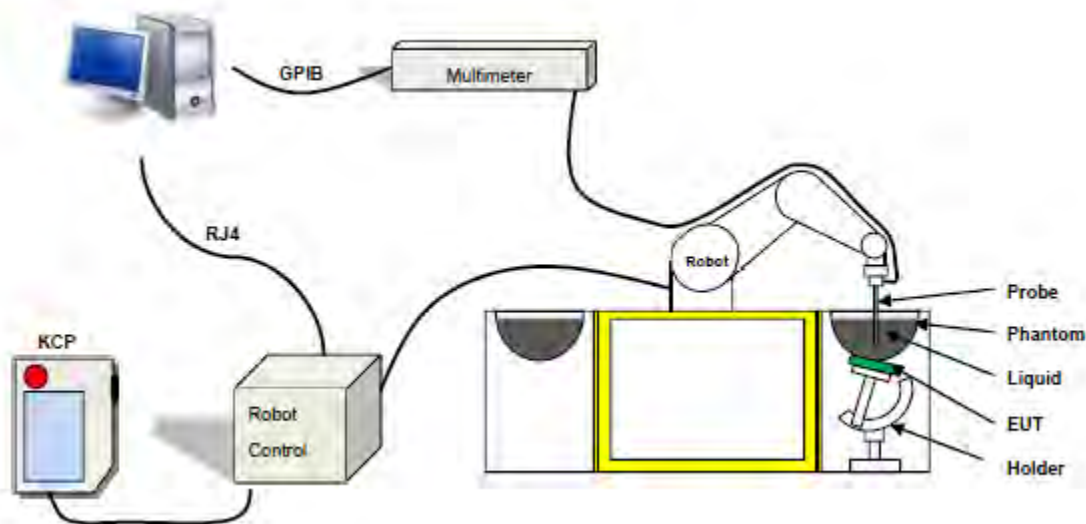

COMOSAR is a system that is able to determine the SAR distribution inside a phantom of human being according to different standards. The COMOSAR system consists of the following items:

- Main computer to control all the system
- 6 axis robot
- Data acquisition system
- Miniature E-field probe
- Phone holder
- Head simulating tissue

The following figure shows the system.



The EUT under test operating at the maximum power level is placed in the phone holder, under the phantom, which is filled with head simulating liquid. The E-Field probe measures the electric field inside the phantom. The Open SAR software computes the results to give a SAR value in a 1g or 10g mass.

3.2.1 Probe

For the measurements the Specific Dosimetric E-Field Probe SN 45/15 EPGO281 with following specifications is used

- Dynamic range: 0.01-100 W/kg
- Tip Diameter: 2.5 mm
- Length of Individual Dipoles: 2 mm
- Maximum external diameter: 8 mm
- Distance between dipole/probe extremity: 8 mm (repeatability better than +/- 1mm)
- Probe linearity: $0 \pm 2.60\%$ (0.11dB)
- Axial Isotropy: < 0.25 dB
- Spherical Isotropy: < 0.25 dB
- Calibration range: 450 MHz to 6 GHz for head & body simulating liquid.
- Angle between probe axis (evaluation axis) and surface normal line: less than 30°



Figure-MVG COMOSAR Dosimetric E field Dipole

3.2.2 Phantom

For the measurements the Specific Anthropomorphic Mannequin (SAM) defined by the IEEE SCC-34/SC2 group is used. The phantom is a polyurethane shell integrated in a wooden table. The thickness of the phantom amounts to 2mm +/- 0.2mm. It enables the dosimetric evaluation of left and right phone usage and includes an additional flat phantom part for the simplified performance check. The phantom set-up includes a cover, which prevents the evaporation of the liquid.


SN 32/14 SAM115



SN 32/14 SAM116



3.2.3 Device Holder

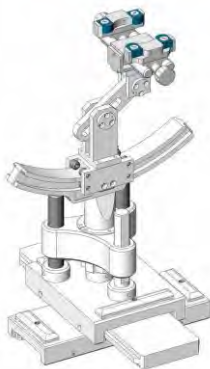

The SAR in the phantom is approximately inversely proportional to the square of the distance between the source and the liquid surface. For a source at 5 mm distance, a positioning uncertainty of ± 0.5 mm would produce a SAR uncertainty of ± 20 %. Accurate device positioning is therefore crucial for accurate and repeatable measurements. The positions in which the devices must be measured are defined by the standards.



4. Tissue Simulating Liquids

4.1 Simulating Liquids Parameter Check

The head tissue dielectric parameters recommended by the IEEE SCC-34/SC-2 in P1528 have been incorporated in the following table. These head parameters are derived from planar layer models simulating the highest expected SAR for the dielectric properties and tissue thickness variations in a human head. Other head and body tissue parameters that have not been specified in P1528 are derived from the tissue dielectric parameters computed from the 4-Cole-Cole equations described in Reference [12] and extrapolated according to the head parameters specified in P1528.

Frequency (MHz)	Bactericide	DGBE	HEC	NaCl	Sucrose	1,2-Propanediol	X100	Water	Conductivity	Permittivity
	%	%	%	%	%	%	%	%	σ	ϵ_r
750	/	/	/	0.79	/	64.81	/	34.40	0.97	41.8
835	/	/	/	0.79	/	64.81	/	34.40	0.97	41.8
900	/	/	/	0.79	/	64.81	/	34.40	0.97	41.8
1800	/	13.84	/	0.35	/	/	30.45	55.36	1.38	41.0
1900	/	13.84	/	0.35	/	/	30.45	55.36	1.38	41.0
2000	/	7.99	/	0.16	/	/	19.97	71.88	1.55	41.1
2450	/	7.99	/	0.16	/	/	19.97	71.88	1.88	40.3
2600	/	7.99	/	0.16	/	/	19.97	71.88	1.88	40.3

Tissue dielectric parameters for head and body phantoms				
Frequency	ϵ_r		σ S/m	
	Head	Body	Head	Body
300	45.3	58.2	0.87	0.92
450	43.5	56.7	0.87	0.94
900	41.5	55.0	0.97	1.05
1450	40.5	54.0	1.20	1.30
1800	40.0	53.3	1.40	1.52
2450	39.2	52.7	1.80	1.95
2600	38.5	52.0	1.95	2.23
5200	36.8	51.2	4.84	5.16
5800	35.3	49.0	5.47	6.28


**LIQUID MEASUREMENT RESULTS**

Date	Ambient condition		Head Simulating Liquid		Parameters	Target	Measured	Deviation [%]	Limited [%]
	Temp. [°C]	Humidity [%]	Frequency	Temp. [°C]					
2019-11-13	23.1	43	750 MHz	22.9	Permittivity:	41.9	41.83	-0.17	±5
					Conductivity:	0.89	0.92	4.55	±5
2019-11-14	22.6	41	835 MHz	22.3	Permittivity:	41.5	41.96	1.11	±5
					Conductivity:	0.9	0.93	3.33	±5
2019-11-15	23.2	42	1800 MHz	22.9	Permittivity:	40	41.42	3.55	±5
					Conductivity:	1.40	1.38	-1.43	±5
2019-11-18	21.8	40	1900 MHz	21.6	Permittivity:	40	40.55	1.37	±5
					Conductivity:	1.4	1.41	0.71	±5
2019-11-19	22.2	43	2450 MHz	21.8	Permittivity:	39.2	39.91	1.81	±5
					Conductivity:	1.8	1.77	-1.67	±5
2019-11-20	21.9	41	2600 MHz	21.6	Permittivity:	39.0	39.27	0.69	±5
					Conductivity:	1.96	1.99	1.53	±5

Date	Ambient condition		Body Simulating Liquid		Parameters	Target	Measured	Deviation [%]	Limited [%]
	Temp. [°C]	Humidity [%]	Frequency	Temp. [°C]					
2019-11-13	23.1	43	750 MHz	22.9	Permittivity:	55.5	56.11	1.10	±5
					Conductivity:	0.96	0.98	2.08	±5
2019-11-14	22.6	41	835 MHz	22.3	Permittivity:	55.2	55.82	1.12	±5
					Conductivity:	0.97	1.01	4.12	±5
2019-11-15	23.2	42	1800 MHz	22.9	Permittivity:	53.3	53.77	0.88	±5
					Conductivity:	1.52	1.49	-1.97	±5
2019-11-18	21.8	40	1900 MHz	21.6	Permittivity:	53.3	52.68	-1.16	±5
					Conductivity:	1.52	1.54	1.32	±5
2019-11-19	22.2	43	2450 MHz	21.8	Permittivity:	52.7	53.14	0.83	±5
					Conductivity:	1.95	1.92	-1.54	±5
2019-11-20	21.9	41	2600 MHz	21.6	Permittivity:	52.5	52.95	0.86	±5
					Conductivity:	2.16	2.23	3.24	±5

5.1 Validation System

The system check verifies that the system operates within its specifications. It's performed daily or before every SAR measurement. The system check uses normal SAR measurement in the flat section of the phantom with a matched dipole at a specified distance. The system validation setup is shown as below.

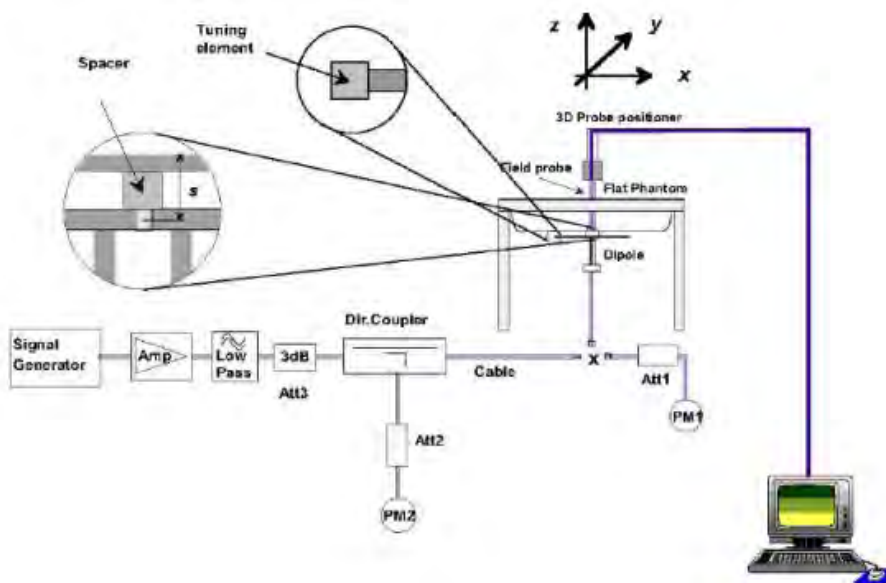



5.2 Validation Result

Comparing to the original SAR value provided by MVG, the validation data should be within its specification of 10 %.

Freq.(MHz)	Power(mW)	Tested Value (W/Kg)	Normalized SAR (W/kg/W)	Target (W/Kg/W)	Tolerance(%)	Date
750 Head	100	0.874	8.74	8.49	2.94	2019-11-13
750 Body	100	0.836	8.36	8.49	-1.53	2019-11-13
835 Head	100	0.907	9.07	9.56	-5.13	2019-11-14
835 Body	100	0.949	9.49	9.56	-0.73	2019-11-14
1800 Head	100	3.903	39.03	38.4	1.64	2019-11-15
1800 Body	100	3.914	39.14	38.4	1.93	2019-11-15
1900 Head	100	3.888	38.88	39.7	-2.07	2019-11-18
1900 Body	100	4.019	40.19	39.7	1.23	2019-11-18
2450 Head	100	5.410	54.10	52.4	3.24	2019-11-19
2450 Body	100	5.338	53.38	52.4	1.87	2019-11-19
2600 Head	100	5.358	53.58	55.3	-3.11	2019-11-20
2600 Body	100	5.596	55.96	55.3	1.19	2019-11-20

Note:

1. The tolerance limit of System validation $\pm 10\%$.
2. The dipole input power (forward power) was 100 mW.
3. The results are normalized to 1 W input power.



6. SAR Evaluation Procedures

The procedure for assessing the average SAR value consists of the following steps:

The following steps are used for each test position

- Establish a call with the maximum output power with a base station simulator. The connection between the mobile and the base station simulator is established via air interface
- Measurement of the local E-field value at a fixed location. This value serves as a reference value for calculating a possible power drift.
- Measurement of the SAR distribution with a grid of 8 to 16mm * 8 to 16 mm and a constant distance to the inner surface of the phantom. Since the sensors cannot directly measure at the inner phantom surface, the values between the sensors and the inner phantom surface are extrapolated. With these values the area of the maximum SAR is calculated by an interpolation scheme.
- Around this point, a cube of 30 * 30 * 30 mm or 32 * 32 * 32 mm is assessed by measuring 5 or 8 * 5 or 8*4 or 5 mm. With these data, the peak spatial-average SAR value can be calculated.


➤ Area Scan& Zoom Scan

First Area Scan is used to locate the approximate location(s) of the local peak SAR value(s). The measurement grid within an Area Scan is defined by the grid extent, grid step size and grid offset. Next, in order to determine the EM field distribution in a three-dimensional spatial extension, Zoom Scan is required. The Zoom Scan is performed around the highest E-field value to determine the averaged SAR-distribution over 10 g. Area scan and zoom scan resolution setting follows KDB 865664 D01 quoted below.

When the 1-g SAR of the highest peak is within 2 dB of the SAR limit, additional zoom scans are required for other peaks within 2 dB of the highest peak that have not been included in any zoom scan to ensure there is no increase in SAR.

7. EUT Antenna Location Sketch

It is a Smart phone, support Bluetooth/WIFI/GSM/WCDMA/LTE modes.

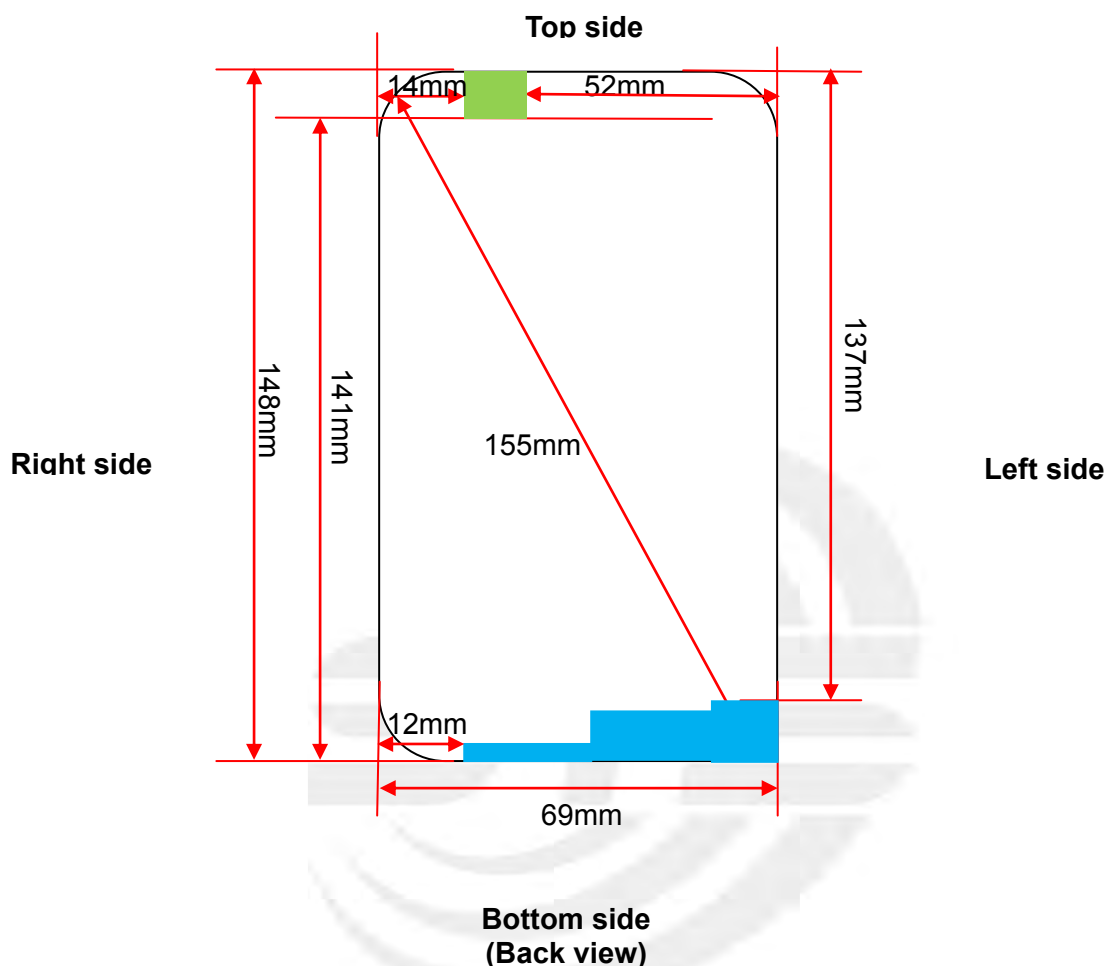

 WWAN Antenna

 WLAN/BT Antenna

Note 1: The antenna information refer the manufacturer provide report, applicable only to the tested sample identified in the report.



7.1 SAR test exclusion consider table

According with FCC KDB 447498 D01, appendix A, <SAR test exclusion thresholds for 100MHz ~6GHz and ≤50mm> table, this device SAR test configurations consider as following:

Band	Test position configurations					
	Front	Back	Right edge	Left edge	Top edge	Bottom edge
WWAN	<5mm	<5mm	12mm	<5mm	137mm	<5mm
	Yes	Yes	Yes	Yes	No	Yes
WLAN/BT	<5mm	<5mm	14mm	52	<5mm	141mm
	Yes	Yes	Yes	No	Yes	No

Note:

1. maximum power is the source-based time-average power and represents the maximum RF output power among production units.
2. per KDB 447498 D01, for larger devices, the test separation distance of adjacent edge configuration is determined by the closest separation between the antenna and the user.
3. per KDB 447498 D01, standalone SAR test exclusion threshold is applied; if the distance of the antenna to the user is <5mm, 5mm is user to determine SAR exclusion threshold
4. per KDB 447498 D01, the 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at test separation distance ≤50mm are determined by:
$$[(\text{max. power of channel, including tune-up tolerance, Mw}) / (\text{min. test separation distance, mm})] * \sqrt{f(\text{GHz})} \leq 3.0 \text{ for 1-g SAR and } \leq 7.5 \text{ for 10-g extremity SAR}$$
$$f(\text{GHz}) \text{ is the RF channel transmit frequency in GHz. Power and distance are rounded to the nearest mW and mm before calculation. The result is rounded to one decimal place for comparison}$$

For <50mm distance, we just calculate mW of the exclusion threshold value(3.0) to do compare
5. per KDB 447498 D01, at 100 MHz to 6GHz and for test separation distances >50mm, the SAR test exclusion threshold is determined according to the following
 - a) [threshold at 50mm in step 1] + (test separation distance - 50mm) * (f (MHz)/150)] Mw, at 100 MHz to 1500 MHz
 - b) [threshold at 50mm in step 1] + (test separation distance - 50mm) * 10] mW at > 1500MHz and ≤6GHz
6. Per KDB 447498 D02, RMC 12.2kbps setting is used to evaluate SAR. If HSDPA/ HSUPA/DC-HSDPA output power is <0.25db higher than RMC 12.2Kbps, or reported SAR with RMC 12.2kbps setting is ≤1.2W/Kg, HSDPA/HSUPA/DC-HSDPA SAR evaluation can be excluded.
7. Per KDB 248227 D01, choose the highest output power channel to test SAR and determine further SAR exclusion 8. for each frequency band, testing at higher data rates and higher order modulations is not required when the maximum average output power for each of each of these configurations is less than 1/4db higher than those measured at the lower data rate than 11b mode, thus the SAR can be excluded.

8. EUT Test Position


This EUT was tested in Right Cheek, Right Titled, Left Cheek, Left Titled, Front Face and Rear Face.

8.1 Define Two Imaginary Lines On The Handset

(1) The vertical centerline passes through two points on the front side of the handset the midpoint of the width w_t of the handset at the level of the acoustic output, and the midpoint of the width w_b of the handset.

(2) The horizontal line is perpendicular to the vertical centerline and passes through the center of the acoustic output. The horizontal line is also tangential to the face of the handset at point A.


(3) The two lines intersect at point A. Note that for many handsets, point A coincides with the center of the acoustic output; however, the acoustic output may be located elsewhere on the horizontal line. Also note that the vertical centerline is not necessarily to the front face of the handset, especially for clamshell handsets, handsets with flip covers, and other irregularly shaped handsets.

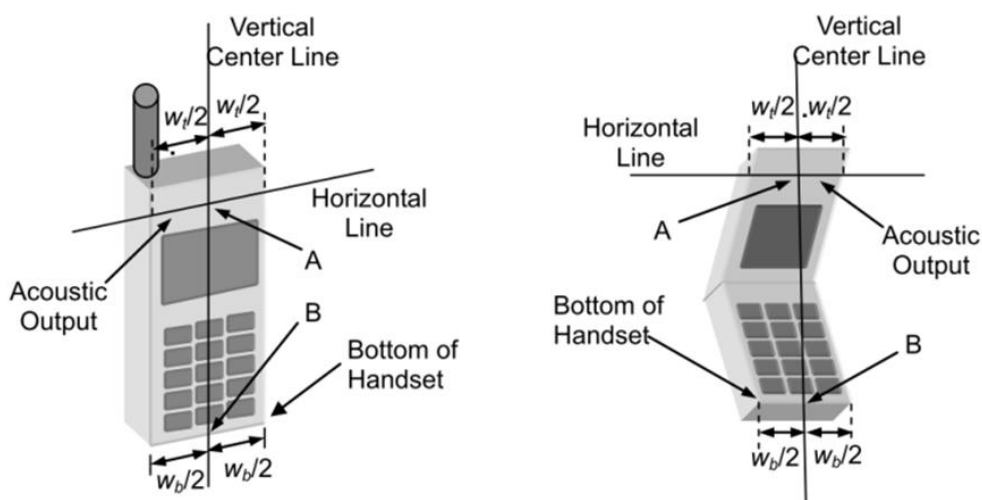

Cheek Position

1) To position the device with the vertical center line of the body of the device and the horizontal line crossing the center piece in a plane parallel to the sagittal plane of the phantom. While maintaining the device in this plane, align the vertical center line with the reference plane containing the ear and mouth reference point (M: Mouth, RE: Right Ear, and LE: Left Ear) and align the center of the ear piece with the line RE-LE.


2) To move the device towards the phantom with the ear piece aligned with the the line LE-RE until the phone touched the ear. While maintaining the device in the reference plane and maintaining the phone contact with ear, move the bottom of the phone until any point on the front side is in contact with the cheek of the phantom or until contact with the ear is lost

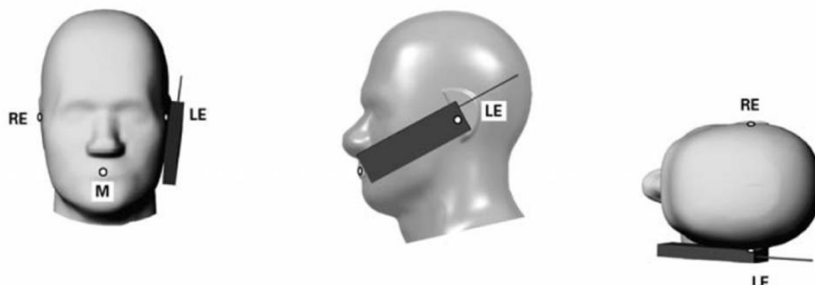

Title Position


(1) To position the device in the "cheek" position described above.

(2) While maintaining the device in the reference plane described above and pivoting against the ear, moves it outward away from the mouth by an angle of 15 degrees or until with the ear is lost.

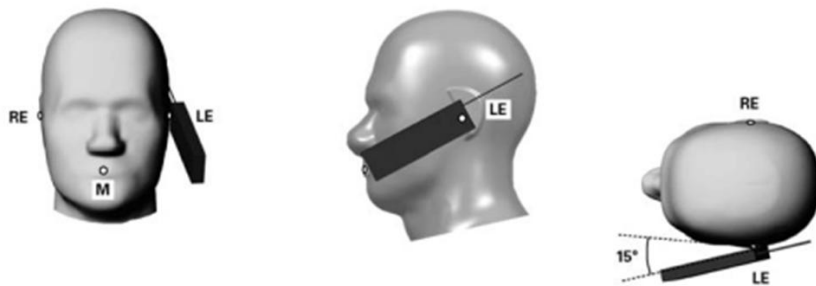


Body-worn Position Conditions:

Body-worn accessory exposure is typically related to voice mode operations when handsets are carried in body-worn accessories. The body-worn accessory procedures in KDB Publication 447498 D01 should be used to test for body-worn accessory SAR compliance, without a headset connected to it. When the same wireless transmission configuration is used for testing body-worn accessory and hotspot mode SAR, respectively, in voice and data mode, SAR results for the most conservative *test separation distance* configuration may be used to support both SAR conditions. When the *reported* SAR for a body-worn accessory, measured without a headset connected to the handset, is $> 1.2 \text{ W/kg}$, the highest *reported* SAR configuration for that wireless mode and frequency band should be repeated for the body-worn accessory with a headset attached to the handset.

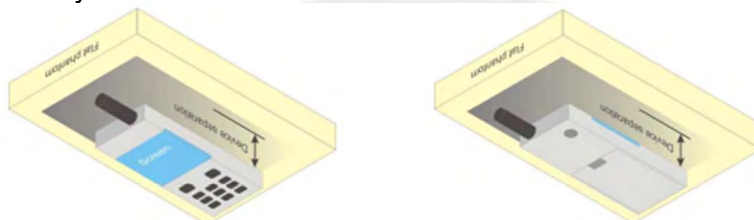

8.2 Hotspot mode exposure position condition

For handsets that support hotspot mode operations, with wireless router capabilities and various web browsing function, the relevant hand and body exposure condition are tested according to the hotspot SAR procedures in KDB 941225. A test separation distance of 10 mm is required between the phantom and all surface and edges with a transmitting antenna located within 25 mm from that surface or edge. When form factor of a handset is smaller than 9cm x 5cm, a test separation distance of 5mm (instead of 10mm) is required for testing hotspot mode. When the separate distance required for body-worn accessory testing is larger than or equal to that tested for hotspot mode, in the same wireless mode and for the same surface of the phone, the hotspot mode SAR data may be used to support body-worn accessory SAR compliance for that particular configuration(surface).

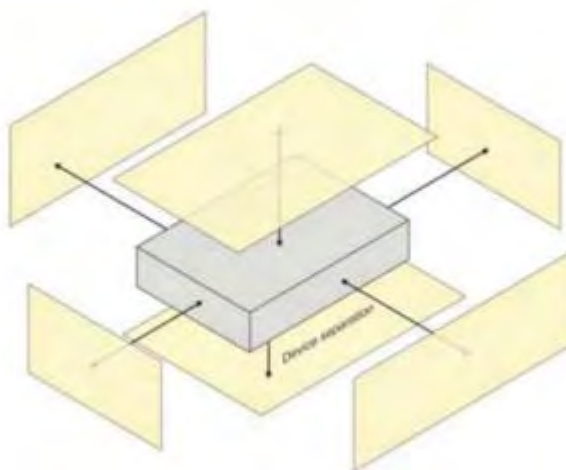



9. Uncertainty

9.1 Measurement Uncertainty

The following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in IEEE 1528: 2013. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.

Uncertainty Component	Tol (+/- %)	Prob. Dist.	Div.	Ci (1g)	Ci (10g)	1g Ui (+/-%)	10g Ui (+/-%)	vi
Measurement System								
Probe calibration	5.831	N	1	1	1	5.83	5.83	
Axial Isotropy	0.695	R	$\sqrt{3}$	$\sqrt{0.5}$	$\sqrt{0.5}$	0.28	0.28	
Hemispherical Isotropy	1.045	R	$\sqrt{3}$	$\sqrt{0.5}$	$\sqrt{0.5}$	0.43	0.43	
Boundary effect	1.0	R	$\sqrt{3}$	1	1	0.58	0.58	
Linearity	0.685	R	$\sqrt{3}$	1	1	0.40	0.40	
System detection limits	1.0	R	$\sqrt{3}$	1	1	0.58	0.58	
Modulation response	3.0	R	$\sqrt{3}$	1	1	1.73	1.73	
Readout Electronics	0.021	N	1	1	1	0.021	0.021	
Response Time	0	R	$\sqrt{3}$	1	1	0	0	
Integration Time	1.4	R	$\sqrt{3}$	1	1	0.81	0.81	
RF ambient conditions-Noise	3.0	R	$\sqrt{3}$	1	1	1.73	1.73	
RF ambient conditions-reflections	3.0	R	$\sqrt{3}$	1	1	1.73	1.73	
Probe positioner mechanical tolerance	1.4	R	$\sqrt{3}$	1	1	0.81	0.81	
Probe positioning with respect to phantom shell	1.4	R	$\sqrt{3}$	1	1	0.81	0.81	
Post-processing	2.3	R	$\sqrt{3}$	1	1	1.33	1.33	
Test sample Related								
Test sample positioning	2.6	N	1	1	1	2.6	2.6	
Device holder uncertainty	3	N	1	1	1	3	3	
SAR drift measurement	5	R	$\sqrt{3}$	1	1	2.89	2.89	
SAR scaling	5	R	$\sqrt{3}$	1	1	2.89	2.89	
Phantom and tissue parameters								
Phantom uncertainty (shape and thickness uncertainty)	4	R	$\sqrt{3}$	1	1	2.31	2.31	
Uncertainty in SAR correction for deviations in permittivity and conductivity	1.9	N	1	1	0.84	1.90	1.60	
Liquid conductivity (temperature uncertainty)	2.5	R	$\sqrt{3}$	0.78	0.71	1.13	1.02	
Liquid conductivity (measured)	4	N	1	0.78	0.71	3.12	2.84	M
Liquid permittivity (temperature uncertainty)	2.5	R	$\sqrt{3}$	0.23	0.26	0.33	0.38	
Liquid permittivity (measured)	5	N	1	0.23	0.26	1.15	1.30	M
Combined Standard Uncertainty		RSS				9.79	9.59	
Expanded Uncertainty (95% Confidence interval)		K=2				19.58	19.18	



9.2 System validation Uncertainty

Uncertainty Component	Tol (+ - %)	Prob. Dist.	Div.	Ci (1g)	Ci (10g)	1g Ui (+-%)	10g Ui (+-%)	vi
Measurement System								
Probe calibration	5.831	N	1	1	1	5.83	5.83	
Axial Isotropy	0.695	R	$\sqrt{3}$	1	1	0.40	0.40	
Hemispherical Isotropy	1.045	R	$\sqrt{3}$	0	0	0.00	0.00	
Boundary effect	1.0	R	$\sqrt{3}$	1	1	0.58	0.58	
Linearity	0.685	R	$\sqrt{3}$	1	1	0.40	0.40	
System detection limits	1.0	R	$\sqrt{3}$	1	1	0.58	0.58	
Modulation response	3.0	R	$\sqrt{3}$	0	0	0.00	0.00	
Readout Electronics	0.021	N	1	1	1	0.021	0.021	
Response Time	0.0	R	$\sqrt{3}$	0	0	0.00	0.00	
Integration Time	1.4	R	$\sqrt{3}$	0	0	0.00	0.00	
RF ambient conditions-Noise	3.0	R	$\sqrt{3}$	1	1	1.73	1.73	
RF ambient conditions-reflections	3.0	R	$\sqrt{3}$	1	1	1.73	1.73	
Probe positioner mechanical tolerance	1.4	R	$\sqrt{3}$	1	1	0.81	0.81	
Probe positioning with respect to phantom shell	1.4	R	$\sqrt{3}$	1	1	0.81	0.81	
Post-Processing	2.3	R	$\sqrt{3}$	1	1	1.33	1.33	
System validation source								
Deviation of experimental dipole from numerical dipole	5.0	N	1	1	1	5.00	5.00	
Input power and SAR drift measurement	5.0	R	$\sqrt{3}$	1	1	2.89	2.89	
Other source contribution Uncertainty	2.0	R	$\sqrt{3}$	1	1	1.15	1.15	
Phantom and set-up								
Phantom uncertainty (shape and thickness uncertainty)	4.0	R	$\sqrt{3}$	1	1	2.31	2.31	
Uncertainty in SAR correction for deviations in permittivity and conductivity	1.9	N	1	1	0.84	1.90	1.60	
Liquid conductivity (temperature uncertainty)	2.5	R	$\sqrt{3}$	0.78	0.71	1.13	1.02	
Liquid conductivity (measured)	4	N	1	0.78	0.71	3.12	2.84	M
Liquid permittivity (temperature uncertainty)	2.5	R	$\sqrt{3}$	0.23	0.26	0.33	0.38	
Liquid permittivity (measured)	5	N	1	0.23	0.26	1.15	1.30	M
Combined Standard Uncertainty		RSS				9.718	9.517	
Expanded Uncertainty (95% Confidence interval)		K=2				19.44	19.04	



10. Conducted Power Measurement

10.1 Test Result

Burst Average Power (dBm)						
Band	GSM 850			PCS 1900		
Channel	128	190	251	512	661	810
Frequency (MHz)	824.2	836.6	848.8	1850.2	1880.0	1909.8
GSM(GMSK, 1-Slot)	31.67	31.56	31.51	28.45	28.30	28.22
GPRS (GMSK, 1-Slot)	28.17	28.09	28.06	24.78	24.79	24.81
GPRS (GMSK, 2-Slot)	27.75	27.62	27.59	24.29	24.34	24.32
GPRS (GMSK, 3-Slot)	27.32	27.19	27.09	23.85	23.84	23.91
GPRS (GMSK, 4-Slot)	26.88	26.72	26.64	23.39	23.37	23.46
EGPRS(8PSK, 1-Slot)	28.15	28.05	28.01	24.70	24.63	24.62
EGPRS(8PSK, 2-Slot)	27.41	27.28	27.25	23.94	23.87	23.88
EGPRS(8PSK, 3-Slot)	26.66	26.51	26.46	23.21	23.16	23.11
EGPRS(8PSK, 4-Slot)	25.89	25.79	25.74	22.46	22.39	22.35
Remark: GPRS, CS4 coding scheme. EGPRS, MCS5 coding scheme. Multi-Slot Class 8 , Support Max 4 downlink, 1 uplink , 5 working link Multi-Slot Class 10 , Support Max 4 downlink, 2 uplink , 5 working link Multi-Slot Class 12 , Support Max 4 downlink, 4 uplink , 5 working link						

Fram- Average Power(dBm)						
Band	GSM 850			PCS 1900		
Channel	128	190	251	512	661	810
Frequency (MHz)	824.2	836.6	848.8	1850.2	1880.0	1909.8
GSM(GMSK, 1-Slot)	22.64	22.53	22.48	19.42	19.27	19.19
GPRS (GMSK, 1-Slot)	19.14	19.06	19.03	15.75	15.76	15.78
GPRS (GMSK, 2-Slot)	21.73	21.60	21.57	18.27	18.32	18.30
GPRS (GMSK, 3-Slot)	23.06	22.93	22.83	19.59	19.58	19.65
GPRS (GMSK, 4-Slot)	23.87	23.71	23.63	20.38	20.36	20.45
EGPRS(8PSK, 1-Slot)	19.12	19.02	18.98	15.67	15.60	15.59
EGPRS(8PSK, 2-Slot)	21.39	21.26	21.23	17.92	17.85	17.86
EGPRS(8PSK, 3-Slot)	22.40	22.25	22.20	18.95	18.90	18.85
EGPRS(8PSK, 4-Slot)	22.88	22.78	22.73	19.45	19.38	19.34
Remark : 1. SAR testing was performed on the maximum frame-averaged power mode. 2. The frame-averaged power is linearly proportion to the slot number configured and it is linearly scaled the maximum burst-averaged power based on time slots. The calculated method is shown as below: Frame-averaged power = Burst averaged power (1 Tx Slot) – 9.03 dB Frame-averaged power = Burst averaged power (2 Tx Slots) – 6.02 dB Frame-averaged power = Burst averaged power (3 Tx Slots) - 4.26 dB Frame-averaged power = Burst averaged power (4 Tx Slots) – 3.01 dB						

WCDMA

Band	WCDMA Band V			WCDMA Band II		
Channel	4132	4183	4233	9262	9400	9538
Frequency (MHz)	826.4	836.6	846.6	1852.4	1880.0	1907.6
AMR 12.2Kbps	21.04	21.02	21.33	22.32	21.53	21.95
RMC 12.2Kbps	21.09	21.06	21.35	22.36	21.58	21.97
HSDPA Subtest-1	19.91	20.00	20.24	19.40	19.34	19.47
HSDPA Subtest-2	19.44	19.52	19.82	18.96	18.87	19.06
HSDPA Subtest-3	19.02	19.04	19.37	18.57	18.46	18.69
HSDPA Subtest-4	18.62	18.65	19.04	18.08	18.07	18.22
HSUPA Subtest-1	19.90	20.00	20.20	19.36	19.30	19.40
HSUPA Subtest-2	19.03	19.00	19.21	18.46	18.39	18.48
HSUPA Subtest-3	18.85	18.59	18.73	18.33	17.94	18.11
HSUPA Subtest-4	18.42	18.22	18.33	17.86	17.48	17.68
HSUPA Subtest-5	17.00	16.74	16.89	16.46	16.04	16.26

According to 3GPP 25.101 sub-clause 6.2.2 , the maximum output power is allowed to be reduced by following the table.

Table 6.1A: UE maximum output power with HS-DPCCH and E-DCH

UE Transmit Channel Configuration	CM(db)	MPR(db)
For all combinations of ,DPDCH,DPCCH HS-DPDCH,E-DPDCH and E-DPCCH	$0 \leq CM \leq 3.5$	MAX(CM-1,0)
Note: CM=1 for $\beta_c/\beta_d=12/15$, $\beta_{hs}/\beta_c=24/15$.For all other combinations of DPDCH, DPCCH, HS-DPCCH, E-DPDCH and E-DPCCH the MPR is based on the relative CM difference.		

The device supports MPR to solve linearity issues (ACLR or SEM) due to the higher peak-to average ratios (PAR) of the HSUPA signal. This prevents saturating the full range of the TX DAC inside of device and provides a reduced power output to the RF transceiver chip according to the Cubic Metric (a function of the combinations of DPDCH, DPCCH, HS-DPCCH, E-DPDCH and E-DPCCH).

When E-DPDCH channels are present the beta gains on those channels are reduced firsts to try to get the power under the allowed limit. If the beta gains are lowered as far as possible, then a hard limiting is applied at the maximum allowed level.

The SW currently recalculates the cubic metric every time the beta gains on the E-DPDCH are reduced.

The cubic metric will likely get lower each time this is done .However, there is no reported reduction of maximum output power in the HSUPA mode since the device also provides a compensation for the power back-off by increasing the gain of TX_AGC in the transceiver (PA) device.

The end effect is that the DUT output power is identical to the case where there is no MPR in the device.

**WLAN**

Mode	Channel Number	Frequency (MHz)	Average Power (dBm)
802.11b	1	2412	12.57
	6	2437	12.98
	11	2462	12.76
802.11g	1	2412	7.31
	6	2437	7.61
	11	2462	7.51
802.11n(HT 20)	1	2412	7.13
	6	2437	7.51
	11	2462	7.30
802.11n(HT 40)	3	2422	7.04
	6	2437	7.50
	9	2452	7.51

Bluetooth

Mode	Channel Number	Frequency (MHz)	Average Power (dBm)
GFSK(1Mbps)	0	2402	8.35
	39	2441	8.03
	78	2480	7.85
$\pi/4$ -DQPSK(2Mbps)	0	2402	5.50
	39	2441	5.33
	78	2480	4.98
8DPSK(3Mbps)	0	2402	5.50
	39	2441	5.32
	78	2480	5.12

BLE

Mode	Channel Number	Frequency (MHz)	Average Power (dBm)
GFSK(1Mbps)	0	2402	-5.89
	19	2440	-5.67
	39	2480	-5.28
GFSK(2Mbps)	0	2402	-7.60
	19	2440	-7.40
	39	2480	-7.03



LTE Conducted Power

General Note:

1. Anritsu CMW500 base station simulator was used to setup the connection with EUT; the frequency band, channel bandwidth, RB allocation configuration, modulation type are set in the base station simulator to configure EUT transmitting at maximum power and at different configurations which are requested to be reported to FCC, for conducted power measurement and SAR testing.
2. Per KDB 941225 D05, when a properly configured base station simulator is used for the SAR and power measurements, spectrum plots for each RB allocation and offset configuration is not required.
3. Per KDB 941225 D05, start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power for RB offsets at the upper edge, middle and lower edge of each required test channel.
4. Per KDB 941225 D05, 50% RB allocation for QPSK SAR testing follows 1RB QPSK allocation procedure.
5. Per KDB 941225 D05, For QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation are ≤ 0.8 W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is > 1.45 W/kg, the remaining required test channels must also be tested.
6. Per KDB 941225 D05, 16QAM output power for each RB allocation configuration is $> \text{not } \frac{1}{2}$ dB higher than the same configuration in QPSK and the reported SAR for the QPSK configuration is ≤ 1.45 W/kg; Per KDB 941225 D05, 16QAM SAR testing is not required.
7. Per KDB 941225 D05, Smaller bandwidth output power for each RB allocation configuration is $> \text{not } \frac{1}{2}$ dB higher than the same configuration in the largest supported bandwidth, and the reported SAR for the largest supported bandwidth is ≤ 1.45 W/kg; Per KDB 941225 D05, smaller bandwidth SAR testing is not required.



LTE Band 2

LTE Band 2 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
1.4	1	0	QPSK	23.52	23.16	23.05
1.4	1	2		23.25	22.90	22.82
1.4	1	5		22.95	22.69	22.62
1.4	3	0		22.70	22.40	22.36
1.4	3	1		22.41	22.12	22.15
1.4	3	2		22.15	21.84	21.91
1.4	6	0		21.87	21.58	21.70
1.4	1	0	16-QAM	23.28	22.87	22.80
1.4	1	2		23.03	22.67	22.54
1.4	1	5		22.81	22.39	22.24
1.4	3	0		22.55	22.12	21.99
1.4	3	1		22.28	21.92	21.71
1.4	3	2		22.02	21.64	21.50
1.4	6	0		21.80	21.40	21.28
3	1	0	QPSK	22.25	22.03	22.16
3	1	7		22.00	21.82	21.88
3	1	14		21.72	21.62	21.65
3	8	0		21.43	21.38	21.44
3	8	4		21.19	21.11	21.19
3	8	7		20.91	20.83	20.98
3	15	0		20.64	20.57	20.73
3	1	0	16-QAM	21.97	21.75	21.87
3	1	7		21.76	21.48	21.59
3	1	14		21.56	21.18	21.38
3	8	0		21.28	20.97	21.13
3	8	4		21.05	20.67	20.90
3	8	7		20.78	20.46	20.64
3	15	0		20.57	20.25	20.40



LTE BAND 2

LTE Band 2 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
5	1	0	QPSK	22.08	22.30	22.22
5	1	12		21.85	22.00	22.02
5	1	24		21.58	21.77	21.75
5	12	0		21.38	21.52	21.52
5	12	6		21.09	21.32	21.26
5	12	11		20.84	21.10	21.00
5	25	0		20.56	20.86	20.78
5	1	0	16-QAM	21.83	22.08	21.97
5	1	12		21.62	21.86	21.75
5	1	24		21.37	21.60	21.54
5	12	0		21.11	21.32	21.28
5	12	6		20.88	21.08	20.99
5	12	11		20.64	20.82	20.72
5	25	0		20.36	20.52	20.45
10	1	0	QPSK	22.86	22.91	22.89
10	1	24		22.62	22.64	22.62
10	1	49		22.42	22.35	22.32
10	25	0		22.21	22.11	22.10
10	25	12		21.93	21.85	21.82
10	25	24		21.67	21.61	21.56
10	50	0		21.40	21.40	21.33
10	1	0	16-QAM	22.58	22.64	22.64
10	1	24		22.30	22.41	22.34
10	1	49		22.00	22.12	22.09
10	25	0		21.79	21.83	21.84
10	25	12		21.54	21.62	21.57
10	25	24		21.28	21.33	21.31
10	50	0		20.99	21.03	21.09



LTE BAND 2

LTE Band 2 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
15	1	0	QPSK	23.08	23.06	22.94
15	1	37		22.88	22.79	22.68
15	1	74		22.59	22.49	22.46
15	36	0		22.29	22.24	22.16
15	36	18		22.04	21.95	21.94
15	36	39		21.78	21.70	21.71
15	75	0		21.48	21.48	21.45
15	1	0	16-QAM	22.80	22.77	22.66
15	1	38		22.54	22.53	22.40
15	1	75		22.32	22.27	22.13
15	36	0		22.07	22.04	21.86
15	36	18		21.80	21.82	21.60
15	36	39		21.50	21.59	21.38
15	75	0		21.28	21.34	21.15
20	1	0	QPSK	23.72	23.81	23.77
20	1	49		23.50	23.57	23.52
20	1	99		23.21	23.28	23.28
20	50	0		23.01	23.00	23.04
20	50	24		22.74	22.77	22.80
20	50	49		22.50	22.51	22.58
20	100	0		22.23	22.27	22.28
20	1	0	16-QAM	23.44	23.55	23.49
20	1	49		23.18	23.33	23.21
20	1	99		22.95	23.07	22.93
20	50	0		22.72	22.81	22.72
20	50	24		22.43	22.55	22.49
20	50	49		22.13	22.27	22.24
20	100	0		21.92	22.03	21.97



LTE BAND 4

LTE Band 4 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
1.4	1	0	QPSK	24.16	24.20	23.86
1.4	1	2		23.94	23.77	23.65
1.4	1	5		23.74	23.56	23.42
1.4	3	0		23.46	23.30	23.16
1.4	3	1		23.18	23.09	22.87
1.4	3	2		22.88	22.82	22.65
1.4	6	0		22.59	22.60	22.43
1.4	1	0	16-QAM	23.92	23.70	23.66
1.4	1	2		23.68	23.43	23.44
1.4	1	5		23.43	23.19	23.18
1.4	3	0		23.18	22.95	22.89
1.4	3	1		22.89	22.65	22.64
1.4	3	2		22.65	22.36	22.35
1.4	6	0		22.40	22.14	22.13
3	1	0	QPSK	23.69	23.71	23.83
3	1	7		23.41	23.48	23.62
3	1	14		23.11	23.23	23.33
3	8	0		22.87	22.94	23.07
3	8	4		22.62	22.66	22.87
3	8	7		22.34	22.45	22.58
3	15	0		22.14	22.21	22.30
3	1	0	16-QAM	23.45	23.46	23.57
3	1	7		23.24	23.17	23.34
3	1	14		22.96	22.95	23.05
3	8	0		22.72	22.69	22.83
3	8	4		22.46	22.42	22.61
3	8	7		22.22	22.15	22.34
3	15	0		21.95	21.87	22.10



LTE BAND 4

LTE Band 4 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
5	1	0	QPSK	23.36	23.18	23.52
5	1	12		23.12	22.90	23.27
5	1	24		22.84	22.62	23.01
5	12	0		22.54	22.35	22.80
5	12	6		22.26	22.07	22.54
5	12	11		21.99	21.87	22.26
5	25	0		21.76	21.60	21.96
5	1	0	16-QAM	23.12	22.94	23.29
5	1	12		22.82	22.70	22.99
5	1	24		22.56	22.46	22.71
5	12	0		22.36	22.22	22.48
5	12	6		22.10	22.01	22.22
5	12	11		21.81	21.74	21.93
5	25	0		21.52	21.53	21.72
10	1	0	QPSK	23.12	23.16	23.08
10	1	24		22.92	22.94	22.86
10	1	49		22.70	22.65	22.66
10	25	0		22.46	22.37	22.36
10	25	12		22.20	22.15	22.07
10	25	24		21.91	21.86	21.81
10	50	0		21.68	21.59	21.58
10	1	0	16-QAM	22.82	22.92	22.82
10	1	24		22.55	22.67	22.58
10	1	49		22.26	22.39	22.30
10	25	0		21.99	22.17	22.00
10	25	12		21.74	21.95	21.74
10	25	24		21.45	21.71	21.47
10	50	0		21.18	21.51	21.25



LTE BAND 4

LTE Band 4 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
15	1	0	QPSK	23.16	23.28	23.32
15	1	37		22.88	23.04	23.05
15	1	74		22.66	22.76	22.79
15	36	0		22.45	22.51	22.52
15	36	18		22.21	22.29	22.22
15	36	39		21.98	22.01	21.98
15	75	0		21.73	21.80	21.71
15	1	0	16-QAM	22.88	23.07	23.07
15	1	38		22.59	22.84	22.82
15	1	75		22.30	22.61	22.56
15	36	0		22.02	22.34	22.30
15	36	18		21.72	22.06	22.00
15	36	39		21.46	21.83	21.80
15	75	0		21.20	21.62	21.60
20	1	0	QPSK	24.26	24.37	24.19
20	1	49		23.98	24.11	23.98
20	1	99		23.73	23.90	23.77
20	50	0		23.44	23.61	23.55
20	50	24		23.22	23.34	23.28
20	50	49		23.00	23.09	23.06
20	100	0		22.74	22.89	22.79
20	1	0	16-QAM	24.04	24.09	23.96
20	1	49		23.80	23.82	23.73
20	1	99		23.56	23.56	23.47
20	50	0		23.34	23.33	23.18
20	50	24		23.07	23.05	22.98
20	50	49		22.79	22.80	22.71
20	100	0		22.54	22.58	22.45



LTE BAND 5

LTE Band 5 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
1.4	1	0	QPSK	24.97	25.30	25.16
1.4	1	2		24.71	25.07	24.94
1.4	1	5		24.46	24.79	24.69
1.4	3	0		24.23	24.52	24.41
1.4	3	1		23.99	24.24	24.15
1.4	3	2		23.69	23.96	23.91
1.4	6	0		23.41	23.72	23.62
1.4	1	0	16-QAM	24.74	25.08	24.90
1.4	1	2		24.49	24.80	24.66
1.4	1	5		24.22	24.56	24.45
1.4	3	0		24.01	24.33	24.16
1.4	3	1		23.81	24.06	23.89
1.4	3	2		23.53	23.81	23.61
1.4	6	0		23.23	23.60	23.35
3	1	0	QPSK	24.55	24.62	24.48
3	1	7		24.33	24.35	24.22
3	1	14		24.04	24.06	23.99
3	8	0		23.80	23.80	23.77
3	8	4		23.56	23.56	23.55
3	8	7		23.34	23.28	23.28
3	15	0		23.08	23.05	22.98
3	1	0	16-QAM	24.31	24.35	24.27
3	1	7		24.08	24.08	24.06
3	1	14		23.81	23.88	23.77
3	8	0		23.53	23.65	23.52
3	8	4		23.25	23.44	23.26
3	8	7		22.96	23.18	23.03
3	15	0		22.74	22.93	22.75



LTE BAND 5

LTE Band 5 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
5	1	0	QPSK	25.42	25.08	25.10
5	1	12		25.16	24.80	24.86
5	1	24		24.95	24.51	24.6
5	12	0		24.65	24.22	24.36
5	12	6		24.43	23.96	24.14
5	12	11		24.19	23.69	23.86
5	25	0		23.96	23.47	23.57
5	1	0	16-QAM	25.13	24.88	24.85
5	1	12		24.85	24.65	24.58
5	1	24		24.64	24.45	24.36
5	12	0		24.37	24.19	24.10
5	12	6		24.15	23.91	23.87
5	12	11		23.90	23.62	23.64
5	25	0		23.62	23.36	23.40
10	1	0	QPSK	25.58	25.71	25.66
10	1	24		25.33	25.41	25.38
10	1	49		25.04	25.21	25.18
10	25	0		24.83	24.98	24.97
10	25	12		24.62	24.74	24.77
10	25	24		24.33	24.51	24.47
10	50	0		24.12	24.28	24.23
10	1	0	16-QAM	25.31	25.43	25.43
10	1	24		25.02	25.16	25.18
10	1	49		24.73	24.93	24.97
10	25	0		24.46	24.67	24.67
10	25	12		24.23	24.40	24.46
10	25	24		24.03	24.15	24.21
10	50	0		23.81	23.86	23.96



LTE BAND 7

LTE Band 7 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
5	1	0	QPSK	20.29	20.22	20.16
5	1	12		20.05	19.96	19.92
5	1	24		19.82	19.68	19.70
5	12	0		19.60	19.41	19.45
5	12	6		19.35	19.16	19.16
5	12	11		19.12	18.90	18.93
5	25	0		18.89	18.67	18.64
5	1	0	16-QAM	20.03	20.00	19.90
5	1	12		19.77	19.71	19.60
5	1	24		19.56	19.46	19.35
5	12	0		19.30	19.20	19.08
5	12	6		19.07	18.92	18.88
5	12	11		18.84	18.68	18.66
5	25	0		18.55	18.45	18.46
10	1	0	QPSK	20.18	20.10	20.03
10	1	24		19.92	19.82	19.79
10	1	49		19.63	19.54	19.59
10	25	0		19.34	19.29	19.36
10	25	12		19.08	19.04	19.13
10	25	24		18.83	18.74	18.89
10	50	0		18.61	18.47	18.67
10	1	0	16-QAM	19.93	19.85	19.74
10	1	24		19.67	19.57	19.49
10	1	49		19.45	19.31	19.26
10	25	0		19.21	19.09	18.98
10	25	12		18.91	18.86	18.76
10	25	24		18.64	18.60	18.48
10	50	0		18.34	18.32	18.22



LTE BAND 7

LTE Band 7 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
15	1	0	QPSK	20.44	20.39	20.45
15	1	37		20.18	20.13	20.19
15	1	74		19.93	19.92	19.94
15	36	0		19.64	19.65	19.66
15	36	18		19.42	19.36	19.38
15	36	39		19.15	19.08	19.14
15	75	0		18.90	18.87	18.87
15	1	0	16-QAM	20.17	20.11	20.24
15	1	38		19.94	19.87	19.99
15	1	75		19.67	19.61	19.73
15	36	0		19.41	19.39	19.45
15	36	18		19.16	19.13	19.23
15	36	39		18.91	18.91	18.99
15	75	0		18.62	18.62	18.76
20	1	0	QPSK	20.65	20.60	20.57
20	1	49		20.44	20.31	20.36
20	1	99		20.19	20.09	20.12
20	50	0		19.90	19.89	19.86
20	50	24		19.63	19.66	19.63
20	50	49		19.37	19.42	19.42
20	100	0		19.12	19.17	19.22
20	1	0	16-QAM	20.39	20.34	20.28
20	1	49		20.17	20.12	20.00
20	1	99		19.88	19.92	19.75
20	50	0		19.58	19.65	19.53
20	50	24		19.33	19.36	19.27
20	50	49		19.09	19.06	19.00
20	100	0		18.89	18.77	18.75



LTE BAND 12

LTE Band 12 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
1.4	1	0	QPSK	24.85	24.92	24.86
1.4	1	2		24.61	24.65	24.63
1.4	1	5		24.33	24.44	24.43
1.4	3	0		24.08	24.19	24.22
1.4	3	1		23.86	23.91	23.97
1.4	3	2		23.63	23.70	23.72
1.4	6	0		23.38	23.41	23.43
1.4	1	0	16-QAM	24.63	24.71	24.63
1.4	1	2		24.38	24.43	24.38
1.4	1	5		24.15	24.23	24.14
1.4	3	0		23.95	24.01	23.89
1.4	3	1		23.67	23.72	23.59
1.4	3	2		23.45	23.42	23.33
1.4	6	0		23.16	23.20	23.08
3	1	0	QPSK	24.47	24.39	24.55
3	1	7		24.19	24.10	24.30
3	1	14		23.90	23.89	24.05
3	8	0		23.61	23.66	23.75
3	8	4		23.39	23.36	23.54
3	8	7		23.13	23.11	23.25
3	15	0		22.88	22.90	22.97
3	1	0	16-QAM	24.23	24.18	24.35
3	1	7		23.96	23.89	24.12
3	1	14		23.71	23.67	23.87
3	8	0		23.47	23.45	23.63
3	8	4		23.23	23.17	23.43
3	8	7		22.99	22.95	23.14
3	15	0		22.74	22.70	22.86



LTE BAND 12

LTE Band 12 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
5	1	0	QPSK	24.70	24.68	24.75
5	1	12		24.47	24.44	24.52
5	1	24		24.26	24.19	24.22
5	12	0		24.04	23.90	24.00
5	12	6		23.77	23.70	23.73
5	12	11		23.57	23.47	23.47
5	25	0		23.34	23.22	23.21
5	1	0	16-QAM	24.40	24.43	24.54
5	1	12		24.13	24.20	24.34
5	1	24		23.93	23.97	24.11
5	12	0		23.64	23.71	23.89
5	12	6		23.40	23.44	23.68
5	12	11		23.15	23.15	23.46
5	25	0		22.94	22.90	23.17
10	1	0	QPSK	25.30	25.09	25.16
10	1	24		25.04	24.89	24.90
10	1	49		24.80	24.62	24.69
10	25	0		24.60	24.38	24.48
10	25	12		24.39	24.11	24.19
10	25	24		24.14	23.89	23.92
10	50	0		23.94	23.60	23.65
10	1	0	16-QAM	25.09	24.82	24.87
10	1	24		24.81	24.60	24.66
10	1	49		24.55	24.33	24.40
10	25	0		24.26	24.03	24.15
10	25	12		24.01	23.76	23.87
10	25	24		23.75	23.50	23.61
10	50	0		23.49	23.23	23.38



LTE BAND 17

LTE Band 17 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
5	1	0	QPSK	22.08	22.25	22.13
5	1	12		21.81	21.96	21.89
5	1	24		21.60	21.68	21.64
5	12	0		21.33	21.45	21.35
5	12	6		21.05	21.20	21.06
5	12	11		20.83	20.95	20.84
5	25	0		20.57	20.73	20.57
5	1	0	16-QAM	21.85	21.96	21.89
5	1	12		21.55	21.67	21.65
5	1	24		21.29	21.37	21.42
5	12	0		21.04	21.13	21.18
5	12	6		20.84	20.93	20.93
5	12	11		20.54	20.67	20.72
5	25	0		20.28	20.43	20.46
10	1	0	QPSK	22.50	22.39	22.42
10	1	24		22.23	22.13	22.14
10	1	49		22.03	21.87	21.93
10	25	0		21.80	21.59	21.64
10	25	12		21.55	21.35	21.37
10	25	24		21.29	21.05	21.16
10	50	0		21.05	20.81	20.91
10	1	0	16-QAM	22.28	22.15	22.19
10	1	24		21.98	21.91	21.96
10	1	49		21.69	21.63	21.72
10	25	0		21.48	21.42	21.52
10	25	12		21.19	21.18	21.26
10	25	24		20.94	20.96	21.02
10	50	0		20.67	20.69	20.72



10.2 Tune-up Power

Mode	GSM850(AVG)	GSM1900(AVG)
GSM/PCS	31±1dBm	28±1dBm
GPRS (1 Slot)	28±1dBm	24±1dBm
GPRS (2 Slot)	27±1dBm	24±1dBm
GPRS (3 Slot)	27±1dBm	23±1dBm
GPRS (4 Slot)	26±1dBm	23±1dBm
EDGE (1 Slot)	28±1dBm	24±1dBm
EDGE (2 Slot)	27±1dBm	23±1dBm
EDGE (3 Slot)	26±1dBm	23±1dBm
EDGE (4 Slot)	25±1dBm	22±1dBm

Mode	WCDMA Band V(AVG)	WCDMA Band II(AVG)
AMR	21±1dBm	22±1dBm
RMC	21±1dBm	22±1dBm
HSDPA Subtest-1	20±1dBm	19±1dBm
HSDPA Subtest-2	19±1dBm	19±1dBm
HSDPA Subtest-3	19±1dBm	18±1dBm
HSDPA Subtest-4	19±1dBm	18±1dBm
HSUPA Subtest-1	20±1dBm	19±1dBm
HSUPA Subtest-2	19±1dBm	18±1dBm
HSUPA Subtest-3	18±1dBm	18±1dBm
HSUPA Subtest-4	18±1dBm	17±1dBm
HSUPA Subtest-5	17±1dBm	16±1dBm



WLAN (2.4Gband)

Mode	WLAN(AVG)
IEEE 802.11b	12±1dBm
IEEE 802.11g	7±1dBm
IEEE 802.11n(HT 20)	7±1dBm
IEEE 802.11n(HT 40)	7±1dBm

BT

Mode	BT(AVG)
GFSK	8±1dBm
$\pi/4$ -DQPSK	5±1dBm
8DPSK	5±1dBm

BLE

Mode	BLE(AVG)
GFSK(1Mbps)	-5±1dBm
GFSK(2Mbps)	-7±1dBm



LTE

BW[MHz]	RB Size	Mode	Band 2	Band 4	Band 5	Band 7
1.4	1	QPSK	23±1dBm	24±1dBm	25±1dBm	N/A
1.4	3		22±1dBm	23±1dBm	24±1dBm	N/A
1.4	6		21±1dBm	22±1dBm	23±1dBm	N/A
1.4	1	16- QAM	23±1dBm	23±1dBm	25±1dBm	N/A
1.4	3		22±1dBm	23±1dBm	24±1dBm	N/A
1.4	6		21±1dBm	22±1dBm	23±1dBm	N/A
3	1	QPSK	22±1dBm	23±1dBm	24±1dBm	N/A
3	8		21±1dBm	22±1dBm	23±1dBm	N/A
3	15		20±1dBm	22±1dBm	23±1dBm	N/A
3	1	16- QAM	21±1dBm	23±1dBm	24±1dBm	N/A
3	8		21±1dBm	22±1dBm	23±1dBm	N/A
3	15		20±1dBm	21±1dBm	22±1dBm	N/A
5	1	QPSK	22±1dBm	23±1dBm	25±1dBm	20±1dBm
5	12		21±1dBm	22±1dBm	24±1dBm	19±1dBm
5	25		20±1dBm	21±1dBm	23±1dBm	18±1dBm
5	1	16- QAM	22±1dBm	23±1dBm	25±1dBm	20±1dBm
5	12		21±1dBm	22±1dBm	24±1dBm	19±1dBm
5	25		20±1dBm	21±1dBm	23±1dBm	18±1dBm
10	1	QPSK	22±1dBm	23±1dBm	25±1dBm	20±1dBm
10	25		22±1dBm	22±1dBm	24±1dBm	19±1dBm
10	50		21±1dBm	21±1dBm	24±1dBm	18±1dBm
10	1	16- QAM	22±1dBm	22±1dBm	25±1dBm	19±1dBm
10	25		21±1dBm	22±1dBm	24±1dBm	19±1dBm
10	50		21±1dBm	21±1dBm	23±1dBm	18±1dBm
15	1	QPSK	23±1dBm	23±1dBm	N/A	20±1dBm
15	36		22±1dBm	22±1dBm	N/A	19±1dBm
15	75		21±1dBm	21±1dBm	N/A	18±1dBm
15	1	16- QAM	22±1dBm	23±1dBm	N/A	20±1dBm
15	36		22±1dBm	22±1dBm	N/A	19±1dBm
15	75		21±1dBm	21±1dBm	N/A	18±1dBm
20	1	QPSK	23±1dBm	24±1dBm	N/A	20±1dBm
20	50		23±1dBm	23±1dBm	N/A	19±1dBm
20	100		22±1dBm	22±1dBm	N/A	19±1dBm
20	1	16- QAM	23±1dBm	24±1dBm	N/A	20±1dBm
20	50		22±1dBm	23±1dBm	N/A	19±1dBm
20	100		22±1dBm	22±1dBm	N/A	18±1dBm



BW[MHz]	RB Size	Mode	Band 12	Band 17
1.4	1	QPSK	24±1dBm	N/A
1.4	3		24±1dBm	N/A
1.4	6		23±1dBm	N/A
1.4	1	16- QAM	24±1dBm	N/A
1.4	3		24±1dBm	N/A
1.4	6		23±1dBm	N/A
3	1	QPSK	24±1dBm	N/A
3	8		23±1dBm	N/A
3	15		22±1dBm	N/A
3	1	16- QAM	24±1dBm	N/A
3	8		23±1dBm	N/A
3	15		22±1dBm	N/A
5	1	QPSK	24±1dBm	22±1dBm
5	12		24±1dBm	21±1dBm
5	25		23±1dBm	20±1dBm
5	1	16- QAM	24±1dBm	21±1dBm
5	12		23±1dBm	21±1dBm
5	25		23±1dBm	20±1dBm
10	1	QPSK	25±1dBm	22±1dBm
10	25		24±1dBm	21±1dBm
10	50		23±1dBm	21±1dBm
10	1	16- QAM	25±1dBm	22±1dBm
10	25		24±1dBm	21±1dBm
10	50		23±1dBm	20±1dBm
15	1	QPSK	N/A	N/A
15	36		N/A	N/A
15	75		N/A	N/A
15	1	16- QAM	N/A	N/A
15	36		N/A	N/A
15	75		N/A	N/A
20	1	QPSK	N/A	N/A
20	50		N/A	N/A
20	100		N/A	N/A
20	1	16- QAM	N/A	N/A
20	50		N/A	N/A
20	100		N/A	N/A



10.3 SAR Test Exclusions Applied

Per FCC KDB 447498D01, the 1-g SAR and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at test separation distances ≤ 50 mm are determined by:

$[(\text{max. power of channel, including tune-up tolerance, mW})/(\text{min. test separation distance, mm})] \cdot [\sqrt{f(\text{GHz})}] \leq 3.0$ for 1-g SAR and ≤ 7.5 for 10-g extremity SAR, where:

- $f(\text{GHz})$ is the RF channel transmit frequency in GHz
- Power and distance are rounded to the nearest mW and mm before calculation
- The result is rounded to one decimal place for comparison

When the minimum test separation distance is < 5 mm, a distance of 5 mm is applied to determine SAR test exclusion.

$$\frac{\text{Max Power of Channel (mW)}}{\text{Test Separation Dist (mm)}} * \sqrt{\text{Frequency (GHz)}} \leq 3.0$$

Based on the maximum conducted power of **Bluetooth Head** (rounded to the nearest mW) and the antenna to user separation distance,

Bluetooth Head SAR was not required; $[(7.943/5) * \sqrt{2.480}] = 2.50 < 3.0$.

Based on the maximum conducted power of **Bluetooth Body** (rounded to the nearest mW) and the antenna to user separation distance,

Bluetooth Body SAR was not required; $[(7.943/10) * \sqrt{2.480}] = 1.25 < 3.0$.

Based on the maximum conducted power of **2.4 GHz WLAN Head** (rounded to the nearest mW) and the antenna to user separation distance,

2.4 GHz WLAN SAR was required; $[(19.953/5) * \sqrt{2.462}] = 6.26 > 3.0$.

Based on the maximum conducted power of **2.4 GHz WLAN Body** (rounded to the nearest mW) and the antenna to user separation distance,

2.4 GHz WLAN SAR was required; $[(19.953/10) * \sqrt{2.462}] = 3.13 > 3.0$.

11. EUT And Test Setup Photo

11.1 EUT Photo

Front side




Back side





Top Edge

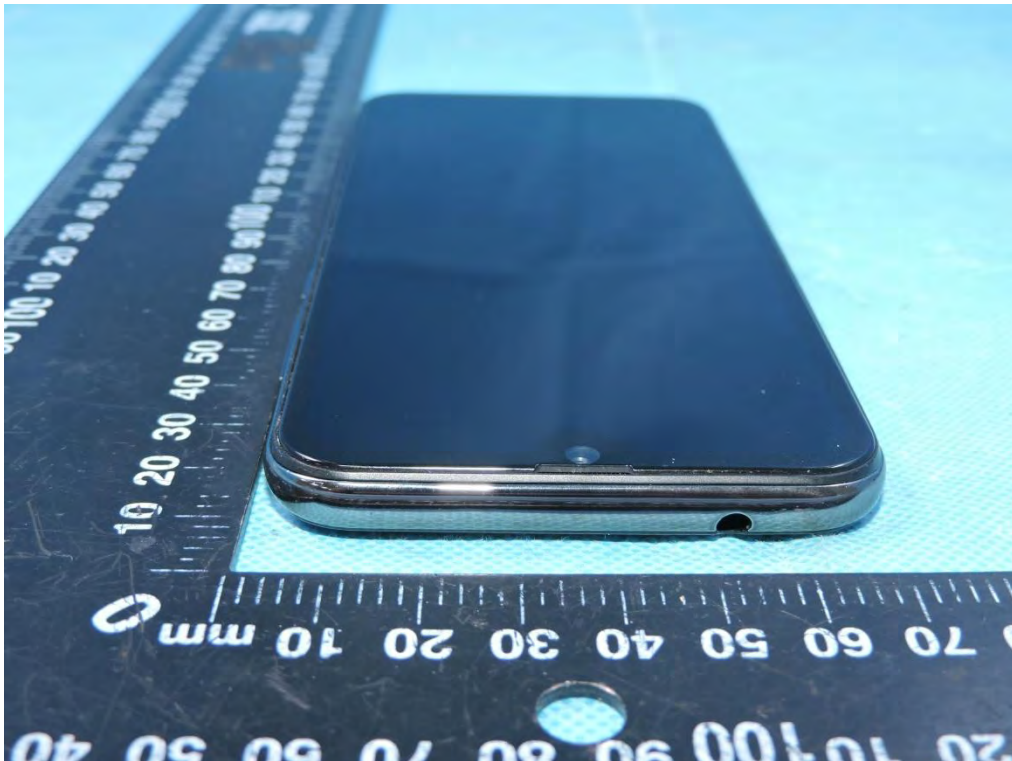


Bottom Edge





Left Edge

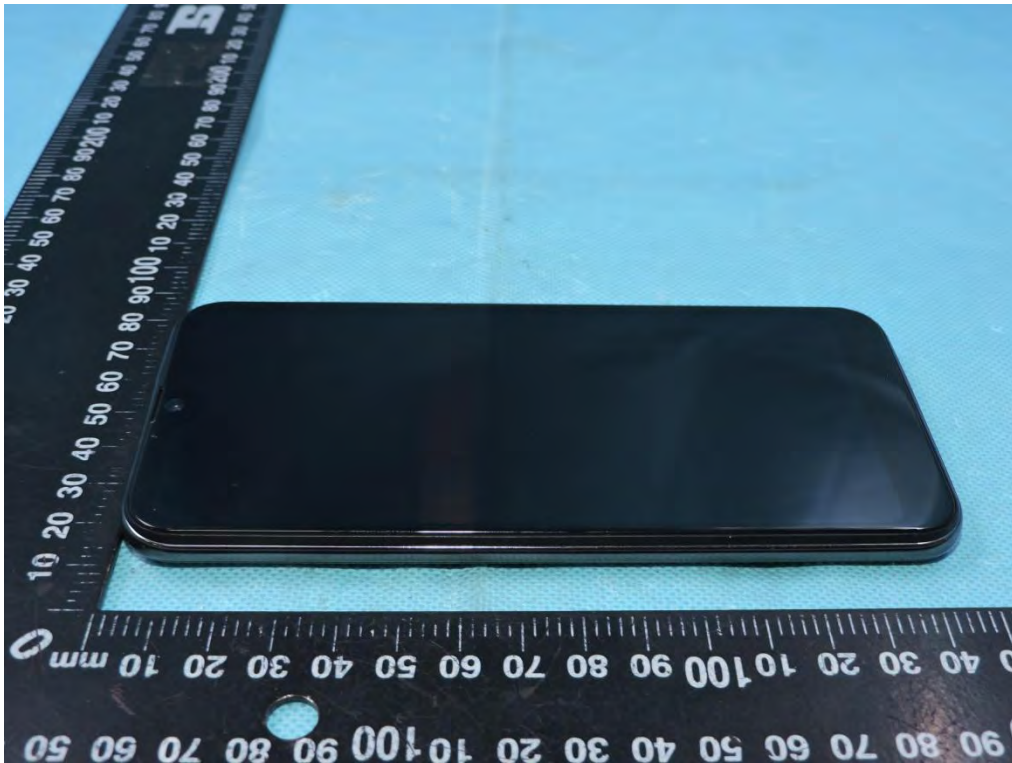


Right Edge




11.2 Setup Photo


Right Touch

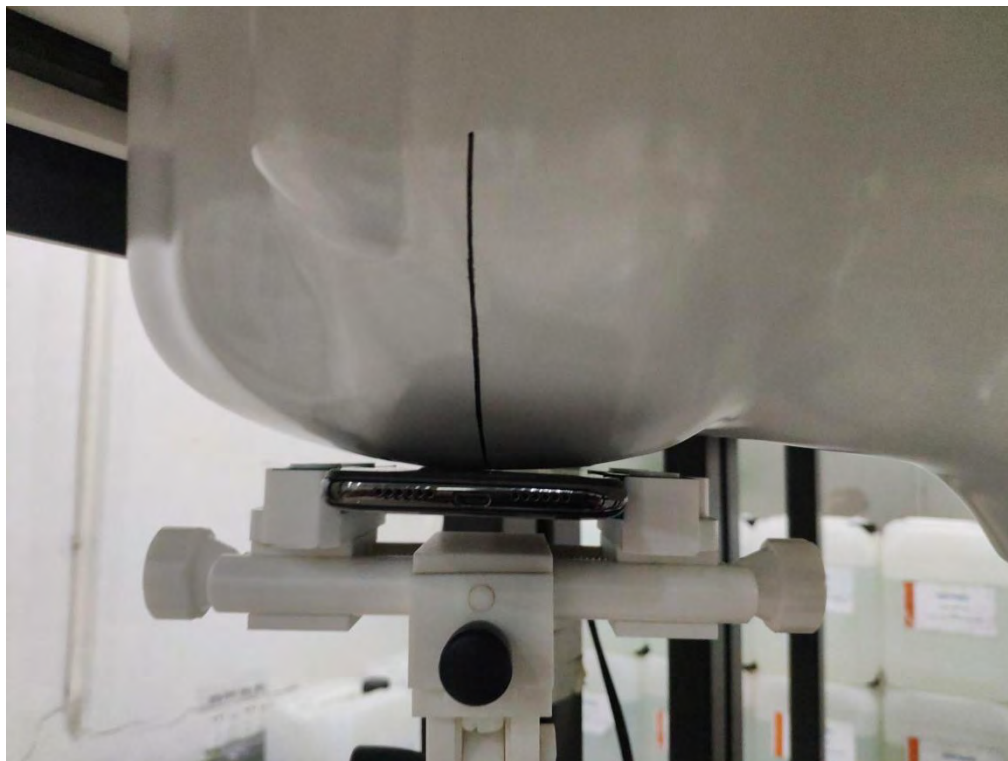


Right Tilt

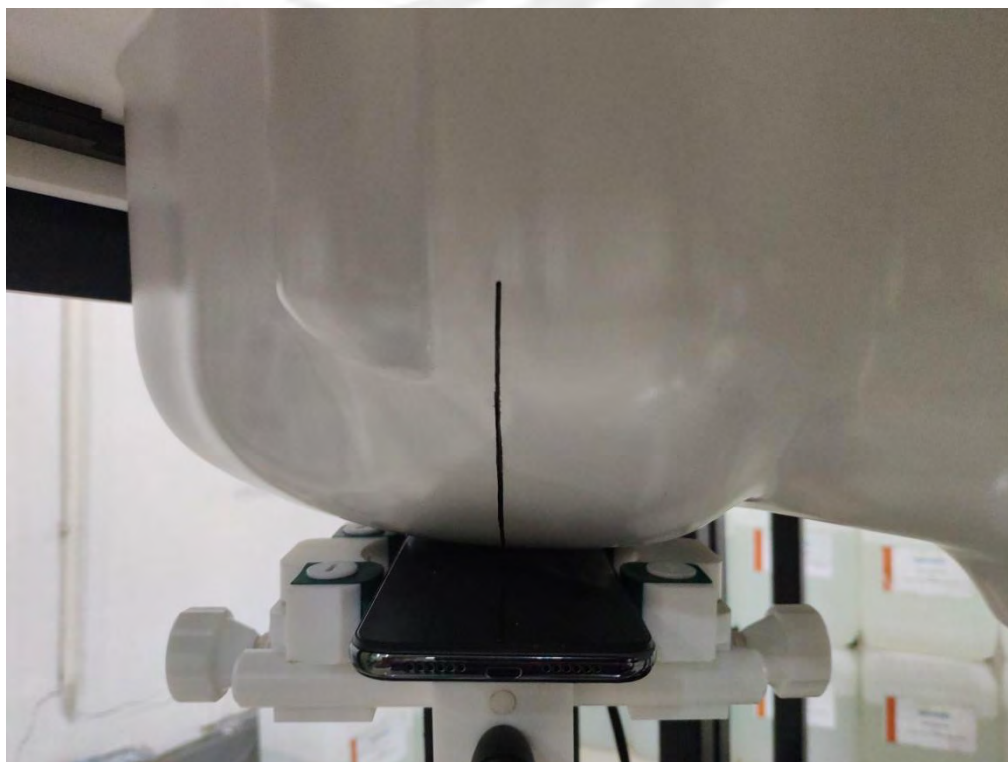

Left Touch

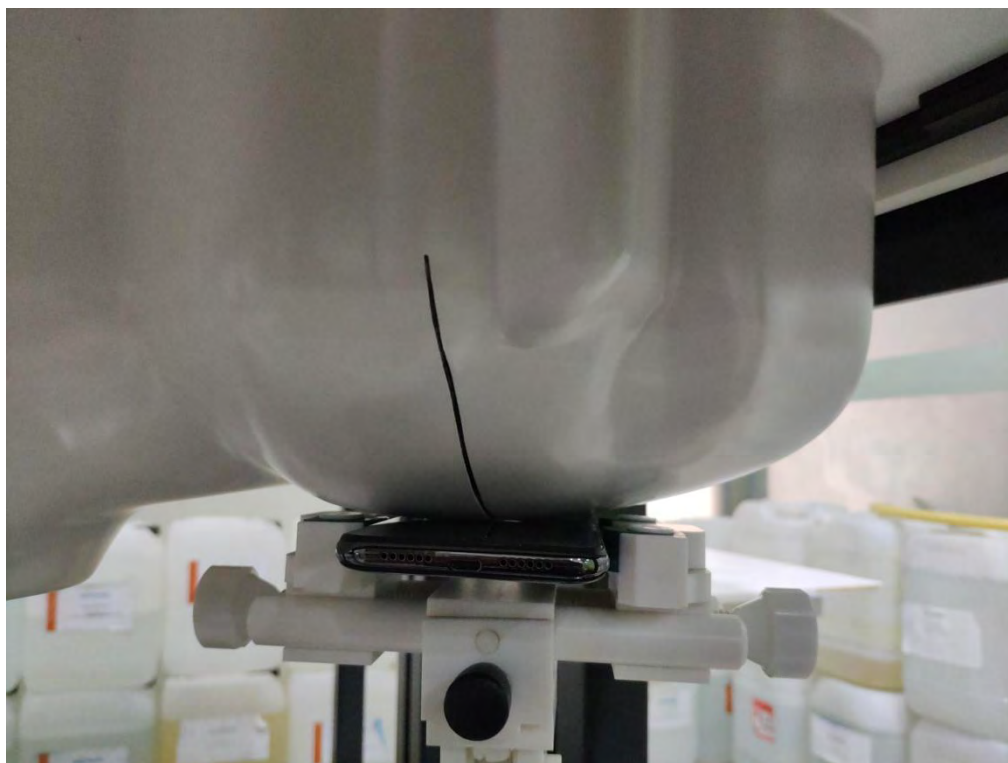


Left Tilt

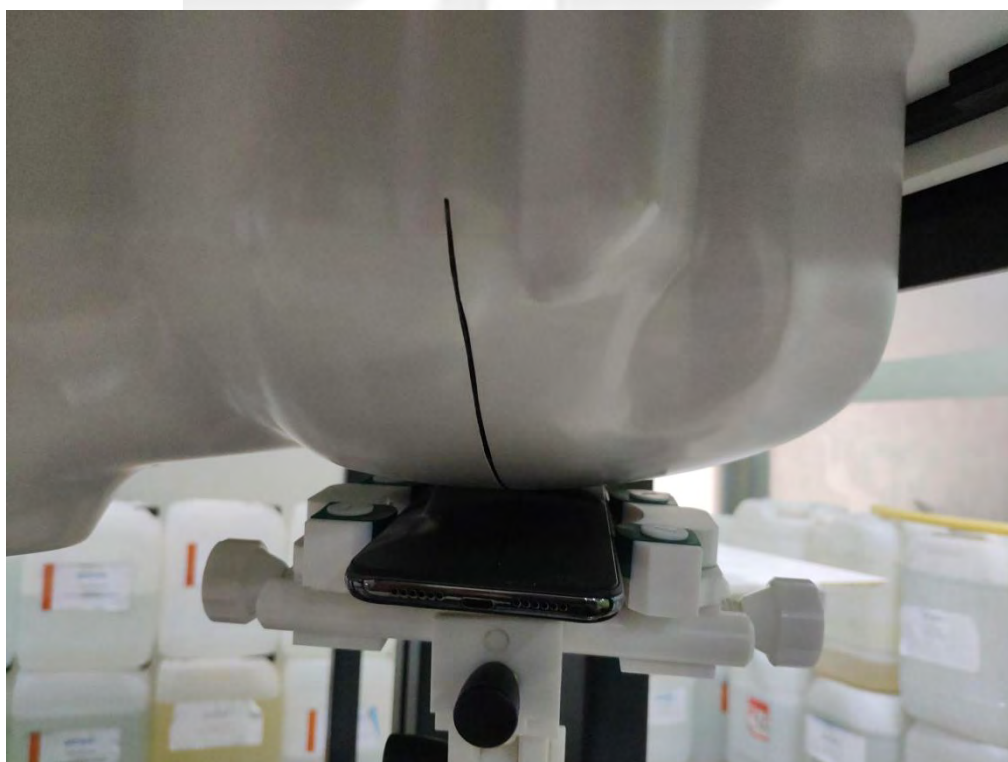

Body Front side(separation distance is 10mm)



Body Back side(separation distance is 10mm)

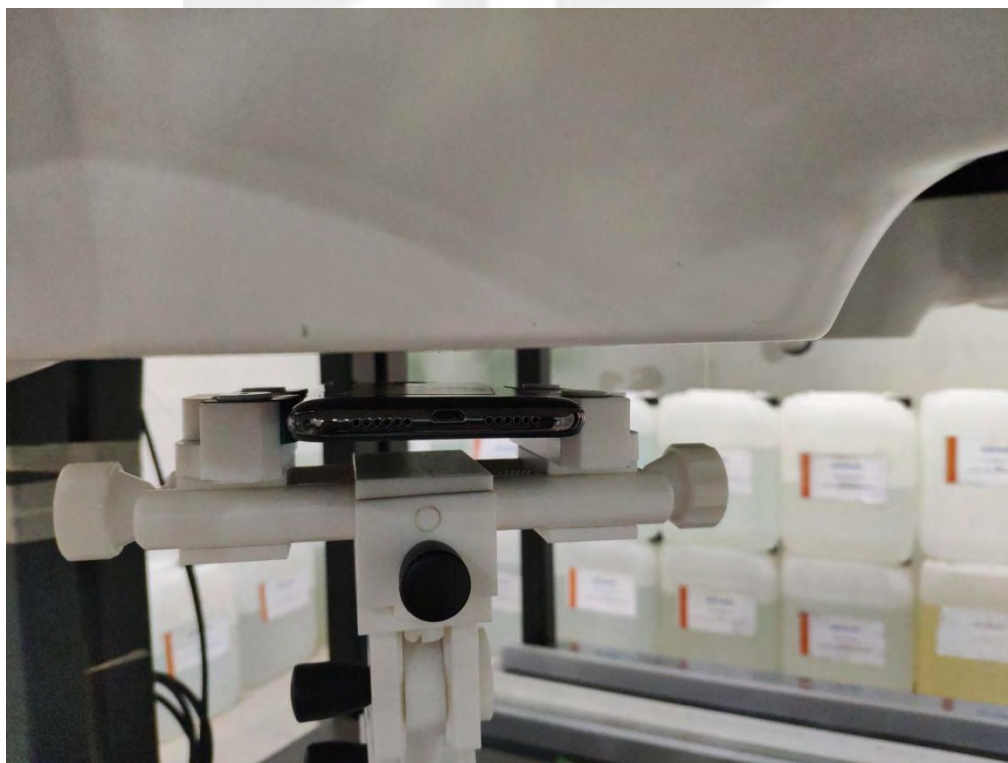

Left Edge(separation distance is 10mm)



Right Edge(separation distance is 10mm)




Top Edge(separation distance is 10mm)



Bottom Edge(separation distance is 10mm)



Liquid depth (15 cm)

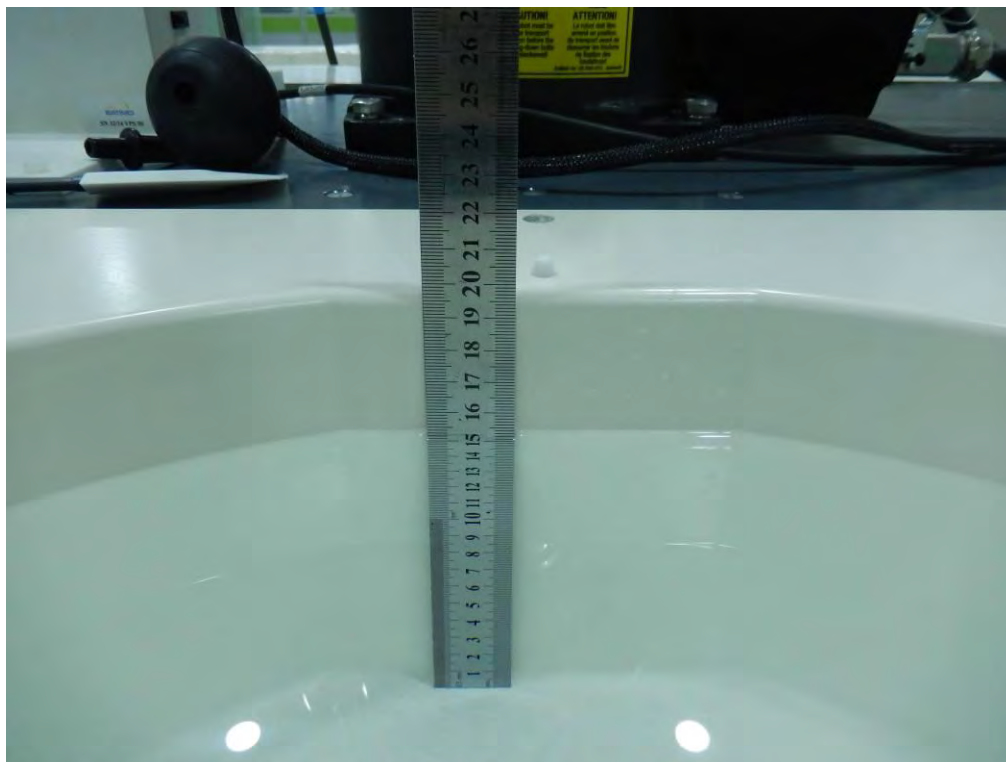



12. SAR Result Summary

12.1 Head SAR

Band	Mode	Test Position	Ch.	Result 1g (W/Kg)	Power Drift(%)	Max.Turn-up Power(dBm)	Meas.Output Power(dBm)	Scaled SAR (W/Kg)	Meas. No.
GSM 850	GPRS Data-4 Slot	Right Cheek	128	0.408	3.91	27	26.88	0.419	1
		Right Tilt	128	0.337	1.67	27	26.88	0.346	/
		Left Cheek	128	0.394	-1.10	27	26.88	0.405	/
		Left Tilt	128	0.347	3.95	27	26.88	0.357	/
GSM1900	GPRS Data-4 Slot	Right Cheek	810	0.203	1.89	24	23.46	0.230	3
		Right Tilt	810	0.090	-2.38	24	23.46	0.102	/
		Left Cheek	810	0.163	-0.10	24	23.46	0.185	/
		Left Tilt	810	0.075	-0.82	24	23.46	0.085	/
WCDMA II	RMC	Right Cheek	9262	0.368	-2.60	23	22.36	0.426	5
		Right Tilt	9262	0.128	1.37	23	22.36	0.148	/
		Left Cheek	9262	0.327	0.14	23	22.36	0.379	/
		Left Tilt	9262	0.205	-2.73	23	22.36	0.238	/
WCDMA V	RMC	Right Cheek	4233	0.281	1.00	22	21.35	0.326	7
		Right Tilt	4233	0.197	-3.29	22	21.35	0.229	/
		Left Cheek	4233	0.260	1.28	22	21.35	0.302	/
		Left Tilt	4233	0.173	-2.47	22	21.35	0.201	/

Band	Mode	Test Position	Ch.	Result 1g (W/Kg)	Power Drift(%)	Max.Turn-up Power(dBm)	Meas.Output Power(dBm)	Duty cycle(%)	Scaled SAR (W/Kg)	Meas. No.
WLAN 2.4 G	802.11b	Right Cheek	6	0.096	-3.70	13	12.98	100	0.096	/
		Right Tilt	6	0.159	-1.96	13	12.98	100	0.160	/
		Left Cheek	6	0.174	0.13	13	12.98	100	0.175	/
		Left Tilt	6	0.280	-2.99	13	12.98	100	0.281	9

Note:

- Per KDB 447498 D01, the reported SAR is the measured SAR value adjusted for maximum tune-up tolerance.
 - Tune-up scaling Factor = tune-up limit power (mW) / EUT RF power (mW), where tune-up limit is the maximum rated power among all production units.
 - For WWAN: Scaled SAR(W/kg)= Measured SAR(W/kg)*Tune-up Scaling Factor
- Per KDB 248227- When the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg. (The highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power was **0.082** W/Kg for Head)
- Per KDB865664 D01, Repeated measurement is not required when the original highest measured SAR is <0.80 W/kg



Band	BW (MHz)	Mod.	RB Size	RB offset	Test Position	Ch.	Result 1g (W/Kg)	Power Drift(%)	Max. Turn-up Power(dBm)	Meas. Output Power(dBm)	Scaled SAR (W/Kg)	Meas. No.
LTE Band 2	20M	QPSK	1	0	Right Cheek	18900	0.412	-3.15	24	23.81	0.430	11
			50	0	Right Cheek	19100	0.247	-2.22	24	23.04	0.308	/
			1	0	Right Tilt	18900	0.145	2.07	24	23.81	0.151	/
			50	0	Right Tilt	19100	0.082	2.13	24	23.04	0.102	/
			1	0	Left Cheek	18900	0.278	-0.90	24	23.81	0.290	/
			50	0	Left Cheek	19100	0.124	0.32	24	23.04	0.155	/
			1	0	Left Tilt	18900	0.196	-1.26	24	23.81	0.205	/
			50	0	Left Tilt	19100	0.063	2.38	24	23.04	0.079	/
LTE Band 4	20M	QPSK	1	0	Right Cheek	20175	0.386	-0.65	25	24.37	0.446	13
			50	0	Right Cheek	20175	0.311	3.54	24	23.61	0.340	/
			1	0	Right Tilt	20175	0.142	-1.04	25	24.37	0.164	/
			50	0	Right Tilt	20175	0.105	1.99	24	23.61	0.115	/
			1	0	Left Cheek	20175	0.317	2.13	25	24.37	0.366	/
			50	0	Left Cheek	20175	0.254	1.14	24	23.61	0.278	/
			1	0	Left Tilt	20175	0.175	-2.02	25	24.37	0.202	/
			50	0	Left Tilt	20175	0.122	-1.58	24	23.61	0.133	/
LTE Band 5	10M	QPSK	1	0	Right Cheek	20525	0.295	1.61	26	25.71	0.315	15
			25	0	Right Cheek	20525	0.213	1.82	25	24.98	0.214	/
			1	0	Right Tilt	20525	0.177	-0.26	26	25.71	0.189	/
			25	0	Right Tilt	20525	0.125	1.66	25	24.98	0.126	/
			1	0	Left Cheek	20525	0.283	0.98	26	25.71	0.303	/
			25	0	Left Cheek	20525	0.190	-0.84	25	24.98	0.191	/
			1	0	Left Tilt	20525	0.212	-3.85	26	25.71	0.227	/
			25	0	Left Tilt	20525	0.136	3.05	25	24.98	0.137	/
LTE Band 7	20M	QPSK	1	0	Right Cheek	20850	0.232	1.37	21	20.65	0.251	/
			50	0	Right Cheek	20850	0.186	0.56	20	19.90	0.190	/
			1	0	Right Tilt	20850	0.169	3.29	21	20.65	0.183	/
			50	0	Right Tilt	20850	0.115	1.42	20	19.90	0.118	/
			1	0	Left Cheek	20850	0.406	-0.03	21	20.65	0.440	17
			50	0	Left Cheek	20850	0.313	-2.57	20	19.90	0.320	/
			1	0	Left Tilt	20850	0.172	-3.68	21	20.65	0.186	/
			50	0	Left Tilt	20850	0.128	-2.81	20	19.90	0.131	/
LTE Band 12	10M	QPSK	1	0	Right Cheek	23060	0.090	-3.68	26	25.30	0.106	/
			25	0	Right Cheek	23060	0.067	-2.38	25	24.60	0.073	/
			1	0	Right Tilt	23060	0.061	-0.50	26	25.30	0.072	/
			25	0	Right Tilt	23060	0.044	1.40	25	24.60	0.048	/
			1	0	Left Cheek	23060	0.093	1.56	26	25.30	0.109	19
			25	0	Left Cheek	23060	0.070	0.20	25	24.60	0.077	/
			1	0	Left Tilt	23060	0.065	-1.97	26	25.30	0.076	/
			25	0	Left Tilt	23060	0.033	2.24	25	24.60	0.036	/
LTE Band 17	10M	QPSK	1	0	Right Cheek	23780	0.085	-3.45	23	22.50	0.095	/
			25	0	Right Cheek	23780	0.052	-0.68	22	21.80	0.054	/
			1	0	Right Tilt	23780	0.071	2.09	23	22.50	0.080	/
			25	0	Right Tilt	23780	0.044	0.45	22	21.80	0.046	/
			1	0	Left Cheek	23780	0.090	-3.30	23	22.50	0.101	21
			25	0	Left Cheek	23780	0.065	0.86	22	21.80	0.068	/
			1	0	Left Tilt	23780	0.077	1.11	23	22.50	0.086	/
			25	0	Left Tilt	23780	0.042	-1.49	22	21.80	0.044	/



12.2 Body-worn and Hotspot SAR

Band	Mode	Test Position	Ch.	Result 1g (W/Kg)	Power Drift(%)	Max.Turn-up Power(dBm)	Meas.Output Power(dBm)	Scaled SAR (W/Kg)	Meas. No.
GSM 850	GPRS Data-4 Slot	Front side	128	0.384	2.63	27	26.88	0.395	/
		Back side	128	0.464	-0.09	27	26.88	0.477	2
		Left Edge	128	0.271	-3.64	27	26.88	0.279	/
		Right Edge	128	0.293	-2.49	27	26.88	0.301	
		Bottom Edge	128	0.042	1.47	27	26.88	0.043	/
GSM1900	GPRS Data-4 Slot	Front side	810	0.357	0.30	24	23.46	0.404	/
		Back side	810	0.273	-0.87	24	23.46	0.309	/
		Left Edge	810	0.205	3.89	24	23.46	0.232	/
		Right Edge	810	0.151	-2.94	24	23.46	0.171	/
		Bottom Edge	810	0.497	-1.18	24	23.46	0.563	4
WCDMA II	RMC	Front side	9262	0.541	2.31	23	22.36	0.627	/
		Back side	9262	0.327	2.19	23	22.36	0.379	/
		Left Edge	9262	0.140	2.51	23	22.36	0.162	/
		Right Edge	9262	0.120	0.08	23	22.36	0.139	/
		Bottom Edge	9262	0.668	2.18	23	22.36	0.774	6
WCDMA V	RMC	Front side	4233	0.274	-0.78	22	21.35	0.318	/
		Back side	4233	0.318	0.25	22	21.35	0.369	8
		Left Edge	4233	0.188	-3.18	22	21.35	0.218	/
		Right Edge	4233	0.185	-3.40	22	21.35	0.215	
		Bottom Edge	4233	0.029	-1.92	22	21.35	0.034	/



Band	Mode	Test Position	Ch.	Result 1g (W/Kg)	Power Drift(%)	Max.Turn-up Power(dBm)	Meas.Output Power(dBm)	Duty cycle(%)	Scaled SAR (W/Kg)	Meas. No.
WLAN	802.11b	Front side	6	0.070	1.45	13	12.98	100	0.070	/
		Back side	6	0.130	2.38	13	12.98	100	0.131	10
		Right Edge	6	0.052	-2.17	13	12.98	100	0.052	/
		Top Edge	6	0.065	-1.80	13	12.98	100	0.065	/

Note:

1. The test separation of all above table is 10mm.
2. Per KDB 447498 D01, the reported SAR is the measured SAR value adjusted for maximum tune-up tolerance.
 - a. Tune-up scaling Factor = tune-up limit power (mW) / EUT RF power (mW), where tune-up limit is the maximum rated power among all production units.
 - b. For WWAN: Scaled SAR(W/kg)= Measured SAR(W/kg)*Tune-up Scaling Factor
3. Per KDB 248227- When the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg. (The highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power was **0.038** W/Kg for Body)
4. When the user enables the personal Wireless router functions for the handsets, actual operations include simultaneous transmission of both the Wi-Fi transmitting frequency and thus cannot be evaluated for SAR under actual use conditions. The "Portable Hotspot" feature on the handset was NOT activated, to ensure the SAR measurements were evaluated for a single transmission frequency RF signal.



Band	BW (MHz)	Mod.	RB Size	RB offset	Test Position	Ch.	Result 1g (W/Kg)	Power Drift(%)	Max. Turn-up Power(dBm)	Meas. Output Power(dBm)	Scaled SAR (W/Kg)	Meas. No.
LTE Band 2	20M	QPSK	1	0	Front side	18900	0.509	3.55	24	23.81	0.532	/
			50	0	Front side	19100	0.412	0.39	24	23.04	0.514	/
			1	0	Back Side	18900	0.373	1.94	24	23.81	0.390	/
			50	0	Back Side	19100	0.280	0.54	24	23.04	0.349	/
			1	0	Left Edge	18900	0.135	-2.66	24	23.81	0.141	/
			50	0	Left Edge	19100	0.084	0.89	24	23.04	0.105	/
			1	0	Right Edge	18900	0.116	3.51	24	23.81	0.121	/
			50	0	Right Edge	19100	0.067	-1.76	24	23.04	0.084	/
			1	0	Bottom Edge	18900	0.710	0.96	24	23.81	0.742	12
			50	0	Bottom Edge	19100	0.584	-3.68	24	23.04	0.728	/
LTE Band 4	20M	QPSK	1	0	Front side	20050	0.823	2.11	25	24.26	0.976	/
			1	0	Front side	20175	0.870	0.42	25	24.37	1.006	/
			1	0	Front side	20300	0.795	-1.57	25	24.19	0.958	/
			50	0	Front side	20175	0.726	-1.88	24	23.61	0.794	/
			100	0	Front side	20175	0.685	3.61	23	22.89	0.703	/
			1	0	Back Side	20050	0.907	-1.25	25	24.26	1.075	/
			1	0	Back Side	20175	0.963	0.98	25	24.37	1.113	/
			1	0	Back Side	20300	0.880	3.18	25	24.19	1.060	/
			50	0	Back Side	20050	0.754	1.57	24	23.44	0.858	/
			50	0	Back Side	20175	0.815	0.10	24	23.61	0.892	/
			50	0	Back Side	20300	0.802	2.36	24	23.77	0.846	/
			100	0	Back Side	20175	0.726	-3.33	23	22.89	0.745	/
			1	0	Left Edge	20175	0.244	-2.30	25	24.37	0.282	/
			50	0	Left Edge	20175	0.137	3.51	24	23.61	0.150	/
			1	0	Right Edge	20175	0.212	-1.07	25	24.37	0.245	/
			50	0	Right Edge	20175	0.114	-3.68	24	23.61	0.125	/
			1	0	Bottom Edge	20050	0.973	1.49	25	24.26	1.154	/
			1	0	Bottom Edge	20175	1.084	2.94	25	24.37	1.253	14
			1	0	Bottom Edge	20300	0.941	-1.84	25	24.19	1.134	/
			50	0	Bottom Edge	20050	0.762	-2.83	24	23.44	0.867	/
			50	0	Bottom Edge	20175	0.848	2.71	24	23.61	0.928	/
			50	0	Bottom Edge	20300	0.811	-3.76	24	23.77	0.855	/
			100	0	Bottom Edge	20175	0.764	-2.30	23	22.89	0.784	/
LTE Band 5	10M	QPSK	1	0	Front side	20525	0.263	3.69	26	25.71	0.281	/
			25	0	Front side	20525	0.186	0.21	25	24.98	0.187	/
			1	0	Back Side	20525	0.290	2.99	26	25.71	0.310	16
			25	0	Back Side	20525	0.235	2.62	25	24.98	0.236	/
			1	0	Left Edge	20525	0.187	1.95	26	25.71	0.200	/
			25	0	Left Edge	20525	0.134	-1.38	25	24.98	0.135	/
			1	0	Right Edge	20525	0.191	-2.18	26	25.71	0.204	/
			25	0	Right Edge	20525	0.155	-2.17	25	24.98	0.156	/
			1	0	Bottom Edge	20525	0.025	2.80	26	25.71	0.027	/
			25	0	Bottom Edge	20525	0.012	2.22	25	24.98	0.012	/



LTE Band 7	20M	QPSK	1	0	Front side	20850	0.759	-1.92	21	20.65	0.823	18
			1	0	Front side	21100	0.722	2.41	21	20.60	0.792	/
			1	0	Front side	21350	0.695	0.86	21	20.57	0.767	/
			50	0	Front side	20850	0.672	1.51	20	19.90	0.688	/
			100	0	Front side	21350	0.539	0.78	20	19.22	0.645	/
			1	0	Back Side	20850	0.455	-3.42	21	20.65	0.493	/
			50	0	Back Side	20850	0.383	0.76	20	19.90	0.392	/
			1	0	Left Edge	20850	0.336	0.05	21	20.65	0.364	/
			50	0	Left Edge	20850	0.274	-1.89	20	19.90	0.280	/
			1	0	Right Edge	20850	0.188	-3.53	21	20.65	0.204	/
			50	0	Right Edge	20850	0.116	2.88	20	19.90	0.119	/
			1	0	Bottom Edge	20850	0.599	-1.15	21	20.65	0.649	/
			50	0	Bottom Edge	20850	0.435	0.48	20	19.90	0.445	/
LTE Band 12	10M	QPSK	1	0	Front side	23060	0.138	3.93	26	25.30	0.162	/
			25	0	Front side	23060	0.091	-0.35	25	24.60	0.100	/
			1	0	Back Side	23060	0.156	-1.42	26	25.30	0.183	20
			25	0	Back Side	23060	0.114	-3.19	25	24.60	0.125	/
			1	0	Left Edge	23060	0.127	1.21	26	25.30	0.149	/
			25	0	Left Edge	23060	0.085	1.31	25	24.60	0.093	/
			1	0	Right Edge	23060	0.072	-3.57	26	25.30	0.085	/
			25	0	Right Edge	23060	0.055	-1.54	25	24.60	0.060	/
			1	0	Bottom Edge	23060	0.014	-3.63	26	25.30	0.016	/
			25	0	Bottom Edge	23060	0.006	-2.18	25	24.60	0.007	/
LTE Band 17	10M	QPSK	1	0	Front side	23780	0.095	-1.86	23	22.50	0.107	/
			25	0	Front side	23780	0.050	1.92	22	21.80	0.052	/
			1	0	Back Side	23780	0.138	-0.36	23	22.50	0.155	22
			25	0	Back Side	23780	0.086	-3.10	22	21.80	0.090	/
			1	0	Left Edge	23780	0.105	-0.90	23	22.50	0.118	/
			25	0	Left Edge	23780	0.067	0.99	22	21.80	0.070	/
			1	0	Right Edge	23780	0.108	-2.98	23	22.50	0.121	/
			25	0	Right Edge	23780	0.063	0.21	22	21.80	0.066	/
			1	0	Bottom Edge	23780	0.010	-1.05	23	22.50	0.011	/
			25	0	Bottom Edge	23780	0.004	-0.38	22	21.80	0.004	/

**Repeated SAR**

Band	Mode	Test Position	Ch.	RB Size	RB offset	Result 1g (W/Kg)	Power Drift(%)	Max.Turn-up Power(dBm)	Meas.Output Power(dBm)	Scaled SAR(W/Kg)	Meas. No.
LTE Band 4	QPSK	Front side	20175	1	0	0.855	1.38	25	24.37	0.988	/
LTE Band 4	QPSK	Back side	20175	1	0	0.915	-2.55	25	24.37	1.058	/
LTE Band 4	QPSK	Back side	20175	50	0	0.796	0.81	24	23.61	0.871	/
LTE Band 4	QPSK	Bottom side	20175	1	0	1.025	2.76	25	24.37	1.185	/
LTE Band 4	QPSK	Bottom side	20175	50	0	0.813	-0.82	24	23.61	0.889	/
LTE Band 7	QPSK	Front side	20850	1	0	0.735	-3.63	21	20.65	0.797	/

12.3 repeated SAR measurement

Band	Mode	Test Position	Ch.	RB Size	RB offset	Original Measured SAR 1g(mW/g)	1 st Repeated SAR 1g	Ratio	Original Measured SAR 1g(mW/g)	2nd Repeated SAR 1g	Ratio
LTE Band 4	QPSK	Front side	20175	1	0	0.870	0.855	1.02	-	-	-
LTE Band 4	QPSK	Back side	20175	1	0	0.963	0.915	1.05	-	-	-
LTE Band 4	QPSK	Back side	20175	50	0	0.815	0.796	1.02	-	-	-
LTE Band 4	QPSK	Bottom side	20175	1	0	1.084	1.025	1.06	-	-	-
LTE Band 4	QPSK	Bottom side	20175	50	0	0.848	0.813	1.04	-	-	-
LTE Band 7	QPSK	Front side	20850	1	0	0.759	0.735	1.03	-	-	-

Note:

1. Per KDB 865664 D01V01,for each frequency band ,repeated SAR measurement is required only when the measured SAR is $\geq 0.8\text{W/Kg}$.
2. Per KDB 865664 D01V01,if the ratio of largest to smallest SAR for the original and first repeated measurement is ≤ 1.2 and the measured SAR $< 1.45\text{W/Kg}$, only one repeated measurement is required.
3. Perform a second repeated measurement only if the ratio of largest to smallest SAR for the original and first repeated measurements is > 1.20 or when the original or repeated measurement is $\geq 1.45\text{W/Kg}$
4. The ratio is the difference in percentage between original and repeated measured SAR.

**Simultaneous Multi-band Transmission Evaluation:**

Application Simultaneous Transmission information:

Position	Simultaneous state
Head	1. GSM + WLAN
	2. GSM + Bluetooth
	3. WCDMA + WLAN
	4. WCDMA + Bluetooth
	5. LTE + WLAN
	6. LTE + Bluetooth
Body	1. GSM + WLAN
	2. GSM + Bluetooth
	3. WCDMA + WLAN
	4. WCDMA + Bluetooth
	5. LTE + WLAN
	6. LTE + Bluetooth

NOTE:

1. Bluetooth and WLAN can't simultaneous transmission at the same time.
2. For simultaneous transmission at head and body exposure position, 2 transmitters simultaneous transmission was the worst state.
3. Based upon KDB 447498 D01, BT SAR is excluded as below table.
4. If the test separation distance is <5mm, 5mm is used for excluded SAR calculation.
5. For minimum test separation distance $\leq 50\text{mm}$, Bluetooth standalone SAR is excluded according to $[(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm})] \cdot [\sqrt{f} (\text{GHz}) / x] \leq 3.0$ for 1-g SAR and ≤ 7.5 for 10-g extremity SAR
6. The reported SAR summation is calculated based on the same configuration and test position.
7. KDB 447498 / 4.3.2 (2) when standalone SAR test exclusion applies to an antenna that transmits simultaneously with other antennas, the standalone SAR must be estimated according to following to determine simultaneous transmission SAR test exclusion:
 - a) $(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm}) \cdot [\sqrt{f} (\text{GHz}) / x] \text{ W/kg}$ for test separation distances $\leq 50 \text{ mm}$; Where $x = 7.5$ for 1-g SAR, and $x = 18.75$ for 10-g SAR.
 - b) 0.4W/Kg for 1-g SAR and 1.0W/Kg for 10-g SAR, when the separation distance is $>50\text{mm}$.

Estimated SAR		Maximum Power		Antenna to user(mm)	Frequency(GHz)	Stand alone SAR(1g) [W/kg]
		dBm	mW			
BT	Head	9	7.943	5	2.480	0.334
	Body			10	2.480	0.167



Simultaneous Mode	Position	Mode	Max. 10-g SAR (W/kg)	10-g Sum SAR (W/kg)
GSM + 2.4GHz WLAN	Head	GSM DATA	0.419	0.700
		2.4GHz WLAN	0.281	
	Body	GSM DATA	0.563	0.694
		2.4GHz WLAN	0.131	
WCDMA RMC+ 2.4GHz WLAN	Head	WCDMA RMC	0.426	0.707
		2.4GHz WLAN	0.281	
	Body	WCDMA RMC	0.774	0.905
		2.4GHz WLAN	0.131	
LTE + 2.4GHz WLAN	Head	LTE	0.446	0.727
		2.4GHz WLAN	0.281	
	Body	LTE	1.253	1.384
		2.4GHz WLAN	0.131	
GSM + Bluetooth	Head	GSM DATA	0.419	0.753
		Bluetooth	0.334	
	Body	GSM DATA	0.563	0.730
		Bluetooth	0.167	
WCDMA + Bluetooth	Head	WCDMA RMC	0.426	0.760
		Bluetooth	0.334	
	Body	WCDMA RMC	0.774	0.941
		Bluetooth	0.167	
LTE + Bluetooth	Head	LTE	0.446	0.780
		Bluetooth	0.334	
	Body	LTE	1.253	1.420
		Bluetooth	0.167	

Simultaneous transmission SAR test exclusion is determined for each operating configuration and exposure condition according to the reported standalone SAR of each applicable simultaneous transmitting antenna.

When the sum of SAR 1g of all simultaneously transmitting antennas in an operating mode and exposure condition combination is within the SAR limit (SAR-1g 1.6 W/kg), the simultaneous transmission SAR is not required. When the sum of SAR 1g is greater than the SAR limit (SAR-1g 1.6 W/kg), SAR test exclusion is determined by the SPLSR.



13. Equipment List

Kind of Equipment	Manufacturer	Type No.	Serial No.	Last Calibration	Calibrated Until
750MHz Dipole	MVG	SID750	SN 30/14 DIP0G750-331	2017.08.15	2020.08.14
835MHz Dipole	MVG	SID835	SN 30/14 DIP0G835-332	2017.08.15	2020.08.14
1800MHz Dipole	MVG	SID1800	SN 30/14 DIP1G800-329	2017.08.15	2020.08.14
1900MHz Dipole	MVG	SID1900	SN 30/14 DIP1G900-333	2017.08.15	2020.08.14
2450MHzDipole	MVG	SID2450	SN 30/14 DIP2G450-335	2017.08.15	2020.08.14
2600MHz Dipole	MVG	SID2600	SN 30/14 DIP2G600-336	2017.08.15	2020.08.14
E-Field Probe	MVG	SSE2	SN 45/15 EPGO281	2019.03.25	2020.03.24
Dielectric Probe Kit	MVG	SCLMP	SN 32/14 OCPG67	2018.12.01	2019.11.30
Antenna	MVG	ANTA3	SN 07/13 ZNTA52	N/A	N/A
Phantom1	MVG	SAM	SN 32/14 SAM115	N/A	N/A
Phantom2	MVG	SAM	SN 32/14 SAM116	N/A	N/A
Phone holder	MVG	N/A	SN 32/14 MSH97	N/A	N/A
Laptop holder	MVG	N/A	SN 32/14 LSH29	N/A	N/A
Attenuator	Agilent	99899	DC-18GHz	N/A	N/A
Directional coupler	Narda	4226-20	3305	N/A	N/A
Network Analyzer	Agilent	8753ES	US38432810	2019.10.11	2020.10.10
Multi Meter	Keithley	Multi Meter 2000	4050073	2019.10.11	2020.10.10
Signal Generator	Agilent	N5182A	MY50140530	2019.10.09	2020.10.08
Wireless Communication Test Set	Agilent	8960-E5515C	MY48360751	2019.10.09	2020.10.08
Wireless Communication Test Set	R&S	CMW500	117239	2019.10.09	2020.10.08
Power Amplifier	DESAY	ZHL-42W	9638	2019.10.09	2020.10.08
Power Meter	R&S	NRP	100510	2019.10.16	2020.10.15
Power Meter	Agilent	E4418B	GB43312526	2019.10.16	2020.10.15
Power Sensor	R&S	NRP-Z11	101919	2019.10.12	2020.10.11
Power Sensor	Agilent	E9301A	MY41497725	2019.10.12	2020.10.11
hygrothermograph	MiEO	HH660	N/A	2019.10.13	2020.10.12
Thermograph	Elitech	RC-4	S/N EF7176501537	2019.10.11	2020.10.10

Note:

Per KDB 865664 D01, Dipole SAR Validation Verification, STS LAB has adopted 3 years calibration intervals. On annual basis, every measurement dipole has been evaluated and is in compliance with the following criteria:

1. There is no physical damage on the dipole
 2. System validation with specific dipole is within 10% of calibrated value
- Return-loss in within 20% of calibrated measurement



Appendix A. System Validation Plots

System Performance Check Data (750MHz Head)

Type: Phone measurement (Complete)


Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 2019-11-13

Experimental conditions




Phantom	Validation plane
Device Position	-
Band	750MHz
Channels	-
Signal	CW
Frequency (MHz)	750MHz
Relative permittivity	41.83
Conductivity (S/m)	0.92
Power drift (%)	-0.35
Probe	SN 45/15 EPGO281
ConvF:	1.53
Crest factor:	1:1

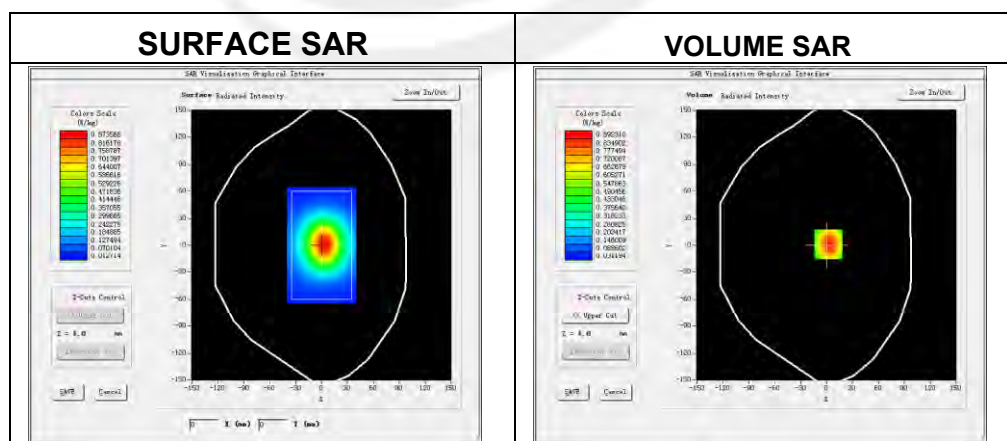

Maximum location: X=2.00, Y=1.00

SAR 10g (W/Kg)	0.583391
SAR 1g (W/Kg)	0.873965

Z Axis Scan

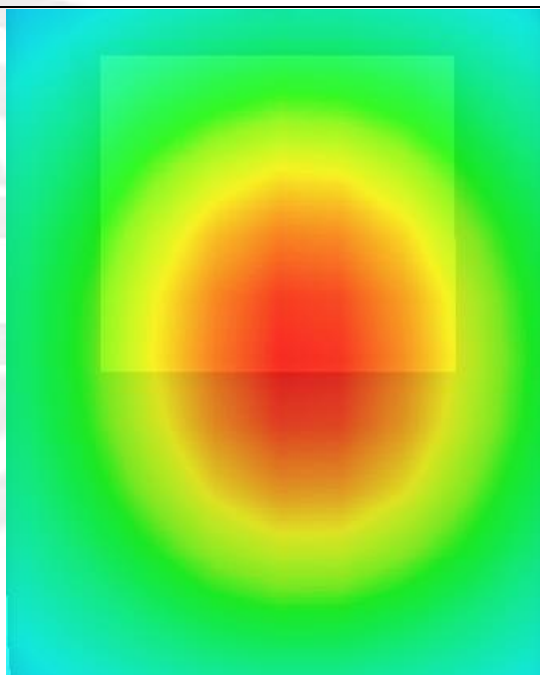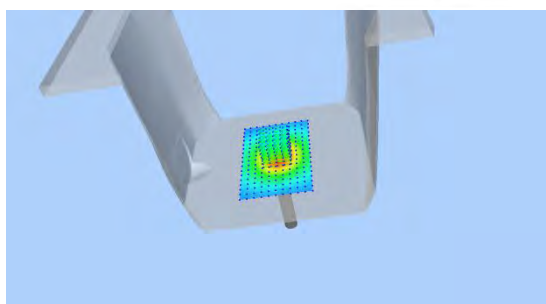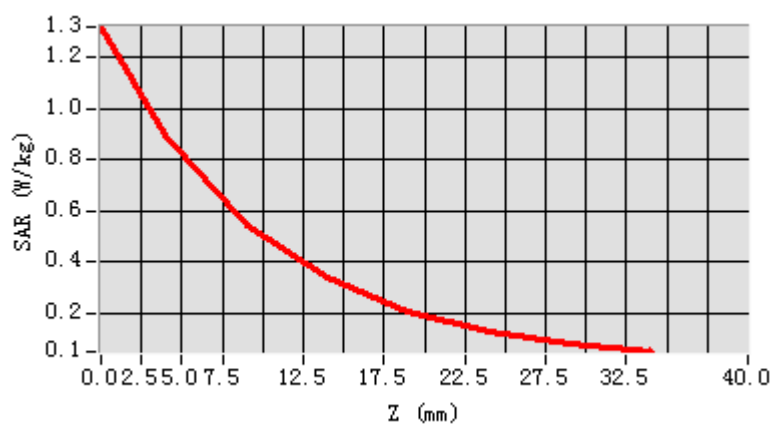



System Performance Check Data (750MHz Body)

Type: Phone measurement (Complete)


Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 2019-11-13

Experimental conditions.




Probe	
Phantom	Validation plane
Device Position	-
Band	750MHz
Channels	-
Signal	CW
Frequency (MHz)	750MHz
Relative permittivity	56.11
Conductivity (S/m)	0.98
Power drift (%)	1.41
Probe	SN 45/15 EPGO281
ConvF:	1.59
Crest factor:	1:1

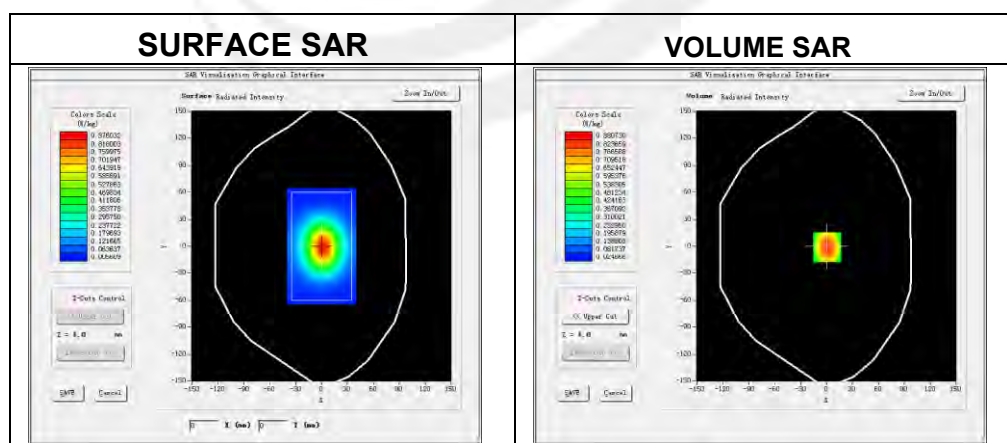

Maximum location: X=1.00, Y=-1.00

SAR 10g (W/Kg)	0.552276
SAR 1g (W/Kg)	0.836251

Z Axis Scan

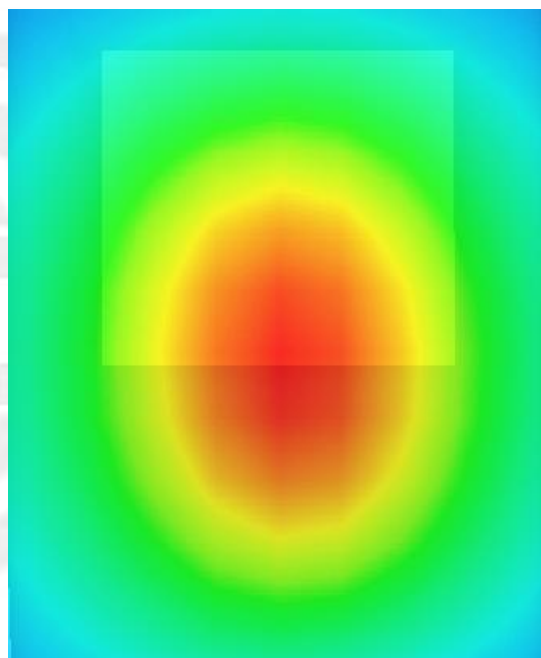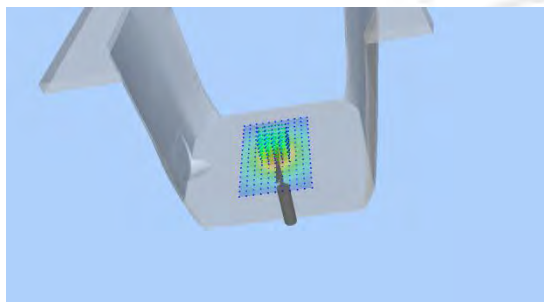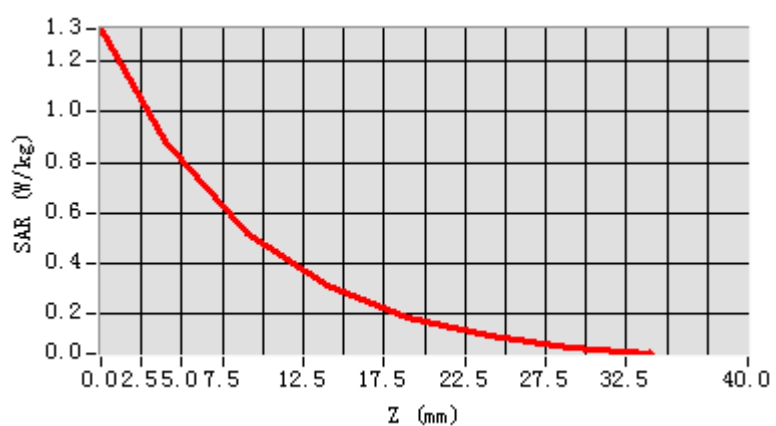



System Performance Check Data (835MHz Head)

Type: Phone measurement (Complete)


Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 2019-11-14

Experimental conditions




Phantom	Validation plane
Device Position	-
Band	835MHz
Channels	-
Signal	CW
Frequency (MHz)	835MHz
Relative permittivity	41.96
Conductivity (S/m)	0.93
Power drift (%)	-1.58
Probe	SN 45/15 EPGO281
ConvF:	1.78
Crest factor:	1:1

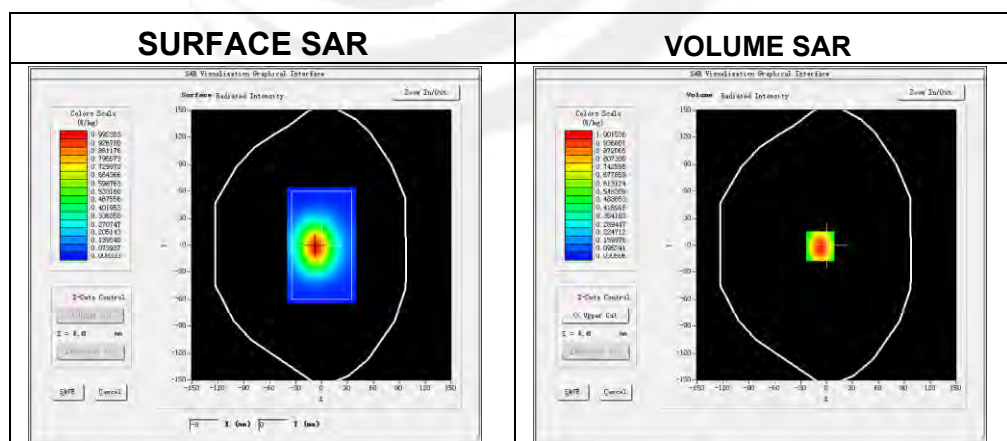

Maximum location: X=-7.00, Y=-1.00

SAR 10g (W/Kg)	0.602205
SAR 1g (W/Kg)	0.906744

Z Axis Scan

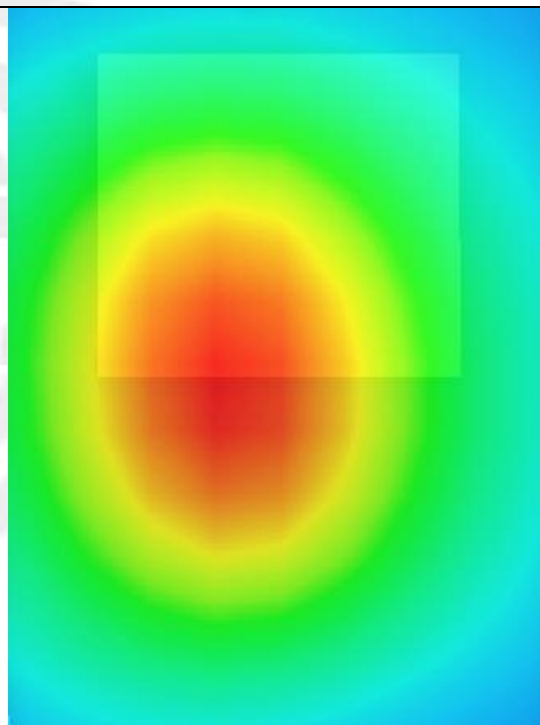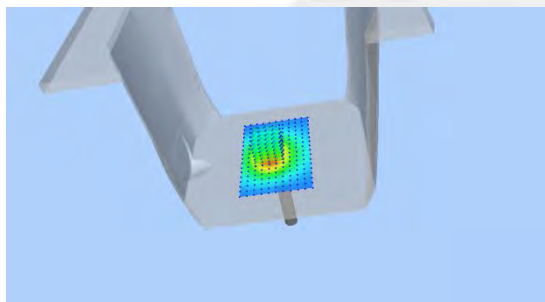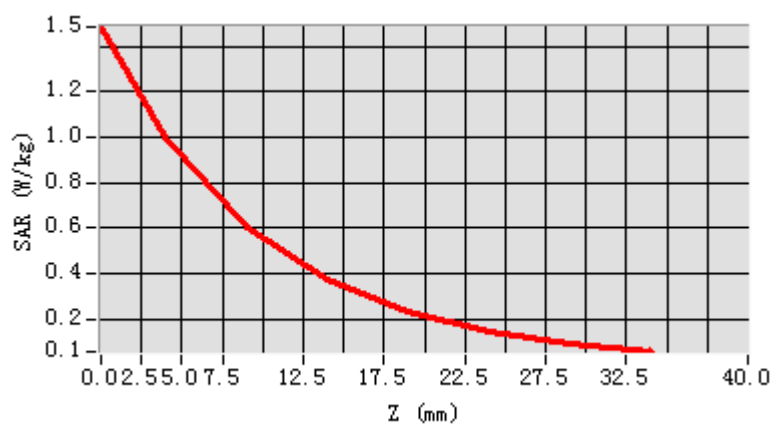



System Performance Check Data (835MHz Body)

Type: Phone measurement (Complete)


Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 2019-11-14

Experimental conditions.




Probe	
Phantom	Validation plane
Device Position	-
Band	835MHz
Channels	-
Signal	CW
Frequency (MHz)	835MHz
Relative permittivity	55.82
Conductivity (S/m)	1.01
Power drift (%)	-2.22
Probe	SN 45/15 EPGO281
ConvF:	1.85
Crest factor:	1:1

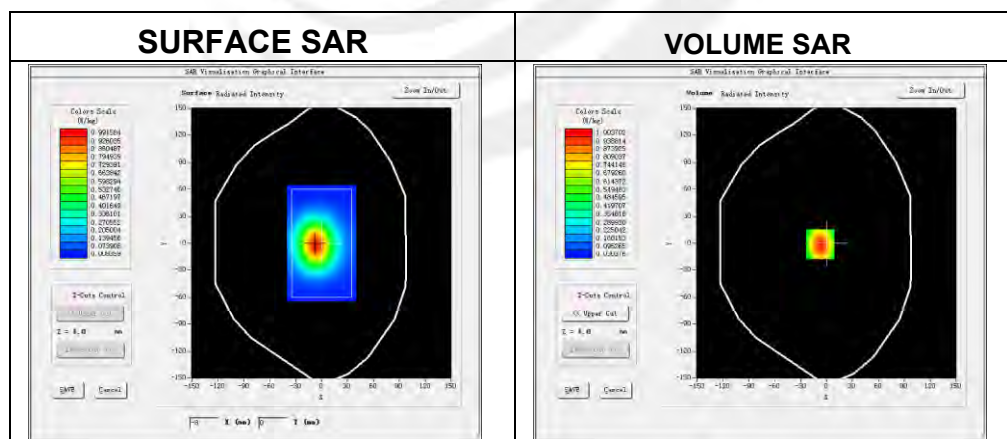

Maximum location: X=-7.00, Y=-1.00

SAR 10g (W/Kg)	0.632332
SAR 1g (W/Kg)	0.948951

Z Axis Scan

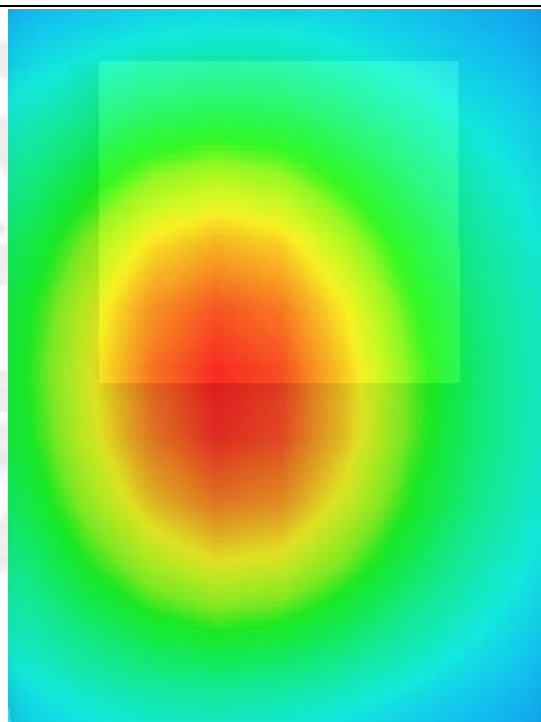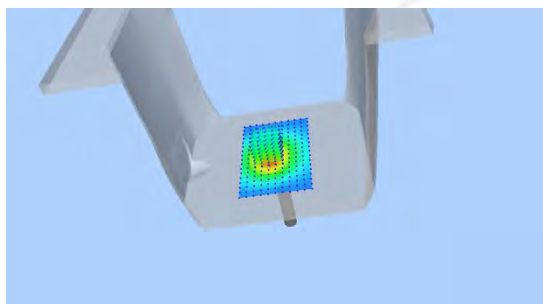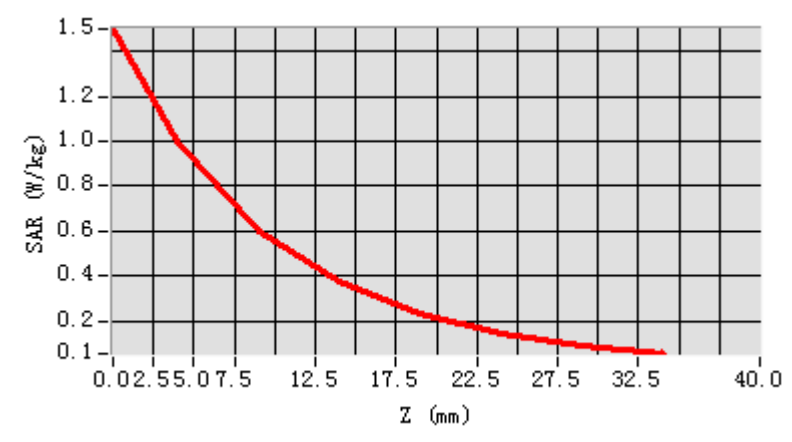



System Performance Check Data(1800MHz Head)

Type: Phone measurement (Complete)


Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 2019-11-15

Experimental conditions.




Phantom	Validation plane
Device Position	-
Band	1800MHz
Channels	-
Signal	CW
Frequency (MHz)	1800MHz
Relative permittivity	41.42
Conductivity (S/m)	1.38
Power drift (%)	0.75
Probe	SN 45/15 EPGO281
ConvF	1.83
Crest factor:	1:1

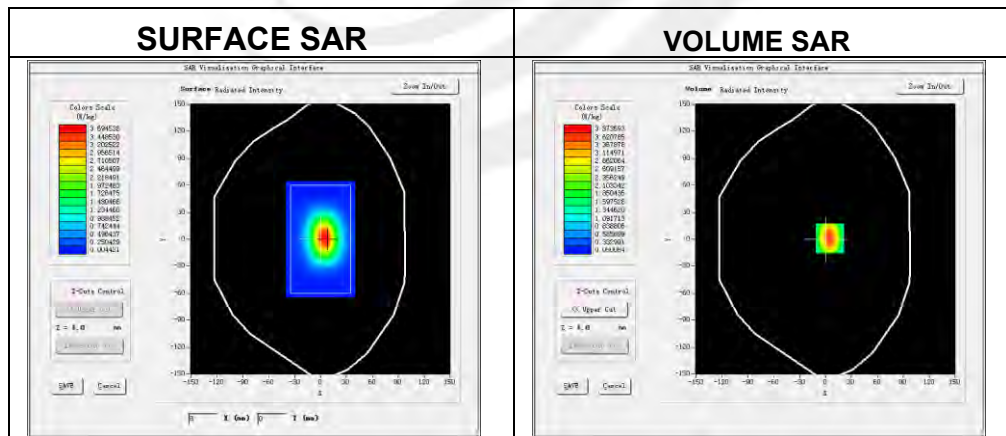

Maximum location: X=5.00, Y=1.00

SAR 10g (W/Kg)	1.897255
SAR 1g (W/Kg)	3.902728

Z Axis Scan

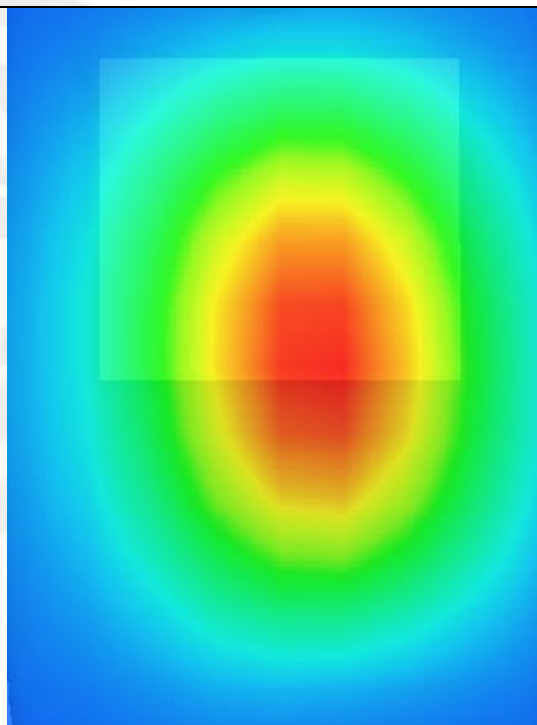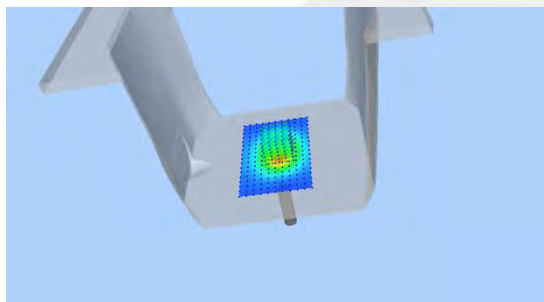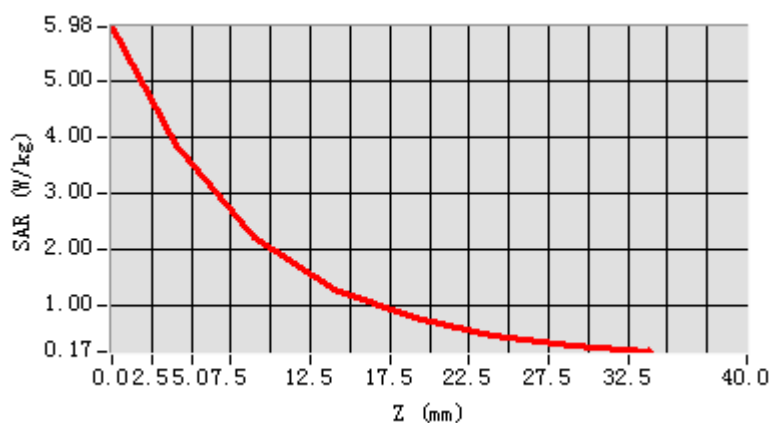



System Performance Check Data(1800MHz Body)

Type: Phone measurement (Complete)


Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 2019-11-15

Experimental conditions.




Phantom	Validation plane
Device Position	-
Band	1800MHz
Channels	-
Signal	CW
Frequency (MHz)	1800MHz
Relative permittivity	53.77
Conductivity (S/m)	1.49
Power drift (%)	-0.37
Probe	SN 45/15 EPGO281
ConvF	1.87
Crest factor:	1:1

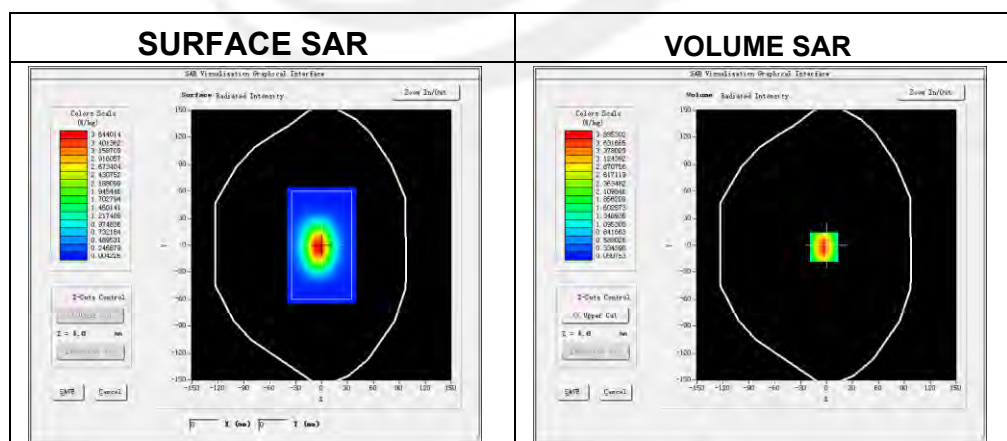

Maximum location: X=-3.00, Y=-2.00

SAR 10g (W/Kg)	2.042857
SAR 1g (W/Kg)	3.914079

Z Axis Scan

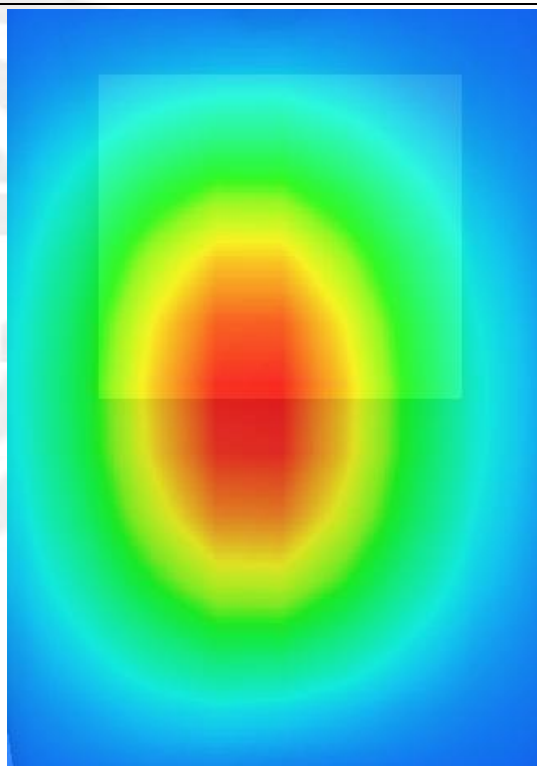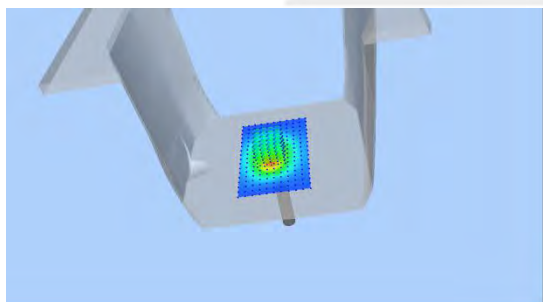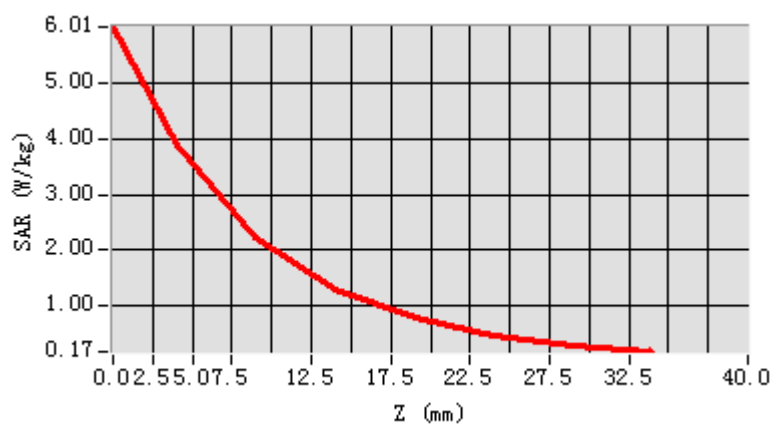



System Performance Check Data (1900MHz Head)

Type: Phone measurement (Complete)


Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 2019-11-18

Experimental conditions.




Phantom	Validation plane
Device Position	-
Band	1900MHz
Channels	-
Signal	CW
Frequency (MHz)	1900MHz
Relative permittivity	40.55
Conductivity (S/m)	1.41
Power drift (%)	0.49
Probe	SN 45/15 EPGO281
ConvF:	2.10
Crest factor:	1:1

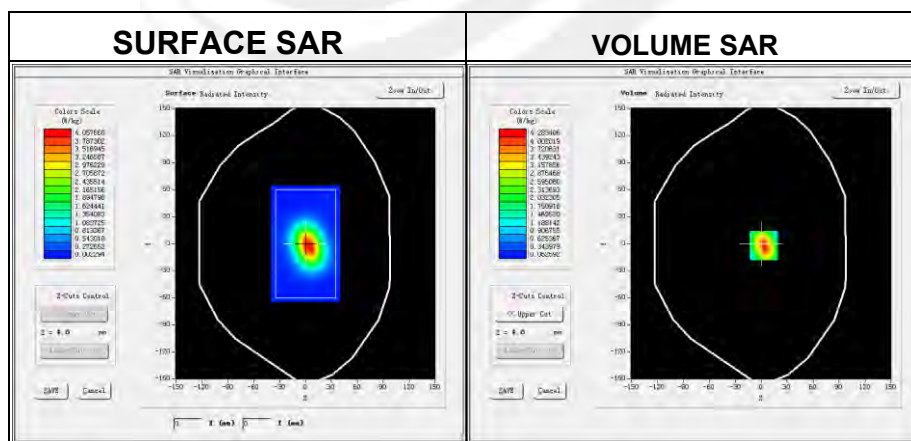

Maximum location: X=3.00, Y=-2.00

SAR 10g (W/Kg)	1.958651
SAR 1g (W/Kg)	3.888428

Z Axis Scan

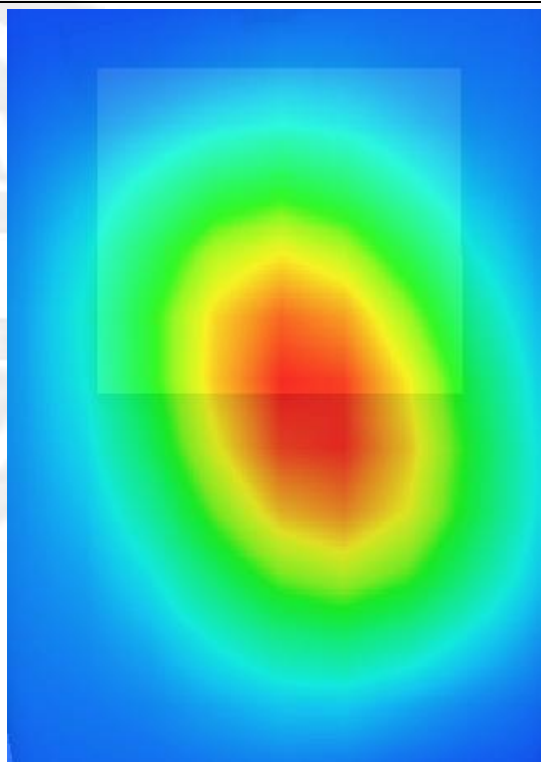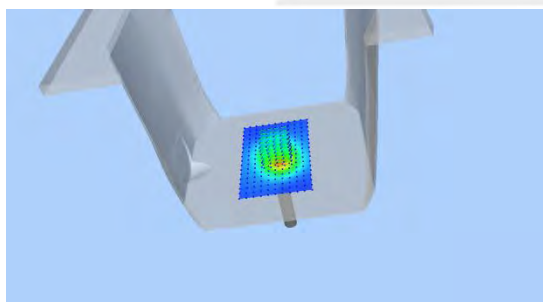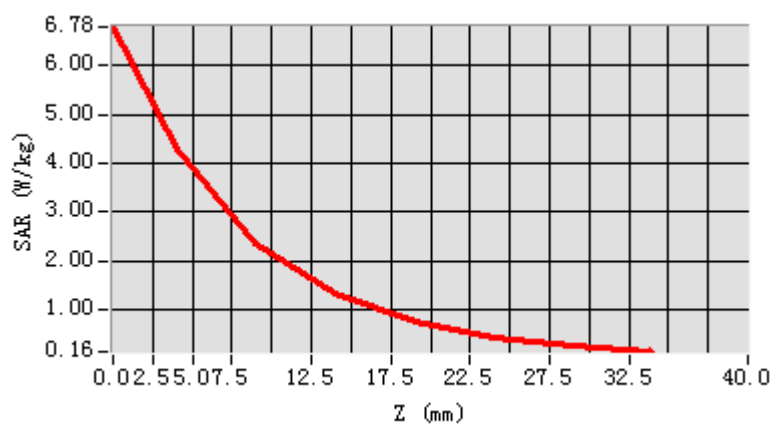

**System Performance Check Data (1900MHz Body)**

Type: Phone measurement (Complete)


Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 2019-11-18




Experimental conditions.

Device Position	-
Band	1900MHz
Channels	-
Signal	CW
Frequency (MHz)	1900
Relative permittivity	52.68
Conductivity (S/m)	1.54
Power drift (%)	-0.62
Probe	SN 45/15 EPGO281
ConvF:	2.16
Crest factor:	1:1

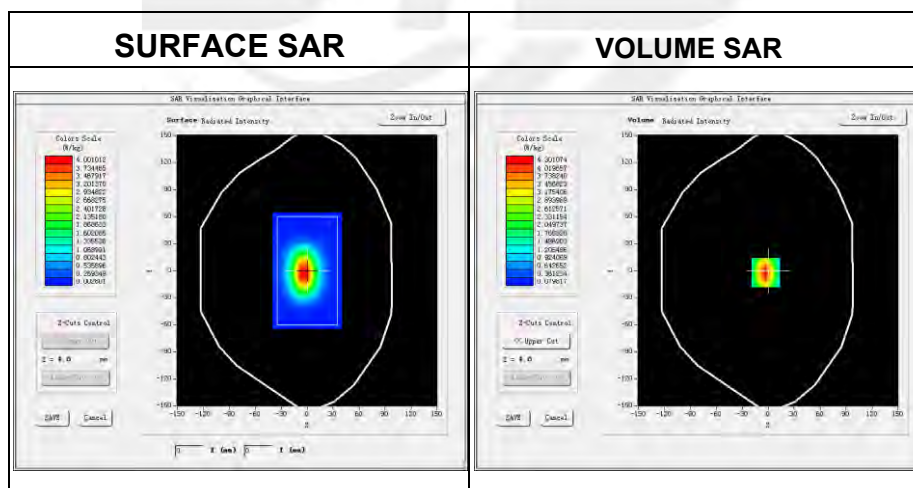**Maximum location: X=-3.00, Y=-2.00****SAR Peak: 5.27 W/kg**

SAR 10g (W/Kg)	2.103799
SAR 1g (W/Kg)	4.019287

Z Axis Scan

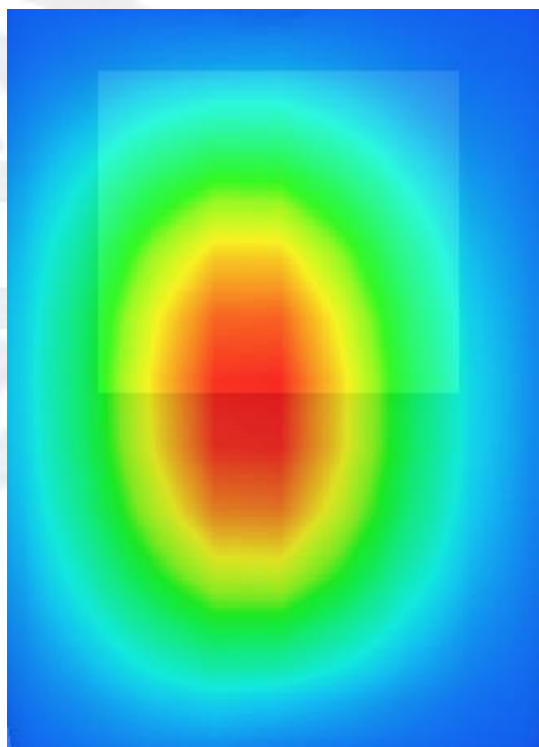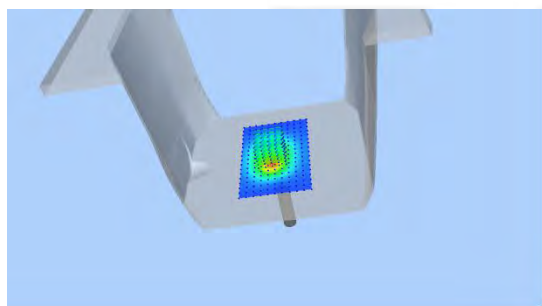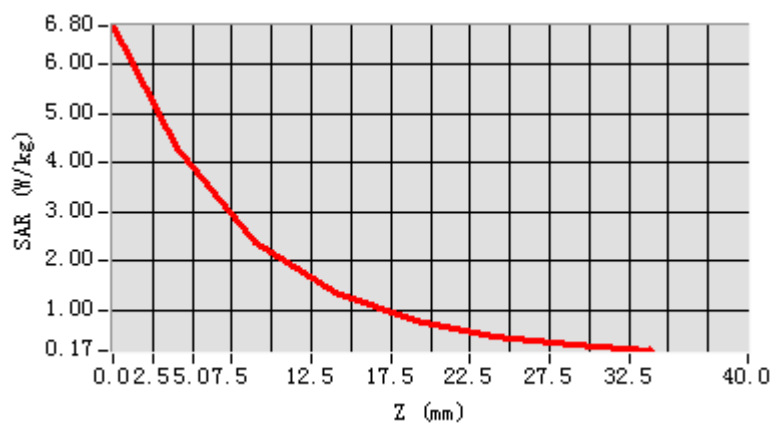

System Performance Check Data (2450MHz Head)

Type: Phone measurement (Complete)


Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 2019-11-19

Experimental conditions.




Device Position	Validation plane
Band	2450 MHz
Channels	-
Signal	CW
Frequency (MHz)	2450
Relative permittivity	39.91
Conductivity (S/m)	1.77
Power drift (%)	1.25
Probe	SN 45/15 EPGO281
ConvF	2.21
Crest factor:	1:1

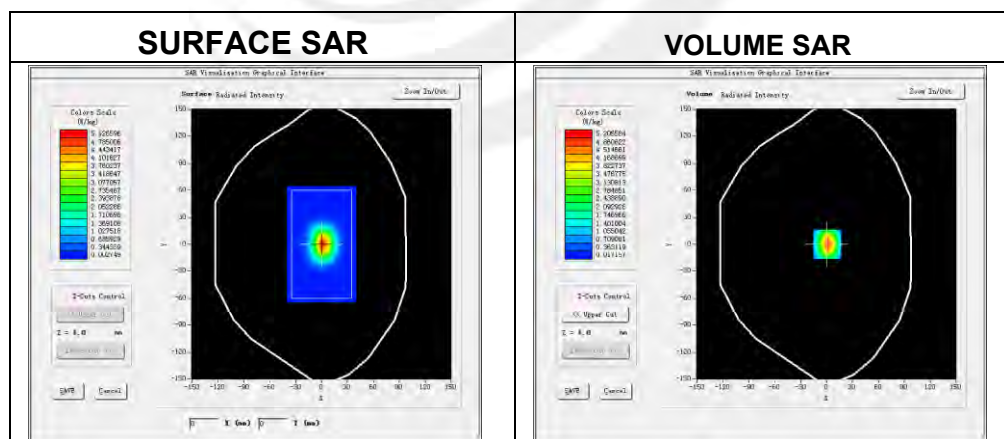

Maximum location: X=1.00, Y=0.00

SAR 10g (W/Kg)	2.526508
SAR 1g (W/Kg)	5.410453

Z Axis Scan

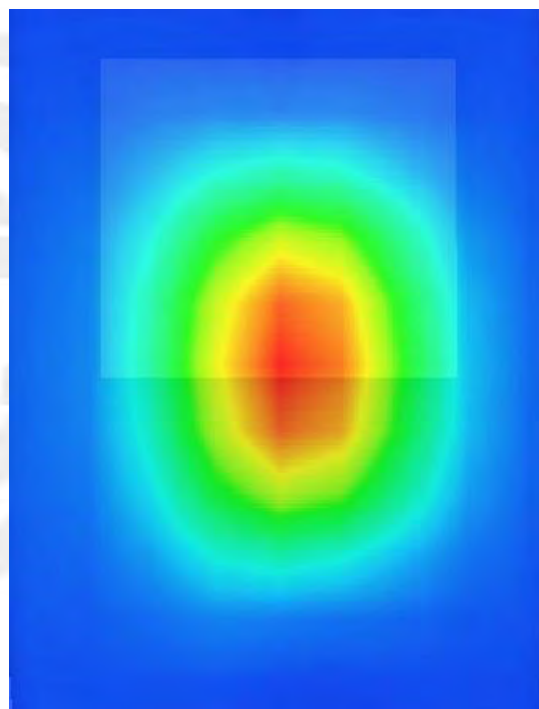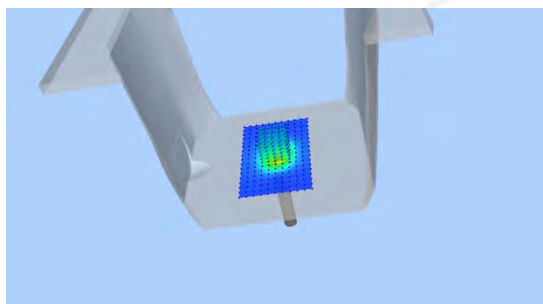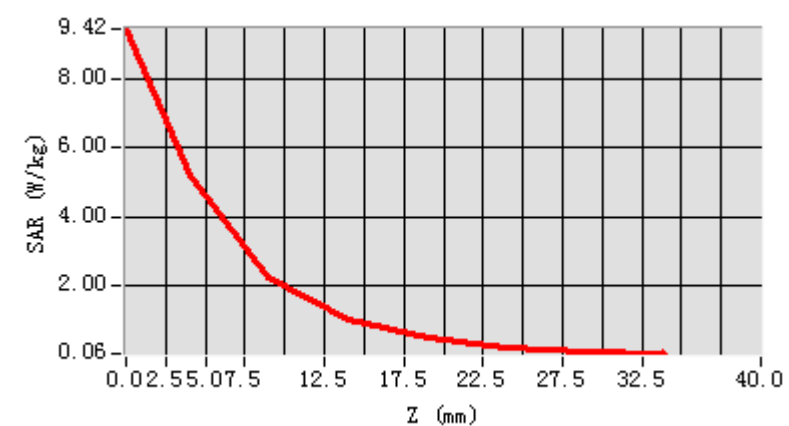

**System Performance Check Data (2450MHz Body)**

Type: Phone measurement (Complete)


Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 2019-11-19




Experimental conditions.

Device Position	Validation plane
Band	2450 MHz
Channels	-
Signal	CW
Frequency (MHz)	2450
Relative permittivity	53.14
Conductivity (S/m)	1.92
Power drift (%)	-0.37
Probe	SN 45/15 EPGO281
ConvF	2.28
Crest factor:	1:1

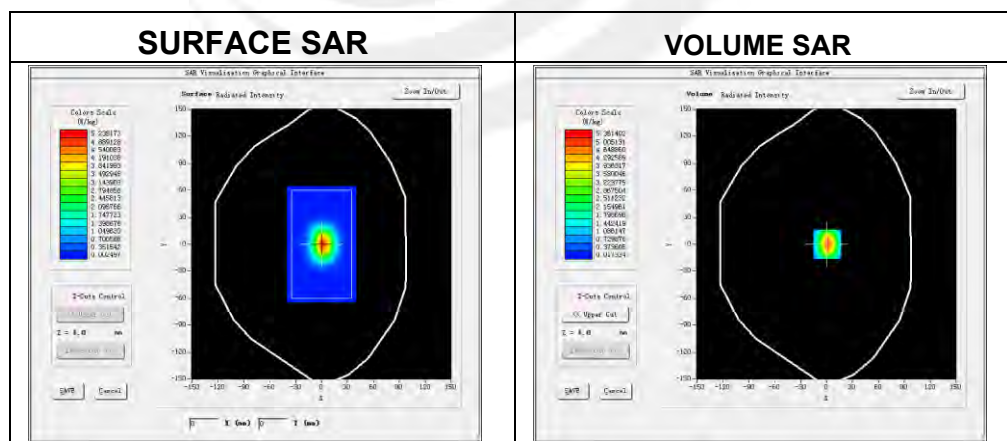**Maximum location: X=1.00, Y=0.00**

SAR 10g (W/Kg)	2.584894
SAR 1g (W/Kg)	5.338390

Z Axis Scan

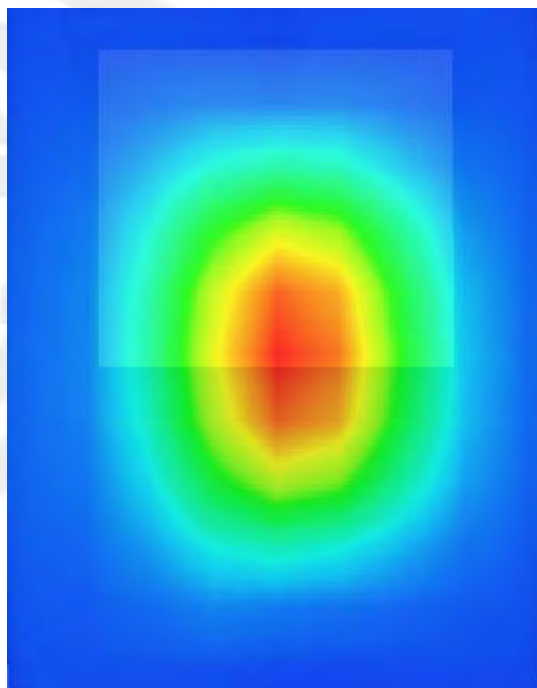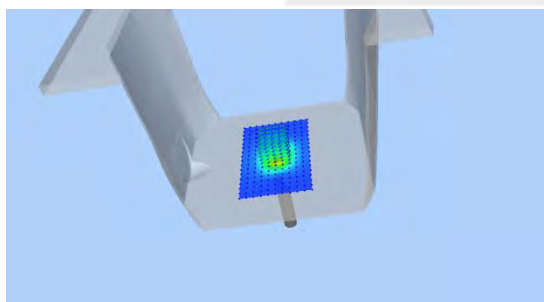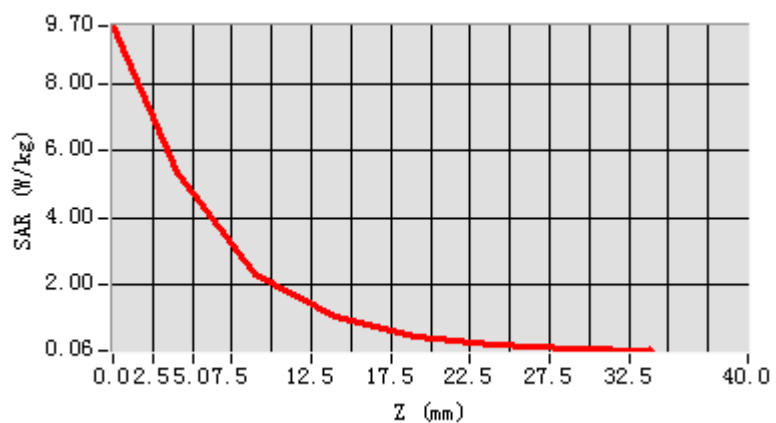



System Performance Check Data(2600MHz Head)

Type: Phone measurement (Complete)


Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 2019-11-20

Experimental conditions.




Device Position	Validation plane
Band	2600 MHz
Channels	-
Signal	CW
Frequency (MHz)	2600
Relative permittivity	39.27
Conductivity (S/m)	1.99
Power drift (%)	2.32
Probe	SN 45/15 EPGO281
ConvF	2.32
Crest factor:	1:1

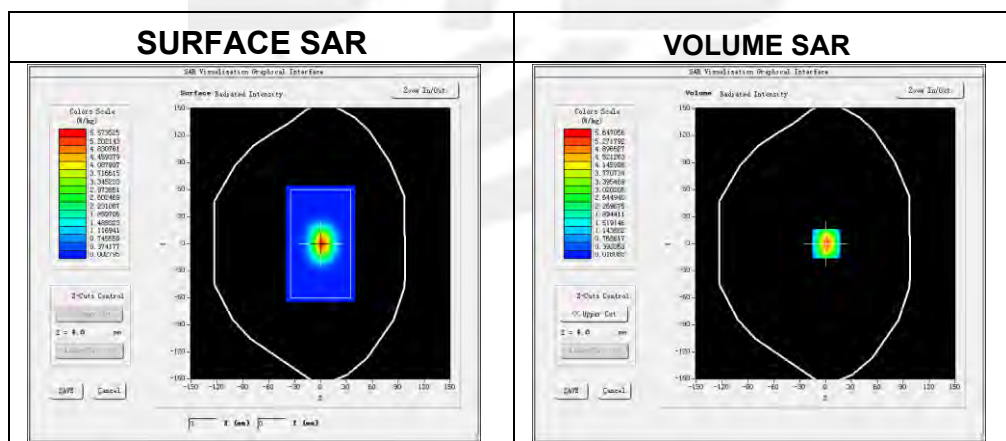

Maximum location: X=1.00, Y=0.00

SAR 10g (W/Kg)	2.361565
SAR 1g (W/Kg)	5.357814

Z Axis Scan

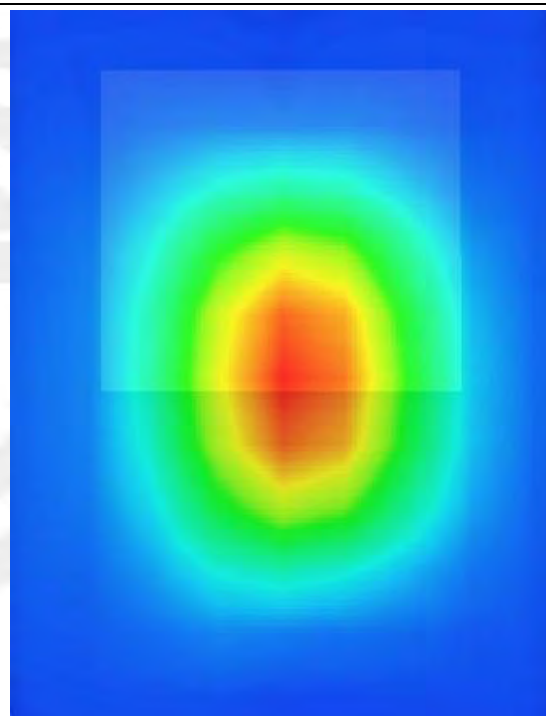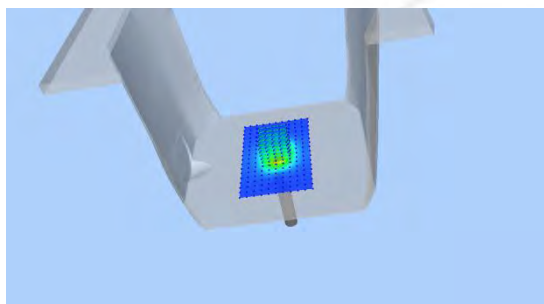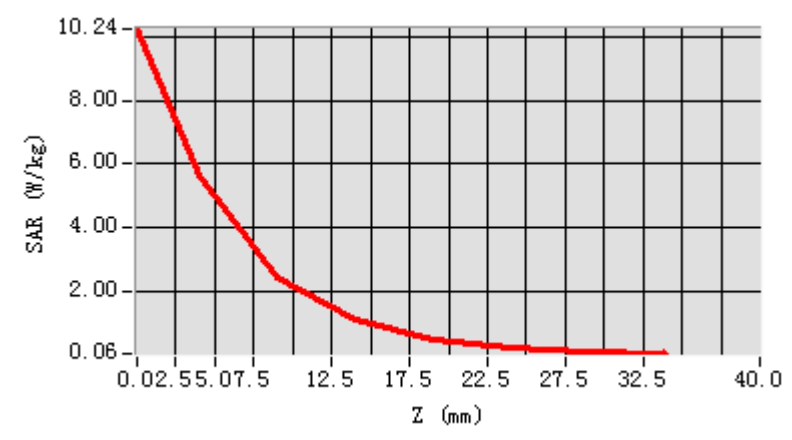



System Performance Check Data(2600MHz Body)

Type: Phone measurement (Complete)


Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 2019-11-20

Experimental conditions.




Device Position	Validation plane
Band	2600 MHz
Channels	-
Signal	CW
Frequency (MHz)	2600
Relative permittivity	52.95
Conductivity (S/m)	2.23
Power drift (%)	-1.96
Probe	SN 45/15 EPGO281
ConvF	2.38
Crest factor:	1:1

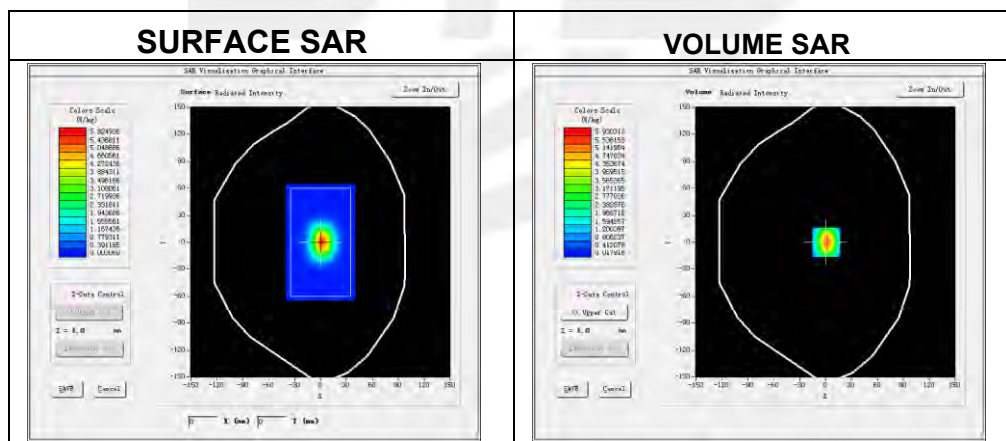

Maximum location: X=3.00, Y=1.00

SAR 10g (W/Kg)	2.525112
SAR 1g (W/Kg)	5.596368

Z Axis Scan

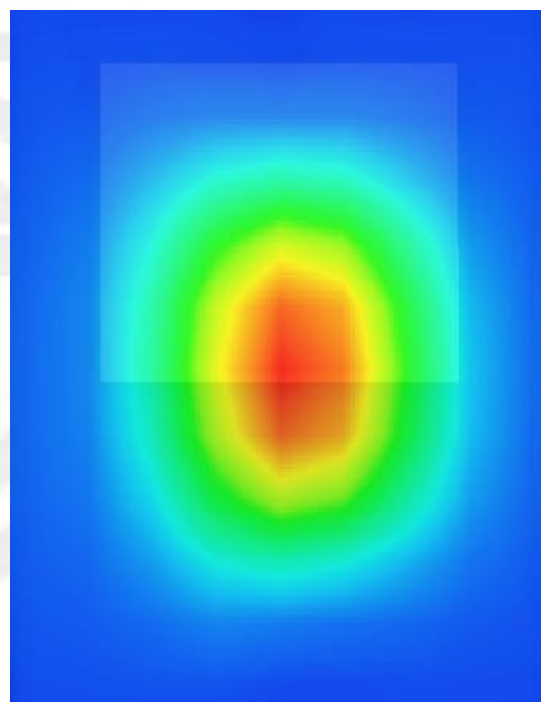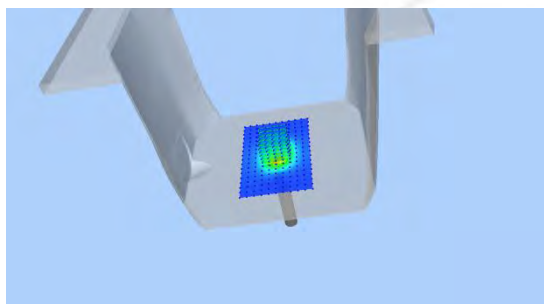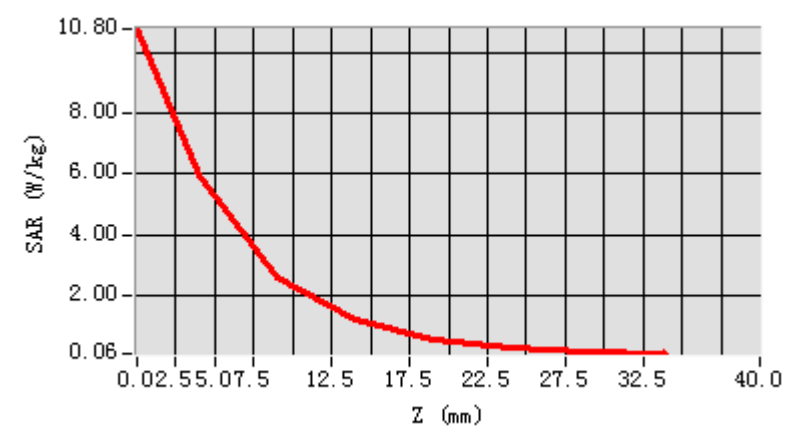

Appendix B. SAR Test Plots


Plot 1: DUT: Smart phone; EUT Model: X6

Test Date	2019-11-14
Probe	SN 45/15 EPGO281
ConvF	1.78
Area Scan	dx=8mm dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm, Complete/ndx=8mm dy=8mm, h= 5.00 mm
Phantom	Right head
Device Position	Cheek
Band	GSM850
Channels	Low
Signal	Duty Cycle: 1:2.00 (Crest factor: 2.0)
Frequency (MHz)	824.2
Relative permittivity (real part)	41.50
Conductivity (S/m)	0.90
Variation (%)	3.91

Maximum location: X=-46.00, Y=-30.00

SAR Peak: 0.55 W/kg

SAR 10g (W/Kg)	0.294333
SAR 1g (W/Kg)	0.408347

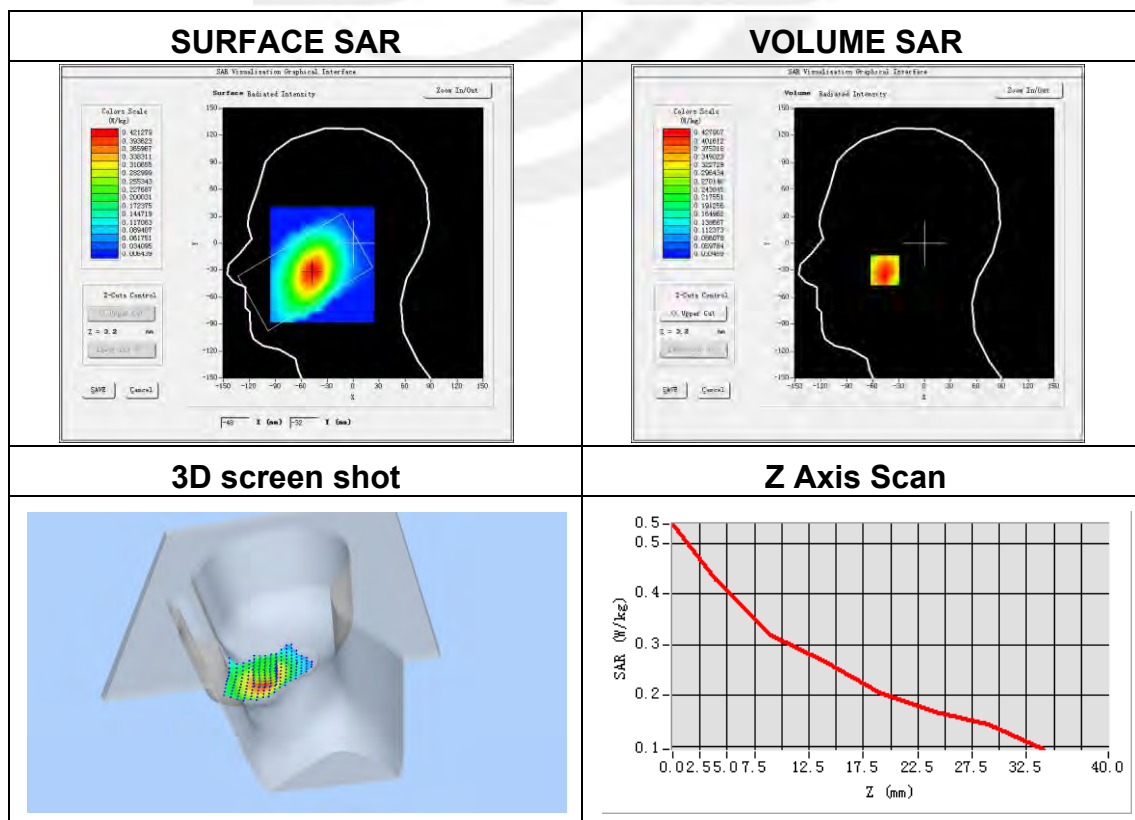


Plot 2: DUT: Smart phone; EUT Model: X6

Test Date	2019-11-14
Probe	SN 45/15 EPGO281
ConvF	1.85
Area Scan	dx=8mm dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm, Complete/ndx=8mm dy=8mm, h= 5.00 mm
Phantom	Validation plane
Device Position	Back Side
Band	GPRS 850
Channels	Low
Signal	Duty Cycle: 1:2.00 (Crest factor: 2.0)
Frequency (MHz)	824.2
Relative permittivity (real part)	55.20
Conductivity (S/m)	0.97
Variation (%)	-0.09

Maximum location: X=1.00, Y=33.00

SAR Peak: 0.63 W/kg

SAR 10g (W/Kg)	0.338851
SAR 1g (W/Kg)	0.464437

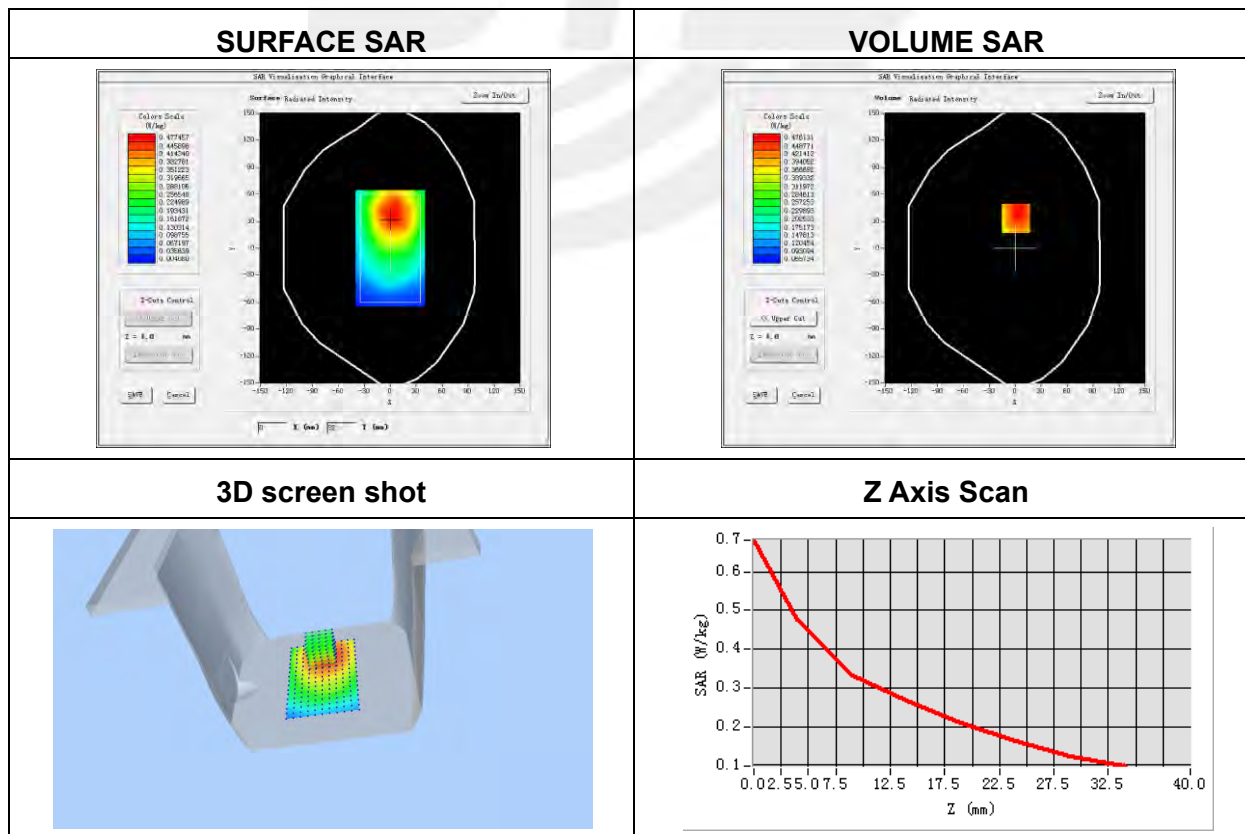


Plot 3: DUT: Smart phone; EUT Model: X6

Test Date	2019-11-18
Probe	SN 45/15 EPGO281
ConvF	2.10
Area Scan	dx=8mm dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm, Complete/ndx=8mm dy=8mm, h= 5.00 mm
Phantom	Right head
Device Position	Cheek
Band	GSM1900
Channels	High
Signal	Duty Cycle: 1:2.00 (Crest factor: 2.0)
Frequency (MHz)	1909.8
Relative permittivity (real part)	40.00
Conductivity (S/m)	1.40
Variation (%)	1.89

Maximum location: X=-48.00, Y=-48.00

SAR Peak: 0.31 W/kg

SAR 10g (W/Kg)	0.115978
SAR 1g (W/Kg)	0.202905

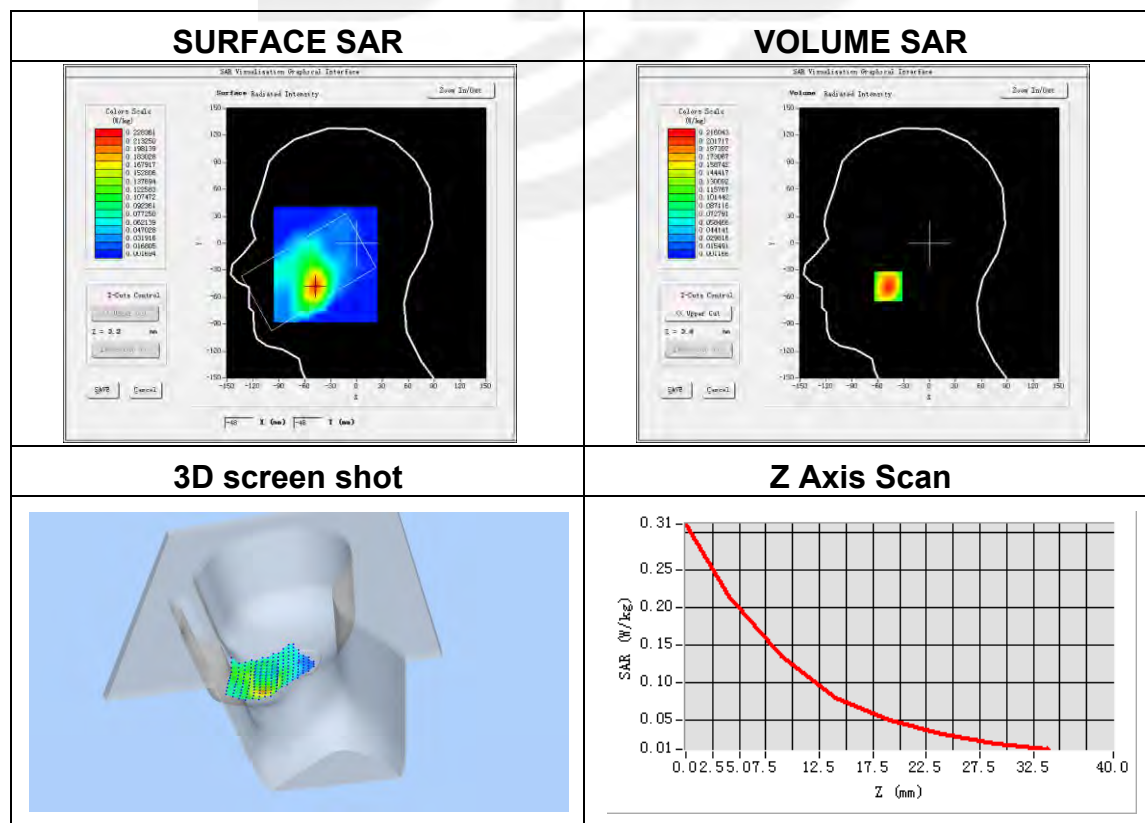


Plot 4: DUT: Smart phone; EUT Model: X6

Test Date	2019-11-18
Probe	SN 45/15 EPGO281
ConvF	2.16
Area Scan	dx=8mm dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm, Complete/ndx=8mm dy=8mm, h= 5.00 mm
Phantom	Validation plane
Device Position	Bottom Edge
Band	GPRS 1900
Channels	High
Signal	Duty Cycle: 1:2.00 (Crest factor: 2.0)
Frequency (MHz)	1909.8
Relative permittivity (real part)	53.30
Conductivity (S/m)	1.52
Variation (%)	-1.18

Maximum location: X=24.00, Y=7.00

SAR Peak: 0.85 W/kg

SAR 10g (W/Kg)	0.255694
SAR 1g (W/Kg)	0.497267

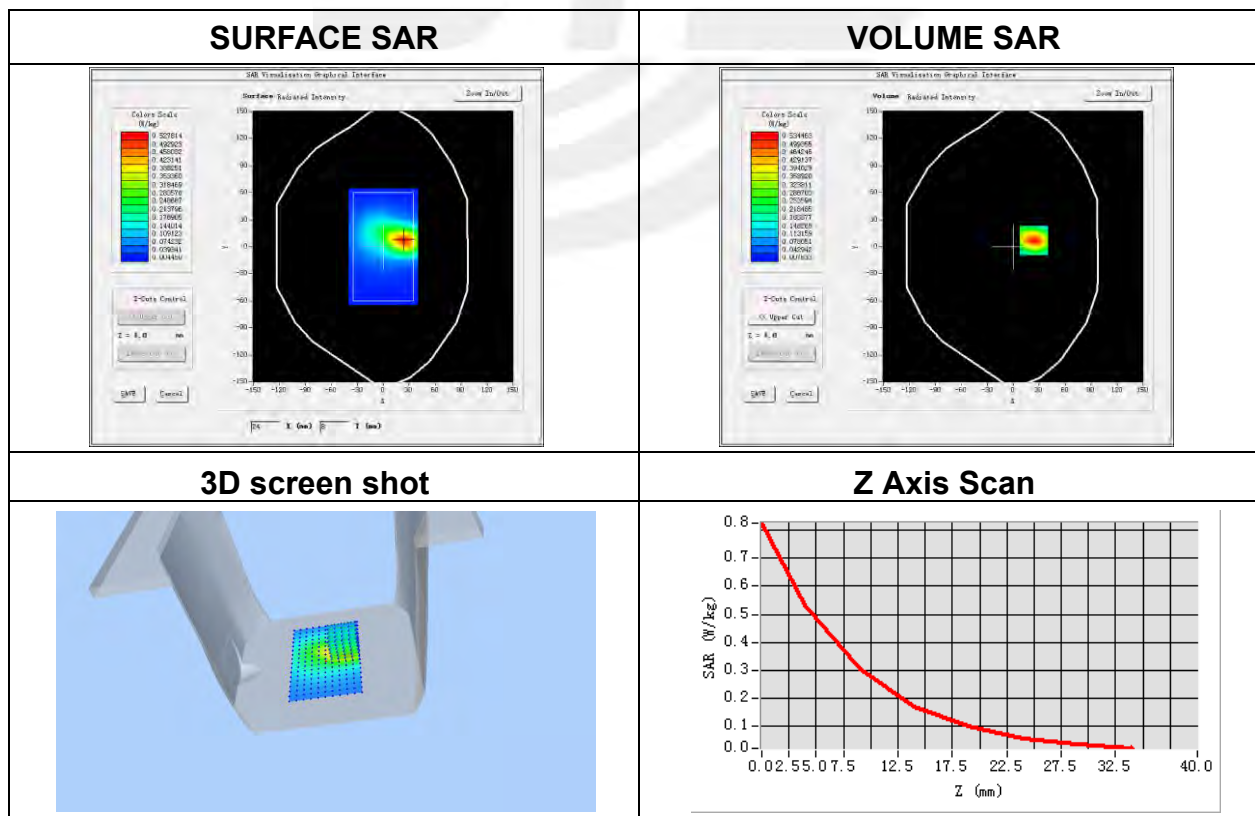


Plot 5: DUT: Smart phone; EUT Model: X6

Test Date	2019-11-18
Probe	SN 45/15 EPGO281
ConvF	2.10
Area Scan	dx=8mm dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm, Complete/ndx=8mm dy=8mm, h= 5.00 mm
Phantom	Right head
Device Position	Cheek
Band	WCDMA II
Channels	Low
Signal	WCDMA (Crest factor: 1.0)
Frequency (MHz)	1852.4
Relative permittivity (real part)	40.00
Conductivity (S/m)	1.40
Variation (%)	-2.60

Maximum location: X=-49.00, Y=-41.00

SAR Peak: 0.56 W/kg

SAR 10g (W/Kg)	0.210804
SAR 1g (W/Kg)	0.368360

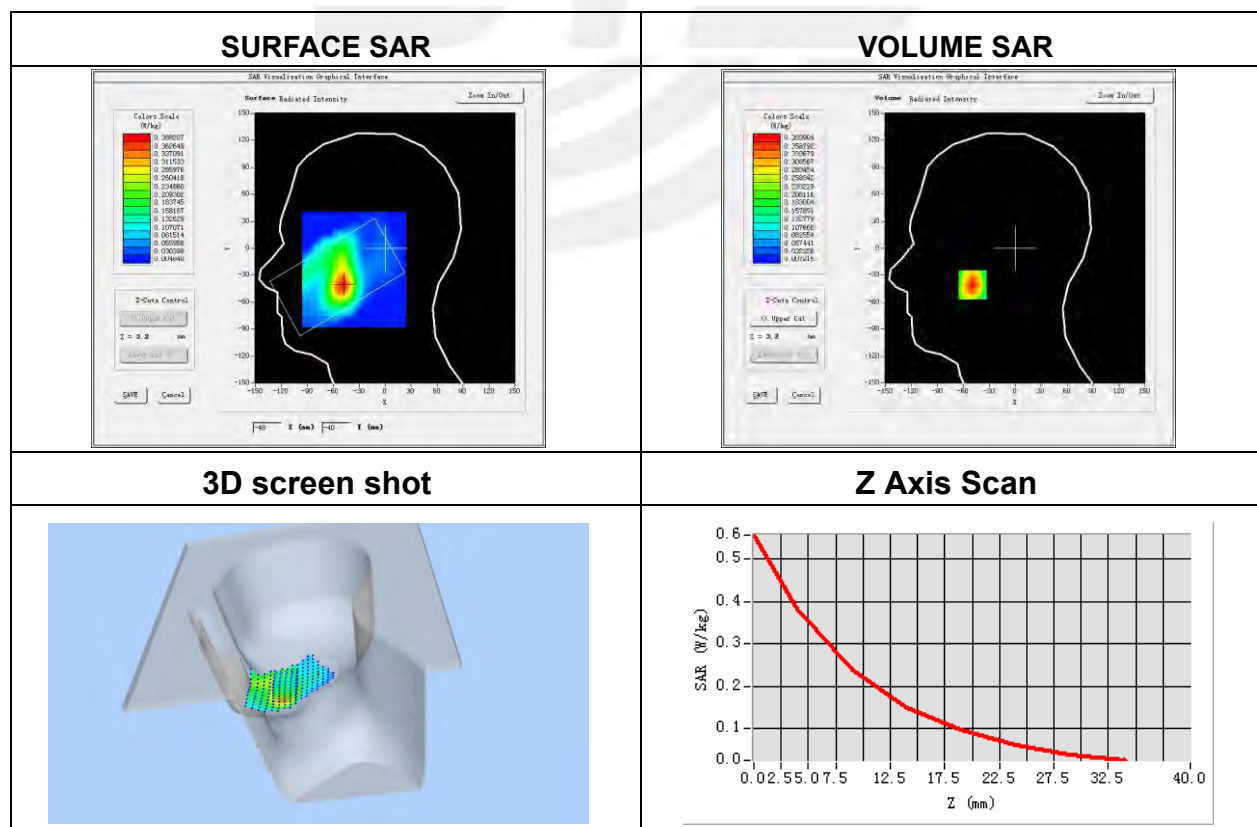


Plot 6: DUT: Smart phone; EUT Model: X6

Test Date	2019-11-18
Probe	SN 45/15 EPGO281
ConvF	2.16
Area Scan	dx=8mm dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm, Complete/ndx=8mm dy=8mm, h= 5.00 mm
Phantom	Validation plane
Device Position	Bottom Edge
Band	WCDMA II
Channels	Low
Signal	WCDMA (Crest factor: 1.0)
Frequency (MHz)	1852.4
Relative permittivity (real part)	53.30
Conductivity (S/m)	1.52
Variation (%)	2.18

Maximum location: X=1.00, Y=2.00

SAR Peak: 1.08 W/kg

SAR 10g (W/Kg)	0.346902
SAR 1g (W/Kg)	0.667957

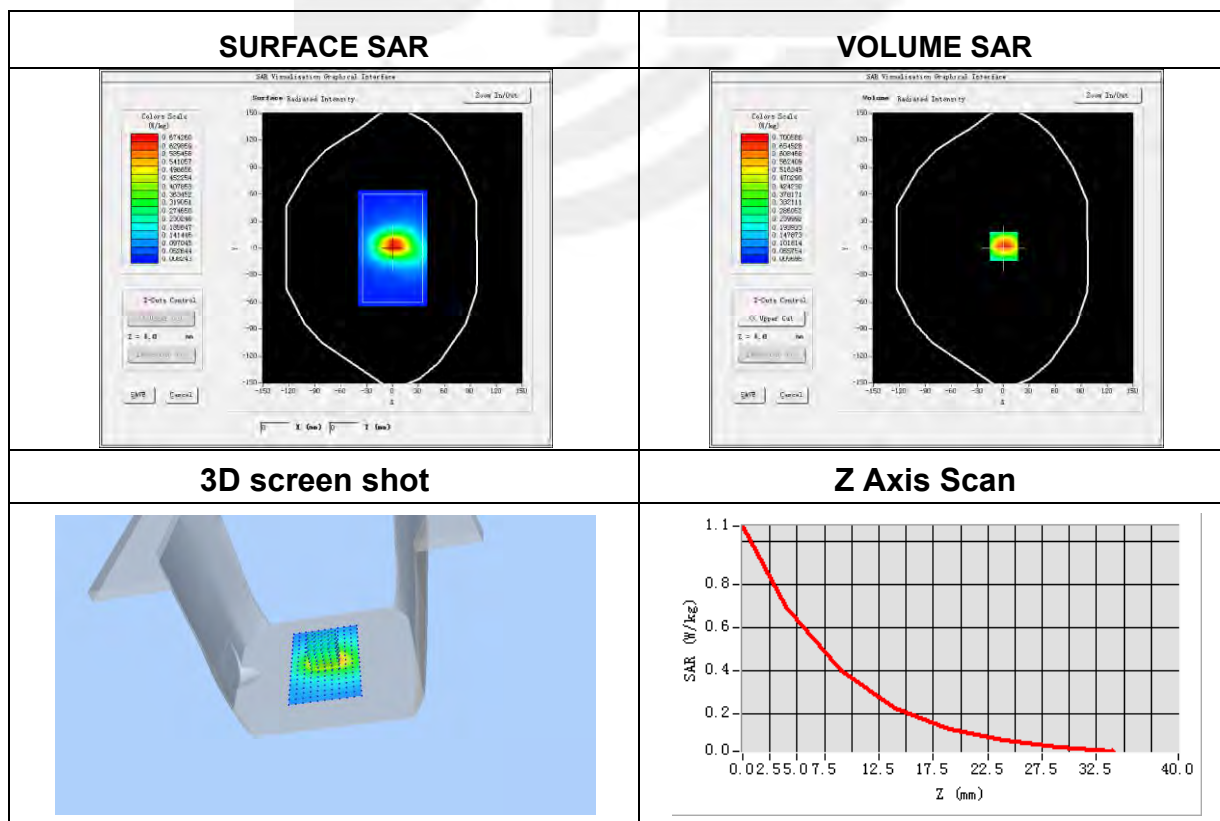


Plot 7: DUT: Smart phone; EUT Model: X6

Test Date	2019-11-14
Probe	SN 45/15 EPGO281
ConvF	1.78
Area Scan	dx=8mm dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm, Complete/ndx=8mm dy=8mm, h= 5.00 mm
Phantom	Right head
Device Position	Cheek
Band	WCDMA V
Channels	High
Signal	WCDMA (Crest factor: 1.0)
Frequency (MHz)	846.6
Relative permittivity (real part)	41.50
Conductivity (S/m)	0.90
Variation (%)	1.00

Maximum location: X=-48.00, Y=-32.00

SAR Peak: 0.35 W/kg

SAR 10g (W/Kg)	0.209673
SAR 1g (W/Kg)	0.281420

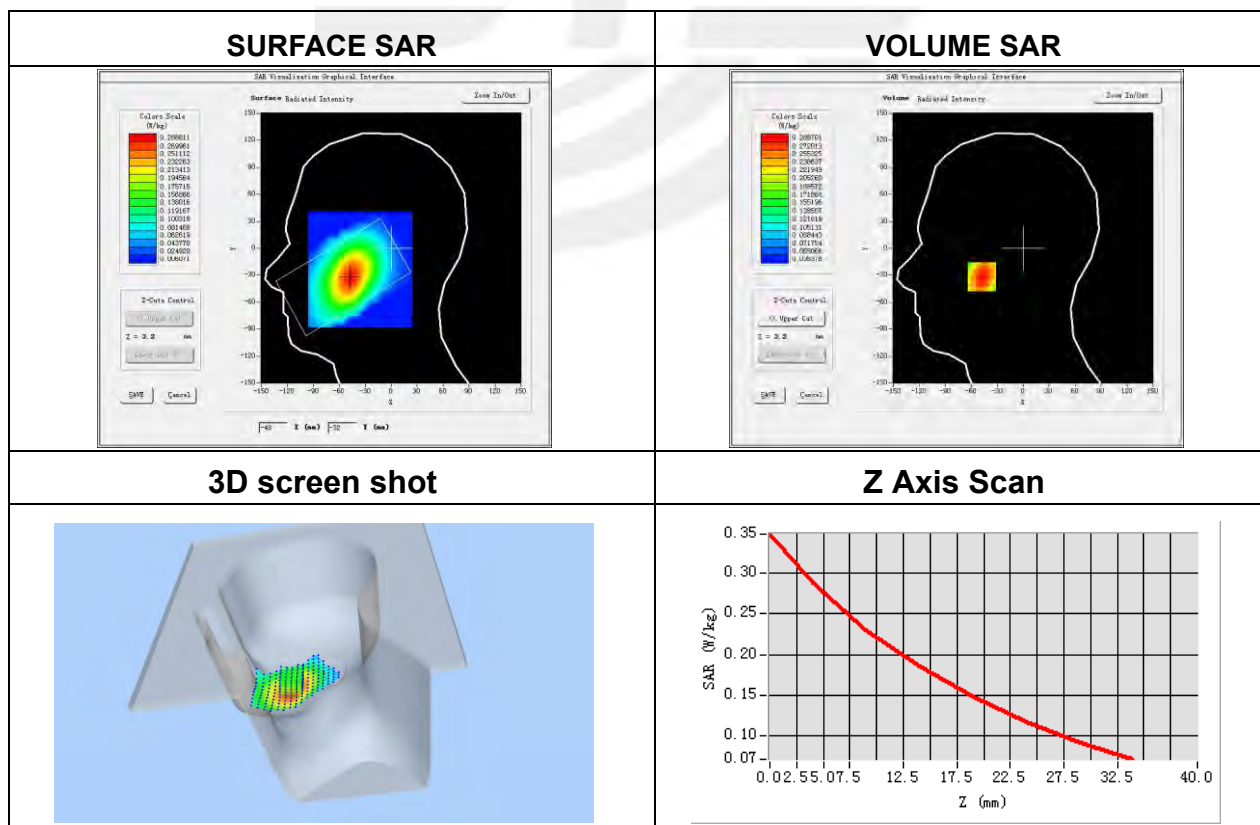


Plot 8: DUT: Smart phone; EUT Model: X6

Test Date	2019-11-14
Probe	SN 45/15 EPGO281
ConvF	1.85
Area Scan	dx=8mm dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm, Complete/ndx=8mm dy=8mm, h= 5.00 mm
Phantom	Validation plane
Device Position	Back Side
Band	WCDMA V
Channels	High
Signal	WCDMA (Crest factor: 1.0)
Frequency (MHz)	846.6
Relative permittivity (real part)	55.20
Conductivity (S/m)	0.97
Variation (%)	0.25

Maximum location: X=-2.00, Y=30.00

SAR Peak: 0.40 W/kg

SAR 10g (W/Kg)	0.235514
SAR 1g (W/Kg)	0.317684

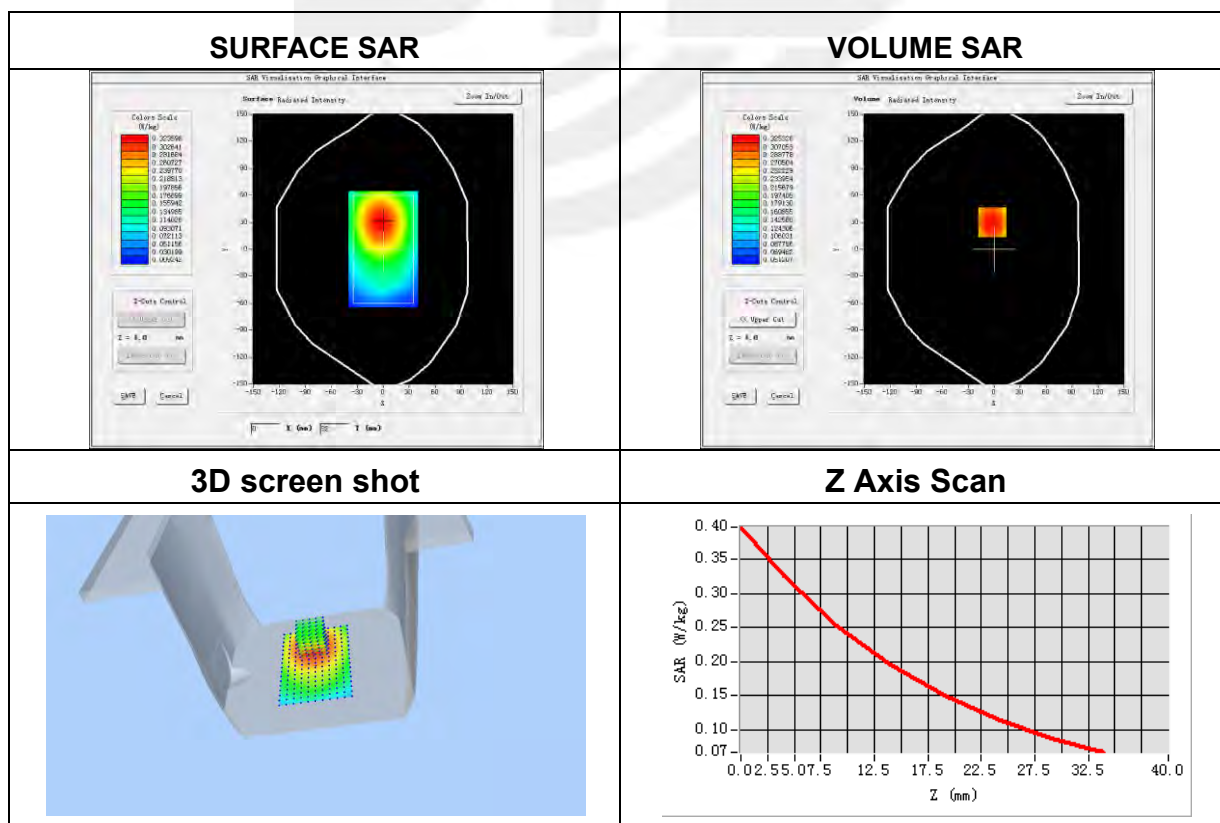


Plot 9: DUT: Smart phone; EUT Model: X6

Test Date	2019-11-19
Probe	SN 45/15 EPGO281
ConvF	2.21
Area Scan	dx=8mm dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm, Complete/ndx=8mm dy=8mm, h= 5.00 mm
Phantom	Left head
Device Position	Tilt
Band	IEEE 802.11b ISM
Channels	Middle
Signal	IEEE802.b (Crest factor: 1.0)
Frequency (MHz)	2437
Relative permittivity (real part)	39.20
Conductivity (S/m)	1.80
Variation (%)	-2.99

Maximum location: X=0.00, Y=26.00

SAR Peak: 0.53 W/kg

SAR 10g (W/Kg)	0.124910
SAR 1g (W/Kg)	0.280428

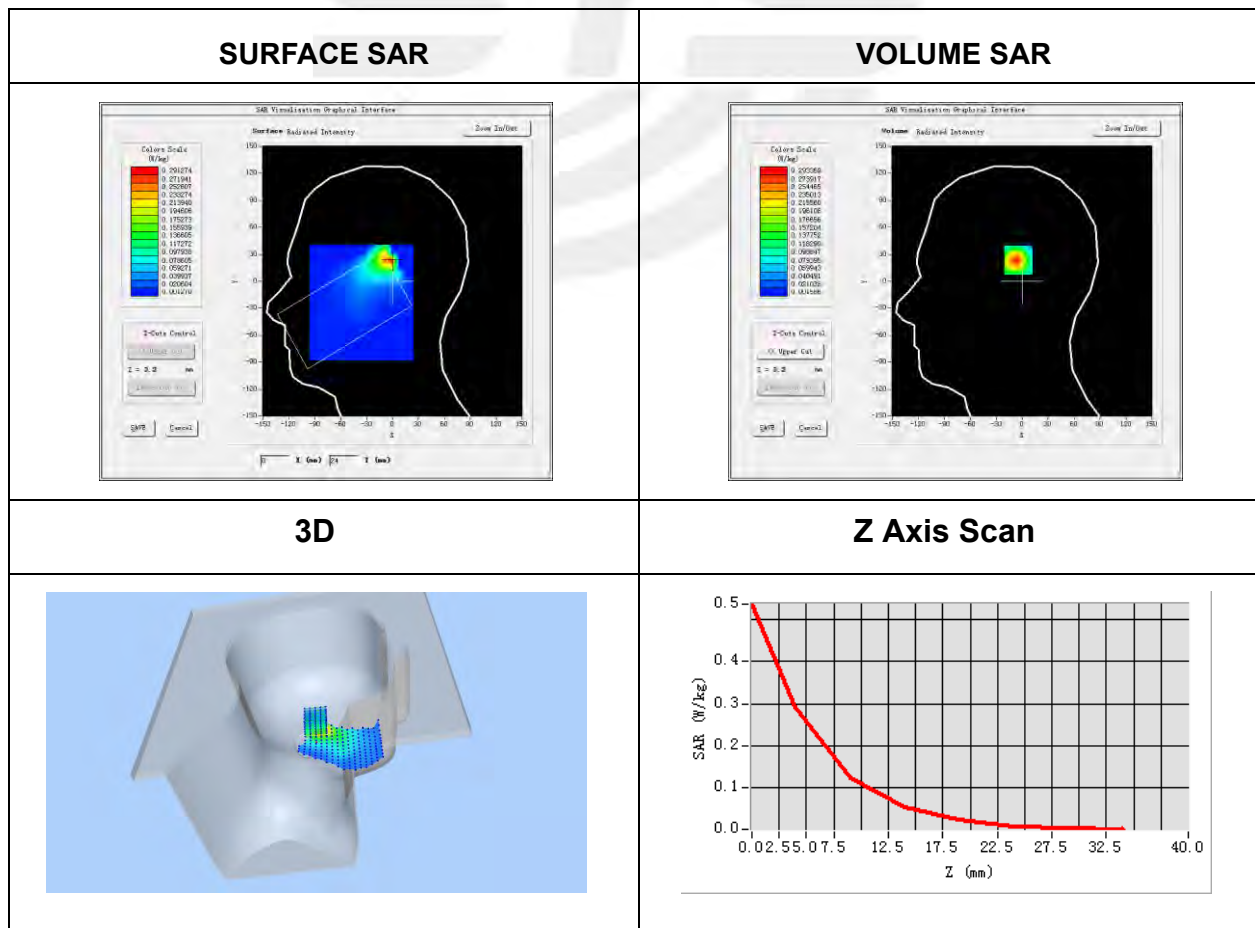





Plot 10: DUT: Smart phone; EUT Model: X6

Test Date	2019-11-19
Probe	SN 45/15 EPGO281
ConvF	2.28
Area Scan	dx=8mm dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm, Complete/ndx=8mm dy=8mm, h= 5.00 mm
Phantom	Validation plane
Device Position	Back Side
Band	IEEE 802.11b ISM
Channels	Middle
Signal	IEEE802.b (Crest factor: 1.0)
Frequency (MHz)	2437
Relative permittivity (real part)	52.70
Conductivity (S/m)	1.95
Variation (%)	2.38

Maximum location: X=-24.00, Y=-3.00

SAR Peak: 0.25 W/kg

SAR 10g (W/Kg)	0.059541
SAR 1g (W/Kg)	0.130154

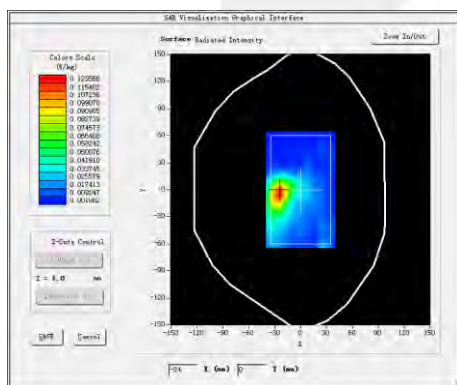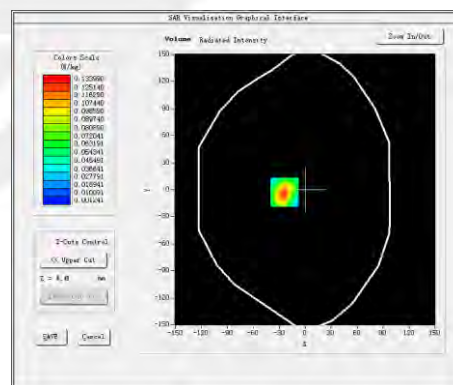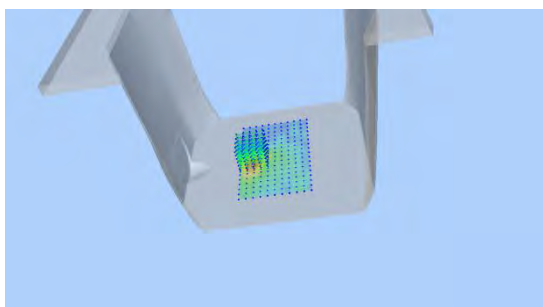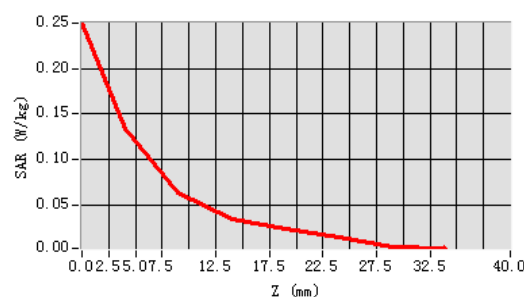SURFACE SAR

VOLUME SAR

3D

Z Axis Scan


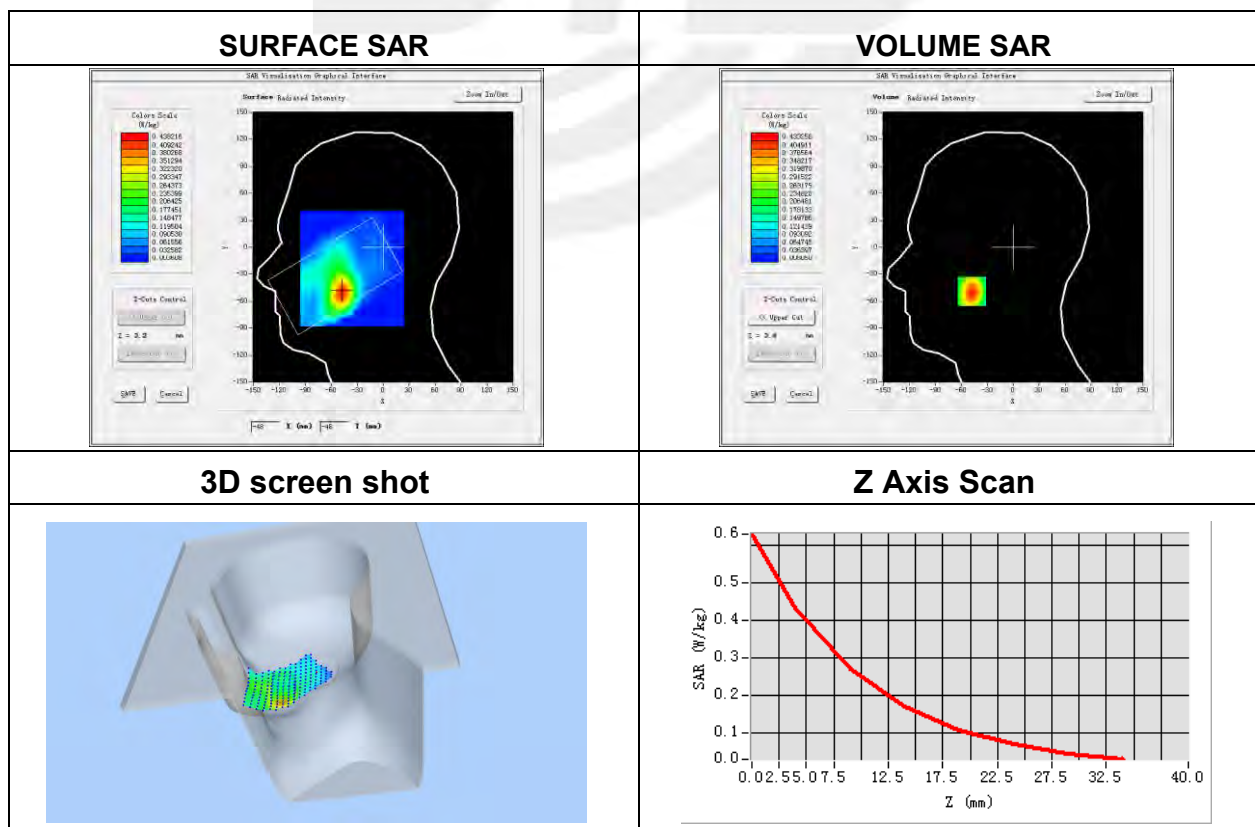
Plot 11: DUT: Smart phone; EUT Model: X6

Test Date	2019-11-18
Probe	SN 45/15 EPGO281
ConvF	2.10
Area Scan	dx=8mm dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm, Complete/ndx=8mm dy=8mm, h= 5.00 mm
Phantom	Right head
Device Position	Cheek
Band	LTE Band 2 (RB 1)
Channels	Middle
Signal	LTE (Crest factor: 1.0)
Frequency (MHz)	1880
Relative permittivity (real part)	40.00
Conductivity (S/m)	1.40
Variation (%)	-2.51

Maximum location: X=-48.00, Y=-49.00

SAR Peak: 0.65 W/kg

SAR 10g (W/Kg)	0.232659
SAR 1g (W/Kg)	0.412451




Plot 12: DUT: Smart phone; EUT Model: X6

Test Date	2019-11-18
Probe	SN 45/15 EPGO281
ConvF	2.16
Area Scan	dx=8mm dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm, Complete/ndx=8mm dy=8mm, h= 5.00 mm
Phantom	Validation plane
Device Position	Bottom Edge
Band	LTE Band 2 (RB 1)
Channels	Middle
Signal	LTE (Crest factor: 1.0)
Frequency (MHz)	1880
Relative permittivity (real part)	53.30
Conductivity (S/m)	1.52
Variation (%)	0.96

Maximum location: X=-8.00, Y=-1.00

SAR Peak: 1.18 W/kg

SAR 10g (W/Kg)	0.368022
SAR 1g (W/Kg)	0.710433

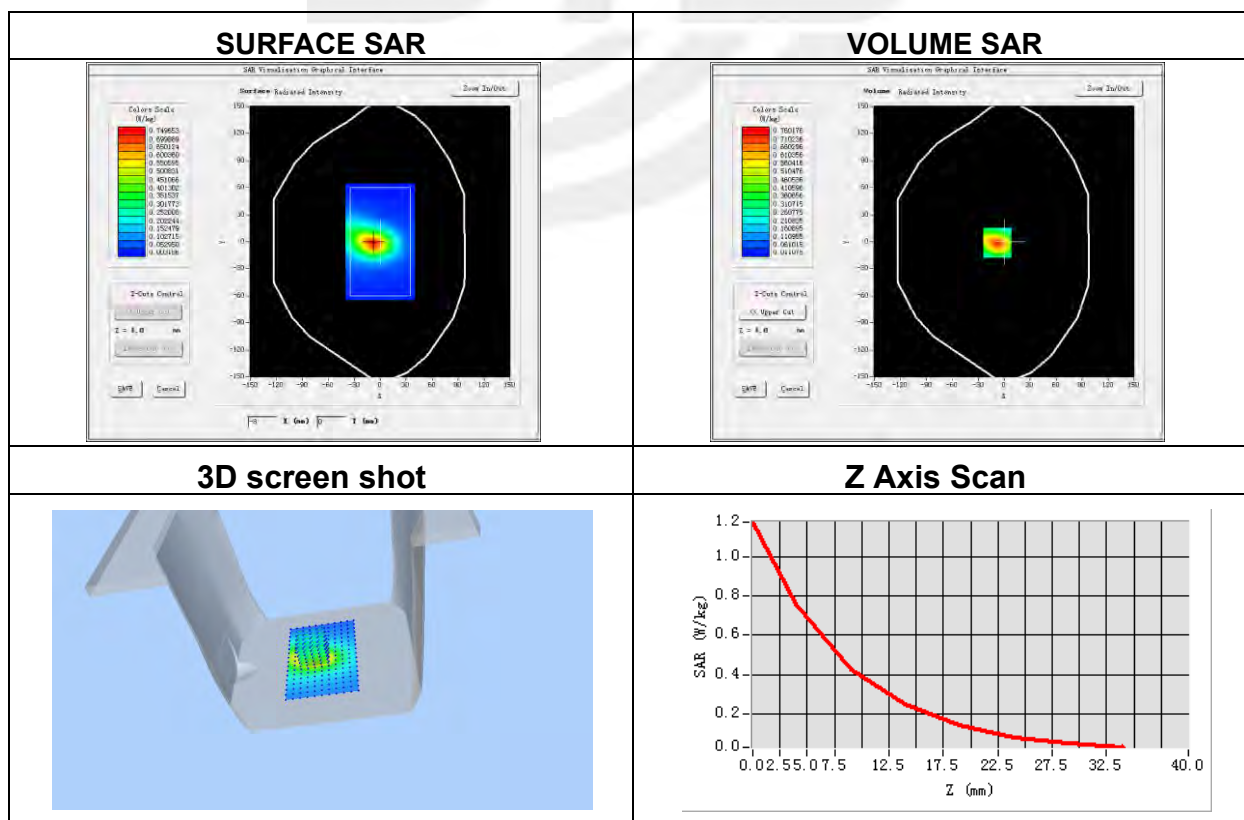


Plot 13: DUT: Smart phone; EUT Model: X6

Test Date	2019-11-15
Probe	SN 45/15 EPGO281
ConvF	1.83
Area Scan	dx=8mm dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm, Complete/ndx=8mm dy=8mm, h= 5.00 mm
Phantom	Right head
Device Position	Cheek
Band	LTE Band 4 (RB 1)
Channels	Middle
Signal	LTE (Crest factor: 1.0)
Frequency (MHz)	1732.5
Relative permittivity (real part)	40.00
Conductivity (S/m)	1.40
Variation (%)	-0.65

Maximum location: X=-49.00, Y=-47.00

SAR Peak: 0.58W/kg

SAR 10g (W/Kg)	0.231800
SAR 1g (W/Kg)	0.385858

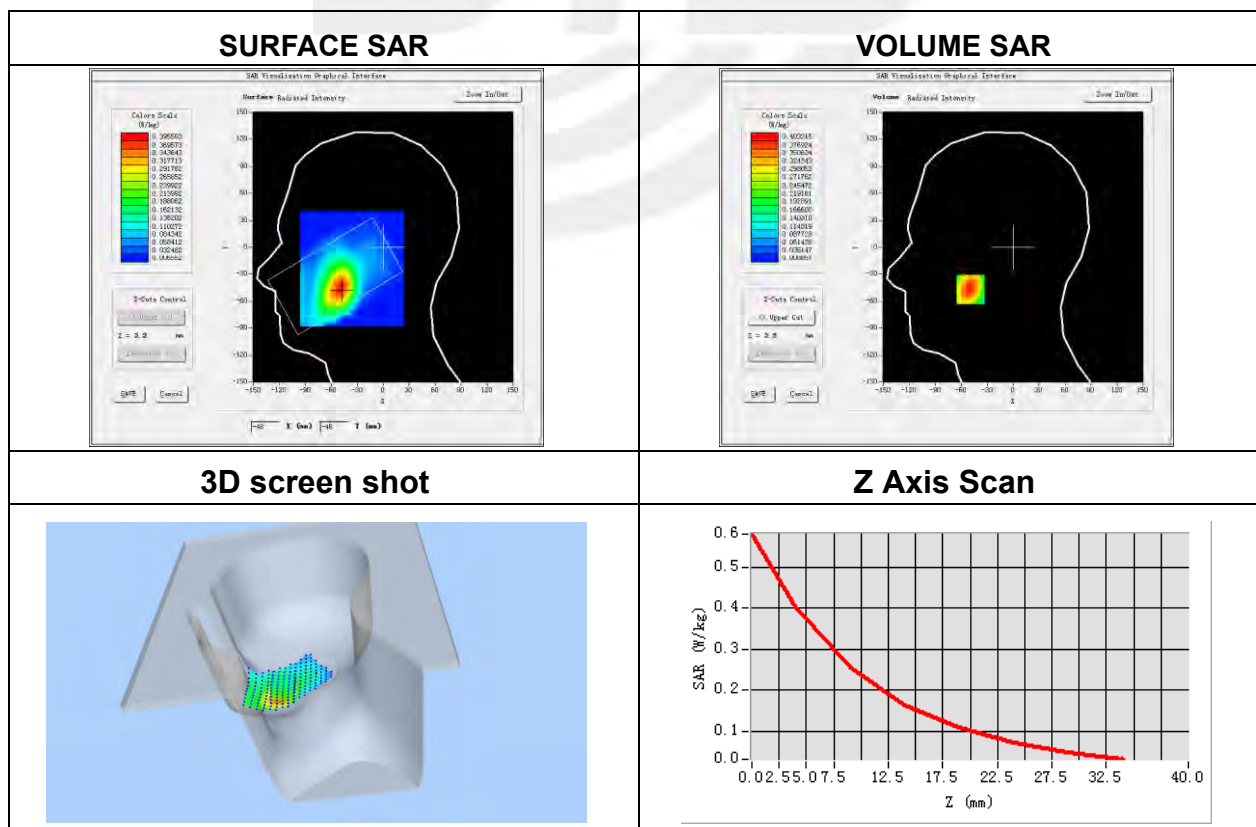


Plot 14: DUT: Smart phone; EUT Model: X6

Test Date	2019-11-15
Probe	SN 45/15 EPGO281
ConvF	1.87
Area Scan	dx=8mm dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm, Complete/ndx=8mm dy=8mm, h= 5.00 mm
Phantom	Validation plane
Device Position	Bottom Edge
Band	LTE Band 4 (RB 1)
Channels	Middle
Signal	LTE (Crest factor: 1.0)
Frequency (MHz)	1732.5
Relative permittivity (real part)	53.30
Conductivity (S/m)	1.52
Variation (%)	2.94

Maximum location: X=-16.00, Y=-33.00

SAR Peak: 1.81 W/kg

SAR 10g (W/Kg)	0.568035
SAR 1g (W/Kg)	1.083937

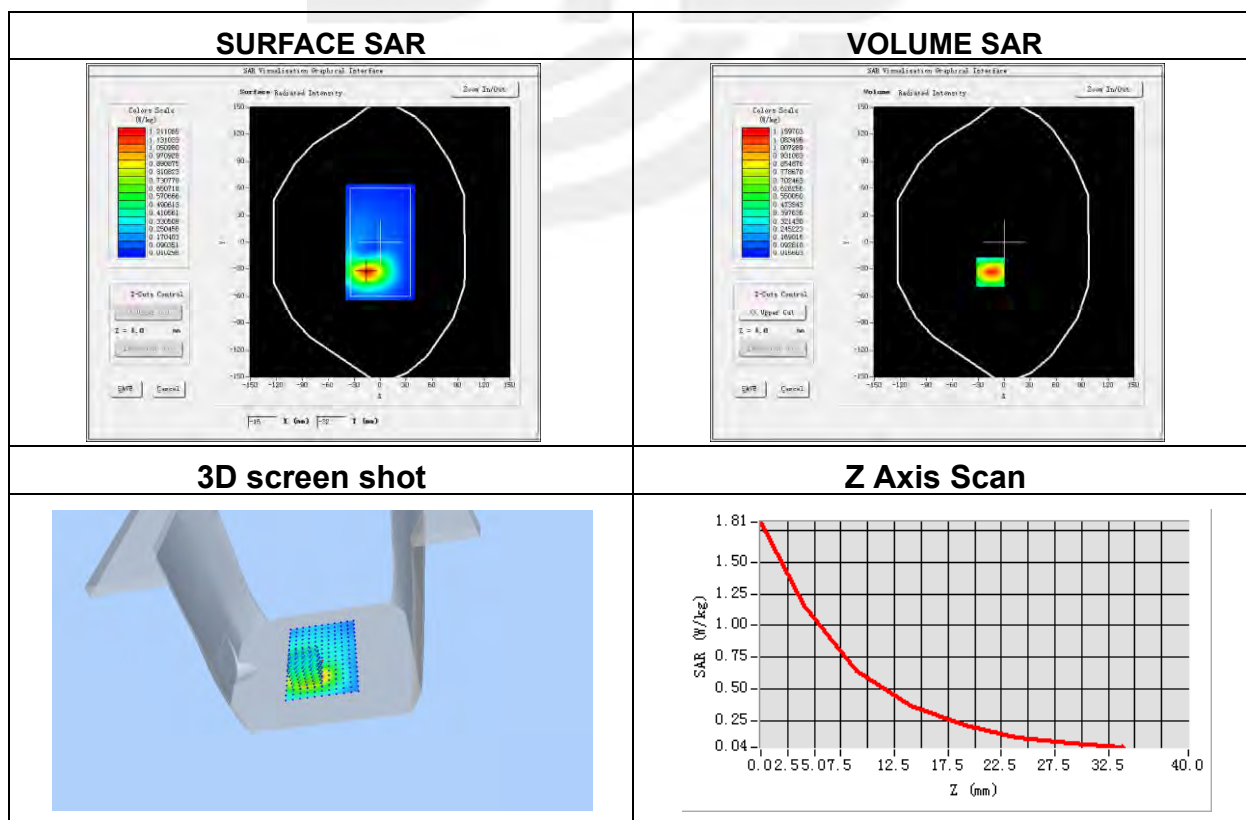


Plot 15: DUT: Smart phone; EUT Model: X6

Test Date	2019-11-14
Probe	SN 45/15 EPGO281
ConvF	1.78
Area Scan	dx=8mm dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm, Complete/ndx=8mm dy=8mm, h= 5.00 mm
Phantom	Right head
Device Position	Cheek
Band	LTE Band 5 (RB 1)
Channels	Middle
Signal	LTE (Crest factor: 1.0)
Frequency (MHz)	836.5
Relative permittivity (real part)	41.50
Conductivity (S/m)	0.90
Variation (%)	1.61

Maximum location: X=-47.00, Y=-33.00

SAR Peak: 0.37 W/kg

SAR 10g (W/Kg)	0.219452
SAR 1g (W/Kg)	0.295267

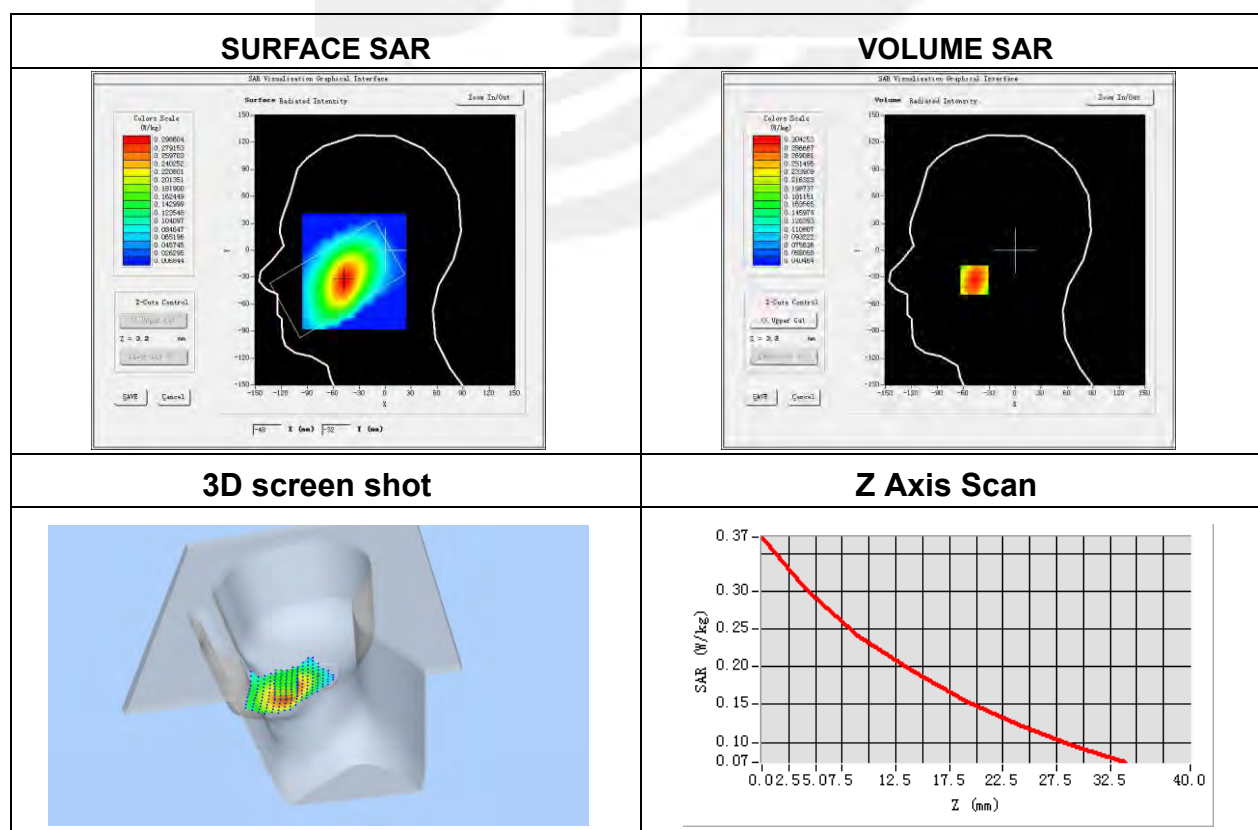


Plot 16: DUT: Smart phone; EUT Model: X6

Test Date	2019-11-14
Probe	SN 45/15 EPGO281
ConvF	1.85
Area Scan	dx=8mm dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm, Complete/ndx=8mm dy=8mm, h= 5.00 mm
Phantom	Validation plane
Device Position	Back Side
Band	LTE Band 5 (RB 1)
Channels	Middle
Signal	LTE (Crest factor: 1.0)
Frequency (MHz)	836.5
Relative permittivity (real part)	55.20
Conductivity (S/m)	0.97
Variation (%)	2.99

Maximum location: X=-2.00, Y=29.00

SAR Peak: 0.37 W/kg

SAR 10g (W/Kg)	0.214129
SAR 1g (W/Kg)	0.289650

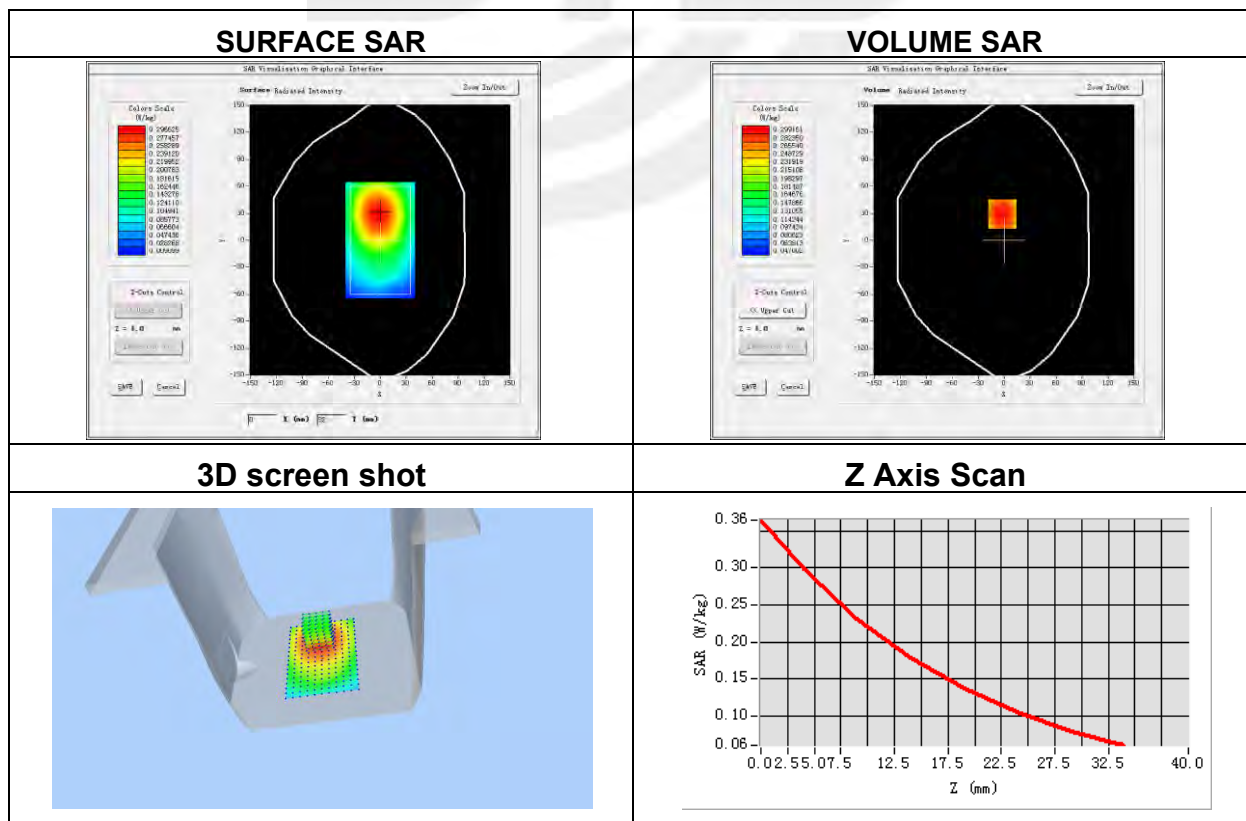


Plot 17: DUT: Smart phone; EUT Model: X6

Test Date	2019-11-20
Probe	SN 45/15 EPGO281
ConvF	2.32
Area Scan	dx=8mm dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm, Complete/ndx=8mm dy=8mm, h= 5.00 mm
Phantom	Left head
Device Position	Cheek
Band	LTE Band 7 (RB 1)
Channels	Low
Signal	LTE (Crest factor: 1.0)
Frequency (MHz)	2510.0
Relative permittivity (real part)	39.00
Conductivity (S/m)	1.96
Variation (%)	-0.03

Maximum location: X=-49.00, Y=-54.00

SAR Peak: 0.72 W/kg

SAR 10g (W/Kg)	0.198125
SAR 1g (W/Kg)	0.405924

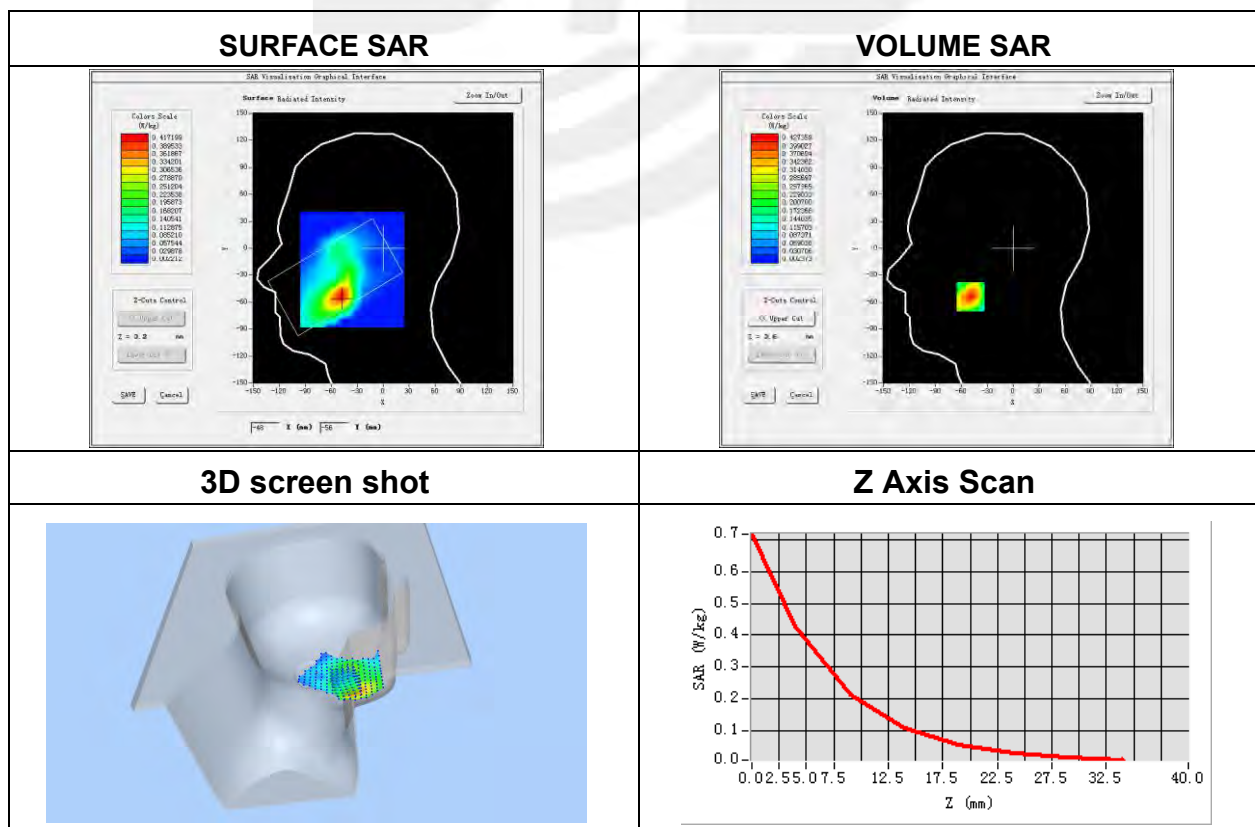


Plot 18: DUT: Smart phone; EUT Model: X6

Test Date	2019-11-20
Probe	SN 45/15 EPGO281
ConvF	2.38
Area Scan	dx=8mm dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm, Complete/ndx=8mm dy=8mm, h= 5.00 mm
Phantom	Validation plane
Device Position	Front Side
Band	LTE Band 7 (RB 1)
Channels	Low
Signal	LTE (Crest factor: 1.0)
Frequency (MHz)	2510.0
Relative permittivity (real part)	52.50
Conductivity (S/m)	2.16
Variation (%)	-1.92

Maximum location: X=20.00, Y=-2.00

SAR Peak: 1.36 W/kg

SAR 10g (W/Kg)	0.374589
SAR 1g (W/Kg)	0.759147

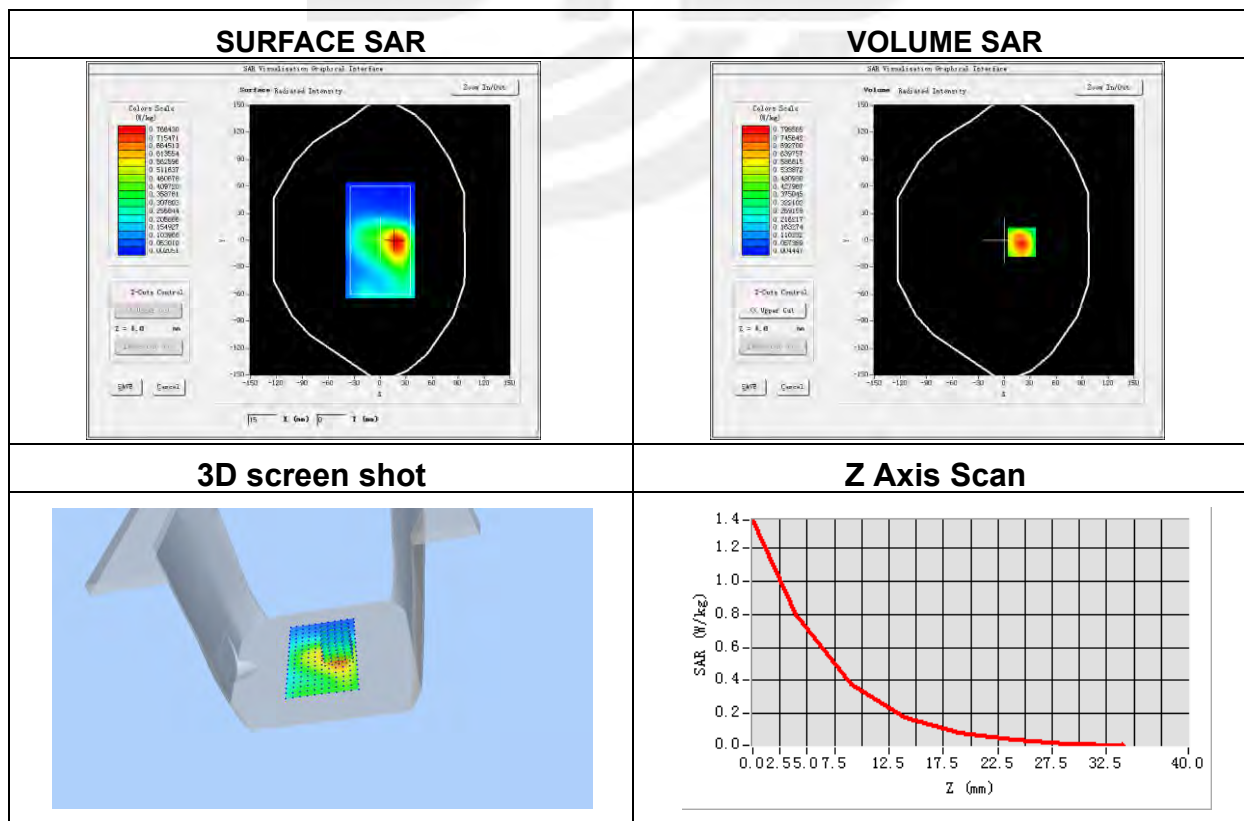

Plot 19: DUT: Smart phone; EUT Model: X6

Test Date	2019-11-13
Probe	SN 45/15 EPGO281
ConvF	1.53
Area Scan	dx=8mm dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm, Complete/ndx=8mm dy=8mm, h= 5.00 mm
Phantom	Left head
Device Position	Cheek
Band	LTE Band 12 (RB 1)
Channels	Low
Signal	LTE (Crest factor: 1.0)
Frequency (MHz)	704
Relative permittivity (real part)	41.90
Conductivity (S/m)	0.89
Variation (%)	1.56

Maximum location: X=-50.00, Y=-32.00

SAR Peak: 0.11 W/kg

SAR 10g (W/Kg)	0.069696
SAR 1g (W/Kg)	0.093143




Plot 20: DUT: Smart phone; EUT Model: X6

Test Date	2019-11-13
Probe	SN 45/15 EPGO281
ConvF	1.59
Area Scan	dx=8mm dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm, Complete/ndx=8mm dy=8mm, h= 5.00 mm
Phantom	Validation plane
Device Position	Back Side
Band	LTE Band 12 (RB 1)
Channels	Low
Signal	LTE (Crest factor: 1.0)
Frequency (MHz)	704
Relative permittivity (real part)	55.50
Conductivity (S/m)	0.96
Variation (%)	-1.42

Maximum location: X=-7.00, Y=41.00

SAR Peak: 0.19 W/kg

SAR 10g (W/Kg)	0.119564
SAR 1g (W/Kg)	0.155598

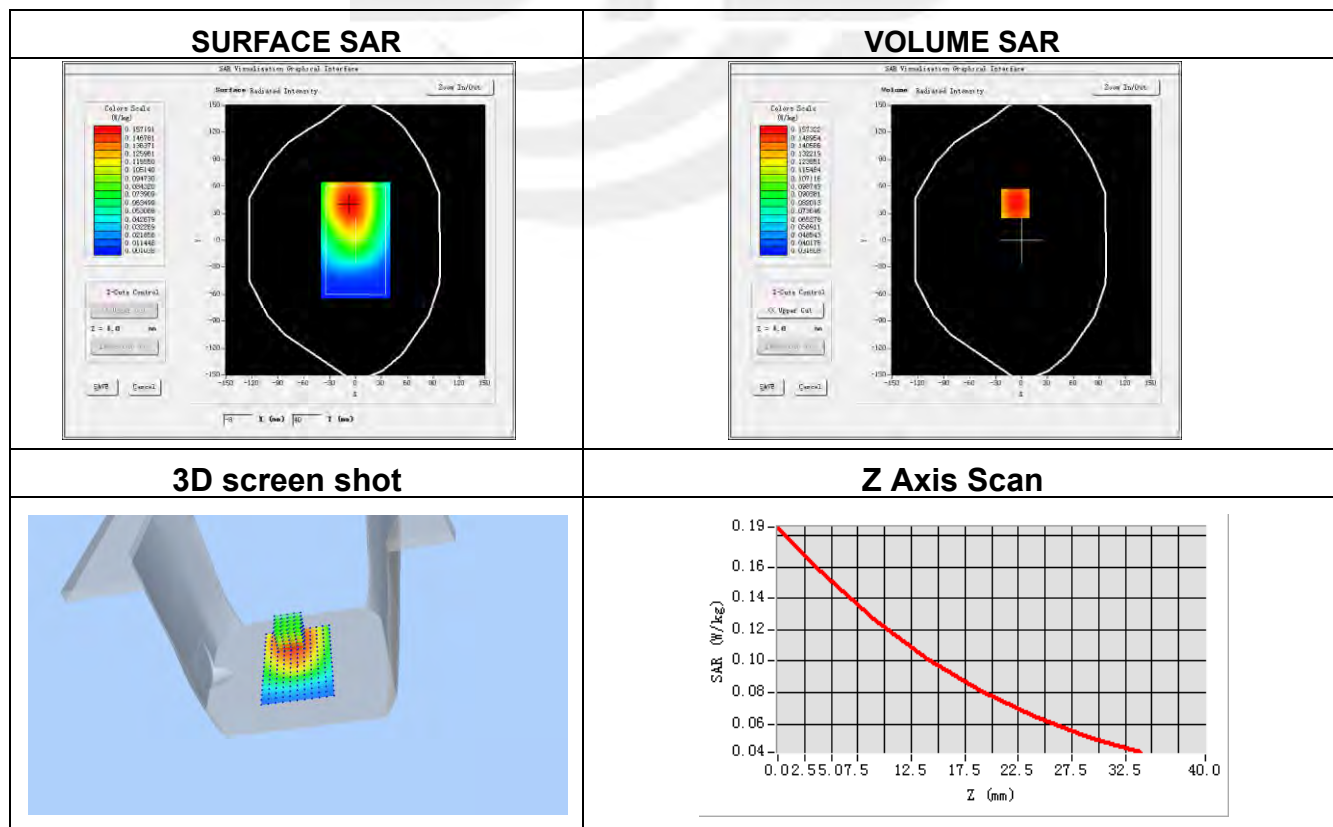

Plot 21: DUT: Smart phone; EUT Model: X6

Test Date	2019-11-13
Probe	SN 45/15 EPGO281
ConvF	1.53
Area Scan	dx=8mm dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm, Complete/ndx=8mm dy=8mm, h= 5.00 mm
Phantom	Left head
Device Position	Cheek
Band	LTE Band 17 (RB 1)
Channels	Low
Signal	LTE (Crest factor: 1.0)
Frequency (MHz)	709
Relative permittivity (real part)	41.90
Conductivity (S/m)	0.89
Variation (%)	-3.30

Maximum location: X=-54.00, Y=-37.00

SAR Peak: 0.11 W/kg

SAR 10g (W/Kg)	0.069383
SAR 1g (W/Kg)	0.090324




Plot 22: DUT: Smart phone; EUT Model: X6

Test Date	2019-11-13
Probe	SN 45/15 EPGO281
ConvF	1.59
Area Scan	dx=8mm dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm, Complete/ndx=8mm dy=8mm, h= 5.00 mm
Phantom	Validation plane
Device Position	Body back
Band	LTE Band 17 (RB 1)
Channels	Low
Signal	LTE (Crest factor: 1.0)
Frequency (MHz)	709
Relative permittivity (real part)	55.50
Conductivity (S/m)	0.96
Variation (%)	-0.36

Maximum location: X=7.00, Y=39.00

SAR Peak: 0.17 W/kg

SAR 10g (W/Kg)	0.106323
SAR 1g (W/Kg)	0.137973

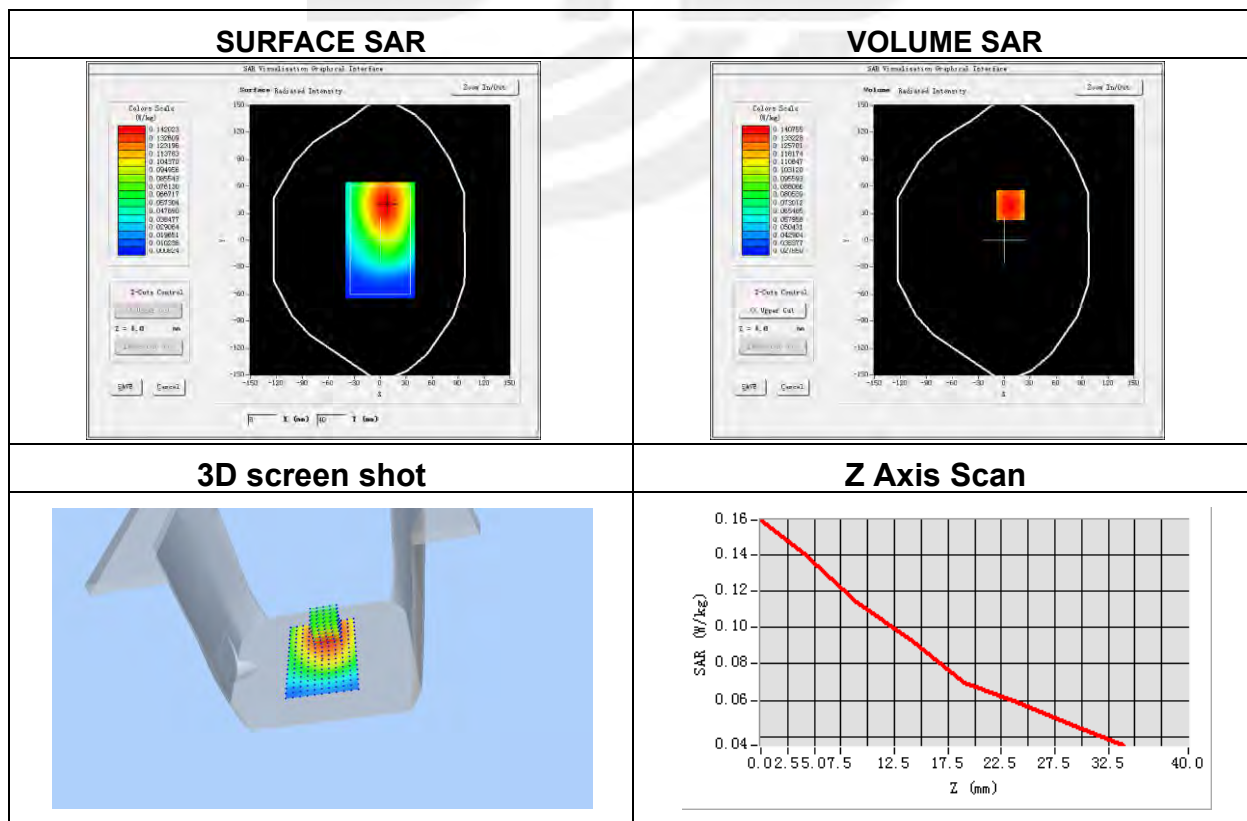



Appendix C. Probe Calibration And Dipole Calibration Report

Refer the appendix Calibration Report.

※※※※END OF THE REPORT※※※※

