



FCC RADIO TEST REPORT

FCC ID:O86T8540

Product : 8 inch Full Ruggedized Tablet

Trade Mark : N/A

Model Name : xTablet T8540

Serial Model : N/A

Report No. : NTEK-2016NT12260898F5

Prepared for

MobileDemand, LC.

1501 Boyson Square Drive Suite 101

Prepared by

NTEK Testing Technology Co., Ltd.

1/F, Building E, Fenda Science Park, Sanwei Community,
Xixiang Street Bao'an District, Shenzhen 518126 P.R. China

Tel.: +86-755-6115 6588

Fax.: +86-755-6115 6599

Website:<http://www.ntek.org.cn>

TEST RESULT CERTIFICATION**Applicant's name** : MobileDemand, LC.

Address : 1501 Boyson Square Drive Suite 101

Manufacturer's Name : Emdoor Information Co.,LtdAddress : 3A 1/F Jinfulai Tower, No.49-1, Dabao Road, Baoan 28 District,
Shenzhen, guandong, China.**Product description**

Product name..... : 8 inch Full Ruggedized Tablet

Model and/or type reference : xTablet T8540

Serial Model : N/A

Standards : FCC Part15.407: 01 Oct. 2015Test procedure ANSI C63.10-2013 and KDB 789033 D02 General UNII Test
Procedures New Rules v01r01

FCC KDB 662911 D01 Multiple Transmitter Output v01

FCC KDB 662911 D02 MIMO With Cross Polarized Antenna V01

This device described above has been tested by NTEK, and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements/ the Industry Canada requirements.. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of NTEK, this document may be altered or revised by NTEK, personnel only, and shall be noted in the revision of the document.


Date of Test

Date (s) of performance of tests 26 Dec. 2016 ~03 Mar. 2017

Date of Issue 03 Mar. 2017


Test Result **Pass**

Testing Engineer :




(Lake Xie)

Technical Manager :



(Jason Chen)

Authorized Signatory :



(Sam Chen)

Table of Contents

	Page
1 . SUMMARY OF TEST RESULTS	6
1.1 TEST FACILITY	7
1.2 MEASUREMENT UNCERTAINTY	7
2 . GENERAL INFORMATION	8
2.1 GENERAL DESCRIPTION OF EUT	8
2.2 DESCRIPTION OF TEST MODES	10
2.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	11
2.4 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE)	12
2.5 EQUIPMENTS LIST FOR ALL TEST ITEMS	13
3 . EMC EMISSION TEST	15
3.1 CONDUCTED EMISSION MEASUREMENT	15
3.1.1 POWER LINE CONDUCTED EMISSION LIMITS	15
3.1.2 TEST PROCEDURE	16
3.1.3 DEVIATION FROM TEST STANDARD	16
3.1.4 TEST SETUP	16
3.1.5 EUT OPERATING CONDITIONS	16
3.1.6 TEST RESULTS	17
3.2 RADIATED EMISSION MEASUREMENT	21
3.2.1 APPLICABLE STANDARD	21
3.2.2 CONFORMANCE LIMIT	21
3.2.3 MEASURING INSTRUMENTS	21
3.2.4 TEST CONFIGURATION	21
3.2.5 TEST PROCEDURE	23
3.2.6 TEST RESULTS (BETWEEN 9KHZ – 30 MHZ)	24
3.2.7 TEST RESULTS (BETWEEN 30MHZ – 1GHZ)	25
3.2.8 TEST RESULTS (1GHZ-18GHZ)	29
4 . POWER SPECTRAL DENSITY TEST	37
4.1 APPLIED PROCEDURES / LIMIT	37
4.2 TEST PROCEDURE	38
4.3 DEVIATION FROM STANDARD	38
4.4 TEST SETUP	38
4.5 EUT OPERATION CONDITIONS	38
4.6 TEST RESULTS	39
5 . 26 DB & 99% EMISSION BANDWIDTH	47
5.1 APPLIED PROCEDURES / LIMIT	47
5.2 TEST PROCEDURE	47

Table of Contents

	Page
5.3 EUT OPERATION CONDITIONS	48
5.4 TEST RESULTS	49
6 . MINIMUM 6 DB BANDWIDTH	57
6.1 APPLIED PROCEDURES / LIMIT	57
6.2 TEST PROCEDURE	57
6.3 DEVIATION FROM STANDARD	57
6.4 TEST SETUP	57
6.5 EUT OPERATION CONDITIONS	57
6.6 TEST RESULTS	58
7 . MAXIMUM CONDUCTED OUTPUT POWER	66
7.1 PPLIED PROCEDURES / LIMIT	66
7.2 TEST PROCEDURE	66
7.3 DEVIATION FROM STANDARD	68
7.4 TEST SETUP	68
7.5 EUT OPERATION CONDITIONS	68
7.6 TEST RESULTS	69
8 . OUT OF BAND EMISSIONS	71
8.1 APPLICABLE STANDARD	71
8.2 TEST PROCEDURE	71
8.3 DEVIATION FROM STANDARD	71
8.4 TEST SETUP	71
8.5 EUT OPERATION CONDITIONS	71
8.6 TEST RESULTS	72
9.SPURIOUS RF CONDUCTED EMISSIONS	78
9.1CONFORMANCE LIMIT	78
9.2MEASURING INSTRUMENTS	78
9.3TEST SETUP	78
9.4TEST PROCEDURE	78
9.5TEST RESULTS	78
10. FREQUENCY STABILITY MEASUREMENT	93
10.1 LIMIT	93
10.2 TEST PROCEDURES	93
10.3 TEST SETUP LAYOUT	93
10.4 EUT OPERATION DURING TEST	93
10.5 TEST RESULTS	94
11. ANTENNA REQUIREMENT	100
11.1 STANDARD REQUIREMENT	100
11.2 EUT ANTENNA	100

Table of Contents**Page****APPENDIX-PHOTOGRAPHS OF EUT CONSTRUCTIONAL DETAILS**

1. SUMMARY OF TEST RESULTS

Test procedures according to the technical standards:

FCC Part15 (15.407) , Subpart E			
Standard Section	Test Item	Judgment	Remark
15.207	AC Power Line Conducted Emissions	PASS	
15.209(a), 15.407 (b)(1) 15.407 (b)(4) 15.407 (b)(6)	Spurious Radiated Emissions	PASS	
15.407 (a)(1) 15.407 (a)(3) 15.1049	26 dB and 99% Emission Bandwidth	PASS	
15.407(e)	Minimum 6 dB bandwidth	PASS	
15.407 (a)(1) 15.407 (a)(3)	Maximum Conducted Output Power	PASS	
2.1051, 15.407(b)(1) 15.407(b)(4)	Band Edges	PASS	
15.407 (a)(1) 15.407 (a)(3)	Power Spectral Density	PASS	
2.1051, 15.407(b)	Spurious Emissions at Antenna Terminals	PASS	
15.407(g)	Frequency Stability Measurement	PASS	
15.203	Antenna Requirement	PASS	

NOTE:

(1) "N/A" denotes test is not applicable in this Test Report

1.1 TEST FACILITY

NTEK Testing Technology Co., Ltd

Add.:1/F, Building E, Fenda Science Park, Sanwei Community, Xixiang Street, Bao'an District, Shenzhen P.R. China.

FCC Registration No.:238937; IC Registration No.:9270A-1

CNAS Registration No.:L5516

1.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95 %.

No.	Item	Uncertainty
1	Conducted Emission Test	$\pm 1.38\text{dB}$
2	RF power,conducted	$\pm 0.16\text{dB}$
3	Spurious emissions,conducted	$\pm 0.21\text{dB}$
4	All emissions,radiated(<1G)	$\pm 4.68\text{dB}$
5	All emissions,radiated(>1G)	$\pm 4.89\text{dB}$
6	Temperature	$\pm 0.5^{\circ}\text{C}$
7	Humidity	$\pm 2\%$

2. GENERAL INFORMATION

2.1 GENERAL DESCRIPTION OF EUT

Equipment	8 inch Full Ruggedized Tablet	
Trade Mark	N/A	
Model Name	xTablet T8540	
Product Description	IEEE 802.11 WLAN Mode Supported	☒ 802.11a(20MHz channel bandwidth) ☒ 802.11n/AC(20MHz channel bandwidth) ☒ 802.11n/AC(40MHz channel bandwidth) ☒ 802.11AC(80MHz channel bandwidth)
	Data Rate	802.11 a: 6,9,12,18,24,36,48,54Mbps; 802.11n(HT20):MCS0-MCS15; 802.11n(HT40):MCS0-MCS15; 802.11ac(VHT20): NSS1, MCS0-MCS8 802.11ac(VHT40/VHT80):NSS1, MCS0-MCS9
	Modulation	OFDM with BPSK/QPSK/16QAM/64QAM/256QAM for 802.11a/n/ac;
	Operating Frequency Range	☒ 5180-5240MHz for 802.11a/n(HT20)/AC20; 5190-5230MHz for 802.11n(HT40)/AC40/AC80; ☒ 5745-5825 MHz for 802.11a/n(HT20)/AC20; 5755-5795 MHz for 802.11a/n(HT40)/AC40/AC80;
	Number of Channels	☒ 4 channels for 802.11a/n20/ac20 in the 5180-5240MHz band ; 2 channels for 802.11 n40/ac40 in the 5190-5230MHz band ; 1 channels for 802.11 ac80 in the 5210MHz band ; ☒ 5 channels for 802.11a/n20/ac20 in the 5745-5825MHz band ; 2 channels for 802.11 n40/ac40 in the 5755-5795MHz band ; 1 channels for 802.11 ac80 in the 5775MHz band ;
	Antenna Type	FPCB Antenna
	Smart system	☒ SISO for 802.11a/n/ac
	Antenna Gain	1 dBi
	Based on the application, features, or specification exhibited in User's Manual, More details of EUT technical specification, please refer to the User's Manual.	
Ratings	DC 3.7V/7500mAh from Li-ion Battery or DC 5V from Adapter.	
Adapter	Model:AW018WR-0500300UH Input:100-240V 50/60Hz 0.5A Output:DC 5V, 3A	
Battery	DC 3.7V/7500mAh	
Connecting I/O Port(s)	Please refer to the User's Manual	

Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.
2. Frequency and Channel list for 802.11 a/n/ac (20MHz) (5180-5240MHz):

802.11a/n/ac(20MHz) Carrier Frequency Channel							
Channel	Frequen cy (MHz)	Channel	Frequen cy (MHz)	Channel	Frequen cy (MHz)	Channel	Frequen cy (MHz)
36	5180	44	5220	-	-	-	-
40	5200	48	5240	-	-	-	-

Frequency and Channel list for 802.11 n /ac (40MHz) (5190-5230MHz):

802.11n /ac(40MHz) Carrier Frequency Channel							
Channel	Frequen cy (MHz)	Channel	Frequen cy (MHz)	Channel	Frequen cy (MHz)	Channel	Frequen cy (MHz)
38	5190	-	-	-	-	-	-
46	5230	-	-	-	-	-	-

Frequency and Channel list for 802.11 a/n/ac (20 MHz) (5745-5825MHz):

802.11a/n/ac(20 MHz) Carrier Frequency Channel							
Channel	Frequen cy (MHz)	Channel	Frequen cy (MHz)	Channel	Frequen cy (MHz)	Channel	Frequen cy (MHz)
149	5745	153	5765	157	5785	161	5805
165	5825	-	-	-	-	-	-

Frequency and Channel list for 802.11n/ac (40MHz) (5755-5795MHz):

802.11n/ac 40MHz Carrier Frequency Channel					
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
151	5755	159	5795	-	-

5.2G

802.11ac (80MHz) Carrier Frequency Channel	
Channel	Frequency (MHz)
42	5210

5.8G

802.11ac (80MHz) Carrier Frequency Channel	
Channel	Frequency (MHz)
155	5775

2.2 DESCRIPTION OF TEST MODES

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Pretest Mode	Description
Mode 1	Link Mode
Mode 2	802.11a / n/ ac 20 CH36/ CH40/ CH 48 802.11a /n/ ac 20 CH149/ CH157/ CH 165
Mode 3	802.11n/ ac40 CH38/ CH 46 802.11n/ ac40 CH 151 / CH 159


For Radiated Emission	
Final Test Mode	Description
Mode 1	Link Mode
Mode 2	802.11a / n/ ac 20 CH36/ CH40/ CH 48 802.11a /n/ ac 20 CH149/ CH157/ CH 165
Mode 3	802.11n/ ac40 CH38/ CH 46 802.11n/ ac40 CH 151 / CH 159

Note:

- (1) The measurements are performed at the highest, middle, lowest available channels.
- (2) The measurements are performed at all Bit Rate of Transmitter, the worst data was reported

2.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED


For AC Conducted Emission Mode

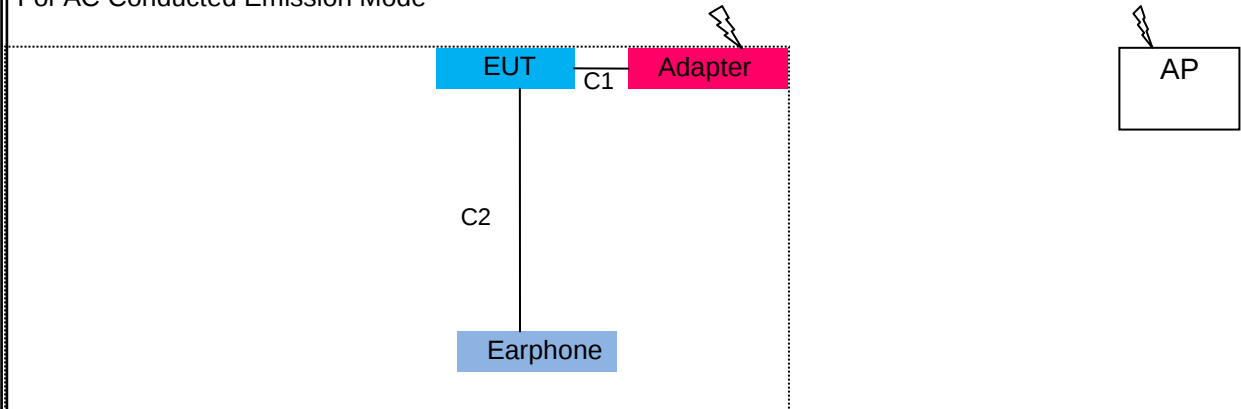

Radiated Spurious Emission Test



For Conducted Test Cases

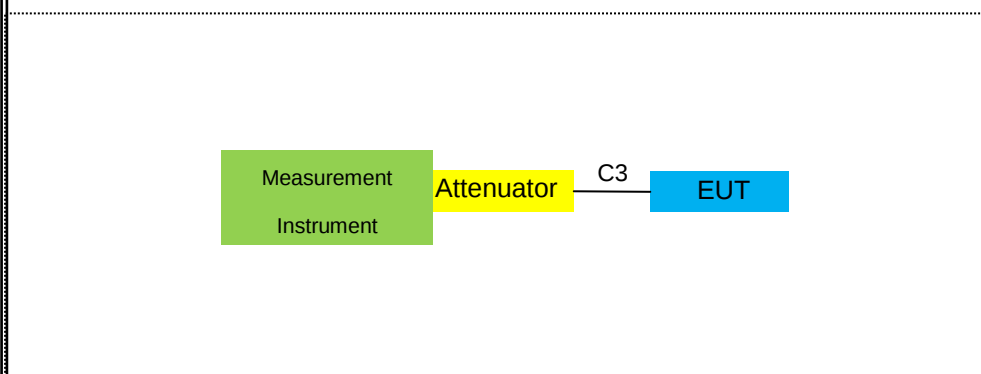

2.4 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE)

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Brand	Model/Type No.	Series No.	Note
E-1	8 inch Full Ruggedized Tablet	N/A	xTablet T8540	O86T8540	EUT
E-2	Adapter	N/A	AW018WR-0500300UH	N/A	Peripherals
E-3	Earphone	N/A	2688	N/A	

Item	Cable Type	Shielded Type	Ferrite Core	Length	Note
C-1	Power Cable	NO	NO	1.0m	
C-2	Earphone Cable	NO	NO	0.8m	
C-3	RF Cable	NO	NO	0.5m	

Note:

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in 『Length』 column.

2.5 EQUIPMENTS LIST FOR ALL TEST ITEMS

Radiation Test equipment

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until	Calibration period
1	Spectrum Analyzer	Agilent	E4407B	MY45108040	2016.07.06	2017.07.05	1 year
2	Spectrum Analyzer	Agilent	N9020A	MY49100060	2016.07.06	2017.07.05	1 year
3	EMI Test Receiver	Agilent	N9038A	MY53227146	2016.07.06	2017.07.05	1 year
4	Test Receiver	R&S	ESPI	101318	2016.07.06	2017.07.05	1 year
5	Bilog Antenna	TESEQ	CBL6111D	31216	2016.07.06	2017.07.05	1 year
6	50Ω Coaxial Switch	Anritsu	MP59B	6200264416	2016.07.06	2017.07.05	1 year
7	Spectrum Analyzer	ADVANTEST	R3132	150900201	2016.07.06	2017.07.05	1 year
8	Horn Antenna	EM	EM-AH-10180	2011071402	2016.07.06	2017.07.05	1 year
9	Horn Ant	Schwarzbeck	BBHA 9170	9170-181	2016.07.06	2017.07.05	1 year
10	Amplifier	EM	EM-30180	060538	2016.12.22	2017.12.21	1 year
11	Amplifier	MITEQ	TTA1840-35-HG	177156	2016.07.06	2017.07.05	1 year
12	Loop Antenna	ARA	PLA-1030/B	1029	2016.07.06	2017.07.05	1 year
13	Power Meter	R&S	NRVS	100696	2016.07.06	2017.07.05	1 year
14	Power Sensor	R&S	URV5-Z4	0395.1619.05	2016.07.06	2017.07.05	1 year
15	Test Cable	N/A	R-01	N/A	2016.07.06	2017.07.05	1 year
16	Test Cable	N/A	R-02	N/A	2016.07.06	2017.07.05	1 year
17	High Test Cable(1G-40 GHz)	N/A	R-03	N/A	2016.07.06	2017.07.05	1 year
18	High Test Cable(1G-40 GHz)	N/A	R-04	N/A	2016.07.06	2017.07.05	1 year

Conduction Test equipment

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until	Calibration period
1	Test Receiver	R&S	ESCI	101160	2016.07.06	2017.07.05	1 year
2	LISN	R&S	ENV216	101313	2016.08.24	2017.08.23	1 year
3	LISN	EMCO	3816/2	00042990	2016.07.06	2017.07.05	1 year
4	50Ω Coaxial Switch	Anritsu	MP59B	6200264417	2016.07.06	2017.07.05	1 year
5	Passive Voltage Probe	R&S	ESH2-Z3	100196	2016.07.06	2017.07.05	1 year
6	Absorbing clamp	R&S	MOS-21	100423	2016.07.06	2017.07.05	1 year
7	Test Cable	N/A	C01	N/A	2016.06.08	2017.06.07	1 year
8	Test Cable	N/A	C02	N/A	2016.06.08	2017.06.07	1 year
9	Test Cable	N/A	C03	N/A	2016.06.08	2017.06.07	1 year

1	Attenuation	MCE	24-10-34	BN9258	2016.07.06	2017.07.05	1 year
---	-------------	-----	----------	--------	------------	------------	--------

3. EMC EMISSION TEST

3.1 CONDUCTED EMISSION MEASUREMENT

3.1.1 POWER LINE CONDUCTED EMISSION Limits (Frequency Range 150KHz-30MHz)

FREQUENCY (MHz)	Class A (dBuV)		Class B (dBuV)		Standard
	Quasi-peak	Average	Quasi-peak	Average	
0.15 -0.5	79.00	66.00	66 - 56 *	56 - 46 *	CISPR
0.50 -5.0	73.00	60.00	56.00	46.00	CISPR
5.0 -30.0	73.00	60.00	60.00	50.00	CISPR

0.15 -0.5	79.00	66.00	66 - 56 *	56 - 46 *	FCC/ RSS-247
0.50 -5.0	73.00	60.00	56.00	46.00	FCC/ RSS-247
5.0 -30.0	73.00	60.00	60.00	50.00	FCC/ RSS-247

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " * " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.

The following table is the setting of the receiver

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz


3.1.2 TEST PROCEDURE

- The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- LISN at least 80 cm from nearest part of EUT chassis.
- For the actual test configuration, please refer to the related Item –EUT Test Photos.

3.1.3 DEVIATION FROM TEST STANDARD

No deviation

3.1.4 TEST SETUP

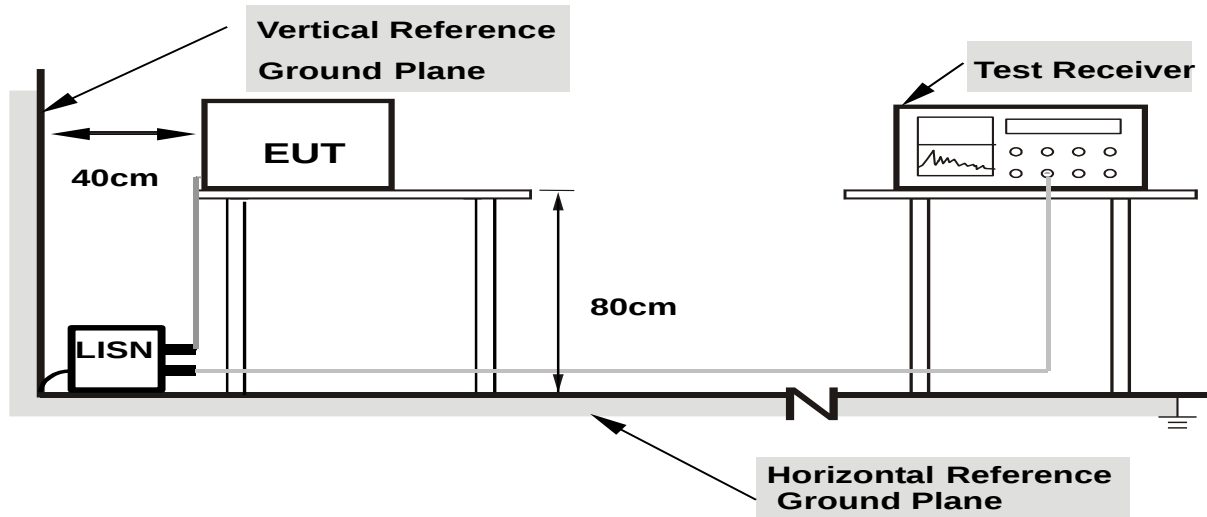

Note: 1.Support units were connected to second LISN.

2.Both of LISNs (AMN) are 80 cm from EUT and at least 80 from other units and other metal planes

3.1.5 EUT OPERATING CONDITIONS

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.


3.1.6 TEST RESULTS

EUT :	8 inch Full Ruggedized Tablet	Model Name. :	xTablet T8540
Temperature :	26 °C	Relative Humidity :	56%
Pressure :	1010hPa	Phase :	L
Test Voltage :	DC 5V from adapter AC120V/60Hz	Test Mode :	Mode 1

Frequency (MHz)	Reading Level (dBμV)	Correct Factor (dB)	Measure-ment (dBμV)	Limits (dBμV)	Margin (dB)	Remark
0.1943	49.13	10.17	59.30	63.85	-4.55	QP
0.1943	21.72	10.17	31.89	53.85	-21.96	AVG
0.2195	46.26	10.16	56.42	62.83	-6.41	QP
0.2195	21.73	10.16	31.89	52.83	-20.94	AVG
0.2620	43.96	10.14	54.10	61.36	-7.26	QP
0.2620	22.20	10.14	32.34	51.36	-19.02	AVG
0.3420	39.59	10.04	49.63	59.15	-9.52	QP
0.3420	16.85	10.04	26.89	49.15	-22.26	AVG
0.4218	38.91	9.92	48.83	57.41	-8.58	QP
0.4218	11.31	9.92	21.23	47.41	-26.18	AVG
13.2659	36.08	9.92	46.00	60.00	-14.00	QP
13.2659	17.78	9.92	27.70	50.00	-22.30	AVG

Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

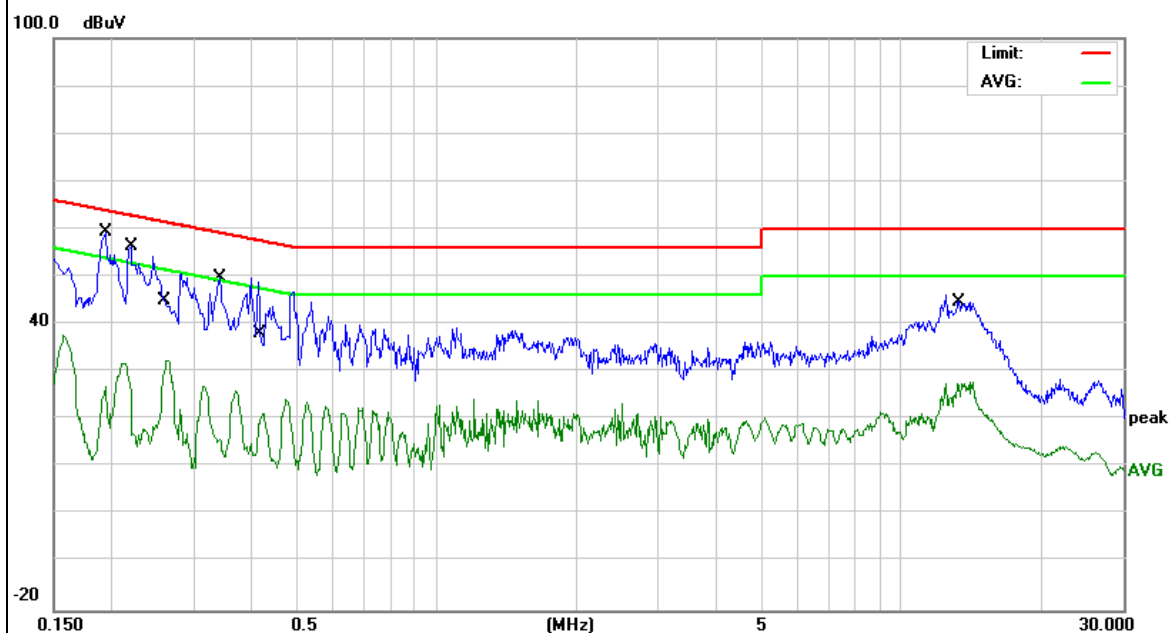


EUT :	8 inch Full Ruggedized Tablet	Model Name. :	xTablet T8540
Temperature :	26 °C	Relative Humidity :	56%
Pressure :	1010hPa	Phase :	N
Test Voltage :	DC 5V from adapter AC120V/60Hz	Test Mode :	Mode 1

Frequency	Reading Level	Correct Factor	Measure-ment	Limits	Margin	Remark
(MHz)	(dBμV)	(dB)	(dBμV)	(dBμV)	(dB)	
0.1737	47.81	10.09	57.90	64.78	-6.88	QP
0.1737	26.30	10.09	36.39	54.78	-18.39	AVG
0.2242	48.57	10.13	58.70	62.66	-3.96	QP
0.2242	27.99	10.13	38.12	52.66	-14.54	AVG
0.2816	46.28	10.12	56.40	60.77	-4.37	QP
0.2816	23.79	10.12	33.91	50.77	-16.86	AVG
0.3709	43.82	9.98	53.80	58.48	-4.68	QP
0.3709	25.30	9.98	35.28	48.48	-13.20	AVG
0.6300	35.20	9.80	45.00	56.00	-11.00	QP
0.6300	17.83	9.80	27.63	46.00	-18.37	AVG
13.5259	36.05	9.95	46.00	60.00	-14.00	QP
13.5259	19.09	9.95	29.04	50.00	-20.96	AVG

Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

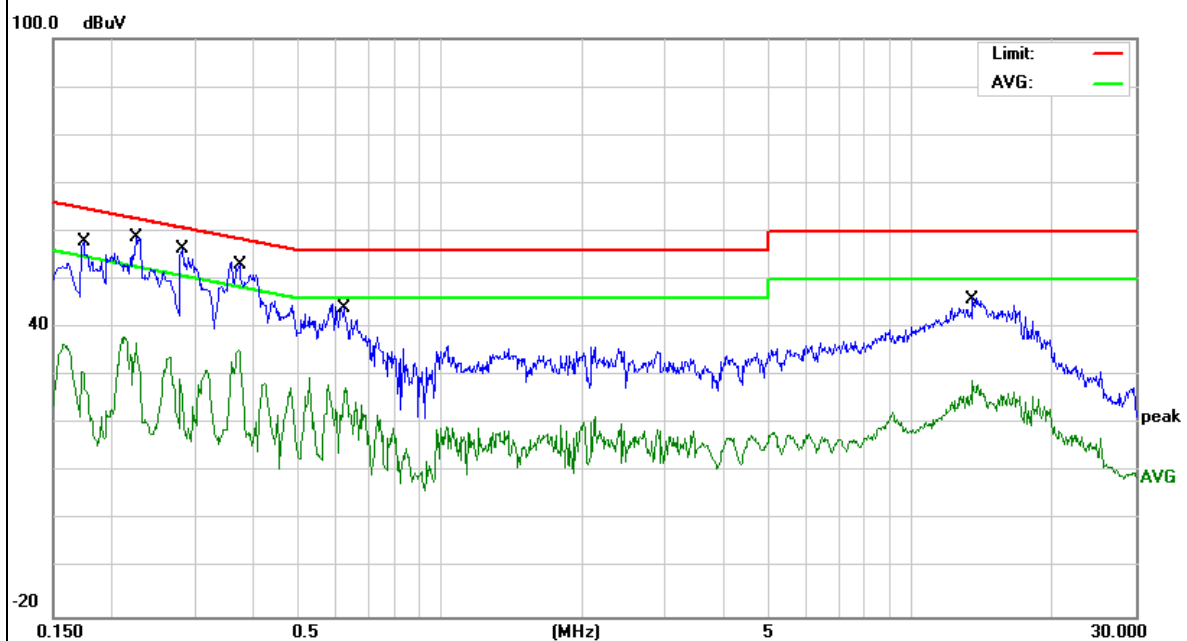


EUT :	8 inch Full Ruggedized Tablet	Model Name. :	xTablet T8540
Temperature :	26 °C	Relative Humidity :	56%
Pressure :	1010hPa	Phase :	L
Test Voltage :	DC 5V from adapter AC240V/60Hz	Test Mode :	Mode 1

Frequency	Reading Level	Correct Factor	Measure-ment	Limits	Margin	Remark
(MHz)	(dBμV)	(dB)	(dBμV)	(dBμV)	(dB)	
0.1980	50.10	10.17	60.27	63.69	-3.42	QP
0.1980	16.77	10.17	26.94	53.69	-26.75	AVG
0.2230	45.78	10.16	55.94	62.70	-6.76	QP
0.2230	21.50	10.16	31.66	52.70	-21.04	AVG
0.2898	44.76	10.12	54.88	60.53	-5.65	QP
0.2898	12.06	10.12	22.18	50.53	-28.35	AVG
0.4138	39.90	9.93	49.83	57.57	-7.74	QP
0.4138	9.13	9.93	19.06	47.57	-28.51	AVG
0.4939	36.91	9.85	46.76	56.10	-9.34	QP
0.4939	14.12	9.85	23.97	46.10	-22.13	AVG
13.7299	33.50	9.92	43.42	60.00	-16.58	QP
13.7299	16.20	9.92	26.12	50.00	-23.88	AVG

Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

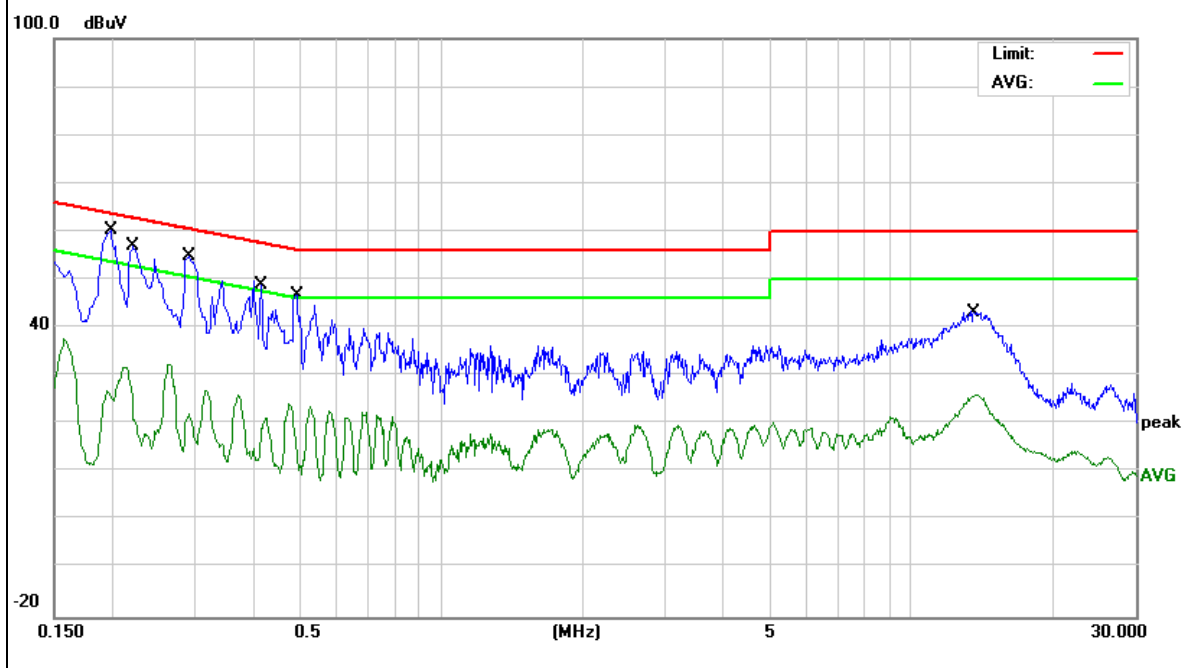


EUT :	8 inch Full Ruggedized Tablet	Model Name. :	xTablet T8540
Temperature :	26 °C	Relative Humidity :	56%
Pressure :	1010hPa	Phase :	N
Test Voltage :	DC 5V from adapter AC240V/60Hz	Test Mode :	Mode 1

Frequency	Reading Level	Correct Factor	Measure-ment	Limits	Margin	Remark
(MHz)	(dBμV)	(dB)	(dBμV)	(dBμV)	(dB)	
0.1779	44.70	10.10	54.80	64.58	-9.78	QP
0.1779	16.18	10.10	26.28	54.58	-28.30	AVG
0.2099	48.27	10.13	58.40	63.21	-4.81	QP
0.2099	32.49	10.13	42.62	53.21	-10.59	AVG
0.2898	46.27	10.12	56.39	60.53	-4.14	QP
0.2898	11.26	10.12	21.38	50.53	-29.15	AVG
0.4218	43.42	9.92	53.34	57.41	-4.07	QP
0.4218	18.61	9.92	28.53	47.41	-18.88	AVG
0.5897	35.19	9.81	45.00	56.00	-11.00	QP
0.5897	18.48	9.81	28.29	46.00	-17.71	AVG
13.8818	37.68	9.95	47.63	60.00	-12.37	QP
13.8818	19.84	9.95	29.79	50.00	-20.21	AVG

Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

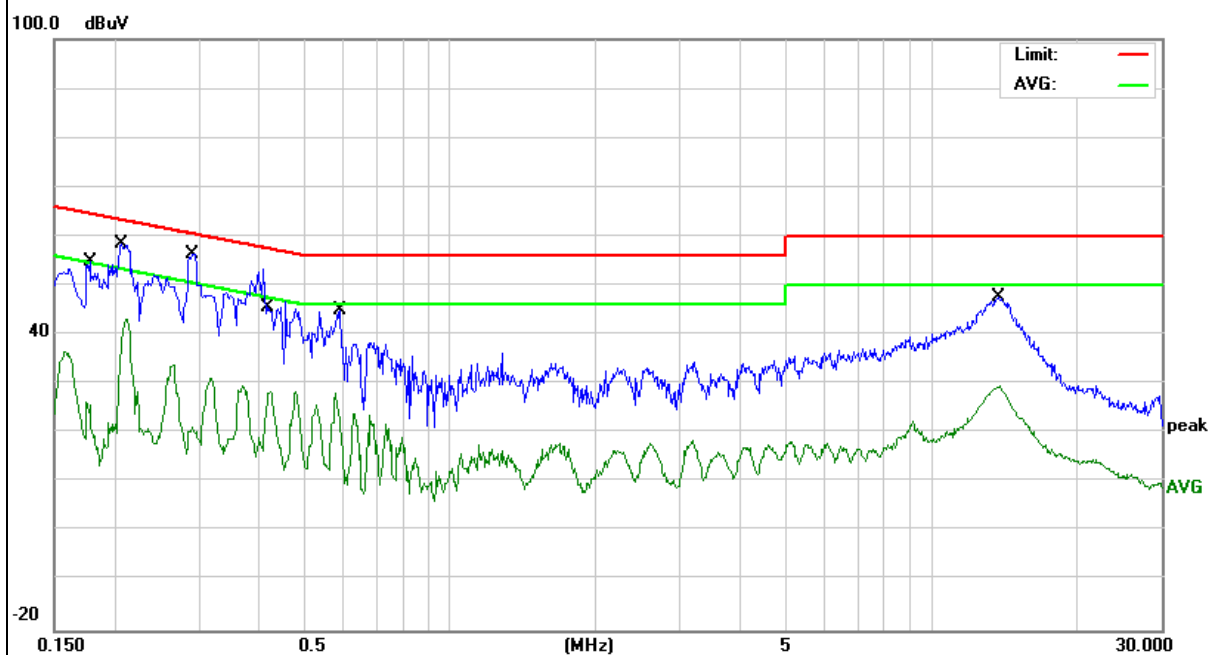

3.2 RADIATED EMISSION MEASUREMENT

3.2.1 APPLICABLE STANDARD

According to FCC Part 15.407(d) and 15.209

3.2.2 CONFORMANCE LIMIT

According to FCC Part 15.407(b)(7): radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).
According to FCC Part 15.205, Restricted bands

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
10.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	(2)
13.36-13.41			

20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Restricted Frequency(MHz)	Field Strength (μV/m)	Field Strength (dBμV/m)	Measurement Distance
0.009-0.490	2400/F(KHz)	20 log (uV/m)	300
0.490-1.705	2400/F(KHz)	20 log (uV/m)	30
1.705-30.0	30	29.5	30
30-88	100	40	3
88-216	150	43.5	3
216-960	200	46	3
Above 960	500	54	3

Limits of Radiated Emission Measurement(Above 1000MHz)

Frequency(MHz)	Class B (dBuV/m) (at 3M)	
	PEAK	AVERAGE
Above 1000	74	54

Remark :1. Emission level in dBuV/m=20 log (uV/m)

2. Measurement was performed at an antenna to the closed point of EUT distance of meters.

3. Distance extrapolation factor =40log(Specific distance/ test distance)(dB);


Limit line=Specific limits(dBuV) + distance extrapolation factor.

3.2.3 MEASURING INSTRUMENTS


The Measuring equipment is listed in the section 6.3 of this test report.

3.2.4 TEST CONFIGURATION


(a) For radiated emissions below 30MHz

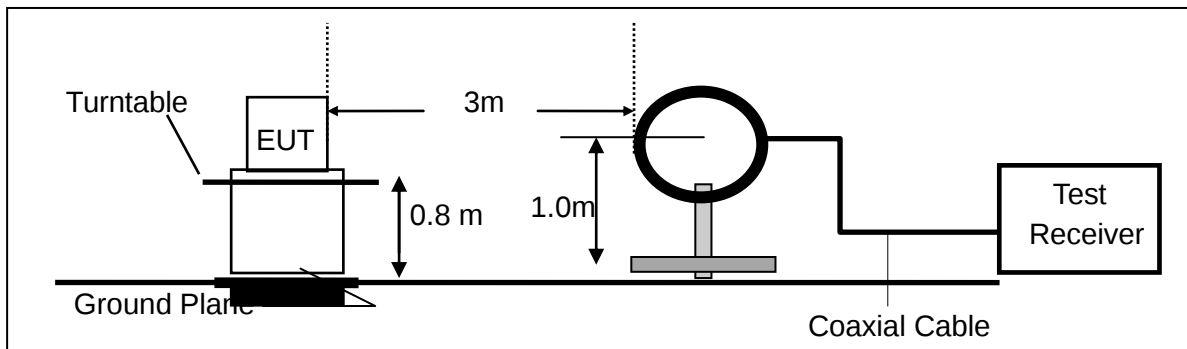

(b) For radiated emissions from 30MHz to 1000MHz

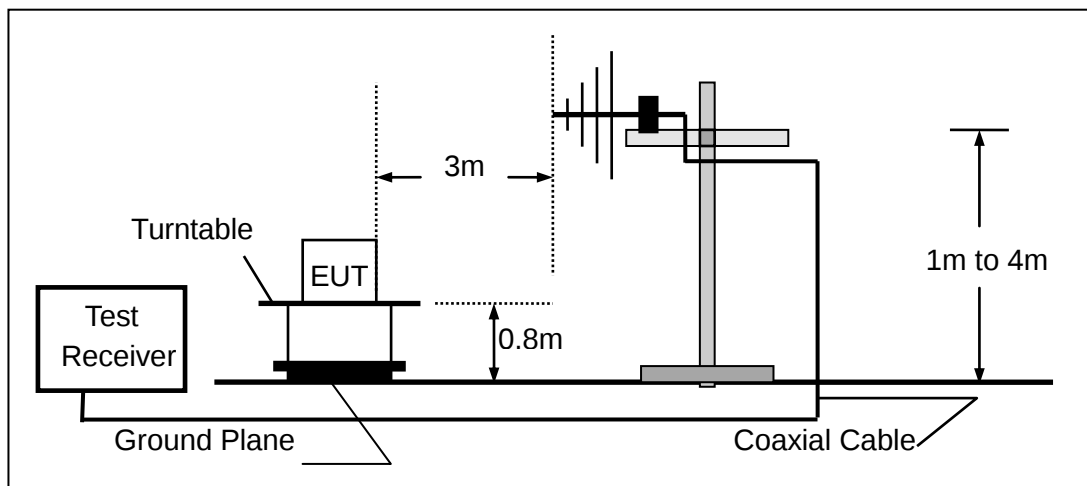

(c) For radiated emissions above 1000MHz

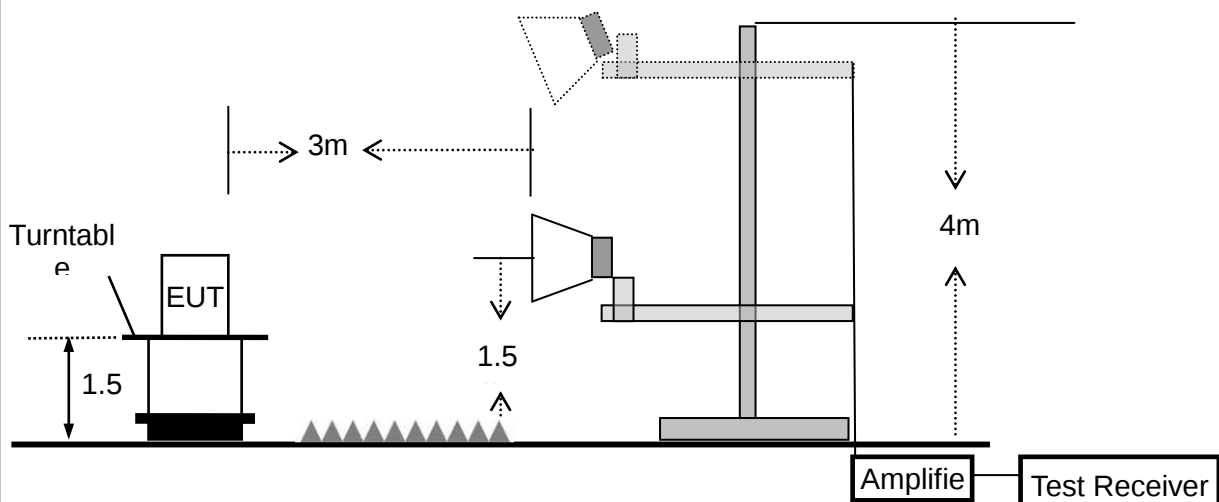

3.2.5 TEST PROCEDURE

The test site semi-anechoic chamber has met the requirement of NSA tolerance 4 dB according to the standards: ANSI C63.10-2013. The test distance is 3m. The setup is according to the requirements in Section 13.1.4.1 of ANSI C63.10-2013 and CAN/CSA-CEI/IEC CISPR 22.

This test is required for any spurious emission that falls in a Restricted Band, as defined in Section 15.205. It must be performed with the highest gain of each type of antenna proposed for use with the EUT.

Use the following spectrum analyzer settings:

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RB / VB (emission in restricted band)	1 MHz / 1 MHz for Peak, 1 MHz / 10Hz for Average

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP

- The measuring distance of at 3 m shall be used for measurements at frequency up to 1GHz. For frequencies above 1GHz, any suitable measuring distance may be used.
- The EUT was placed on the top of a rotating table 0.8 m for below 1GHz and 1.5m for above 1GHz the ground at a 3 meter. The table was rotated 360 degrees to determine the position of the highest radiation.
- The height of the equipment or of the substitution antenna shall be 0.8 m for below 1GHz and 1.5m for above 1GHz; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed.
- For the actual test configuration, please refer to the related Item –EUT Test Photos.

Note:

Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported

During the radiated emission test, the Spectrum Analyzer was set with the following configurations:

Frequency Band (MHz)	Function	Resolution bandwidth	Video Bandwidth
30 to 1000	QP	120 kHz	300 kHz
Above 1000	Peak	1 MHz	1 MHz
	Average	1 MHz	10 Hz

Note: for the frequency ranges below 30 MHz, a narrower RBW is used for these ranges but the measured value should add a RBW correction factor (RBWCF) where $RBWCF [dB] = 10 \cdot \lg(100 [kHz] / \text{narrower RBW} [kHz])$. , the narrower RBW is 1 kHz and RBWCF is 20 dB for the frequency 9 kHz to 150 kHz, and the narrower RBW is 10 kHz and RBWCF is 10 dB for the frequency 150 kHz to 30 MHz.

3.2.6 TEST RESULTS (BETWEEN 9KHZ – 30 MHZ)

EUT:	8 inch Full Ruggedized Tablet	Model Name. :	xTablet T8540
Temperature:	20 °C	Relative Humidity:	48%
Pressure:	1010 hPa	Test Voltage :	DC 3.7V
Test Mode :	TX	Polarization :	--

Freq.	Reading	Limit	Margin	State
(MHz)	(dBuV/m)	(dBuV/m)	(dB)	P/F
--	--	--	--	N/A
--	--	--	--	N/A

NOTE:

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Distance extrapolation factor = $40 \log (\text{specific distance/test distance})$ (dB);

Limit line = specific limits(dBuv) + distance extrapolation factor.


3.2.7 TEST RESULTS (BETWEEN 30MHZ – 1GHZ)

EUT :	8 inch Full Ruggedized Tablet	Model Name :	xTablet T8540
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	DC 3.7V
Test Mode :	TX(5.2G)- 802.11a (High CH)		

Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
V	47.9938	19.84	9.69	29.53	40	-10.47	QP
V	155.3644	15.43	12.59	28.02	43.5	-15.48	QP
V	206.3976	19.52	10.87	30.39	43.5	-13.11	QP
V	319.937	17.29	16.89	34.18	46	-11.82	QP
V	612.0642	18.22	24.78	43	46	-3	QP
V	958.7943	9.37	31.35	40.72	46	-5.28	QP

Remark:


Absolute Level= ReadingLevel+ Factor, Margin= Absolute Level - Limit

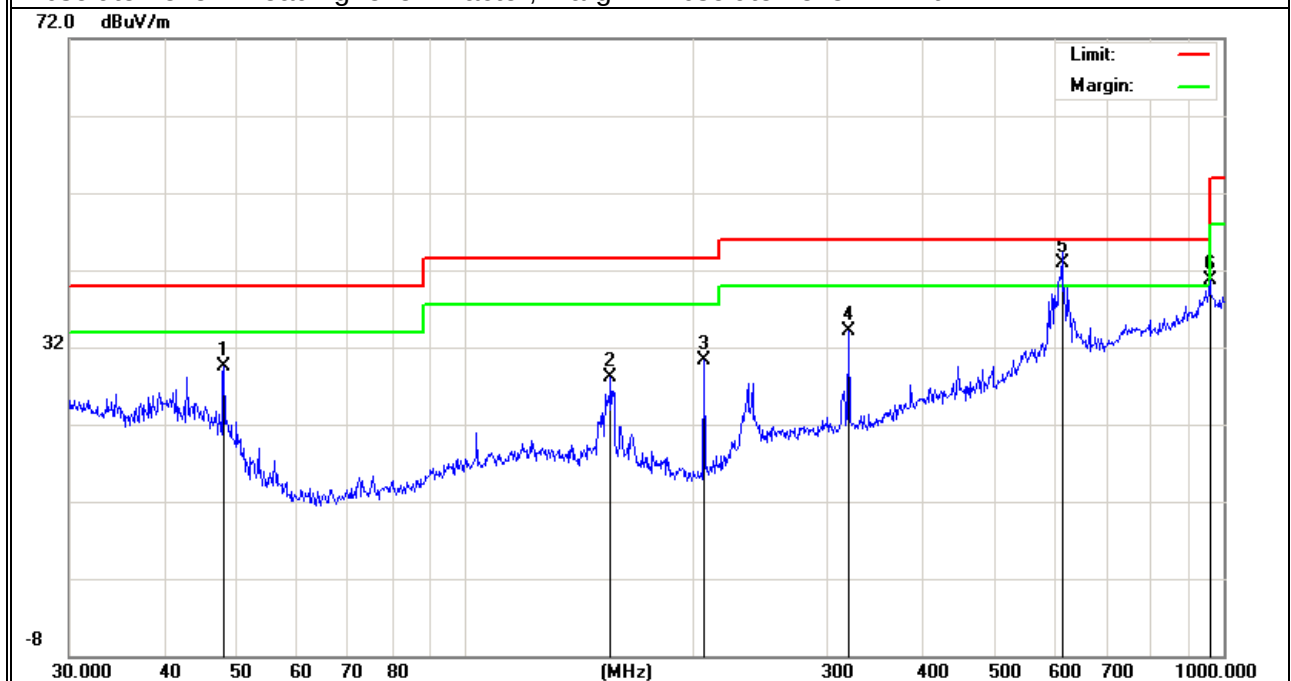

Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
H	155.3642	17.14	12.59	29.73	43.5	-13.77	QP
H	236.6447	16.12	12.86	28.98	46	-17.02	QP
H	314.3765	20.58	16.71	37.29	46	-8.71	QP
H	480.5276	16.44	21.18	37.62	46	-8.38	QP
H	584.7894	11.47	24.65	36.12	46	-9.88	QP
H	962.1621	10.21	31.33	41.54	54	-12.46	QP

Remark:

Absolute Level= ReadingLevel+ Factor, Margin= Absolute Level - Limit

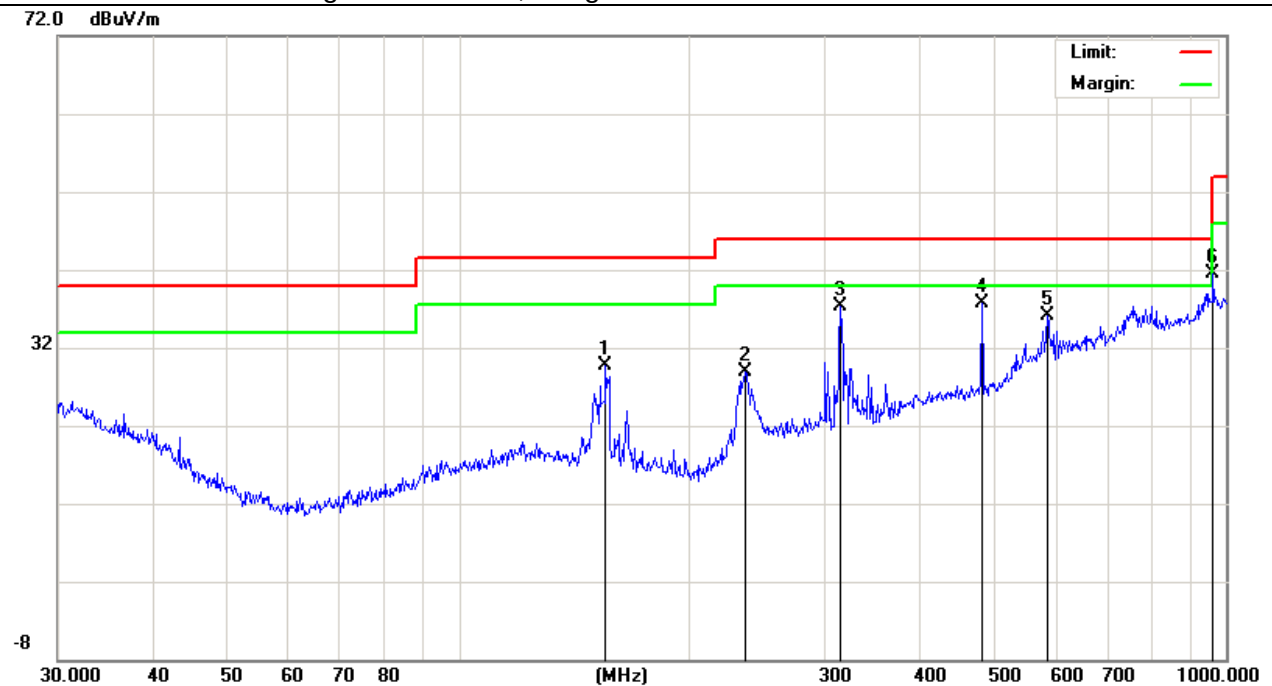


EUT :	8 inch Full Ruggedized Tablet	Model Name :	xTablet T8540
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	DC 3.7V
Test Mode :	TX(5.8G) - 802.11 N(20) (High CH)		

Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
V	33.4448	15.75	18.05	33.8	40	-6.2	QP
V	119.436	16.14	13.8	29.94	43.5	-13.56	QP
V	162.6106	16.49	12.01	28.5	43.5	-15	QP
V	222.1698	15.06	12.34	27.4	46	-18.6	QP
V	462.3455	15.02	21.01	36.03	46	-9.97	QP
V	625.0778	13.76	25.02	38.78	46	-7.22	QP

Remark:


Absolute Level= ReadingLevel+ Factor, Margin= Absolute Level - Limit

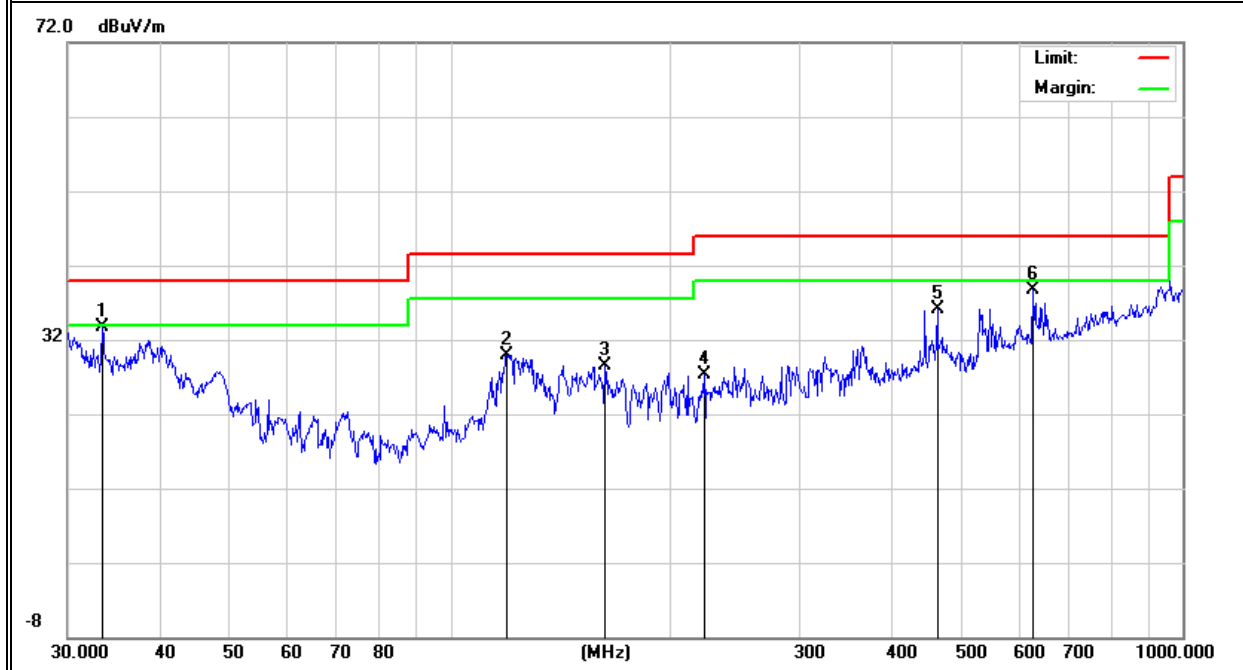

Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
H	150.0107	18.77	13.07	31.84	43.5	-11.66	QP
H	251.1802	14.31	15.39	29.7	46	-16.3	QP
H	312.1792	19.65	16.65	36.3	46	-9.7	QP
H	443.2943	13.89	20.81	34.7	46	-11.3	QP
H	528.2458	12.78	23.36	36.14	46	-9.86	QP
H	833.317	11.19	28.65	39.84	46	-6.16	QP

Remark:

Absolute Level= ReadingLevel+ Factor, Margin= Absolute Level - Limit

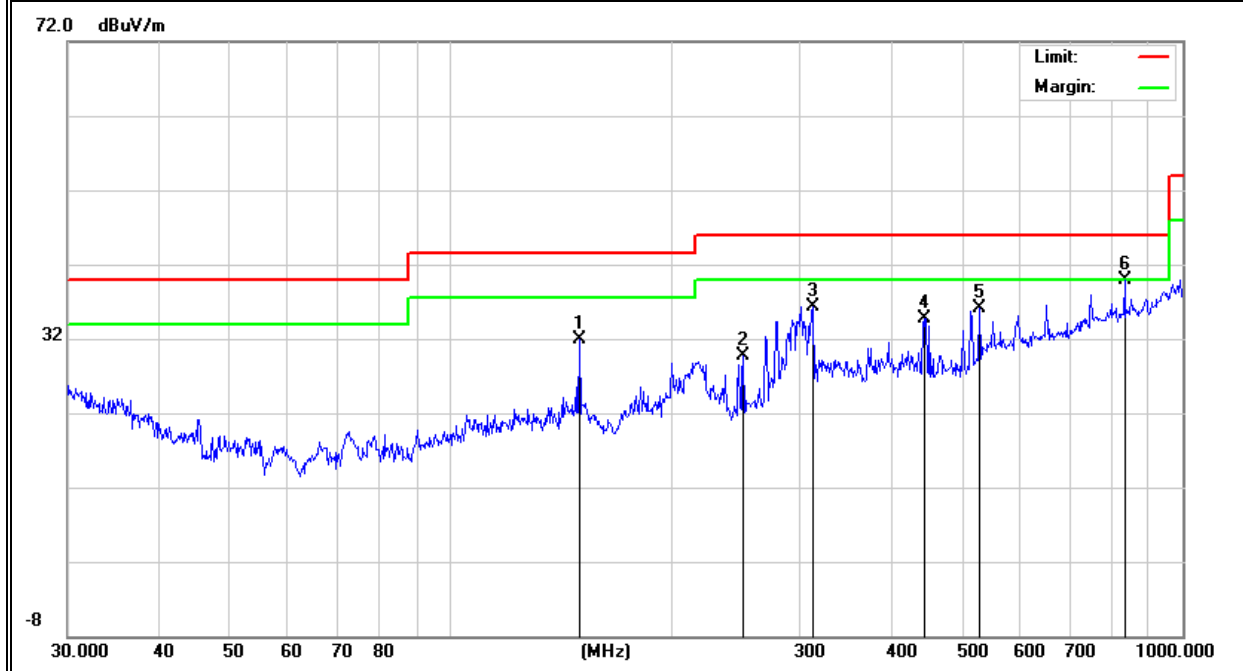

3.2.8 TEST RESULTS (1GHz-18GHz)

EUT :	8 inch Full Ruggedized Tablet	Model Name :	xTablet T8540
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	DC 3.7V
Test Mode :	TX (5.2G)-802.11N(20) 5180MHz~5240MHz		

Polar	Frequency	Meter Reading	Cable loss	Antenna Factor	Preamplifier Factor	Emission Level	Limits	Margin	Detector Type
(H/V)	(MHz)	(dBuV)	(dB)	dB/m	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Low Channel (5180 MHz)-Above 1G									
Vertical	4434.513	54.50	5.94	35.40	44.00	51.843	74.00	-22.16	Pk
Vertical	4434.513	43.71	5.94	35.40	44.00	41.052	54.00	-12.95	AV
Vertical	10370.45	52.95	8.46	39.75	44.50	56.663	74.00	-17.34	Pk
Vertical	10370.45	43.95	8.46	39.75	44.50	47.655	54.00	-6.345	AV
Vertical	15540.24	51.13	10.12	38.80	44.10	55.954	74.00	-18.05	Pk
Vertical	15540.24	41.83	10.12	38.80	42.70	48.051	54.00	-5.949	AV
Horizontal	4434.745	55.07	5.94	35.18	44.00	52.187	74.00	-21.81	Pk
Horizontal	4434.745	43.49	5.94	35.18	44.00	40.608	54.00	-13.39	AV
Horizontal	10370.21	52.14	8.46	38.71	44.50	54.808	74.00	-19.19	Pk
Horizontal	10730.21	42.54	8.46	38.71	44.50	45.213	54.00	-8.787	AV
Horizontal	15540.52	54.16	10.12	38.38	44.10	58.558	74.00	-15.44	Pk
Horizontal	15540.52	42.86	10.12	38.38	44.10	47.261	54.00	-6.739	AV
middle Channel (5200 MHz)-Above 1G									
Vertical	4592.278	54.089	6.48	36.35	44.05	52.869	74.00	-21.13	Pk
Vertical	4592.278	43.248	6.48	36.35	44.05	42.028	54.00	-11.97	AV
Vertical	10401.17	51.906	8.47	37.88	44.51	53.746	74.00	-20.25	Pk
Vertical	10401.17	43.566	8.47	37.88	44.51	45.406	54.00	-8.594	AV
Vertical	15600.24	52.252	10.12	38.8	44.10	57.072	74.00	-16.93	Pk
Vertical	15600.24	43.623	10.12	38.8	42.70	49.843	54.00	-4.157	AV
Horizontal	4592.475	43.233	6.48	36.37	44.05	42.033	74.00	-31.97	Pk
Horizontal	4592.475	51.603	6.48	36.37	44.05	50.403	54.00	-3.597	AV
Horizontal	10400.24	42.118	8.47	38.64	44.50	44.728	74.00	-29.27	Pk
Horizontal	10400.24	40.523	8.47	38.64	44.50	43.133	54.00	-10.87	AV
Horizontal	15600.18	43.76	10.12	38.38	44.10	48.16	74.00	-25.84	Pk
Horizontal	15600.18	41.82	10.12	38.38	44.10	46.22	54.00	-7.78	AV
High Channel (5240 MHz)-Above 1G									
Vertical	4739.364	57.46	7.10	37.24	43.50	58.3	74.00	-15.7	Pk
Vertical	4739.364	43.24	7.10	37.24	43.50	44.075	54.00	-9.925	AV
Vertical	10480.16	53.31	8.46	37.68	44.50	54.946	74.00	-19.05	Pk
Vertical	10480.16	42.16	8.46	37.68	44.50	43.805	54.00	-10.2	AV
Vertical	15720.13	51.44	10.12	38.8	44.10	56.262	74.00	-17.74	Pk
Vertical	15720.13	41.13	10.12	38.8	42.70	47.348	54.00	-6.652	AV
Horizontal	4739.154	55.17	7.10	37.24	43.50	56.014	74.00	-17.99	Pk
Horizontal	4739.154	43.88	7.10	37.24	43.50	44.721	54.00	-9.279	AV
Horizontal	10481.62	54.09	8.46	38.57	44.50	56.62	74.00	-17.38	Pk
Horizontal	10481.62	43.29	8.46	38.57	44.50	45.823	54.00	-8.177	AV
Horizontal	15720.32	54.11	10.12	38.38	44.10	58.507	74.00	-15.49	Pk
Horizontal	15720.32	43.64	10.12	38.38	44.10	48.042	54.00	-5.958	AV

Note: "802.11N(20)(5G)" mode is the worst mode. PK value is lower than the Average value limit, So average didn't record.

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = $20 \log$ Emission level ($\mu\text{V/m}$).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

EUT :	8 inch Full Ruggedized Tablet	Model Name :	xTablet T8540
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	DC 3.7V
Test Mode :	TX (5.8G) -802.11N(20) 5745MHz~5825MHz		

Polar	Frequency	Meter Reading	Cable loss	Antenna Factor	Preamplifier Factor	Emission Level	Limits	Margin	Detector Type
(H/V)	(MHz)	(dBuV)	(dB)	dB/m	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Low Channel (5745 MHz)-Above 1G									
Vertical	4679.204	52.42	5.94	35.40	44.00	49.76	74.00	-24.24	Pk
Vertical	4679.204	45.26	5.94	35.40	44.00	42.6	54.00	-11.4	AV
Vertical	11490.561	60.16	8.46	39.75	44.50	63.87	74.00	-10.13	Pk
Vertical	11490.561	44.23	8.46	39.75	44.50	47.94	54.00	-6.06	AV
Vertical	17235.725	56.42	10.12	38.80	44.10	61.24	74.00	-12.76	Pk
Vertical	17235.725	40.24	10.12	38.80	42.70	46.46	54.00	-7.54	AV
Horizontal	4679.163	57.36	5.94	35.18	44.00	54.48	74.00	-19.52	Pk
Horizontal	4679.163	44.27	5.94	35.18	44.00	41.39	54.00	-12.61	AV
Horizontal	11490.158	59.48	8.46	38.71	44.50	62.15	74.00	-11.85	Pk
Horizontal	11490.158	44.35	8.46	38.71	44.50	47.02	54.00	-6.98	AV
Horizontal	17235.486	58.23	10.12	38.38	44.10	62.63	74.00	-11.37	Pk
Horizontal	17235.486	42.46	10.12	38.38	44.10	46.86	54.00	-7.14	AV
middle Channel (5785 MHz)-Above 1G									
Vertical	4592.156	58.58	6.48	36.35	44.05	57.36	74.00	-16.64	Pk
Vertical	4592.156	43.24	6.48	36.35	44.05	42.02	54.00	-11.98	AV
Vertical	11570.183	59.81	8.47	37.88	44.51	61.65	74.00	-12.35	Pk
Vertical	11570.183	43.84	8.47	37.88	44.51	45.68	54.00	-8.32	AV
Vertical	17355.239	57.23	10.12	38.8	44.10	62.05	74.00	-11.95	Pk
Vertical	17355.239	40.26	10.12	38.8	42.70	46.48	54.00	-7.52	AV
Horizontal	4592.484	59.76	6.48	36.37	44.05	58.56	74.00	-15.44	Pk
Horizontal	4592.484	43.34	6.48	36.37	44.05	42.14	54.00	-11.86	AV
Horizontal	11570.263	60.52	8.47	38.64	44.50	63.13	74.00	-10.87	Pk
Horizontal	11570.263	46.27	8.47	38.64	44.50	48.88	54.00	-5.12	AV
Horizontal	17355.724	59.69	10.12	38.38	44.10	64.09	74.00	-9.91	Pk
Horizontal	17355.724	44.35	10.12	38.38	44.10	48.75	54.00	-5.25	AV
High Channel (5825 MHz)-Above 1G									
Vertical	5039.123	58.75	7.10	37.24	43.50	59.59	74.00	-14.41	Pk
Vertical	5039.123	46.45	7.10	37.24	43.50	47.29	54.00	-6.71	AV
Vertical	11650.263	55.36	8.46	37.68	44.50	57	74.00	-17	Pk
Vertical	11650.263	42.22	8.46	37.68	44.50	43.86	54.00	-10.14	AV
Vertical	17475.406	59.47	10.12	38.8	44.10	64.29	74.00	-9.71	Pk
Vertical	17475.406	39.92	10.12	38.8	42.70	46.14	54.00	-7.86	AV
Horizontal	5039.259	66.65	7.10	37.24	43.50	67.49	74.00	-6.51	Pk
Horizontal	5039.259	42.27	7.10	37.24	43.50	43.11	54.00	-10.89	AV
Horizontal	11650.153	56.56	8.46	38.57	44.50	59.09	74.00	-14.91	Pk
Horizontal	11650.153	43.75	8.46	38.57	44.50	46.28	54.00	-7.72	AV
Horizontal	17475.249	59.84	10.12	38.38	44.10	64.24	74.00	-9.76	Pk
Horizontal	17475.249	44.32	10.12	38.38	44.10	48.72	54.00	-5.28	AV

Note: "802.11N(20)(5G)" mode is the worst mode. PK value is lower than the Average value limit, So average didn't record.

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

TEST RESULTS (18GHz-40GHz)


EUT :	8 inch Full Ruggedized Tablet	Model Name :	xTablet T8540
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	DC 3.7V
Test Mode :	TX (5.2G)-802.11N(20) 5180MHz~5240MHz , TX (5.8G) -802.11N(20) 5745MHz~5825MHz		

All the modulation modes have been tested, and the worst result was report as below:

Low Channel (5180 MHz) 18-26.5G


Horizontal

FCC Electric Field Strength 18-26.5GHz

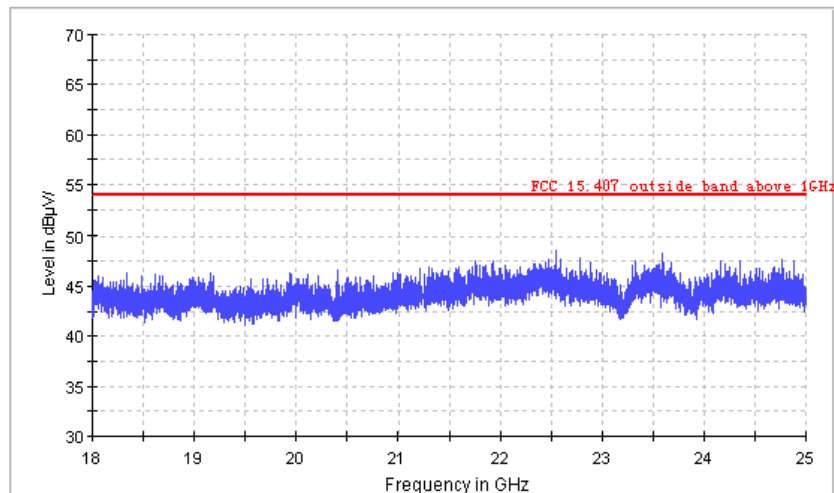

Vertical


FCC Electric Field Strength 18-26.5GHz

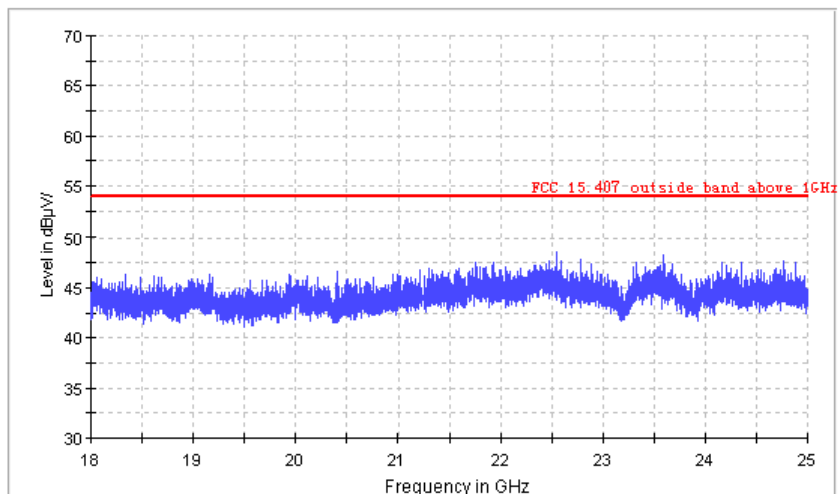

Low Channel (5180 MHz) 26.5-40G


Horizontal

FCC Electric Field Strength 26.5-40GHz

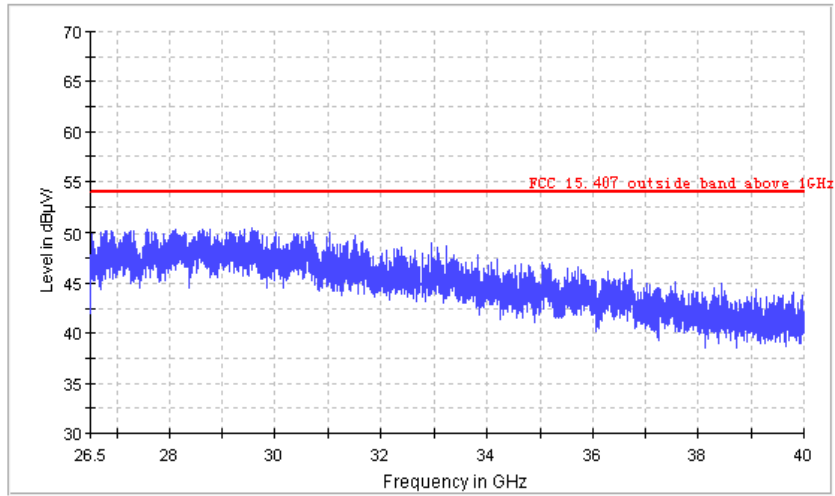

Vertical


FCC Electric Field Strength 26.5-40GHz

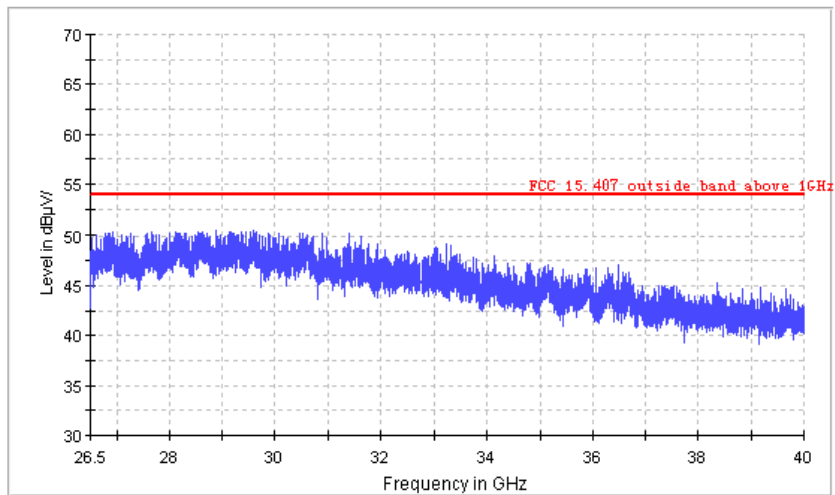

Low Channel (5745 MHz) 18-26.5G


Horizontal

FCC Electric Field Strength 18-26.5GHz

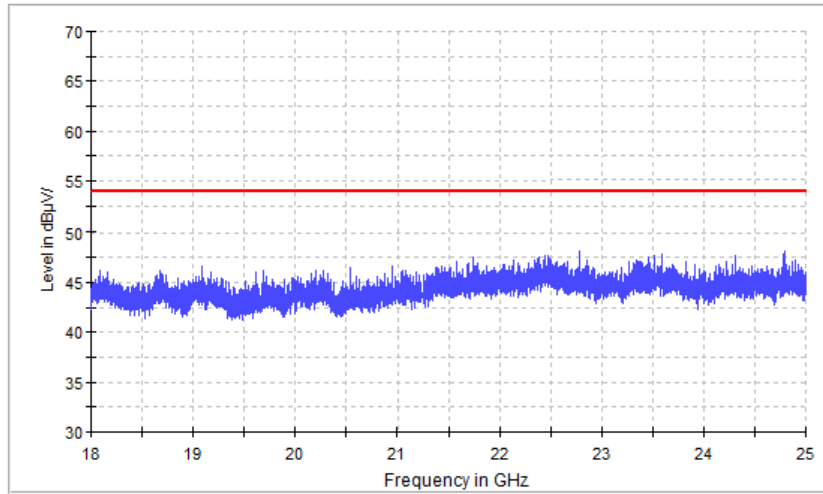

Vertical


FCC Electric Field Strength 18-26.5GHz

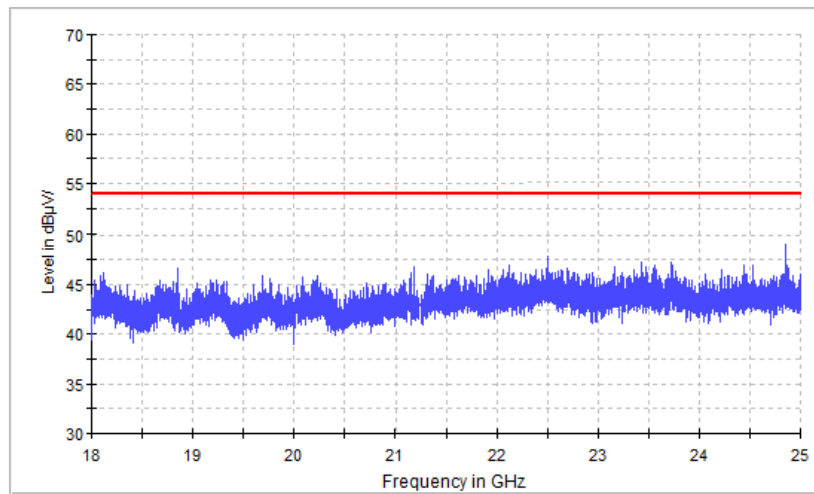

Low Channel (5745 MHz) 26.5-40G


Horizontal

FCC Electric Field Strength 26.5-40GHz

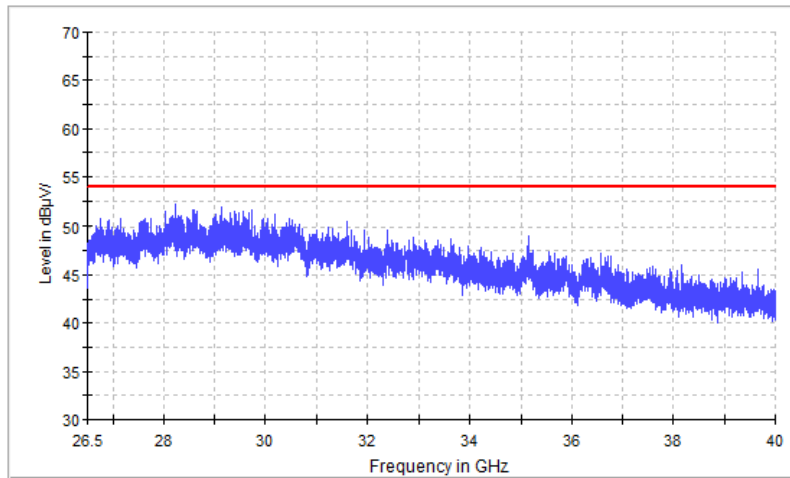

Vertical

FCC Electric Field Strength 26.5-40GHz

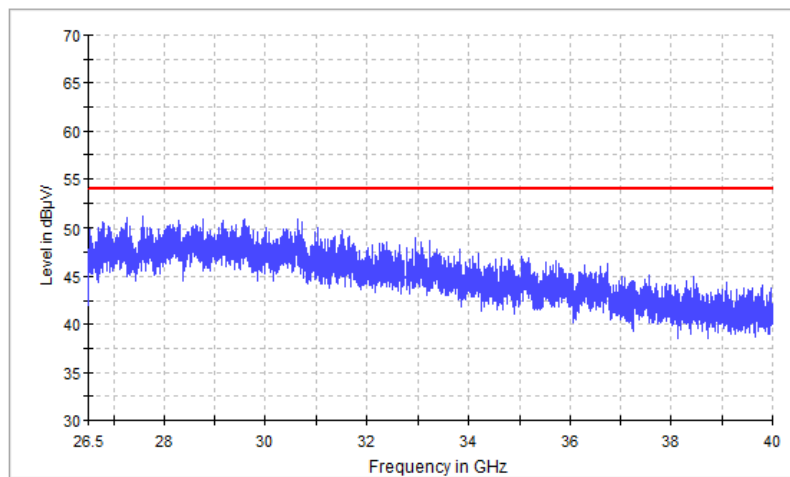

4. POWER SPECTRAL DENSITY TEST

4.1 APPLIED PROCEDURES / LIMIT

According to FCC §15.407(a)(3)

For the band 5.15-5.25 GHz,

- (i) For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).
- (ii) For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.
- (iii) For fixed point-to-point access points operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum conducted output power or maximum power spectral density. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum conducted output power and maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.
- (iv) For client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

For the band 5.725-5.85 GHz

- (3) For the band 5.725-5.85 GHz, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

4.2 TEST PROCEDURE

For devices operating in the bands 5.15-5.25 GHz, 5.25-5.35 GHz, and 5.47-5.725 GHz, the above procedures make use of 1 MHz RBW to satisfy directly the 1 MHz reference bandwidth specified in § 15.407(a)(5). For devices operating in the band 5.725-5.85 GHz, the rules specify a measurement bandwidth of 500 kHz. Many spectrum analyzers do not have 500 kHz RBW, thus a narrower RBW may need to be used. The rules permit the use of a RBWs less than 1 MHz, or 500 kHz, “provided that the measured power is integrated over the full reference bandwidth” to show the total power over the specified measurement bandwidth (i.e., 1 MHz, or 500 kHz). If measurements are performed using a reduced resolution bandwidth (< 1 MHz, or < 500 kHz) and integrated over 1 MHz, or 500 kHz bandwidth, the following adjustments to the procedures apply:

- a) Set $RBW \geq 1/T$, where T is defined in section II.B.I.a).
- b) Set $VBW \geq 3$ RBW.
- c) If measurement bandwidth of Maximum PSD is specified in 500 kHz, add $10\log(500\text{kHz}/RBW)$ to the measured result, whereas $RBW (< 500 \text{ KHz})$ is the reduced resolution bandwidth of the spectrum analyzer set during measurement.
- d) If measurement bandwidth of Maximum PSD is specified in 1 MHz, add $10\log(1\text{MHz}/RBW)$ to the measured result, whereas $RBW (< 1 \text{ MHz})$ is the reduced resolution bandwidth of spectrum analyzer set during measurement.
- e) Care must be taken to ensure that the measurements are performed during a period of continuous transmission or are corrected upward for duty cycle.

Note: As a practical matter, it is recommended to use reduced RBW of 100 KHz for the sections 5.c) and 5.d) above, since $RBW=100 \text{ KHz}$ is available on nearly all spectrum analyzers.

4.3 DEVIATION FROM STANDARD

No deviation.

4.4 TEST SETUP



4.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.1 Unless otherwise a special operating condition is specified in the follows during the testing.

4.6 TEST RESULTS


EUT :	8 inch Full Ruggedized Tablet	Model Name :	xTablet T8540
Temperature :	25 °C	Relative Humidity :	56%
Pressure :	1015 hPa	Test Voltage :	DC 3.7V
Test Mode :	TX Frequency (5150-5250MHz)		

Mode	Frequency	Measured Power Density (dBm)	Limit (dBm)	Result
802.11 a	5185 MHz	-8.49	11	PASS
	5200 MHz	-9.71	11	PASS
	5240 MHz	-9.65	11	PASS
802.11 n20	5185 MHz	-10.43	11	PASS
	5200 MHz	-12.27	11	PASS
	5240 MHz	-12.18	11	PASS
802.11 n40	5190 MHz	-13.81	11	PASS
	5230 MHz	-14.88	11	PASS
802.11 AC20	5185 MHz	-11.84	11	PASS
	5200 MHz	-13.04	11	PASS
	5240 MHz	-14.23	11	PASS
802.11 AC40	5190 MHz	-17.00	11	PASS
	5230 MHz	-18.30	11	PASS
802.11 AC80	5210 MHz	-21.25	11	PASS


Note: 1. Calculate power density= Measured Power Density+10log(1MHz/RBW)

RBW=1MHz


(802.11a) PSD plot on channel 36

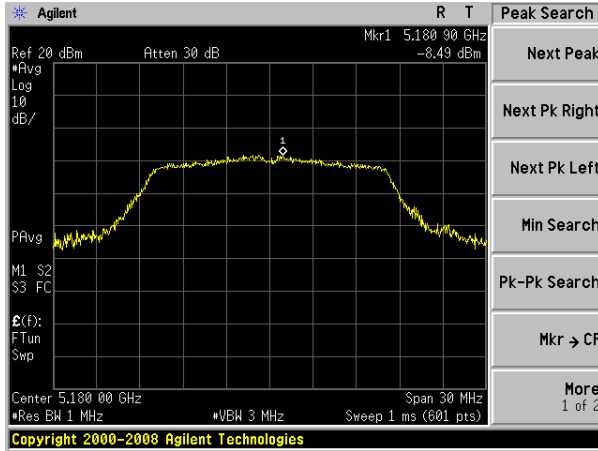


(802.11n20) PSD plot on channel 36

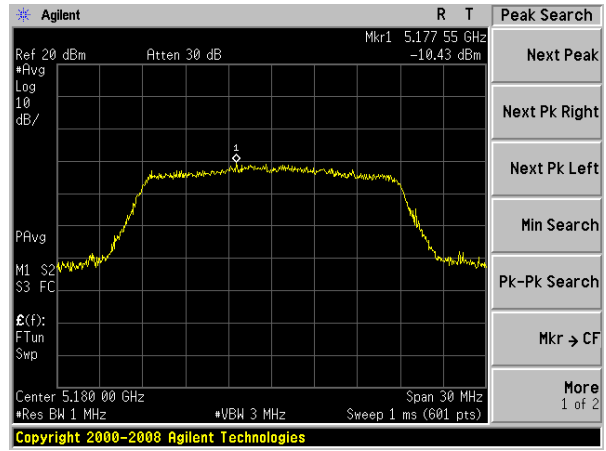


(802.11a) PSD plot on channel 40

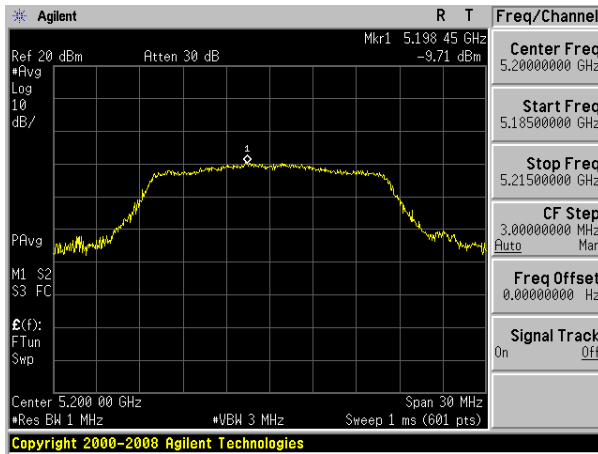


(802.11n20) PSD plot on channel 40

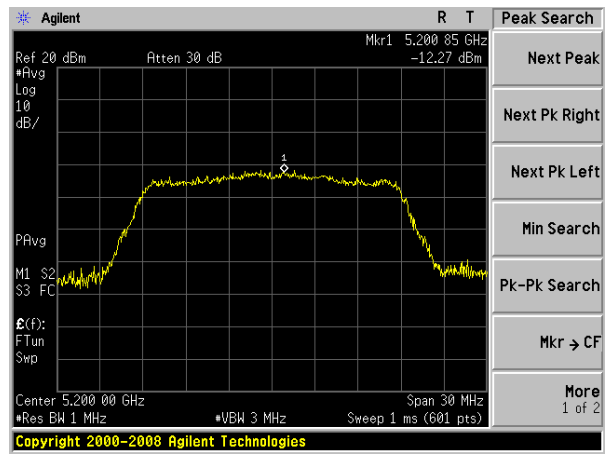


(802.11a) PSD plot on channel 48

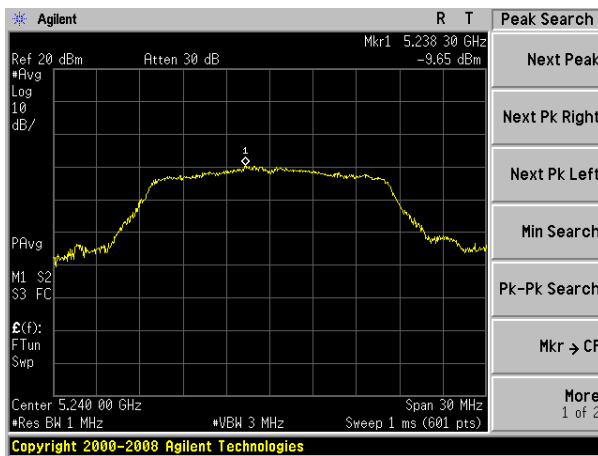


(802.11n20) PSD plot on channel 48

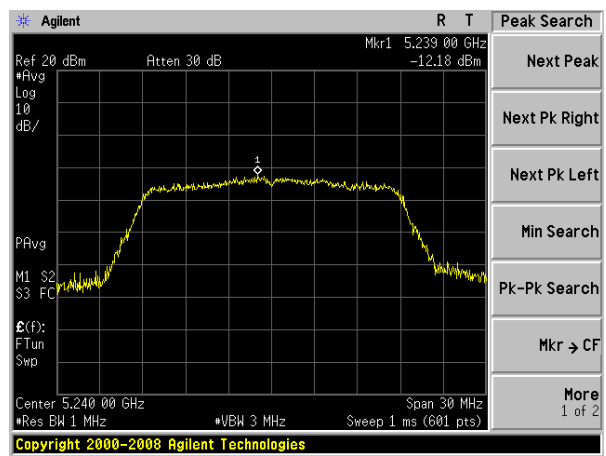


(802.11n40) PSD plot on channel 38

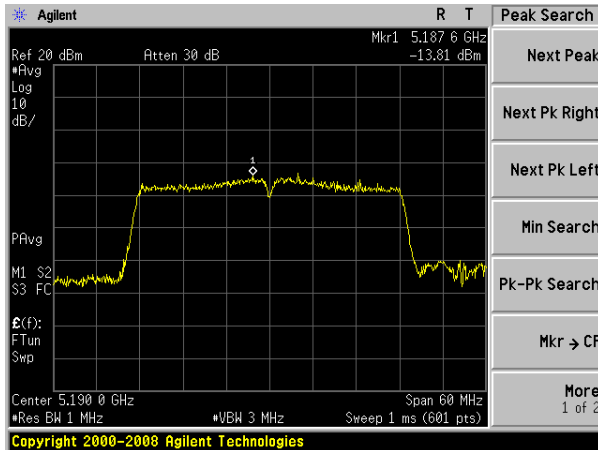


(802.11ac20) PSD plot on channel 36

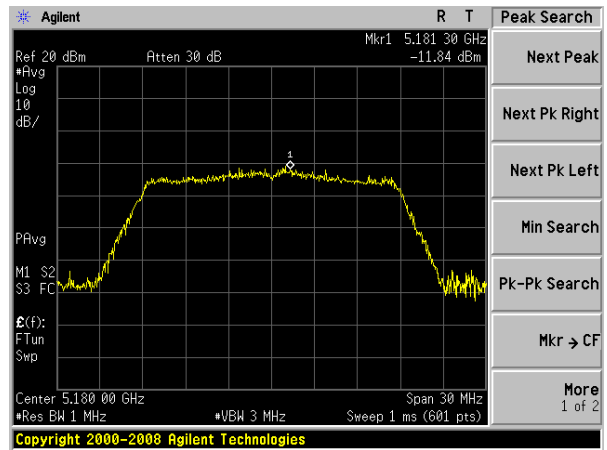


(802.11n40) PSD plot on channel 46

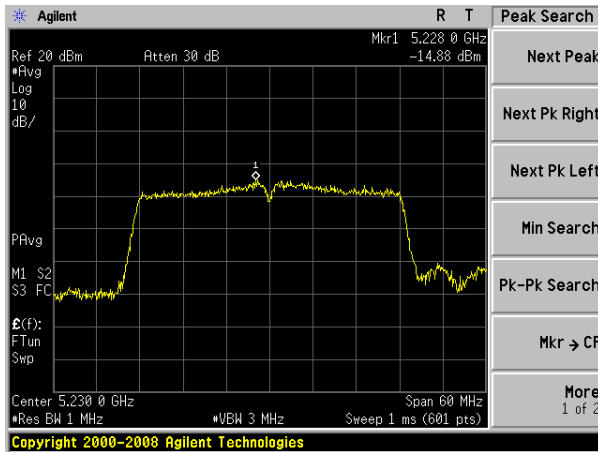


(802.11ac20) PSD plot on channel 40

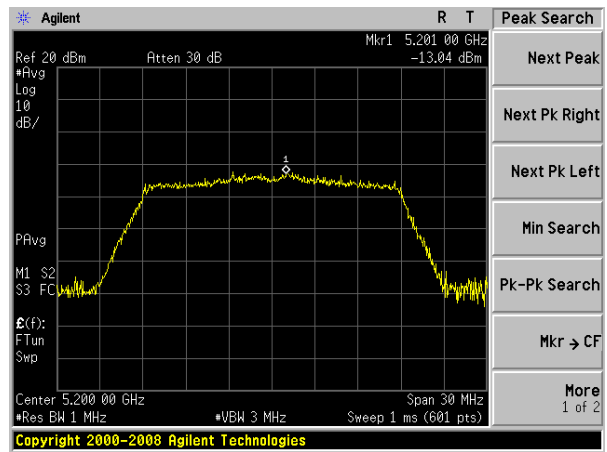


(802.11ac20) PSD plot on channel 48

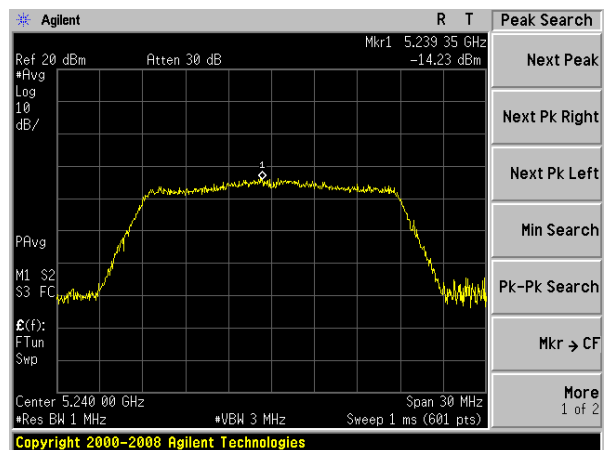


(802.11ac40) PSD plot on channel 38

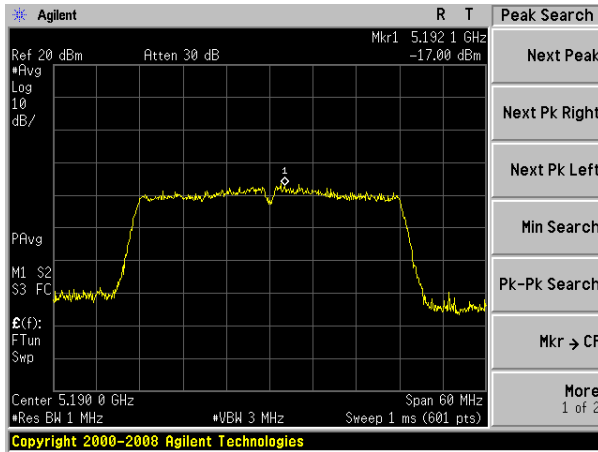

(802.11ac80) PSD plot on channel 42

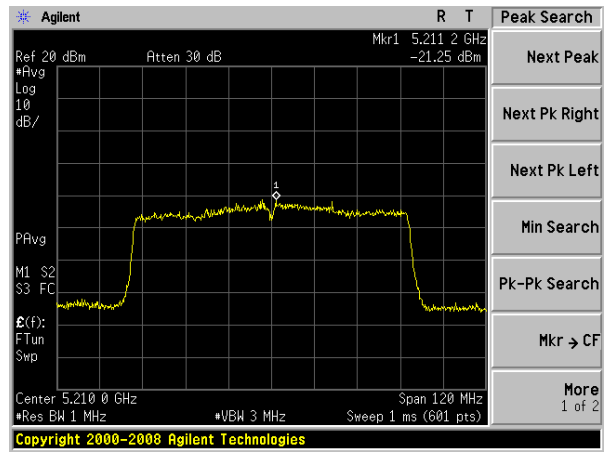

(802.11ac40) PSD plot on channel 46

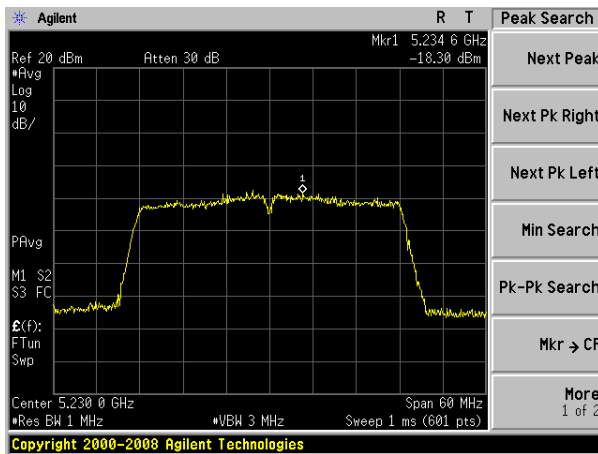


EUT :	8 inch Full Ruggedized Tablet	Model Name :	xTablet T8540
Temperature :	25 °C	Relative Humidity :	56%
Pressure :	1015 hPa	Test Voltage :	DC 3.7V
Test Mode :	TX Frequency (5745-5825MHz)		

Mode	Frequency	Measured Power Density(dBm)	Calculate power density	Limit (dBm)	Result
802.11 a	5745 MHz	0.28	3.204	30	PASS
	5785 MHz	1.14	4.064	30	PASS
	5825 MHz	2.10	5.024	30	PASS
802.11 n20	5745 MHz	-3.89	-0.966	30	PASS
	5785 MHz	-1.42	1.504	30	PASS
	5825 MHz	-1.60	1.324	30	PASS
802.11 n40	5755 MHz	-8.74	-5.816	30	PASS
	5795 MHz	-5.36	-2.436	30	PASS
802.11 AC20	5745 MHz	-1.33	1.594	30	PASS
	5785 MHz	-1.98	0.944	30	PASS
	5825 MHz	-1.88	1.044	30	PASS
802.11 AC40	5755 MHz	-8.97	-6.046	30	PASS
	5795 MHz	-8.86	-5.936	30	PASS
802.11 AC80	5775 MHz	-14.36	-11.436	30	PASS


Note:

- (1) Calculate power density= Measured Power Density+10log(1MHz/RBW)
RBW=0.51MHz


(802.11a) PSD plot on channel 149

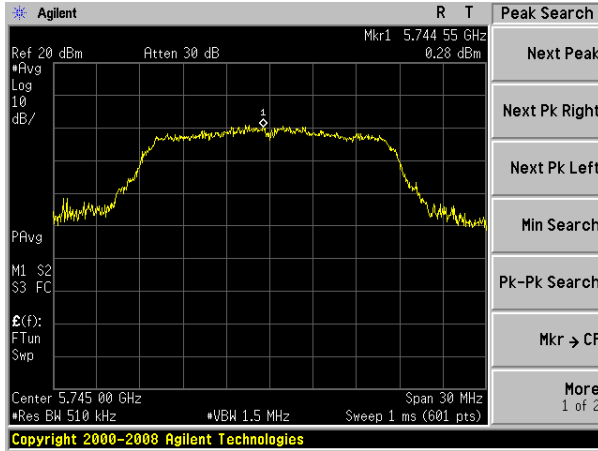


(802.11n20) PSD plot on channel 149

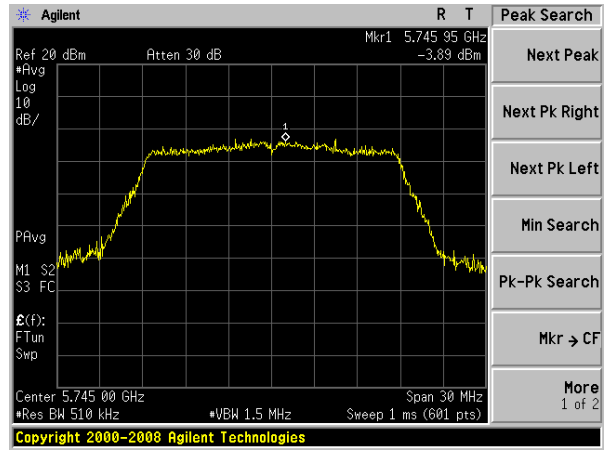


(802.11a) PSD plot on channel 157

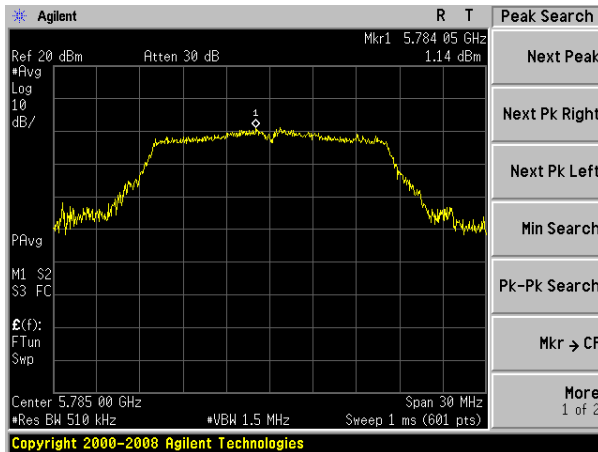


(802.11n20) PSD plot on channel 157

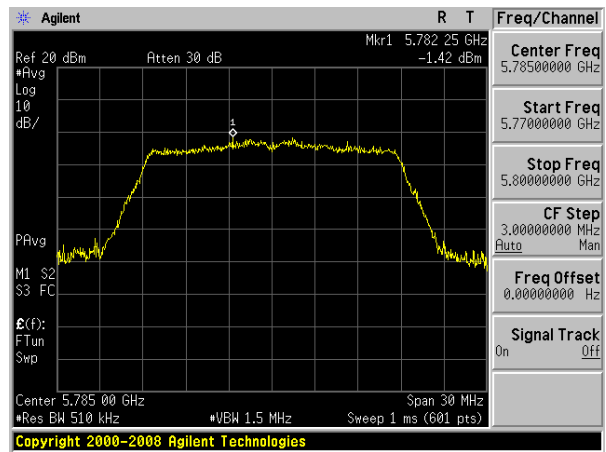


(802.11a) PSD plot on channel 165

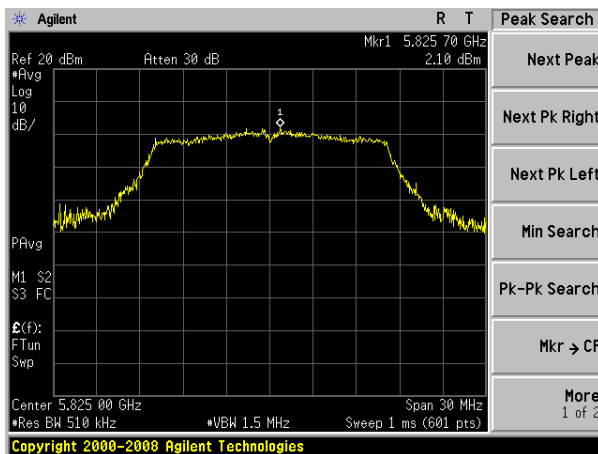


(802.11n20) PSD plot on channel 165

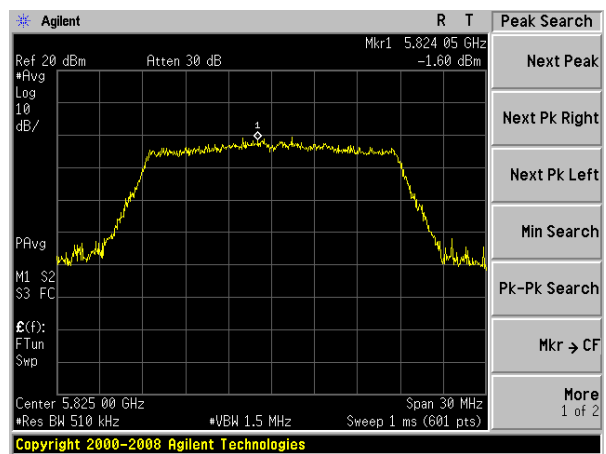


(802.11n40) PSD plot on channel 151

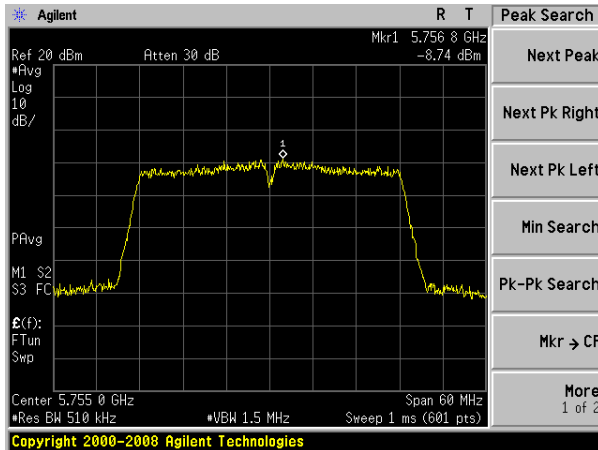


(802.11ac20) PSD plot on channel 149

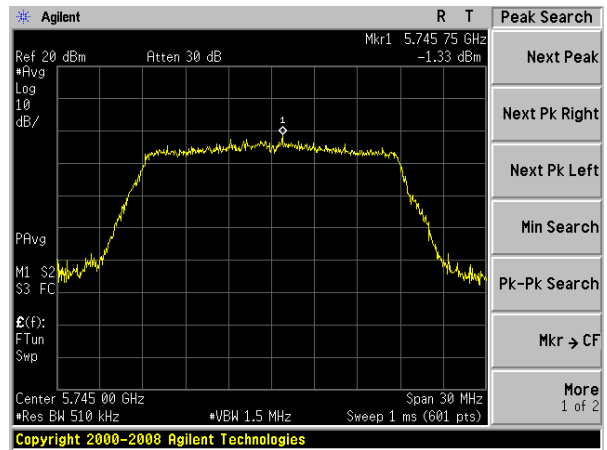


(802.11n40) PSD plot on channel 159

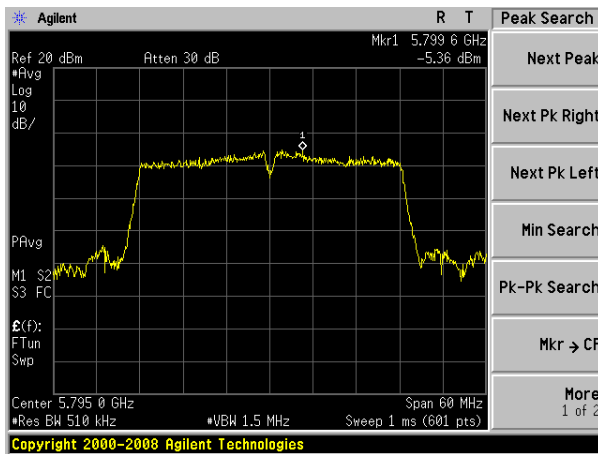


(802.11ac20) PSD plot on channel 157

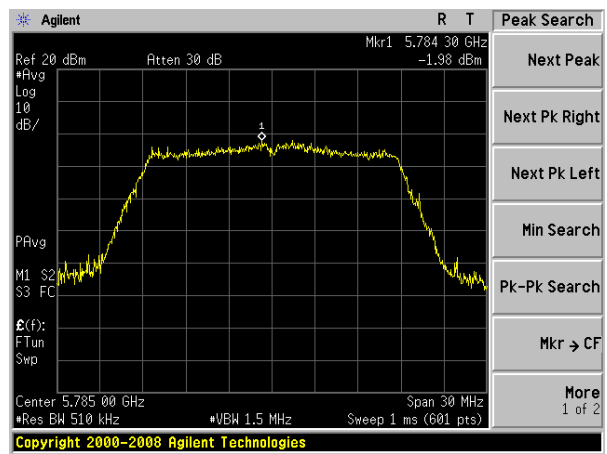


(802.11ac20) PSD plot on channel 165

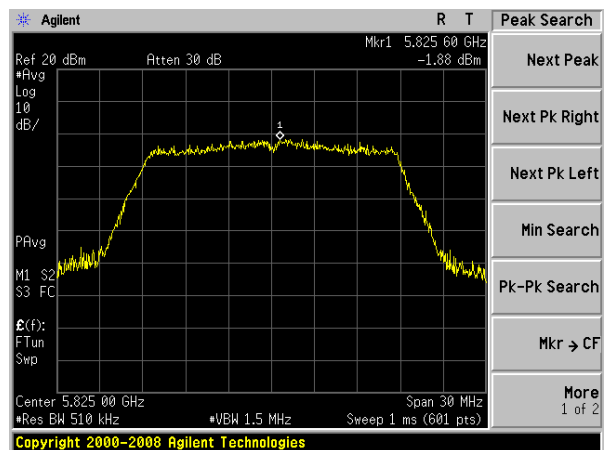


(802.11ac40) PSD plot on channel 151

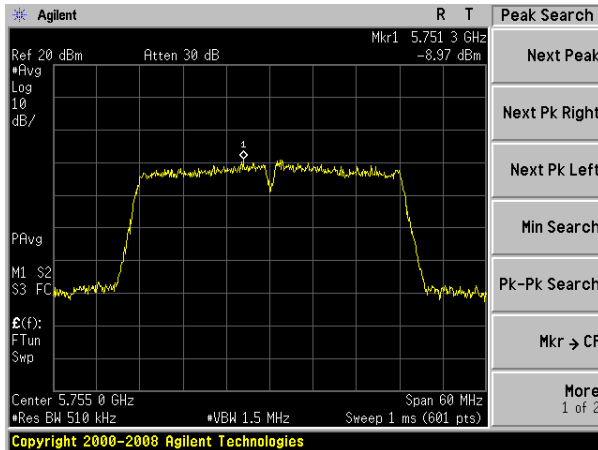

(802.11ac80) PSD plot on channel 155

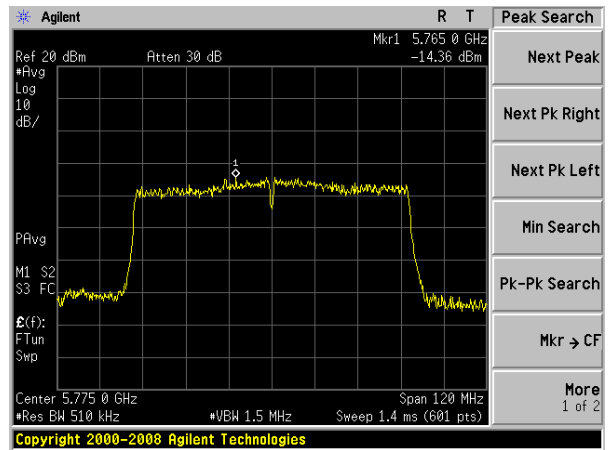

(802.11ac40) PSD plot on channel 159

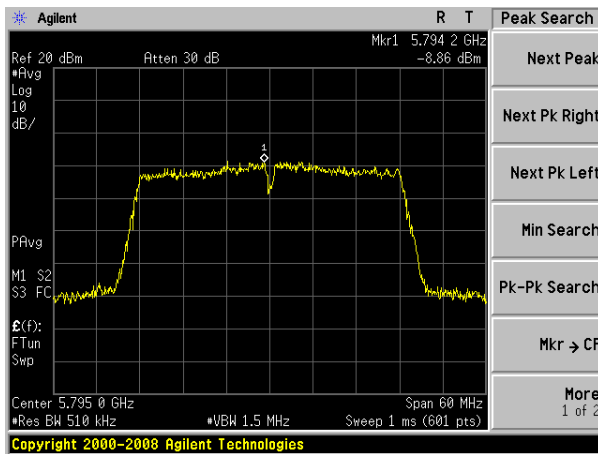

5. 26 DB & 99% EMISSION BANDWIDTH

5.1 APPLIED PROCEDURES / LIMIT


The maximum power spectral density is measured as a conducted emission by direct connection of a calibrated test instrument to the equipment under test. If the device cannot be connected directly, alternative techniques acceptable to the Commission may be used. Measurements in the 5.725-5.85 GHz band are made over a reference bandwidth of 500 kHz or the 26 dB emission bandwidth of the device, whichever is less. Measurements in the 5.15-5.25 GHz, 5.25-5.35 GHz, and the 5.47-5.725 GHz bands are made over a bandwidth of 1 MHz or the 26 dB emission bandwidth of the device, whichever is less. A narrower resolution bandwidth can be used, provided that the measured power is integrated over the full reference bandwidth.

5.2 TEST PROCEDURE

- a) Set RBW = approximately 1% of the emission bandwidth.
- b) Set the VBW > RBW.
- c) Detector = Peak.
- d) Trace mode = max hold.
- e) Measure the maximum width of the emission that is 26 dB down from the maximum of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.

The following procedure shall be used for measuring (99 %) power bandwidth:

1. Set center frequency to the nominal EUT channel center frequency.
2. Set span = 1.5 times to 5.0 times the OBW.
3. Set RBW = 1 % to 5 % of the OBW
4. Set VBW $\geq 3 \cdot$ RBW
5. Video averaging is not permitted. Where practical, a sample detection and single sweep mode shall be used. Otherwise, peak detection and max hold mode (until the trace stabilizes) shall be used.
6. Use the 99 % power bandwidth function of the instrument (if available).
7. If the instrument does not have a 99 % power bandwidth function, the trace data points are recovered and directly summed in power units. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5 % of the total is reached; that frequency is recorded as the lower frequency. The process is repeated until 99.5 % of the total is reached; that frequency is recorded as the upper frequency. The 99% occupied bandwidth is the difference between these two frequencies.

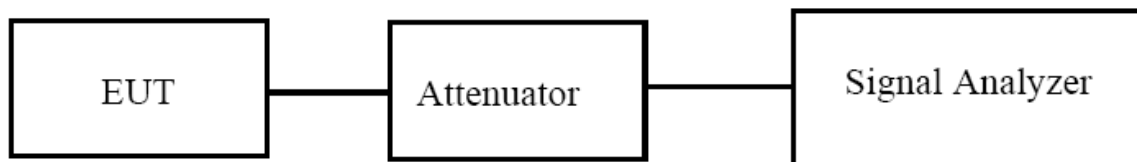

5.3 EUT OPERATION CONDITIONS


The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

5.4 TEST RESULTS


EUT :	8 inch Full Ruggedized Tablet	Model Name :	xTablet T8540
Temperature :	25 °C	Relative Humidity :	56%
Pressure :	1012 hPa	Test Voltage :	DC 3.7V
Test Mode :	TX Frequency (5150-5250MHz)		

Mode	Channel	Frequency (MHz)	99% bandwidth (MHz)	26dB bandwidth (MHz)	Result
802.11a	CH36	5180	17.150	24.032	Pass
	CH40	5200	17.142	23.924	Pass
	CH48	5240	17.358	27.55	Pass
802.11 n20	CH36	5180	17.846	21.35	Pass
	CH40	5200	17.820	21.31	Pass
	CH48	5240	17.815	21.23	Pass
802.11 n40	CH 38	5190	36.086	39.00	Pass
	CH 46	5230	36.132	38.90	Pass
802.11 AC20	CH36	5180	17.885	21.38	Pass
	CH40	5200	17.880	21.41	Pass
	CH48	5240	17.895	21.49	Pass
802.11 AC40	CH 38	5190	36.262	39.60	Pass
	CH 46	5230	36.293	39.59	Pass
802.11 AC80	CH 42	5210	75.346	79.53	PASS


(802.11a) -26dB&99% Bandwidth plot on channel 36

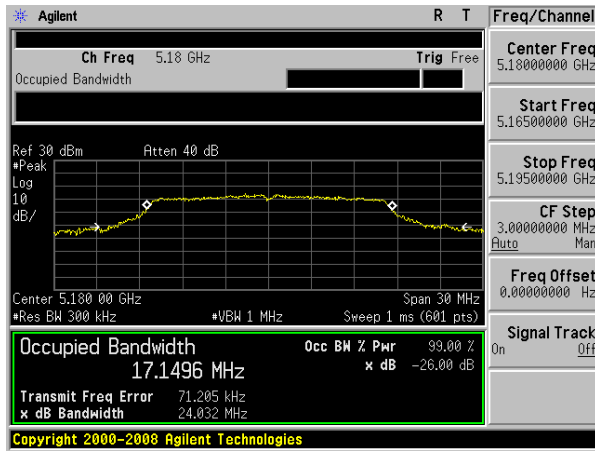


(802.11n20) -26dB&99% Bandwidth plot on channel 36

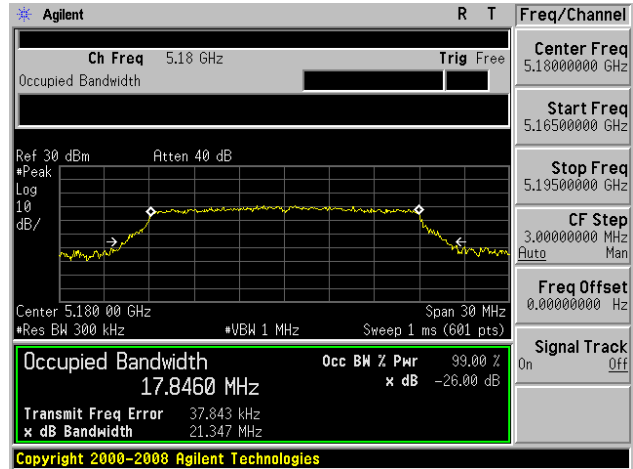


(802.11a) -26dB&99% Bandwidth plot on channel 40

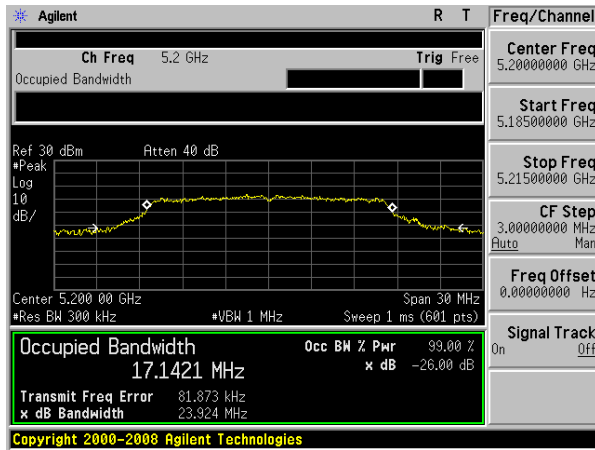


(802.11n20) -26dB&99% Bandwidth plot on channel 40

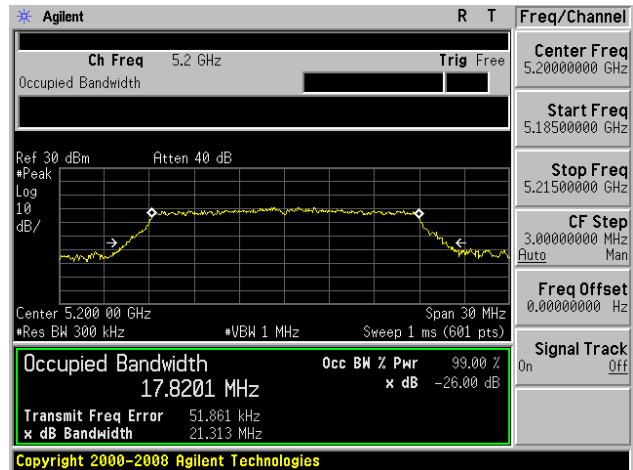


(802.11a) -26dB&99% Bandwidth plot on channel 48

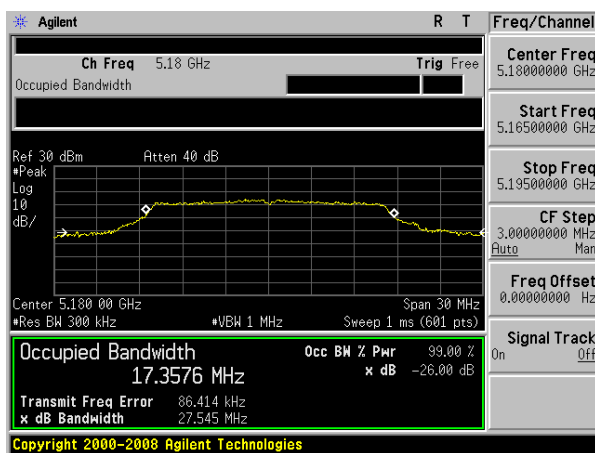


(802.11n20) -26dB&99% Bandwidth plot on channel 48

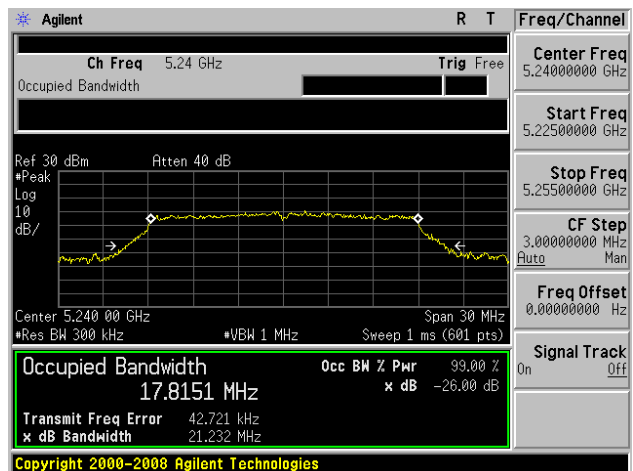


(802.11n40) -26dB&99% Bandwidth plot on channel 38

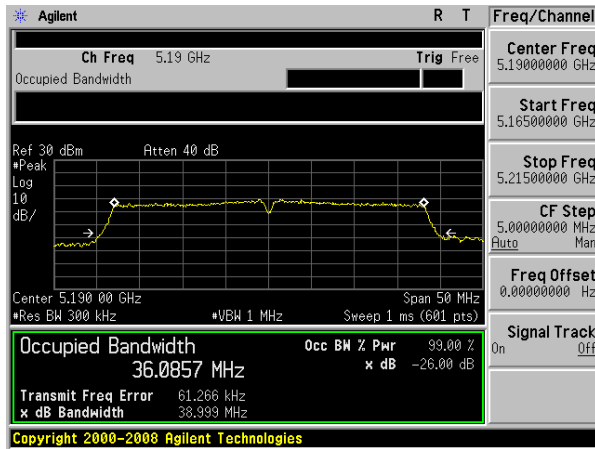


(802.11ac20) -26dB&99% Bandwidth plot on channel 36

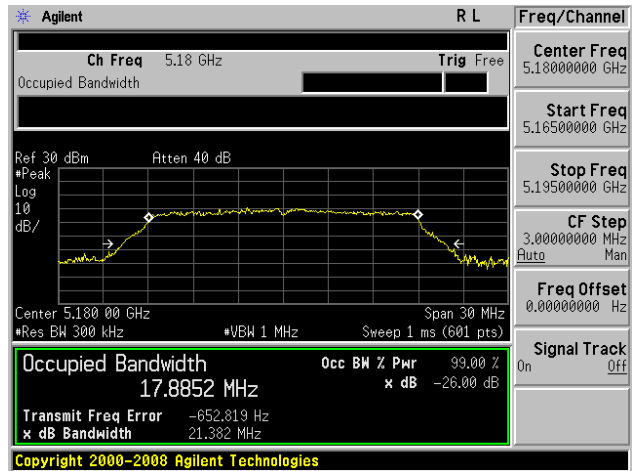


(802.11n40) -26dB&99% Bandwidth plot on channel 46

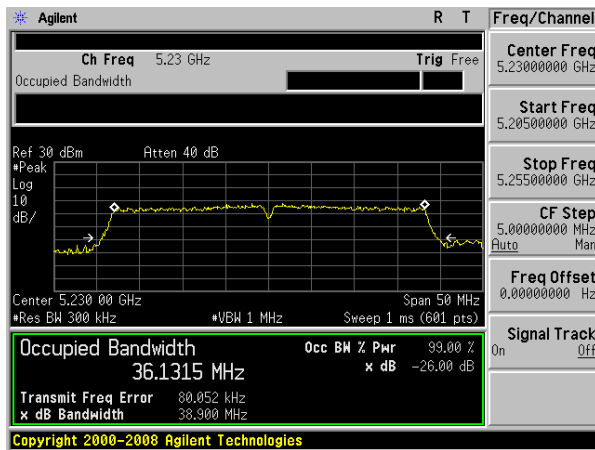


(802.11ac20) -26dB&99% Bandwidth plot on channel 40

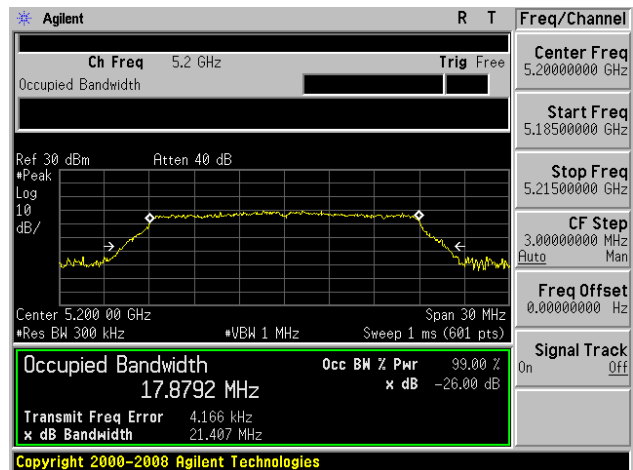


(802.11ac20) -26dB&99% Bandwidth plot on channel 48

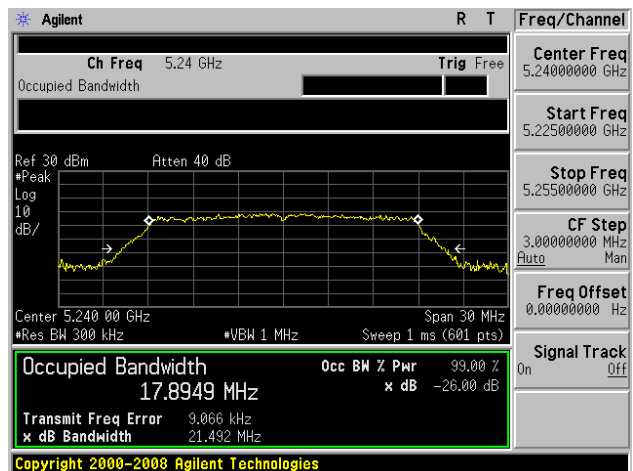


(802.11ac40) -26dB&99% Bandwidth plot on channel 38

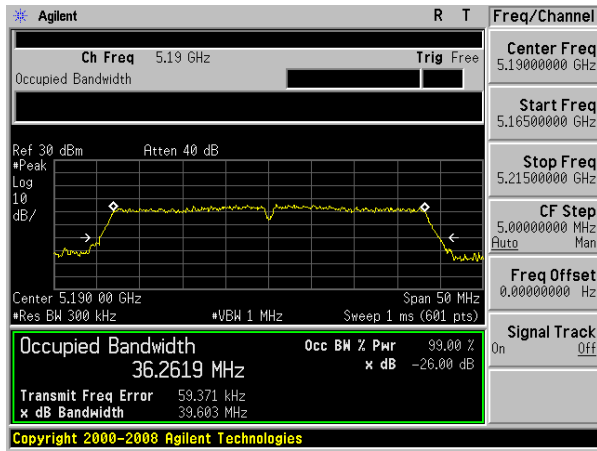

(802.11ac80) -26dB&99% Bandwidth plot on channel 42

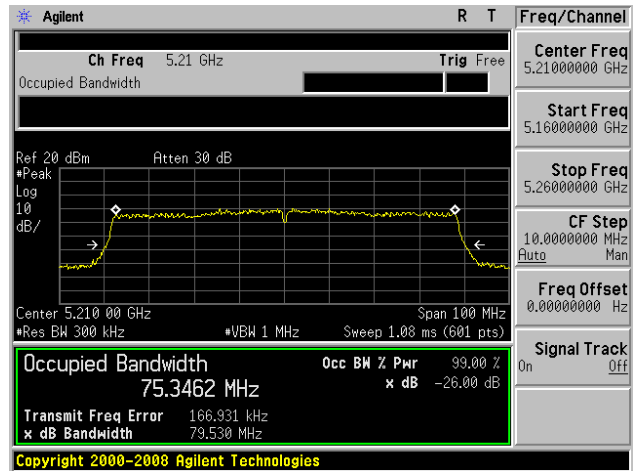


(802.11ac40) -26dB&99% Bandwidth plot on channel 46

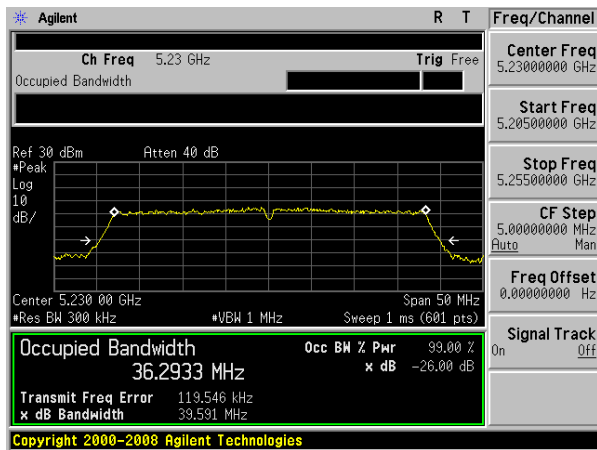


EUT :	8 inch Full Ruggedized Tablet	Model Name :	xTablet T8540
Temperature :	25 °C	Relative Humidity :	56%
Pressure :	1012 hPa	Test Voltage :	DC 3.7V
Test Mode :	TX Frequency (5745-5850MHz)		

Mode	Channel	Frequency (MHz)	99% bandwidth (MHz)	26dB bandwidth (MHz)	Result
802.11a	CH149	5745	17.154	26.89	Pass
	CH157	5785	17.084	25.70	Pass
	CH165	5825	17.059	22.00	Pass
802.11 n20	CH149	5745	17.866	21.17	Pass
	CH157	5785	17.801	21.27	Pass
	CH165	5825	17.859	21.61	Pass
802.11 n40	CH151	5755	36.453	40.51	Pass
	CH159	5795	36.310	40.14	Pass
802.11 AC20	CH149	5745	17.911	21.56	Pass
	CH157	5785	17.893	21.50	Pass
	CH165	5825	17.852	21.33	Pass
802.11 AC40	CH151	5755	36.694	40.95	Pass
	CH159	5795	36.719	40.76	Pass
802.11 AC80	CH 155	5775	75.648	81.30	Pass


(802.11a) -26dB&99% Bandwidth plot on channel 149

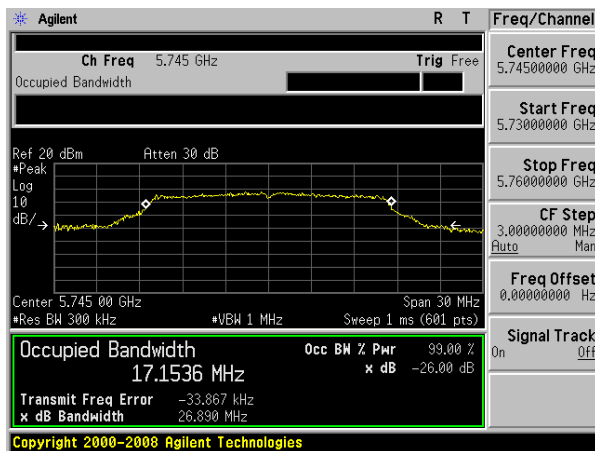


(802.11n20) -26dB&99% Bandwidth plot on channel 149

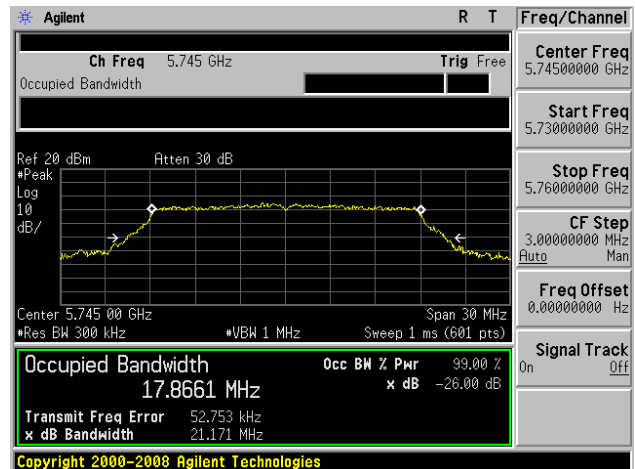


(802.11a) -26dB&99% Bandwidth plot on channel 157

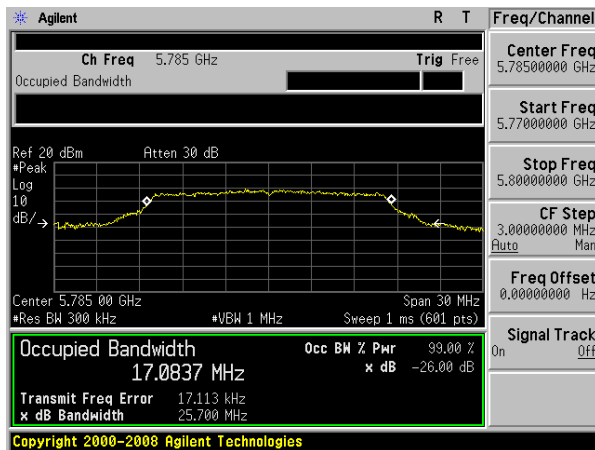


(802.11n20) -26dB&99% Bandwidth plot on channel 157

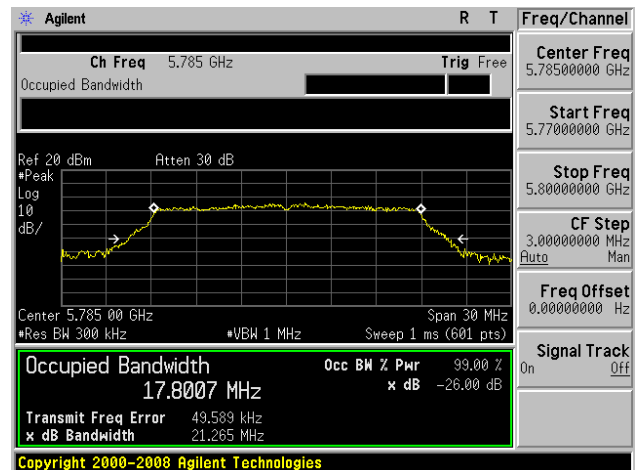


(802.11a) -26dB&99% Bandwidth plot on channel 165

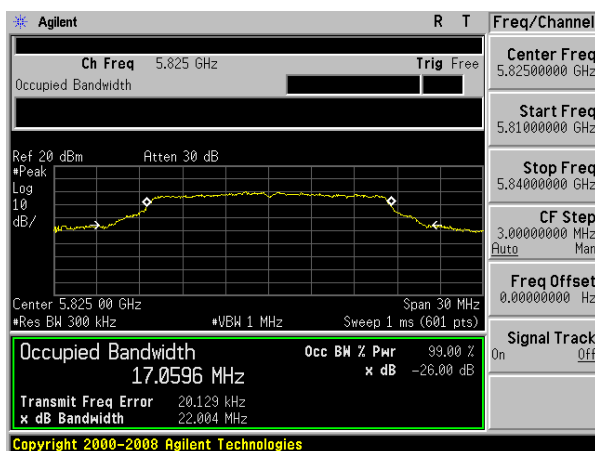


(802.11n20) -26dB&99% Bandwidth plot on channel 165

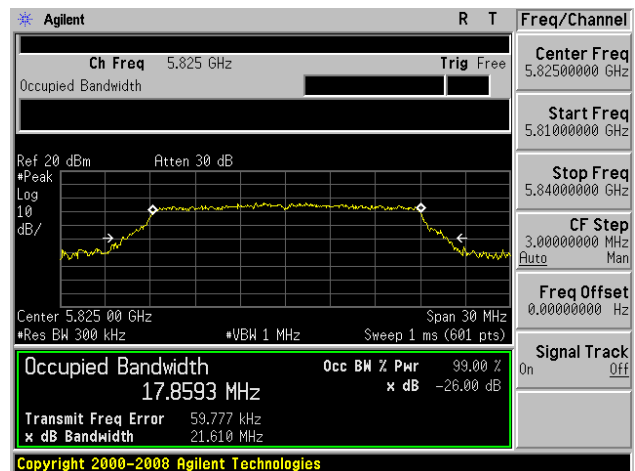


(802.11n40) -26dB&99% Bandwidth plot on channel 151

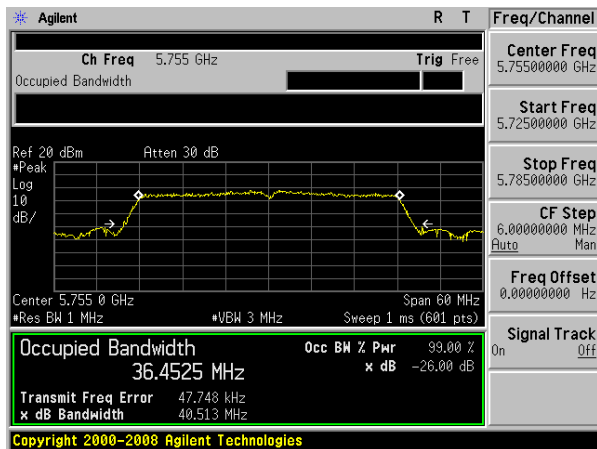

(802.11ac20) -26dB&99% Bandwidth plot on channel 149

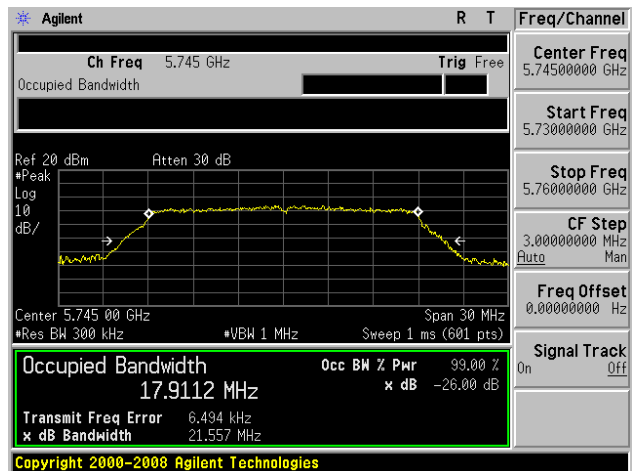


(802.11n40) -26dB&99% Bandwidth plot on channel 159

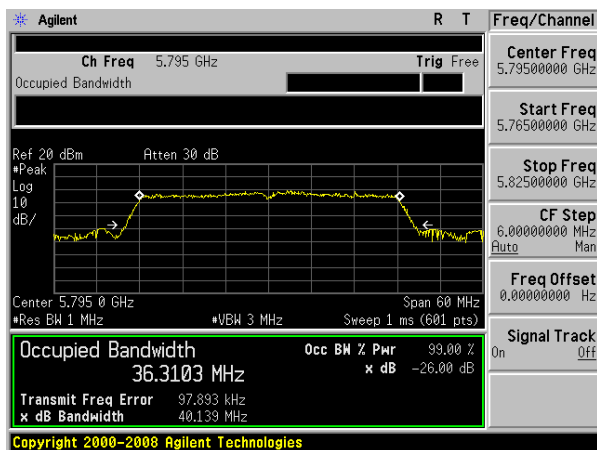


(802.11ac20) -26dB&99% Bandwidth plot on channel 157




(802.11ac20) -26dB&99% Bandwidth plot on channel 165

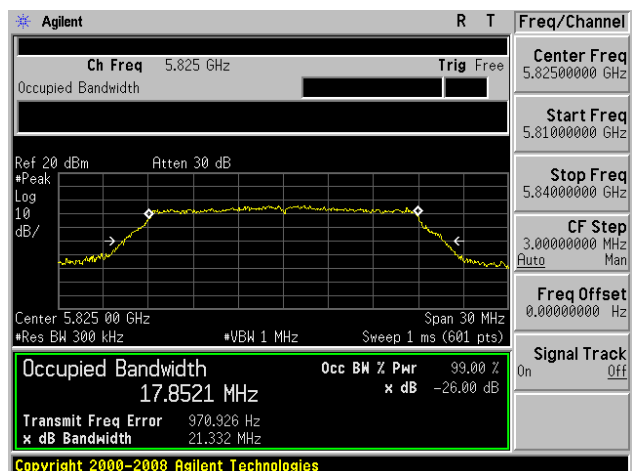


(802.11ac40) -26dB&99% Bandwidth plot on channel 151

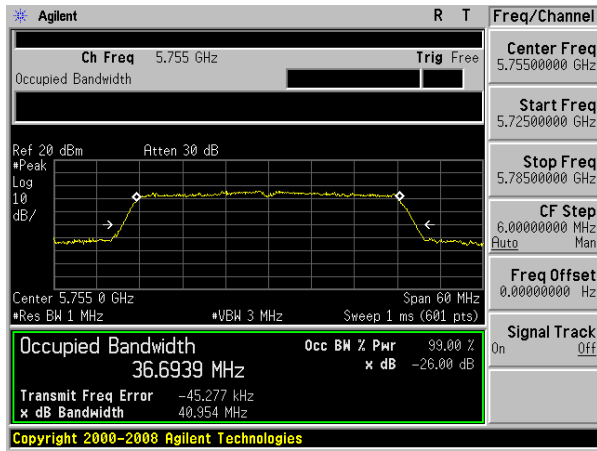

(802.11ac80) -26dB&99% Bandwidth plot on channel 155

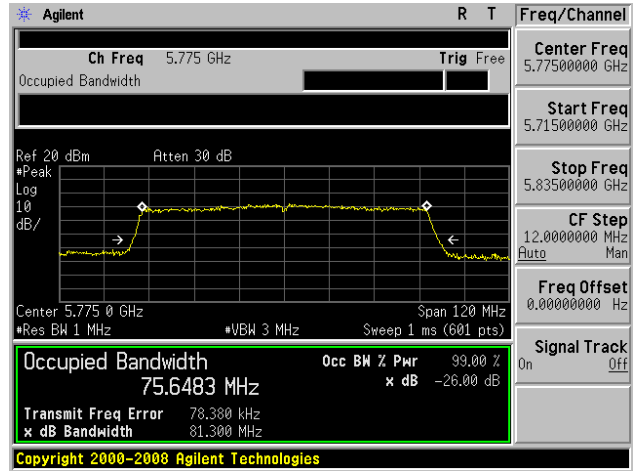

(802.11ac40) -26dB&99% Bandwidth plot on channel 159

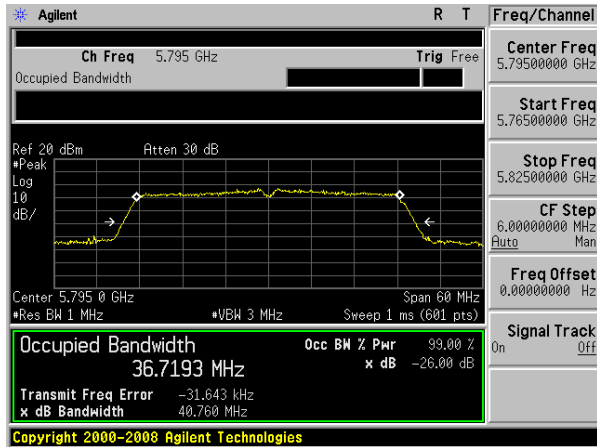

6. MINIMUM 6 DB BANDWIDTH

6.1 APPLIED PROCEDURES / LIMIT

According to FCC §15.407(e)

(e) Within the 5.725-5.85 GHz band, the minimum 6 dB bandwidth of U-NII devices shall be at least 500 kHz.

6.2 TEST PROCEDURE


Section 15.407(e) specifies the minimum 6 dB emission bandwidth of at least 500 KHz for the band 5.715-5.85 GHz. The following procedure shall be used for measuring this bandwidth:

- a) Set RBW = 100 kHz.
- b) Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
- c) Detector = Peak.
- d) Trace mode = max hold.
- e) Sweep = auto couple.
- f) Allow the trace to stabilize.
- g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

6.3 DEVIATION FROM STANDARD

No deviation.

6.4 TEST SETUP

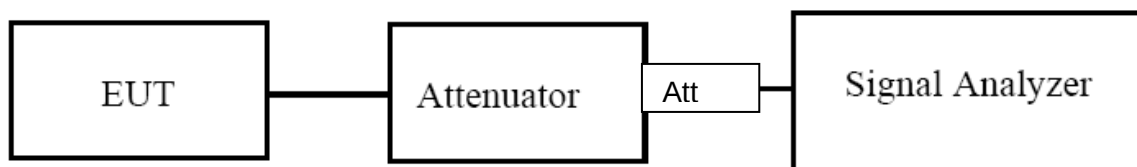

6.5 EUT OPERATION CONDITIONS


The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

6.6 TEST RESULTS


EUT :	8 inch Full Ruggedized Tablet	Model Name :	xTablet T8540
Temperature :	25 °C	Relative Humidity :	56%
Pressure :	1012 hPa	Test Voltage :	DC 3.7V
Test Mode :	TX Frequency (5150-5250MHz)		

Mode	Channel	Frequency (MHz)	-6dB bandwidth(MHz)	Result
802.11a	CH36	5180	16.33	Pass
	CH40	5200	16.32	Pass
	CH48	5240	15.84	Pass
802.11 n20	CH36	5180	17.70	Pass
	CH40	5200	17.72	Pass
	CH48	5240	17.71	Pass
802.11 n40	CH 38	5190	36.10	Pass
	CH 46	5230	36.49	Pass
802.11 AC20	CH36	5180	17.68	Pass
	CH40	5200	17.68	Pass
	CH48	5240	17.63	Pass
802.11 AC40	CH 38	5190	36.23	Pass
	CH 46	5230	36.45	Pass
802.11 AC80	CH 42	5210	76.00	Pass


(802.11a) -6dB Bandwidth plot on channel 36

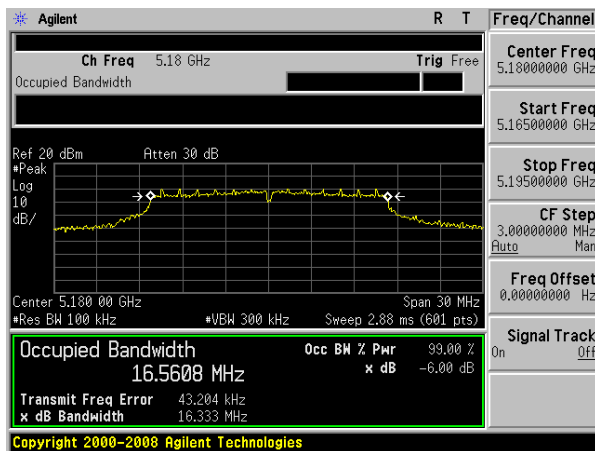


(802.11n20) -6dB Bandwidth plot on channel 36

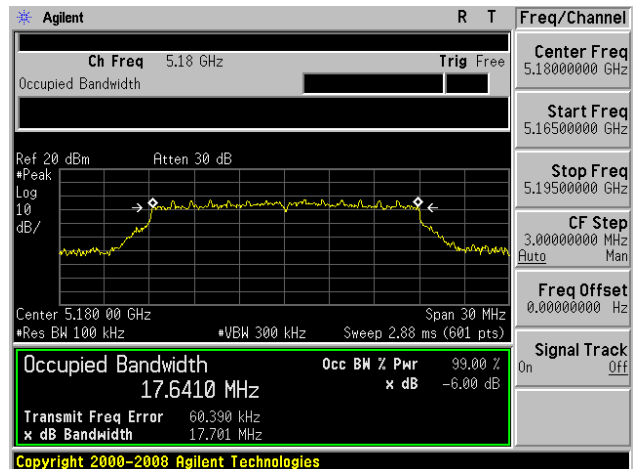


(802.11a) -6dB Bandwidth plot on channel 40

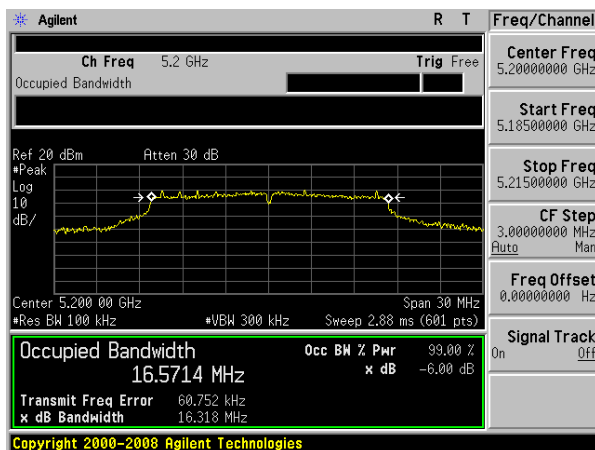


(802.11n20) -6dB Bandwidth plot on channel 40

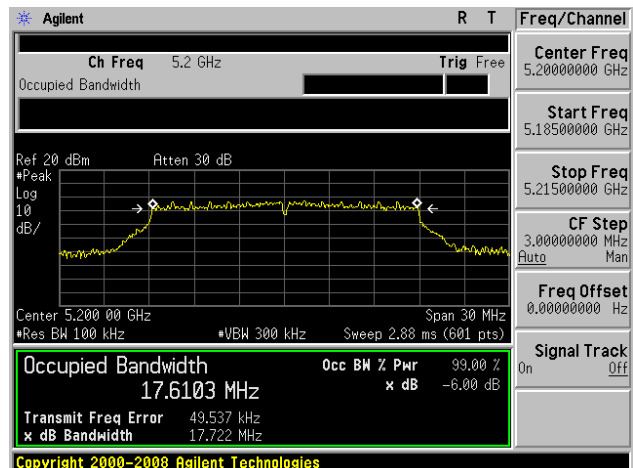


(802.11a) -6dB Bandwidth plot on channel 48

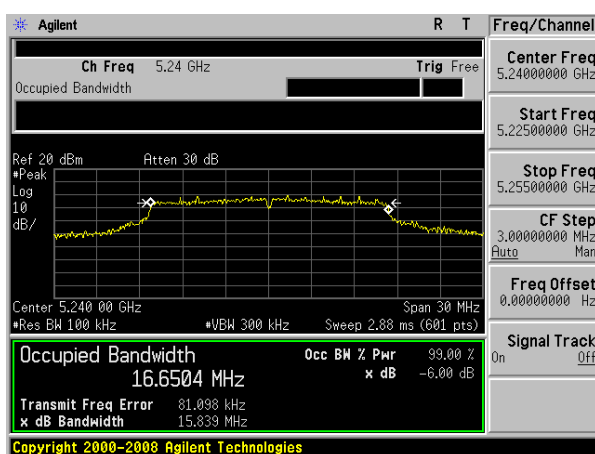


(802.11n20) -6dB Bandwidth plot on channel 48

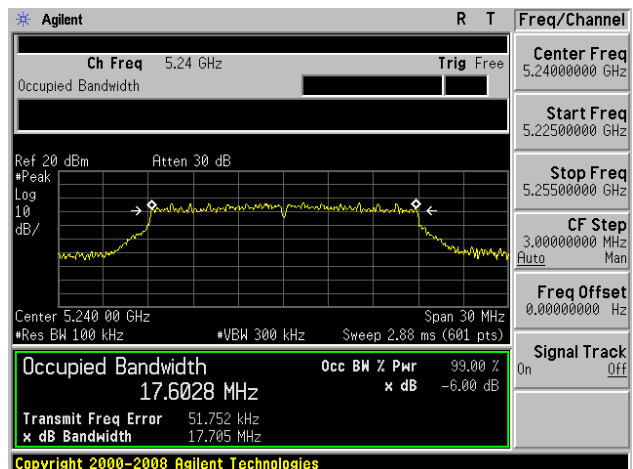


(802.11n40) -6dB Bandwidth plot on channel 38

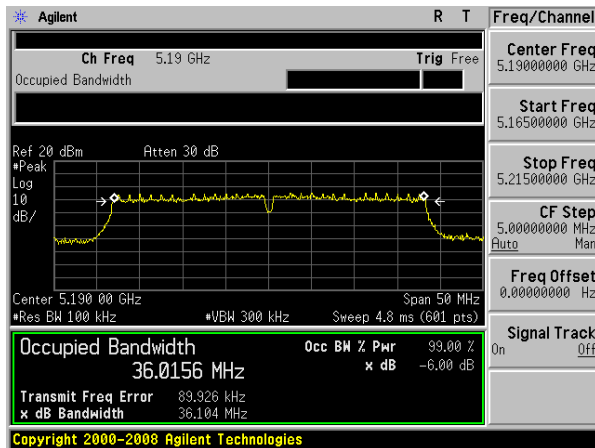


(802.11ac20) -6dB Bandwidth plot on channel 36

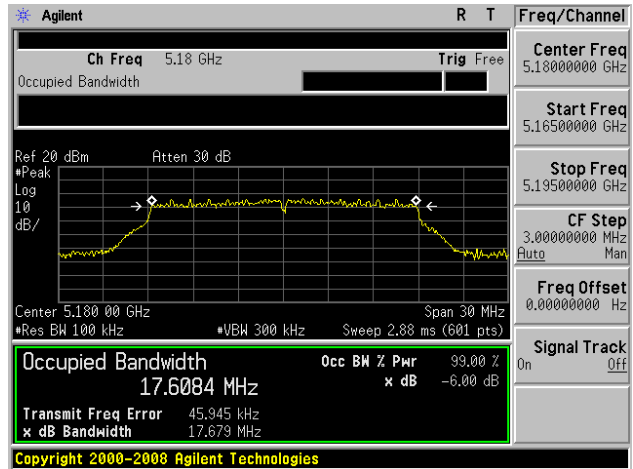


(802.11n40) -6dB Bandwidth plot on channel 46

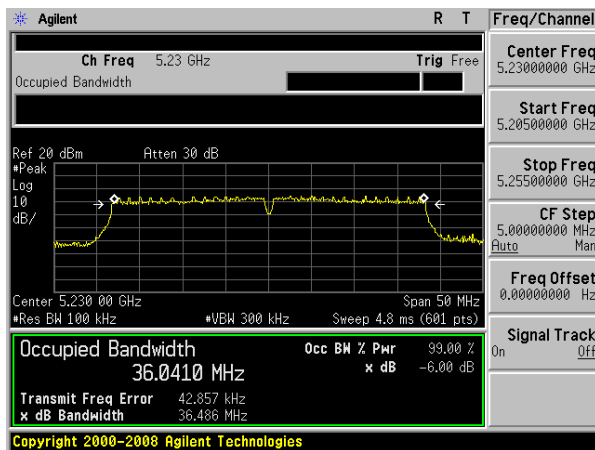


(802.11ac20) -6dB Bandwidth plot on channel 40

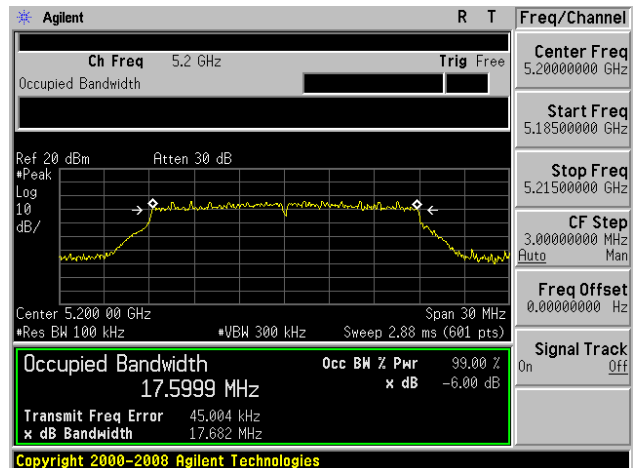


(802.11ac20) -6dB Bandwidth plot on channel 48

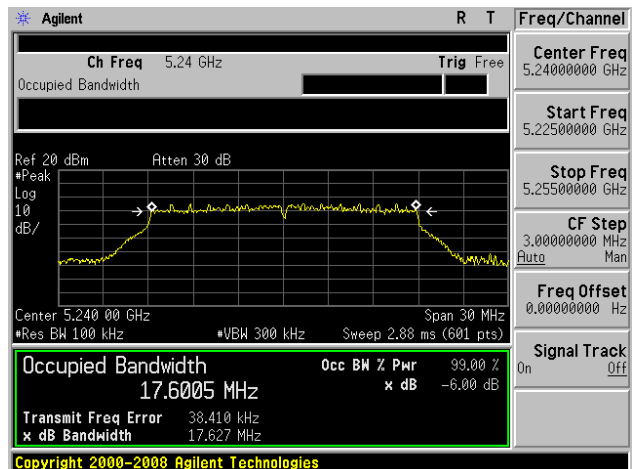


(802.11ac40) -6dB Bandwidth plot on channel 38

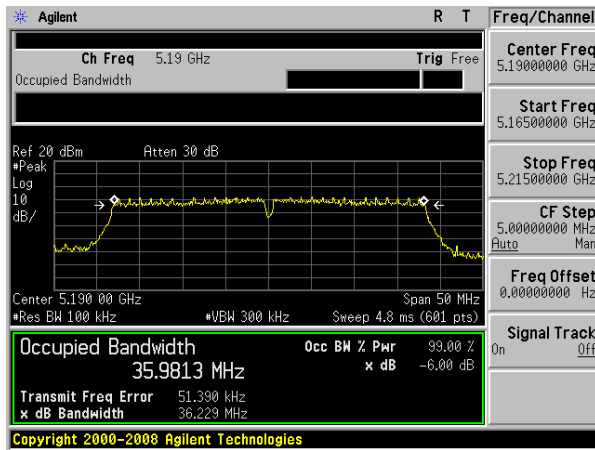

(802.11ac80) -6dB Bandwidth plot on channel 42

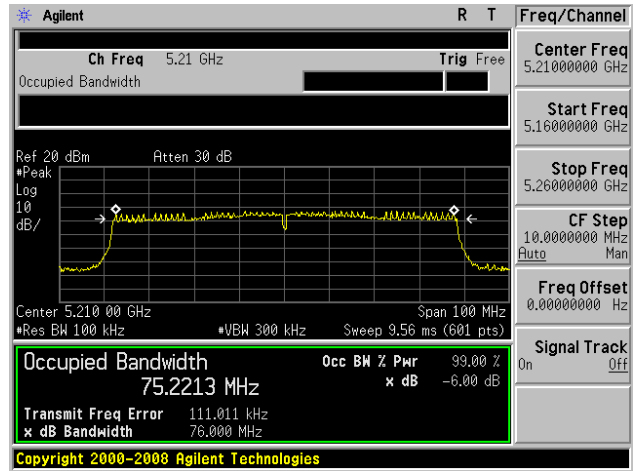


(802.11ac40) -6dB Bandwidth plot on channel 46

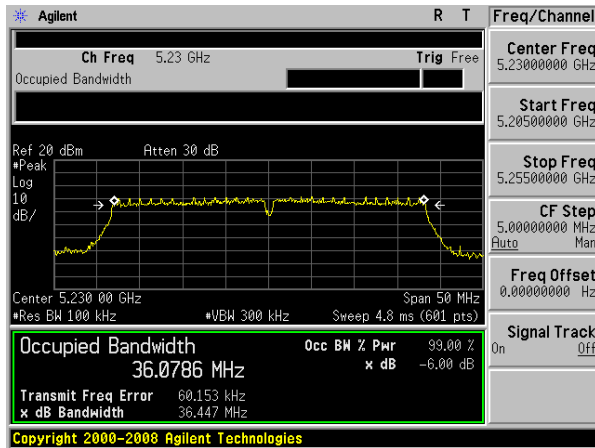


EUT :	8 inch Full Ruggedized Tablet	Model Name :	xTablet T8540
Temperature :	25 °C	Relative Humidity :	60%
Pressure :	1012 hPa	Test Voltage :	DC 3.7V
Test Mode :	TX (5G) Mode Frequency (5725-5825MHz)		

Mode	Channel	Frequency (MHz)	-6dB bandwidth(MHz)	Limit (KHz)	Result
802.11a	149	5745	16.32	500	Pass
	157	5785	16.07	500	Pass
	165	5825	16.36	500	Pass
802.11 n20	149	5745	17.62	500	Pass
	157	5785	17.65	500	Pass
	165	5825	17.59	500	Pass
802.11 n40	151	5755	36.27	500	Pass
	159	5795	36.38	500	Pass
802.11 AC20	149	5745	17.69	500	Pass
	157	5785	17.28	500	Pass
	165	5825	17.40	500	Pass
802.11 AC40	149	5745	36.41	500	Pass
	157	5785	36.42	500	Pass
802.11 AC40	155	5775	75.96	500	Pass


(802.11a) -6dB Bandwidth plot on channel 149

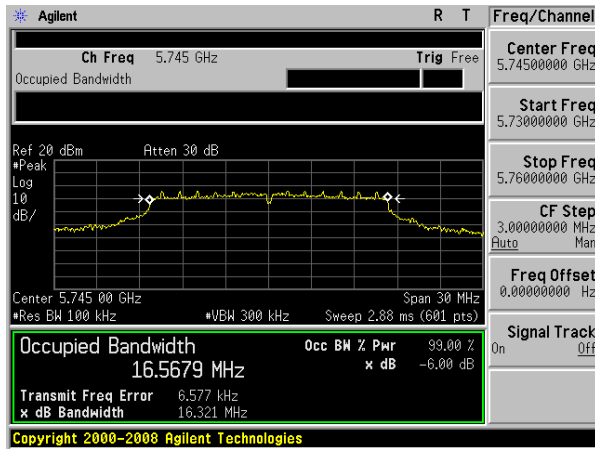


(802.11n20) -6dB Bandwidth plot on channel 149

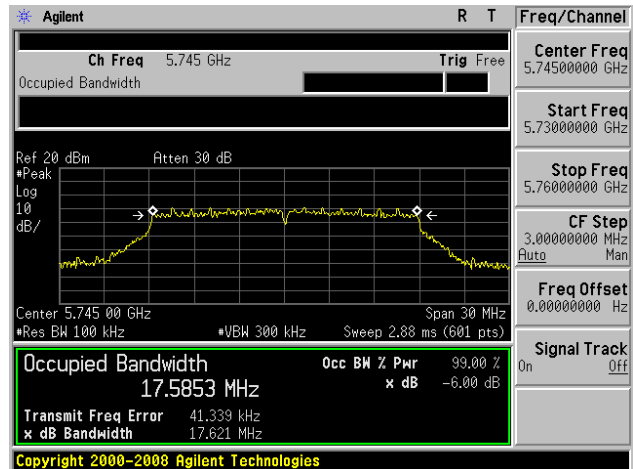


(802.11a) -6dB Bandwidth plot on channel 157

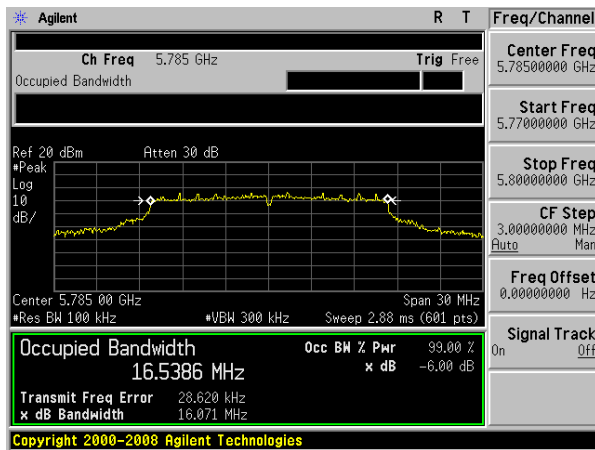


(802.11n20) -6dB Bandwidth plot on channel 157

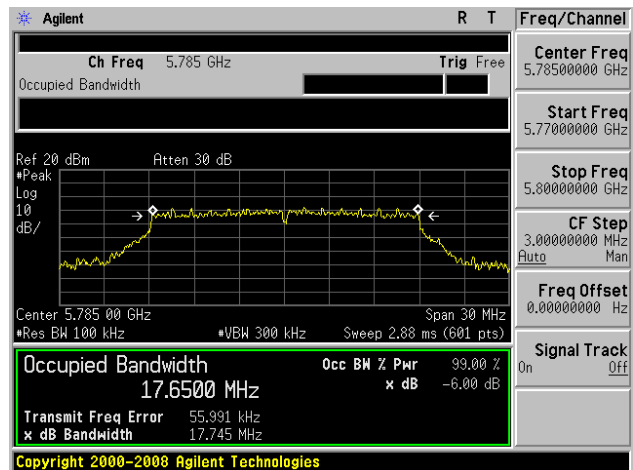


(802.11a) -6dB Bandwidth plot on channel 165

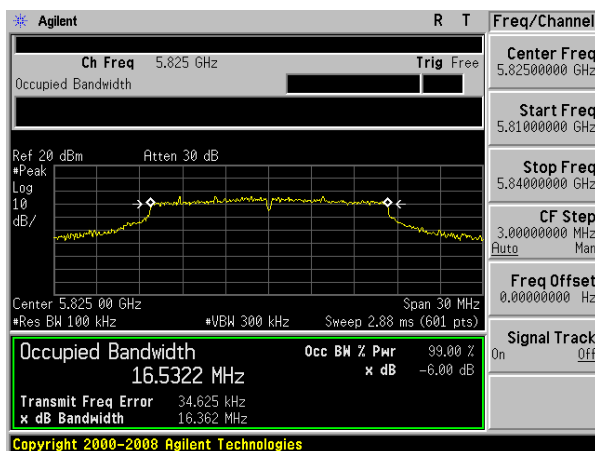


(802.11a) -6dB Bandwidth plot on channel 165

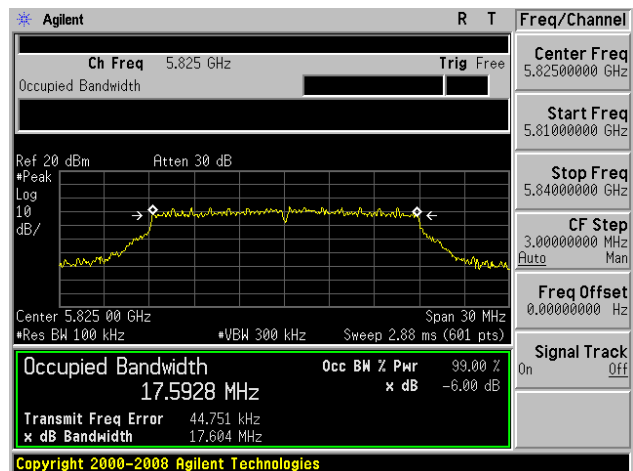


(802.11n40) -6dB Bandwidth plot on channel 151

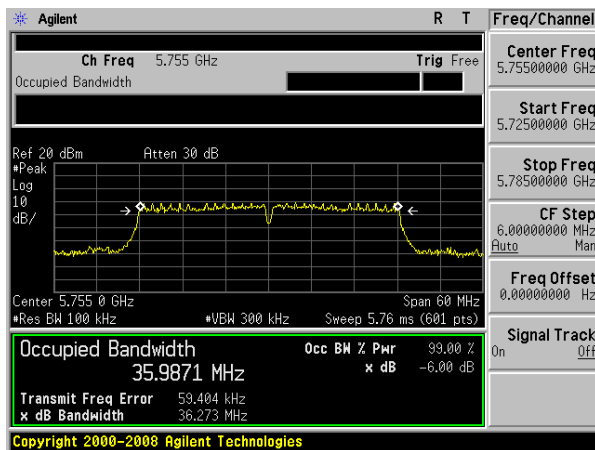


(802.11ac20) -6dB Bandwidth plot on channel 149

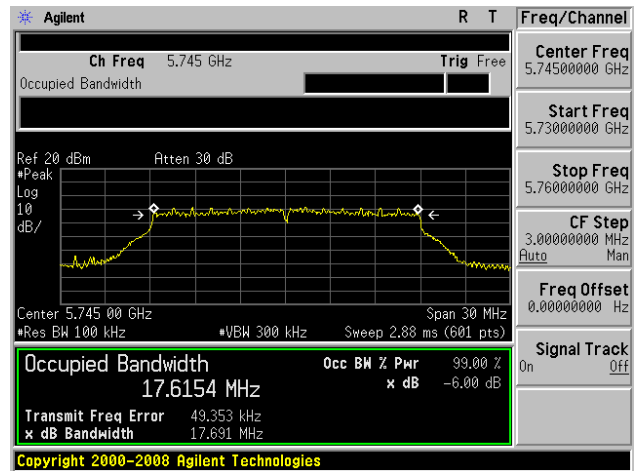


(802.11n40) -6dB Bandwidth plot on channel 159

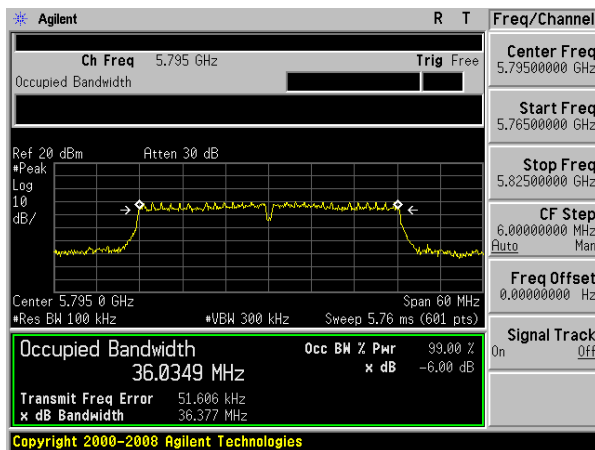


(802.11ac20) -6dB Bandwidth plot on channel 157

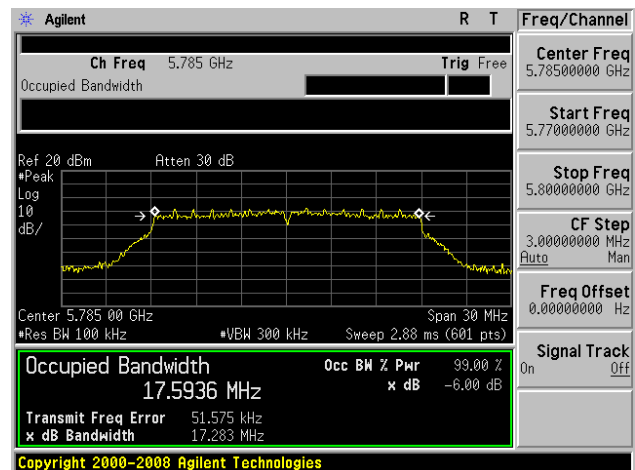


(802.11ac20) -6dB Bandwidth plot on channel 165

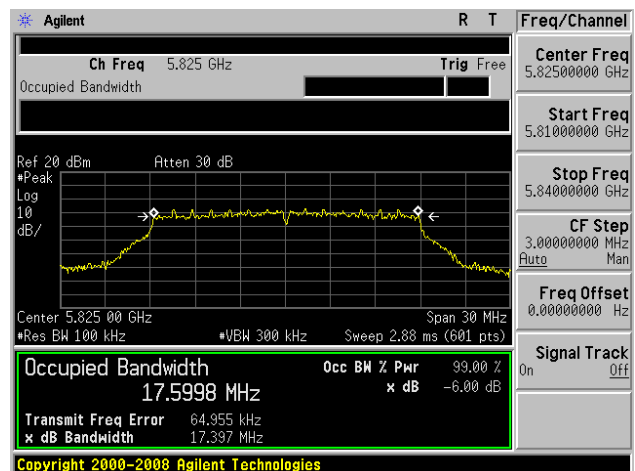


(802.11ac40) -6dB Bandwidth plot on channel 151

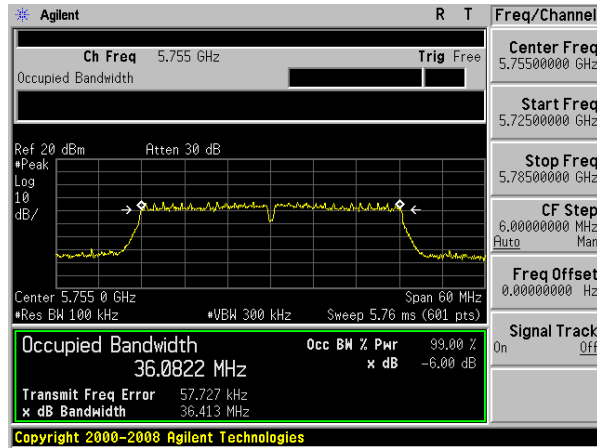

(802.11ac80) -6dB Bandwidth plot on channel 155

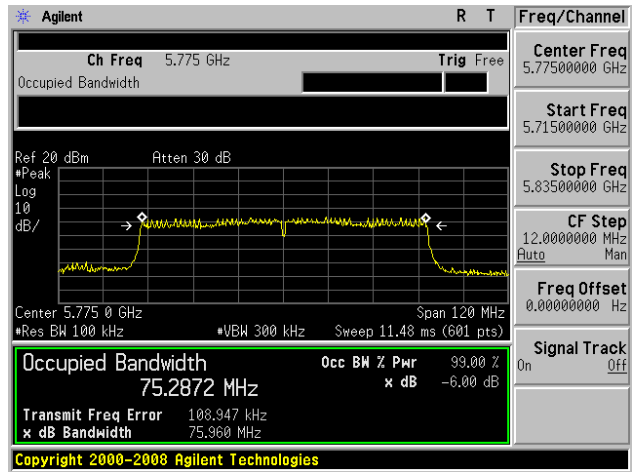

(802.11ac40) -6dB Bandwidth plot on channel 159

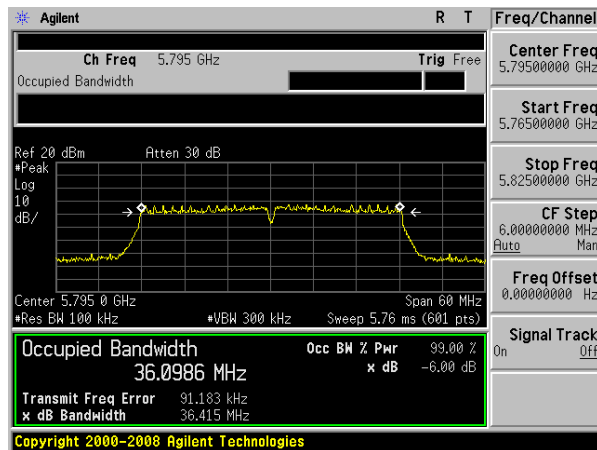

7. MAXIMUM CONDUCTED OUTPUT POWER

7.1 PPLIED PROCEDURES / LIMIT

According to FCC §15.407

According to FCC §15.407

The maximum conducted output power should not exceed:

Frequency Band(MHz)	Limit
5150~5250	250mW
5725~5850	1W

The maximum e.i.r.p should not exceed:

Frequency Band(MHz)	Limit
5150~5250	200mW or 10dBm +10logB whichever is less
5725~5850	N/A

Note: Where "B" is the 99% emission bandwidth in MHz

7.2 TEST PROCEDURE

- Maximum conducted output power may be measured using a spectrum analyzer/EMI receiver or an RF power meter.

1. Device Configuration

If possible, configure or modify the operation of the EUT so that it transmits continuously at its maximum power control level (see section II.B.).

a) The intent is to test at 100 percent duty cycle; however a small reduction in duty cycle (to no lower than 98 percent) is permitted if required by the EUT for amplitude control purposes. Manufacturers are expected to provide software to the test lab to permit such continuous operation.

b) If continuous transmission (or at least 98 percent duty cycle) cannot be achieved due to hardware limitations (e.g., overheating), the EUT shall be operated at its maximum power control level with the transmit duration as long as possible and the duty cycle as high as possible.

2. Measurement using a Spectrum Analyzer or EMI Receiver (SA)

Measurement of maximum conducted output power using a spectrum analyzer requires integrating the spectrum across a frequency span that encompasses, at a minimum, either the EBW or the 99-percent occupied bandwidth of the signal.¹ However, the EBW must be used to determine bandwidth dependent limits on maximum conducted output power in accordance with § 15.407(a).

a) The test method shall be selected as follows: (i) Method SA-1 or SA-1 Alternative (averaging with the EUT transmitting at full power throughout each sweep) shall be applied if either of the following conditions can be satisfied:

- The EUT transmits continuously (or with a duty cycle ≥ 98 percent).
- Sweep triggering or gating can be implemented in a way that the device transmits at the maximum power control level throughout the duration of each of the instrument sweeps to be averaged. This condition can generally be achieved by triggering the instrument's sweep if the duration of the sweep (with the analyzer configured as in Method SA-1, below) is equal to or shorter than the duration T of each transmission from the EUT and if those transmissions exhibit full power throughout their durations.

(ii) Method SA-2 or SA-2 Alternative (averaging across on and off times of the EUT transmissions, followed by duty cycle correction) shall be applied if the conditions of (i) cannot be achieved and the transmissions exhibit a constant duty cycle during the measurement duration. Duty cycle will be considered to be constant if variations are less than ± 2 percent.

(iii) Method SA-3 (RMS detection with max hold) or SA-3 Alternative (reduced VBW with max hold) shall be applied if the conditions of (i) and (ii) cannot be achieved.

b) Method SA-1 (trace averaging with the EUT transmitting at full power throughout each sweep): (i) Set span to encompass the entire emission bandwidth (EBW) (or, alternatively, the entire 99% occupied bandwidth) of the signal.

(ii) Set RBW = 1 MHz.

(iii) Set VBW ≥ 3 MHz.

(iv) Number of points in sweep ≥ 2 Span / RBW. (This ensures that bin-to-bin spacing is $\leq$ RBW/2, so that narrowband signals are not lost between frequency bins.)

(v) Sweep time = auto.

(vi) Detector = RMS (i.e., power averaging), if available. Otherwise, use sample detector mode.

(vii) If transmit duty cycle < 98 percent, use a video trigger with the trigger level set to enable triggering only on full power pulses. Transmitter must operate at maximum power control level for the entire duration of every sweep. If the EUT transmits continuously (i.e., with no off intervals) or at duty cycle ≥ 98 percent, and if each transmission is entirely at the maximum power control level, then the trigger shall be set to "free run".


(viii) Trace average at least 100 traces in power averaging (i.e., RMS) mode.

(ix) Compute power by integrating the spectrum across the EBW (or, alternatively, the entire 99% occupied bandwidth) of the signal using the instrument's band power measurement function with band limits set equal to the EBW (or occupied bandwidth) band edges. If the instrument does not have a band power function, sum the spectrum

7.3 DEVIATION FROM STANDARD

No deviation.

7.4 TEST SETUP

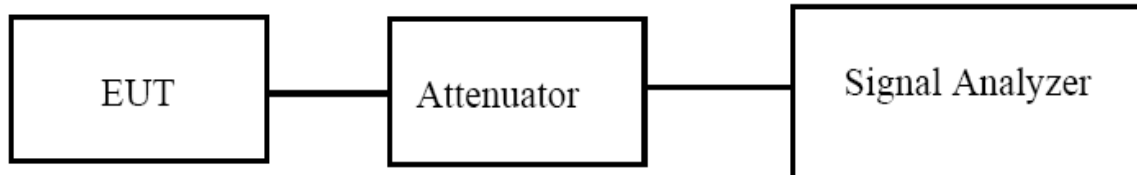

7.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

7.6 TEST RESULTS

EUT :	8 inch Full Ruggedized Tablet	Model Name :	xTablet T8540
Temperature :	25 °C	Relative Humidity :	60%
Pressure :	1012 hPa	Test Voltage :	DC 3.7V
Test Mode :	TX (5G) Mode Frequency (5150-5250MHz)		

Test Channel	Frequency	Maximum output power. Antenna port	LIMIT	Result
		(AV)		
	(MHz)	(dBm)	dBm	
TX 802.11a Mode				
CH36	5180	13.4	23.98	Pass
CH40	5200	13.3	23.98	Pass
CH48	5240	12.9	23.98	Pass
TX 802.11 n20M Mode				
CH36	5180	10.4	23.98	Pass
CH40	5200	10.4	23.98	Pass
CH48	5240	10.1	23.98	Pass
TX 802.11 n40M Mode				
CH38	5190	10.5	23.98	Pass
CH46	5230	10.1	23.98	Pass
TX 802.11 AC20M Mode				
CH36	5180	9.7	23.98	Pass
CH40	5200	9.6	23.98	Pass
CH48	5240	9.4	23.98	Pass
TX 802.11 AC40M Mode				
CH38	5190	8.5	23.98	Pass
CH46	5230	8.7	23.98	Pass
TX 802.11 AC80M Mode				
CH42	5210	7.6	23.98	Pass

EUT :	8 inch Full Ruggedized Tablet	Model Name :	xTablet T8540
Temperature :	25 °C	Relative Humidity :	60%
Pressure :	1012 hPa	Test Voltage :	DC 3.7V
Test Mode :	TX (5G) Mode Frequency (5745-5825MHz)		

Test Channel	Frequency	Maximum output power. Antenna port	LIMIT	Result
		(AV)		
	(MHz)	(dBm)	dBm	
TX 802.11a Mode				
CH 149	5745	12.2	30	Pass
CH 157	5785	12.6	30	Pass
CH 165	5825	13.4	30	Pass
TX 802.11 n20M Mode				
CH 149	5745	12.1	30	Pass
CH 157	5785	12.8	30	Pass
CH 165	5825	13.2	30	Pass
TX 802.11 n40M Mode				
CH 151	5755	8.2	30	Pass
CH 159	5795	8.2	30	Pass
TX 802.11 AC20M Mode				
CH 149	5745	8.5	30	Pass
CH 157	5785	9.0	30	Pass
CH 165	5825	9.7	30	Pass
TX 802.11 AC40M Mode				
CH 151	5755	8.6	30	Pass
CH 159	5795	8.1	30	Pass
TX 802.11 AC80M Mode				
CH 155	5775	7.5	30	Pass

8. OUT OF BAND EMISSIONS

8.1 APPLICABLE STANDARD

According to FCC §15.407(b)

Undesirable emission limits. Except as shown in paragraph (b)(7) of this section, the maximum emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:

(1) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

(2) For transmitters operating in the 5.725-5.85 GHz band: All emissions within the frequency range from the band edge to 10 MHz above or below the band edge shall not exceed an e.i.r.p. of -17 dBm/MHz; for frequencies 10 MHz or greater above or below the band edge, emissions shall not exceed an e.i.r.p. of -27 dBm/MHz.


8.2 TEST PROCEDURE

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW of spectrum analyzer to 1 MHz with a convenient frequency span.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

8.3 DEVIATION FROM STANDARD

No deviation.

8.4 TEST SETUP

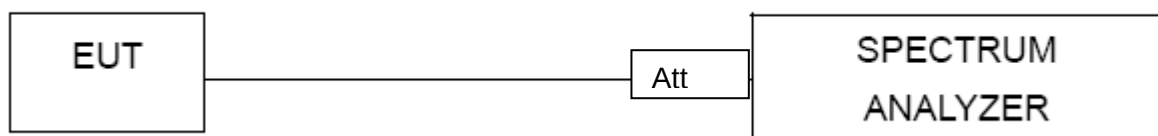

8.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.


8.6 TEST RESULTS

EUT :	8 inch Full Ruggedized Tablet	Model Name :	xTablet T8540
Temperature :	25 °C	Relative Humidity :	56%
Pressure :	1012 hPa	Test Voltage :	DC 3.7V


5.2G

5.15~5.25 GHz


(802.11a) Band Edge, Left Side

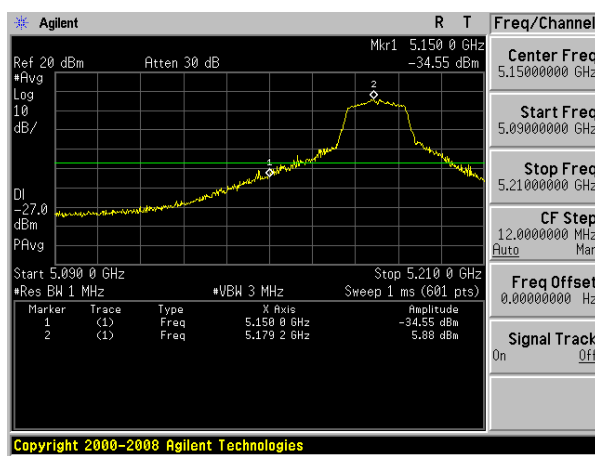


(802.11n20) Band Edge, Left Side

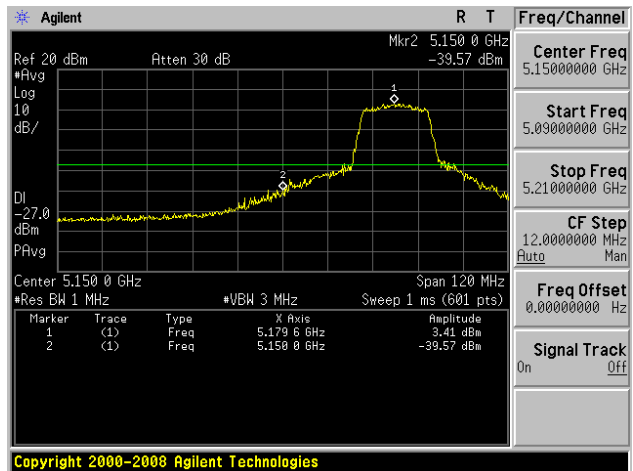

(802.11a) Band Edge, Right Side

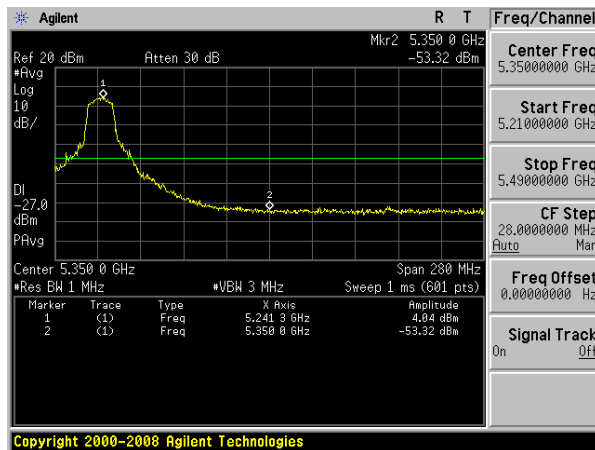


(802.11n20) Band Edge, Right Side

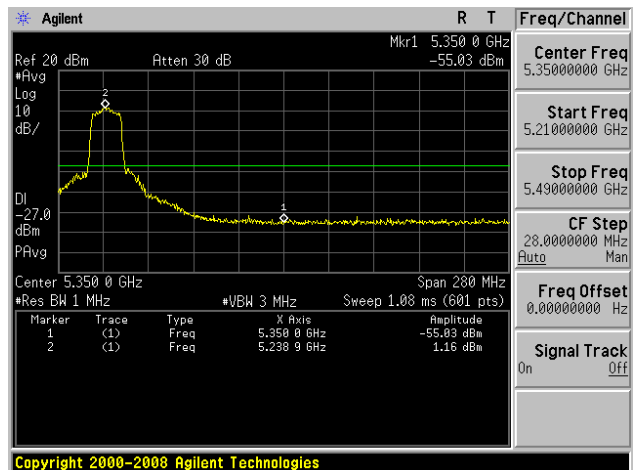


5.15~5.25 GHz


(802.11n40) Band Edge, Left Side

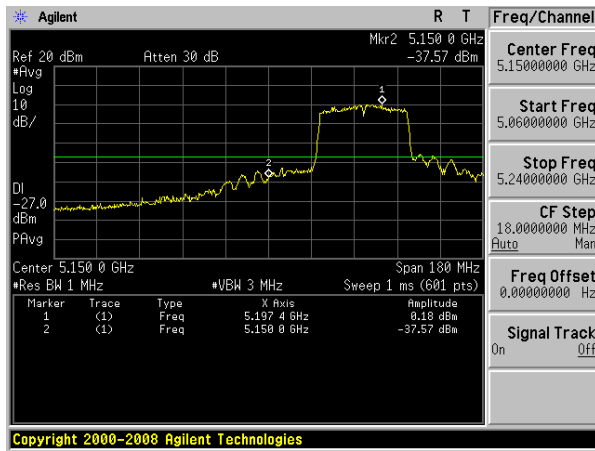


(802.11ac20) Band Edge, Left Side

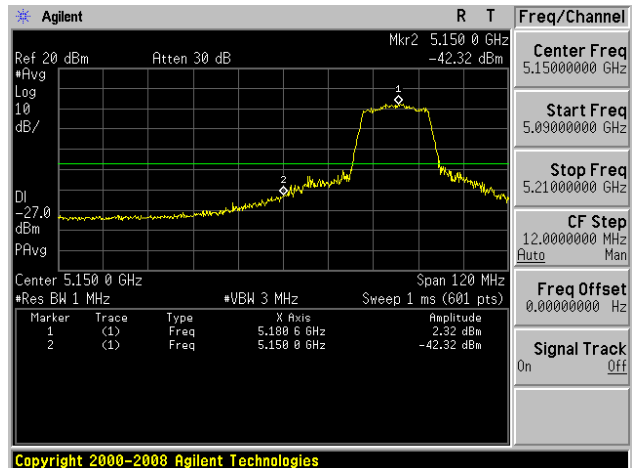

(802.11n40) Band Edge, Right Side

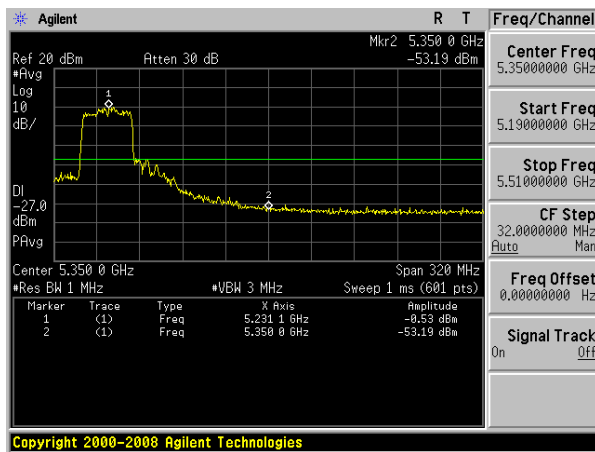


(802.11ac20) Band Edge, Right Side

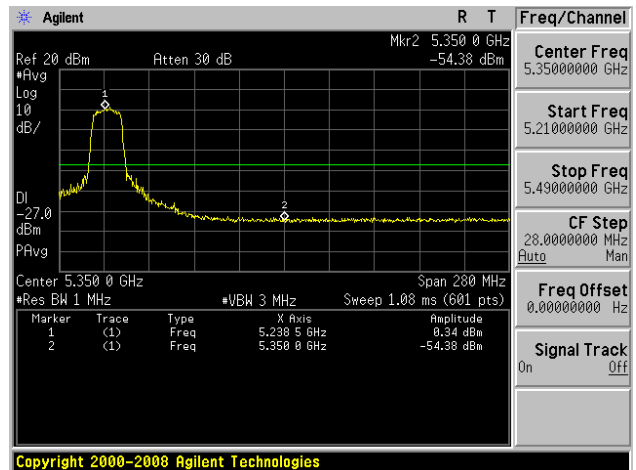


5.15~5.25 GHz


(802.11ac40) Band Edge, Left Side

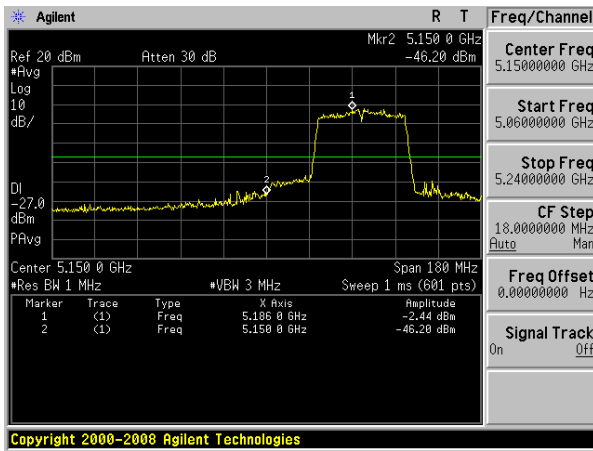


(802.11ac80) Band Edge, Left Side

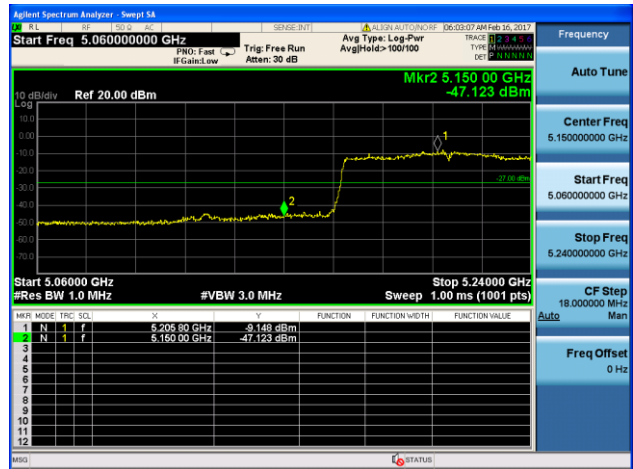

(802.11ac40) Band Edge, Right Side

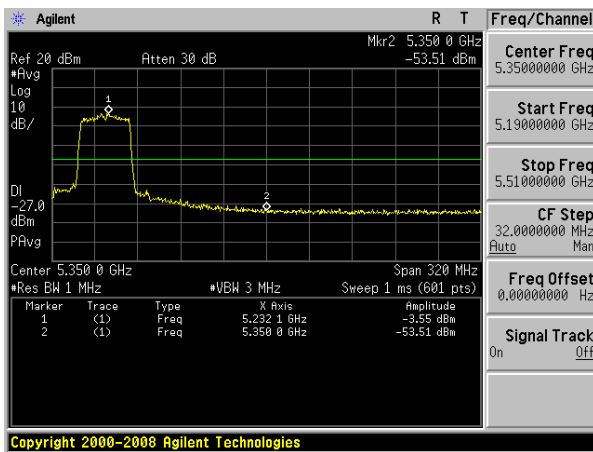

(802.11ac80) Band Edge, Right Side


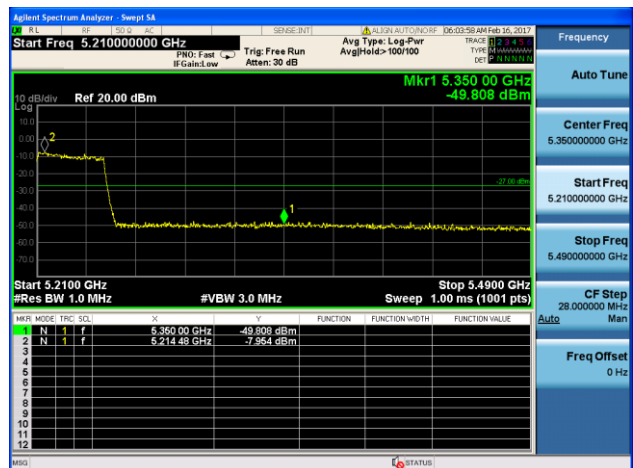


5.8G

5.725-5.85 GHz



(802.11a) Band Edge, Left Side

(802.11n20) Band Edge, Left Side

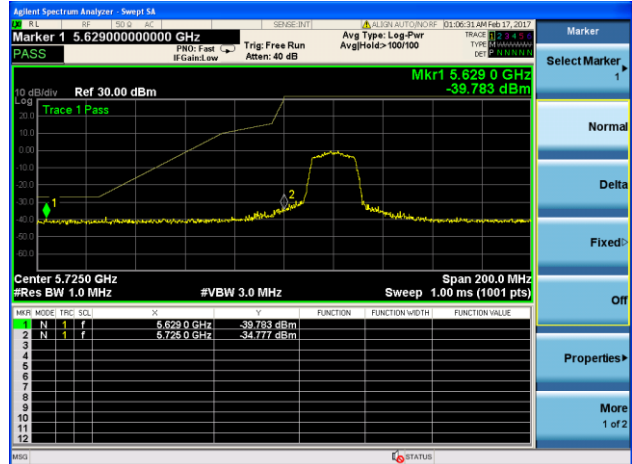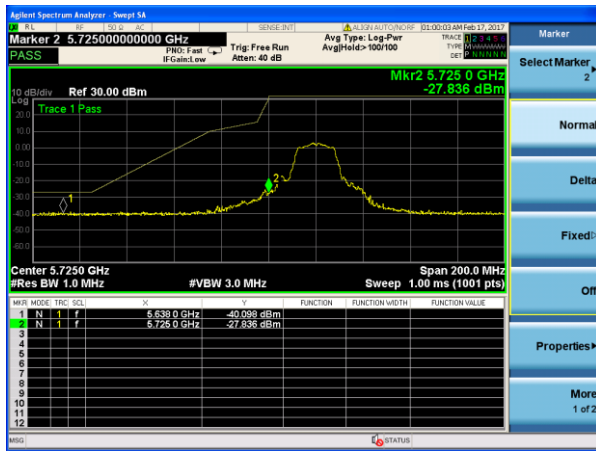


(802.11a) Band Edge, Right Side

(802.11n20) Band Edge, Right Side

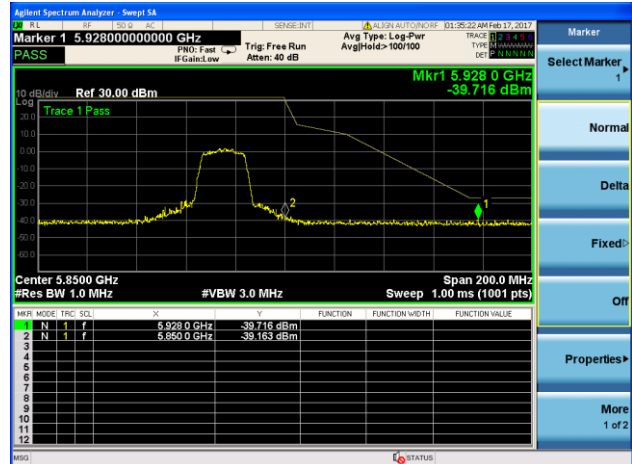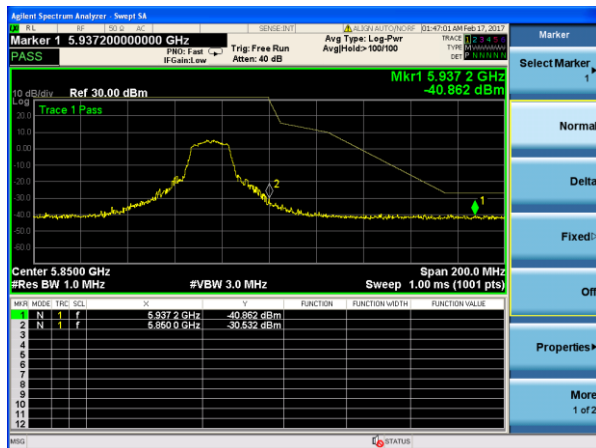


5.725-5.85 GHz


(802.11n40) Band Edge, Left Side

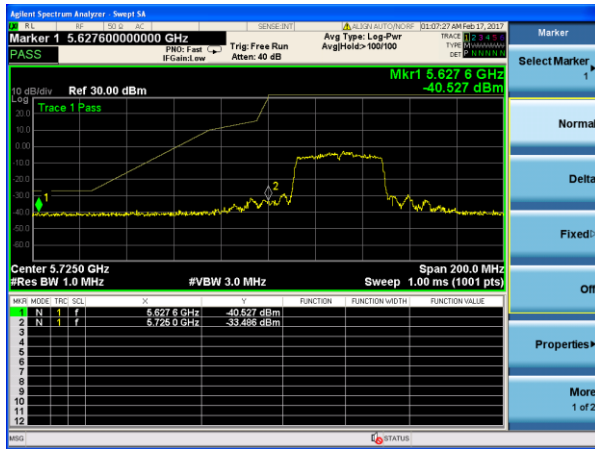


(802.11 ac20) Band Edge, Left Side

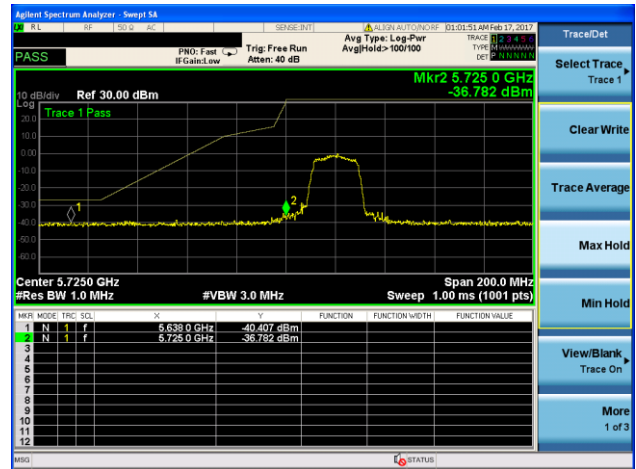

(802.11n40) Band Edge, Right Side

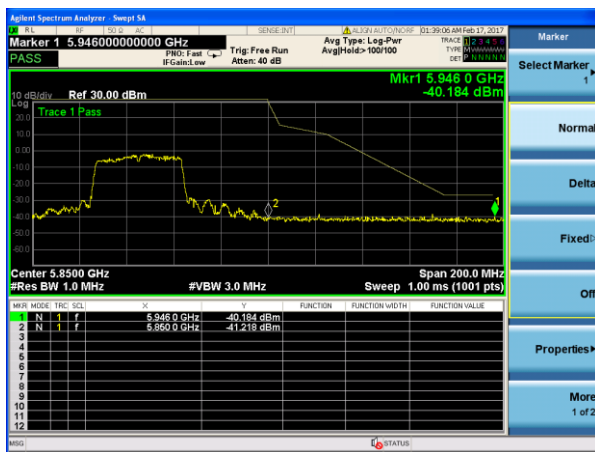


(802.11ac20) Band Edge, Right Side

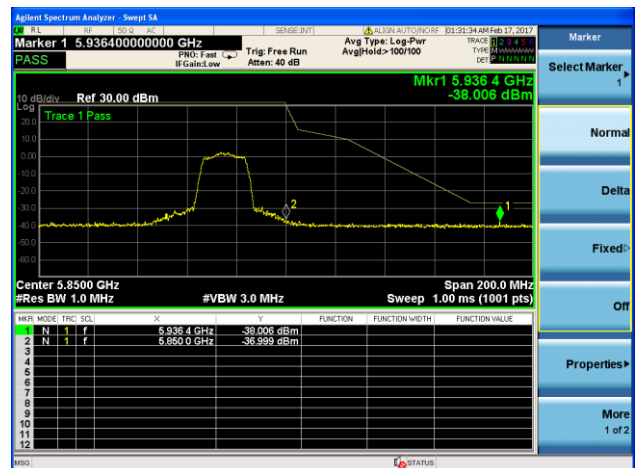


5.725-5.85 GHz


(802.11ac40) Band Edge, Left Side

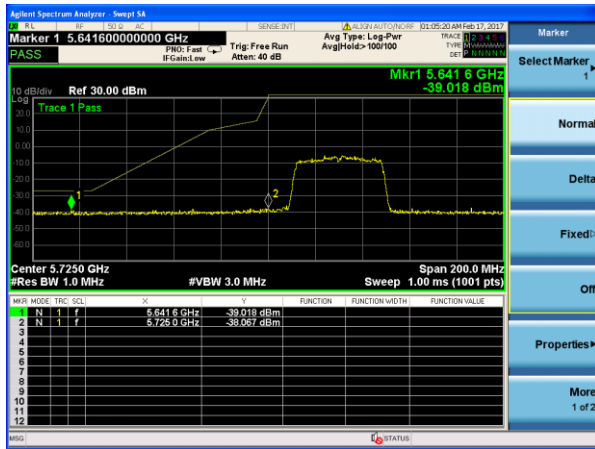


(802.11ac80) Band Edge, Left Side

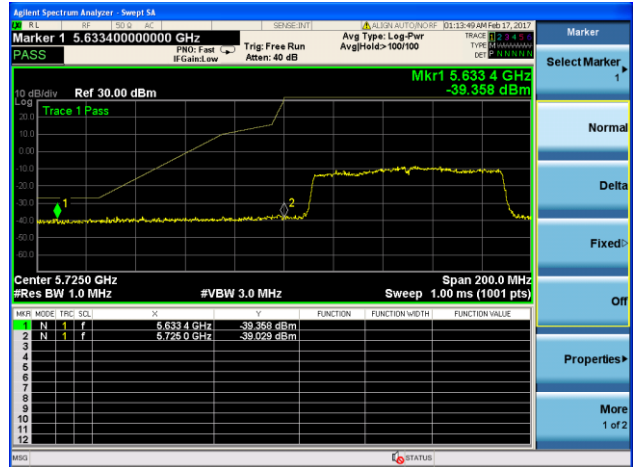

(802.11ac40) Band Edge, Right Side

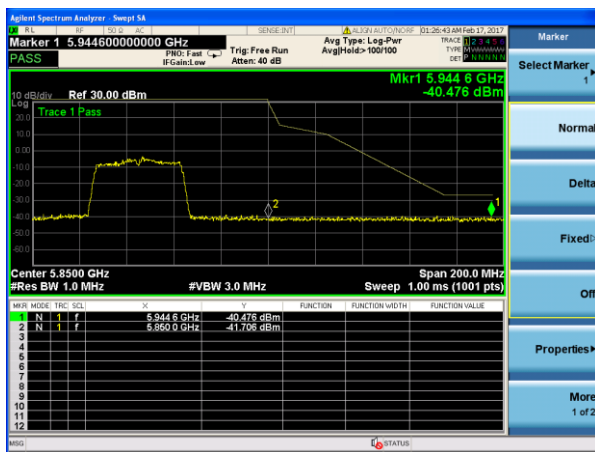

(802.11ac80) Band Edge, Right Side

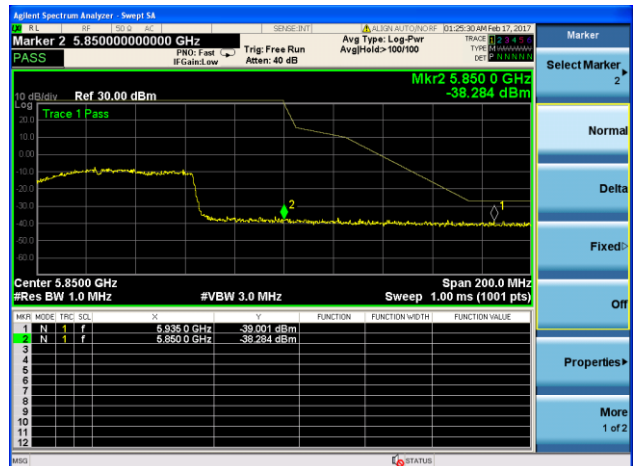

9.SPURIOUS RF CONDUCTED EMISSIONS

9.1CONFORMANCE LIMIT

1. Below -20dB of the highest emission level in operating band.
2. Fall in the restricted bands listed in section 15.205. The maximum permitted average field strength is listed in section 15.209.

9.2MEASURING INSTRUMENTS

The Measuring equipment is listed in the section 6.3 of this test report.

9.3TEST SETUP

Please refer to Section 6.1 of this test report.

9.4TEST PROCEDURE

The Spurious RF conducted emissions compliance of RF radiated emission should be measured by following the guidance in ANSI C63.10-2013 with respect to maximizing the emission by rotating the EUT, measuring the emission while the EUT is situated in three orthogonal planes (if appropriate), adjusting the measurement antenna height and polarization etc. Set RBW=100kHz and VBW= 300KHz to measure the peak field strength , and measure frequency range from 9KHz to 26.5GHz.


9.5TEST RESULTS

Remark: The measurement frequency range is from 9KHz to the 10th harmonic of the fundamental frequency. The lowest, middle and highest channels are tested to verify the spurious emissions and band edge measurement data.


5.2G

Test Plot


802.11a on channel 36

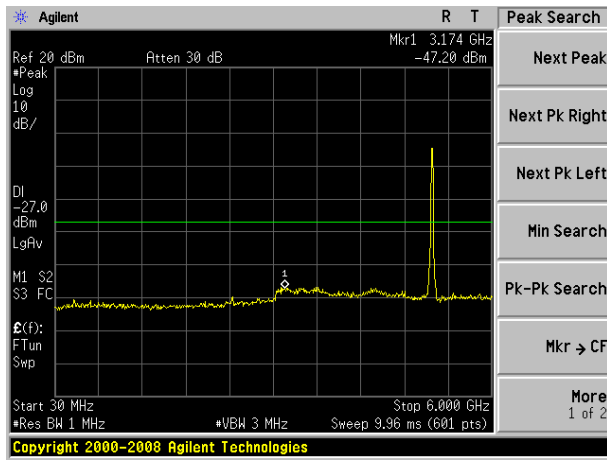


802.11a on channel 40

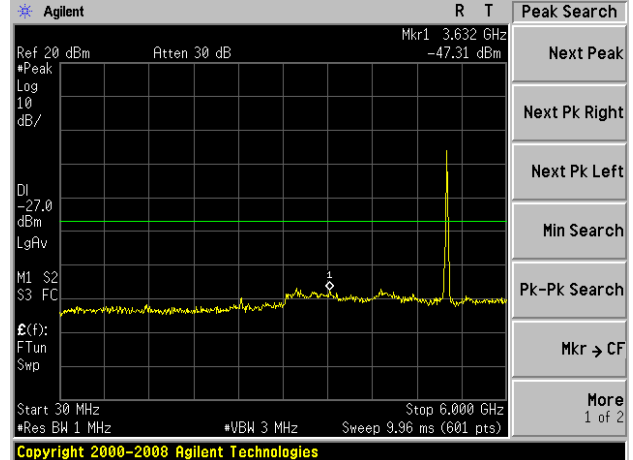

802.11a on channel 36

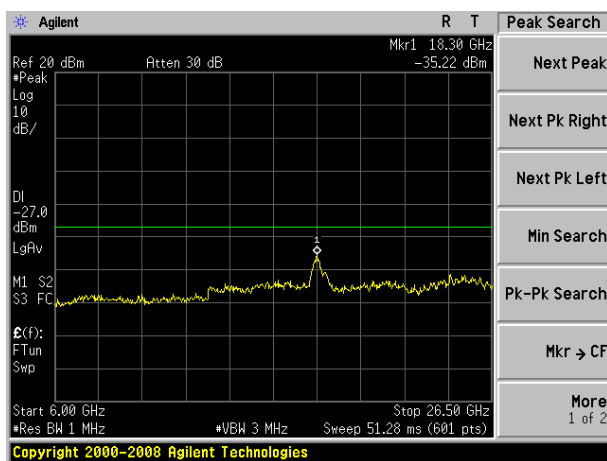


802.11a on channel 40

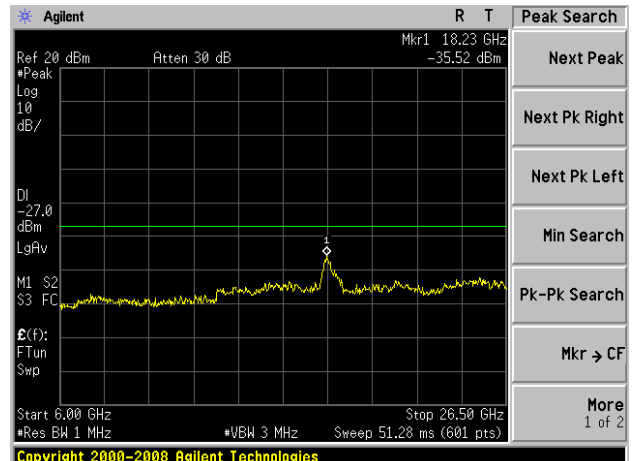


Test Plot


802.11a on channel 48

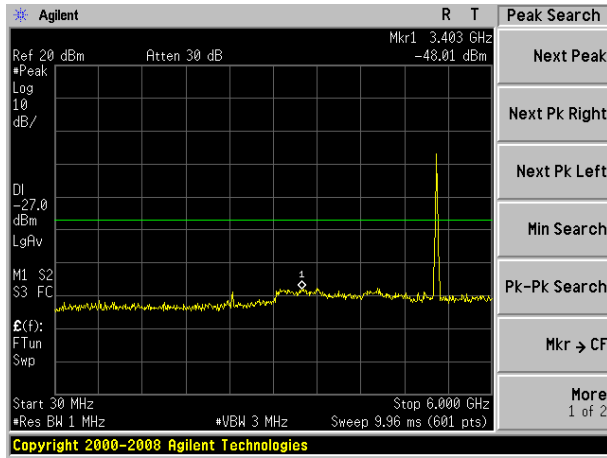


802.11n20 on channel 36

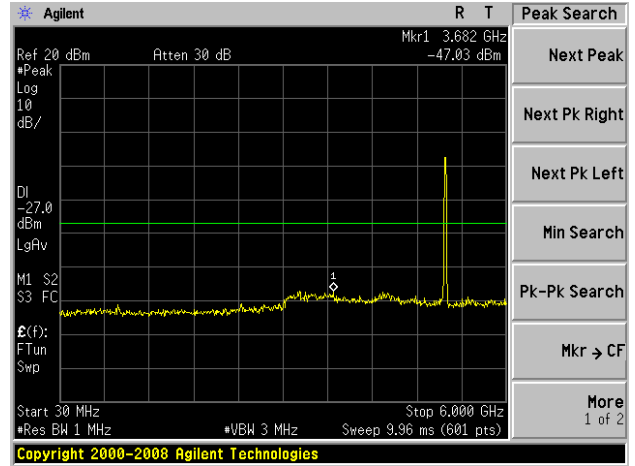

802.11a on channel 48

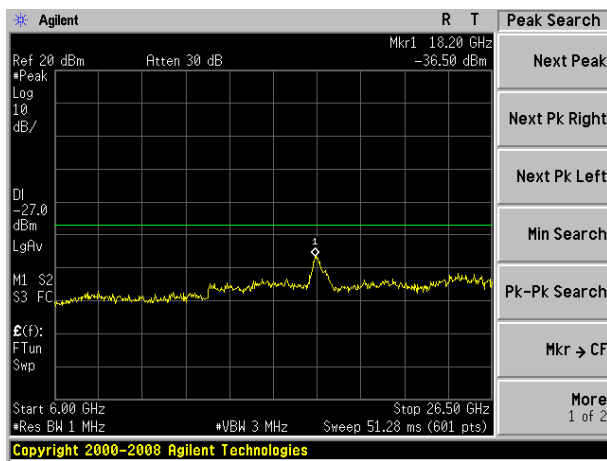


802.11n20 on channel 36

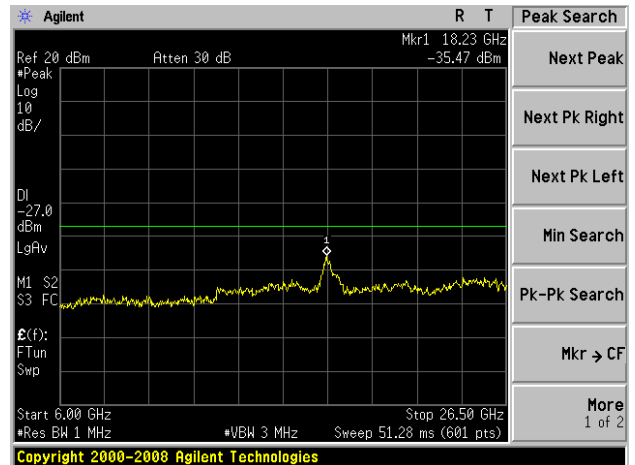


Test Plot


802.11n20 on channel 40

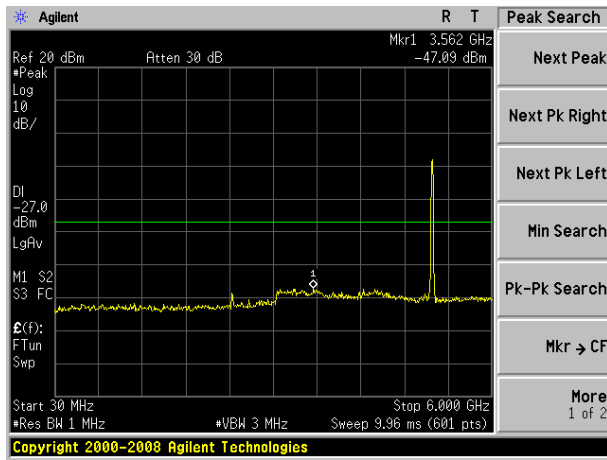


802.11n20 on channel 48

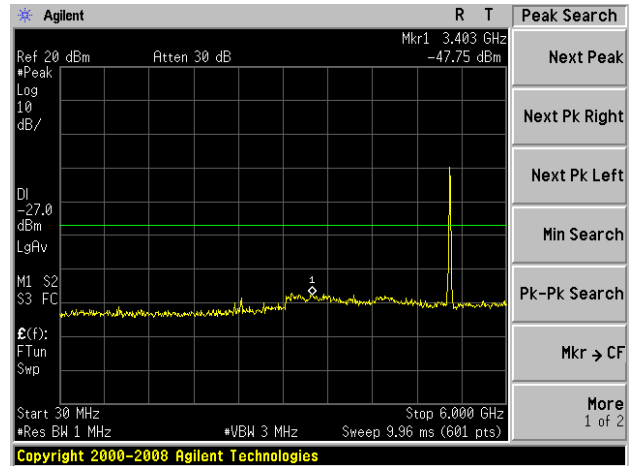

802.11n20 on channel 40

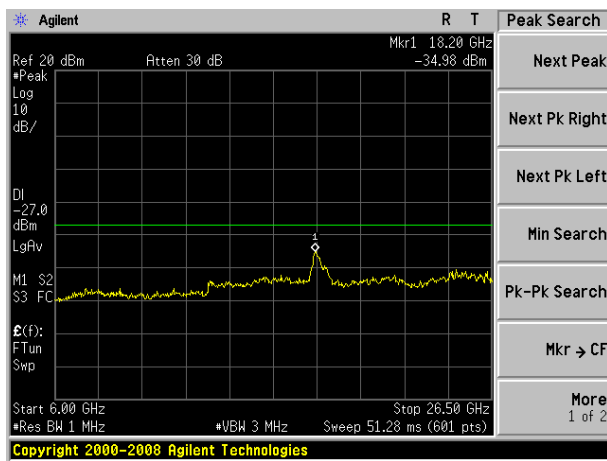


802.11n20 on channel 48

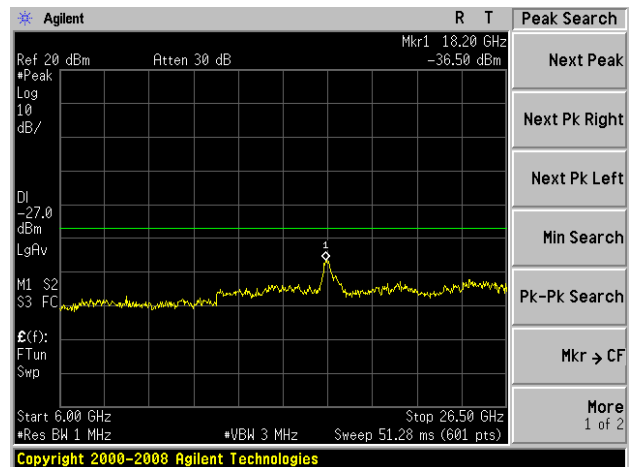


Test Plot


802.11n40 on channel 38

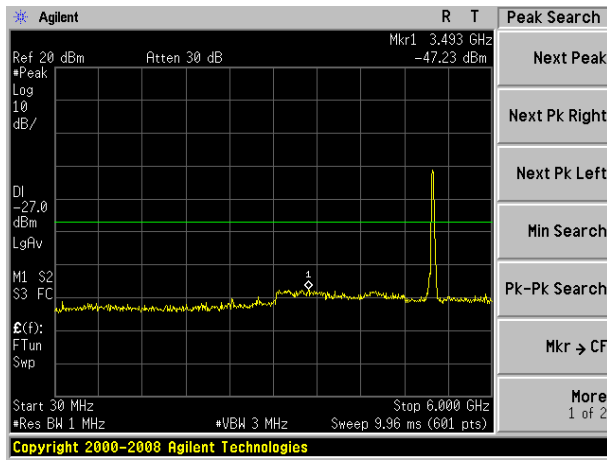


802.11n40 on channel 46

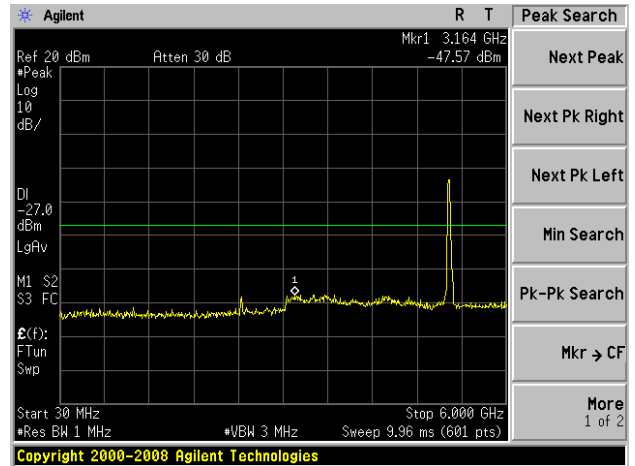

802.11n40 on channel 38

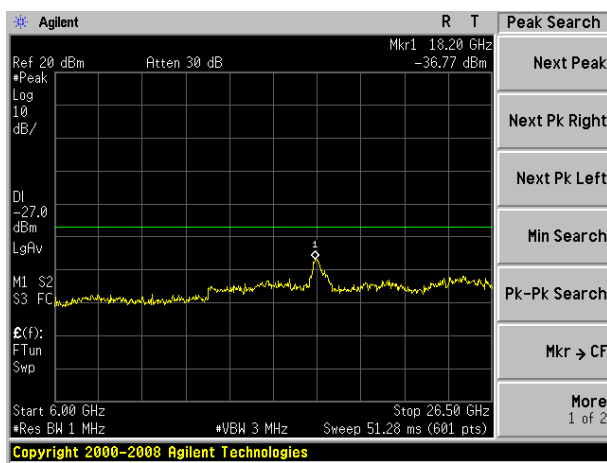


802.11n40 on channel 46

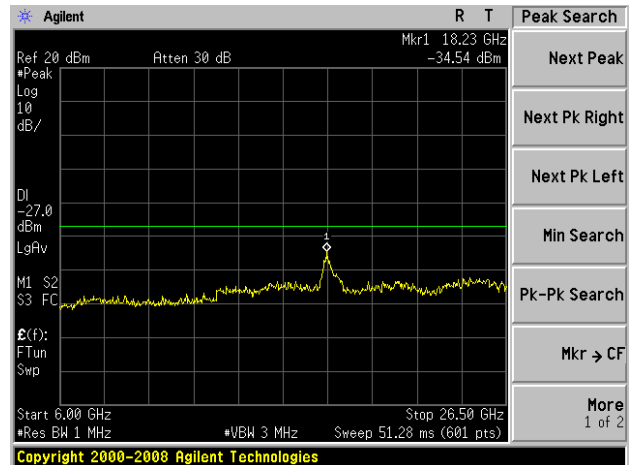


Test Plot


802.11ac20 on channel 36

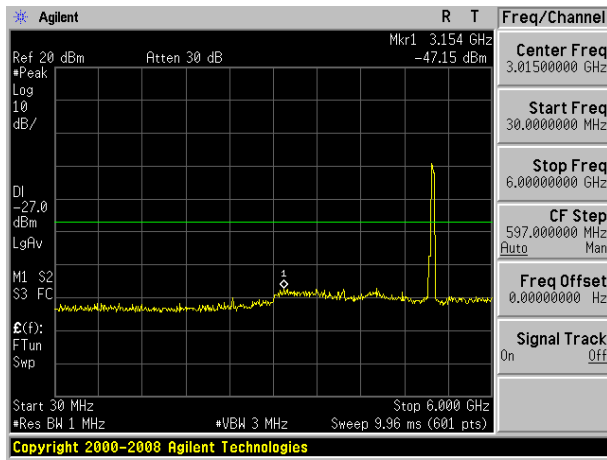


802.11ac20 on channel 40

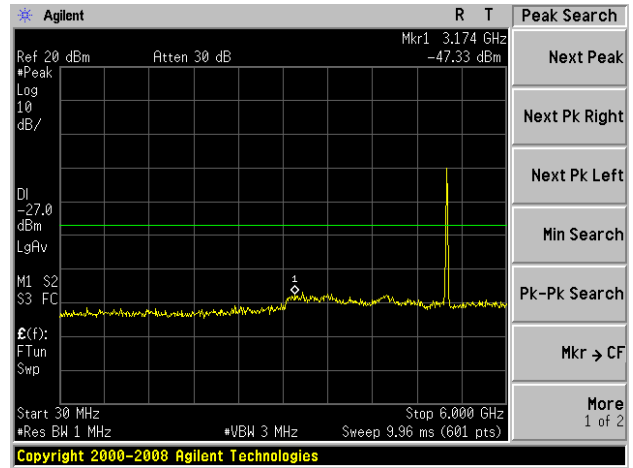

802.11ac20 on channel 36

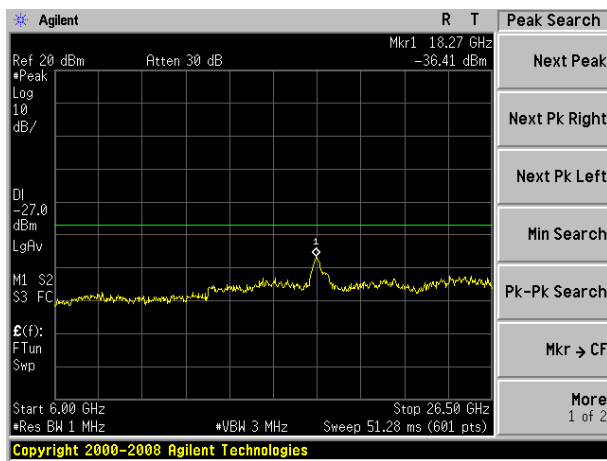


802.11ac20 on channel 40

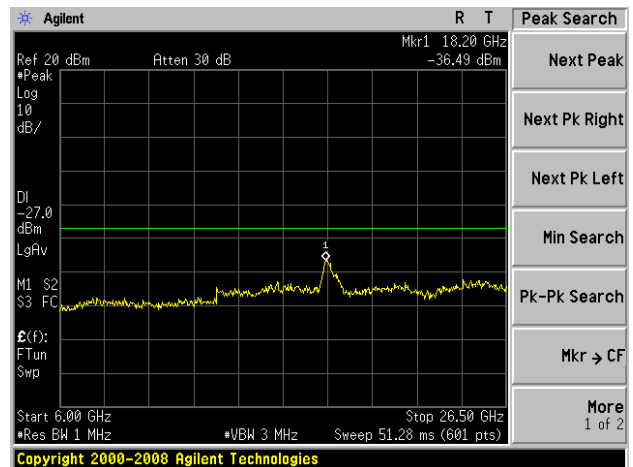


Test Plot


802.11ac20 on channel 48

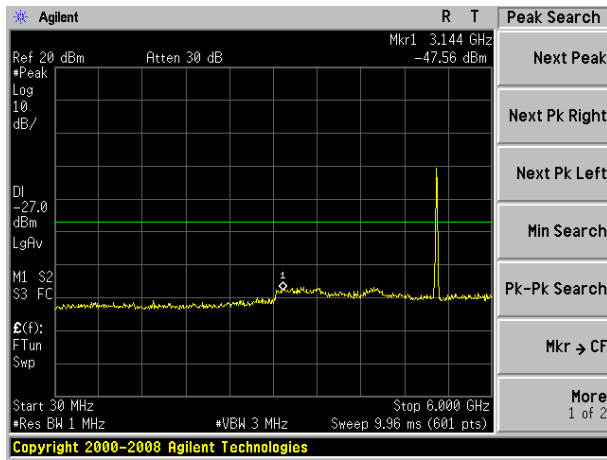


802.11ac40 on channel 38

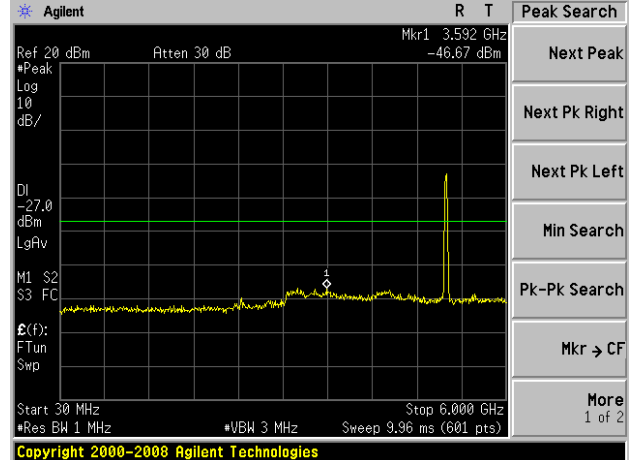

802.11ac20 on channel 48

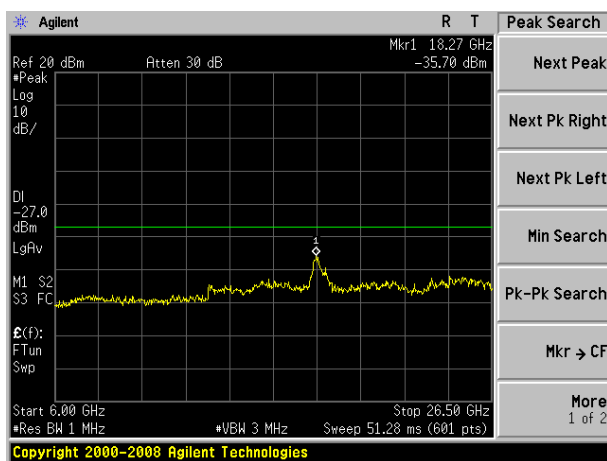


802.11ac40 on channel 38

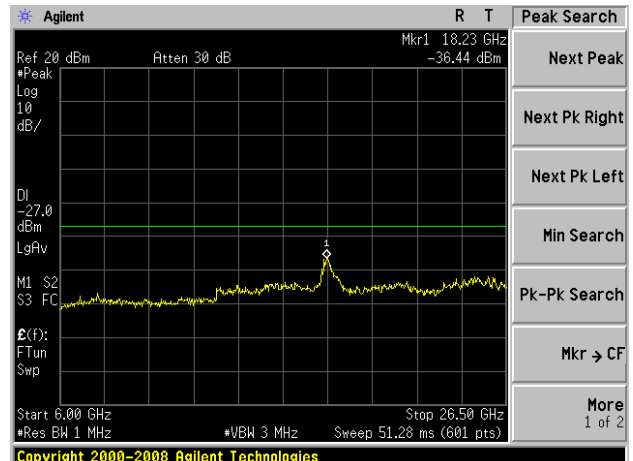


Test Plot


802.11ac40 on channel 46

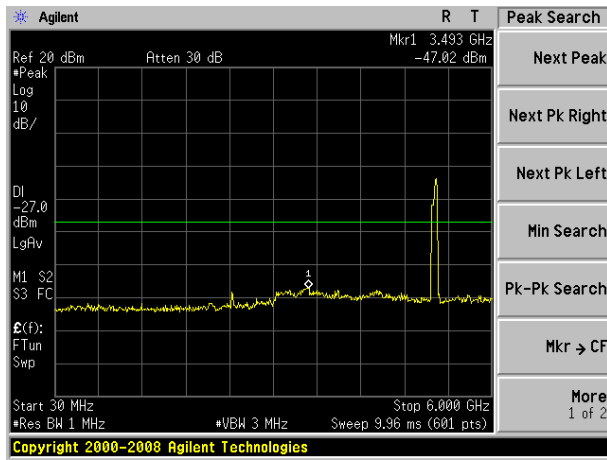


802.11ac80 on channel 42

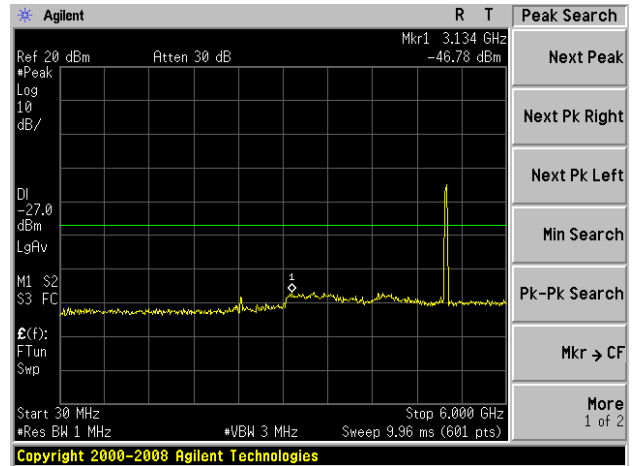

802.11 ac40 on channel 46

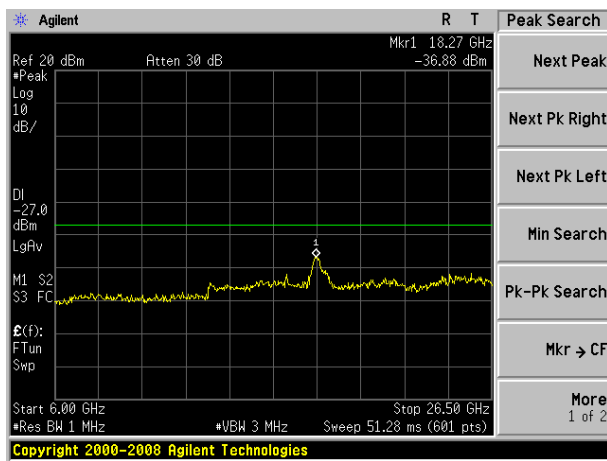


802.11 ac80 on channel 42

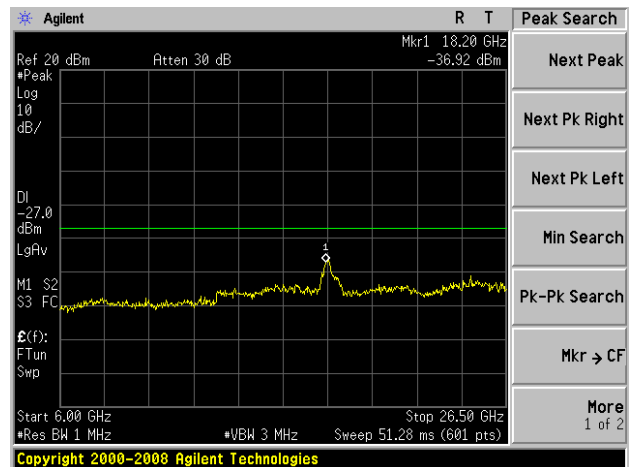


5.8G

Test Plot


802.11a on channel 149

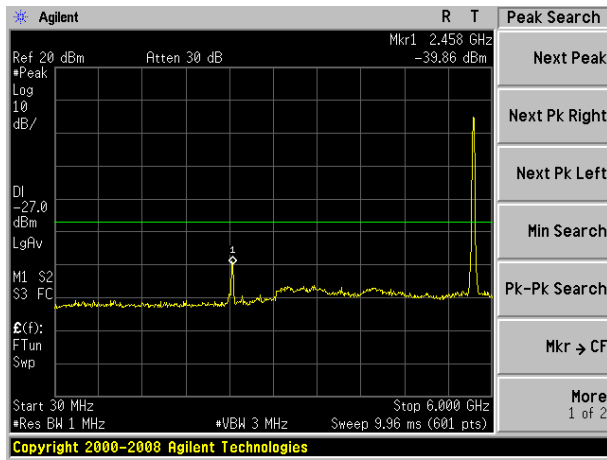


802.11a on channel 157

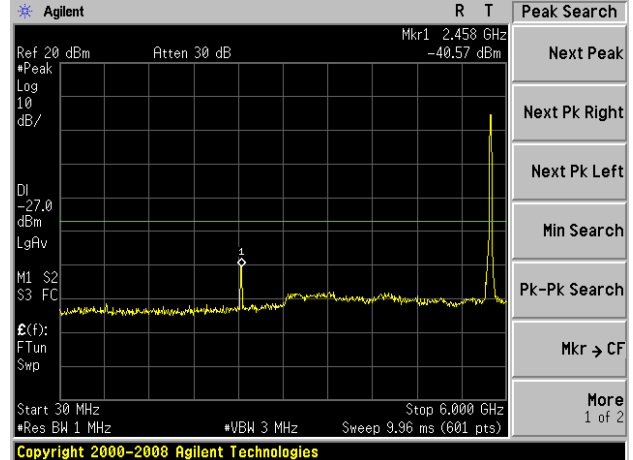

802.11a on channel 149

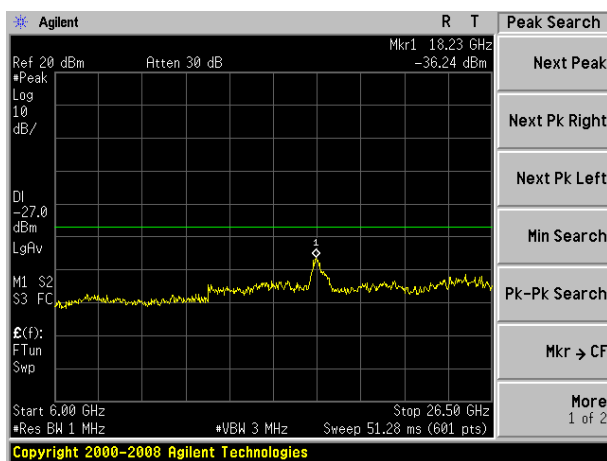


802.11a on channel 157

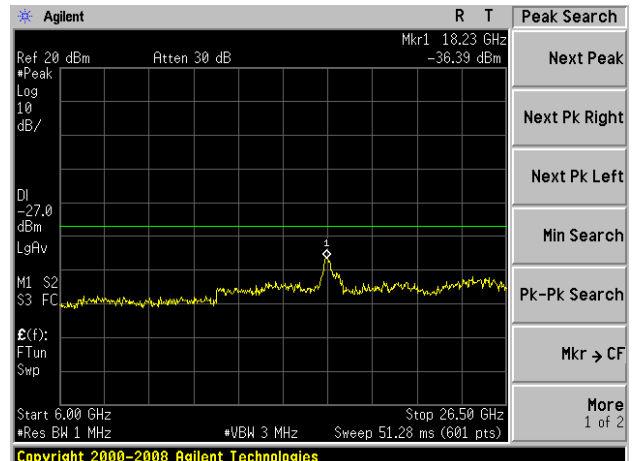


Test Plot


802.11a on channel 165

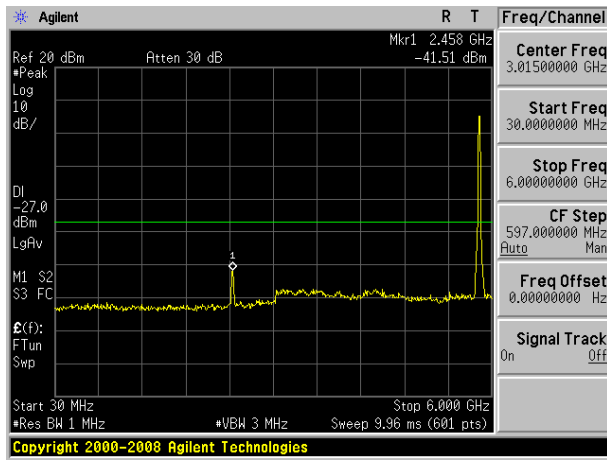


802.11n20 on channel 149

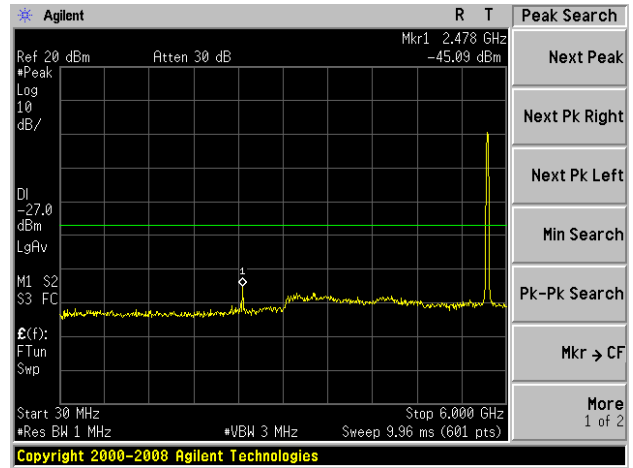

802.11a on channel 165

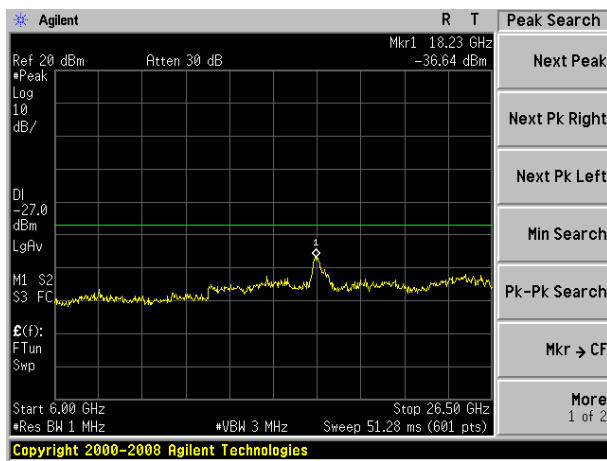


802.11n20 on channel 149

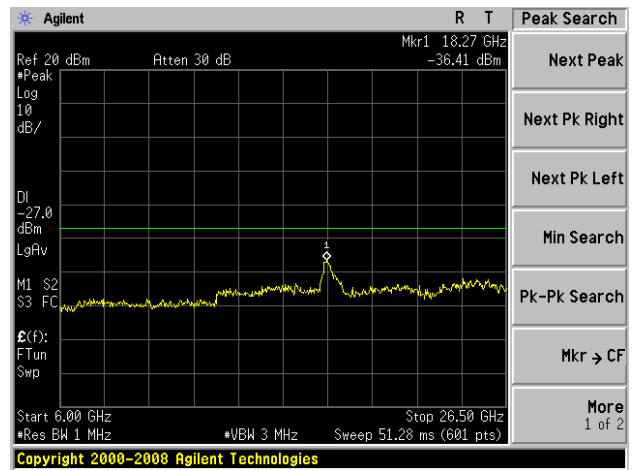


Test Plot


802.11n20 on channel 157

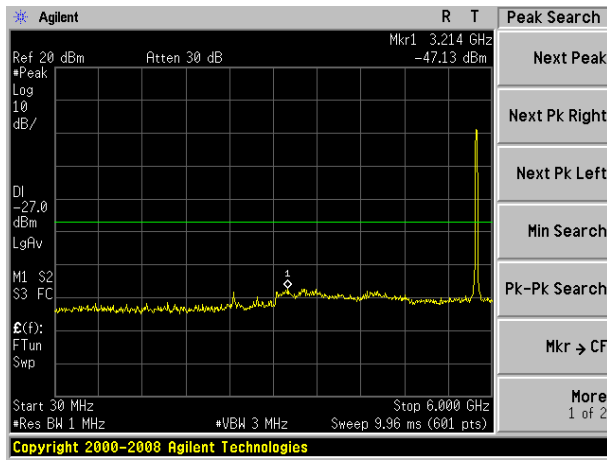


802.11n20 on channel 165

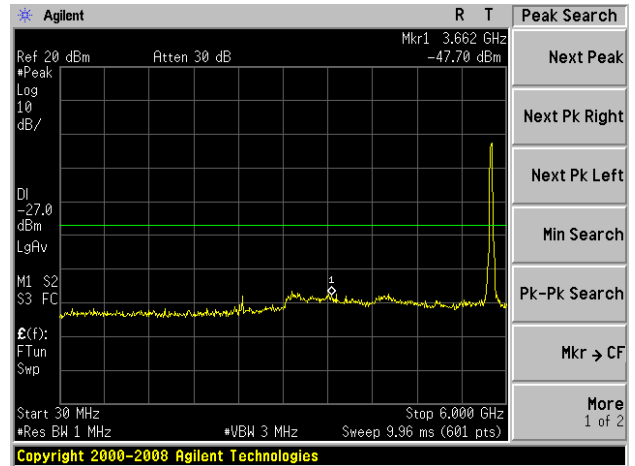

802.11n20 on channel 157

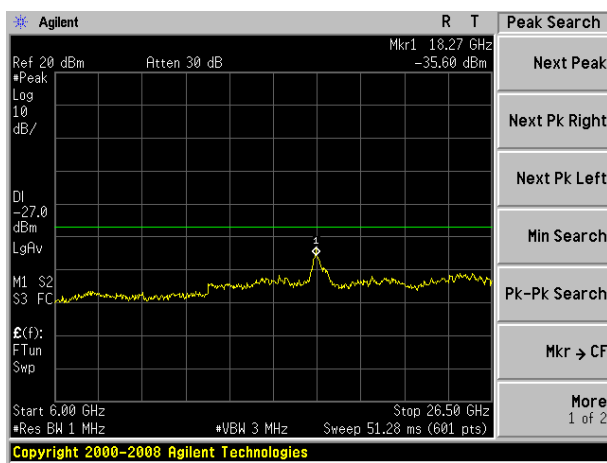


802.11n20 on channel 165

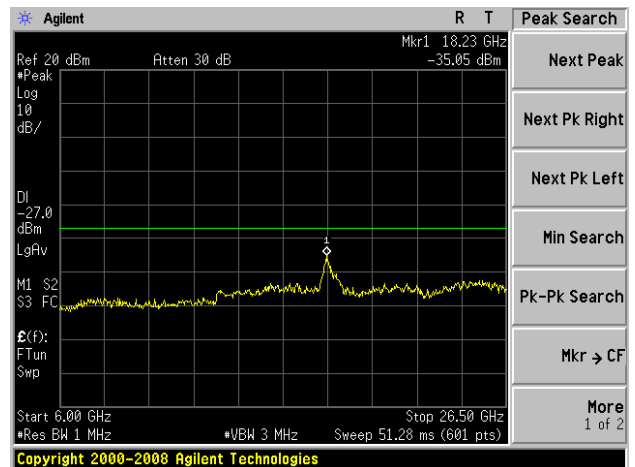


Test Plot


802.11n40 on channel 151

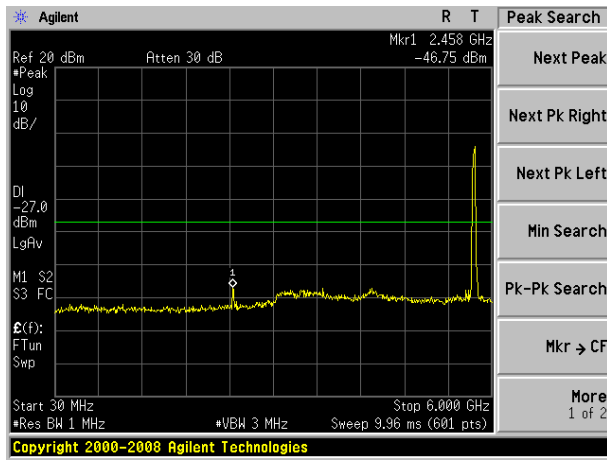


802.11n40 on channel 159

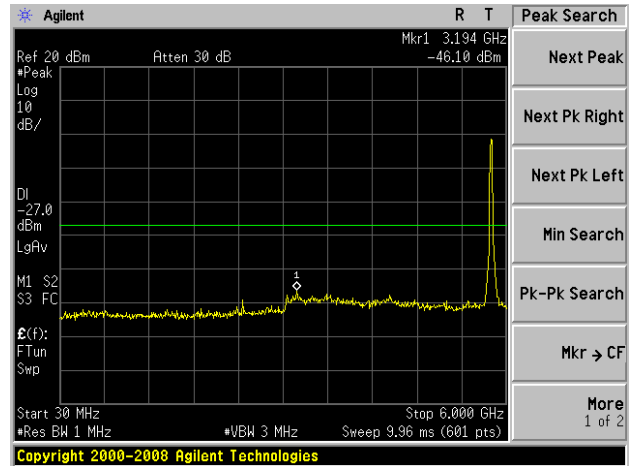

802.11n40 on channel 151

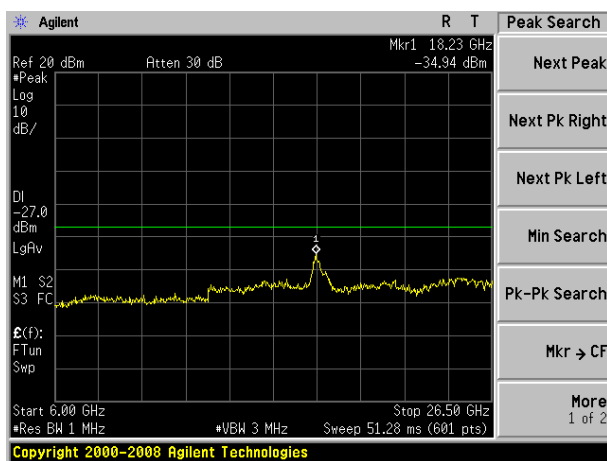


802.11n40 on channel 159

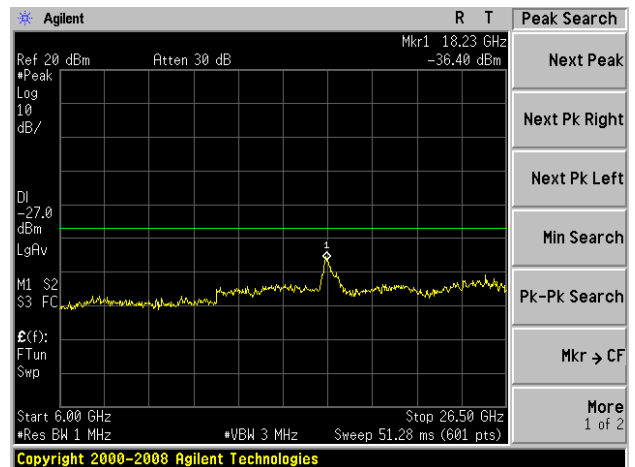


Test Plot


802.11ac20 on channel 149

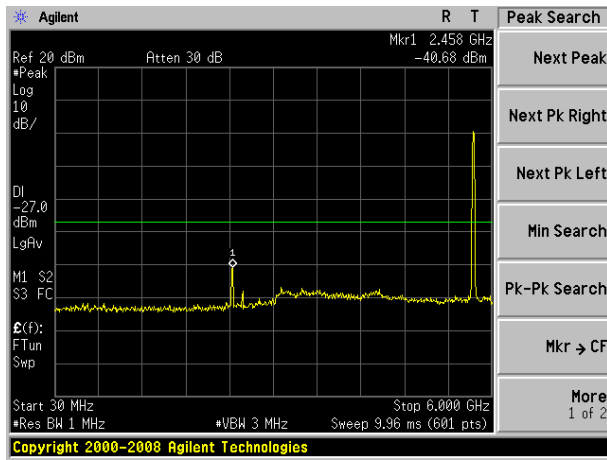


802.11ac20 on channel 157

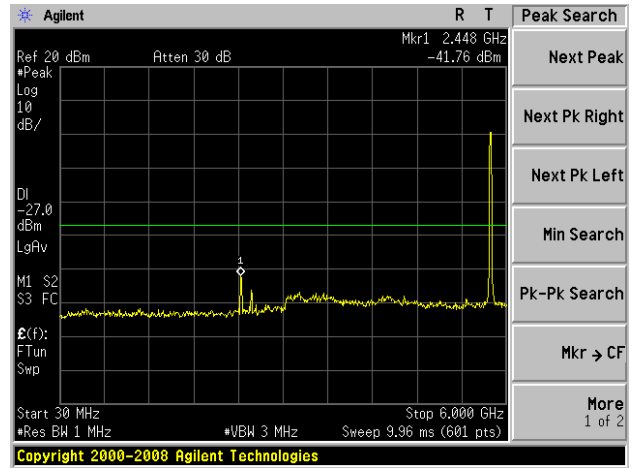

802.11ac20 on channel 149

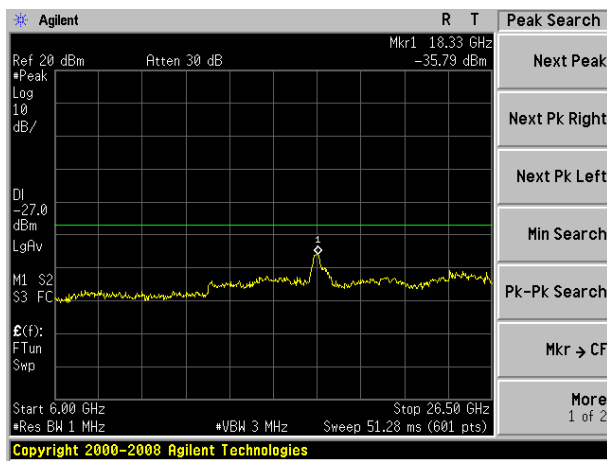


802.11ac20 on channel 157

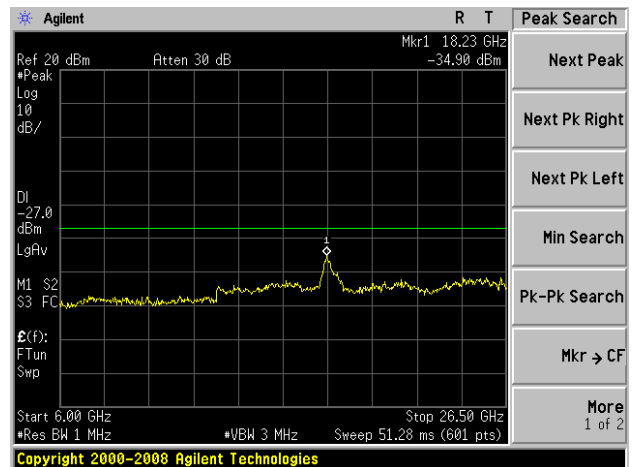


Test Plot


802.11ac20 on channel 165

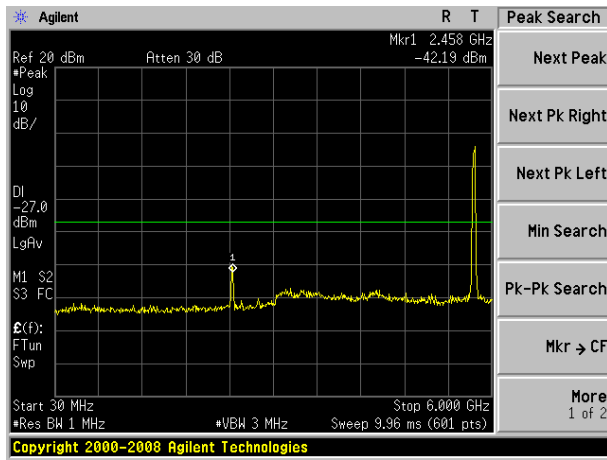


802.11ac40 on channel 151

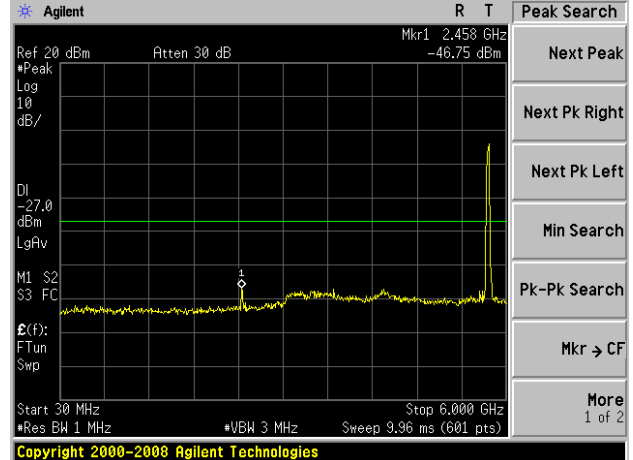

802.11ac20 on channel 165

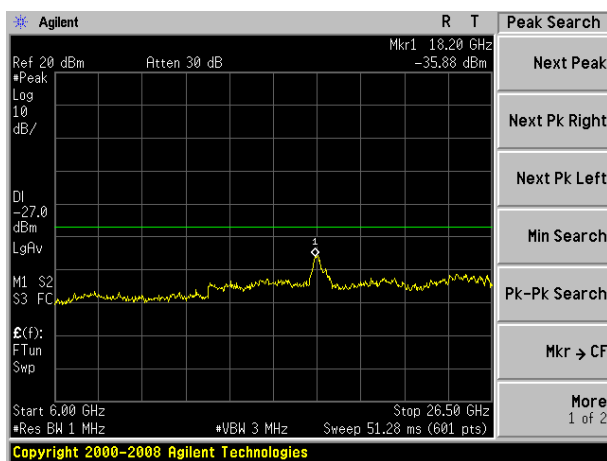


802.11ac40 on channel 151

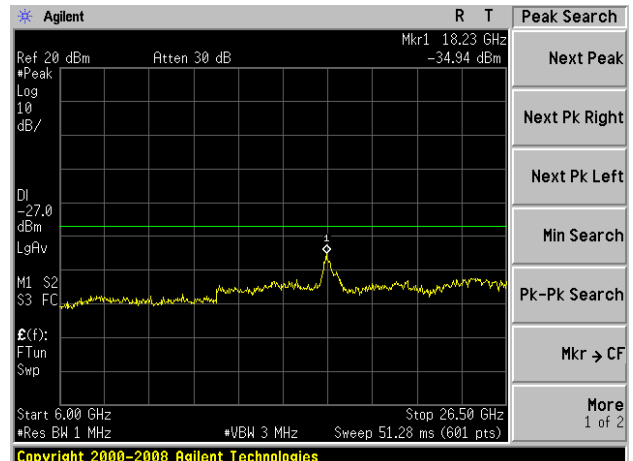


Test Plot


802.11ac40 on channel 159

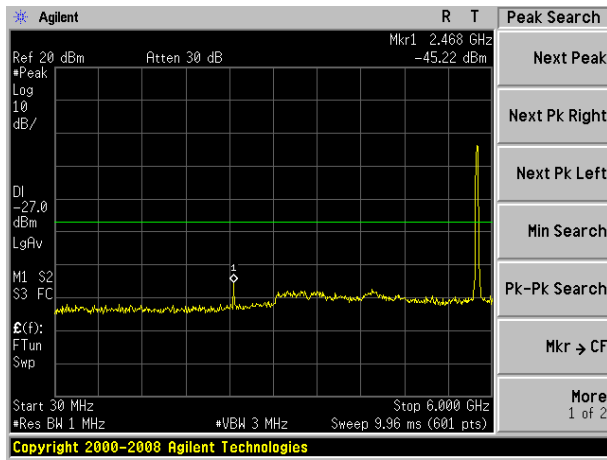


802.11ac80 on channel 155

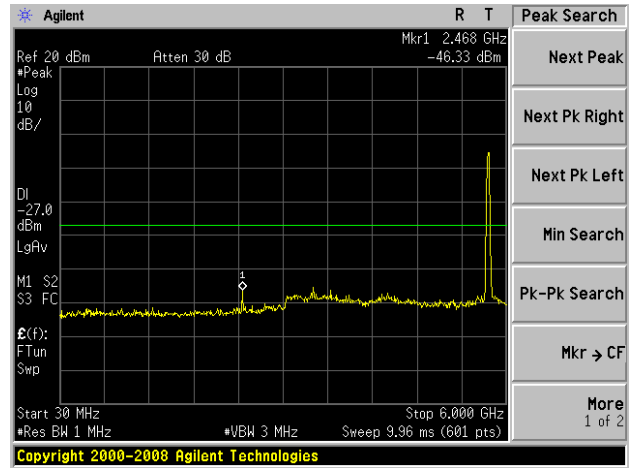

802.11 ac40 on channel 159

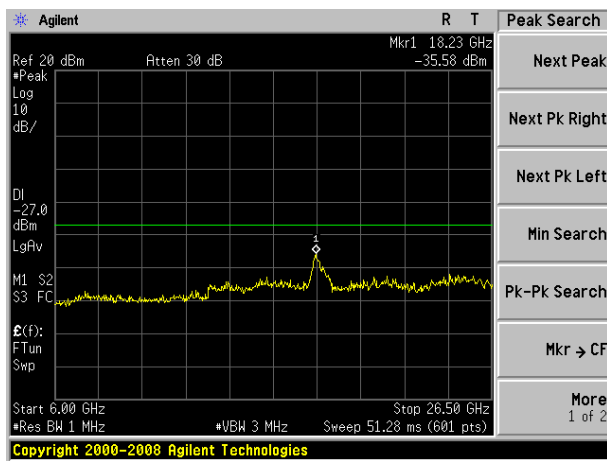

802.11 ac80 on channel 155

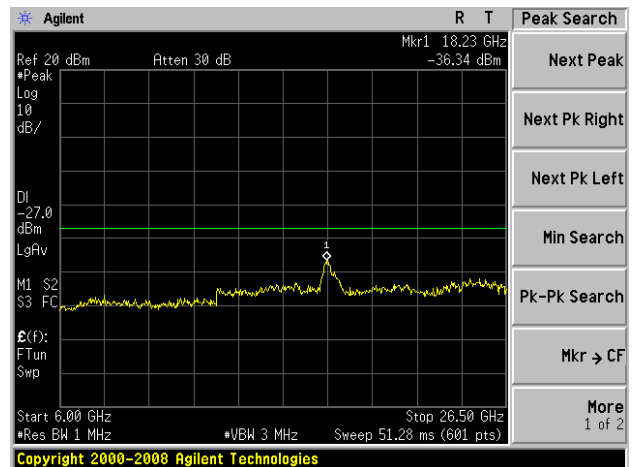

10. Frequency Stability Measurement

10.1 LIMIT


Manufactures of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the user's manual.

The transmitter center frequency tolerance shall be ± 20 ppm maximum for the 5 GHz band (IEEE 802.11n specification).

10.2 TEST PROCEDURES

1. The transmitter output (antenna port) was connected to the spectrum analyzer.
2. EUT have transmitted absence of modulation signal and fixed channelize.
3. Set the spectrum analyzer span to view the entire absence of modulation emissions bandwidth.
4. Set RBW = 10 kHz, VBW = 10 kHz with peak detector and maxhold settings.
5. f_c is declaring of channel frequency. Then the frequency error formula is $(f_c - f)/f_c \times 10^6$ ppm and the limit is less than ± 20 ppm (IEEE 802.11n specification).
6. The test extreme voltage is to change the primary supply voltage from 85 to 115 percent of the nominal value
7. Extreme temperature is $-20^\circ\text{C} \sim 70^\circ\text{C}$.

10.3 TEST SETUP LAYOUT

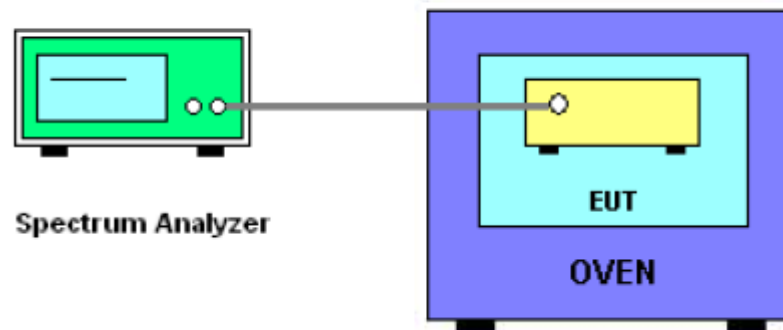

10.4 EUT OPERATION DURING TEST

The EUT was programmed to be in continuously un-modulation transmitting mode.

10.5 TEST RESULTS

EUT :	8 inch Full Ruggedized Tablet	Model Name :	xTablet T8540
Temperature :	25 °C	Relative Humidity :	56%
Pressure :	1012 hPa	Test Voltage :	DC 3.7V
Test Mode :	TX Frequency(5150-5250MHz)		

Voltage vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5180MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
T nom (°C)	20	V nom (V)	3.70	5180.01152	5180	0.01152	-2.2239
		V max (V)	4.26	5180.00991	5180	0.00991	-1.9131
		V min (V)	3.15	5180.01102	5180	0.01102	-2.1274
Limits				± 20 ppm			
Result				Complies			

Temperature vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5180MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
V nom (V)	3.7	T (°C)	-20	5180.01058	5180	0.01058	-2.0425
		T (°C)	-10	5180.01055	5180	0.01055	-2.0367
		T (°C)	0	5180.01112	5180	0.01112	-2.1467
		T (°C)	10	5180.01115	5180	0.01115	-2.1525
		T (°C)	20	5180.01152	5180	0.01152	-2.2239
		T (°C)	30	5180.01124	5180	0.01124	-2.1699
		T (°C)	40	5180.01105	5180	0.01105	-2.1332
		T (°C)	50	5180.01106	5180	0.01106	-2.1351
		T (°C)	60	5180.01114	5180	0.01114	-2.1506
		T (°C)	70	5180.01109	5180	0.01109	-2.1409
Limits				± 20 ppm			
Result				Complies			

Voltage vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5200MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
T nom (°C)	20	V nom (V)	3.70	5200.02054	5200	0.02054	-3.9500
		V max (V)	4.26	5200.02145	5200	0.02145	-4.1250
		V min (V)	3.15	5200.02234	5200	0.02234	-4.2962
Limits				± 20 ppm			
Result				Complies			

Temperature vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5200MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
V nom (V)	3.7	T (°C)	-20	5200.00254	5200	0.00254	-0.4885
		T (°C)	-10	5200.00612	5200	0.00612	-1.1769
		T (°C)	0	5200.01614	5200	0.01614	-3.1038
		T (°C)	10	5200.01164	5200	0.01164	-2.2385
		T (°C)	20	5200.02054	5200	0.02054	-3.9500
		T (°C)	30	5200.02116	5200	0.02116	-4.0692
		T (°C)	40	5200.02041	5200	0.02041	-3.9250
		T (°C)	50	5200.02028	5200	0.02028	-3.9000
		T (°C)	60	5200.02043	5200	0.02043	-3.9288
		T (°C)	70	5200.02232	5200	0.02232	-4.2923
Limits				± 20 ppm			

Voltage vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5240MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
T nom (°C)	20	V nom (V)	3.70	5240.00105	5240	0.00105	-0.2004
		V max (V)	4.26	5240.00148	5240	0.00148	-0.2824
		V min (V)	3.15	5240.00282	5240	0.00282	-0.5382
Limits				± 20 ppm			
Result				Complies			

Temperature vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5240MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
V nom (V)	3.7	T (°C)	-20	5240.01114	5240	0.01114	-2.1260
		T (°C)	-10	5240.00357	5240	0.00357	-0.6813
		T (°C)	0	5240.01242	5240	0.01242	-2.3702
		T (°C)	10	5240.01059	5240	0.01059	-2.0210
		T (°C)	20	5240.00105	5240	0.00105	-0.2004
		T (°C)	30	5240.01352	5240	0.01352	-2.5802
		T (°C)	40	5240.01227	5240	0.01227	-2.3416
		T (°C)	50	5240.01224	5240	0.01224	-2.3359
		T (°C)	60	5240.00325	5240	0.00325	-0.6202
		T (°C)	70	5240.01176	5240	0.01176	-2.2443
Limits				± 20 ppm			
Result				Complies			

EUT :	8 inch Full Ruggedized Tablet	Model Name :	xTablet T8540
Temperature :	25 °C	Relative Humidity :	56%
Pressure :	1012 hPa	Test Voltage :	DC 3.7V
Test Mode :	TX Frequency(5745-5850MHz)		

Voltage vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5745MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
T nom (°C)	20	V nom (V)	3.70	5745.01412	5745	0.01412	-2.4578
		V max (V)	4.26	5745.01374	5745	0.01374	-2.3916
		V min (V)	3.15	5745.01242	5745	0.01242	-2.1619
Limits				± 20 ppm			
Result				Complies			

Temperature vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5745MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
V nom (V)	3.7	T (°C)	-20	5745.01230	5745	0.01230	-2.1410
		T (°C)	-10	5745.01121	5745	0.01121	-1.9513
		T (°C)	0	5745.01617	5745	0.01617	-2.8146
		T (°C)	10	5745.01324	5745	0.01324	-2.3046
		T (°C)	20	5745.01412	5745	0.01412	-2.4578
		T (°C)	30	5745.01452	5745	0.01452	-2.5274
		T (°C)	40	5745.01342	5745	0.01342	-2.3359
		T (°C)	50	5745.01334	5745	0.01334	-2.3220
		T (°C)	60	5745.01337	5745	0.01337	-2.3272
		T (°C)	70	5745.01322	5745	0.01322	-2.3011
Limits				± 20 ppm			
Result				Complies			

Voltage vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5785MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
T nom (°C)	20	V nom (V)	3.70	5785.02247	5785	0.02247	-3.8842
		V max (V)	4.26	5785.03031	5785	0.03031	-5.2394
		V min (V)	3.15	5785.02243	5785	0.02243	-3.8773
Limits				± 20 ppm			
Result				Complies			

Temperature vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5785MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
V nom (V)	3.7	T (°C)	-20	5785.01218	5785	0.01218	-2.1054
		T (°C)	-10	5785.01624	5785	0.01624	-2.8073
		T (°C)	0	5785.01630	5785	0.01630	-2.8176
		T (°C)	10	5785.01602	5785	0.01602	-2.7692
		T (°C)	20	5785.02247	5785	0.02247	-3.8842
		T (°C)	30	5785.01750	5785	0.01750	-3.0251
		T (°C)	40	5785.01915	5785	0.01915	-3.3103
		T (°C)	50	5785.01849	5785	0.01849	-3.1962
		T (°C)	60	5785.01855	5785	0.01855	-3.2066
		T (°C)	70	5785.01864	5785	0.01864	-3.2221
Limits				± 20 ppm			
Result				Complies			

Voltage vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5825MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
T nom (°C)	20	V nom (V)	3.70	5825.01543	5825	0.01543	-2.6489
		V max (V)	4.26	5825.01322	5825	0.01322	-2.2695
		V min (V)	3.15	5825.01348	5825	0.01348	-2.3142
Limits				± 20 ppm			
Result				Complies			

Temperature vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5825MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
V nom (V)	3.7	T (°C)	-20	5825.01441	5825	0.01441	-2.4738
		T (°C)	-10	5825.01322	5825	0.01322	-2.2695
		T (°C)	0	5825.01148	5825	0.01148	-1.9708
		T (°C)	10	5825.01324	5825	0.01324	-2.2730
		T (°C)	20	5825.01543	5825	0.01543	-2.6489
		T (°C)	30	5825.01742	5825	0.01742	-2.9906
		T (°C)	40	5825.01234	5825	0.01234	-2.1185
		T (°C)	50	5825.01287	5825	0.01287	-2.2094
		T (°C)	60	5825.01425	5825	0.01425	-2.4464
		T (°C)	70	5825.01456	5825	0.01456	-2.4996
Limits				± 20 ppm			
Result				Complies			

11. ANTENNA REQUIREMENT

11.1 STANDARD REQUIREMENT

15.203 requirement: For intentional device, according to 15.203: an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

11.2 EUT ANTENNA

The EUT antenna is permanent attached FPCB antenna. It comply with the standard requirement.

END OF REPORT