



Test Report - FCC Part 90

Applicant: Rockwell Collins Inc.

Approved for Release By:

Signature: Bruno Clavier

Name & Title: Bruno Clavier, General Manager

Date of Signature 1/27/2023

This test report shall not be reproduced except in full without the written and signed permission of Timco Engineering Inc. (IIA). This test report relates only to the items tested as identified and is not valid for any subsequent changes or modifications made to the equipment under test.



Table of Contents

1.	CLASS 2 PERMISSIVE CHANGE FOR FCC ID: AJKPN822-0990	3
2.	CHANGES.....	3
2.1	PART 87 TEST RESULT SUMMARY	4
3.	LOCATION OF TESTING	5
3.1	TEST LABORATORY	5
3.1	TESTING WAS PERFORMED, REVIEWED BY	5
4.	TEST SAMPLE(S) (EUT/DUT)	6
4.1	DESCRIPTION OF THE EUT	6
4.2	CONFIGURATION OF EUT	7
4.3	TEST SETUP OF EUT	7
5.	TEST METHODS & APPLICABLE REGULATORY LIMITS.....	8
5.1	TEST METHODS/STANDARDS/GUIDANCE:	8
5.2	APPLIED LIMITS AND REGULATORY LIMITS:.....	8
6.	MEASUREMENT UNCERTAINTY.....	8
7.	ENVIRONMENTAL CONDITIONS	8
7.1	TEMPERATURE & HUMIDITY.....	8
8.	LIST OF TEST EQUIPMENT AND TEST FACILITY.....	9
8.1	LIST OF TEST EQUIPMENT	9
9.	TEST RESULTS	10
9.1	BANDWIDTH & EMISSION	11
9.1.1	99% Bandwidth Plot, 11 MHz	12
9.2	EMISSION LIMITATIONS, IN-BAND.....	13
9.2.1	Emission Mask, 11 MHz.....	14
10.	ANNEX-A - PHOTOGRAPHS OF THE EUT.....	15
11.	ANNEX-B – TEST SETUP PHOTOGRAPHS.....	15
12.	HISTORY OF TEST REPORT CHANGES.....	15



Timco Engineering, Inc., an IIA Company
849 NW State Road 45, Newberry, Florida 32669
(352) 472-5500 / testing@timcoengr.com

CUSTOMER INFORMATION

Applicant: Rockwell Collins Inc.
Address: 870 Winter Street,
Waltham, Massachusetts, 02451, United States

1. Class 2 Permissive Change for FCC ID: AJKPN822-0990

To whom it may concern:

We Rockwell Collins Inc., hereby declare that we are applying for a C2PC to our FCC ID: AJKPN822-0990. The differences between this application and original application is clarified in following pages.

We confirm that there is nothing changed to RF related part and assessment that do not degrade the RF characteristics reported by the manufacture

2. Changes

Several Grants have been obtained with the same emission designators as listed below:

Timeline Summary of Collins Air-transport HF radio licenses for HF products developed in Melbourne, FL over the past 28 years.

(1994) HFS-900 FCC Grant of equipment authorization – (FCC ID = AJKPN822-0330)
(1997) HFS-900D FCC Type Acceptance Application
(1997) HFS-900D FCC Type Acceptance Application – General information – Exhibit C (technical description)
(1998) HFS-900D FCC Grant of equipment authorization – (FCC ID = AJKPN822-0990)
(2011) HFS-2200 FCC Grant of equipment authorization - (FCC ID = AJFPN822-2764)
(2018) HFS-2100 FCC Grant of equipment authorization – (FCC ID = AJK8223334)

In 1998 the Emission designator **J3E** was changed to **J3N** incorrectly and went unnoticed. The following testing is to show compliance to and to add the J3E designator to the grant.



2.1 Part 87 Test Result Summary

The following test procedure and guidance were used for measuring FCC PART 87 known as Licensed Land Mobile; ANSI C63.26-2015. Full test results are available in this report.

Applicable Clauses from Part 2		
FCC Clauses	Description of the requirements	Result: (Pass, Fail, N/A)
2.202	Bandwidth & Emission	Pass
2.1049	Occupied Bandwidth	Pass

Applicable Clauses from Part 90		
FCC Clauses	Description of the requirements	Result: (Pass, Fail, N/A)
87.135	Emission designator	Reported
85.137	Bandwidth limitations	Pass
87.139	Emission masks, In-band	Pass

No additions to the test methods were needed. There were no deviations, or exclusions from the test methods. No test results are from external providers or from the customer. The test results relate only to the items tested. Timco does not offer opinions and interpretations, only a pass/fail statement.



Timco Engineering, Inc., an IIA Company
849 NW State Road 45, Newberry, Florida 32669
(352) 472-5500 / testing@timcoengr.com

3. Location of Testing

3.1 Test Laboratory

Timco Engineering Inc. is a subsidiary of Industrial Inspection & Analysis, Inc. ("IIA").

Testing was performed at Timco's permanent laboratory located at 849 NW State Road 45, Newberry, Florida 32669

FCC test firm # 578780

FCC Designation # US1070

FCC site registration is under A2LA certificate # 0955.01

ISED Canada test site registration # 2056A

EU Notified Body # 1177

For all designations see A2LA scope # 0955.01

3.1 Testing was performed, reviewed by

Dates of Testing: 1/16/2023

Signature:

Sr. EMC Engineer
EMC-003838-NE



Name & Title:

Tim Royer, EMC Engineer

Date of Signature

1/27/2023



4. Test Sample(s) (EUT/DUT)

The test sample was received: 1/16/2023

4.1 Description of the EUT

A description as well as unambiguous identification of the EUT(s) tested. Where more than one sample is required for technical reasons (such as the use of connected units for the purpose of conducted output power testing where the product units will have integral antennas), each specific test shall identify which unit was tested.

Identification	
FCC ID:	AJKPN822-0990
Brief Description	HF Aviation Transceiver
Model(s) #	HFS-900D

Technical Characteristics	
Frequency Range	11MHz
Modulation	J3E
Bandwidth & Emission Class	1.5kHz
Number of Channels	1
Antenna Connector	N

Antenna Characteristics			
Antenna	Frequency Range	Mode / BW	Antenna Gain
1	n/a	n/a	0 dBi

- Note: Information such as antenna gain, firmware/software numbers are provided by manufacturer and cannot be validated by the test lab.



4.2 Configuration of EUT

Test Modes				
Mode (#)	Mode (Type)	Test Frequencies (MHz)	BW (nominal) (kHz)	Emission Designator
1	Transmit	11	1.5	2K80J3E

Operating conditions during Testing:

The device was operated without the provided antenna(s).

No other modifications of the device under test (including firmware, specific software settings, and input/output signal levels to the EUT) were made.

Peripherals used during Testing:

No peripherals used.

4.3 Test Setup of EUT

Equipment, antenna, and cable arrangement. The setup of the equipment and cable or wire placement on the test site that produces the highest radiated and the highest ac power line conducted emissions shall be shown clearly and described. Information on the orientation of portable equipment during testing shall be included. Drawings or photographs may be used for this purpose.

Test Setups are included in the test report.



5. Test methods & Applicable Regulatory Limits

5.1 Test methods/Standards/Guidance:

Test procedures and guidance for measuring Licensed Part 87 Licensed device:

- 1) ANSI C63.26-2015

5.2 Applied Limits and Regulatory Limits:

- 1) FCC CFR 47 Part 87

6. Measurement Uncertainty

Parameter	Uncertainty (dB)
Conducted Emissions	± 3.14 dB
Radiated Emissions (9kHz – 30 MHz)	± 3.08 dB
Radiated Emissions (30 – 200 MHz)	± 2.16 dB
Radiated Emissions (200 – 1000 MHz)	± 2.15 dB
Radiated Emissions (1 GHz – 18 GHz)	± 2.14 dB
Radiated Emissions (18 GHz – 40 GHz)	± 2.31 dB
Note: The uncertainties provided in this table represent an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of K=2.	

7. Environmental Conditions

7.1 Temperature & Humidity

Measurements performed at the test site did not exceed the following:

Parameter	Measurement
Temperature	23 C +/- 5%
Humidity	55% +/- 5%
Barometric Pressure	30.05 in Hg
Note: Specific environmental conditions that are applicable to a specific test are available in the test result section.	



8. List of Test Equipment and Test Facility

The test equipment used identified by type, manufacturer, serial number, or other identification and the date on which the next calibration or service check is due.

Description of the firmware or software used to operate EUT for testing purposes.

A complete list of all test equipment used shall be included with the test report. The manufacturer's model and serial numbers, and date of last calibration, and calibration interval shall be included. Measurement cable loss, measuring instrument bandwidth and detector function, video bandwidth, if appropriate, and antenna factors shall also be included where applicable.

8.1 List of Test Equipment

Test Equipment						
Type	Device	Manufacturer	Model	SN#	Current Cal	Cal Due
Receiver	EMI Test Receiver R&S ESU 40	Rohde & Schwarz	ESU 40	100320	5/27/21	5/26/2024

Software			
Software	Author	Version	Validation on
ESU Firmware	Rohde & Schwarz	4.43 SP3; BIOS v5.1-24-3	2018
RSCcommander	Rohde & Schwarz	1.6.4	2014
ScopeExplorer	LeCroy	v2.25.0.0	2009
Field Strength	Timco	v4.10.7.0	2016



9. Test Results

The results of the test are usually indicated in the form of tables, spectrum analyzer plots, charts, sample calculations, as appropriate for each test procedure.

A description and/or a block diagram of the test setup is usually provided.

The measurement results, along with the appropriate limits for comparison, may be presented in tabular or graphical form. In addition, any variation in the measurement environment may be reported if applicable (e.g., a significant change of temperature that could affect the cable loss and amplifier response).

Unless noted otherwise in the referenced standard, the measurements of **ac power-line conducted emissions and conducted power output** will be reported in units of dB μ V. Unless noted otherwise in the referenced standard, the measurements of **radiated emissions** will be reported in units of decibels, referenced to one microvolt per meter (dB μ V/m) for electric fields, or to one ampere per meter (dBA/m) for magnetic fields, at the distance specified in the appropriate standards or requirements. The measurements of antenna-conducted power for receivers may be reported in units of dB μ V if the impedance of the measuring instrument is also reported. Otherwise, antenna-conducted power will be reported in units of decibels referenced to one milliwatt (dBm). All formulas for data conversions and conversion factors, if used, will be included in this measurement report.

Example:


Freq (MHz)	Meter Reading	+ ACF	+CL	= FS
33	20 dB μ V	+ 10.36 dB/m	+0.40 dB	=30.36 dB μ V/m @ 3m

$EIRP = P_{cond} \text{ (dBm)} + dBi$



9.1 Bandwidth & Emission

Limits from FCC Parts 2.1049, 87.135 and 87.137, and test procedure from ANSI C63.26-2015.

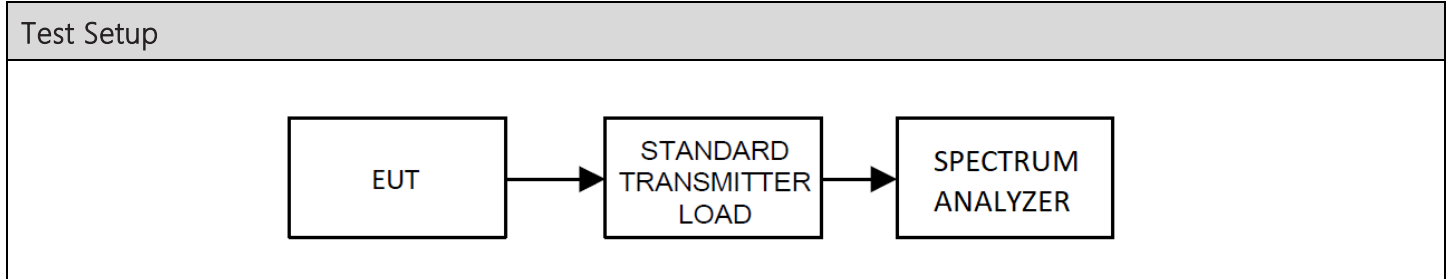


Test Results, Authorized Bandwidth		
Rule Part	Operating Range (MHz)	Authorized Bandwidth (kHz)
Part 87	11	3

Test Results, Occupied Bandwidth				
Tuned Frequency (MHz)	Mode	Emission Designator	Occupied Bandwidth (kHz)	Bandwidth Type
11	1	J3E	1.5	99%

Occupied Bandwidth, Spectrum Plots

9.1.1 99% Bandwidth Plot, 11 MHz

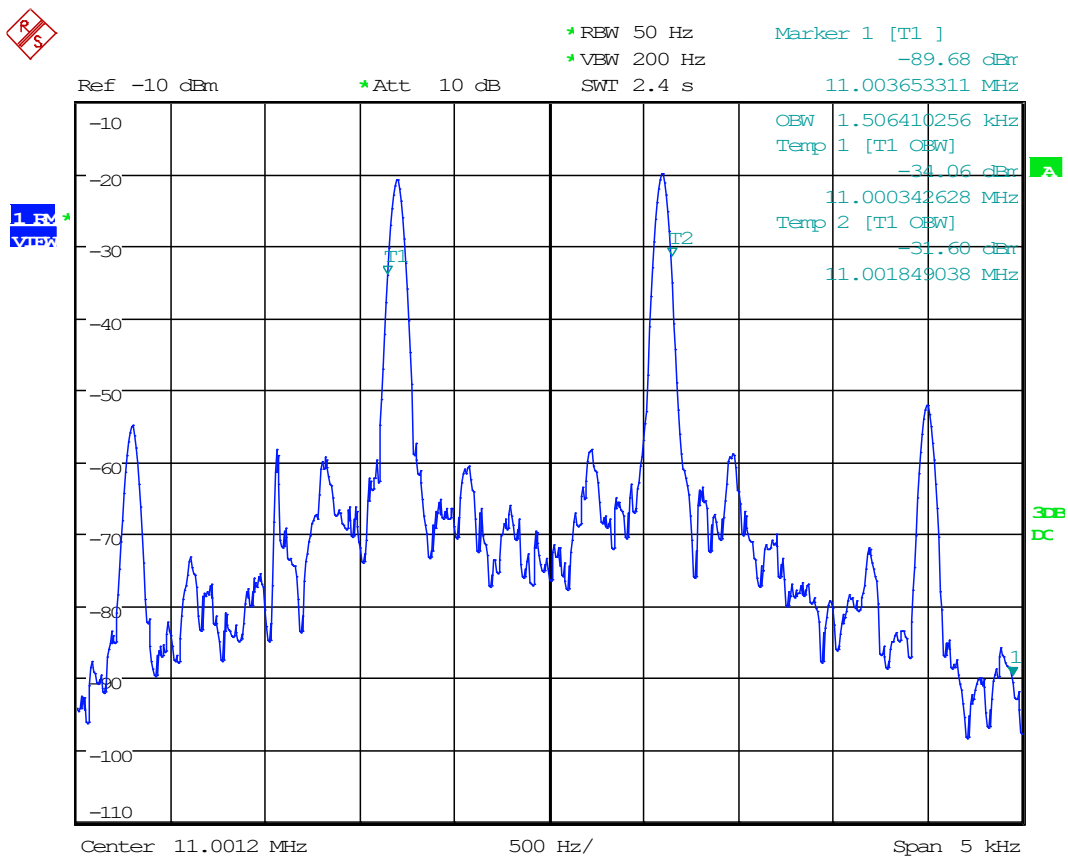

Date: 16.JAN.2023 11:43:17




Timco Engineering, Inc., an IIA Company
849 NW State Road 45, Newberry, Florida 32669
(352) 472-5500 / testing@timcoengr.com

9.2 Emission Limitations, In-Band

Limits from FCC Parts 2.1049 and 87.139; and test procedure from ANSI C63.26-2015.


Conducted Test Setup





Conducted Emissions Mask, Spectrum Plots

9.2.1 Emission Mask, 11 MHz

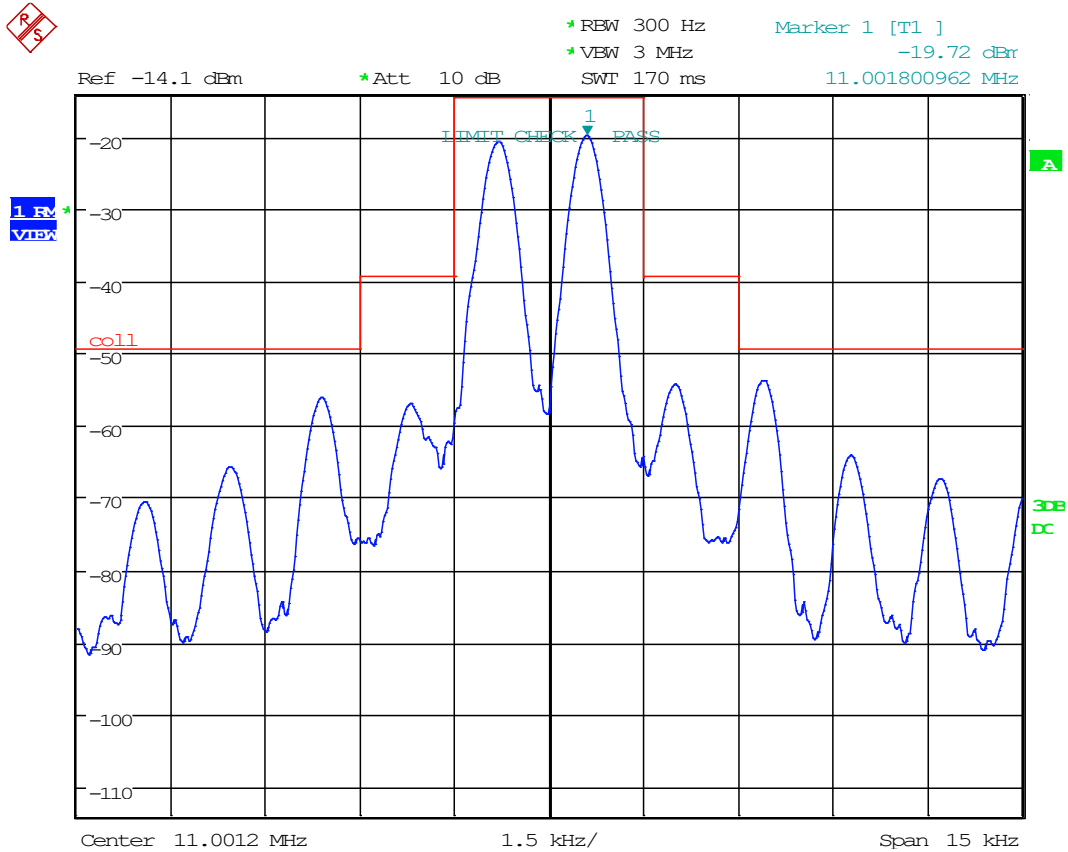

Date: 16.JAN.2023 11:55:19



Timco Engineering, Inc., an IIA Company
849 NW State Road 45, Newberry, Florida 32669
(352) 472-5500 / testing@timcoengr.com

10. ANNEX-A - Photographs of the EUT

Photographs of the EUT and any manufacturer supplied accessories to be used with the EUT are in separate supplementary documents labelled EXTERNAL PHOTOS and INTERNAL PHOTOS.

11. ANNEX-B – Test Setup Photographs

Test setup photographs are located in a separate supplementary ANNEX-B document.

12. History of Test Report Changes

Test Report #	Revision #	Description	Date of Issue
TR_TR_6136-23_FCC 87 C2PC_1_	1	Initial release	1/20/2023



Timco Engineering, Inc., an IIA Company
849 NW State Road 45, Newberry, Florida 32669
(352) 472-5500 / testing@timcoengr.com

END OF TEST REPORT
