



FCC RF Test Report

APPLICANT : Espressif Systems (Shanghai) Co.,Ltd.
EQUIPMENT : 2.4GHz Wi-Fi & BT IoT Module
BRAND NAME : ESPRESSIF
MODEL NAME : ESP32-C6-MINI-1
FCC ID : 2AC7Z-ESPC6MINI1
STANDARD : 47 CFR Part 15 Subpart C §15.247
CLASSIFICATION : (DTS) Digital Transmission System
TEST DATE(S) : May 26, 2023 ~ Aug. 29, 2023

We, Sporton International Inc. (Kunshan), would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. (Kunshan), the test report shall not be reproduced except in full.

Jason Jia

Approved by: Jason Jia



Sporton International Inc. (Kunshan)

**No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300
People's Republic of China**



TABLE OF CONTENTS

1	GENERAL DESCRIPTION.....	5
1.1	Applicant.....	5
1.2	Manufacturer.....	5
1.3	Product Feature of Equipment Under Test.....	5
1.4	Product Specification of Equipment Under Test.....	5
1.5	Modification of EUT	5
1.6	Testing Location	6
1.7	Test Software.....	6
1.8	Applicable Standards.....	6
2	TEST CONFIGURATION OF EQUIPMENT UNDER TEST.....	7
2.1	Carrier Frequency Channel	7
2.2	Test Mode.....	7
2.3	Connection Diagram of Test System.....	8
2.4	Support Unit used in test configuration and system	9
2.5	EUT Operation Test Setup	9
2.6	Measurement Results Explanation Example.....	9
3	TEST RESULT	10
3.1	6dB and 99% Bandwidth Measurement	10
3.2	Peak Output Power Measurement	15
3.3	Power Spectral Density Measurement	16
3.4	Conducted Band Edges and Spurious Emission Measurement	21
3.5	Spurious Emission Measurement in the Restricted Band	28
3.6	AC Conducted Emission Measurement.....	31
3.7	Antenna Requirements.....	33
4	LIST OF MEASURING EQUIPMENT.....	34
5	UNCERTAINTY OF EVALUATION.....	35
APPENDIX A. CONDUCTED TEST RESULTS		
APPENDIX B. AC CONDUCTED EMISSION TEST RESULT		
APPENDIX C. RADIATED SPURIOUS EMISSION		
APPENDIX D. DUTY CYCLE PLOTS		
APPENDIX E. SETUP PHOTOGRAPHS		



REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FR330803C	Rev. 01	Initial issue of report	Sep. 01, 2023

SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.1	15.247(a)(2)	6dB Bandwidth	$\geq 0.5\text{MHz}$	Pass	-
3.1	-	99% Bandwidth	-	Pass	-
3.2	15.247(b)(3)	Peak Output Power	$\leq 30\text{dBm}$	Pass	-
3.3	15.247(e)	Power Spectral Density	$\leq 8\text{dBm}/3\text{kHz}$	Pass	-
3.4	15.247(d)	Conducted Band Edges and Spurious Emission	$\leq 20\text{dBc}$	Pass	-
3.5	15.247(d)	Radiated Band Edges and Spurious Emission	15.209(a) & 15.247(d)	Pass	Under limit 1.82 dB at 2483.500 MHz
3.6	15.207	AC Conducted Emission	15.207(a)	Pass	Under limit 9.03 dB at 0.499 MHz
3.7	15.203 & 15.247(b)	Antenna Requirement	N/A	Pass	-

Declaration of Conformity:

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.

Comments and Explanations:

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.



1 General Description

1.1 Applicant

Espressif Systems (Shanghai) Co.,Ltd.

Suite 204, Block 2, 690 Bibo Road, Zhang Jiang Hi-Tech Park, Shanghai, China

1.2 Manufacturer

Espressif Systems (Shanghai) Co.,Ltd.

Suite 204, Block 2, 690 Bibo Road, Zhang Jiang Hi-Tech Park, Shanghai, China

1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	2.4GHz Wi-Fi & BT IoT Module
Brand Name	ESPRESSIF
Model Name	ESP32-C6-MINI-1
FCC ID	2AC7Z-ESPC6MINI1
SN Code	Conducted: 404cca400f68 Conduction: 404cca400f28 Radiation: 404cca400edc
HW Version	V1.0
SW Version	v1.1.3.4
EUT Stage	Identical Prototype

Remark: The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

1.4 Product Specification of Equipment Under Test

Standards-related Product Specification	
Tx/Rx Frequency Range	2405 MHz ~ 2480 MHz
Number of Channels	16
Channel Spacing	5 MHz
Carrier Frequency of Each Channel	2405 MHz, 2410MHz, ..., 2480MHz
Maximum Output Power to Antenna	ZigBee: 20.05 dBm (0.1012 W) Thread: 6.84 dBm (0.0048 W)
Antenna Type / Gain	PCB Antenna type with gain 3.96 dBi
Type of Modulation	O-QPSK

Note: For Thread & ZigBee mode, the whole testing has assessed only ZigBee mode by referring to their higher conducted power.

1.5 Modification of EUT

No modifications are made to the EUT during all test items.



1.6 Testing Location

Sporton International Inc. (Kunshan) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.02.

Test Firm	Sporton International Inc. (Kunshan)		
Test Site Location	No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300 People's Republic of China TEL : +86-512-57900158		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	CO01-KS 03CH05-KS TH01-KS	CN1257	314309

1.7 Test Software

Item	Site	Manufacturer	Name	Version
1.	TH01-KS	SPORTON	FCC 15C-15E Test Tools Ver10.0_210607	10.0
2.	03CH05-KS	AUDIX	E3	6.2009-8-24a1
3.	CO01-KS	AUDIX	E3	6.2009-8-24

1.8 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- 47 CFR Part 15 Subpart C §15.247
- FCC KDB 558074 D01 15.247 Meas Guidance v05
- ANSI C63.10-2013

Remark: All test items were verified and recorded according to the standards and without any deviation during the test.

2 Test Configuration of Equipment Under Test

2.1 Carrier Frequency Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
2400-2483.5 MHz	11	2405	19	2445
	12	2410	20	2450
	13	2415	21	2455
	14	2420	22	2460
	15	2425	23	2465
	16	2430	24	2470
	17	2435	25	2475
	18	2440	26	2480

2.2 Test Mode

- The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction (150 kHz to 30 MHz), radiation (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). Pre-scanned tests, X, Y, Z in three orthogonal panels to determine the final configuration (X plane as worst plane) from all possible combinations.
- AC power line Conducted Emission was tested under maximum output power.


The following summary table is showing all test modes to demonstrate in compliance with the standard.

Summary table of Test Cases	
Test Item	Data Rate / Modulation
	250kbps / Zigbee
Conducted TCs	Mode 1: Zigbee Tx CH11_2405 MHz Mode 2: Zigbee Tx CH18_2440 MHz Mode 3: Zigbee Tx CH25_2475 MHz Mode 4: Zigbee Tx CH26_2480 MHz
Radiated TCs	Mode 1: Zigbee Tx CH11_2405 MHz Mode 2: Zigbee Tx CH18_2440 MHz Mode 3: Zigbee Tx CH25_2475 MHz Mode 4: Zigbee Tx CH26_2480 MHz
AC Conducted Emission	Mode 1: Thread TX + WLAN Link(2.4G) + charging from test Jig Mode 2: Zigbee TX + WLAN Link(2.4G) + charging from test Jig


Note: The worst case of conducted emission is mode 1; only the test data of it was reported.

2.3 Connection Diagram of Test System

AC Conducted Emission:

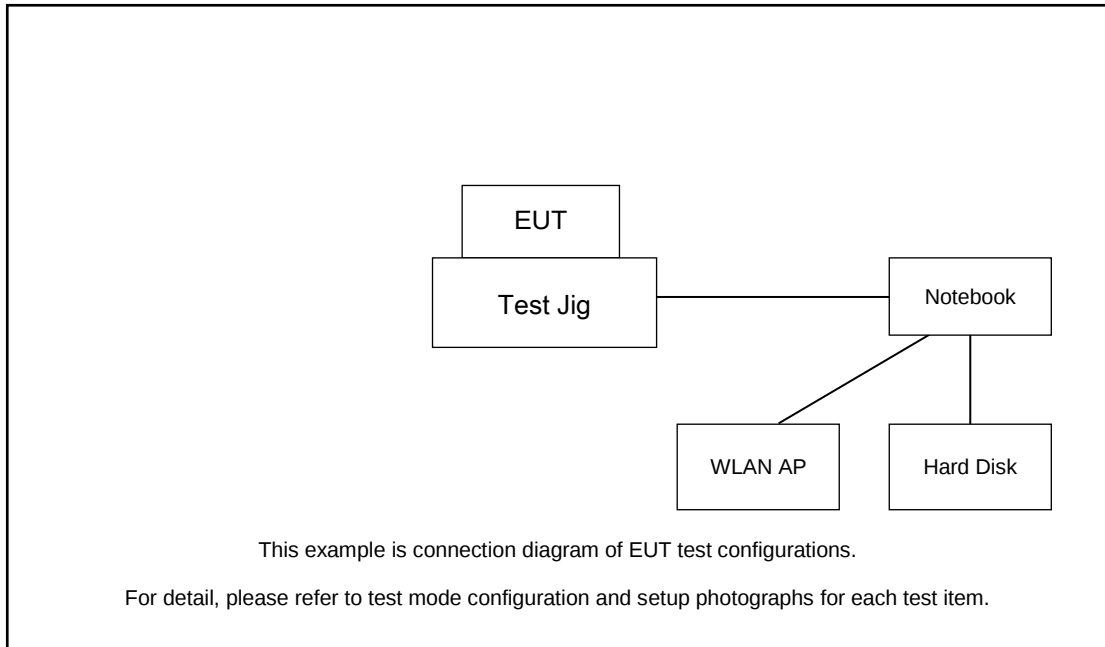

Radiated Emission:

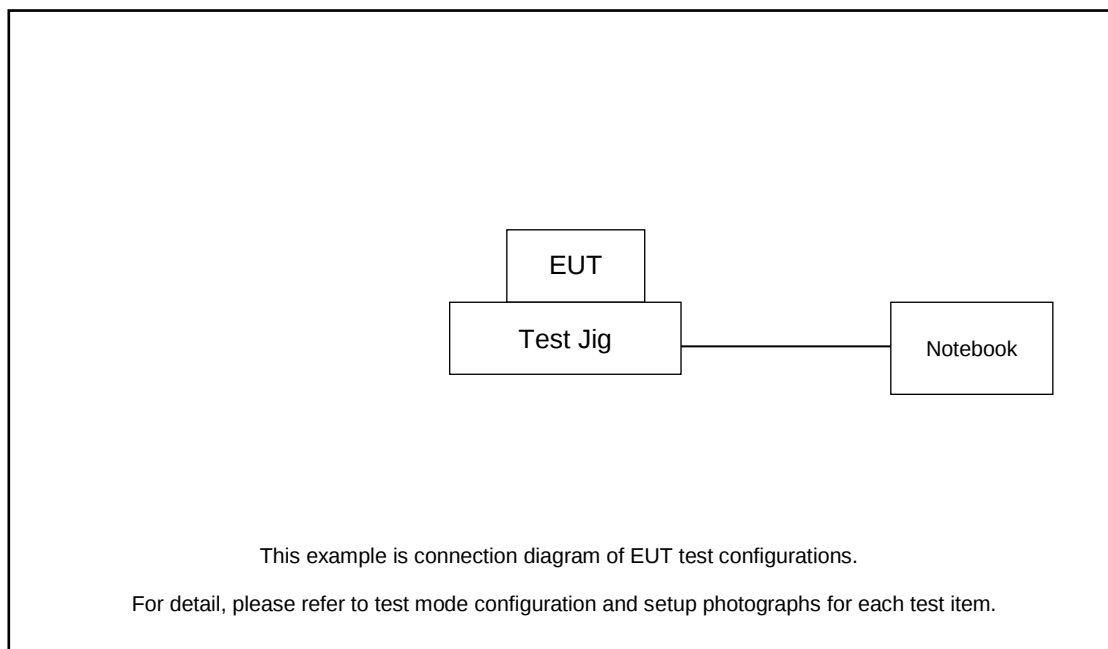

2.4 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	Notebook	Lenovo	G480	QDS-BRCM1050I	N/A	shielded cable DC O/P 1.8m , Unshielded AC I/P cable 1.8m
2.	WLAN AP	D-link	DIR-655	KA21R655B1	N/A	Unshielded,1.8m
3.	Hard DISK	WD	C6B	N/A	N/A	N/A
4.	Test Jig	N/A	N/A	N/A	N/A	N/A

2.5 EUT Operation Test Setup

For Zigbee function, the engineering test program was provided and enabled to make EUT continuous transmit.

2.6 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example :

The spectrum analyzer offset is derived from RF cable loss.

Offset = RF cable loss.

Following shows an offset computation example with cable loss 5.80 dB.

$$\begin{aligned}\text{Offset(dB)} &= \text{RF cable loss(dB)}. \\ &= 5.80(\text{dB})\end{aligned}$$

3 Test Result

3.1 6dB and 99% Bandwidth Measurement

3.1.1 Limit of 6dB and 99% Bandwidth

The minimum 6 dB bandwidth shall be at least 500 kHz.


3.1.2 Measuring Instruments

The section 4.0 of List of Measuring Equipment of this test report is used for test.

3.1.3 Test Procedures

1. The testing follows ANSI C63.10-2013 clause 11.8
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. Set the Video bandwidth (VBW) = 300 kHz. In order to make an accurate measurement. The 6 dB bandwidth must be greater than 500 kHz.
5. For 99% Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) is set 30kHz and set the Video bandwidth (VBW) = 100kHz.
6. Measure and record the results in the test report.


3.1.4 Test Setup

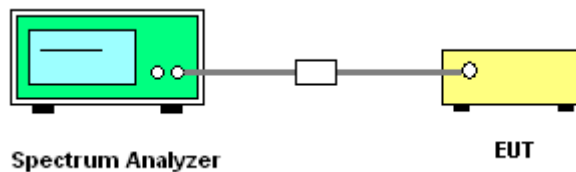

3.1.5 Test Result of 6dB Bandwidth


Test data refer to Appendix A.

6 dB Bandwidth Plot on Channel 11

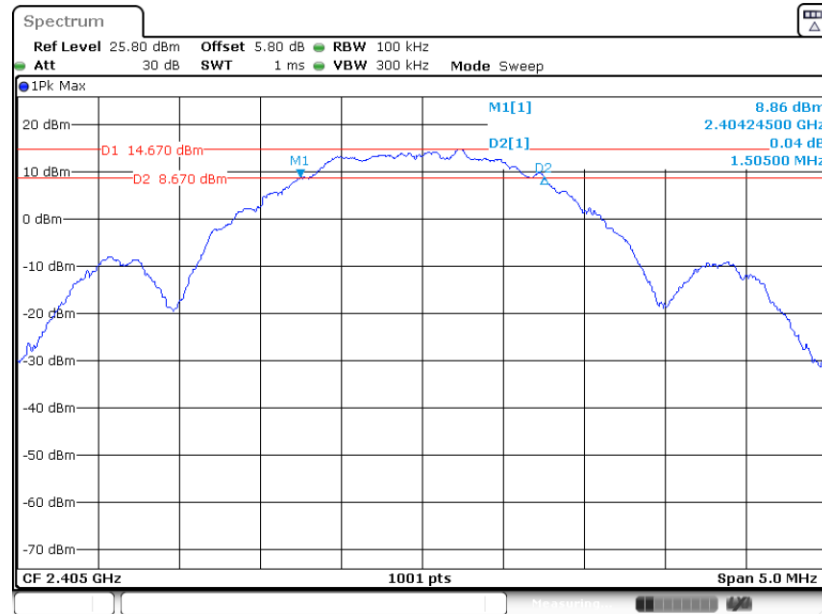

Date: 28.AUG.2023 08:48:55


6 dB Bandwidth Plot on Channel 18

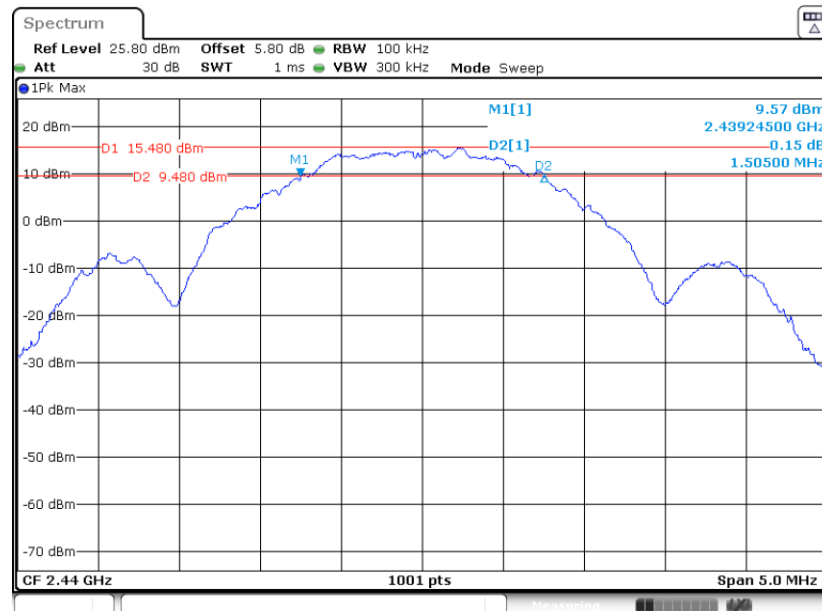

Date: 28.AUG.2023 08:55:05




6 dB Bandwidth Plot on Channel 25

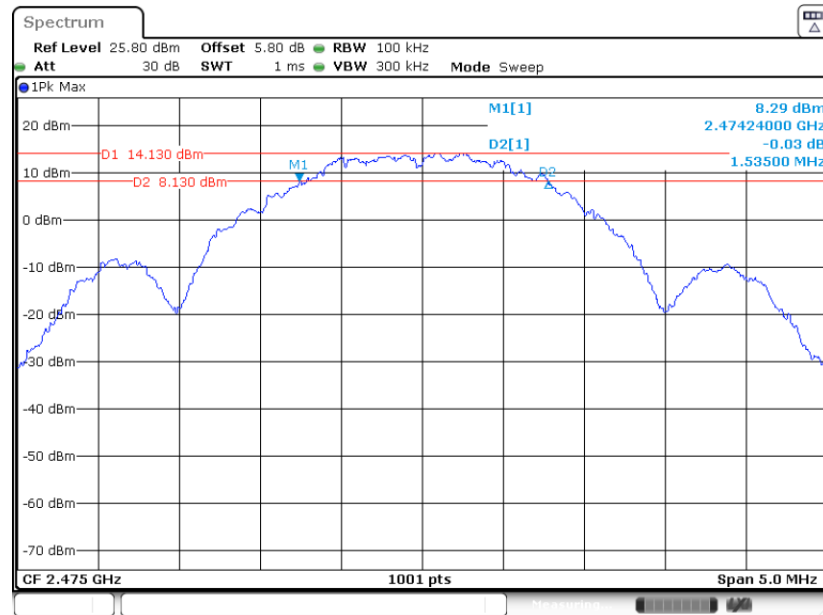

Date: 29.AUG.2023 10:22:08

6 dB Bandwidth Plot on Channel 26

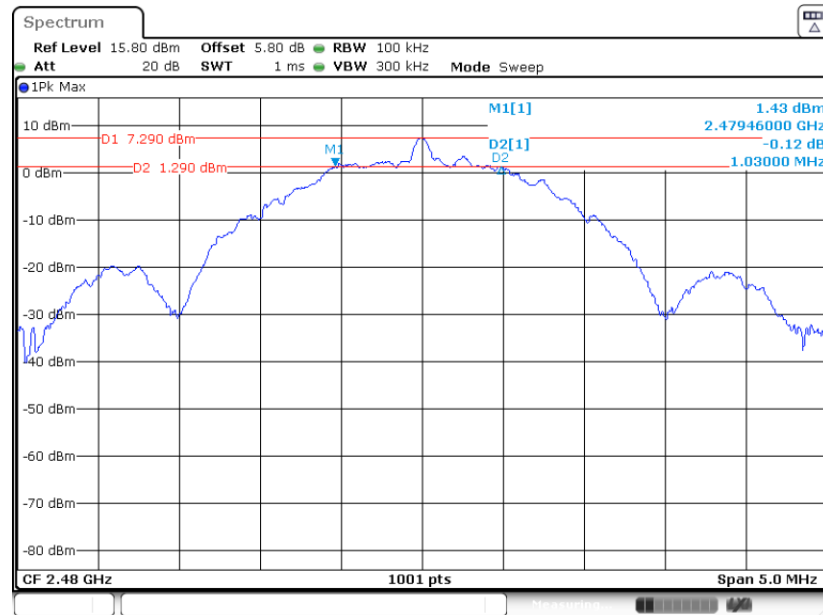


Date: 26.MAY.2023 09:50:44



3.1.6 Test Result of 99% Occupied Bandwidth


Test data refer to Appendix A.

99% Bandwidth Plot on Channel 11

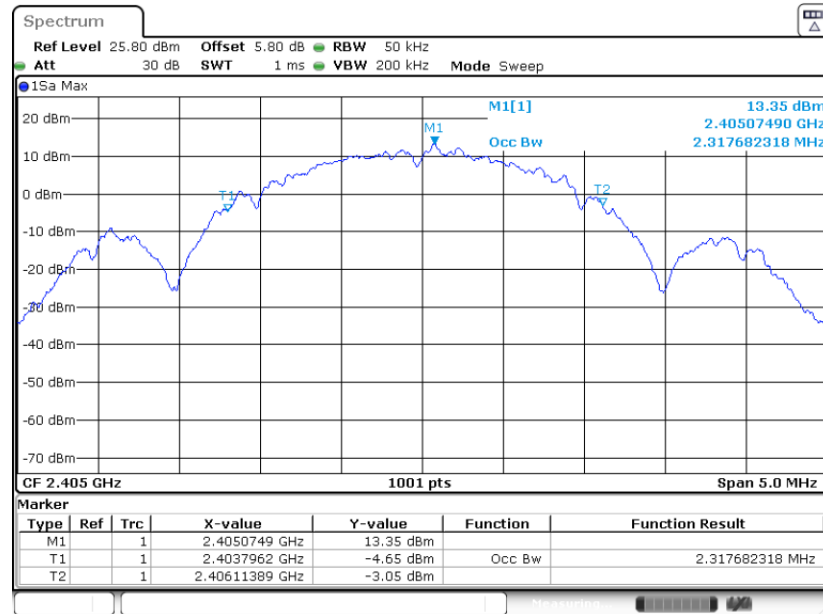

Date: 28.AUG.2023 08:53:32


99% Occupied Bandwidth Plot on Channel 18

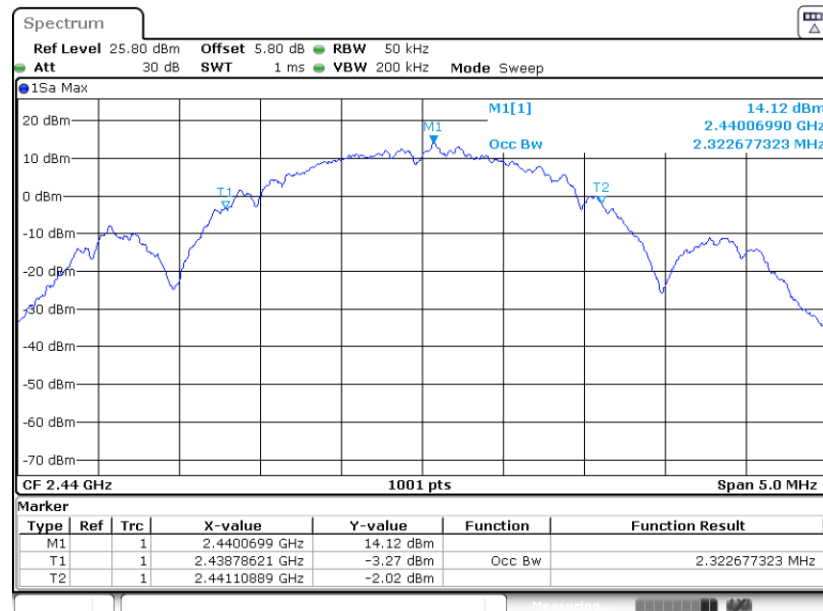


Date: 28.AUG.2023 08:57:52



99% Occupied Bandwidth Plot on Channel 26

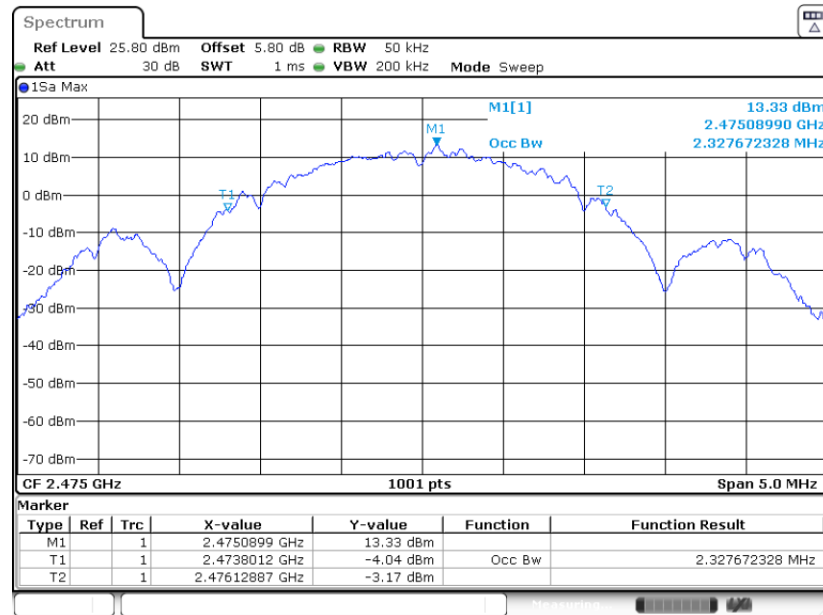

99% Occupied Bandwidth Plot on Channel 26

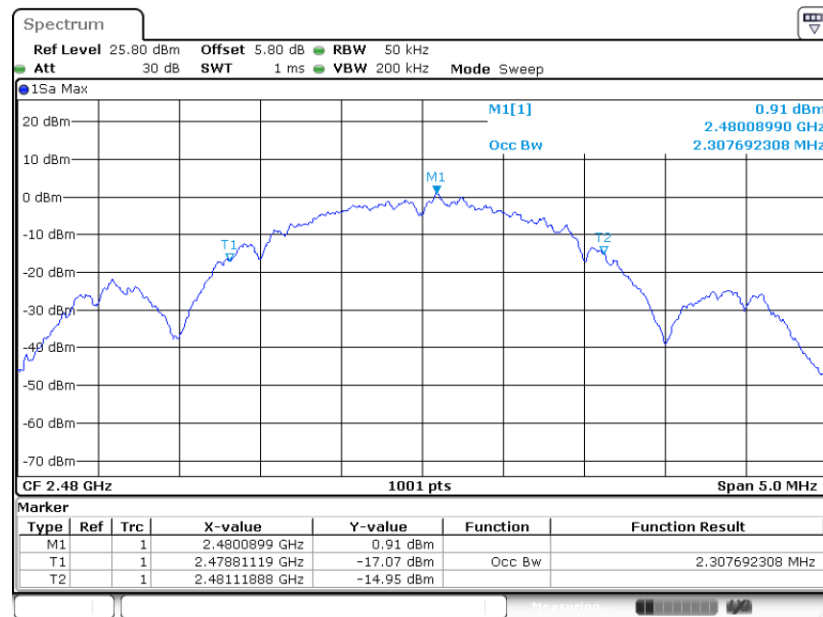

Note : The occupied channel bandwidth is maintained within the band of operation for all of the modulations.

3.2 Peak Output Power Measurement

3.2.1 Limit of Peak Output Power

For systems using digital modulation in the 2400-2483.5MHz, the limit for peak output power is 30dBm. If transmitting antenna of directional gain greater than 6dBi is used, the peak output power from the intentional radiator shall be reduced below the above stated value by the amount in dB that the directional gain of the antenna exceeds 6 dBi. In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi.


3.2.2 Measuring Instruments

The section 4.0 of List of Measuring Equipment of this test report is used for test.

3.2.3 Test Procedures

1. The testing follows the Measurement Procedure of ANSI C63.10-2013 clause 11.9.1.3 PKPM1 Peak power meter or ANSI C63.10-2013 clause 11.9.2.3.1 Method AVGPM method.
2. The RF output of EUT was connected to the power meter by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Measure the conducted output power and record the results in the test report.

3.2.4 Test Setup

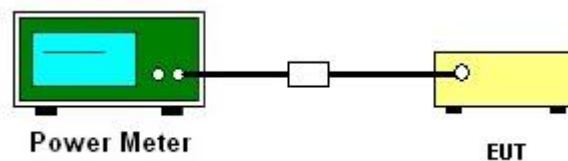

3.2.5 Test Result of Peak Output Power

Test data refers to Appendix A.

3.2.6 Test Result of Average Output Power (Reporting Only)

Test data refers to Appendix A.

3.3 Power Spectral Density Measurement

3.3.1 Limit of Power Spectral Density

The peak power spectral density shall not be greater than 8dBm in any 3kHz band at any time interval of continuous transmission.


3.3.2 Measuring Instruments

The section 4.0 of List of Measuring Equipment of this test report is used for test.

3.3.3 Test Procedures

1. The testing follows Measurement Procedure of ANSI C63.10-2013 clause 11.10.2 Method PKPSD.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 3 kHz. Video bandwidth VBW = 10 kHz In order to make an accurate measurement, set the span to 1.5 times DTS Channel Bandwidth. (6dB BW)
5. Detector = peak, Sweep time = auto couple, Trace mode = max hold, Allow trace to fully stabilize. Use the peak marker function to determine the maximum power level.
6. Measure and record the results in the test report.
7. The Measured power density (dBm)/ 100kHz is a reference level and used as 20dBc down limit line for Conducted Band Edges and Conducted Spurious Emission.

3.3.4 Test Setup

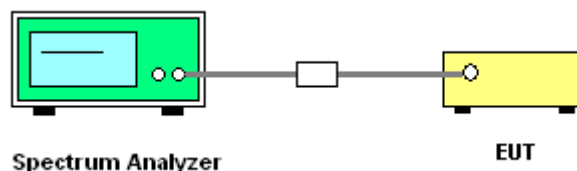


3.3.5 Test Result of Power Spectral Density

Test data refers to Appendix A.


3.3.6 Test Result of Power Spectral Density Plots (100kHz)

PSD 100kHz Plot on Channel 11

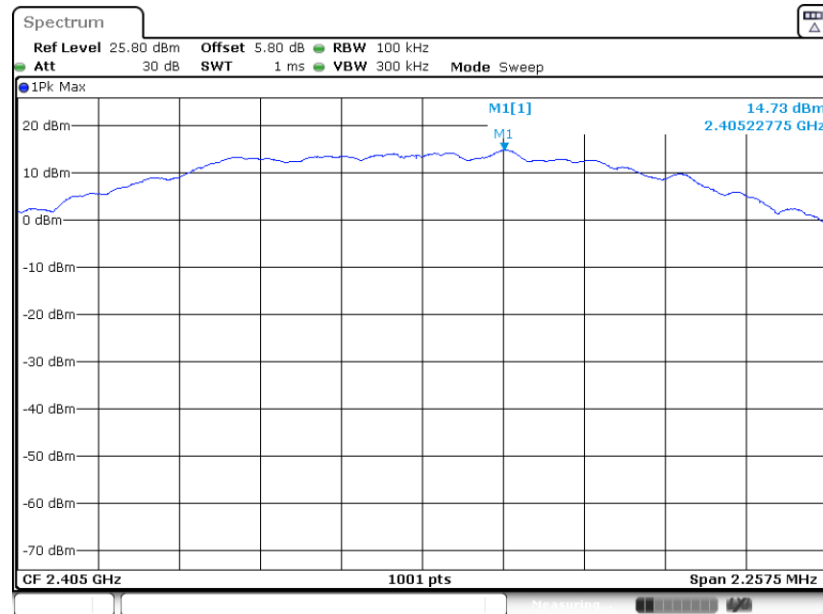

Date: 28.AUG.2023 08:49:33


PSD 100kHz Plot on Channel 18

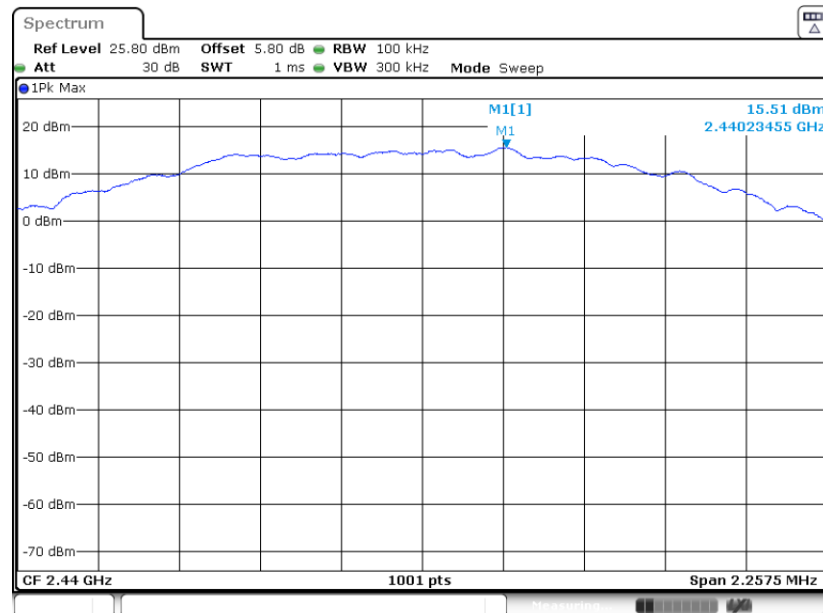

Date: 28.AUG.2023 08:55:43




PSD 100kHz Plot on Channel 25

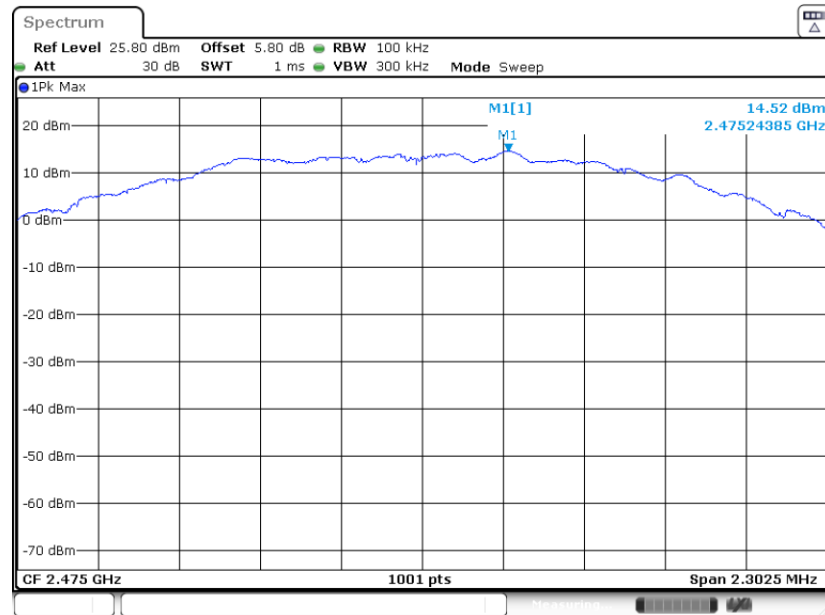

Date: 29.AUG.2023 10:22:46

PSD 100kHz Plot on Channel 26

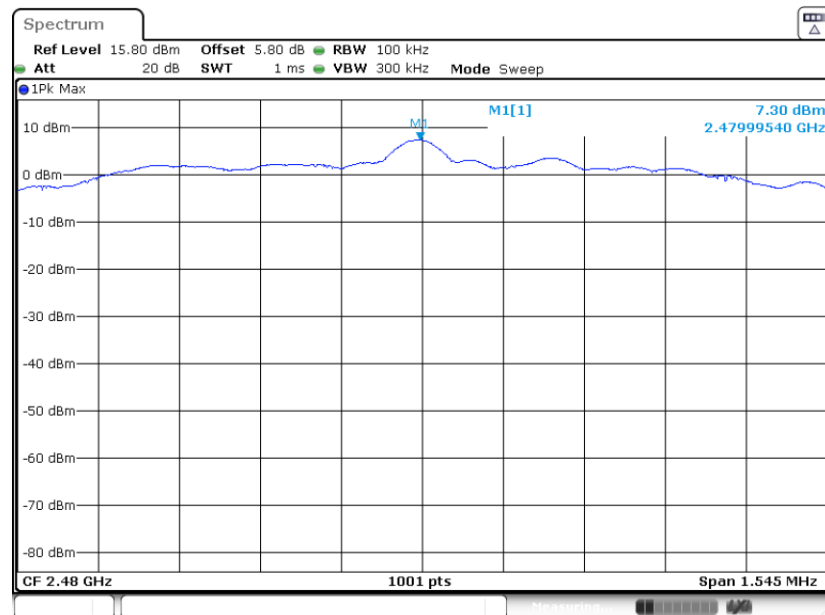


Date: 26.MAY.2023 09:51:25




3.3.7 Test Result of Power Spectral Density Plots (3kHz)

PSD 3kHz Plot on Channel 11

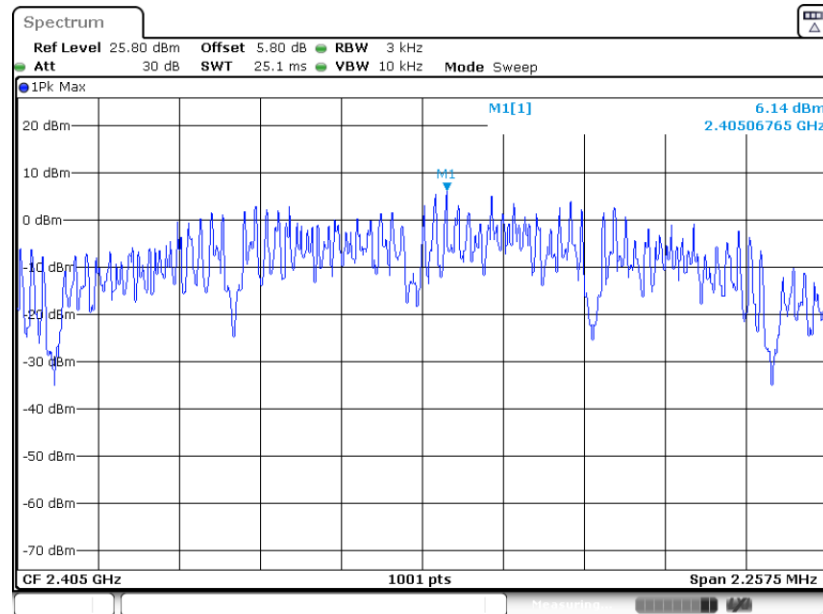

Date: 28 AUG 2023 08:49:14


PSD 3kHz Plot on Channel 18

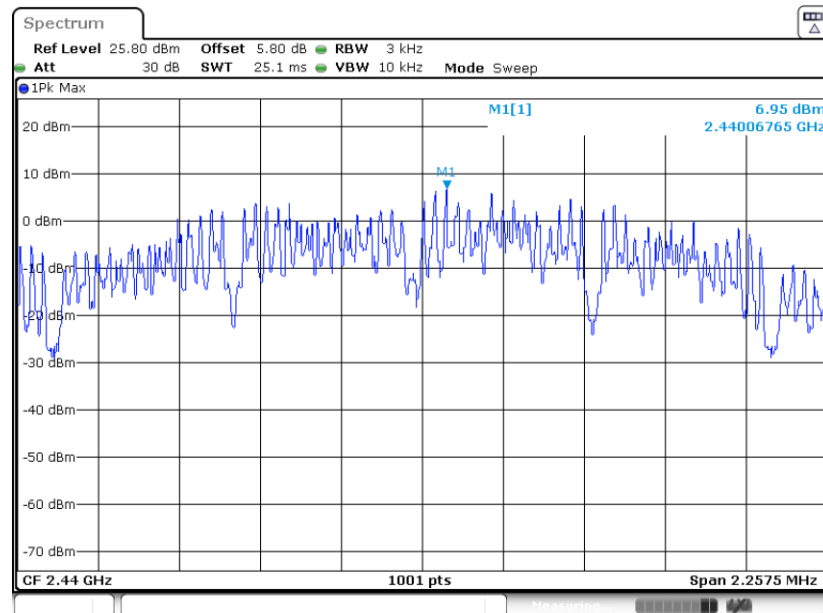

Date: 28 AUG 2023 08:55:24




PSD 3kHz Plot on Channel 26

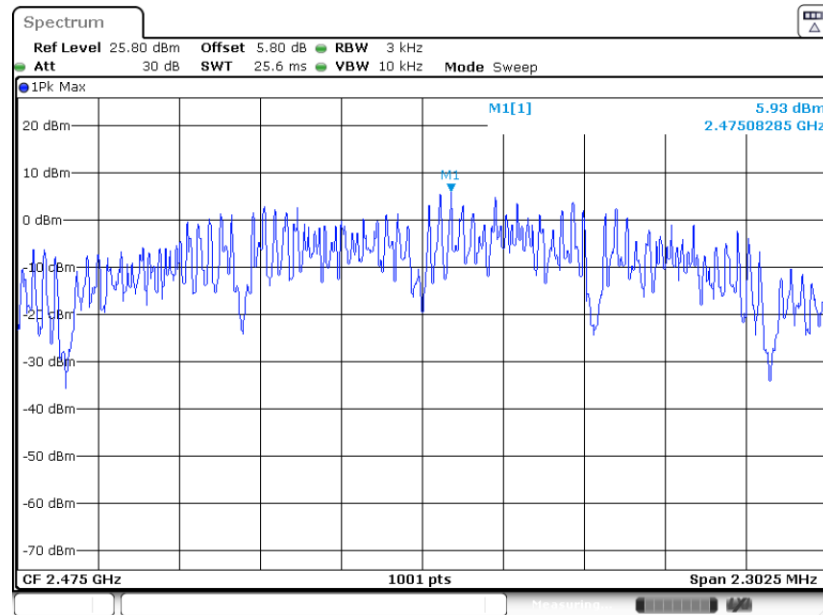

Date: 29.AUG.2023 10:22:27

PSD 3kHz Plot on Channel 26

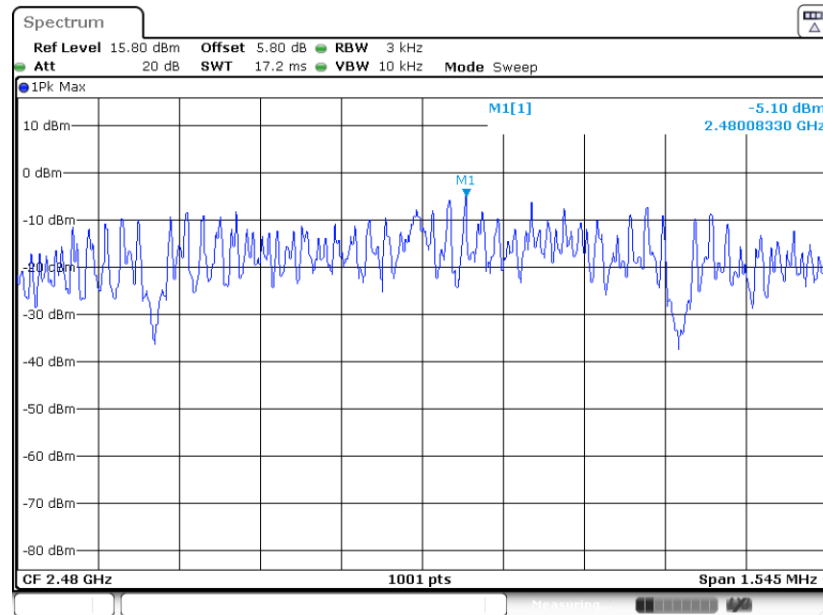

Date: 26.MAY.2023 09:51:04

3.4 Conducted Band Edges and Spurious Emission Measurement

3.4.1 Limit of Conducted Band Edges and Spurious Emission

All harmonics/spurious must be at least 20 dB down from the highest emission level within the authorized band.


3.4.2 Measuring Instruments

The section 4.0 of List of Measuring Equipment of this test report is used for test.

3.4.3 Test Procedure

1. The testing follows ANSI C63.10-2013 clause 11.13
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Set RBW = 100 kHz, VBW=300 kHz, Peak Detector. Unwanted Emissions measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz when maximum peak conducted output power procedure is used. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.
5. Measure and record the results in the test report.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.


3.4.4 Test Setup

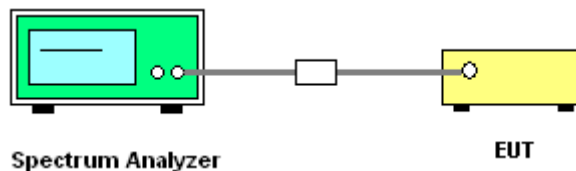




3.4.5 Test Result of Conducted Band Edges Plots

Low Band Edge Plot on Channel 11

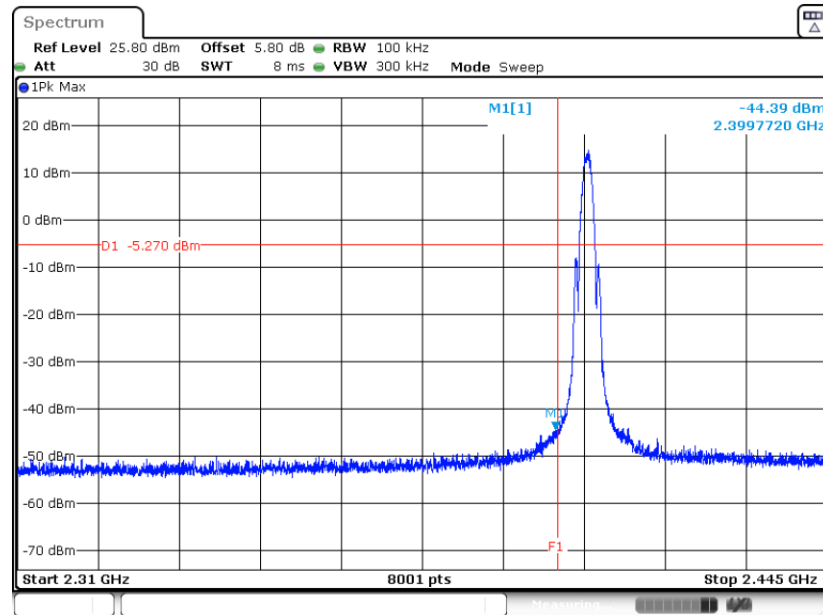

Date: 28.AUG.2023 08:49:52


High Band Edge Plot on Channel 25

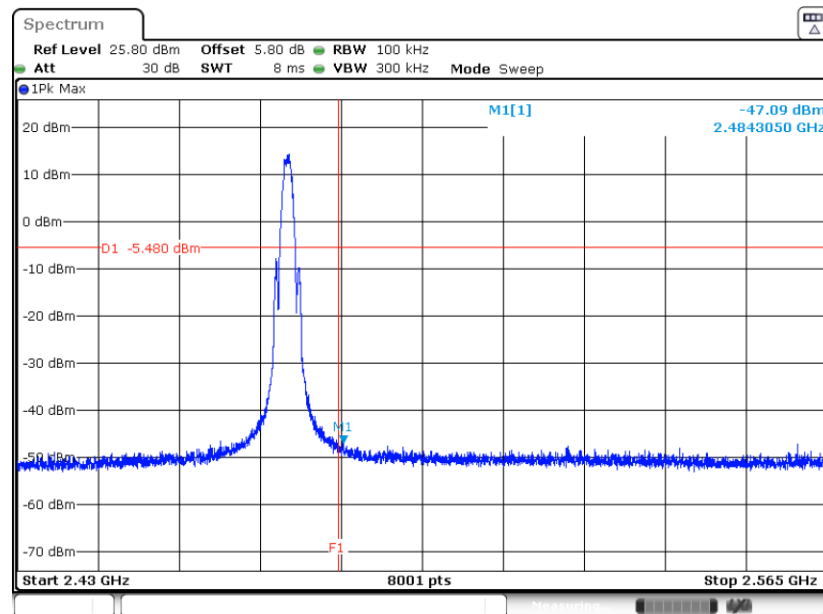

Date: 29.AUG.2023 10:23:04




High Band Edge Plot on Channel 26

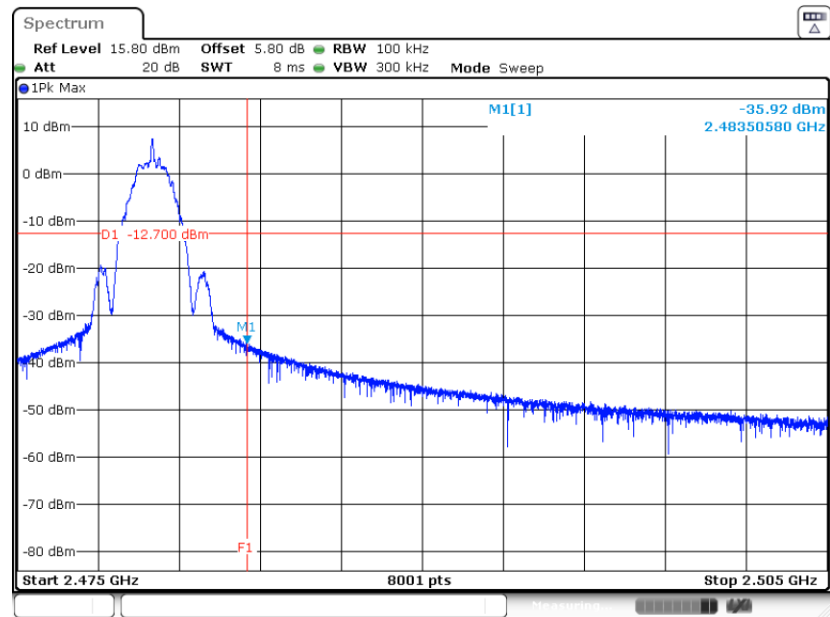


Date: 26.MAY.2023 09:53:59

3.4.6 Test Result of Conducted Spurious Emission Plots

Conducted Spurious Emission Plot on Zigbee Channel 11

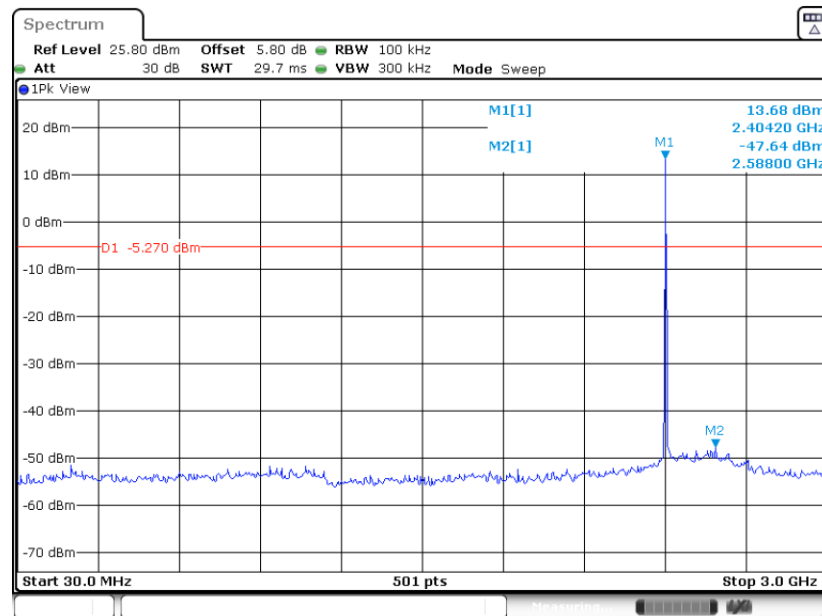


Conducted Spurious Emission Plot on Zigbee Channel 11

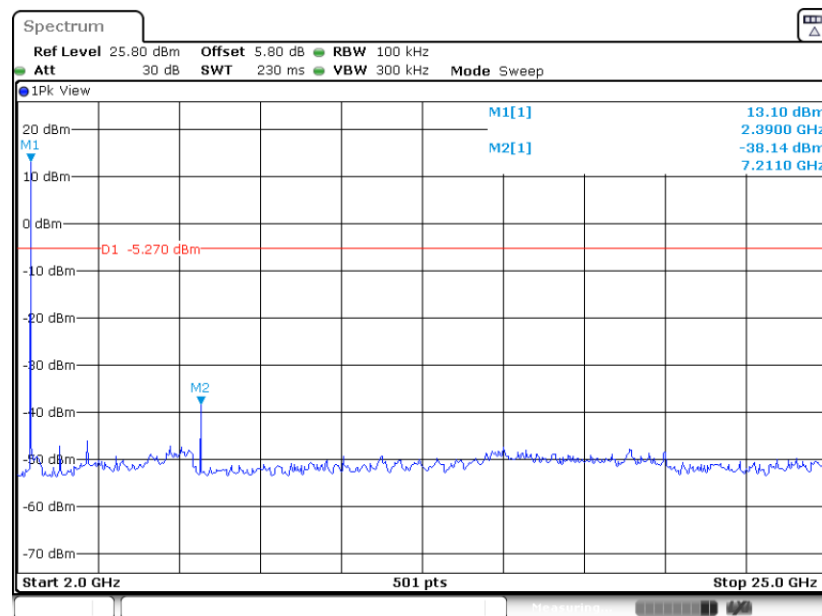




Conducted Spurious Emission Plot on Zigbee Channel 18

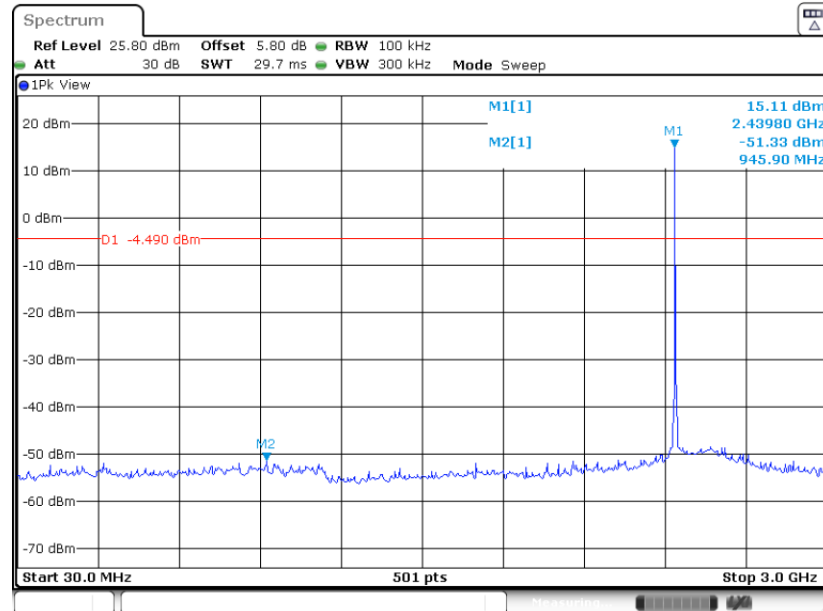

Date: 28.AUG.2023 08:56:04


Conducted Spurious Emission Plot on Zigbee Channel 18

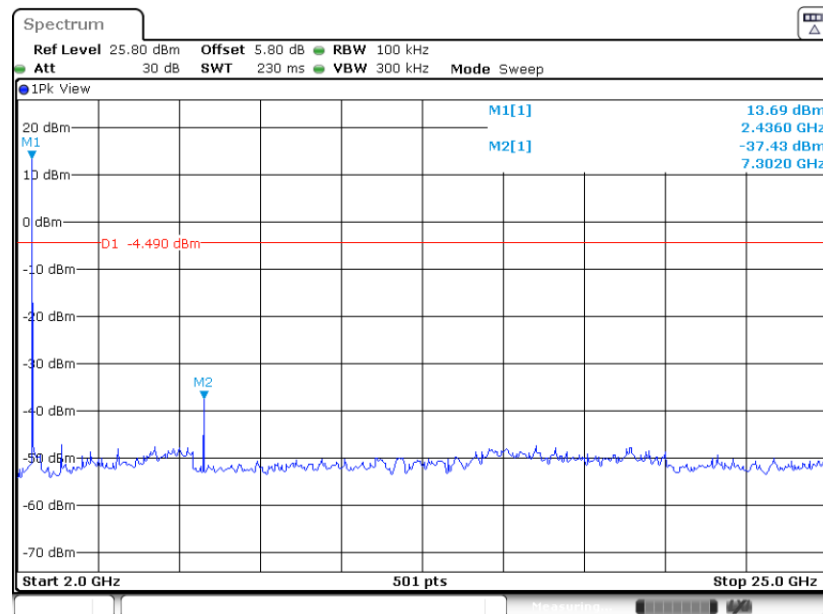

Date: 28.AUG.2023 08:56:24




Conducted Spurious Emission Plot on Zigbee Channel 25

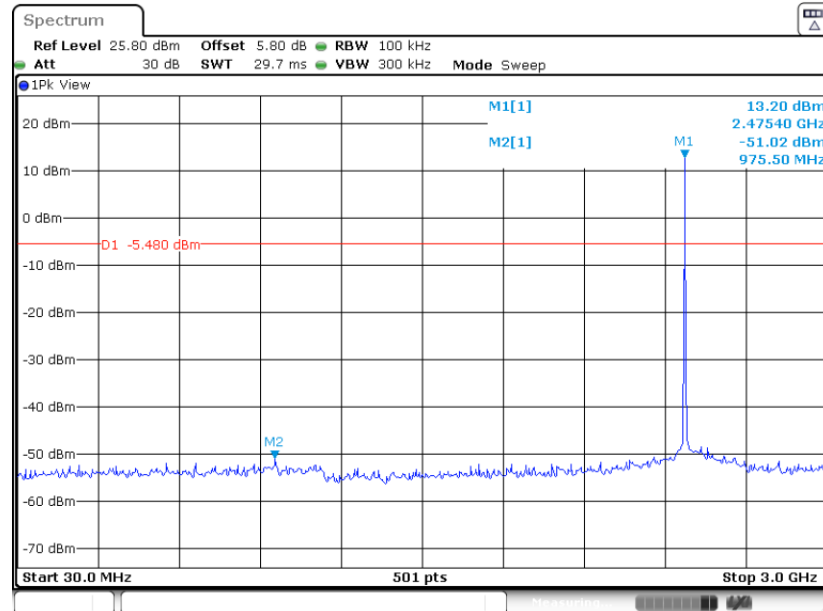

Date: 29.AUG.2023 10:23:25


Conducted Spurious Emission Plot on Zigbee Channel 25

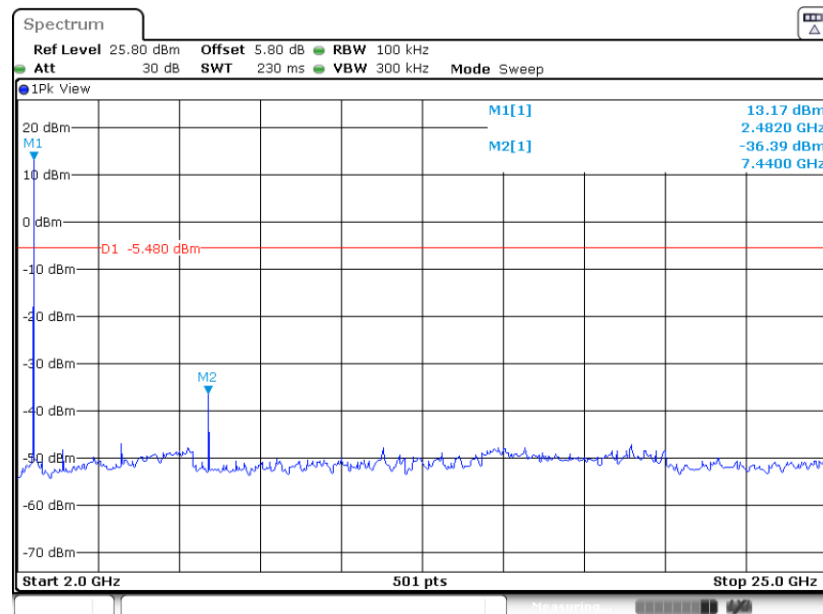

Date: 29.AUG.2023 10:23:45




Conducted Spurious Emission Plot on Zigbee Channel 26

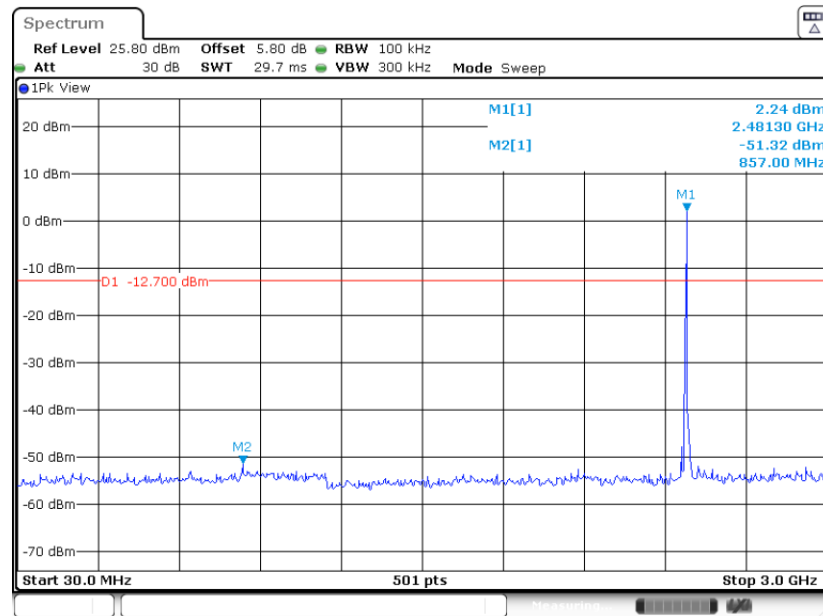

Date: 26.MAY.2023 09:54:33

Conducted Spurious Emission Plot on Zigbee Channel 26

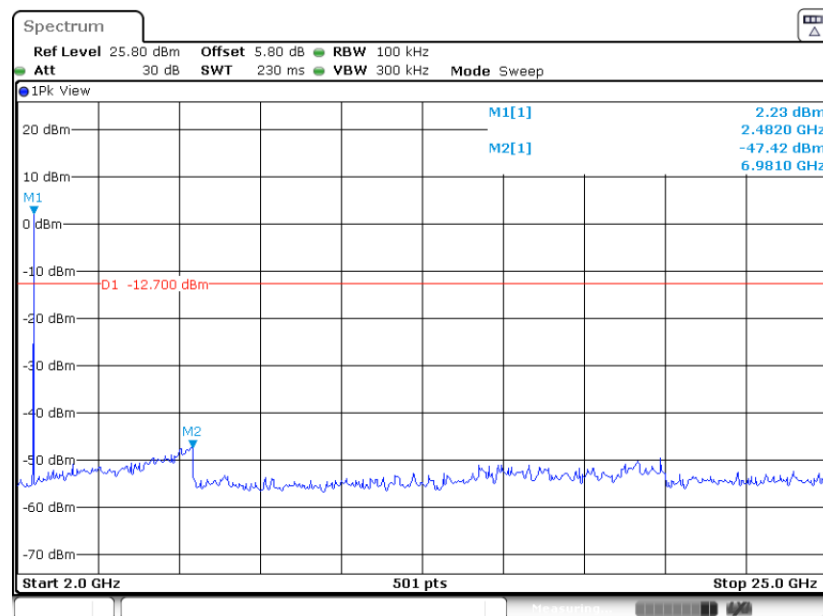

Date: 26.MAY.2023 09:54:46

3.5 Spurious Emission Measurement in the Restricted Band

3.5.1 Limit of Spurious Emission Measurement in the Restricted Band

Emissions which fall in the restricted bands must also comply with the limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

3.5.2 Measuring Instruments

The section 4.0 of List of Measuring Equipment of this test report is used for test.

3.5.3 Test Procedures

1. The testing follows ANSI C63.10-2013 clause 11.11 & 11.12
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level.
3. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
6. For conducted spurious emission measurement in the restricted band, the RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
7. For measurement below 1GHz, if the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.
8. Use the following spectrum analyzer settings:
 - (1) Span shall wide enough to fully capture the emission being measured;

(2) Set RBW=100 kHz for $f < 1$ GHz; VBW $\geq$ RBW; Sweep = auto; Detector function = peak; Trace = max hold;


(3) Set RBW = 1 MHz, VBW= 3MHz for $f \geq 1$ GHz for peak measurement.

For average measurement:


- VBW = 10 Hz, when duty cycle is no less than 98 percent.
- VBW $\geq 1/T$, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.

3.5.4 Test Setup


For radiated emissions below 30MHz

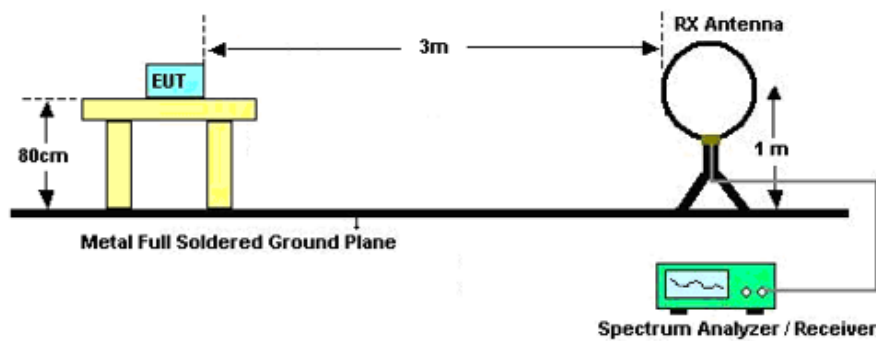

For radiated emissions from 30MHz to 1GHz

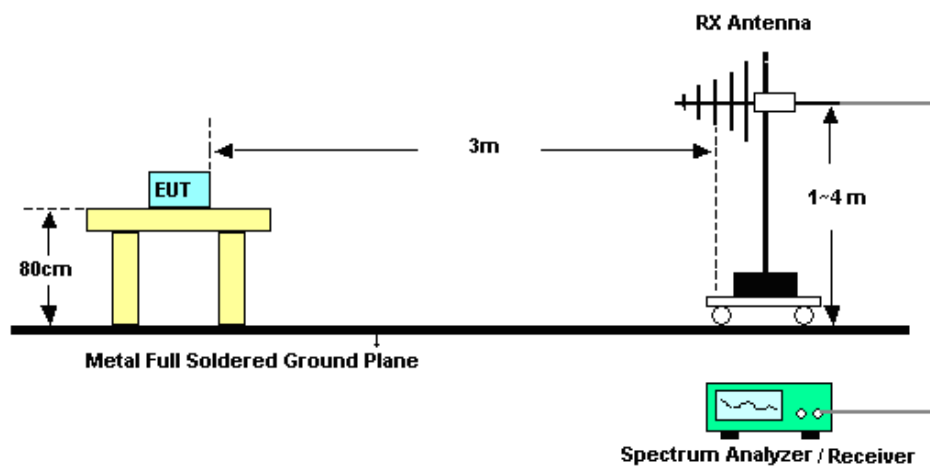

For radiated emissions above 1GHz

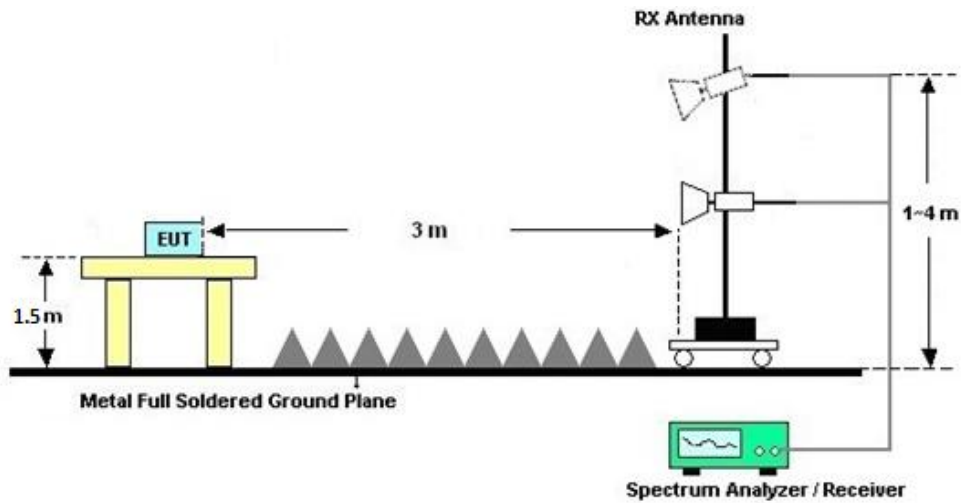

3.5.5 Test Results of Radiated Spurious Emissions (9 kHz ~ 30 MHz)

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

3.5.6 Test Results of Radiated Spurious at Band Edges

Please refer to Appendix C.

3.5.7 Test Result of Cabinet Radiated Spurious Emission (30MHz ~ 10th Harmonic or 40GHz, whichever is lower)

Please refer to Appendix C.

3.5.8 Duty Cycle

Please refer to Appendix D.

3.6 AC Conducted Emission Measurement

3.6.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.6.2 Measuring Instruments

The section 4.0 of List of Measuring Equipment of this test report is used for test.

3.6.3 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF Bandwidth = 9kHz) with Maximum Hold Mode. Then measurement is also conducted by Average Detector and Quasi-Peak Detector Function respectively.

3.6.4 Test Setup

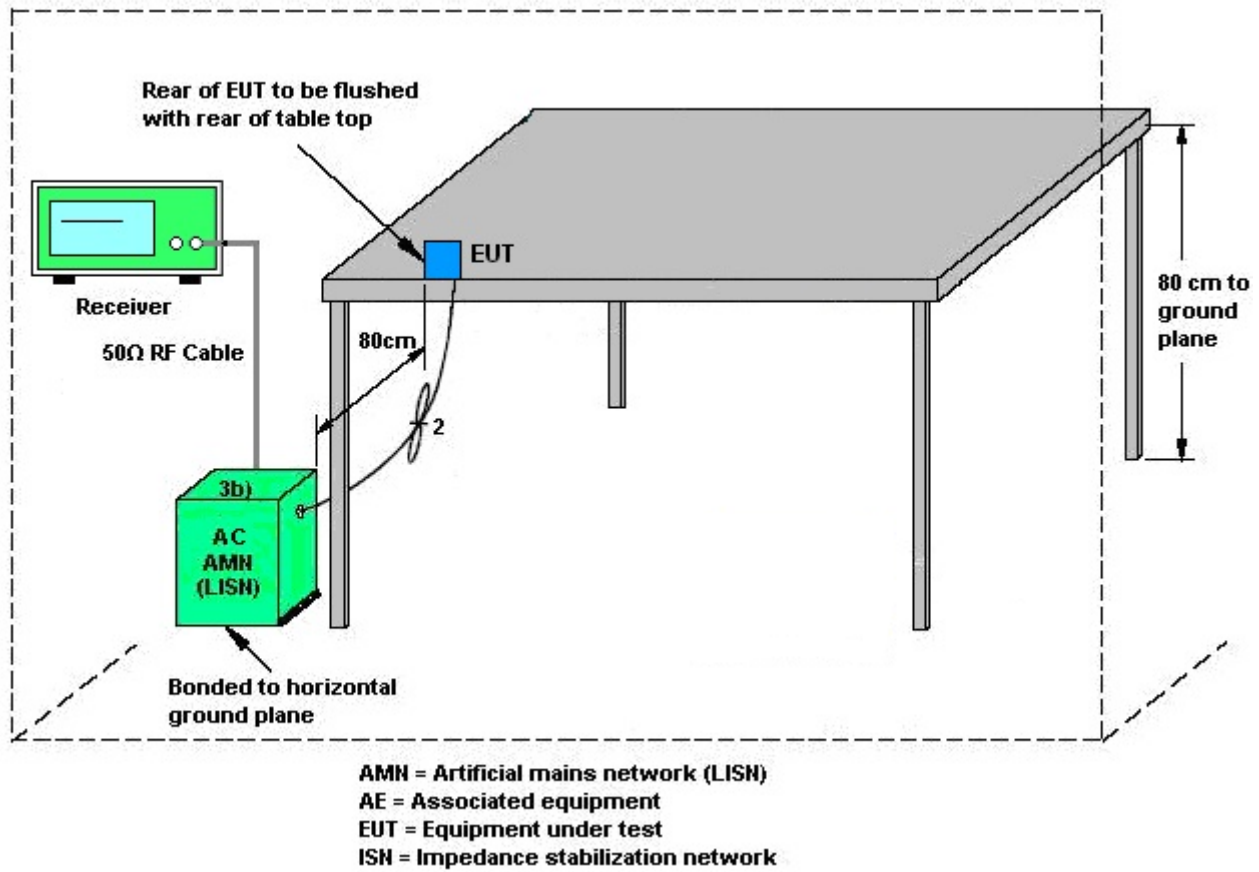

3.6.5 Test Result of AC Conducted Emission

Please refer to Appendix B.



3.7 Antenna Requirements

3.7.1 Standard Applicable

If directional gain of transmitting antennas is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the rule.

3.7.2 Antenna Anti-Replacement Construction

Non-standard antenna connector is used.

3.7.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.



4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV40	101040	10Hz~40GHz	Oct. 12, 2022	May 26, 2023~ Aug. 29, 2023	Oct. 11, 2023	Conducted (TH01-KS)
Pulse Power Sensor	Anritsu	MA2411B	0917070	300MHz~40GHz	Jan. 05, 2023	May 26, 2023~ Aug. 29, 2023	Jan. 04, 2024	Conducted (TH01-KS)
Power Meter	Anritsu	ML2495A	1005002	50MHz Bandwidth	Jan. 05, 2023	May 26, 2023~ Aug. 29, 2023	Jan. 04, 2024	Conducted (TH01-KS)
EMI Receiver	R&S	ESCI7	100768	9kHz~7GHz;	May 16, 2023	Jul. 10, 2023	May 15, 2024	Conduction (CO01-KS)
AC LISN (for auxiliary equipment)	MessTec	AN3016	060103	9kHz~30MHz	Oct. 13, 2022	Jul. 10, 2023	Oct. 12, 2023	Conduction (CO01-KS)
AC LISN	MessTec	AN3016	060105	9kHz~30MHz	May 16, 2023	Jul. 10, 2023	May 15, 2024	Conduction (CO01-KS)
AC Power Source	Chroma	61602	ABP00000 0811	AC 0V~300V, 45Hz~1000Hz	Oct. 12, 2022	Jul. 10, 2023	Oct. 11, 2023	Conduction (CO01-KS)
EMI Test Receiver	Keysight	N9038A	MY564000 04	3Hz~8.5GHz;M ax 30dBm	Oct. 13, 2022	Aug. 01, 2023~ Aug. 28, 2023	Oct. 12, 2023	Radiation (03CH05-KS)
EXA Spectrum Analyzer	Keysight	N9010A	MY551502 44	10Hz~44G,MAX 30dB	Mar. 24, 2023	Aug. 01, 2023~ Aug. 28, 2023	Mar. 23, 2024	Radiation (03CH05-KS)
Loop Antenna	R&S	HFH2-Z2	100321	9kHz~30MHz	Oct. 16, 2022	Aug. 01, 2023~ Aug. 28, 2023	Oct. 15, 2023	Radiation (03CH05-KS)
Bilog Antenna	TeseQ	CBL6111D	49922	30MHz~1GHz	Apr. 09, 2023	Aug. 01, 2023~ Aug. 28, 2023	Apr. 08, 2024	Radiation (03CH05-KS)
Double Ridge Horn Antenna	ETS-Lindgren	3117	00218642	1GHz~18GHz	Apr. 06, 2023	Aug. 01, 2023~ Aug. 28, 2023	Apr. 05, 2024	Radiation (03CH05-KS)
SHF-EHF Horn	Com-power	AH-840	101093	18GHz~40GHz	Jan. 08, 2023	Aug. 01, 2023~ Aug. 28, 2023	Jan. 07, 2024	Radiation (03CH05-KS)
Amplifier	SONOMA	310N	380826	9KHz-1GHz	Jul. 06, 2023	Aug. 01, 2023~ Aug. 28, 2023	Jul. 05, 2024	Radiation (03CH05-KS)
Amplifier	EM	EM18G40GA	060852	18~40GHz	Jan. 05, 2023	Aug. 01, 2023~ Aug. 28, 2023	Jan. 04, 2024	Radiation (03CH05-KS)
high gain Amplifier	EM	EM01G18GA	060839	1Ghz-18Ghz	Oct. 12, 2022	Aug. 01, 2023~ Aug. 28, 2023	Oct. 11, 2023	Radiation (03CH05-KS)
Amplifier	EM	EM01G18GA	060833	1Ghz-18Ghz	Jan. 05, 2023	Aug. 01, 2023~ Aug. 28, 2023	Jan. 04, 2024	Radiation (03CH05-KS)
AC Power Source	Chroma	61601	F1040900 04	N/A	NCR	Aug. 01, 2023~ Aug. 28, 2023	NCR	Radiation (03CH05-KS)
Turn Table	ChamPro	EM 1000-T	060762-T	0~360 degree	NCR	Aug. 01, 2023~ Aug. 28, 2023	NCR	Radiation (03CH05-KS)
Antenna Mast	ChamPro	EM 1000-A	060762-A	1 m~4 m	NCR	Aug. 01, 2023~ Aug. 28, 2023	NCR	Radiation (03CH05-KS)

NCR: No Calibration Required

5 Uncertainty of Evaluation

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI 63.10-2013. All the measurement uncertainty value were shown with a coverage K=2 to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

Uncertainty of Conducted Measurement

Test Item	Uncertainty
Conducted Power	±0.46 dB
Conducted Emissions	±2.26 dB
Occupied Channel Bandwidth	±0.1 %
Conducted Power Spectral Density	±0.88 dB

Uncertainty of Conducted Emission Measurement (150 kHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	2.94dB
---	--------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	6.28dB
---	--------

Uncertainty of Radiated Emission Measurement (1000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	4.88dB
---	--------

Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.26dB
---	--------

----- THE END -----



Appendix A. Conducted Test Results

Thread Low Energy

Test Engineer:	Gene Wang	Temperature:	20~26	°C
Test Date:	2023/5/26~2023/8/29	Relative Humidity:	40~51	%

Power setting	
CH 11	10
CH 18	10
CH 26	10

TEST RESULTS DATA										
Peak Power Table										
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Peak Conducted Power (dBm)	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
Thread	250K	1	11	2405	5.59	30.00	3.96	9.55	36.00	Pass
Thread	250K	1	18	2440	6.82	30.00	3.96	10.78	36.00	Pass
Thread	250K	1	26	2480	6.84	30.00	3.96	10.80	36.00	Pass

TEST RESULTS DATA						
Average Power Table						
(Reporting Only)						
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)	Average Conducted Power (dBm)
Thread	250K	1	11	2405	0.16	4.23
Thread	250K	1	18	2440	0.16	5.29
Thread	250K	1	26	2480	0.16	5.40

Zigbee Low Energy

Test Engineer:	Gene Wang	Temperature:	20~26	°C
Test Date:	2023/5/26~2023/8/29	Relative Humidity:	40~51	%

Power setting	
CH 11	15
CH 18	15
CH 25	15
CH 26	10

TEST RESULTS DATA
6dB and 99% Occupied Bandwidth

Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	99% Occupied BW (MHz)	6dB BW (MHz)	6dB BW Limit (MHz)	Pass/Fail
Zigbee	250K	1	11	2405	2.32	1.51	0.50	Pass
Zigbee	250K	1	18	2440	2.32	1.51	0.50	Pass
Zigbee	250K	1	25	2475	2.33	1.54	0.50	Pass
Zigbee	250K	1	26	2480	2.31	1.03	0.50	Pass

TEST RESULTS DATA
Peak Power Table

Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	Peak Conducted Power (dBm)	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
Zigbee	250K	1	11	2405	19.34	30.00	3.96	23.30	36.00	Pass
Zigbee	250K	1	18	2440	20.05	30.00	3.96	24.01	36.00	Pass
Zigbee	250K	1	25	2475	19.51	30.00	3.96	23.47	36.00	Pass
Zigbee	250K	1	26	2480	6.88	30.00	3.96	10.84	36.00	Pass

TEST RESULTS DATA
Average Power Table
(Reporting Only)

Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	Duty Factor (dB)	Average Conducted Power (dBm)
Zigbee	250K	1	11	2405	0.16	18.08
Zigbee	250K	1	18	2440	0.16	18.69
Zigbee	250K	1	25	2475	0.16	18.42
Zigbee	250K	1	26	2480	0.16	5.43


TEST RESULTS DATA
Peak Power Density

Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	Peak PSD (dBm /100kHz)	Peak PSD (dBm /3kHz)	DG (dBi)	Peak PSD Limit (dBm /3kHz)	Pass/Fail
Zigbee	250K	1	11	2405	14.73	6.14	3.96	8.00	Pass
Zigbee	250K	1	18	2440	15.51	6.95	3.96	8.00	Pass
Zigbee	250K	1	25	2475	14.52	5.93	3.96	8.00	Pass
Zigbee	250K	1	26	2480	7.30	-5.10	3.96	8.00	Pass

Note: PSD (dBm/ 100kHz) is a reference level used for Conducted Band Edges and Conducted Spurious Emission 20dBc limit.




Appendix B. AC Conducted Emission Test Results

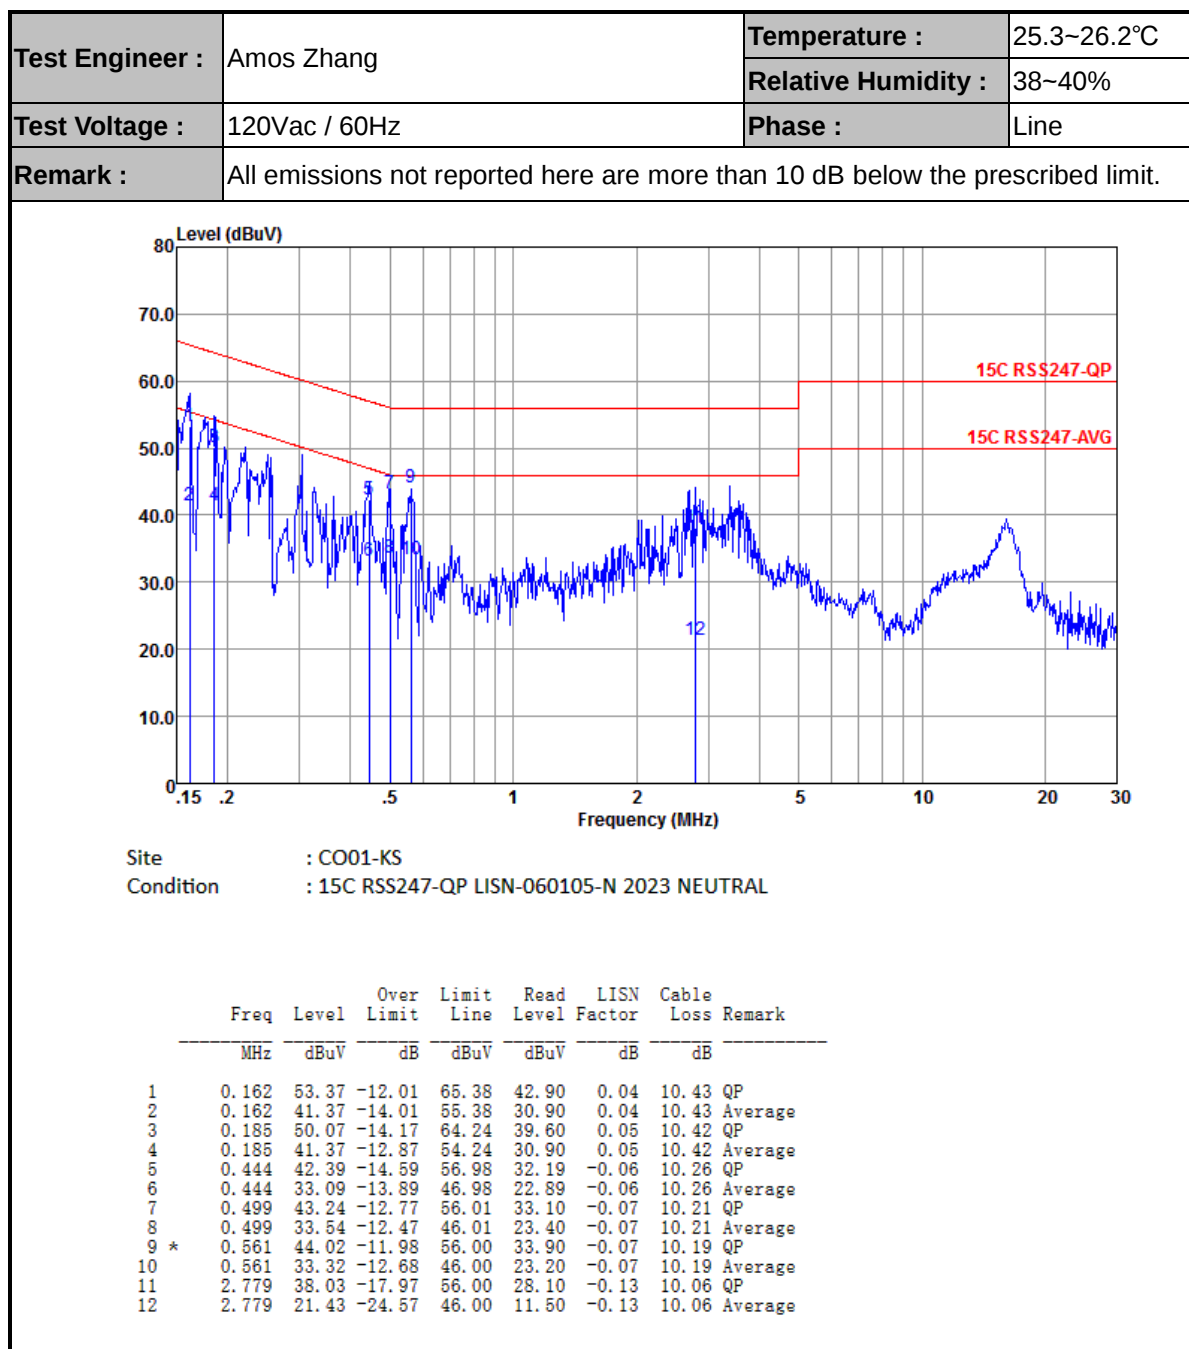



Test Engineer :	Amos Zhang	Temperature :	25.3~26.2°C
		Relative Humidity :	38~40%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

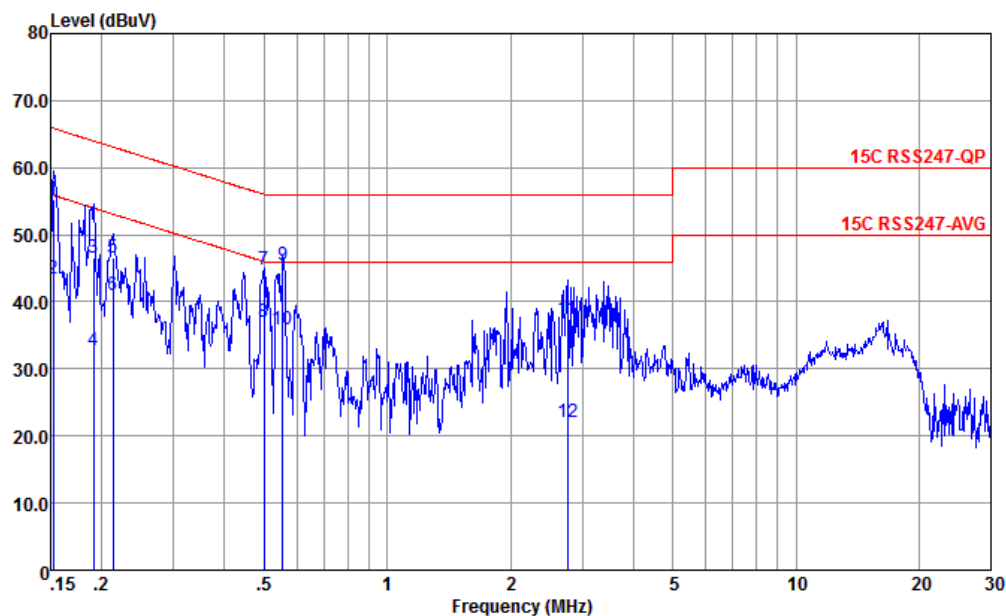

Site : CO01-KS
Condition : 15C RSS247-QP LISN-060105-L 2023 LINE

	Freq	Level	Over	Limit	Read	LISN	Cable	
	MHz	dBuV	Limit	Line	Level	Factor	Loss	Remark
			dB	dBuV	dBuV	dB	dB	
1	0.152	55.18	-10.69	65.87	44.70	0.05	10.43	QP
2	0.152	43.38	-12.49	55.87	32.90	0.05	10.43	Average
3	0.191	46.65	-17.33	63.98	36.20	0.03	10.42	QP
4	0.191	32.65	-21.33	53.98	22.20	0.03	10.42	Average
5	0.213	46.64	-16.46	63.10	36.20	0.03	10.41	QP
6	0.213	40.94	-12.16	53.10	30.50	0.03	10.41	Average
7	0.499	44.68	-11.33	56.01	34.50	-0.03	10.21	QP
8 *	0.499	36.98	-9.03	46.01	26.80	-0.03	10.21	Average
9	0.555	45.45	-10.55	56.00	35.30	-0.04	10.19	QP
10	0.555	35.95	-10.05	46.00	25.80	-0.04	10.19	Average
11	2.765	37.37	-18.63	56.00	27.40	-0.09	10.06	QP
12	2.765	22.17	-23.83	46.00	12.20	-0.09	10.06	Average

Note:

- Level(dBuV) = Read Level(dBuV) + LISN Factor(dB) + Cable Loss(dB)
- Over Limit(dB) = Level(dBuV) – Limit Line(dBuV)



Appendix C. Radiated Spurious Emission Test Data

Test Engineer :	Carry Xu	Relative Humidity :	41~42%
		Temperature :	22~23℃

Radiated Spurious Emission Test Modes





Mode	Band (MHz)	Antenna	Modulation	Channel	Frequency	Data Rate	RU	Remark
Mode 1	2400-2483.5	1	Zigbee	11	2405	250Kbps	-	-
Mode 2	2400-2483.5	1	Zigbee	18	2440	250Kbps	-	-
Mode 3	2400-2483.5	1	Zigbee	25	2475	250Kbps	-	-
Mode 4	2400-2483.5	1	Zigbee	26	2480	250Kbps	-	-
Mode 5	2400-2483.5	1	Zigbee	25	2475	250Kbps	-	LF







Summary of each worse mode

Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	Remark
1	Zigbee	11	2389.95	45.08	54.00	-8.92	H	AVERAGE	Pass	Band Edge
1	Zigbee	11	4810.00	41.74	74.00	-32.26	H	PEAK	Pass	Harmonic
2	Zigbee	18	-	-	-	-	-	-	-	Band Edge
2	Zigbee	18	4880.00	43.78	74.00	-30.22	H	PEAK	Pass	Harmonic
3	Zigbee	25	2483.50	52.18	54.00	-1.82	H	AVERAGE	Pass	Band Edge
3	Zigbee	25	4950.00	44.51	74.00	-29.49	V	PEAK	Pass	Harmonic
4	Zigbee	26	2483.50	48.87	54.00	-5.13	H	AVERAGE	Pass	Band Edge
4	Zigbee	26	7440.00	41.16	74.00	-32.84	H	PEAK	Pass	Harmonic
5	Zigbee	25	239.52	35.8	46.00	-10.20	H	PEAK	Pass	LF

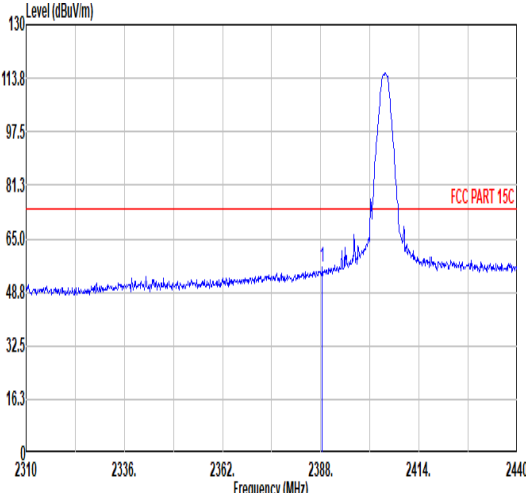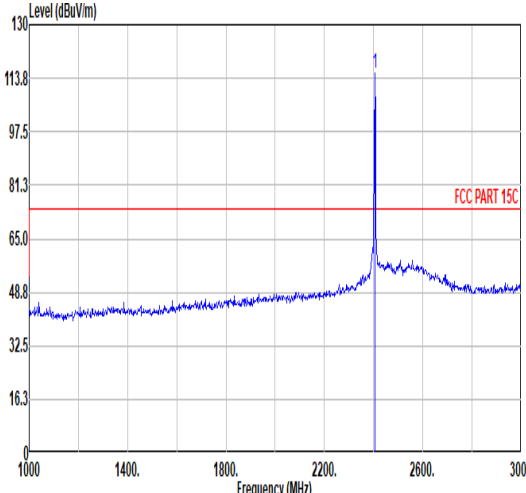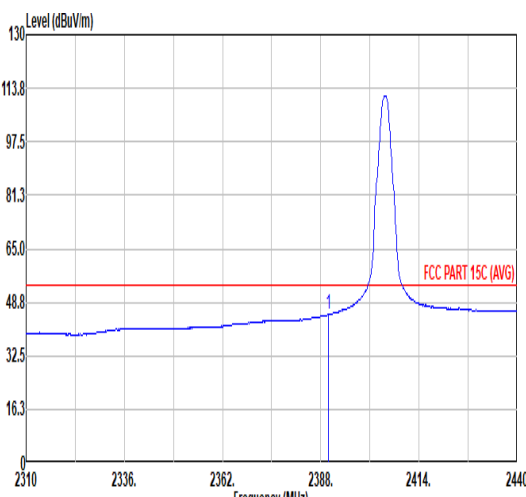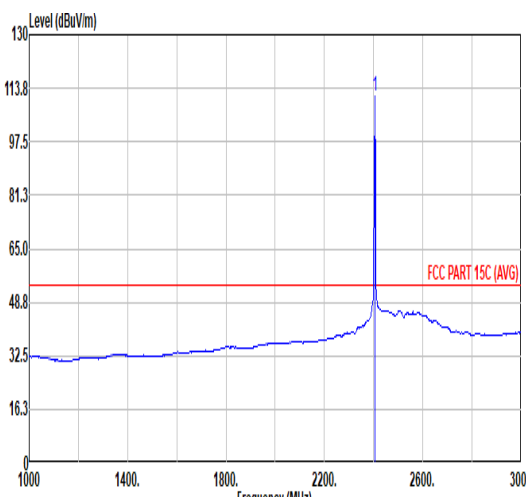

Mode	1																																																																																																			
	Band Edge																																																																																																			
	2400-2483.5_Zigbee_CH11_2405MHz																																																																																																			
ANT	1																																																																																																			
Pol.	Horizontal						Fundamental																																																																																													
Peak																																																																																																				
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2388.39</td><td>56.19</td><td>74.00</td><td>-17.81</td><td>47.94</td><td>32.07</td><td>7.10</td><td>36.92</td><td>6.00</td><td>200</td><td>186</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2388.39	56.19	74.00	-17.81	47.94	32.07	7.10	36.92	6.00	200	186	PEAK	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2405.00</td><td>115.12</td><td>-----</td><td>-----</td><td>106.78</td><td>32.13</td><td>7.13</td><td>36.92</td><td>6.00</td><td>200</td><td>186</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2405.00	115.12	-----	-----	106.78	32.13	7.13	36.92	6.00	200	186	PEAK
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	2388.39	56.19	74.00	-17.81	47.94	32.07	7.10	36.92	6.00	200	186	PEAK																																																																																								
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	2405.00	115.12	-----	-----	106.78	32.13	7.13	36.92	6.00	200	186	PEAK																																																																																								
Avg																																																																																																				
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2389.95</td><td>45.00</td><td>54.00</td><td>-8.92</td><td>36.82</td><td>32.07</td><td>7.11</td><td>36.92</td><td>6.00</td><td>200</td><td>186</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2389.95	45.00	54.00	-8.92	36.82	32.07	7.11	36.92	6.00	200	186	AVERAGE	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2405.00</td><td>111.53</td><td>-----</td><td>-----</td><td>103.19</td><td>32.13</td><td>7.13</td><td>36.92</td><td>6.00</td><td>200</td><td>186</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2405.00	111.53	-----	-----	103.19	32.13	7.13	36.92	6.00	200	186	AVERAGE
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	2389.95	45.00	54.00	-8.92	36.82	32.07	7.11	36.92	6.00	200	186	AVERAGE																																																																																								
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	2405.00	111.53	-----	-----	103.19	32.13	7.13	36.92	6.00	200	186	AVERAGE																																																																																								

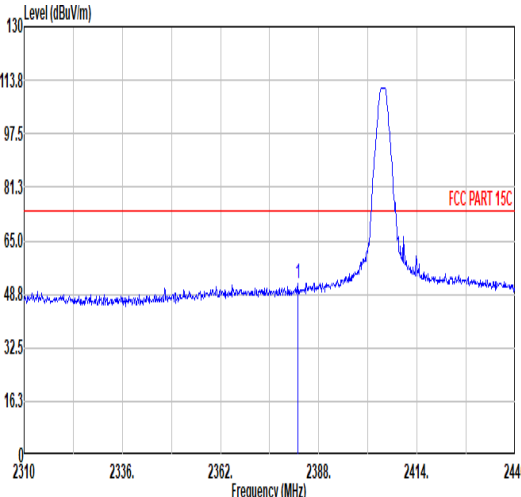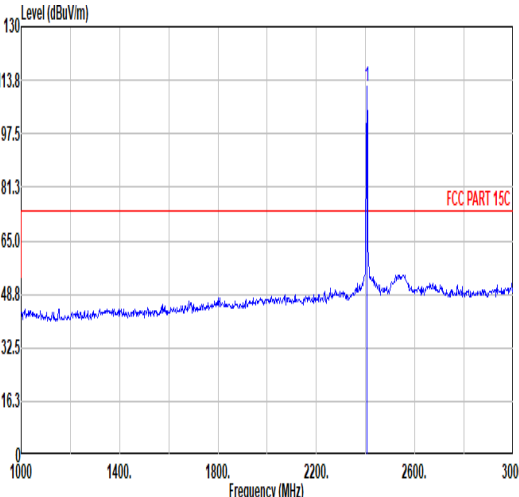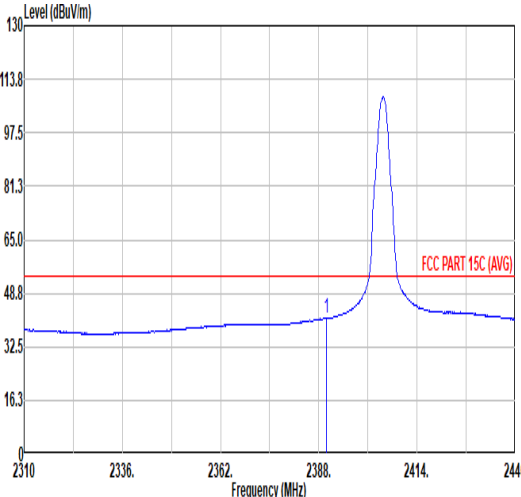
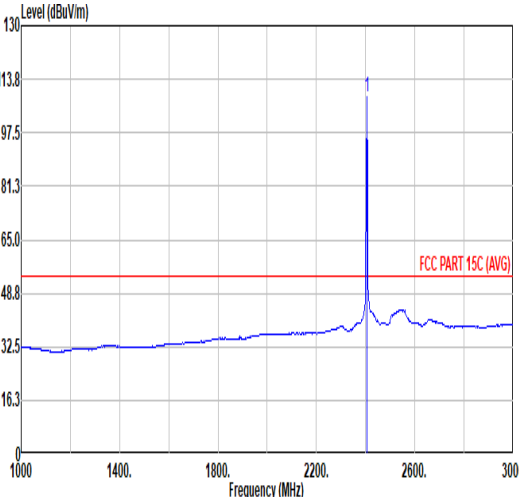






Mode	1																																																																																																		
	Band Edge																																																																																																		
	2400-2483.5_Zigbee_CH11_2405MHz																																																																																																		
ANT	1																																																																																																		
Pol.	Vertical						Fundamental																																																																																												
Peak																																																																																																			
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2382.54</td><td>52.24</td><td>74.00</td><td>-21.76</td><td>44.01</td><td>32.05</td><td>7.09</td><td>36.91</td><td>6.00</td><td>377</td><td>248</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2382.54	52.24	74.00	-21.76	44.01	32.05	7.09	36.91	6.00	377	248	PEAK	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2405.00</td><td>111.78</td><td>-----</td><td>-----</td><td>103.44</td><td>32.13</td><td>7.13</td><td>36.92</td><td>6.00</td><td>377</td><td>248</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2405.00	111.78	-----	-----	103.44	32.13	7.13	36.92	6.00	377	248
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2382.54	52.24	74.00	-21.76	44.01	32.05	7.09	36.91	6.00	377	248	PEAK																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2405.00	111.78	-----	-----	103.44	32.13	7.13	36.92	6.00	377	248	PEAK																																																																																							
Avg																																																																																																			
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2389.95</td><td>41.20</td><td>54.00</td><td>-12.80</td><td>32.94</td><td>32.07</td><td>7.11</td><td>36.92</td><td>6.00</td><td>377</td><td>248</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2389.95	41.20	54.00	-12.80	32.94	32.07	7.11	36.92	6.00	377	248	AVERAGE	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2405.00</td><td>108.30</td><td>-----</td><td>-----</td><td>99.96</td><td>32.13</td><td>7.13</td><td>36.92</td><td>6.00</td><td>377</td><td>248</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2405.00	108.30	-----	-----	99.96	32.13	7.13	36.92	6.00	377	248
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2389.95	41.20	54.00	-12.80	32.94	32.07	7.11	36.92	6.00	377	248	AVERAGE																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2405.00	108.30	-----	-----	99.96	32.13	7.13	36.92	6.00	377	248	AVERAGE																																																																																							







Mode	1																																																																																																																														
	Harmonic																																																																																																																														
	2400-2483.5_ Zigbee _CH11_ 2405MHz																																																																																																																														
ANT	1																																																																																																																														
Pol.	Horizontal						Vertical																																																																																																																								
Peak Avg																																																																																																																															
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr></thead><tbody><tr><td></td><td>MHz</td><td>dBuV/m</td><td>dBuV/m</td><td>dB</td><td>dBuV</td><td>dB/m</td><td>dB</td><td>dB</td><td>cm</td><td>deg</td></tr><tr><td>1</td><td>3207.00</td><td>47.23</td><td>83.89</td><td>-36.66</td><td>71.57</td><td>32.79</td><td>8.30</td><td>65.43</td><td>0.00</td><td>---</td><td>---</td><td>PEAK</td></tr><tr><td>2</td><td>4810.00</td><td>41.74</td><td>74.00</td><td>-32.26</td><td>62.88</td><td>33.90</td><td>10.21</td><td>65.25</td><td>0.00</td><td>---</td><td>---</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	3207.00	47.23	83.89	-36.66	71.57	32.79	8.30	65.43	0.00	---	---	PEAK	2	4810.00	41.74	74.00	-32.26	62.88	33.90	10.21	65.25	0.00	---	---	PEAK	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr></thead><tbody><tr><td></td><td>MHz</td><td>dBuV/m</td><td>dBuV/m</td><td>dB</td><td>dBuV</td><td>dB/m</td><td>dB</td><td>dB</td><td>dB</td><td>cm</td><td>deg</td></tr><tr><td>1</td><td>3207.00</td><td>41.14</td><td>78.90</td><td>-37.76</td><td>65.48</td><td>32.79</td><td>8.30</td><td>65.43</td><td>0.00</td><td>---</td><td>---</td><td>PEAK</td></tr><tr><td>2</td><td>4809.00</td><td>43.41</td><td>74.00</td><td>-30.59</td><td>64.55</td><td>33.90</td><td>10.21</td><td>65.25</td><td>0.00</td><td>---</td><td>---</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	3207.00	41.14	78.90	-37.76	65.48	32.79	8.30	65.43	0.00	---	---	PEAK	2	4809.00	43.41	74.00	-30.59	64.55	33.90	10.21	65.25	0.00	---	---	PEAK
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																					
1	3207.00	47.23	83.89	-36.66	71.57	32.79	8.30	65.43	0.00	---	---	PEAK																																																																																																																			
2	4810.00	41.74	74.00	-32.26	62.88	33.90	10.21	65.25	0.00	---	---	PEAK																																																																																																																			
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																				
1	3207.00	41.14	78.90	-37.76	65.48	32.79	8.30	65.43	0.00	---	---	PEAK																																																																																																																			
2	4809.00	43.41	74.00	-30.59	64.55	33.90	10.21	65.25	0.00	---	---	PEAK																																																																																																																			

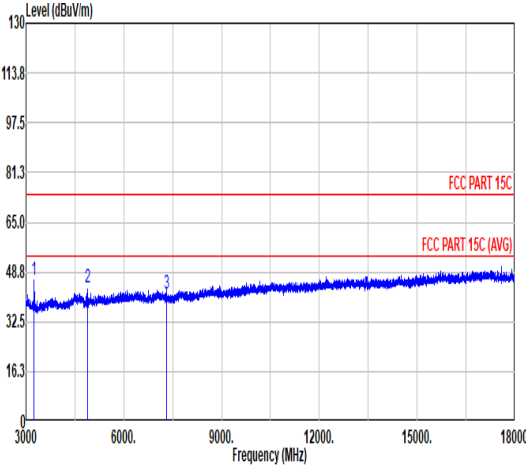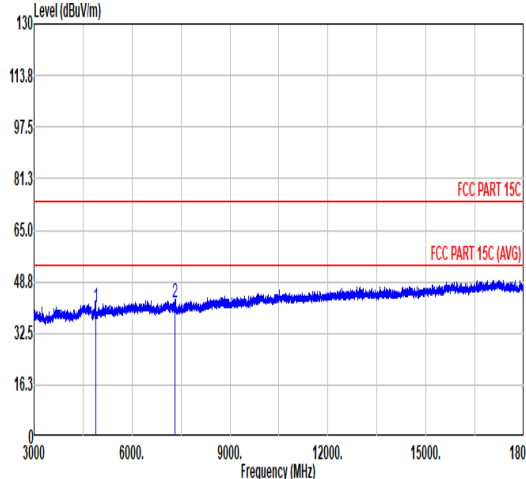





Mode	2																																																																																																																																													
	Harmonic																																																																																																																																													
	2400-2483.5_Zigbee_CH18_2440MHz																																																																																																																																													
ANT	1																																																																																																																																													
Pol.	Horizontal						Vertical																																																																																																																																							
Peak Avg																																																																																																																																														
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>3253.50</td><td>46.01</td><td>85.36</td><td>-39.35</td><td>70.40</td><td>32.75</td><td>8.36</td><td>65.50</td><td>0.00</td><td>---</td><td>---</td><td>PEAK</td></tr><tr><td>2</td><td>4880.00</td><td>43.78</td><td>74.00</td><td>-30.22</td><td>64.86</td><td>33.90</td><td>10.30</td><td>65.28</td><td>0.00</td><td>---</td><td>---</td><td>PEAK</td></tr><tr><td>3</td><td>7320.00</td><td>41.71</td><td>74.00</td><td>-32.29</td><td>59.76</td><td>35.70</td><td>12.72</td><td>66.47</td><td>0.00</td><td>---</td><td>---</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	3253.50	46.01	85.36	-39.35	70.40	32.75	8.36	65.50	0.00	---	---	PEAK	2	4880.00	43.78	74.00	-30.22	64.86	33.90	10.30	65.28	0.00	---	---	PEAK	3	7320.00	41.71	74.00	-32.29	59.76	35.70	12.72	66.47	0.00	---	---	PEAK	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>4880.00</td><td>40.56</td><td>74.00</td><td>-33.44</td><td>61.64</td><td>33.90</td><td>10.30</td><td>65.28</td><td>0.00</td><td>---</td><td>---</td><td>PEAK</td></tr><tr><td>2</td><td>7320.00</td><td>42.33</td><td>74.00</td><td>-31.67</td><td>60.38</td><td>35.70</td><td>12.72</td><td>66.47</td><td>0.00</td><td>---</td><td>---</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	4880.00	40.56	74.00	-33.44	61.64	33.90	10.30	65.28	0.00	---	---	PEAK	2	7320.00	42.33	74.00	-31.67	60.38	35.70	12.72	66.47	0.00	---	---
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																																																					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																			
1	3253.50	46.01	85.36	-39.35	70.40	32.75	8.36	65.50	0.00	---	---	PEAK																																																																																																																																		
2	4880.00	43.78	74.00	-30.22	64.86	33.90	10.30	65.28	0.00	---	---	PEAK																																																																																																																																		
3	7320.00	41.71	74.00	-32.29	59.76	35.70	12.72	66.47	0.00	---	---	PEAK																																																																																																																																		
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																																																					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																			
1	4880.00	40.56	74.00	-33.44	61.64	33.90	10.30	65.28	0.00	---	---	PEAK																																																																																																																																		
2	7320.00	42.33	74.00	-31.67	60.38	35.70	12.72	66.47	0.00	---	---	PEAK																																																																																																																																		

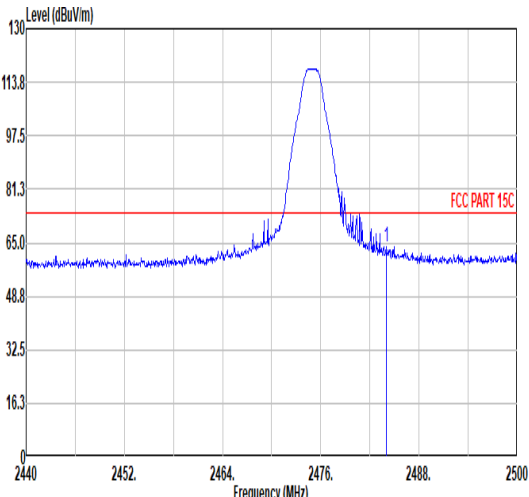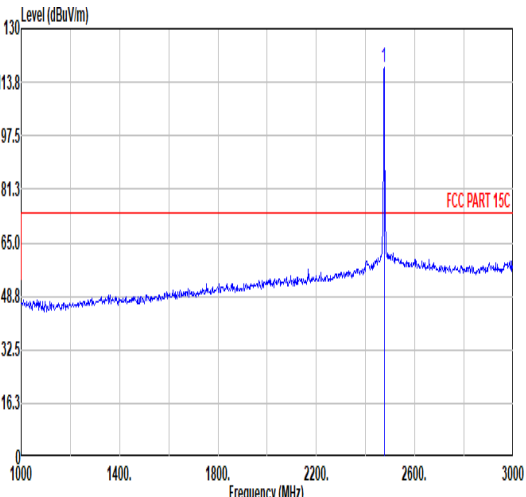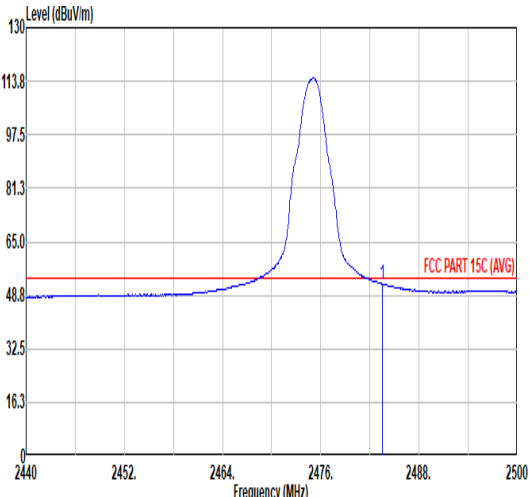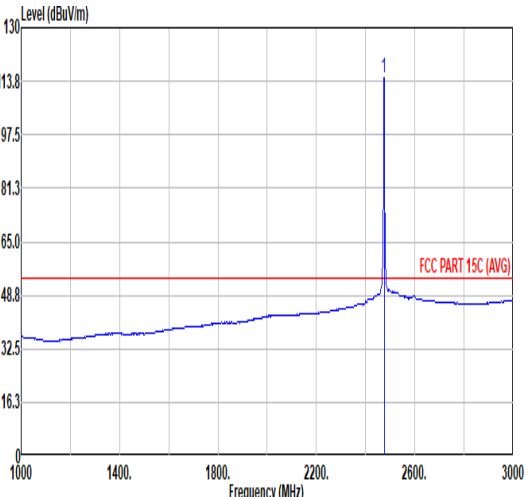	3																																																																																																																											
Mode	Band Edge																																																																																																																											
	2400-2483.5_Zigbee_CH25_2475MHz																																																																																																																											
ANT	1																																																																																																																											
Pol.	Horizontal					Fundamental																																																																																																																						
Peak	 <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th></tr></thead><tbody><tr><td>1</td><td>2483.98</td><td>63.92</td><td>74.00</td><td>-10.08</td><td>55.10</td><td>32.52</td><td>7.26</td><td>36.96</td><td>6.00</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>141</td><td>185</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>PEAK</td></tr></tbody></table>						Limit	Read	Ant	Cable	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1	2483.98	63.92	74.00	-10.08	55.10	32.52	7.26	36.96	6.00									141	185										PEAK	 <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th></tr></thead><tbody><tr><td>1</td><td>2475.00</td><td>118.14</td><td>-----</td><td>-----</td><td>109.37</td><td>32.48</td><td>7.24</td><td>36.95</td><td>6.00</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>141</td><td>185</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>PEAK</td></tr></tbody></table>						Limit	Read	Ant	Cable	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1	2475.00	118.14	-----	-----	109.37	32.48	7.24	36.95	6.00									141	185										PEAK
		Limit	Read	Ant	Cable	Aux	APos	TPos																																																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																																																																				
1	2483.98	63.92	74.00	-10.08	55.10	32.52	7.26	36.96	6.00																																																																																																																			
								141	185																																																																																																																			
									PEAK																																																																																																																			
	Limit	Read	Ant	Cable	Aux	APos	TPos																																																																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																																																																				
1	2475.00	118.14	-----	-----	109.37	32.48	7.24	36.95	6.00																																																																																																																			
								141	185																																																																																																																			
									PEAK																																																																																																																			
Avg	 <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th></tr></thead><tbody><tr><td>1</td><td>2483.50</td><td>52.18</td><td>54.00</td><td>-1.82</td><td>43.36</td><td>32.52</td><td>7.26</td><td>36.96</td><td>6.00</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>141</td><td>185</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>AVERAGE</td></tr></tbody></table>						Limit	Read	Ant	Cable	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1	2483.50	52.18	54.00	-1.82	43.36	32.52	7.26	36.96	6.00									141	185										AVERAGE	 <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th></tr></thead><tbody><tr><td>1</td><td>2475.00</td><td>114.67</td><td>-----</td><td>-----</td><td>105.90</td><td>32.48</td><td>7.24</td><td>36.95</td><td>6.00</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>141</td><td>185</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>AVERAGE</td></tr></tbody></table>						Limit	Read	Ant	Cable	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1	2475.00	114.67	-----	-----	105.90	32.48	7.24	36.95	6.00									141	185										AVERAGE
		Limit	Read	Ant	Cable	Aux	APos	TPos																																																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																																																																				
1	2483.50	52.18	54.00	-1.82	43.36	32.52	7.26	36.96	6.00																																																																																																																			
								141	185																																																																																																																			
									AVERAGE																																																																																																																			
	Limit	Read	Ant	Cable	Aux	APos	TPos																																																																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																																																																				
1	2475.00	114.67	-----	-----	105.90	32.48	7.24	36.95	6.00																																																																																																																			
								141	185																																																																																																																			
									AVERAGE																																																																																																																			

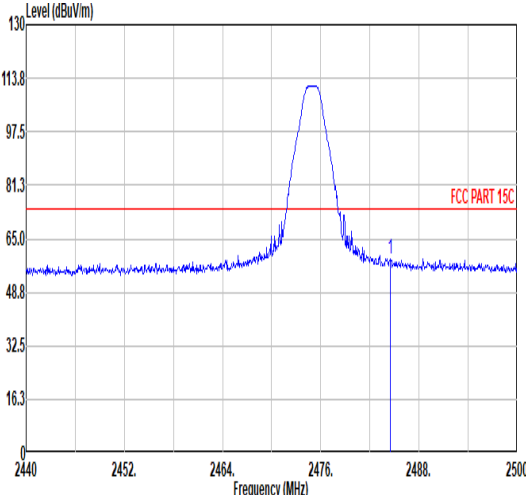
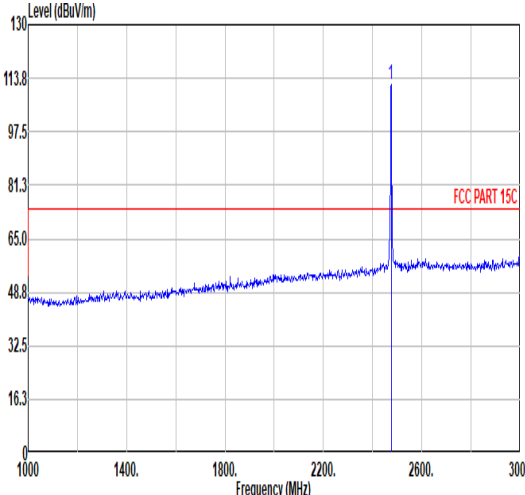
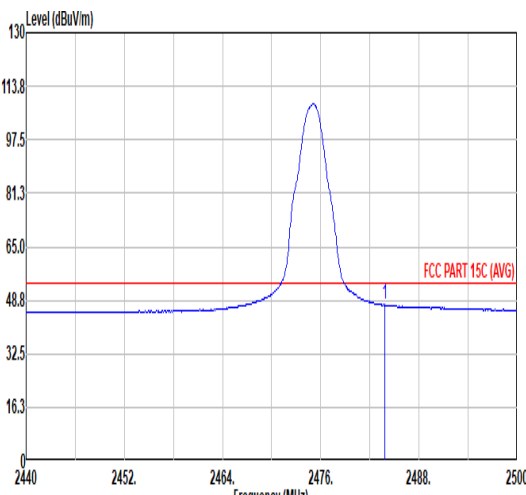
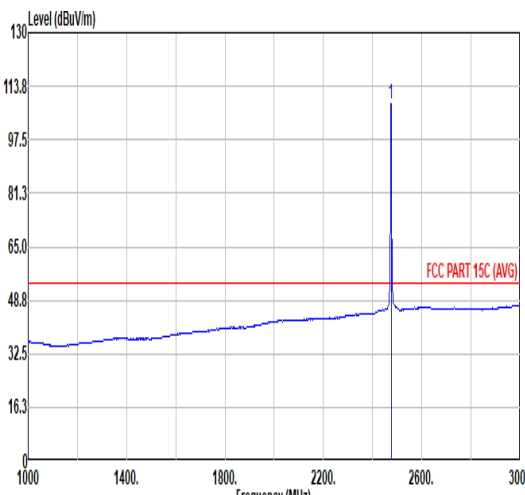


Mode	3																																																																																																		
	Band Edge																																																																																																		
	2400-2483.5_Zigbee_CH25_2475MHz																																																																																																		
ANT	1																																																																																																		
Pol.	Vertical						Fundamental																																																																																												
Peak																																																																																																			
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2484.52</td><td>59.07</td><td>74.00</td><td>-14.93</td><td>50.25</td><td>32.52</td><td>7.26</td><td>36.96</td><td>6.00</td><td>360</td><td>252</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2484.52	59.07	74.00	-14.93	50.25	32.52	7.26	36.96	6.00	360	252	PEAK	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2475.00</td><td>111.80</td><td>-----</td><td>-----</td><td>103.03</td><td>32.48</td><td>7.24</td><td>36.95</td><td>6.00</td><td>360</td><td>252</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2475.00	111.80	-----	-----	103.03	32.48	7.24	36.95	6.00	360	252
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2484.52	59.07	74.00	-14.93	50.25	32.52	7.26	36.96	6.00	360	252	PEAK																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2475.00	111.80	-----	-----	103.03	32.48	7.24	36.95	6.00	360	252	PEAK																																																																																							
Avg																																																																																																			
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2483.00</td><td>47.37</td><td>54.00</td><td>-6.63</td><td>38.55</td><td>32.52</td><td>7.26</td><td>36.96</td><td>6.00</td><td>360</td><td>252</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.00	47.37	54.00	-6.63	38.55	32.52	7.26	36.96	6.00	360	252	AVERAGE	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2475.00</td><td>108.30</td><td>-----</td><td>-----</td><td>99.53</td><td>32.48</td><td>7.24</td><td>36.95</td><td>6.00</td><td>360</td><td>252</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2475.00	108.30	-----	-----	99.53	32.48	7.24	36.95	6.00	360	252
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2483.00	47.37	54.00	-6.63	38.55	32.52	7.26	36.96	6.00	360	252	AVERAGE																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2475.00	108.30	-----	-----	99.53	32.48	7.24	36.95	6.00	360	252	AVERAGE																																																																																							

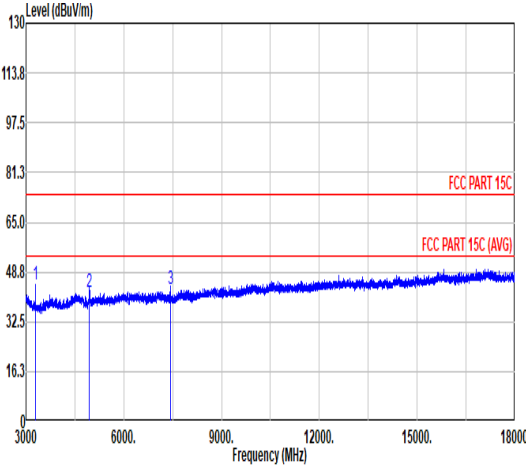
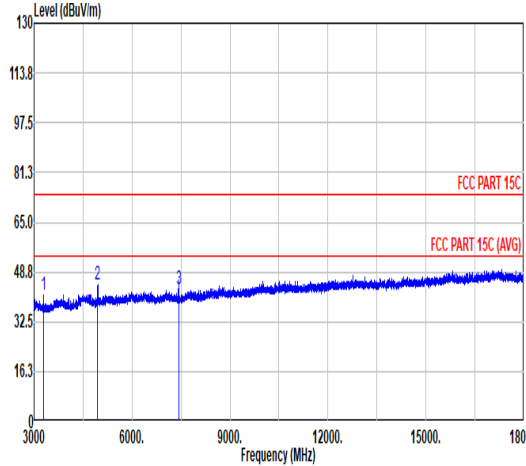
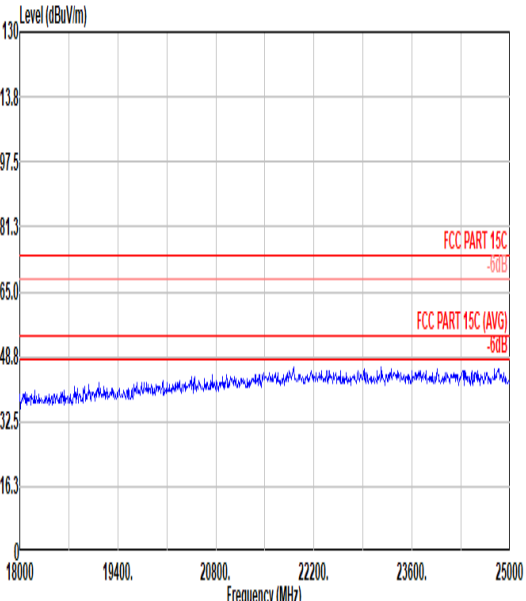
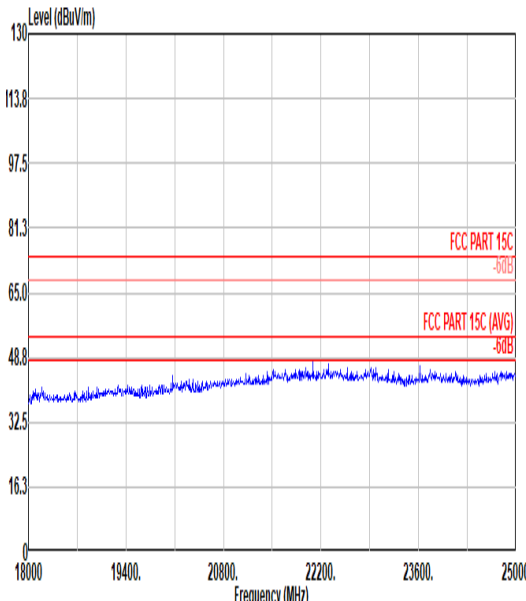


Mode	3																																																																																																																																																						
	Harmonic																																																																																																																																																						
	2400-2483.5_Zigbee_CH25_2475MHz																																																																																																																																																						
ANT	1																																																																																																																																																						
Pol.	Horizontal						Vertical																																																																																																																																																
Peak Avg																																																																																																																																																							
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>3300.00</td><td>44.74</td><td>86.49</td><td>-41.75</td><td>69.19</td><td>32.70</td><td>8.41</td><td>65.56</td><td>0.00</td><td>---</td><td>---</td><td>PEAK</td></tr><tr><td>2</td><td>4950.00</td><td>42.37</td><td>74.00</td><td>-31.63</td><td>63.28</td><td>34.00</td><td>10.39</td><td>65.30</td><td>0.00</td><td>---</td><td>---</td><td>PEAK</td></tr><tr><td>3</td><td>7425.00</td><td>42.97</td><td>74.00</td><td>-31.03</td><td>61.26</td><td>35.72</td><td>12.76</td><td>66.77</td><td>0.00</td><td>---</td><td>---</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	3300.00	44.74	86.49	-41.75	69.19	32.70	8.41	65.56	0.00	---	---	PEAK	2	4950.00	42.37	74.00	-31.63	63.28	34.00	10.39	65.30	0.00	---	---	PEAK	3	7425.00	42.97	74.00	-31.03	61.26	35.72	12.76	66.77	0.00	---	---	PEAK	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>3300.00</td><td>41.09</td><td>76.89</td><td>-35.80</td><td>65.54</td><td>32.70</td><td>8.41</td><td>65.56</td><td>0.00</td><td>---</td><td>---</td><td>PEAK</td></tr><tr><td>2</td><td>4950.00</td><td>44.51</td><td>74.00</td><td>-29.49</td><td>65.42</td><td>34.00</td><td>10.39</td><td>65.30</td><td>0.00</td><td>---</td><td>---</td><td>PEAK</td></tr><tr><td>3</td><td>7425.00</td><td>43.01</td><td>74.00</td><td>-30.99</td><td>61.30</td><td>35.72</td><td>12.76</td><td>66.77</td><td>0.00</td><td>---</td><td>---</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	3300.00	41.09	76.89	-35.80	65.54	32.70	8.41	65.56	0.00	---	---	PEAK	2	4950.00	44.51	74.00	-29.49	65.42	34.00	10.39	65.30	0.00	---	---	PEAK	3	7425.00	43.01	74.00	-30.99	61.30	35.72	12.76	66.77	0.00	---	---
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																													
1	3300.00	44.74	86.49	-41.75	69.19	32.70	8.41	65.56	0.00	---	---	PEAK																																																																																																																																											
2	4950.00	42.37	74.00	-31.63	63.28	34.00	10.39	65.30	0.00	---	---	PEAK																																																																																																																																											
3	7425.00	42.97	74.00	-31.03	61.26	35.72	12.76	66.77	0.00	---	---	PEAK																																																																																																																																											
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																													
1	3300.00	41.09	76.89	-35.80	65.54	32.70	8.41	65.56	0.00	---	---	PEAK																																																																																																																																											
2	4950.00	44.51	74.00	-29.49	65.42	34.00	10.39	65.30	0.00	---	---	PEAK																																																																																																																																											
3	7425.00	43.01	74.00	-30.99	61.30	35.72	12.76	66.77	0.00	---	---	PEAK																																																																																																																																											
Peak Avg																																																																																																																																																							

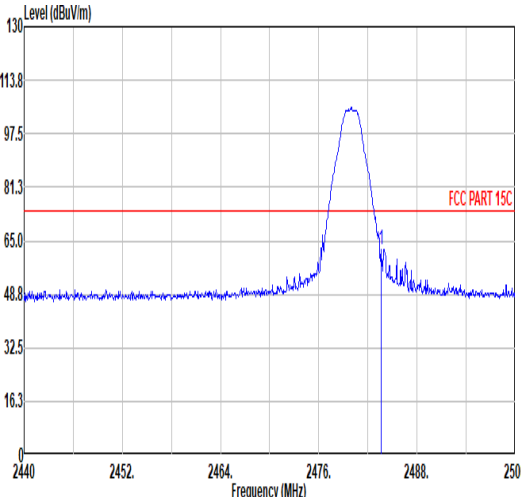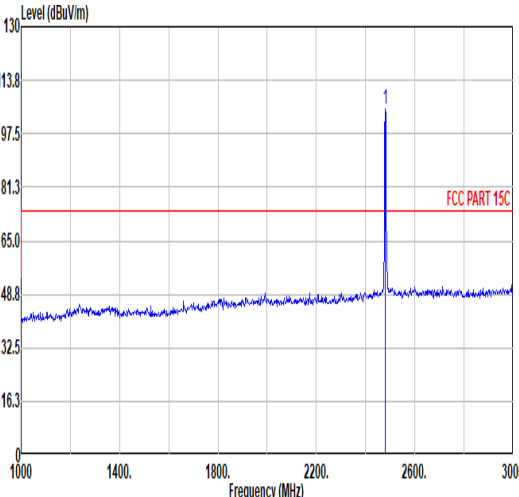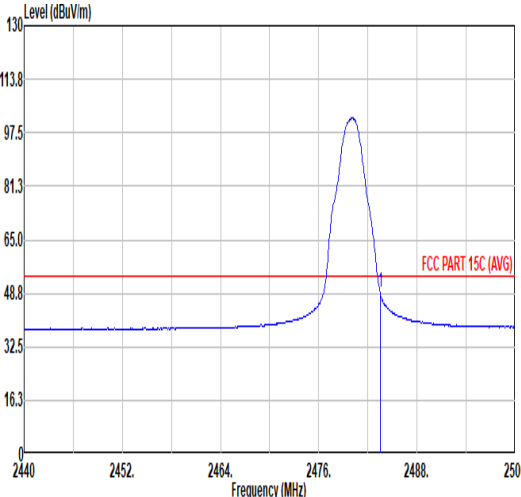
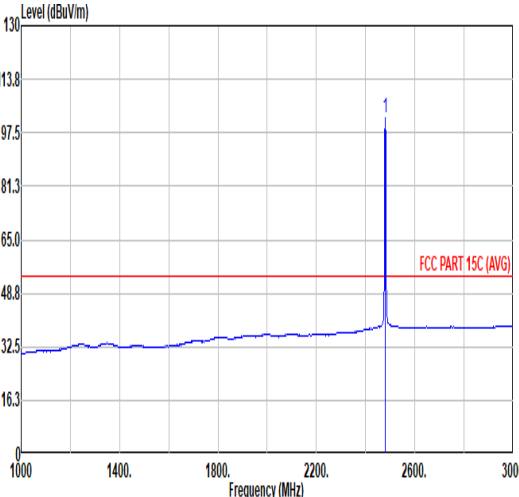


Mode	4																																																																																																			
	Band Edge																																																																																																			
	2400-2483.5_Zigbee_CH26_2480MHz																																																																																																			
ANT	1																																																																																																			
Pol.	Horizontal						Fundamental																																																																																													
Peak	 Level (dBuV/m) Frequency (MHz) FCC PART 15C <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2483.62</td><td>62.47</td><td>74.00</td><td>-11.53</td><td>54.24</td><td>31.93</td><td>7.26</td><td>36.96</td><td>6.00</td><td>191</td><td>171</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.62	62.47	74.00	-11.53	54.24	31.93	7.26	36.96	6.00	191	171	PEAK	 Level (dBuV/m) Frequency (MHz) FCC PART 15C <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2480.00</td><td>105.15</td><td>-----</td><td>-----</td><td>96.94</td><td>31.92</td><td>7.25</td><td>36.96</td><td>6.00</td><td>191</td><td>171</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2480.00	105.15	-----	-----	96.94	31.92	7.25	36.96	6.00	191	171	PEAK
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	2483.62	62.47	74.00	-11.53	54.24	31.93	7.26	36.96	6.00	191	171	PEAK																																																																																								
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	2480.00	105.15	-----	-----	96.94	31.92	7.25	36.96	6.00	191	171	PEAK																																																																																								
Avg	 Level (dBuV/m) Frequency (MHz) FCC PART 15C (AVG) <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2483.50</td><td>48.87</td><td>54.00</td><td>-5.13</td><td>40.64</td><td>31.93</td><td>7.26</td><td>36.96</td><td>6.00</td><td>191</td><td>171</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.50	48.87	54.00	-5.13	40.64	31.93	7.26	36.96	6.00	191	171	AVERAGE	 Level (dBuV/m) Frequency (MHz) FCC PART 15C (AVG) <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2480.00</td><td>101.91</td><td>-----</td><td>-----</td><td>93.70</td><td>31.92</td><td>7.25</td><td>36.96</td><td>6.00</td><td>191</td><td>171</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2480.00	101.91	-----	-----	93.70	31.92	7.25	36.96	6.00	191	171	AVERAGE
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	2483.50	48.87	54.00	-5.13	40.64	31.93	7.26	36.96	6.00	191	171	AVERAGE																																																																																								
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	2480.00	101.91	-----	-----	93.70	31.92	7.25	36.96	6.00	191	171	AVERAGE																																																																																								

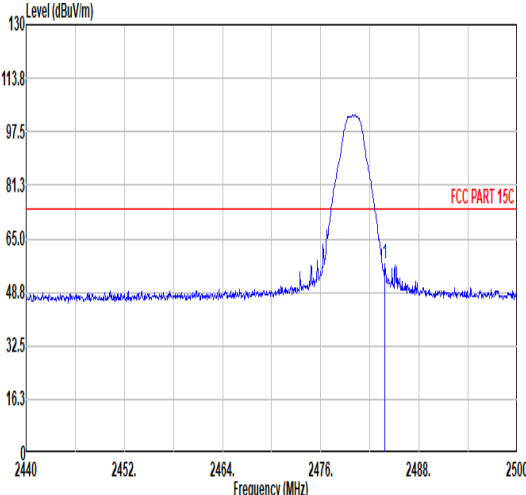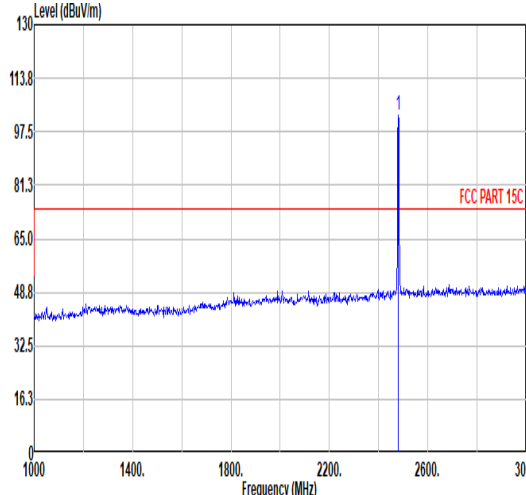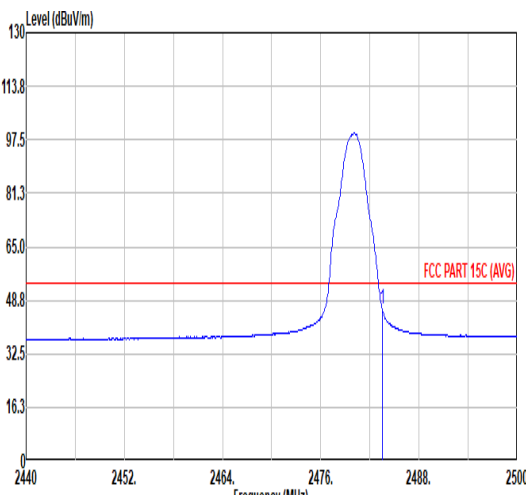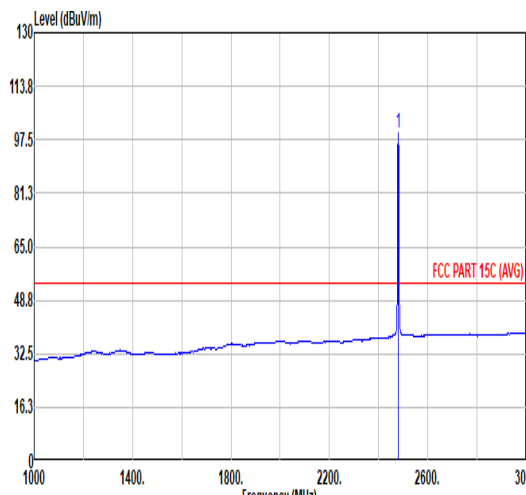

Mode	4																																																																																																		
	Band Edge																																																																																																		
	2400-2483.5_Zigbee_CH26_2480MHz																																																																																																		
ANT	1																																																																																																		
Pol.	Vertical						Fundamental																																																																																												
Peak																																																																																																			
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2483.00</td><td>57.61</td><td>74.00</td><td>-16.39</td><td>49.37</td><td>31.94</td><td>7.26</td><td>36.96</td><td>6.00</td><td>392</td><td>224</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.00	57.61	74.00	-16.39	49.37	31.94	7.26	36.96	6.00	392	224	PEAK	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2480.00</td><td>102.55</td><td>-----</td><td>-----</td><td>94.34</td><td>31.92</td><td>7.25</td><td>36.96</td><td>6.00</td><td>392</td><td>224</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2480.00	102.55	-----	-----	94.34	31.92	7.25	36.96	6.00	392	224
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2483.00	57.61	74.00	-16.39	49.37	31.94	7.26	36.96	6.00	392	224	PEAK																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2480.00	102.55	-----	-----	94.34	31.92	7.25	36.96	6.00	392	224	PEAK																																																																																							
Avg																																																																																																			
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2483.50</td><td>46.06</td><td>54.00</td><td>-7.94</td><td>37.83</td><td>31.93</td><td>7.26</td><td>36.96</td><td>6.00</td><td>392</td><td>224</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.50	46.06	54.00	-7.94	37.83	31.93	7.26	36.96	6.00	392	224	AVERAGE	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2480.00</td><td>99.38</td><td>-----</td><td>-----</td><td>91.17</td><td>31.92</td><td>7.25</td><td>36.96</td><td>6.00</td><td>392</td><td>224</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2480.00	99.38	-----	-----	91.17	31.92	7.25	36.96	6.00	392	224
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2483.50	46.06	54.00	-7.94	37.83	31.93	7.26	36.96	6.00	392	224	AVERAGE																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2480.00	99.38	-----	-----	91.17	31.92	7.25	36.96	6.00	392	224	AVERAGE																																																																																							

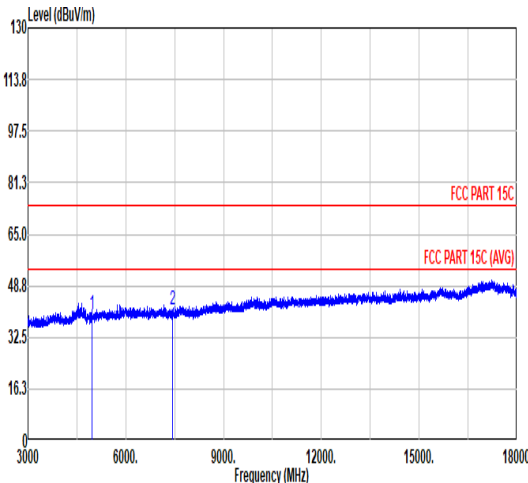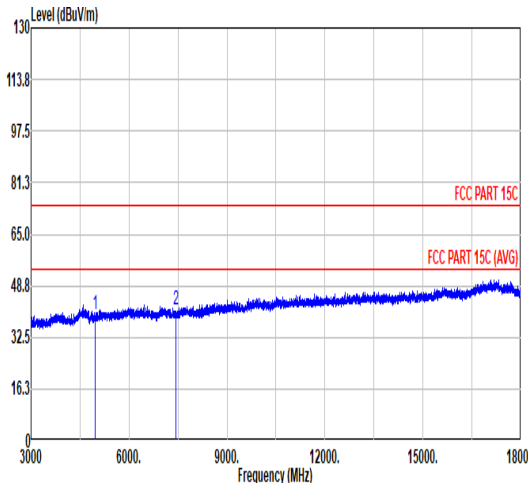

Mode	4																																																																																																																																											
	Harmonic																																																																																																																																											
	2400-2483.5_Zigbee_CH26_2480MHz																																																																																																																																											
ANT	1																																																																																																																																											
Pol.	Horizontal						Vertical																																																																																																																																					
Peak Avg																																																																																																																																												
	<table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>4960.00</td><td>39.94</td><td>74.00</td><td>-34.06</td><td>61.05</td><td>33.00</td><td>10.40</td><td>65.31</td><td>0.00</td><td>---</td><td>---</td><td>PEAK</td></tr><tr><td>2</td><td>7440.00</td><td>41.16</td><td>74.00</td><td>-32.84</td><td>59.59</td><td>35.60</td><td>12.78</td><td>66.81</td><td>0.00</td><td>---</td><td>---</td><td>PEAK</td></tr></table>								Limit		Read		Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	4960.00	39.94	74.00	-34.06	61.05	33.00	10.40	65.31	0.00	---	---	PEAK	2	7440.00	41.16	74.00	-32.84	59.59	35.60	12.78	66.81	0.00	---	---	PEAK	<table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>4960.00</td><td>39.77</td><td>74.00</td><td>-34.23</td><td>60.88</td><td>33.80</td><td>10.40</td><td>65.31</td><td>0.00</td><td>---</td><td>---</td><td>PEAK</td></tr><tr><td>2</td><td>7440.00</td><td>41.04</td><td>74.00</td><td>-32.96</td><td>59.47</td><td>35.60</td><td>12.78</td><td>66.81</td><td>0.00</td><td>---</td><td>---</td><td>PEAK</td></tr></table>								Limit		Read		Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	4960.00	39.77	74.00	-34.23	60.88	33.80	10.40	65.31	0.00	---	---	PEAK	2	7440.00	41.04	74.00	-32.96	59.47	35.60	12.78	66.81	0.00	---	---	PEAK
			Limit		Read		Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																	
1	4960.00	39.94	74.00	-34.06	61.05	33.00	10.40	65.31	0.00	---	---	PEAK																																																																																																																																
2	7440.00	41.16	74.00	-32.84	59.59	35.60	12.78	66.81	0.00	---	---	PEAK																																																																																																																																
		Limit		Read		Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																	
1	4960.00	39.77	74.00	-34.23	60.88	33.80	10.40	65.31	0.00	---	---	PEAK																																																																																																																																
2	7440.00	41.04	74.00	-32.96	59.47	35.60	12.78	66.81	0.00	---	---	PEAK																																																																																																																																



Mode	5																																																																																																																																																																																																											
	LF																																																																																																																																																																																																											
	2400-2483.5_ Zigbee _CH25_2475MHz																																																																																																																																																																																																											
ANT	1																																																																																																																																																																																																											
Pol.	Horizontal						Vertical																																																																																																																																																																																																					
Peak QP	<table><tr><th></th><th>Freq</th><th>Level</th><th>Over Limit</th><th>Limit Line</th><th>ReadAntenna Level Factor</th><th>Cable Loss Factor</th><th>Preamplifier Loss Factor</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th><th>Pol/Phas</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>30.00</td><td>20.77</td><td>-19.23</td><td>40.00</td><td>10.41</td><td>42.67</td><td>0.71</td><td>33.02</td><td>---</td><td>---</td><td>Peak HORIZONTAL</td></tr><tr><td>2</td><td>95.96</td><td>28.45</td><td>-15.05</td><td>43.50</td><td>32.36</td><td>27.49</td><td>1.47</td><td>32.87</td><td>---</td><td>---</td><td>Peak HORIZONTAL</td></tr><tr><td>3</td><td>239.52</td><td>35.80</td><td>-10.20</td><td>46.00</td><td>40.40</td><td>25.82</td><td>2.36</td><td>32.78</td><td>---</td><td>---</td><td>Peak HORIZONTAL</td></tr><tr><td>4</td><td>631.40</td><td>25.73</td><td>-20.27</td><td>46.00</td><td>21.27</td><td>33.62</td><td>3.83</td><td>32.99</td><td>---</td><td>---</td><td>Peak HORIZONTAL</td></tr><tr><td>5</td><td>749.74</td><td>28.39</td><td>-17.61</td><td>46.00</td><td>21.16</td><td>35.83</td><td>4.19</td><td>32.79</td><td>---</td><td>---</td><td>Peak HORIZONTAL</td></tr><tr><td>6</td><td>976.72</td><td>30.44</td><td>-23.56</td><td>54.00</td><td>19.69</td><td>37.23</td><td>4.78</td><td>31.26</td><td>---</td><td>---</td><td>Peak HORIZONTAL</td></tr></table> <table><tr><th></th><th>Freq</th><th>Level</th><th>Over Limit</th><th>Limit Line</th><th>ReadAntenna Level Factor</th><th>Cable Loss Factor</th><th>Preamplifier Loss Factor</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th><th>Pol/Phas</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>32.91</td><td>21.22</td><td>-18.78</td><td>40.00</td><td>26.42</td><td>26.98</td><td>0.76</td><td>32.94</td><td>---</td><td>---</td><td>Peak VERTICAL</td></tr><tr><td>2</td><td>79.47</td><td>22.28</td><td>-17.72</td><td>40.00</td><td>29.05</td><td>24.68</td><td>1.32</td><td>32.77</td><td>---</td><td>---</td><td>Peak VERTICAL</td></tr><tr><td>3</td><td>239.52</td><td>25.53</td><td>-20.47</td><td>46.00</td><td>24.80</td><td>31.15</td><td>2.36</td><td>32.78</td><td>---</td><td>---</td><td>Peak VERTICAL</td></tr><tr><td>4</td><td>560.59</td><td>31.09</td><td>-14.91</td><td>46.00</td><td>24.82</td><td>35.76</td><td>3.61</td><td>33.10</td><td>---</td><td>---</td><td>Peak VERTICAL</td></tr><tr><td>5</td><td>631.40</td><td>27.18</td><td>-18.82</td><td>46.00</td><td>19.09</td><td>37.25</td><td>3.83</td><td>32.99</td><td>---</td><td>---</td><td>Peak VERTICAL</td></tr><tr><td>6</td><td>976.72</td><td>30.13</td><td>-23.87</td><td>54.00</td><td>16.66</td><td>39.95</td><td>4.78</td><td>31.26</td><td>---</td><td>---</td><td>Peak VERTICAL</td></tr></table>													Freq	Level	Over Limit	Limit Line	ReadAntenna Level Factor	Cable Loss Factor	Preamplifier Loss Factor	A/Pos	T/Pos	Remark	Pol/Phas		MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg		1	30.00	20.77	-19.23	40.00	10.41	42.67	0.71	33.02	---	---	Peak HORIZONTAL	2	95.96	28.45	-15.05	43.50	32.36	27.49	1.47	32.87	---	---	Peak HORIZONTAL	3	239.52	35.80	-10.20	46.00	40.40	25.82	2.36	32.78	---	---	Peak HORIZONTAL	4	631.40	25.73	-20.27	46.00	21.27	33.62	3.83	32.99	---	---	Peak HORIZONTAL	5	749.74	28.39	-17.61	46.00	21.16	35.83	4.19	32.79	---	---	Peak HORIZONTAL	6	976.72	30.44	-23.56	54.00	19.69	37.23	4.78	31.26	---	---	Peak HORIZONTAL		Freq	Level	Over Limit	Limit Line	ReadAntenna Level Factor	Cable Loss Factor	Preamplifier Loss Factor	A/Pos	T/Pos	Remark	Pol/Phas		MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg		1	32.91	21.22	-18.78	40.00	26.42	26.98	0.76	32.94	---	---	Peak VERTICAL	2	79.47	22.28	-17.72	40.00	29.05	24.68	1.32	32.77	---	---	Peak VERTICAL	3	239.52	25.53	-20.47	46.00	24.80	31.15	2.36	32.78	---	---	Peak VERTICAL	4	560.59	31.09	-14.91	46.00	24.82	35.76	3.61	33.10	---	---	Peak VERTICAL	5	631.40	27.18	-18.82	46.00	19.09	37.25	3.83	32.99	---	---	Peak VERTICAL	6	976.72	30.13	-23.87	54.00	16.66	39.95	4.78	31.26	---	---	Peak VERTICAL
	Freq	Level	Over Limit	Limit Line	ReadAntenna Level Factor	Cable Loss Factor	Preamplifier Loss Factor	A/Pos	T/Pos	Remark	Pol/Phas																																																																																																																																																																																																	
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																																																																		
1	30.00	20.77	-19.23	40.00	10.41	42.67	0.71	33.02	---	---	Peak HORIZONTAL																																																																																																																																																																																																	
2	95.96	28.45	-15.05	43.50	32.36	27.49	1.47	32.87	---	---	Peak HORIZONTAL																																																																																																																																																																																																	
3	239.52	35.80	-10.20	46.00	40.40	25.82	2.36	32.78	---	---	Peak HORIZONTAL																																																																																																																																																																																																	
4	631.40	25.73	-20.27	46.00	21.27	33.62	3.83	32.99	---	---	Peak HORIZONTAL																																																																																																																																																																																																	
5	749.74	28.39	-17.61	46.00	21.16	35.83	4.19	32.79	---	---	Peak HORIZONTAL																																																																																																																																																																																																	
6	976.72	30.44	-23.56	54.00	19.69	37.23	4.78	31.26	---	---	Peak HORIZONTAL																																																																																																																																																																																																	
	Freq	Level	Over Limit	Limit Line	ReadAntenna Level Factor	Cable Loss Factor	Preamplifier Loss Factor	A/Pos	T/Pos	Remark	Pol/Phas																																																																																																																																																																																																	
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																																																																		
1	32.91	21.22	-18.78	40.00	26.42	26.98	0.76	32.94	---	---	Peak VERTICAL																																																																																																																																																																																																	
2	79.47	22.28	-17.72	40.00	29.05	24.68	1.32	32.77	---	---	Peak VERTICAL																																																																																																																																																																																																	
3	239.52	25.53	-20.47	46.00	24.80	31.15	2.36	32.78	---	---	Peak VERTICAL																																																																																																																																																																																																	
4	560.59	31.09	-14.91	46.00	24.82	35.76	3.61	33.10	---	---	Peak VERTICAL																																																																																																																																																																																																	
5	631.40	27.18	-18.82	46.00	19.09	37.25	3.83	32.99	---	---	Peak VERTICAL																																																																																																																																																																																																	
6	976.72	30.13	-23.87	54.00	16.66	39.95	4.78	31.26	---	---	Peak VERTICAL																																																																																																																																																																																																	

Appendix D. Duty Cycle Plots

Mode	Duty Cycle(%)	T(ms)	1/T(kHz)	VBW Setting
Zigbee	96.44	4.319	0.232	0.24KHz

Zigbee mode

