

Appendix Test Data for BT(BDR/EDR) (Conducted Measurement)

Product Name: Bluetooth Mechanical Keyboard

Trade Mark: Keychron

Test Model: Keychron Q3 Pro

FCC ID: 2ASF4-Q3PRO

Environmental Conditions

Temperature:	25.5°C
Relative Humidity:	55%
ATM Pressure:	100.0 kPa
Test Engineer:	Anna Hu
Supervised by:	Hugo Chen
NOTE	N/A


Appendix A: 20dB Emission Bandwidth

Test Result


TestMode	Antenna	Channel	20db EBW[MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
DH5	Ant1	2402	1.023	2401.460	2402.483	---	---
		2441	0.960	2440.523	2441.483	---	---
		2480	0.978	2479.526	2480.504	---	---

Test Graphs


DH5_Ant1_2402

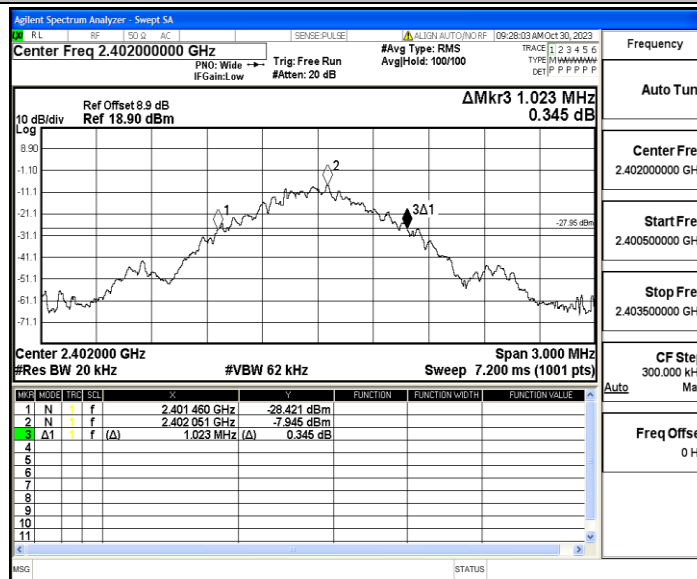

DH5_Ant1_2441

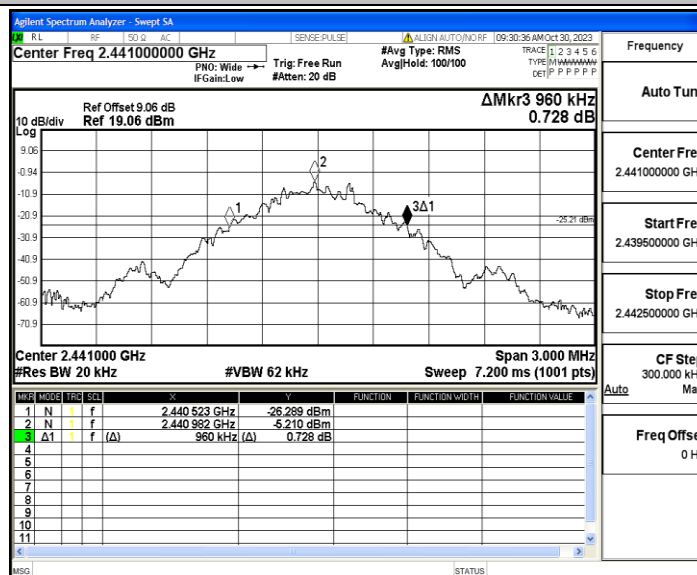

DH5_Ant1_2480

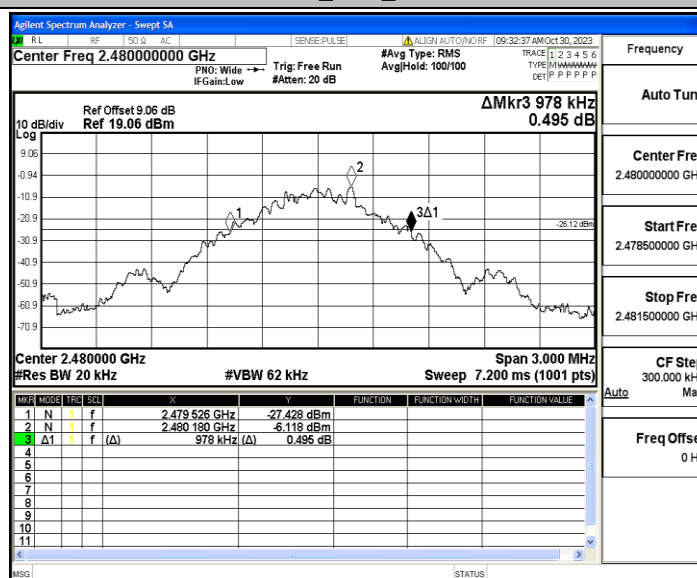


Appendix B: Occupied Channel Bandwidth

Test Result

TestMode	Antenna	Channel	OCB [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
DH5	Ant1	2402	0.93631	2401.5260	2402.4623	---	---
		2441	0.91778	2440.5392	2441.4569	---	---
		2480	0.92722	2479.5369	2480.4641	---	---

Test Graphs


DH5_Ant1_2402

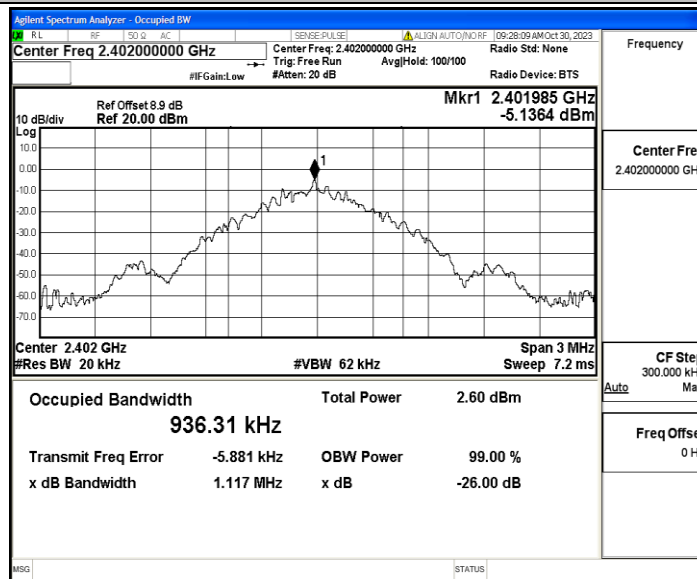

DH5_Ant1_2441



DH5_Ant1_2480

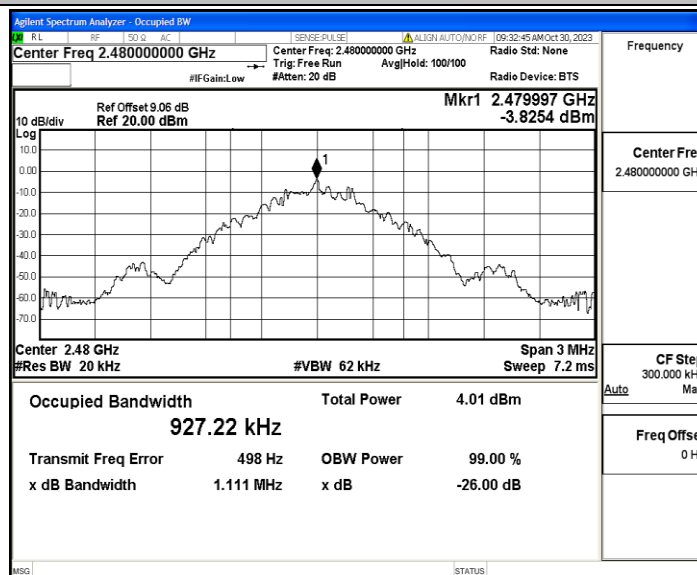


Appendix C: Maximum Peak conducted output power

Test Result


TestMode	Antenna	Channel	Result[dBm]	Limit[dBm]	Verdict
DH5	Ant1	2402	-4.09	≤20.97	PASS
		2441	-3.06	≤20.97	PASS
		2480	-3.15	≤20.97	PASS

Test Graphs


DH5_Ant1_2402

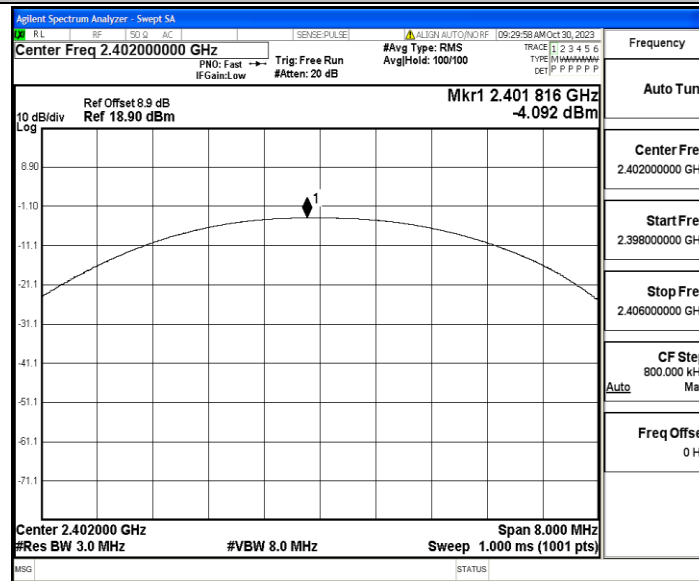

DH5_Ant1_2441

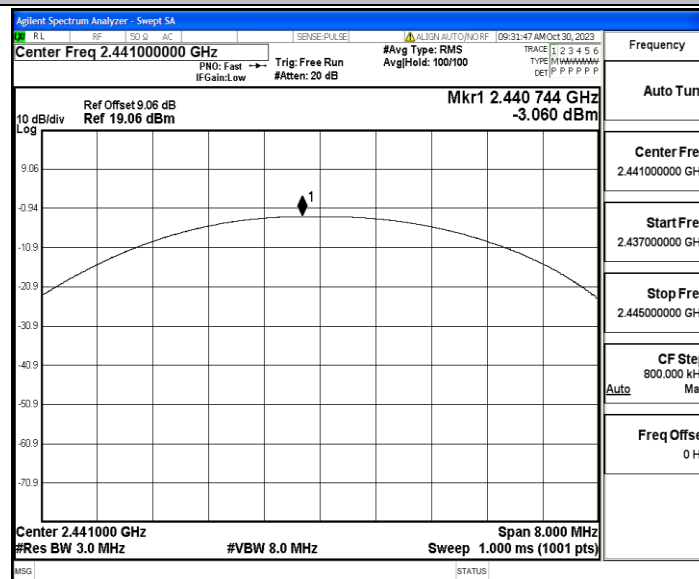

DH5_Ant1_2480

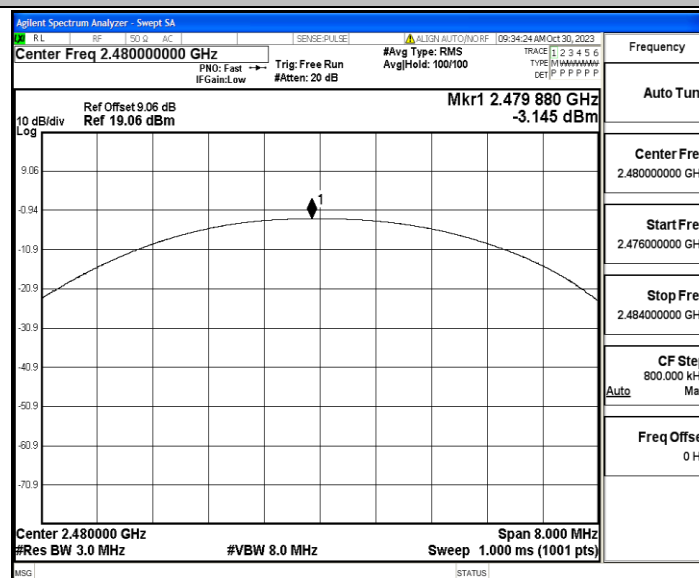


Appendix D: Carrier frequency separation

Test Result

TestMode	Antenna	Channel	Result[MHz]	Limit[MHz]	Verdict
DH5	Ant1	Hop	0.988	≥ 0.682	PASS

Test Graphs

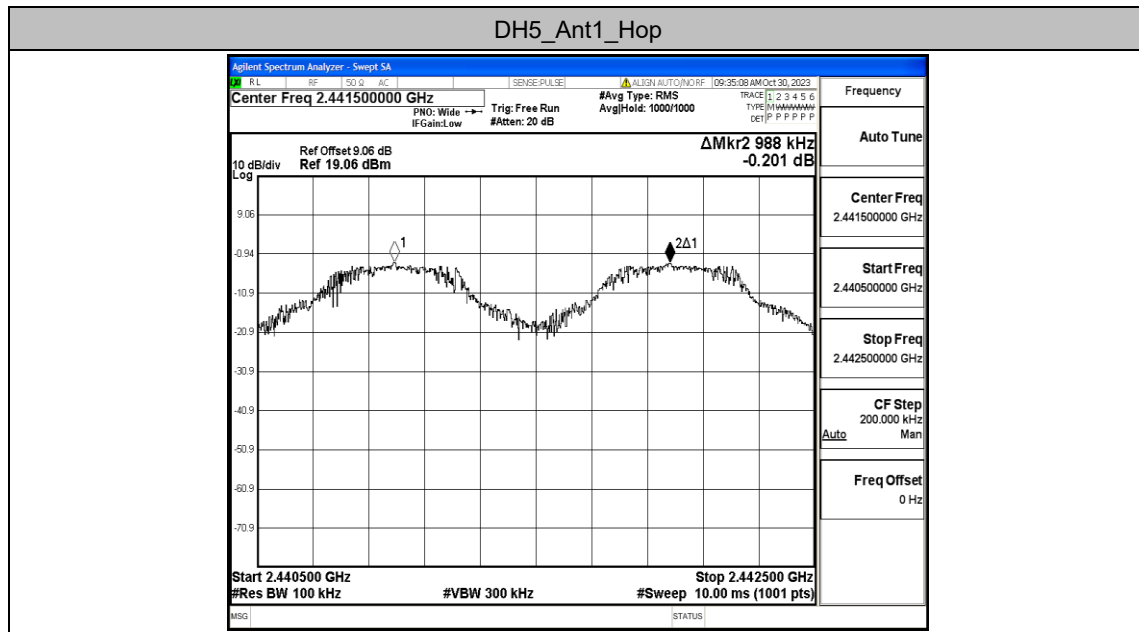


Appendix E: Time of occupancy

Test Result

TestMode	Antenna	Channel	BurstWidth [ms]	TotalHops [Num]	Result[s]	Limit[s]	Verdict
DH5	Ant1	Hop	2.939	120	0.353	≤0.4	PASS

Test Graphs

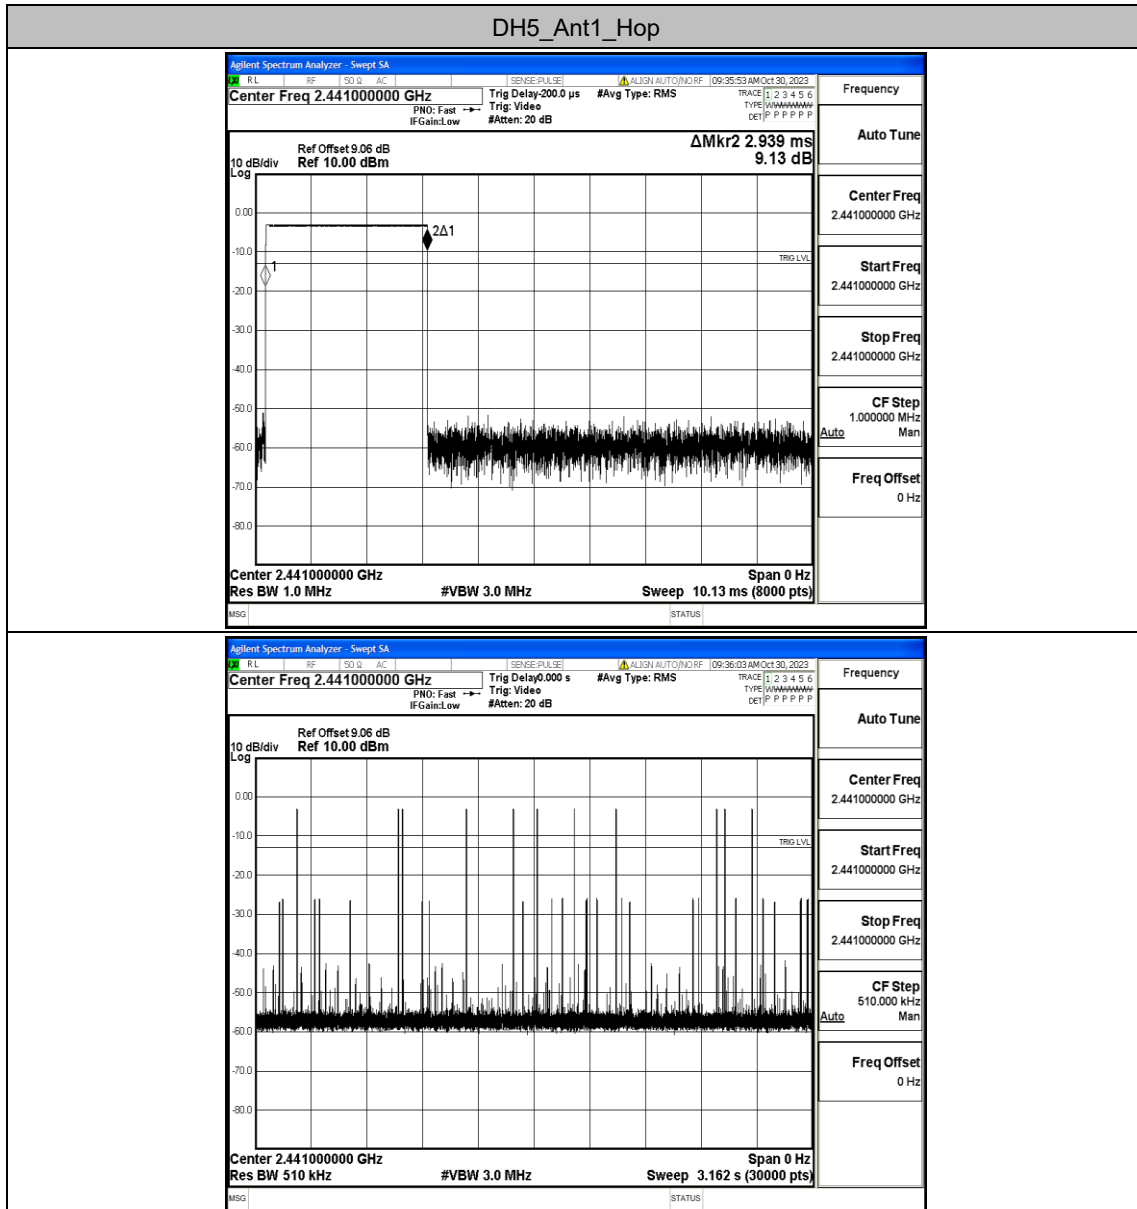


Appendix F: Number of hopping channels

Test Result

TestMode	Antenna	Channel	Result[Num]	Limit[Num]	Verdict
DH5	Ant1	Hop	79	≥15	PASS

Test Graphs

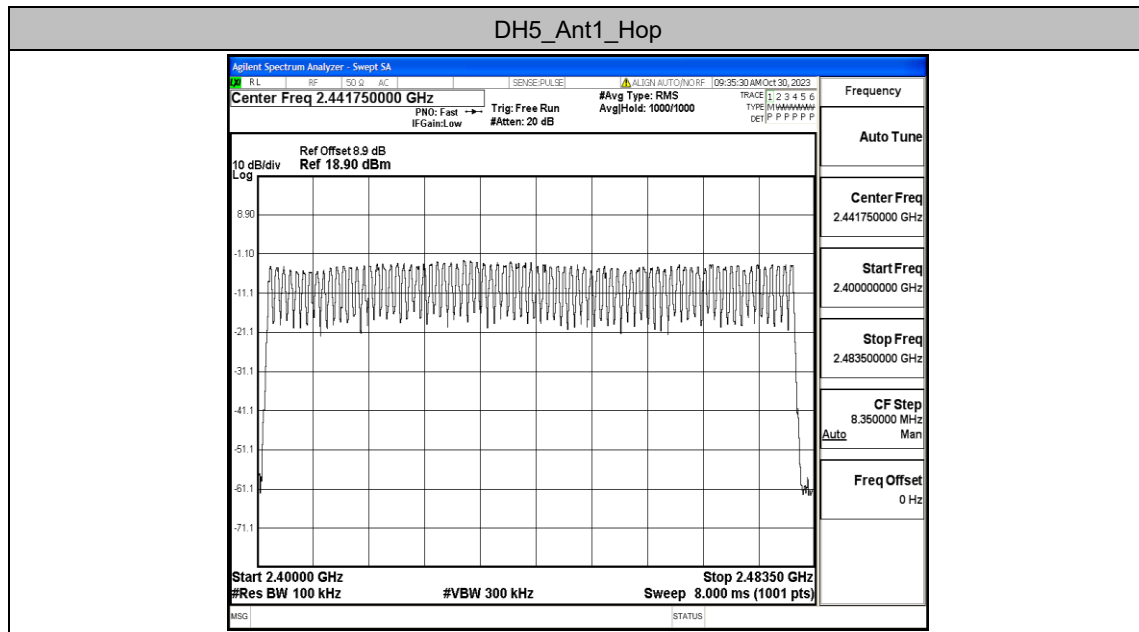


Appendix G: Band edge measurements

Test Result


TestMode	Antenna	ChName	Channel	RefLevel [dBm]	Result [dBm]	Limit [dBm]	Verdict
DH5	Ant1	Low	2402	-4.10	-50.37	≤-24.1	PASS
		High	2480	-3.14	-59.32	≤-23.14	PASS
		Low	Hop_2402	-4.97	-60.78	≤-24.97	PASS
		High	Hop_2480	-3.13	-58.65	≤-23.13	PASS

Test Graphs


DH5_Ant1_Low_2402

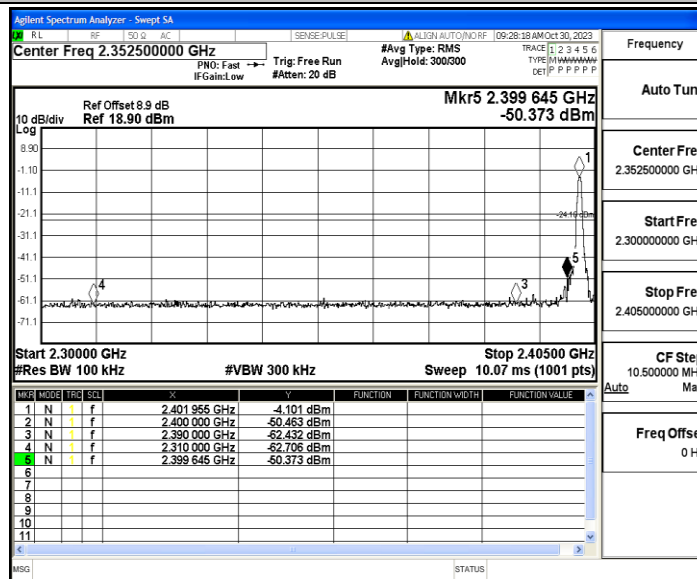


DH5_Ant1_High_2480

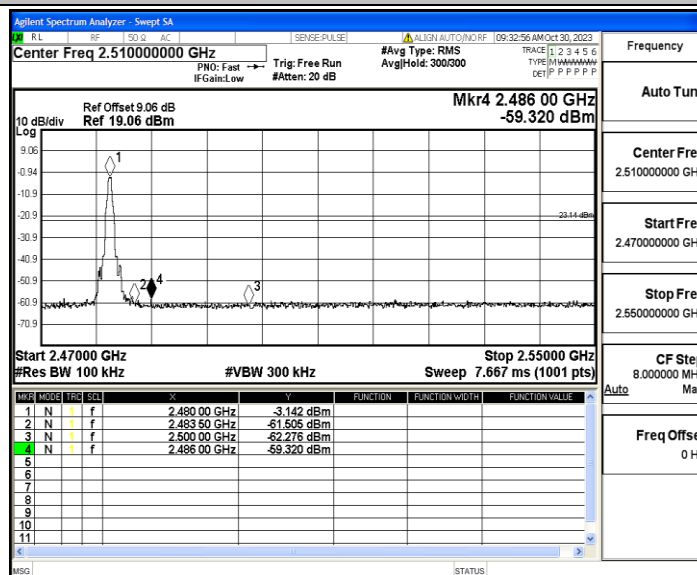

DH5_Ant1_Low_Hop_2402

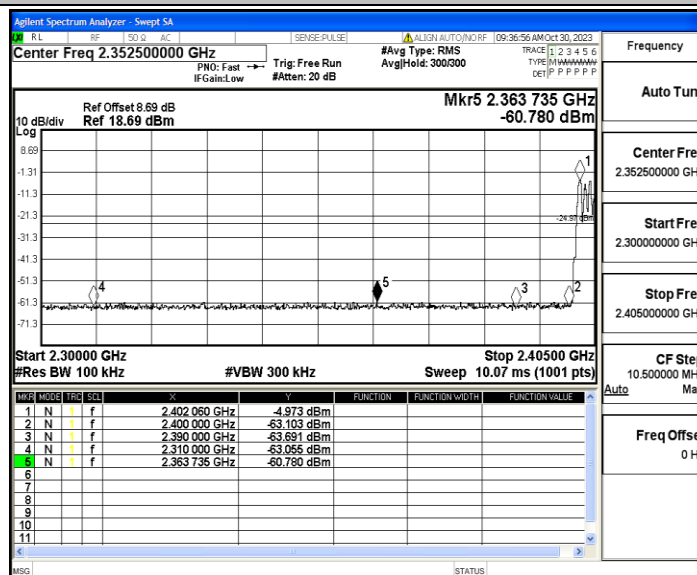

DH5_Ant1_High_Hop_2480

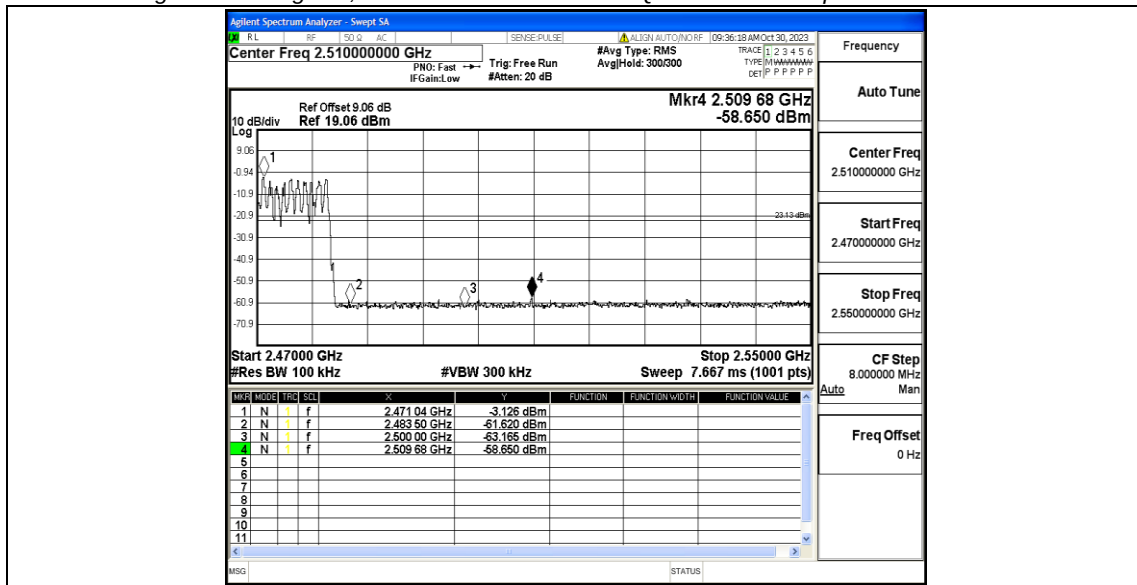


Appendix H: Conducted Spurious Emission

Test Result


TestMode	Antenna	Channel	FreqRange [MHz]	RefLevel [dBm]	Result [dBm]	Limit [dBm]	Verdict
DH5	Ant1	2402	Reference	-5.00	-5.00	---	PASS
			30~1000	-5.00	-62.97	≤-25	PASS
			1000~26500	-5.00	-50.01	≤-25	PASS
		2441	Reference	-4.23	-4.23	---	PASS
			30~1000	-4.23	-63.04	≤-24.23	PASS
			1000~26500	-4.23	-50.36	≤-24.23	PASS
		2480	Reference	-3.95	-3.95	---	PASS
			30~1000	-3.95	-62.61	≤-23.95	PASS
			1000~26500	-3.95	-50.51	≤-23.95	PASS

Test Graphs


DH5_Ant1_2402_0~Reference

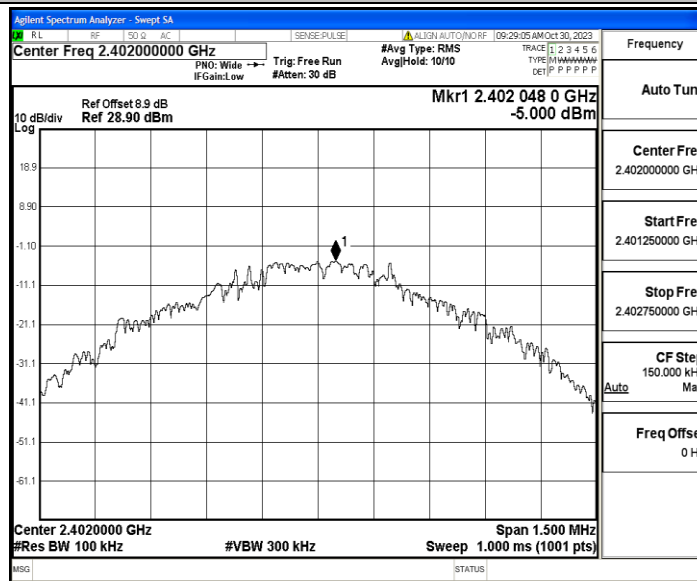


DH5_Ant1_2402_30~1000

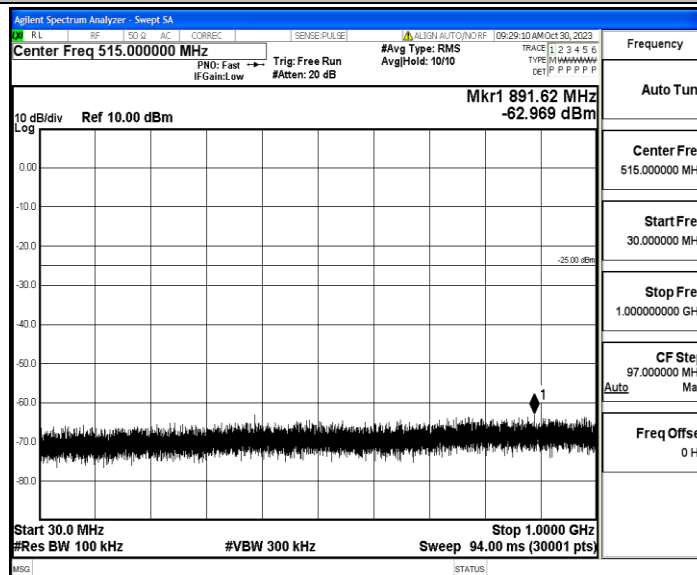


DH5_Ant1_2402_1000~26500

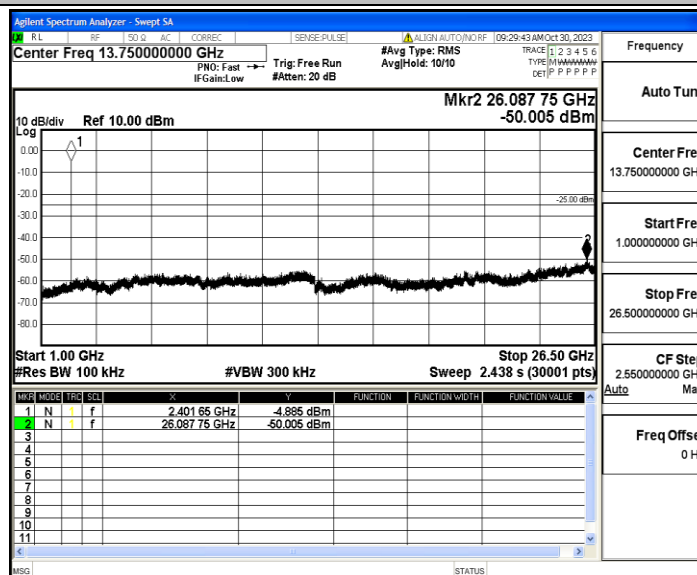


DH5_Ant1_2441_0~Reference

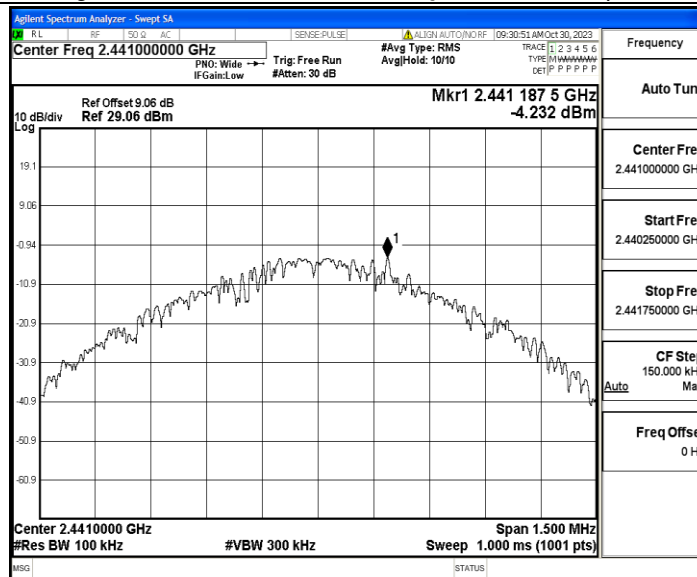


DH5_Ant1_2441_30~1000

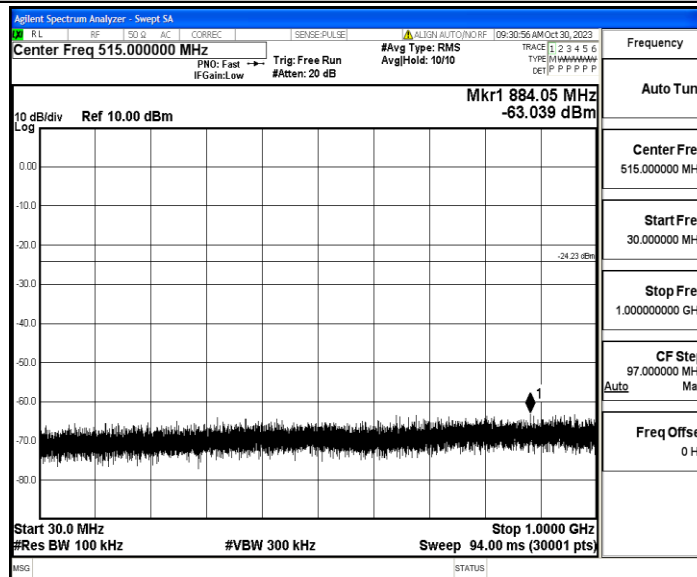


DH5_Ant1_2441_1000~26500

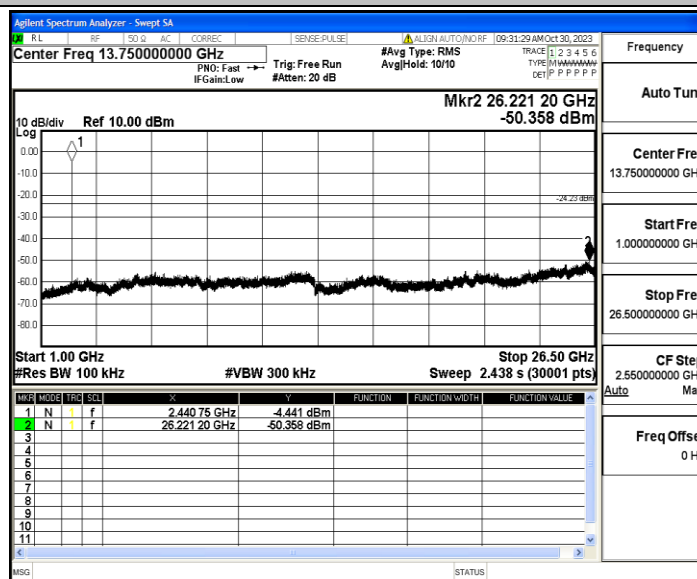


DH5_Ant1_2480_0~Reference

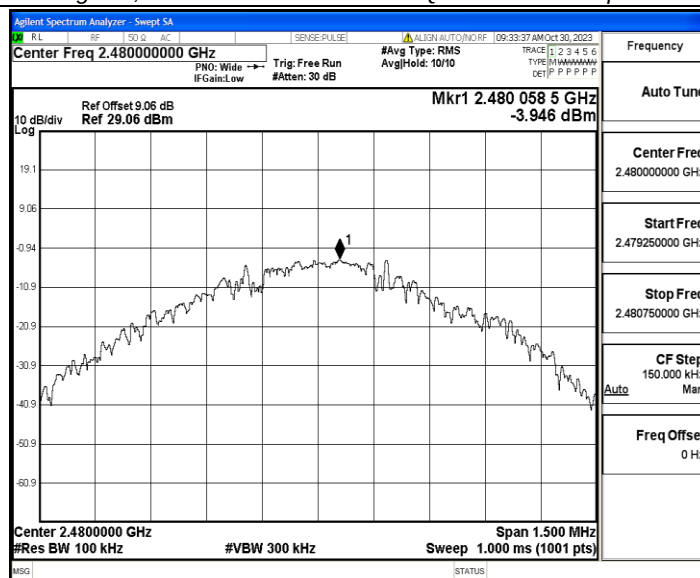

DH5_Ant1_2480_30~1000

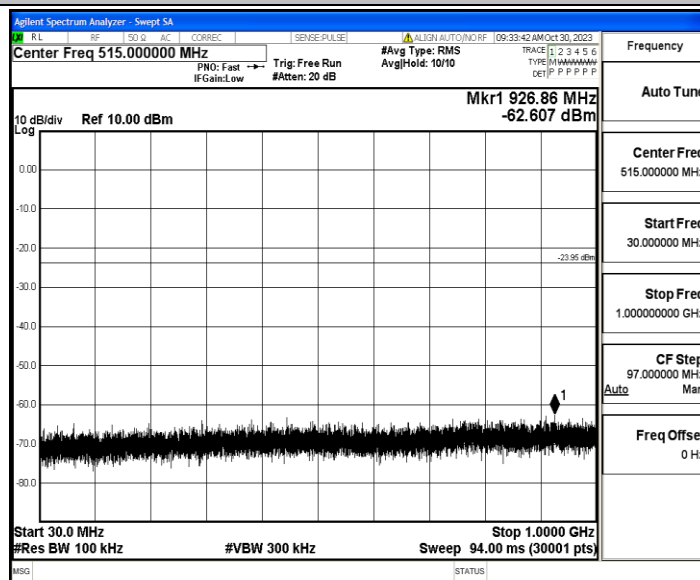

DH5_Ant1_2480_1000~26500

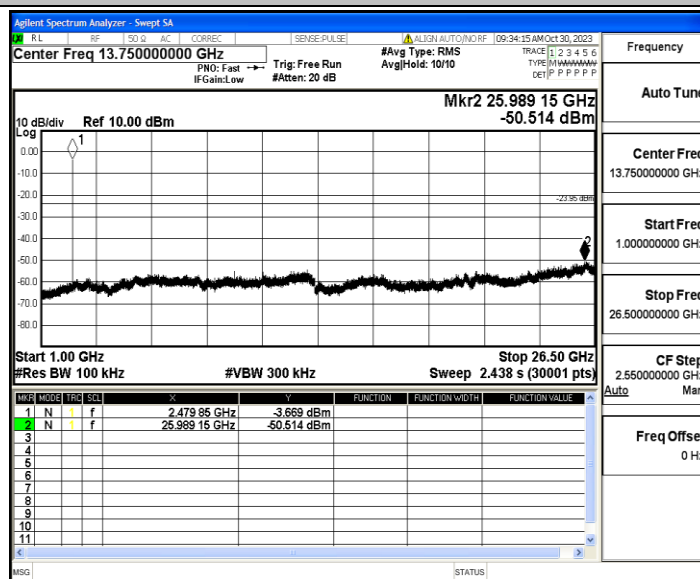


Appendix I: Duty Cycle

Test Result


TestMode	Antenna	Channel	Transmission Duration [ms]	Transmission Period [ms]	Duty Cycle [%]	1/T[kHz]
DH5	Ant1	2402	2.94	3.75	78.40	0.34
		2441	2.94	3.75	78.40	0.34
		2480	2.94	3.75	78.40	0.34

Test Graphs


DH5_Ant1_2402

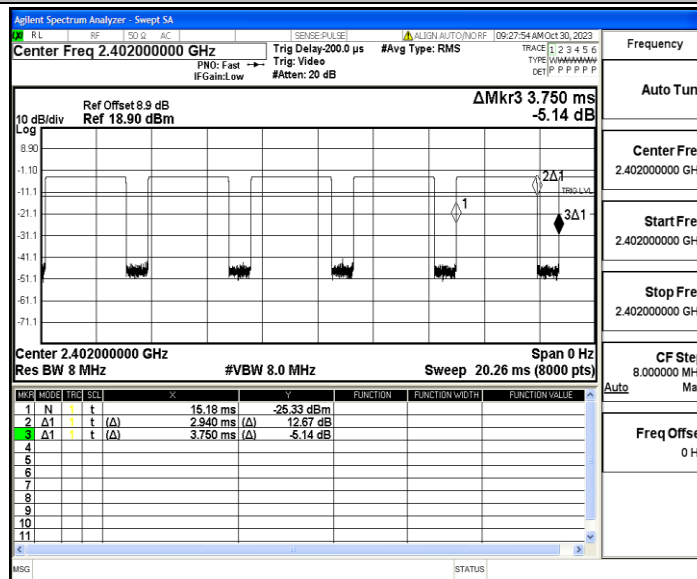

DH5_Ant1_2441

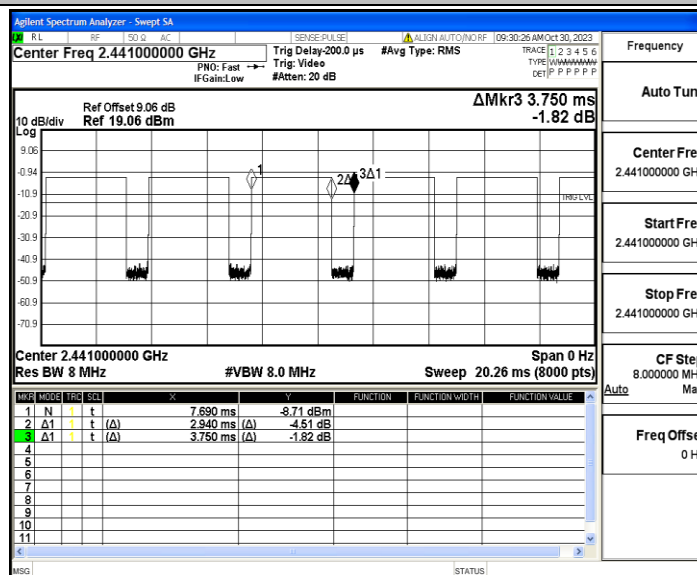

DH5_Ant1_2480

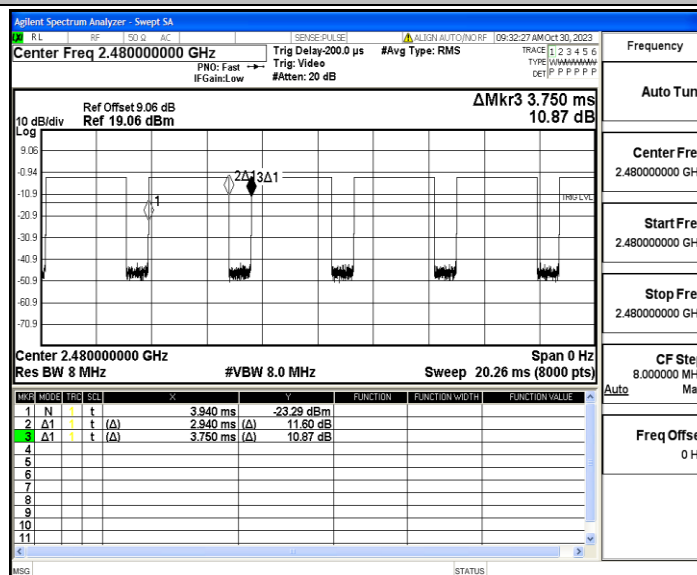

Appendix J: Emissions in Restricted Bands

Test Result


TestMode	Antenna	ChName	Channel	Detector	Freq(MHz)	Result(dBm)	Limit(dBm)	Verdict
DH5	Ant1	Low	2402	AV	2310.000	-59.55	≤-41.20	PASS
				AV	2389.565	-58.98	≤-41.20	PASS
				AV	2390.000	-59	≤-41.20	PASS
				Peak	2310.000	-53.1	≤-21.20	PASS
				Peak	2389.355	-48.5	≤-21.20	PASS
				Peak	2390.000	-52.17	≤-21.20	PASS
		High	2480	AV	2483.500	-56.95	≤-41.20	PASS
				AV	2483.520	-56.95	≤-41.20	PASS
				AV	2500.000	-58.5	≤-41.20	PASS
				Peak	2483.500	-51.42	≤-21.20	PASS
				Peak	2488.320	-45.48	≤-21.20	PASS
				Peak	2500.000	-51.61	≤-21.20	PASS

Note:


1. The Antenna Gain is compensated in the graph with 2dBi and Antenna Gain which is Higher.
2. The limit in dBm for average detector is conversion from 54dBuV/m, according to 15.209(a). The limit in dBm for peak detector is 20dB above the limit of average detector in dBm.

Test Graphs


DH5_Ant1_Low_2402_AV

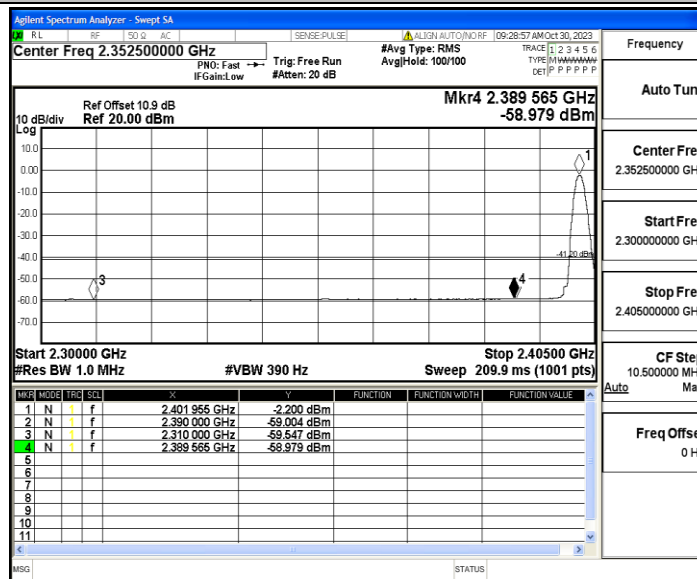

DH5_Ant1_Low_2402_Peak

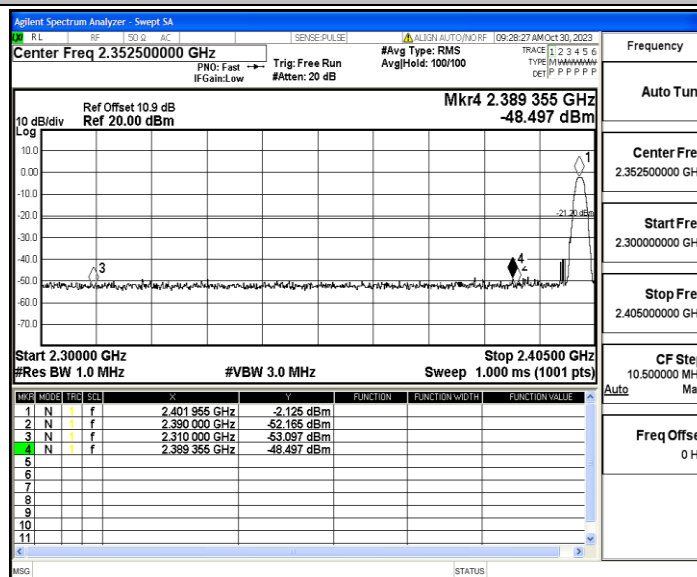

DH5_Ant1_High_2480_AV

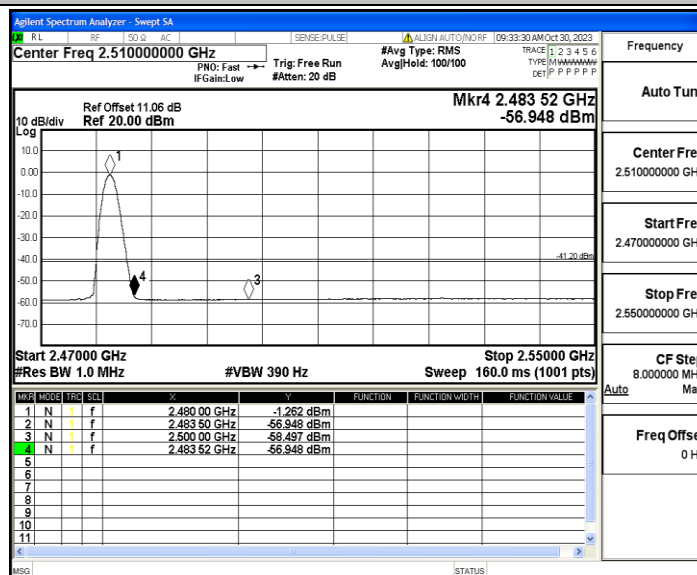

DH5_Ant1_High_2480_Peak

