

Test Plot 1#: GSM 850 Mid Body Right**DUT: POS terminal; Type: N92; Serial: 2OKA-1**

Communication System: Generic GPRS-4 slots (0); Frequency: 836.6MHz; Duty Cycle: 1:2
 Medium parameters used: $f = 836.6$ MHz; $\sigma = 0.924$ S/m; $\epsilon_r = 41.619$; $\rho = 1000$ kg/m³ ;
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(8.42, 9.5, 8.93) @ 836.6 MHz; Calibrated: 2024/3/27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (9x11x1):Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.943 W/kg


Zoom Scan (5x5x7) /Cube 0:Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 18.33 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 1.12 W/kg

SAR(1 g) = 0.787 W/kg; SAR(10 g) = 0.525 W/kg

Maximum value of SAR (measured) = 0.890 W/kg

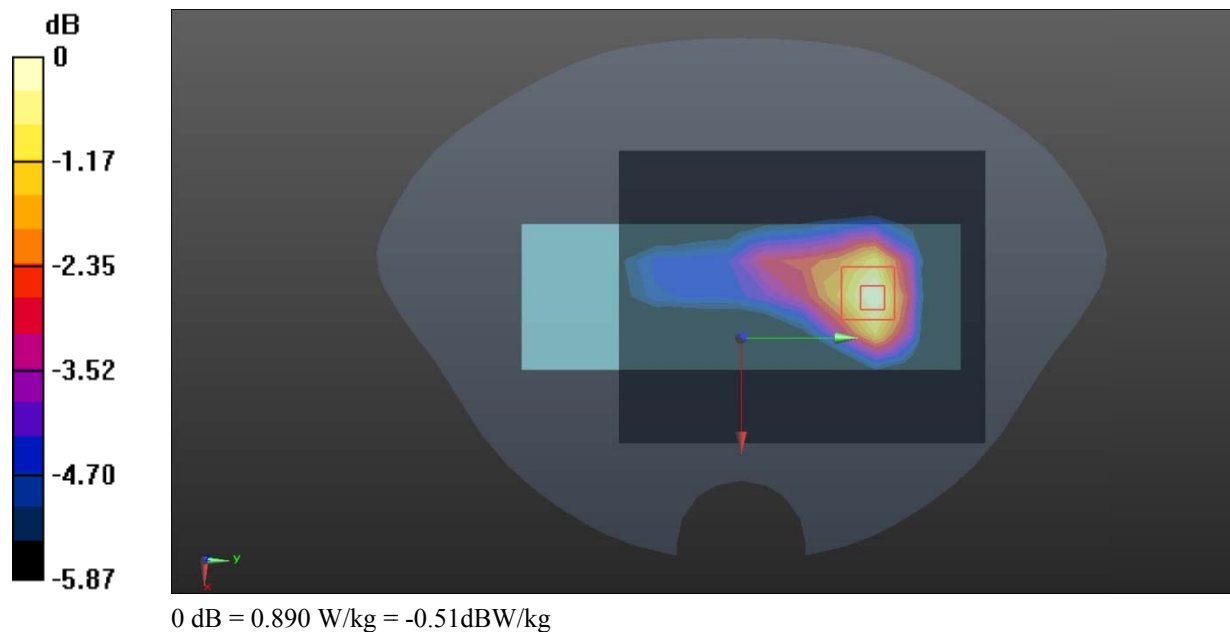

Test Plot 2#: PCS 1900 Mid Body Right**DUT: POS terminal; Type: N92; Serial: 2OKA-1**

Communication System: Generic GPRS-3 slots (0); Frequency: 1880MHz; Duty Cycle: 1:2.66
 Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.375 \text{ S/m}$; $\epsilon_r = 39.422$; $\rho = 1000 \text{ kg/m}^3$;
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(7.37, 8.32, 7.54) @ 1880 MHz; Calibrated: 2024/3/27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (9x11x1):Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 1.14 W/kg


Zoom Scan (5x5x7) /Cube 0:Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 4.573 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 1.81 W/kg

SAR(1 g) = 1.04 W/kg; SAR(10 g) = 0.598 W/kg

Maximum value of SAR (measured) = 1.24 W/kg

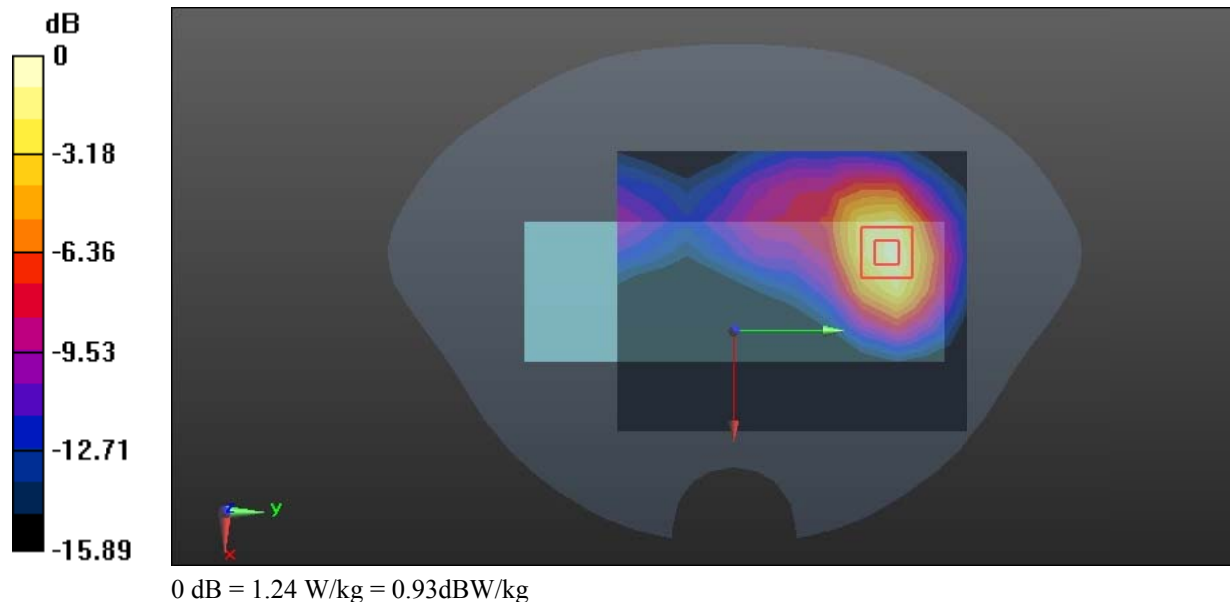

Test Plot 3#: WCDMA Band 2 High Body Right**DUT: POS terminal; Type: N92; Serial: 2OKA-1**

Communication System: WCDMA (0); Frequency: 1907.6 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1907.6$ MHz; $\sigma = 1.399$ S/m; $\epsilon_r = 39.279$; $\rho = 1000$ kg/m³ ;

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(7.37, 8.32, 7.54) @ 1907.6 MHz; Calibrated: 2024/3/27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (9x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 1.08 W/kg


Zoom Scan (5x5x7) /Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.010 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 1.52 W/kg

SAR(1 g) = 0.978 W/kg; SAR(10 g) = 0.590 W/kg

Maximum value of SAR (measured) = 1.17 W/kg

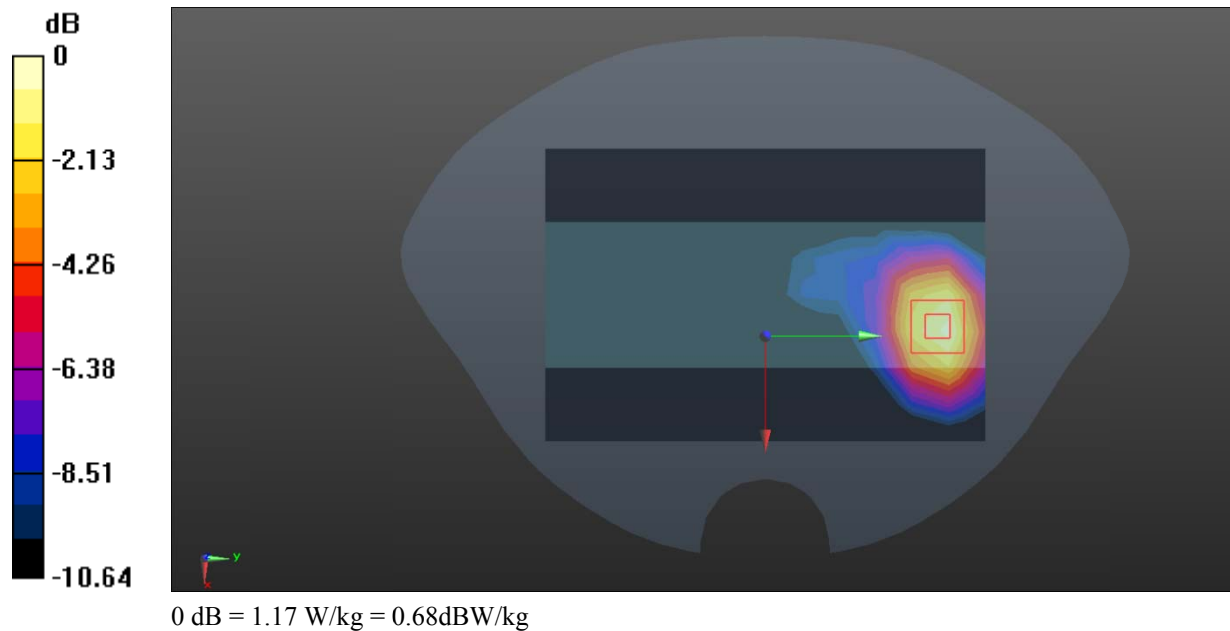

Test Plot 4#: WCDMA Band 5 Mid Body Right**DUT: POS terminal; Type: N92; Serial: 2OKA-1**

Communication System: WCDMA (0); Frequency:836.6MHz; Duty Cycle: 1:1

Medium parameters used: $f=836.6$ MHz; $\sigma = 0.924$ S/m; $\epsilon_r=41.619$; $\rho = 1000$ kg/m³ ;

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(8.42, 9.5, 8.93) @ 836.6 MHz; Calibrated: 2024/3/27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (9x11x1):Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.401 W/kg


Zoom Scan (5x5x7) /Cube 0:Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 13.25 V/m; Power Drift =0.06dB

Peak SAR (extrapolated) = 0.508 W/kg

SAR(1 g) = 0.352 W/kg; SAR(10 g) = 0.232 W/kg

Maximum value of SAR (measured) = 0.406 W/kg

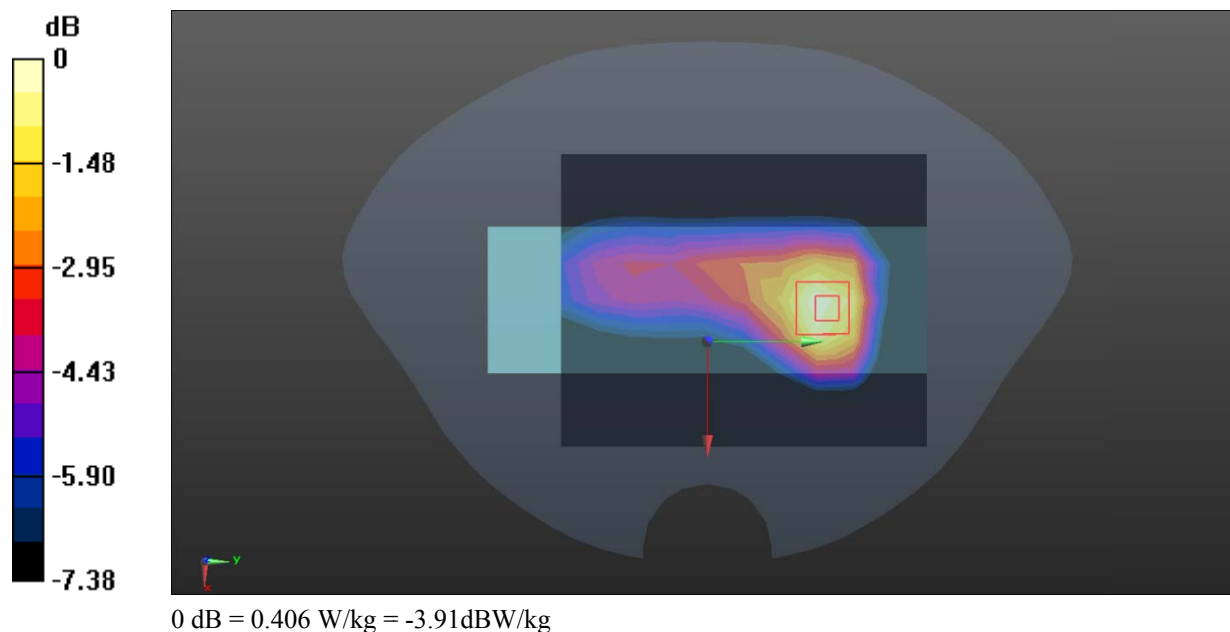

Test Plot 5#: LTE Band 2 1RB Mid Body Right**DUT: POS terminal; Type: N92; Serial: 2OKA-1**

Communication System: Generic FDD-LTE (0); Frequency: 1880MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.375$ S/m; $\epsilon_r = 39.422$; $\rho = 1000$ kg/m³;

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(7.37, 8.32, 7.54) @ 1880 MHz; Calibrated: 2024/3/27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (9x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 1.29 W/kg


Zoom Scan (5x5x7) /Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.759 V/m; Power Drift = 0.12dB

Peak SAR (extrapolated) = 1.93 W/kg

SAR(1 g) = 1.16 W/kg; SAR(10 g) = 0.674 W/kg

Maximum value of SAR (measured) = 1.41 W/kg

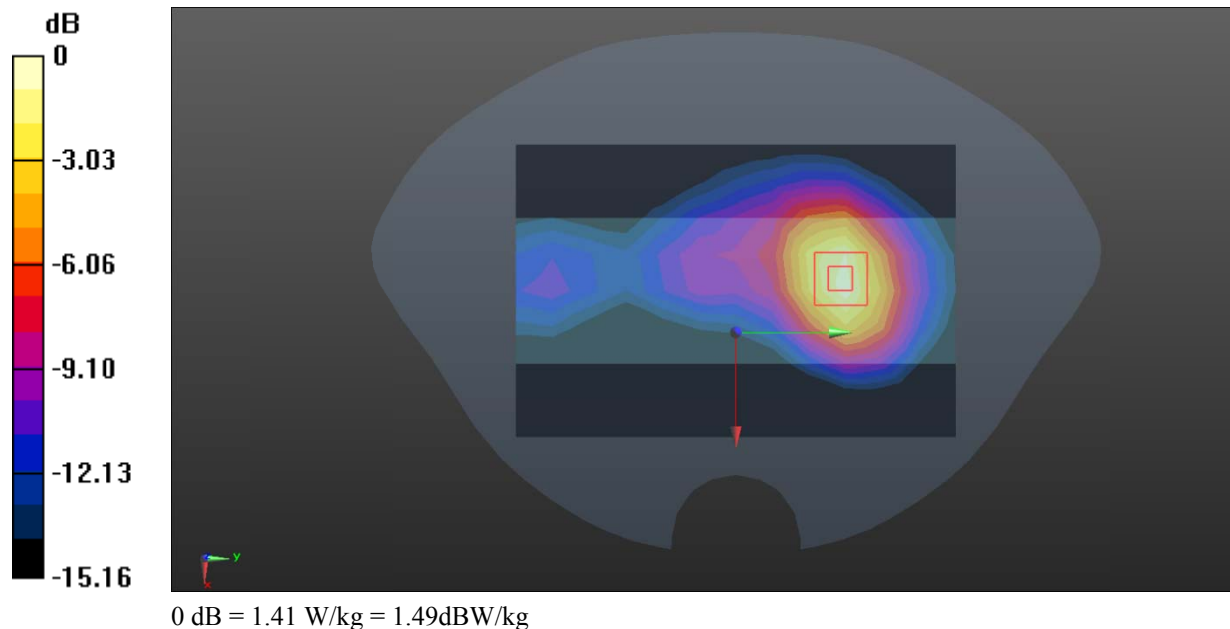

Test Plot 6#: LTE Band 4 1RB High Body Right**DUT: POS terminal; Type: N92; Serial: 2OKA-1**

Communication System: Generic FDD-LTE (0); Frequency: 1745 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 1745$ MHz; $\sigma = 1.371$ S/m; $\epsilon_r = 39.157$; $\rho = 1000$ kg/m³;
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(7.56, 8.56, 7.71) @ 1745 MHz; Calibrated: 2024/3/27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (9x9x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 1.20 W/kg


Zoom Scan (5x5x7) /Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 13.51 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 1.71 W/kg

SAR(1 g) = 1.09 W/kg; SAR(10 g) = 0.634 W/kg

Maximum value of SAR (measured) = 1.31 W/kg

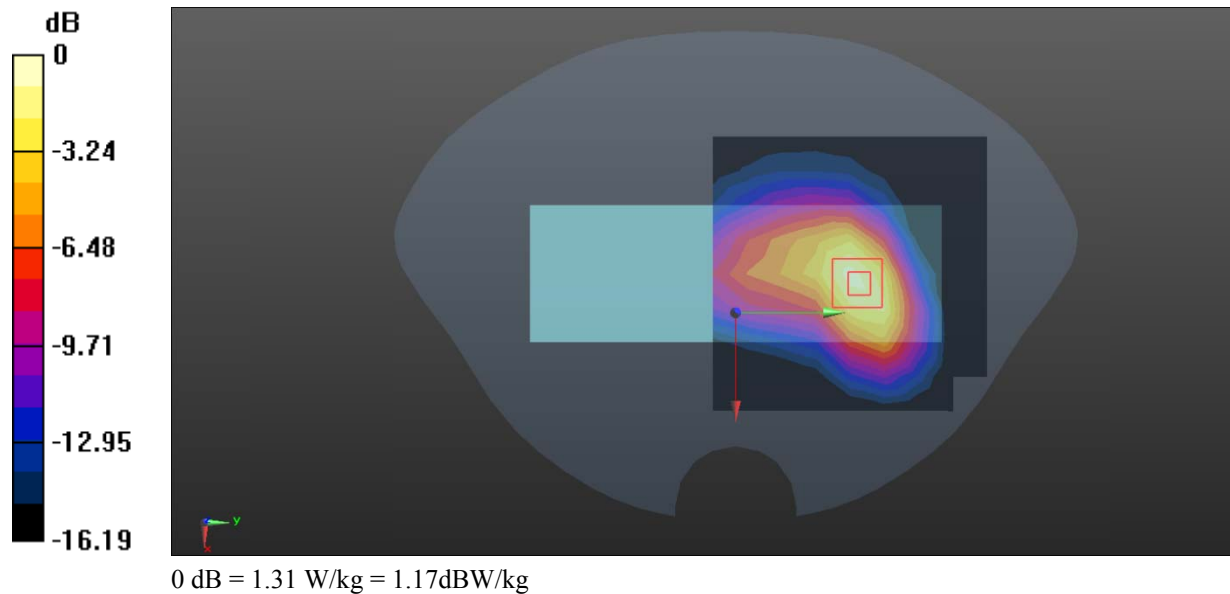

Test Plot 7#: LTE Band 5 1RB Mid Body Right**DUT: POS terminal; Type: N92; Serial: 2OKA-1**

Communication System: Generic FDD-LTE (0); Frequency:836.5MHz; Duty Cycle: 1:1

Medium parameters used: $f=836.5$ MHz; $\sigma = 0.924$ S/m; $\epsilon_r=41.62$; $\rho = 1000$ kg/m³ ;

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(8.42, 9.5, 8.93) @ 836.5 MHz; Calibrated: 2024/3/27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (9x17x1):Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.395 W/kg


Zoom Scan (5x5x7) /Cube 0:Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 14.93 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 0.512 W/kg

SAR(1 g) = 0.361 W/kg; SAR(10 g) = 0.244 W/kg

Maximum value of SAR (measured) = 0.414 W/kg

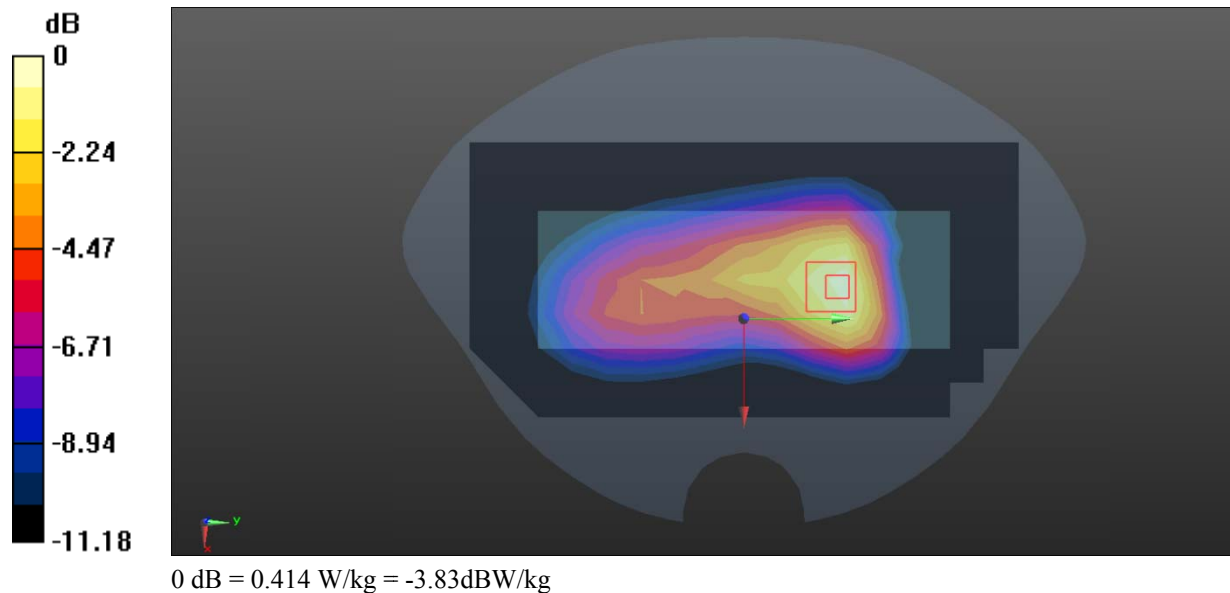

Test Plot 8#: LTE Band 7 1RB Mid Body Right**DUT: POS terminal; Type: N92; Serial: 2OKA-1**

Communication System: Generic FDD-LTE (0); Frequency: 2535 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 2535$ MHz; $\sigma = 1.908$ S/m; $\epsilon_r = 40.215$; $\rho = 1000$ kg/m³;
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(6.91, 7.77, 7.08) @ 2535 MHz; Calibrated: 2024/3/27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (11x16x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.791 W/kg


Zoom Scan (7x7x7) /Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 6.686 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 1.46 W/kg

SAR(1 g) = 0.724 W/kg; SAR(10 g) = 0.364 W/kg

Maximum value of SAR (measured) = 1.00 W/kg

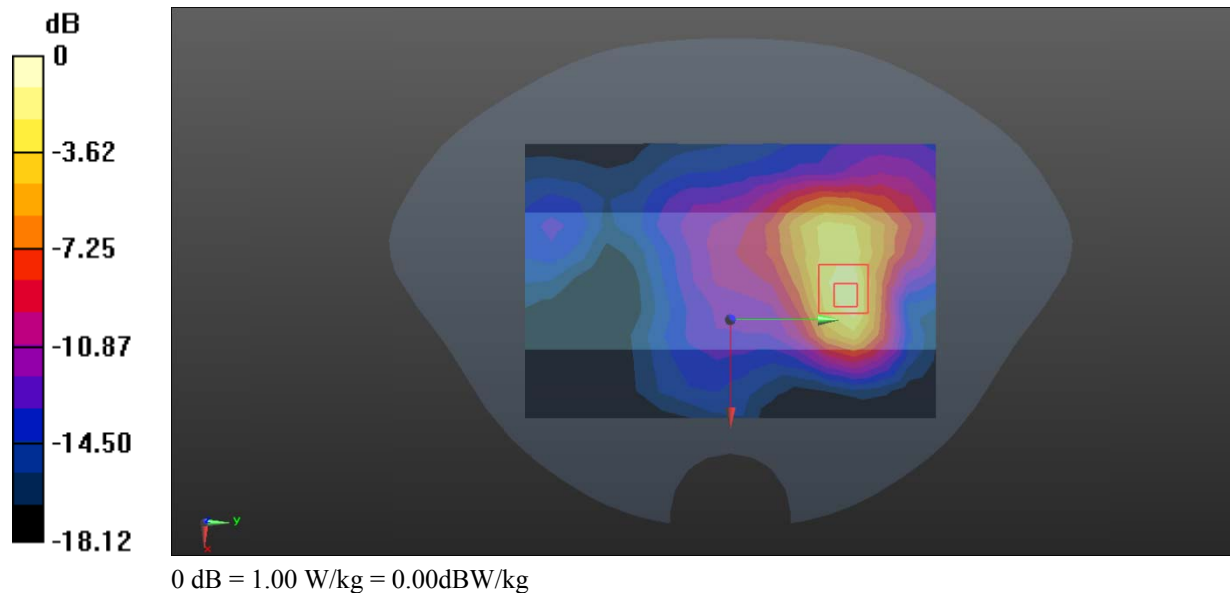

Test Plot 9#: LTE Band 41 1RB Mid Body Right**DUT: POS terminal; Type: N92; Serial: 2OKA-1**

Communication System: Generic TDD-LTE (0); Frequency: 2593 MHz; Duty Cycle: 1:1.58
 Medium parameters used: $f = 2593$ MHz; $\sigma = 2$ S/m; $\epsilon_r = 39.809$; $\rho = 1000$ kg/m³;
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(6.91, 7.77, 7.08) @ 2593 MHz; Calibrated: 2024/3/27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (11x11x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.316 W/kg


Zoom Scan (7x7x7) /Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 7.166 V/m; Power Drift = 0.14 dB

Peak SAR (extrapolated) = 0.519 W/kg

SAR(1 g) = 0.290 W/kg; SAR(10 g) = 0.154 W/kg

Maximum value of SAR (measured) = 0.362 W/kg

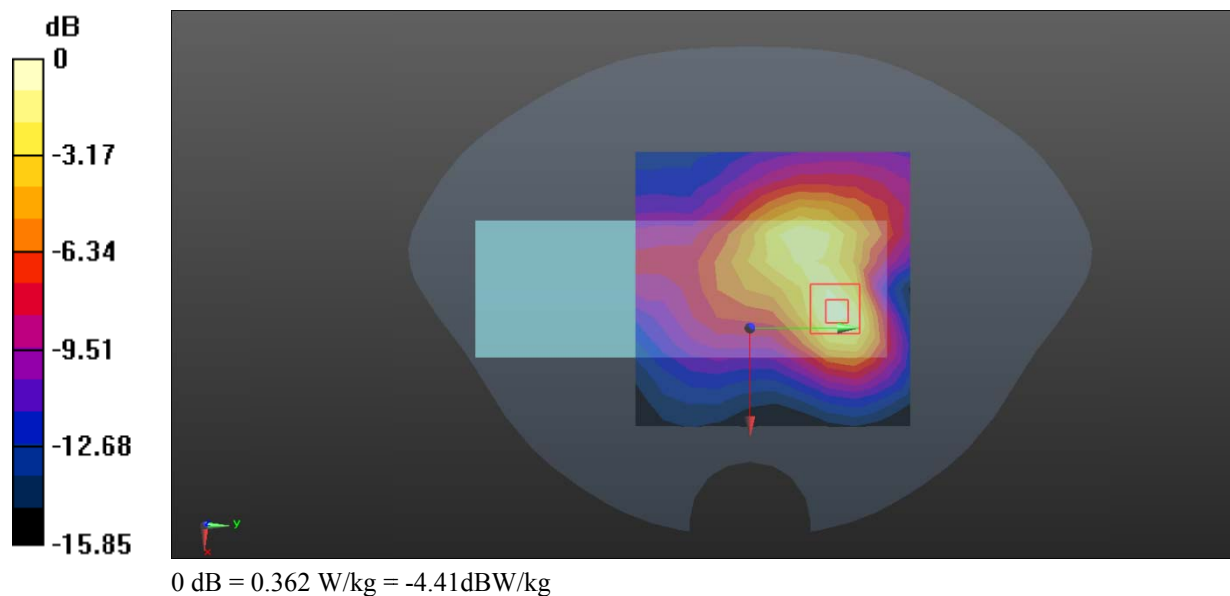

Test Plot 10#: WLAN 2.4G Mid Body Back**DUT: POS terminal; Type: N92; Serial: 2OKA-1**

Communication System: 802.11b (0); Frequency: 2437 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 2437$ MHz; $\sigma = 1.83$ S/m; $\epsilon_r = 40.499$; $\rho = 1000$ kg/m³ ;
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(7.05, 7.92, 7.22) @ 2437 MHz; Calibrated: 2024/3/27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (11x21x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.623 W/kg


Zoom Scan (7x7x7) /Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 8.568 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 0.877 W/kg

SAR(1 g) = 0.509 W/kg; SAR(10 g) = 0.290 W/kg

Maximum value of SAR (measured) = 0.619 W/kg

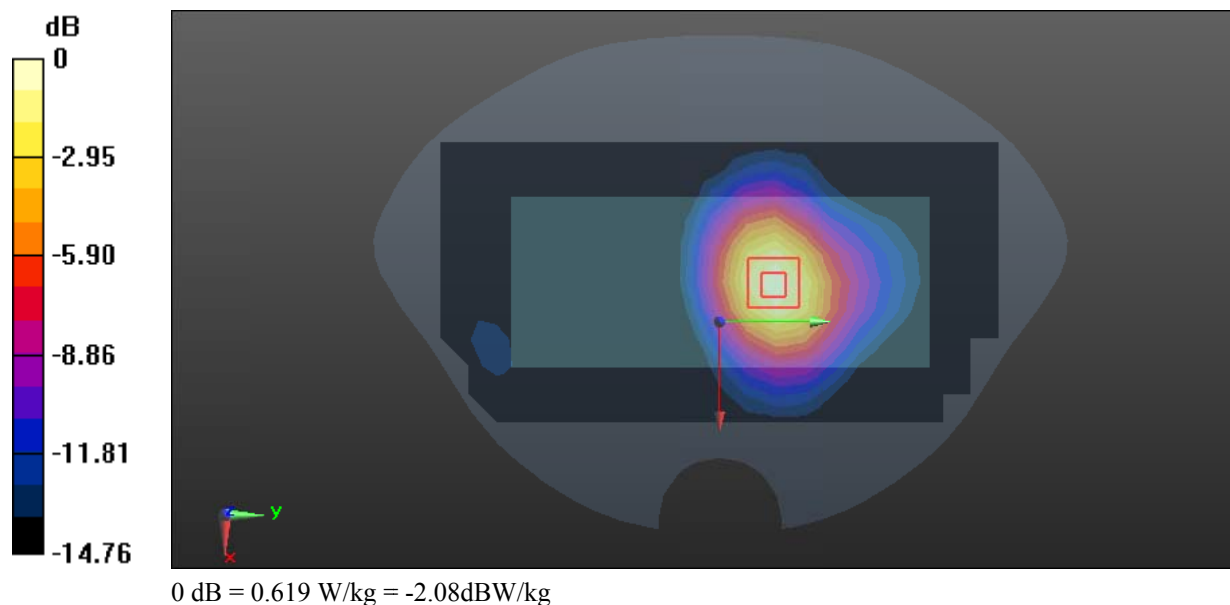

Test Plot 11#: 5.2G WLAN Mid Body Back**DUT: POS terminal; Type: N92; Serial: 2OKA-1**

Communication System: 802.11a (0); Frequency: 5200MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 5200$ MHz; $\sigma = 4.477$ S/m; $\epsilon_r = 36.907$; $\rho = 1000$ kg/m³ ;
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(4.96, 5.61, 5.16) @ 5200 MHz; Calibrated: 2024/3/27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (13x15x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 1.29 W/kg


Zoom Scan (8x8x16) /Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 4.638 V/m; Power Drift = 0.08dB

Peak SAR (extrapolated) = 1.93 W/kg

SAR(1 g) = 0.712 W/kg; SAR(10 g) = 0.308 W/kg

Maximum value of SAR (measured) = 1.36 W/kg

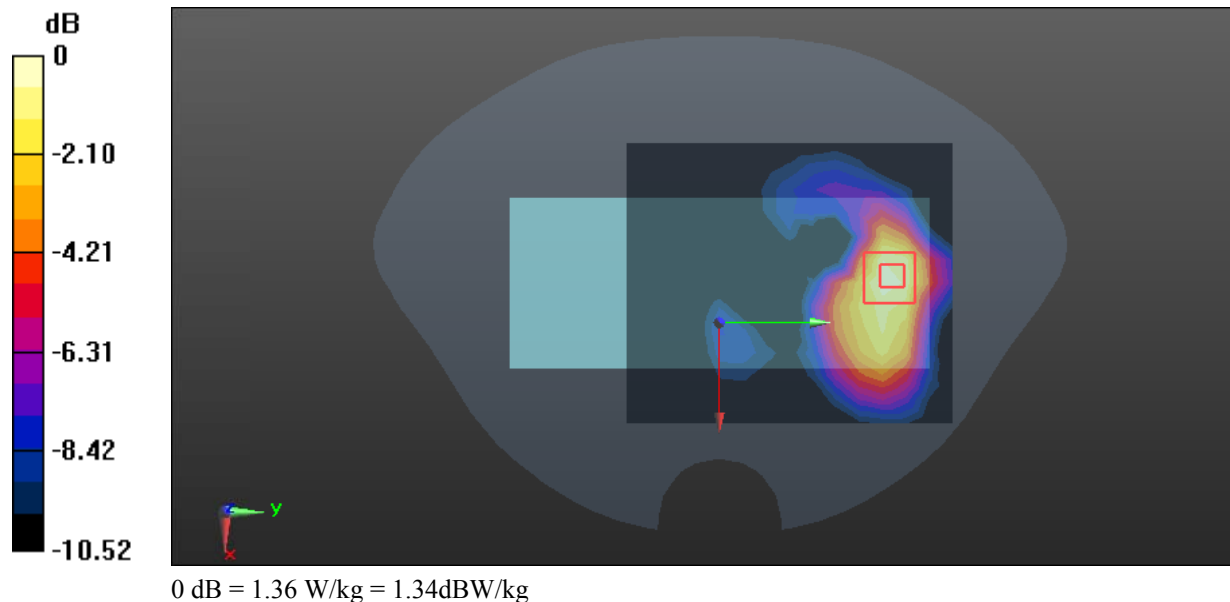

Test Plot 12#: 5.3G WLAN Mid Body Back**DUT: POS terminal; Type: N92; Serial: 2OKA-1**

Communication System: 802.11a (0); Frequency: 5280 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 5280$ MHz; $\sigma = 4.546$ S/m; $\epsilon_r = 36.72$; $\rho = 1000$ kg/m³ ;
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(4.96, 5.61, 5.16) @ 5280 MHz; Calibrated: 2024/3/27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (13x15x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 1.18 W/kg


Zoom Scan (8x8x16) /Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 2.879 V/m; Power Drift = 0.17dB

Peak SAR (extrapolated) = 1.84 W/kg

SAR(1 g) = 0.669 W/kg; SAR(10 g) = 0.286 W/kg

Maximum value of SAR (measured) = 1.30 W/kg

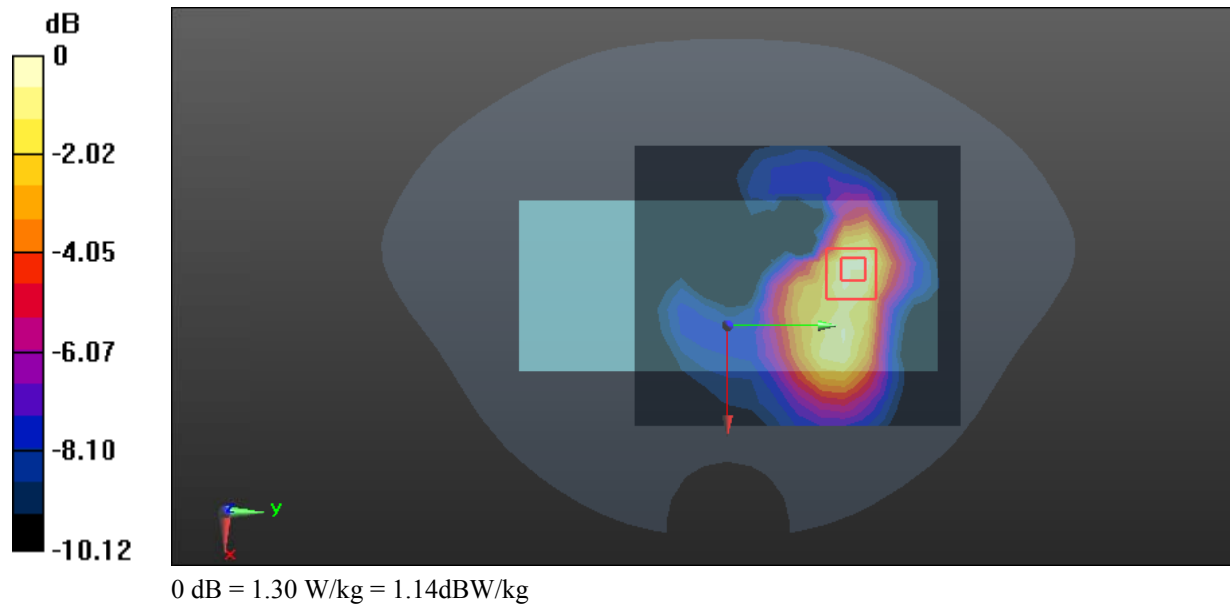

Test Plot 13#: 5.6G WLAN Mid Body Back**DUT: POS terminal; Type: N92; Serial: 2OKA-1**

Communication System: 802.11n40 (0); Frequency:5590MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 5590 \text{ MHz}$; $\sigma = 4.907 \text{ S/m}$; $\epsilon_r = 35.992$; $\rho = 1000 \text{ kg/m}^3$;
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(4.38, 4.98, 4.56) @ 5590 MHz; Calibrated: 2024/3/27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (13x15x1):Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 1.56 W/kg


Zoom Scan (8x8x16) /Cube 0:Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 5.131 V/m; Power Drift =0.05dB

Peak SAR (extrapolated) = 2.37 W/kg

SAR(1 g) = 0.777 W/kg; SAR(10 g) = 0.354 W/kg

Maximum value of SAR (measured) = 1.57 W/kg

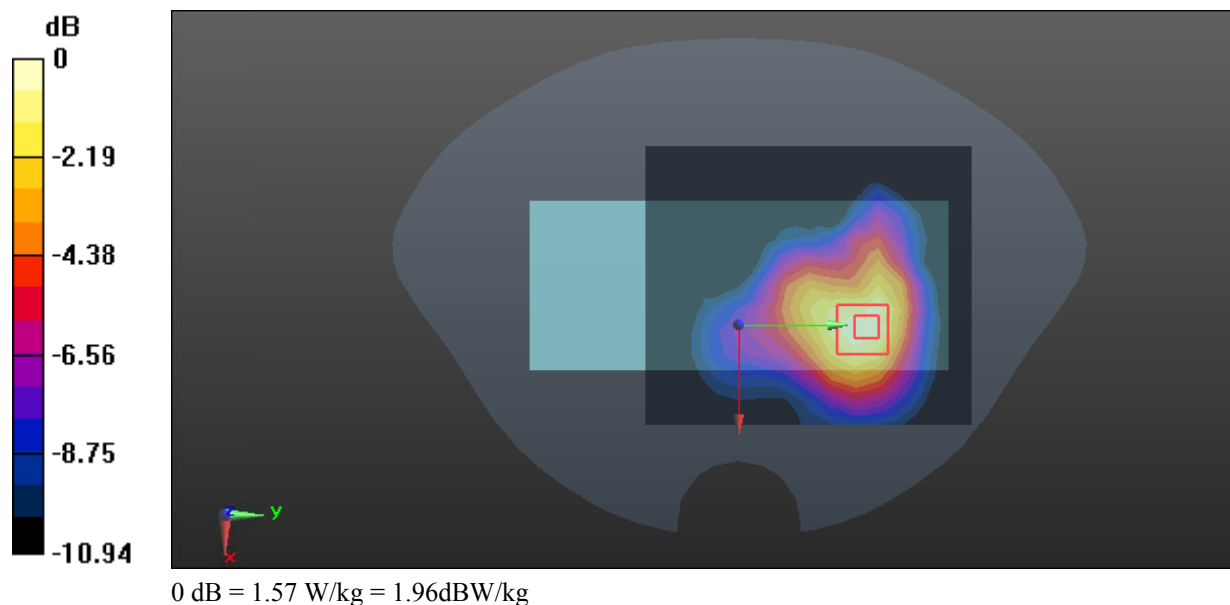

Test Plot 14#: 5.8G WLAN Mid Body Back**DUT: POS terminal; Type: N92; Serial: 2OKA-1**

Communication System: 802.11a (0); Frequency: 5785 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 5785$ MHz; $\sigma = 5.137$ S/m; $\epsilon_r = 35.584$; $\rho = 1000$ kg/m³ ;
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(4.54, 5.16, 4.7) @ 5785 MHz; Calibrated: 2024/3/27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (13x15x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 1.49 W/kg

Zoom Scan (8x8x16) /Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 10.21 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 2.44 W/kg

SAR(1 g) = 0.760 W/kg; SAR(10 g) = 0.351 W/kg

Maximum value of SAR (measured) = 1.54 W/kg

