

## TEST REPORT

**Product** : WIFI+BT Module  
**Trade mark** : GSD  
**Model/Type reference** : WCT0SR2311  
**Serial Number** : N/A  
**Report Number** : EED32L00189801  
**FCC ID** : 2AC23-WCT0S  
**Date of Issue** : Feb. 27, 2020  
**Test Standards** : 47 CFR Part 15Subpart C  
**Test result** : PASS

Prepared for:

**Hui Zhou Gaoshengda Technology Co.,LTD**  
**NO.75 Zhongkai Development Area,Huizhou,Guangdong, China**

Prepared by:

**Centre Testing International Group Co., Ltd.**  
**Hongwei Industrial Zone, Bao'an 70 District,**  
**Shenzhen, Guangdong, China**  
**TEL: +86-755-3368 3668**  
**FAX: +86-755-3368 3385**

Tested By:

*mark.chen.*

Mark Chen

Compiled by:

*smile zhong*

Smile Zhong

Reviewed by:

*Ware Xin*

Ware Xin

Approved by:

*Sam Chuang*

Sam Chuang

Date:

Feb. 27, 2020

Check No.: 3096370616



## 2 Version

| Version No. | Date          | Description |
|-------------|---------------|-------------|
| 00          | Feb. 27, 2020 | Original    |
|             |               |             |
|             |               |             |

### 3 Test Summary

| Test Item                                                                | Test Requirement                                  | Test method      | Result |
|--------------------------------------------------------------------------|---------------------------------------------------|------------------|--------|
| <b>Antenna Requirement</b>                                               | 47 CFR Part 15Subpart C Section 15.203/15.247 (c) | ANSI C63.10-2013 | PASS   |
| <b>AC Power Line Conducted Emission</b>                                  | 47 CFR Part 15Subpart C Section 15.207            | ANSI C63.10-2013 | PASS   |
| <b>Conducted Peak Output Power</b>                                       | 47 CFR Part 15Subpart C Section 15.247 (b)(3)     | ANSI C63.10-2013 | PASS   |
| <b>6dB Occupied Bandwidth</b>                                            | 47 CFR Part 15Subpart C Section 15.247 (a)(2)     | ANSI C63.10-2013 | PASS   |
| <b>Power Spectral Density</b>                                            | 47 CFR Part 15Subpart C Section 15.247 (e)        | ANSI C63.10-2013 | PASS   |
| <b>Band-edge for RF Conducted Emissions</b>                              | 47 CFR Part 15Subpart C Section 15.247(d)         | ANSI C63.10-2013 | PASS   |
| <b>RF Conducted Spurious Emissions</b>                                   | 47 CFR Part 15Subpart C Section 15.247(d)         | ANSI C63.10-2013 | PASS   |
| <b>Radiated Spurious Emissions</b>                                       | 47 CFR Part 15Subpart C Section 15.205/15.209     | ANSI C63.10-2013 | PASS   |
| <b>Restricted bands around fundamental frequency (Radiated Emission)</b> | 47 CFR Part 15Subpart C Section 15.205/15.209     | ANSI C63.10-2013 | PASS   |

Remark:

Test according to ANSI C63.4-2014 & ANSI C63.10-2013.

The tested sample(s) and the sample information are provided by the client.


## 4 Content

|                                                                       |           |
|-----------------------------------------------------------------------|-----------|
| <b>1 COVER PAGE</b>                                                   | <b>1</b>  |
| <b>2 VERSION</b>                                                      | <b>2</b>  |
| <b>3 TEST SUMMARY</b>                                                 | <b>3</b>  |
| <b>4 CONTENT</b>                                                      | <b>4</b>  |
| <b>5 TEST REQUIREMENT</b>                                             | <b>5</b>  |
| 5.1 TEST SETUP                                                        | 5         |
| 5.1.1 For Conducted test setup                                        | 5         |
| 5.1.2 For Radiated Emissions test setup                               | 5         |
| 5.1.3 For Conducted Emissions test setup                              | 6         |
| 5.2 TEST ENVIRONMENT                                                  | 6         |
| 5.3 TEST CONDITION                                                    | 6         |
| <b>6 GENERAL INFORMATION</b>                                          | <b>7</b>  |
| 6.1 CLIENT INFORMATION                                                | 7         |
| 6.2 GENERAL DESCRIPTION OF EUT                                        | 7         |
| 6.3 PRODUCT SPECIFICATION SUBJECTIVE TO THIS STANDARD                 | 7         |
| 6.4 DESCRIPTION OF SUPPORT UNITS                                      | 8         |
| 6.5 TEST LOCATION                                                     | 8         |
| 6.6 DEVIATION FROM STANDARDS                                          | 8         |
| 6.7 ABNORMALITIES FROM STANDARD CONDITIONS                            | 8         |
| 6.8 OTHER INFORMATION REQUESTED BY THE CUSTOMER                       | 8         |
| 6.9 MEASUREMENT UNCERTAINTY (95% CONFIDENCE LEVELS, K=2)              | 9         |
| <b>7 EQUIPMENT LIST</b>                                               | <b>10</b> |
| <b>8 RADIO TECHNICAL REQUIREMENTS SPECIFICATION</b>                   | <b>14</b> |
| Appendix A): 6dB Occupied Bandwidth                                   | 16        |
| Appendix B): Conducted Peak Output Power                              | 19        |
| Appendix C): Band-edge for RF Conducted Emissions                     | 21        |
| Appendix D): RF Conducted Spurious Emissions                          | 22        |
| Appendix E): Power Spectral Density                                   | 26        |
| Appendix F): Antenna Requirement                                      | 28        |
| Appendix G): AC Power Line Conducted Emission                         | 29        |
| Appendix H): Restricted bands around fundamental frequency (Radiated) | 32        |
| Appendix I) Radiated Spurious Emissions                               | 41        |
| <b>PHOTOGRAPHS OF TEST SETUP</b>                                      | <b>46</b> |
| <b>PHOTOGRAPHS OF EUT CONSTRUCTIONAL DETAILS</b>                      | <b>49</b> |

## 5 Test Requirement

### 5.1 Test setup

#### 5.1.1 For Conducted test setup

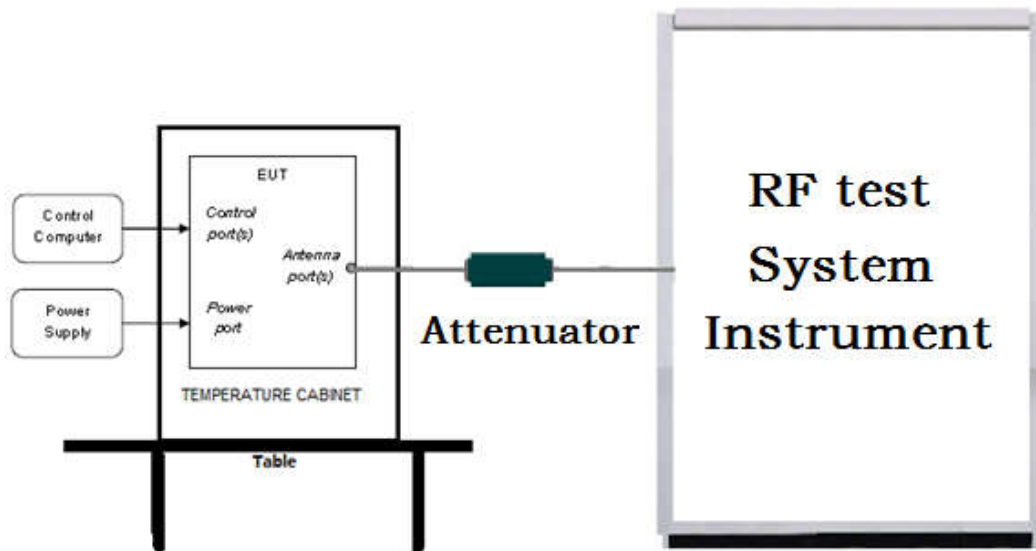

#### 5.1.2 For Radiated Emissions test setup

Radiated Emissions setup:

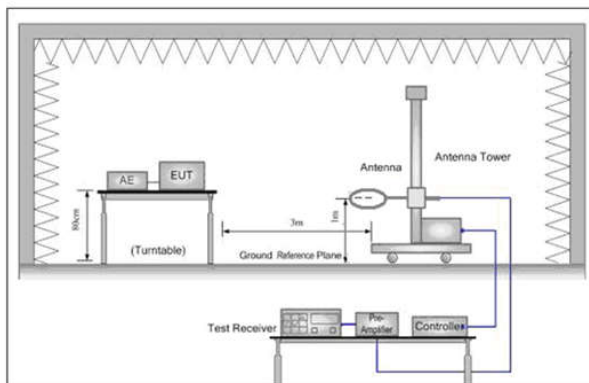


Figure 1. Below 30MHz

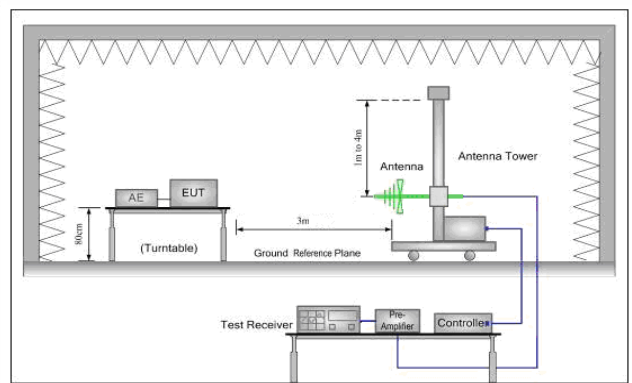


Figure 2. 30MHz to 1GHz


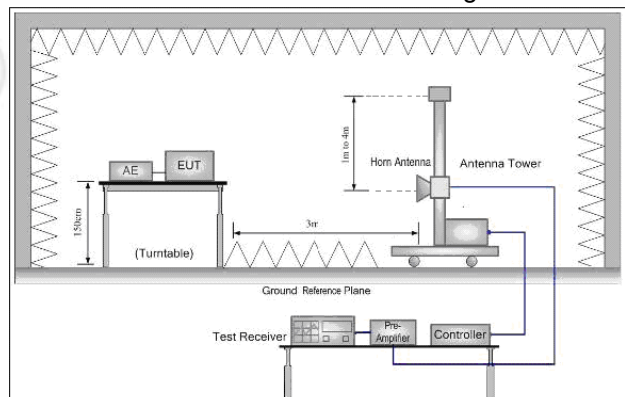


Figure 3. Above 1GHz



### 5.1.3 For Conducted Emissions test setup

#### Conducted Emissions setup

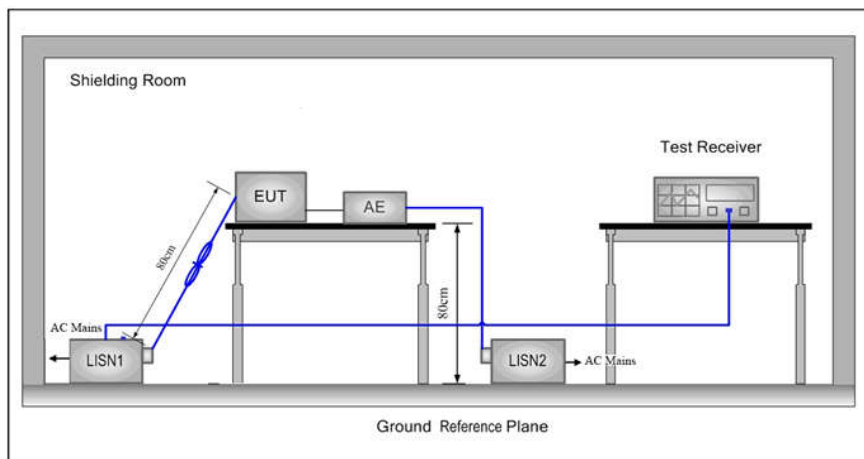

## 5.2 Test Environment

| Operating Environment: |          |
|------------------------|----------|
| Temperature:           | 24.0 °C  |
| Humidity:              | 55 % RH  |
| Atmospheric Pressure:  | 1010mbar |

## 5.3 Test Condition

Test channel:

| Test Mode          | Tx/Rx                                                                                    | RF Channel |            |            |
|--------------------|------------------------------------------------------------------------------------------|------------|------------|------------|
|                    |                                                                                          | Low(L)     | Middle(M)  | High(H)    |
| GFSK               | 2402MHz ~2480 MHz                                                                        | Channel 1  | Channel 20 | Channel 40 |
|                    |                                                                                          | 2402MHz    | 2440MHz    | 2480MHz    |
| Transmitting mode: | Keep the EUT in transmitting mode with all kind of modulation and all kind of data rate. |            |            |            |

## 6 General Information

### 6.1 Client Information

|                          |                                                          |
|--------------------------|----------------------------------------------------------|
| Applicant:               | Hui Zhou Gaoshengda Technology Co.,LTD                   |
| Address of Applicant:    | NO.75 Zhongkai Development Area,Huizhou,Guangdong, China |
| Manufacturer:            | Hui Zhou Gaoshengda Technology Co.,LTD                   |
| Address of Manufacturer: | NO.75 Zhongkai Development Area,Huizhou,Guangdong, China |
| Factory:                 | Hui Zhou Gaoshengda Technology Co.,LTD                   |
| Address of Factory:      | NO.75 Zhongkai Development Area,Huizhou,Guangdong, China |

### 6.2 General Description of EUT

|                                  |                                    |
|----------------------------------|------------------------------------|
| Product Name:                    | WIFI+BT Module                     |
| Model No.(EUT):                  | WCT0SR2311                         |
| Trade mark:                      | GSD                                |
| EUT Supports Radios application: | BT4.1 Dual mode 2402MHz to 2480MHz |
| Power Supply:                    | DC 5V                              |
| Sample Received Date:            | Jul. 17, 2019                      |
| Sample tested Date:              | Jul. 17, 2019 to Sep. 09, 2019     |

### 6.3 Product Specification subjective to this standard

|                        |                                 |
|------------------------|---------------------------------|
| Operation Frequency:   | 2402MHz~2480MHz                 |
| Bluetooth Version:     | 4.1                             |
| Modulation Technique:  | DSSS                            |
| Modulation Type:       | GFSK                            |
| Number of Channel:     | 40                              |
| Test Power Grade:      | Default                         |
| Test Software of EUT:  | Bluetooth RF Test Tool V5.1.1.1 |
| Antenna Type and Gain: | Type: PIFA antenna<br>Gain:2dBi |
| Test Voltage:          | DC 5V                           |

| Operation Frequency each of channel |           |         |           |         |           |         |           |
|-------------------------------------|-----------|---------|-----------|---------|-----------|---------|-----------|
| Channel                             | Frequency | Channel | Frequency | Channel | Frequency | Channel | Frequency |
| 1                                   | 2402MHz   | 11      | 2422MHz   | 21      | 2442MHz   | 31      | 2462MHz   |
| 2                                   | 2404MHz   | 12      | 2424MHz   | 22      | 2444MHz   | 32      | 2464MHz   |
| 3                                   | 2406MHz   | 13      | 2426MHz   | 23      | 2446MHz   | 33      | 2466MHz   |
| 4                                   | 2408MHz   | 14      | 2428MHz   | 24      | 2448MHz   | 34      | 2468MHz   |
| 5                                   | 2410MHz   | 15      | 2430MHz   | 25      | 2450MHz   | 35      | 2470MHz   |
| 6                                   | 2412MHz   | 16      | 2432MHz   | 26      | 2452MHz   | 36      | 2472MHz   |
| 7                                   | 2414MHz   | 17      | 2434MHz   | 27      | 2454MHz   | 37      | 2474MHz   |
| 8                                   | 2416MHz   | 18      | 2436MHz   | 28      | 2456MHz   | 38      | 2476MHz   |
| 9                                   | 2418MHz   | 19      | 2438MHz   | 29      | 2458MHz   | 39      | 2478MHz   |
| 10                                  | 2420MHz   | 20      | 2440MHz   | 30      | 2460MHz   | 40      | 2480MHz   |

## 6.4 Description of Support Units

The EUT has been tested independently

## 6.5 Test Location

All tests were performed at:

Centre Testing International Group Co., Ltd

Building C, Hongwei Industrial Park Block 70, Bao'an District, Shenzhen, China

Telephone: +86 (0) 755 33683668 Fax: +86 (0) 755 33683385

No tests were sub-contracted.

FCC Designation No.: CN1164

## 6.6 Deviation from Standards

None.

## 6.7 Abnormalities from Standard Conditions

None.

## 6.8 Other Information Requested by the Customer

None.



## 6.9 Measurement Uncertainty (95% confidence levels, k=2)

| No. | Item                            | Measurement Uncertainty |
|-----|---------------------------------|-------------------------|
| 1   | Radio Frequency                 | $7.9 \times 10^{-8}$    |
| 2   | RF power, conducted             | 0.46dB (30MHz-1GHz)     |
|     |                                 | 0.55dB (1GHz-18GHz)     |
| 3   | Radiated Spurious emission test | 4.3dB (30MHz-1GHz)      |
|     |                                 | 4.5dB (1GHz-12.75GHz)   |
| 4   | Conduction emission             | 3.5dB (9kHz to 150kHz)  |
|     |                                 | 3.1dB (150kHz to 30MHz) |
| 5   | Temperature test                | 0.64°C                  |
| 6   | Humidity test                   | 3.8%                    |
| 7   | DC power voltages               | 0.026%                  |

## 7 Equipment List

| RF test system                    |                  |                           |               |                        |                            |
|-----------------------------------|------------------|---------------------------|---------------|------------------------|----------------------------|
| Equipment                         | Manufacturer     | Mode No.                  | Serial Number | Cal. Date (mm-dd-yyyy) | Cal. Due date (mm-dd-yyyy) |
| Signal Generator                  | Keysight         | E8257D                    | MY53401106    | 03-01-2019             | 02-29-2020                 |
| Spectrum Analyzer                 | Keysight         | N9010A                    | MY54510339    | 03-01-2019             | 02-29-2020                 |
| Attenuator                        | HuaXiang         | SHX370                    | 15040701      | 03-01-2019             | 02-29-2020                 |
| Signal Generator                  | Keysight         | N5181A                    | MY46240094    | 03-01-2019             | 02-29-2020                 |
| Signal Generator                  | Keysight         | N5182B                    | MY53051549    | 03-01-2019             | 02-29-2020                 |
| Temperature/ Humidity Indicator   | biaozhi          | HM10                      | 1804186       | 10-12-2018             | 10-11-2019                 |
| High-pass filter                  | Sinoscite        | FL3CX03WG18 NM12-0398-002 | ---           | 01-09-2019             | 01-08-2020                 |
| High-pass filter                  | MICRO-TRONICS    | SPA-F-63029-4             | ---           | 01-09-2019             | 01-08-2020                 |
| band rejection filter             | Sinoscite        | FL5CX01CA09 CL12-0395-001 | ---           | 01-09-2019             | 01-08-2020                 |
| band rejection filter             | Sinoscite        | FL5CX01CA08 CL12-0393-001 | ---           | 01-09-2019             | 01-08-2020                 |
| band rejection filter             | Sinoscite        | FL5CX02CA04 CL12-0396-002 | ---           | 01-09-2019             | 01-08-2020                 |
| band rejection filter             | Sinoscite        | FL5CX02CA03 CL12-0394-001 | ---           | 01-09-2019             | 01-08-2020                 |
| Communication test set            | R&S              | CMW500                    | 107929        | 04-28-2019             | 04-27-2020                 |
| DC Power                          | Keysight         | E3642A                    | MY54426035    | 03-01-2019             | 02-29-2020                 |
| PC-1                              | Lenovo           | R4960d                    | ---           | 03-01-2019             | 02-29-2020                 |
| BT&WI-FI Automatic control        | R&S              | OSP120                    | 101374        | 03-01-2019             | 02-29-2020                 |
| RF control unit                   | JS Tonscend      | JS0806-2                  | 15860006      | 03-01-2019             | 02-29-2020                 |
| RF control unit                   | JS Tonscend      | JS0806-1                  | 15860004      | 03-01-2019             | 02-29-2020                 |
| RF control unit                   | JS Tonscend      | JS0806-4                  | 158060007     | 03-01-2019             | 02-29-2020                 |
| BT&WI-FI Automatic test software  | JS Tonscend      | JSTS1120-2                | ---           | 03-01-2019             | 02-29-2020                 |
| high-low temperature test chamber | DongGuangQinZhuo | LK-80GA                   | QZ20150611879 | 03-01-2019             | 02-29-2020                 |

| Conducted disturbance Test            |              |                             |                |                        |                            |
|---------------------------------------|--------------|-----------------------------|----------------|------------------------|----------------------------|
| Equipment                             | Manufacturer | Model No.                   | Serial Number  | Cal. date (mm-dd-yyyy) | Cal. Due date (mm-dd-yyyy) |
| Receiver                              | R&S          | ESCI                        | 100435         | 05-20-2019             | 05-19-2020                 |
| Temperature/<br>Humidity<br>Indicator | Defu         | TH128                       | /              | 06-14-2019             | 06-13-2020                 |
| Communication<br>test set             | Agilent      | E5515C                      | GB47050<br>534 | 03-01-2019             | 02-28-2022                 |
| Communication<br>test set             | R&S          | CMW500                      | 102898         | 01-18-2019             | 01-17-2020                 |
| LISN                                  | R&S          | ENV216                      | 100098         | 05-08-2019             | 05-07-2020                 |
| LISN                                  | schwarzbeck  | NNLK8121                    | 8121-529       | 05-08-2019             | 05-07-2020                 |
| Voltage Probe                         | R&S          | ESH2-Z3<br>0299.7810.5<br>6 | 100042         | 06-13-2017             | 06-12-2020                 |
| Current Probe                         | R&S          | EZ-17<br>816.2063.03        | 100106         | 05-20-2019             | 05-19-2020                 |
| ISN                                   | TESEQ        | ISN T800                    | 30297          | 01-16-2019             | 01-15-2020                 |
| Barometer                             | changchun    | DYM3                        | 1188           | 06-20-2019             | 06-19-2020                 |

| 3M Semi/full-anechoic Chamber    |                  |                          |               |                        |                            |
|----------------------------------|------------------|--------------------------|---------------|------------------------|----------------------------|
| Equipment                        | Manufacturer     | Model No.                | Serial Number | Cal. date (mm-dd-yyyy) | Cal. Due date (mm-dd-yyyy) |
| 3M Chamber & Accessory Equipment | TDK              | SAC-3                    | ---           | 05-24-2019             | 05-23-2022                 |
| TRILOG Broadband Antenna         | Schwarzbeck      | VULB9163                 | 9163-401      | 12-21-2018             | 12-20-2019                 |
| TRILOG Broadband Antenna         | Schwarzbeck      | VULB9163                 | 9163-618      | 07-26-2019             | 07-25-2020                 |
| Microwave Preamplifier           | Agilent          | 8449B                    | 3008A02425    | 07-12-2019             | 07-11-2020                 |
| Microwave Preamplifier           | Tonscend         | EMC051845 SE             | 980380        | 01-16-2019             | 01-15-2020                 |
| Horn Antenna                     | Schwarzbeck      | BBHA 9120D               | 9120D-1869    | 04-25-2018             | 04-24-2021                 |
| Horn Antenna                     | ETS-LINDGREN     | 3117                     | 00057410      | 06-05-2018             | 06-04-2021                 |
| Double ridge horn antenna        | A.H.SYSTEMS      | SAS-574                  | 374           | 06-05-2018             | 06-04-2021                 |
| Pre-amplifier                    | A.H.SYSTEMS      | PAP-1840-60              | 6041.6042     | 07-26-2019             | 07-25-2020                 |
| Loop Antenna                     | Schwarzbeck      | FMZB 1519B               | 1519B-076     | 04-25-2018             | 04-24-2021                 |
| Spectrum Analyzer                | R&S              | FSP40                    | 100416        | 04-28-2019             | 04-27-2020                 |
| Receiver                         | R&S              | ESCI                     | 100435        | 05-20-2019             | 05-19-2020                 |
| Receiver                         | R&S              | ESCI7                    | 100938-003    | 11-23-2018             | 11-22-2019                 |
| Multi device Controller          | maturo           | NCD/070/10711112         | ---           | 01-09-2019             | 01-08-2020                 |
| Signal Generator                 | Agilent          | E4438C                   | MY45095744    | 03-01-2019             | 02-29-2020                 |
| Signal Generator                 | Keysight         | E8257D                   | MY53401106    | 03-01-2019             | 02-29-2020                 |
| Temperature/Humidity Indicator   | Shanghai qixiang | HM10                     | 1804298       | 10-12-2018             | 10-11-2019                 |
| Communication test set           | Agilent          | E5515C                   | GB47050534    | 03-01-2019             | 02-28-2022                 |
| Cable line                       | Fulai(7M)        | SF106                    | 5219/6A       | 01-09-2019             | 01-08-2020                 |
| Cable line                       | Fulai(6M)        | SF106                    | 5220/6A       | 01-09-2019             | 01-08-2020                 |
| Cable line                       | Fulai(3M)        | SF106                    | 5216/6A       | 01-09-2019             | 01-08-2020                 |
| Cable line                       | Fulai(3M)        | SF106                    | 5217/6A       | 01-09-2019             | 01-08-2020                 |
| High-pass filter                 | Sinoscite        | FL3CX03WG18NM12-0398-002 | ---           | 01-09-2019             | 01-08-2020                 |
| High-pass filter                 | MICRO-TRONICS    | SPA-F-63029-4            | ---           | 01-09-2019             | 01-08-2020                 |
| band rejection filter            | Sinoscite        | FL5CX01CA09CL12-0395-001 | ---           | 01-09-2019             | 01-08-2020                 |
| band rejection filter            | Sinoscite        | FL5CX01CA08CL12-0393-001 | ---           | 01-09-2019             | 01-08-2020                 |
| band rejection filter            | Sinoscite        | FL5CX02CA04CL12-0396-002 | ---           | 01-09-2019             | 01-08-2020                 |
| band rejection filter            | Sinoscite        | FL5CX02CA03CL12-0394-001 | ---           | 01-09-2019             | 01-08-2020                 |

| 3M full-anechoic Chamber        |              |                   |               |                        |                            |
|---------------------------------|--------------|-------------------|---------------|------------------------|----------------------------|
| Equipment                       | Manufacturer | Model No.         | Serial Number | Cal. date (mm-dd-yyyy) | Cal. Due date (mm-dd-yyyy) |
| RSE Automatic test software     | JS Tonscend  | JS36-RSE          | 10166         | 06-19-2019             | 06-18-2020                 |
| Receiver                        | Keysight     | N9038A            | MY57290136    | 03-27-2019             | 03-26-2020                 |
| Spectrum Analyzer               | Keysight     | N9020B            | MY57111112    | 03-27-2019             | 03-26-2020                 |
| Spectrum Analyzer               | Keysight     | N9030B            | MY57140871    | 03-27-2019             | 03-26-2020                 |
| Loop Antenna                    | Schwarzbeck  | FMZB 1519B        | 1519B-075     | 04-25-2018             | 04-24-2021                 |
| Loop Antenna                    | Schwarzbeck  | FMZB 1519B        | 1519B-076     | 04-25-2018             | 04-24-2021                 |
| TRILOG Broadband Antenna        | Schwarzbeck  | VULB 9163         | 9163-1148     | 04-25-2018             | 04-24-2021                 |
| Horn Antenna                    | Schwarzbeck  | BBHA 9170         | 9170-832      | 04-25-2018             | 04-24-2021                 |
| Horn Antenna                    | Schwarzbeck  | BBHA 9170         | 9170-829      | 04-25-2018             | 04-24-2021                 |
| Communication Antenna           | Schwarzbeck  | CLSA 0110L        | 1014          | 02-14-2019             | 02-13-2020                 |
| Biconical antenna               | Schwarzbeck  | VUBA 9117         | 9117-381      | 04-25-2018             | 04-24-2021                 |
| Horn Antenna                    | ETS-LINDGREN | 3117              | 00057407      | 07-10-2018             | 07-09-2021                 |
| Preamplifier                    | EMCI         | EMC184055SE       | 980596        | 05-22-2019             | 5-21-2020                  |
| Communication test set          | R&S          | CMW500            | 102898        | 01-18-2019             | 01-17-2020                 |
| Preamplifier                    | EMCI         | EMC001330         | 980563        | 05-08-2019             | 05-07-2020                 |
| Preamplifier                    | Agilent      | 8449B             | 3008A02425    | 07-12-2019             | 07-11-2020                 |
| Temperature/ Humidity Indicator | biaozhi      | GM1360            | EE1186631     | 04-30-2019             | 04-29-2020                 |
| Signal Generator                | KEYSIGHT     | E8257D            | MY53401106    | 03-01-2019             | 02-29-2020                 |
| Fully Anechoic Chamber          | TDK          | FAC-3             | ---           | 01-17-2018             | 01-16-2021                 |
| Filter bank                     | JS Tonscend  | JS0806-F          | 188060094     | 04-10-2018             | 04-09-2021                 |
| Cable line                      | Times        | SFT205-NMSM-2.50M | 394812-0001   | 01-09-2019             | 01-08-2020                 |
| Cable line                      | Times        | SFT205-NMSM-2.50M | 394812-0002   | 01-09-2019             | 01-08-2020                 |
| Cable line                      | Times        | SFT205-NMSM-2.50M | 394812-0003   | 01-09-2019             | 01-08-2020                 |
| Cable line                      | Times        | SFT205-NMSM-2.50M | 393495-0001   | 01-09-2019             | 01-08-2020                 |
| Cable line                      | Times        | EMC104-NMNM-1000  | SN160710      | 01-09-2019             | 01-08-2020                 |
| Cable line                      | Times        | SFT205-NMSM-3.00M | 394813-0001   | 01-09-2019             | 01-08-2020                 |
| Cable line                      | Times        | SFT205-NMNM-1.50M | 381964-0001   | 01-09-2019             | 01-08-2020                 |
| Cable line                      | Times        | SFT205-NMSM-7.00M | 394815-0001   | 01-09-2019             | 01-08-2020                 |
| Cable line                      | Times        | HF160-KMKM-3.00M  | 393493-0001   | 01-09-2019             | 01-08-2020                 |



## 8 Radio Technical Requirements Specification


### Reference documents for testing:

| No. | Identity         | Document Title                                                     |
|-----|------------------|--------------------------------------------------------------------|
| 1   | FCC Part15C      | Subpart C-Intentional Radiators                                    |
| 2   | ANSI C63.10-2013 | American National Standard for Testing Unlicensed Wireless Devices |

### Test Results List:

| Test Requirement                  | Test method | Test item                                                         | Verdict | Note        |
|-----------------------------------|-------------|-------------------------------------------------------------------|---------|-------------|
| Part15C Section 15.247 (a)(2)     | ANSI C63.10 | 6dB Occupied Bandwidth                                            | PASS    | Appendix A) |
| Part15C Section 15.247 (b)(3)     | ANSI C63.10 | Conducted Peak Output Power                                       | PASS    | Appendix B) |
| Part15C Section 15.247(d)         | ANSI C63.10 | Band-edge for RF Conducted Emissions                              | PASS    | Appendix C) |
| Part15C Section 15.247(d)         | ANSI C63.10 | RF Conducted Spurious Emissions                                   | PASS    | Appendix D) |
| Part15C Section 15.247 (e)        | ANSI C63.10 | Power Spectral Density                                            | PASS    | Appendix E) |
| Part15C Section 15.203/15.247 (c) | ANSI C63.10 | Antenna Requirement                                               | PASS    | Appendix F) |
| Part15C Section 15.207            | ANSI C63.10 | AC Power Line Conducted Emission                                  | PASS    | Appendix G) |
| Part15C Section 15.205/15.209     | ANSI C63.10 | Restricted bands around fundamental frequency (Radiated Emission) | PASS    | Appendix H) |
| Part15C Section 15.205/15.209     | ANSI C63.10 | Radiated Spurious Emissions                                       | PASS    | Appendix I) |

| Duty Cycle    |           |            |               |
|---------------|-----------|------------|---------------|
| Configuration | TX ON(ms) | TX ALL(ms) | Duty Cycle(%) |
| BLE           | 0.3914    | 0.6244     | 62.68%        |

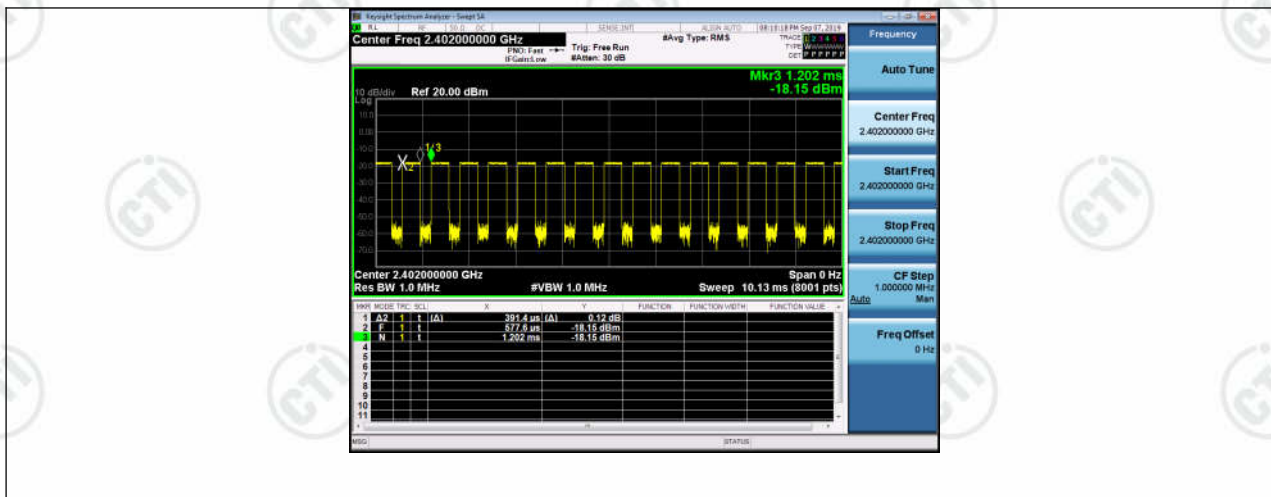


## Appendix A): 6dB Occupied Bandwidth

### Test Result

| Mode | Channel | 6dB Bandwidth [MHz] | 99% OBW[MHz] | Verdict |
|------|---------|---------------------|--------------|---------|
| BLE  | LCH     | 0.7209              | 1.0400       | PASS    |
| BLE  | MCH     | 0.7131              | 1.0431       | PASS    |
| BLE  | HCH     | 0.7224              | 1.0412       | PASS    |

## Test Graphs
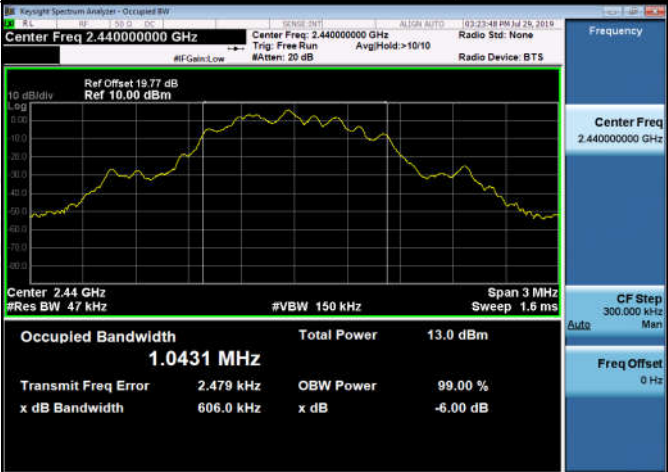
| Graphs |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
|--------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| LCH    |  <p>Keygraph Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.402000000 GHz</p> <p>Ref Offset 19.6 dB<br/>Ref 15.00 dBm</p> <p>Center 2.402 GHz<br/>#Res BW 47 kHz<br/>#VBW 150 kHz<br/>Span 3 MHz<br/>Sweep 1.6 ms</p> <p>Occupied Bandwidth <b>1.0400 MHz</b></p> <p>Total Power 12.9 dBm</p> <p>Transmit Freq Error 4.140 kHz</p> <p>OBW Power 99.00 %</p> <p>x dB Bandwidth 515.9 kHz</p> <p>x dB -6.00 dB</p>   |
| MCH    |  <p>Keygraph Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.440000000 GHz</p> <p>Ref Offset 19.77 dB<br/>Ref 10.00 dBm</p> <p>Center 2.44 GHz<br/>#Res BW 47 kHz<br/>#VBW 150 kHz<br/>Span 3 MHz<br/>Sweep 1.6 ms</p> <p>Occupied Bandwidth <b>1.0431 MHz</b></p> <p>Total Power 13.0 dBm</p> <p>Transmit Freq Error 2.479 kHz</p> <p>OBW Power 99.00 %</p> <p>x dB Bandwidth 606.0 kHz</p> <p>x dB -6.00 dB</p>  |
| HCH    |  <p>Keygraph Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.480000000 GHz</p> <p>Ref Offset 19.77 dB<br/>Ref 15.00 dBm</p> <p>Center 2.48 GHz<br/>#Res BW 47 kHz<br/>#VBW 150 kHz<br/>Span 3 MHz<br/>Sweep 1.6 ms</p> <p>Occupied Bandwidth <b>1.0412 MHz</b></p> <p>Total Power 12.3 dBm</p> <p>Transmit Freq Error 1.013 kHz</p> <p>OBW Power 99.00 %</p> <p>x dB Bandwidth 633.1 kHz</p> <p>x dB -6.00 dB</p> |





## Appendix B): Conducted Peak Output Power

### Test Result

| Mode | Channel | Conduct Peak Power[dBm] | Verdict |
|------|---------|-------------------------|---------|
| BLE  | LCH     | 7.399                   | PASS    |
| BLE  | MCH     | 7.476                   | PASS    |
| BLE  | HCH     | 6.725                   | PASS    |

## Test Graphs


| Graphs |  |
|--------|--|
| LCH    |  |
| MCH    |  |
| HCH    |  |

## Appendix C): Band-edge for RF Conducted Emissions

Result Table

| Mode | Channel | Carrier Power[dBm] | Max.Spurious Level [dBm] | Limit [dBm] | Verdict |
|------|---------|--------------------|--------------------------|-------------|---------|
| BLE  | LCH     | 6.795              | -60.056                  | -13.21      | PASS    |
| BLE  | HCH     | 6.100              | -58.239                  | -13.9       | PASS    |

Test Graphs

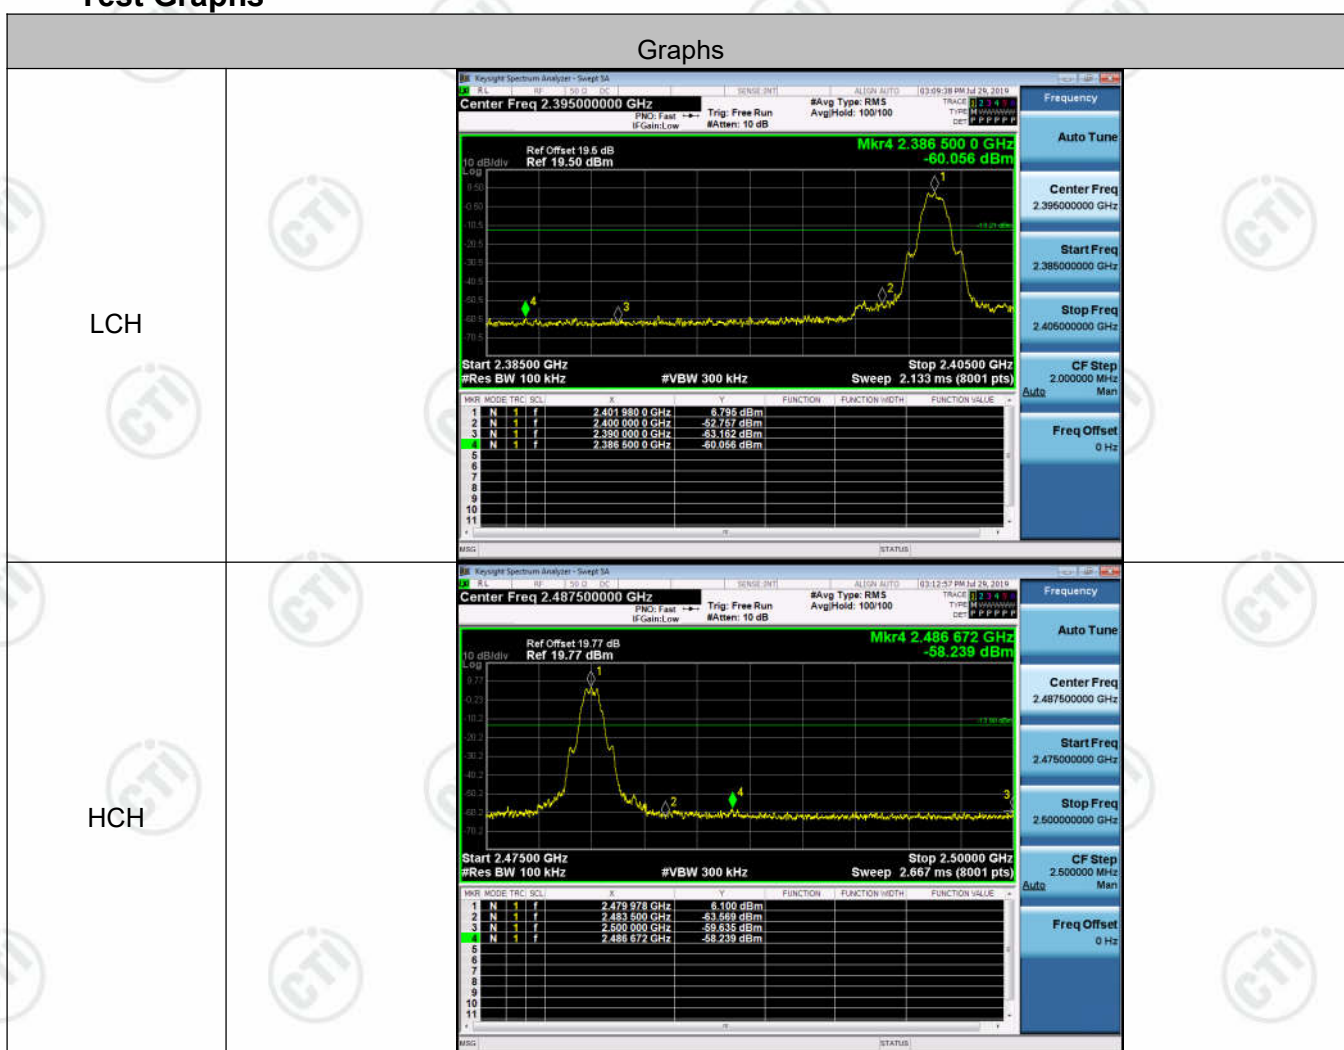


## Appendix D): RF Conducted Spurious Emissions


**Result Table**


| Mode | Channel | Pref [dBm] | Puw[dBm] | Verdict |
|------|---------|------------|----------|---------|
| BLE  | LCH     | 6.51       | <Limit   | PASS    |
| BLE  | MCH     | 6.543      | <Limit   | PASS    |
| BLE  | HCH     | 5.768      | <Limit   | PASS    |

## Test Graphs

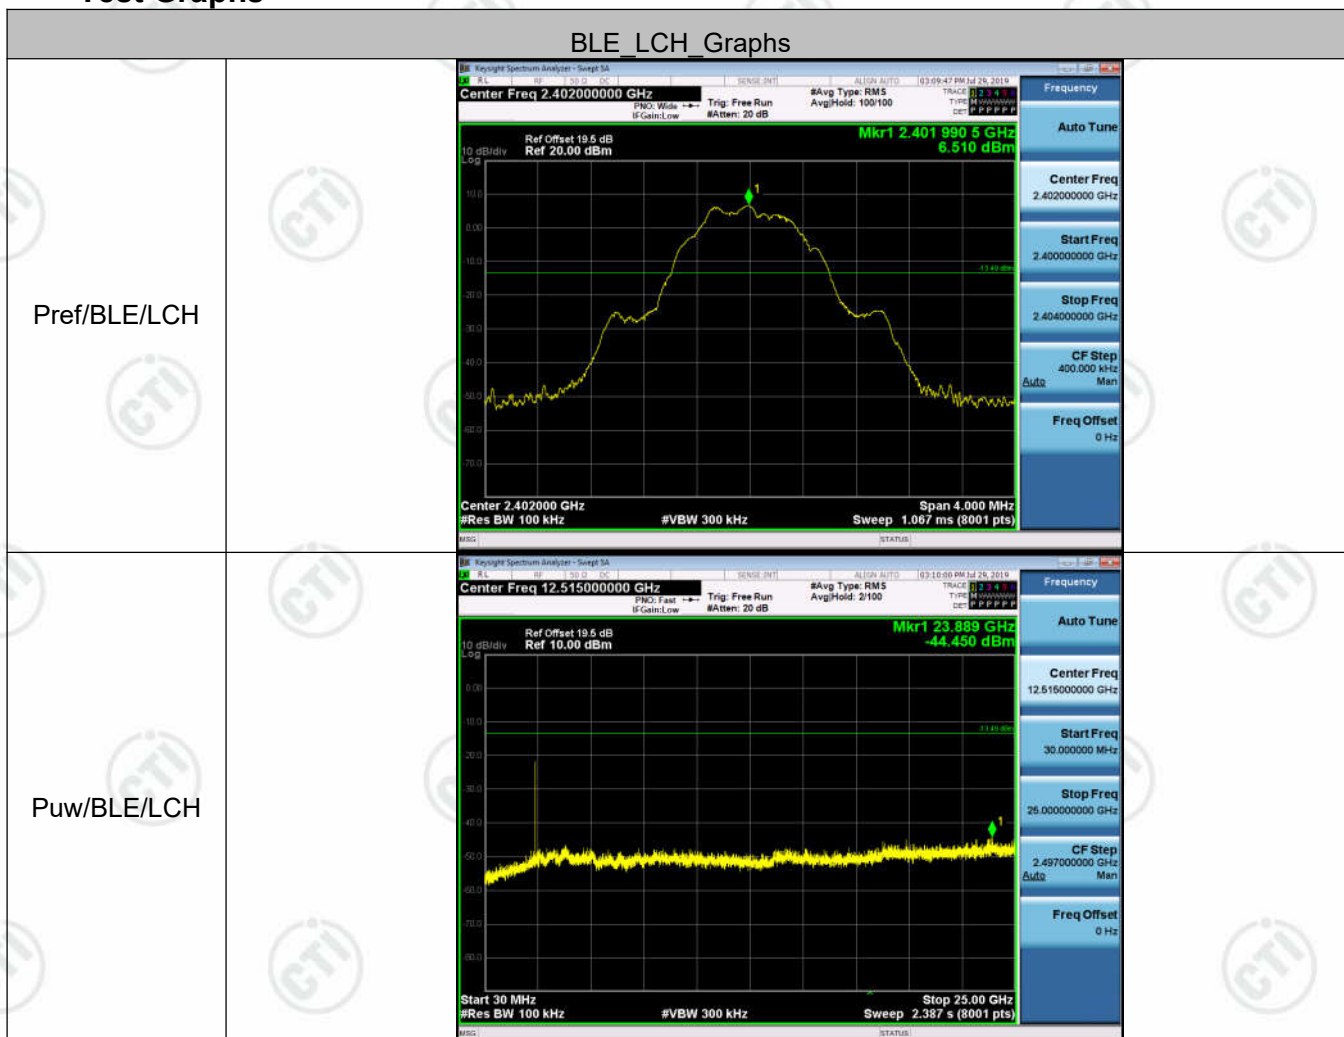



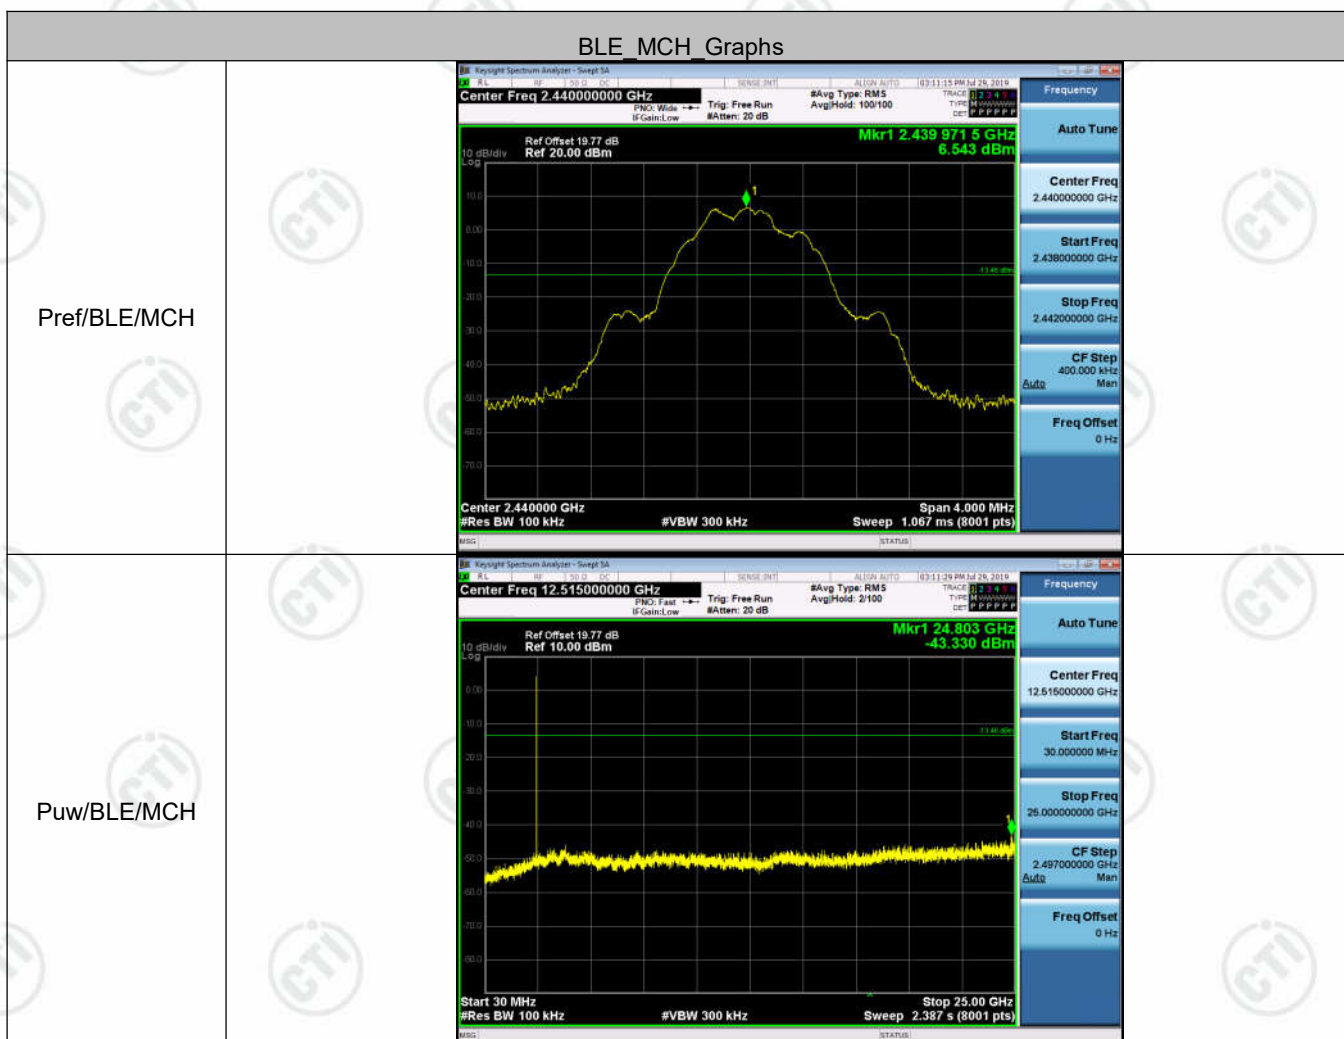

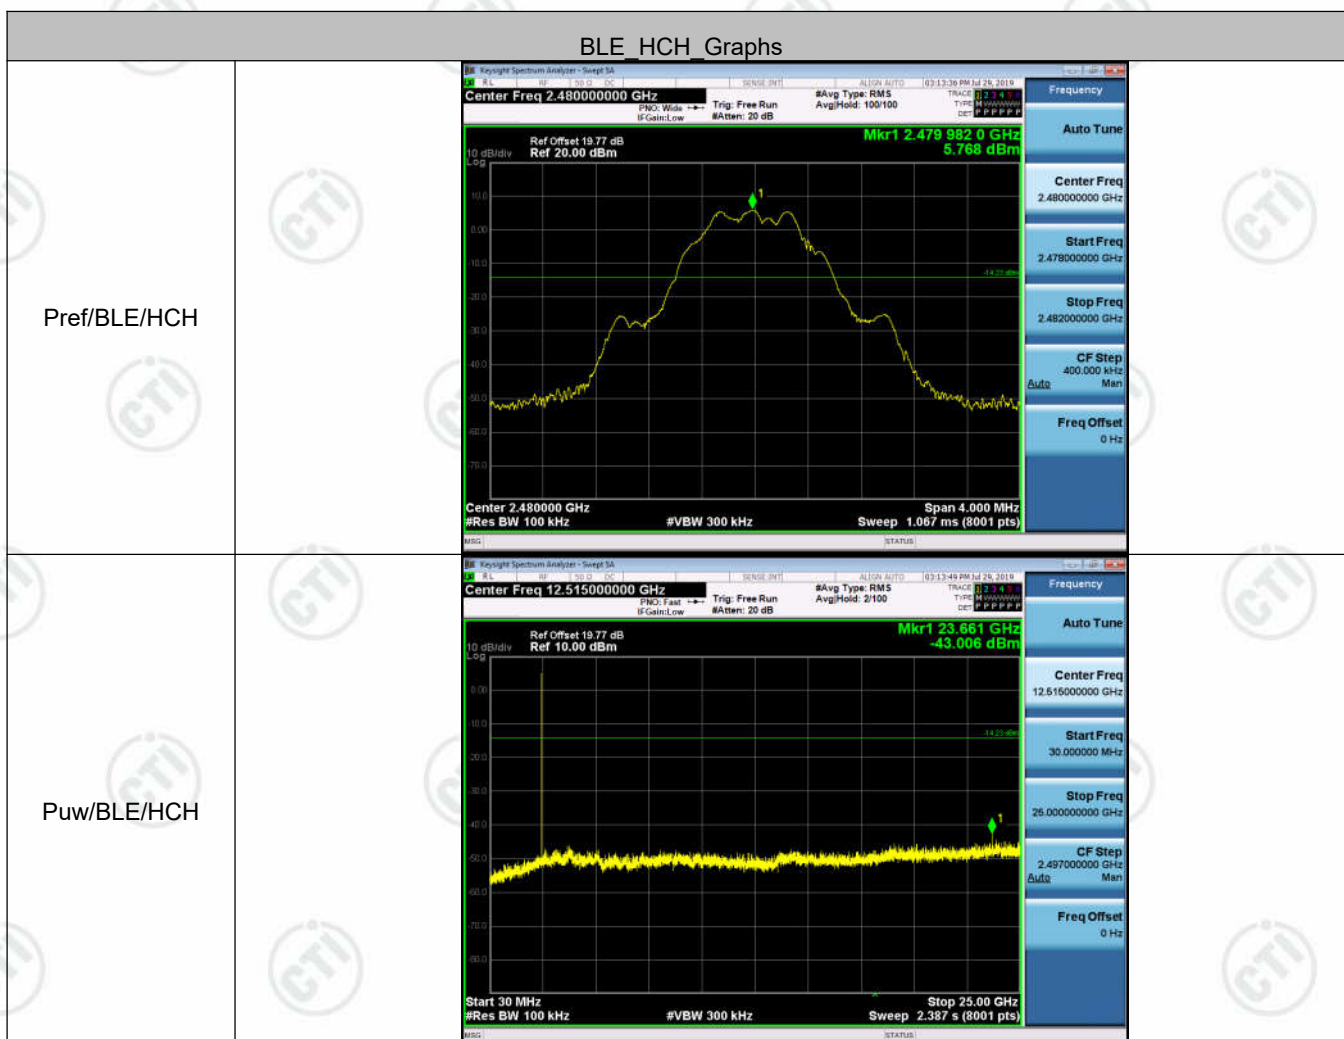

## Appendix E): Power Spectral Density

**Result Table**

| Mode | Channel | PSD [dBm] | Verdict |
|------|---------|-----------|---------|
| BLE  | LCH     | -10.670   | PASS    |
| BLE  | MCH     | -10.195   | PASS    |
| BLE  | HCH     | -11.115   | PASS    |

## Test Graphs

| Graphs |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
|--------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| LCH    | <p>Keygraph Spectrum Analyzer - Swept SA</p> <p>Center Freq 2.40200000 GHz</p> <p>Ref Offset 19.5 dB<br/>Ref 10.00 dBm</p> <p>Mkr1 2.401 950 88 GHz<br/>-10.670 dBm</p> <p>Center 2.4020000 GHz<br/>#Res BW 3.0 kHz<br/>#VBW 10 kHz<br/>Sweep 158.4 ms (8001 pts)</p> <p>Frequency</p> <p>Auto Tune</p> <p>Center Freq<br/>2.40200000 GHz</p> <p>Start Freq<br/>2.401250000 GHz</p> <p>Stop Freq<br/>2.402750000 GHz</p> <p>CF Step<br/>150.000 kHz<br/>Man</p> <p>Freq Offset<br/>0 Hz</p>  |
| MCH    | <p>Keygraph Spectrum Analyzer - Swept SA</p> <p>Center Freq 2.44000000 GHz</p> <p>Ref Offset 19.77 dB<br/>Ref 10.00 dBm</p> <p>Mkr1 2.439 959 31 GHz<br/>-10.195 dBm</p> <p>Center 2.4400000 GHz<br/>#Res BW 3.0 kHz<br/>#VBW 10 kHz<br/>Sweep 158.4 ms (8001 pts)</p> <p>Frequency</p> <p>Auto Tune</p> <p>Center Freq<br/>2.44000000 GHz</p> <p>Start Freq<br/>2.439250000 GHz</p> <p>Stop Freq<br/>2.440750000 GHz</p> <p>CF Step<br/>150.000 kHz<br/>Man</p> <p>Freq Offset<br/>0 Hz</p> |
| HCH    | <p>Keygraph Spectrum Analyzer - Swept SA</p> <p>Center Freq 2.48000000 GHz</p> <p>Ref Offset 19.77 dB<br/>Ref 10.00 dBm</p> <p>Mkr1 2.479 959 13 GHz<br/>-11.115 dBm</p> <p>Center 2.4800000 GHz<br/>#Res BW 3.0 kHz<br/>#VBW 10 kHz<br/>Sweep 158.4 ms (8001 pts)</p> <p>Frequency</p> <p>Auto Tune</p> <p>Center Freq<br/>2.48000000 GHz</p> <p>Start Freq<br/>2.479250000 GHz</p> <p>Stop Freq<br/>2.480750000 GHz</p> <p>CF Step<br/>150.000 kHz<br/>Man</p> <p>Freq Offset<br/>0 Hz</p> |



## Appendix F): Antenna Requirement

### 15.203 requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

### 15.247(b) (4) requirement:

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

### EUT Antenna:



The antenna is integrated on the main PCB and no consideration of replacement. The best case gain of the antenna is 2dBi.



## Appendix G): AC Power Line Conducted Emission

| Test Procedure:       | <p>Test frequency range :150KHz-30MHz</p> <p>1)The mains terminal disturbance voltage test was conducted in a shielded room.</p> <p>2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a 50Ω/50μH + 5Ω linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.</p> <p>3)The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane,</p> <p>4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2.</p> <p>5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10 on conducted measurement.</p> |                       |              |  |            |         |          |           |           |       |    |    |      |    |    |
|-----------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------|--------------|--|------------|---------|----------|-----------|-----------|-------|----|----|------|----|----|
| Limit:                | <table><tr><th rowspan="2">Frequency range (MHz)</th><th colspan="2">Limit (dBμV)</th></tr><tr><th>Quasi-peak</th><th>Average</th></tr><tr><td>0.15-0.5</td><td>66 to 56*</td><td>56 to 46*</td></tr><tr><td>0.5-5</td><td>56</td><td>46</td></tr><tr><td>5-30</td><td>60</td><td>50</td></tr></table> <p>* The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz.</p> <p>NOTE : The lower limit is applicable at the transition frequency</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            | Frequency range (MHz) | Limit (dBμV) |  | Quasi-peak | Average | 0.15-0.5 | 66 to 56* | 56 to 46* | 0.5-5 | 56 | 46 | 5-30 | 60 | 50 |
| Frequency range (MHz) | Limit (dBμV)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |                       |              |  |            |         |          |           |           |       |    |    |      |    |    |
|                       | Quasi-peak                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             | Average               |              |  |            |         |          |           |           |       |    |    |      |    |    |
| 0.15-0.5              | 66 to 56*                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              | 56 to 46*             |              |  |            |         |          |           |           |       |    |    |      |    |    |
| 0.5-5                 | 56                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     | 46                    |              |  |            |         |          |           |           |       |    |    |      |    |    |
| 5-30                  | 60                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     | 50                    |              |  |            |         |          |           |           |       |    |    |      |    |    |

### Measurement Data

An initial pre-scan was performed on the live and neutral lines with peak detector.

Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission were detected.


**Product** : WIFI+BT Module

**Model/Type reference** : WCT0SR2311

**Temperature** : 21°C


**Humidity** : 51%

Live line:

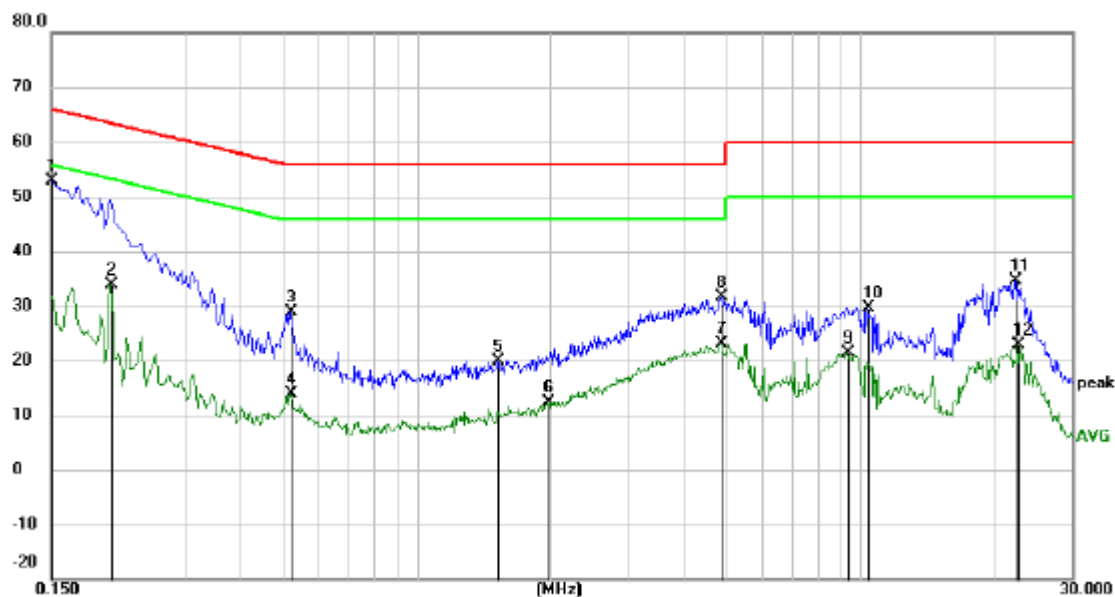

| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV | Limit<br>dBuV | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|--------------------------|---------------|--------------|----------|---------|
| 1   | *   | 0.1500       | 43.02                    | 9.97                    | 52.99                    | 66.00         | -13.01       | peak     |         |
| 2   |     | 0.2040       | 23.95                    | 10.02                   | 33.97                    | 53.45         | -19.48       | AVG      |         |
| 3   |     | 0.5190       | 18.82                    | 10.02                   | 28.84                    | 56.00         | -27.16       | peak     |         |
| 4   |     | 0.5190       | 3.89                     | 10.02                   | 13.91                    | 46.00         | -32.09       | AVG      |         |
| 5   |     | 1.5270       | 10.07                    | 9.87                    | 19.94                    | 56.00         | -36.06       | peak     |         |
| 6   |     | 1.9725       | 2.48                     | 9.83                    | 12.31                    | 46.00         | -33.69       | AVG      |         |
| 7   |     | 4.8345       | 13.34                    | 9.83                    | 23.17                    | 46.00         | -22.83       | AVG      |         |
| 8   |     | 4.8705       | 21.68                    | 9.83                    | 31.51                    | 56.00         | -24.49       | peak     |         |
| 9   |     | 9.3075       | 11.35                    | 9.93                    | 21.28                    | 50.00         | -28.72       | AVG      |         |
| 10  |     | 10.3425      | 19.63                    | 9.96                    | 29.59                    | 60.00         | -30.41       | peak     |         |
| 11  |     | 22.2314      | 24.64                    | 9.94                    | 34.58                    | 60.00         | -25.42       | peak     |         |
| 12  |     | 22.5960      | 12.83                    | 9.94                    | 22.77                    | 50.00         | -27.23       | AVG      |         |

Neutral line:

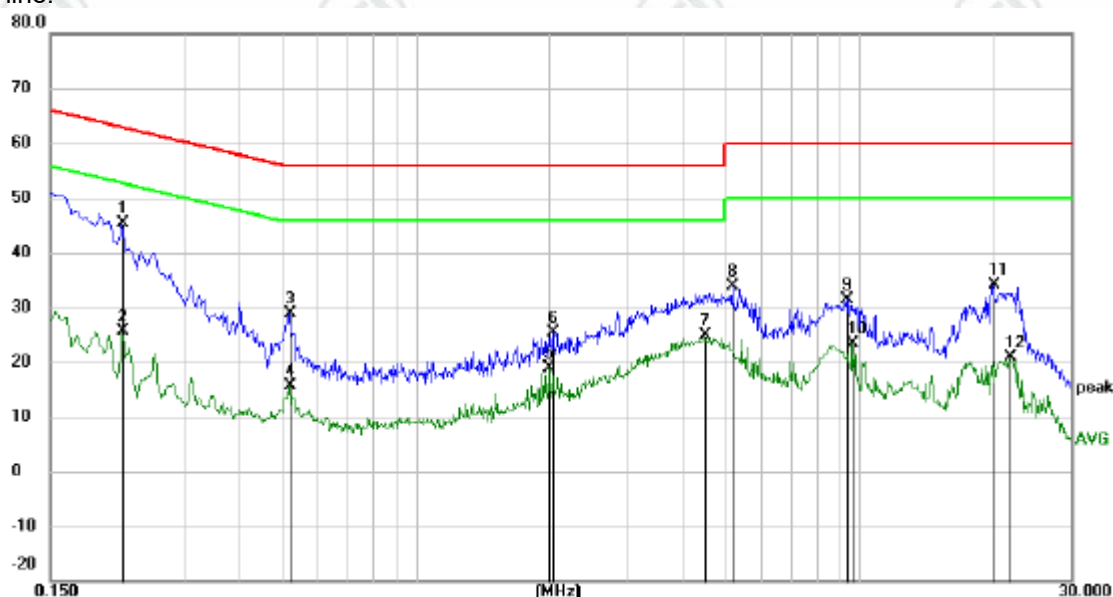

| No. Mk. | Freq.   | Reading Level | Correct Factor | Measurement | Limit | Margin |          |         |
|---------|---------|---------------|----------------|-------------|-------|--------|----------|---------|
|         | MHz     | dBuV          | dB             | dBuV        | dBuV  | dB     | Detector | Comment |
| 1 *     | 0.2175  | 35.30         | 10.03          | 45.33       | 62.91 | -17.58 | peak     |         |
| 2       | 0.2175  | 15.61         | 10.03          | 25.64       | 52.91 | -27.27 | AVG      |         |
| 3       | 0.5190  | 18.74         | 10.02          | 28.76       | 56.00 | -27.24 | peak     |         |
| 4       | 0.5190  | 5.64          | 10.02          | 15.66       | 46.00 | -30.34 | AVG      |         |
| 5       | 1.9995  | 8.98          | 9.83           | 18.81       | 46.00 | -27.19 | AVG      |         |
| 6       | 2.0400  | 15.52         | 9.83           | 25.35       | 56.00 | -30.65 | peak     |         |
| 7       | 4.4880  | 14.96         | 9.83           | 24.79       | 46.00 | -21.21 | AVG      |         |
| 8       | 5.1765  | 23.96         | 9.83           | 33.79       | 60.00 | -26.21 | peak     |         |
| 9       | 9.3569  | 21.43         | 9.94           | 31.37       | 60.00 | -28.63 | peak     |         |
| 10      | 9.6090  | 13.45         | 9.95           | 23.40       | 50.00 | -26.60 | AVG      |         |
| 11      | 19.9500 | 24.12         | 9.93           | 34.05       | 60.00 | -25.95 | peak     |         |
| 12      | 21.8265 | 10.95         | 9.94           | 20.89       | 50.00 | -29.11 | AVG      |         |

Notes:

1. The following Peak and Average measurements were performed on the EUT:
2. Final Test Level = Receiver Reading + LISN Factor + Cable Loss.

## Appendix H): Restricted bands around fundamental frequency (Radiated)


|                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |                    |                  |        |            |
|-----------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------|------------------|--------|------------|
| Receiver Setup: | Frequency                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            | Detector           | RBW              | VBW    | Remark     |
|                 | 30MHz-1GHz                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | Quasi-peak         | 120kHz           | 300kHz | Quasi-peak |
|                 | Above 1GHz                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | Peak               | 1MHz             | 3MHz   | Peak       |
|                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | Peak               | 1MHz             | 10Hz   | Average    |
| Test Procedure: | <p><b>Below 1GHz test procedure as below:</b></p> <p>Test method Refer as KDB 558074 D01 v04, Section 12.1</p> <ol style="list-style-type: none"> <li>The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.</li> <li>The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.</li> <li>The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.</li> <li>For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable was turned from 0 degrees to 360 degrees to find the maximum reading.</li> <li>The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.</li> <li>Place a marker at the end of the restricted band closest to the transmit frequency to show compliance. Also measure any emissions in the restricted bands. Save the spectrum analyzer plot. Repeat for each power and modulation for lowest and highest channel</li> </ol> <p><b>Above 1GHz test procedure as below:</b></p> <ol style="list-style-type: none"> <li>Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber change form table 0.8 meter to 1.5 meter( Above 18GHz the distance is 1 meter and table is 1.5 meter).</li> <li>. Test the EUT in the lowest channel , the Highest channel</li> <li>The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is worse case.</li> <li>Repeat above procedures until all frequencies measured was complete.</li> </ol> |                    |                  |        |            |
| Limit:          | Frequency                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            | Limit (dBμV/m @3m) | Remark           |        |            |
|                 | 30MHz-88MHz                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | 40.0               | Quasi-peak Value |        |            |
|                 | 88MHz-216MHz                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | 43.5               | Quasi-peak Value |        |            |
|                 | 216MHz-960MHz                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | 46.0               | Quasi-peak Value |        |            |
|                 | 960MHz-1GHz                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | 54.0               | Quasi-peak Value |        |            |
|                 | Above 1GHz                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | 54.0               | Average Value    |        |            |
|                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | 74.0               | Peak Value       |        |            |



Test plot as follows:

|         |                       |          |      |
|---------|-----------------------|----------|------|
| Mode:   | BLE GFSK Transmitting | Channel: | 2402 |
| Remark: | PK                    |          |      |

Test Graph

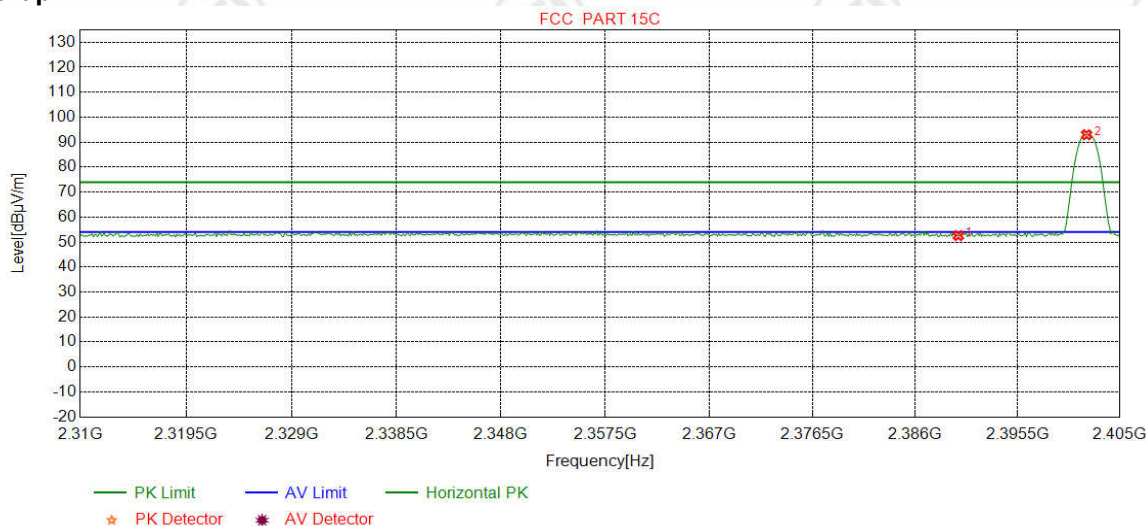


| NO | Freq. [MHz] | Ant Factor [dB] | Cable loss [dB] | Pream gain [dB] | Reading [dBμV] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Result | Polarity   |
|----|-------------|-----------------|-----------------|-----------------|----------------|----------------|----------------|-------------|--------|------------|
| 1  | 2390.0000   | 32.25           | 13.37           | -42.44          | 49.41          | 52.59          | 74.00          | 21.41       | Pass   | Horizontal |
| 2  | 2401.9086   | 32.26           | 13.31           | -42.43          | 89.82          | 92.96          | 74.00          | -18.96      | Pass   | Horizontal |



|         |                       |          |      |
|---------|-----------------------|----------|------|
| Mode:   | BLE GFSK Transmitting | Channel: | 2402 |
| Remark: | PK                    |          |      |


### Test Graph

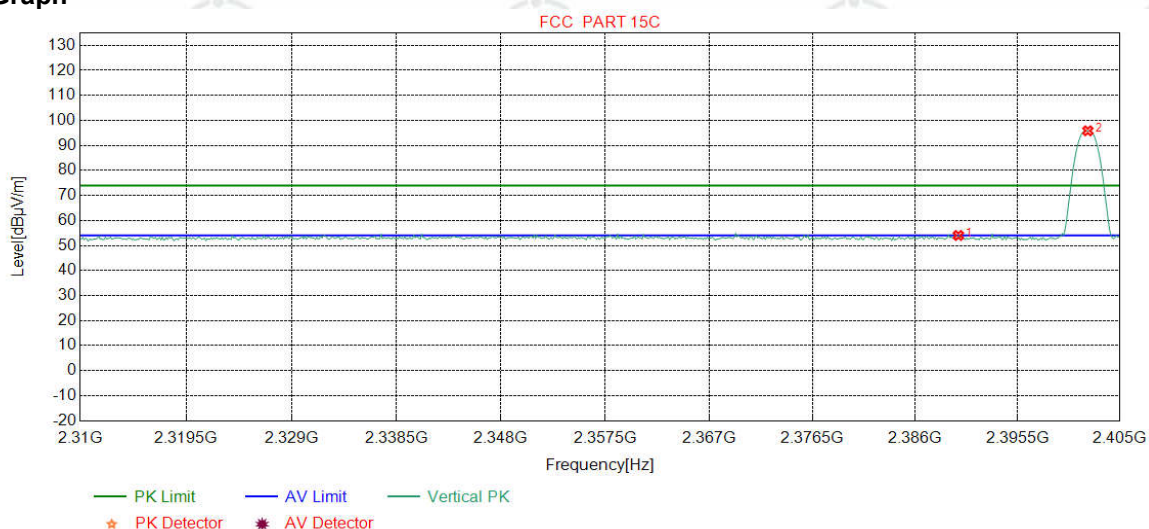

| NO | Freq. [MHz] | Ant Factor [dB] | Cable loss [dB] | Pream gain [dB] | Reading [dBμV] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Result | Polarity |
|----|-------------|-----------------|-----------------|-----------------|----------------|----------------|----------------|-------------|--------|----------|
| 1  | 2390.0000   | 32.25           | 13.37           | -42.44          | 50.84          | 54.02          | 74.00          | 19.98       | Pass   | Vertical |
| 2  | 2402.0275   | 32.26           | 13.31           | -42.43          | 92.70          | 95.84          | 74.00          | -21.84      | Pass   | Vertical |

|         |                       |          |      |
|---------|-----------------------|----------|------|
| Mode:   | BLE GFSK Transmitting | Channel: | 2402 |
| Remark: | AV                    |          |      |


### Test Graph

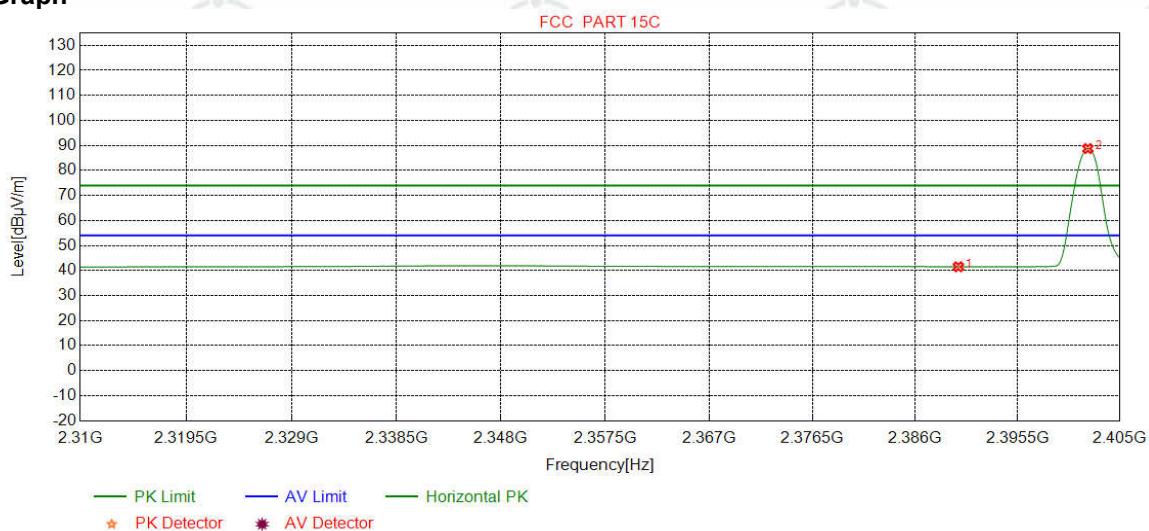

| NO | Freq. [MHz] | Ant Factor [dB] | Cable loss [dB] | Pream gain [dB] | Reading [dBμV] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Result | Polarity   |
|----|-------------|-----------------|-----------------|-----------------|----------------|----------------|----------------|-------------|--------|------------|
| 1  | 2390.0000   | 32.25           | 13.37           | -42.44          | 38.32          | 41.50          | 54.00          | 12.50       | Pass   | Horizontal |
| 2  | 2402.0275   | 32.26           | 13.31           | -42.43          | 85.59          | 88.73          | 54.00          | -34.73      | Pass   | Horizontal |

|         |                       |          |      |
|---------|-----------------------|----------|------|
| Mode:   | BLE GFSK Transmitting | Channel: | 2402 |
| Remark: | AV                    |          |      |


### Test Graph

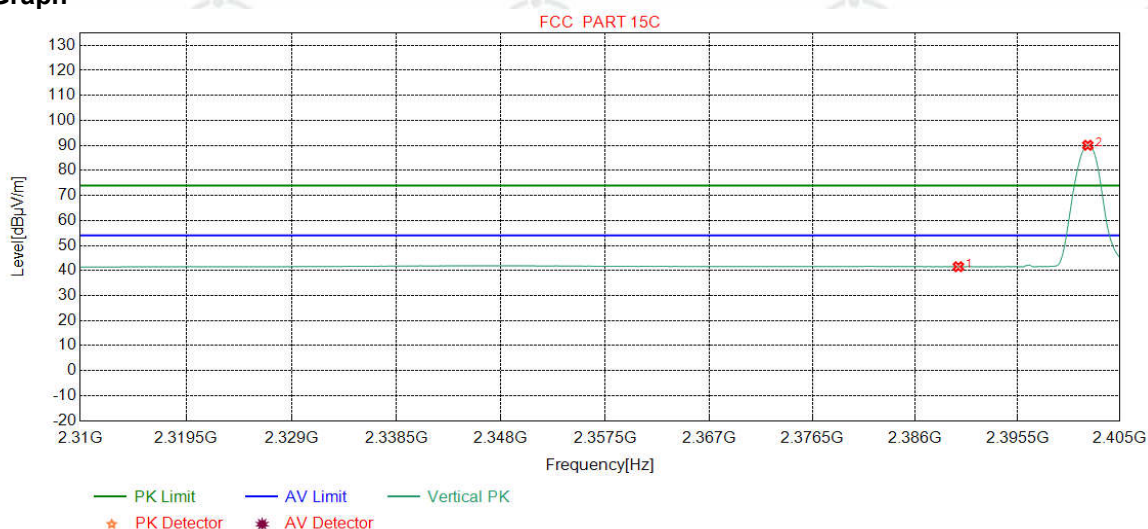

| NO | Freq. [MHz] | Ant Factor [dB] | Cable loss [dB] | Pream gain [dB] | Reading [dBμV] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Result | Polarity |
|----|-------------|-----------------|-----------------|-----------------|----------------|----------------|----------------|-------------|--------|----------|
| 1  | 2390.0000   | 32.25           | 13.37           | -42.44          | 38.36          | 41.54          | 54.00          | 12.46       | Pass   | Vertical |
| 2  | 2402.0275   | 32.26           | 13.31           | -42.43          | 86.91          | 90.05          | 54.00          | -36.05      | Pass   | Vertical |

|         |                       |          |      |
|---------|-----------------------|----------|------|
| Mode:   | BLE GFSK Transmitting | Channel: | 2480 |
| Remark: | PK                    |          |      |


### Test Graph

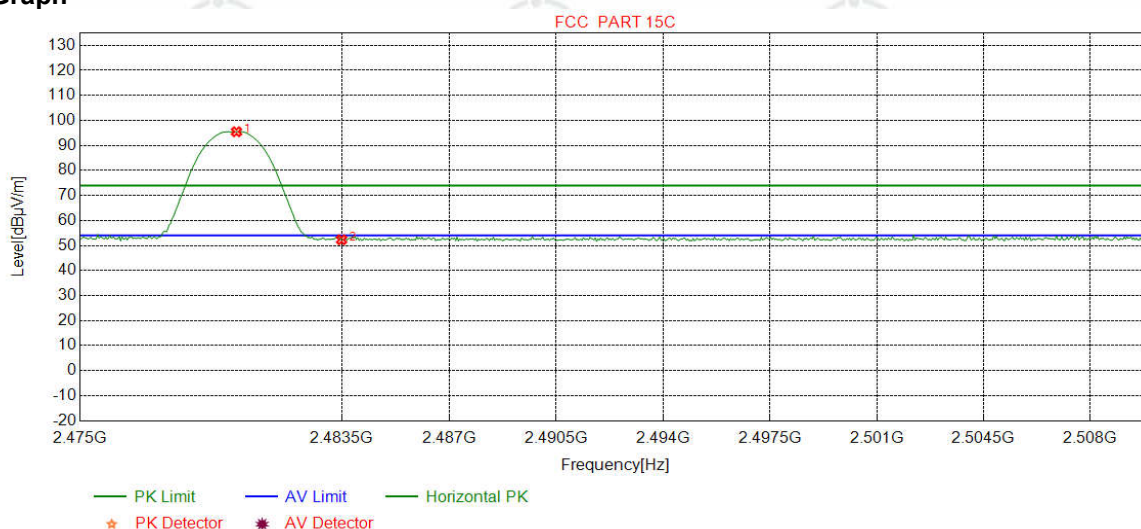

| NO | Freq. [MHz] | Ant Factor [dB] | Cable loss [dB] | Pream gain [dB] | Reading [dBμV] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Result | Polarity   |
|----|-------------|-----------------|-----------------|-----------------|----------------|----------------|----------------|-------------|--------|------------|
| 1  | 2480.0814   | 32.37           | 13.39           | -42.40          | 92.11          | 95.47          | 74.00          | -21.47      | Pass   | Horizontal |
| 2  | 2483.5000   | 32.38           | 13.38           | -42.40          | 48.96          | 52.32          | 74.00          | 21.68       | Pass   | Horizontal |

|         |                       |          |      |
|---------|-----------------------|----------|------|
| Mode:   | BLE GFSK Transmitting | Channel: | 2480 |
| Remark: | PK                    |          |      |

### Test Graph

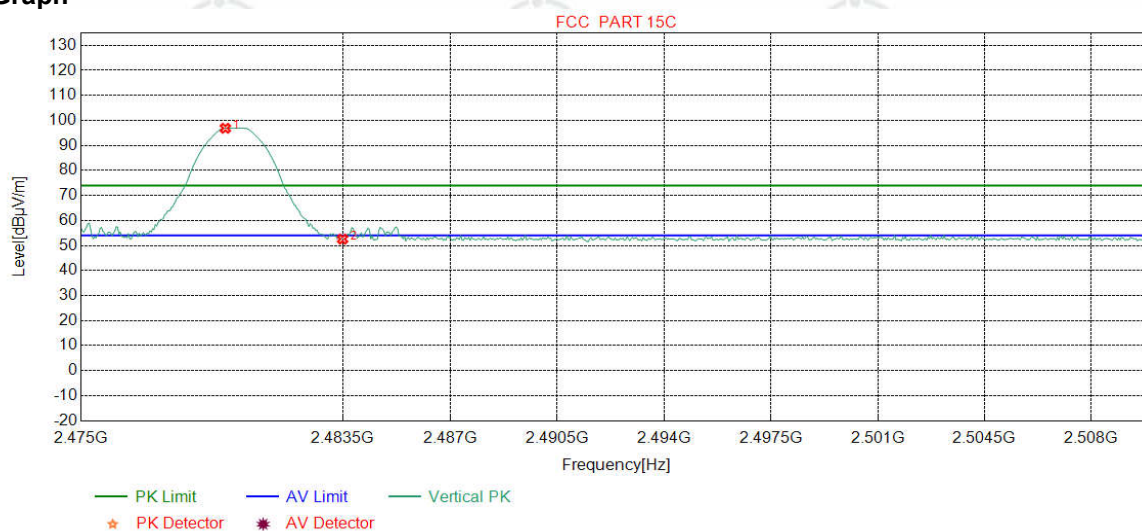


| NO | Freq. [MHz] | Ant Factor [dB] | Cable loss [dB] | Pream gain [dB] | Reading [dBμV] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Result | Polarity |
|----|-------------|-----------------|-----------------|-----------------|----------------|----------------|----------------|-------------|--------|----------|
| 1  | 2479.6871   | 32.37           | 13.39           | -42.39          | 93.49          | 96.86          | 74.00          | -22.86      | Pass   | Vertical |
| 2  | 2483.5000   | 32.38           | 13.38           | -42.40          | 49.22          | 52.58          | 74.00          | 21.42       | Pass   | Vertical |



|         |                       |          |      |
|---------|-----------------------|----------|------|
| Mode:   | BLE GFSK Transmitting | Channel: | 2480 |
| Remark: | AV                    |          |      |


### Test Graph

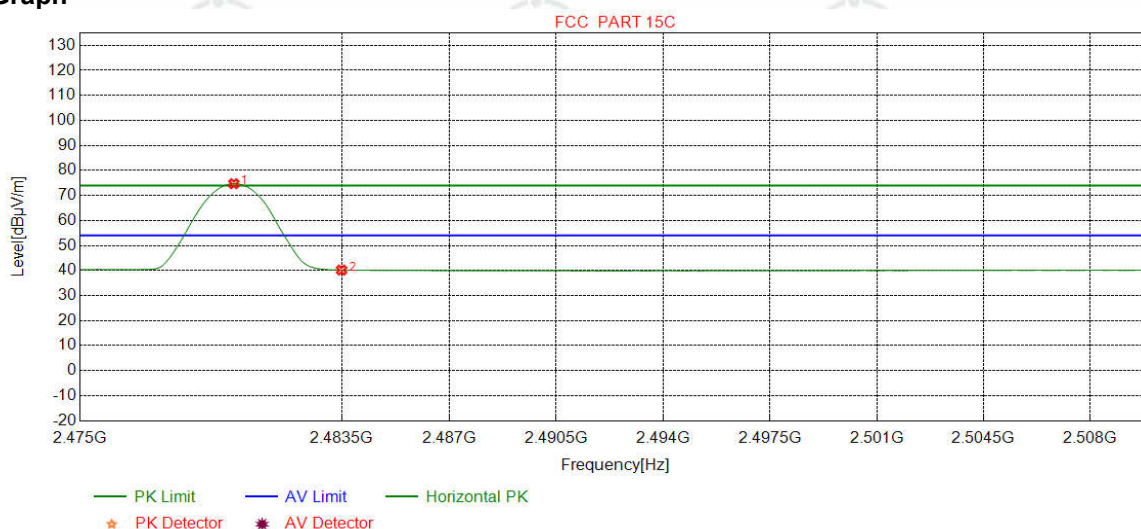

| NO | Freq. [MHz] | Ant Factor [dB] | Cable loss [dB] | Pream gain [dB] | Reading [dBμV] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Result | Polarity   |
|----|-------------|-----------------|-----------------|-----------------|----------------|----------------|----------------|-------------|--------|------------|
| 1  | 2479.9937   | 32.37           | 13.39           | -42.39          | 71.34          | 74.71          | 54.00          | -20.71      | Pass   | Horizontal |
| 2  | 2483.5000   | 32.38           | 13.38           | -42.40          | 36.80          | 40.16          | 54.00          | 13.84       | Pass   | Horizontal |

|         |                       |          |      |
|---------|-----------------------|----------|------|
| Mode:   | BLE GFSK Transmitting | Channel: | 2480 |
| Remark: | AV                    |          |      |

### Test Graph

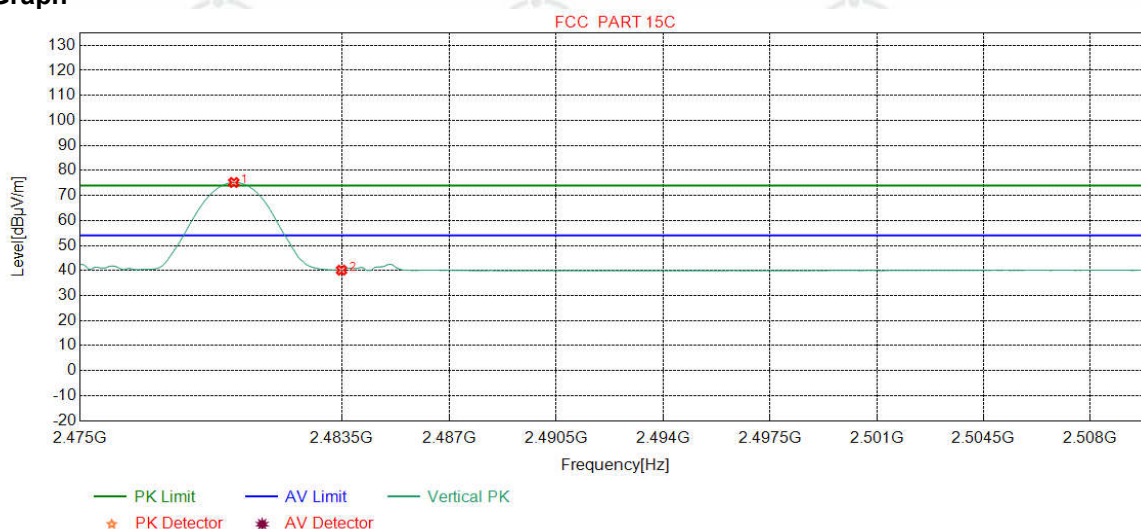

| NO | Freq. [MHz] | Ant Factor [dB] | Cable loss [dB] | Pream gain [dB] | Reading [dBμV] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Result | Polarity |
|----|-------------|-----------------|-----------------|-----------------|----------------|----------------|----------------|-------------|--------|----------|
| 1  | 2479.9937   | 32.37           | 13.39           | -42.39          | 71.81          | 75.18          | 54.00          | -21.18      | Pass   | Vertical |
| 2  | 2483.5000   | 32.38           | 13.38           | -42.40          | 36.78          | 40.14          | 54.00          | 13.86       | Pass   | Vertical |

### Note:

1) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level = Receiver Reading - Correct Factor

Correct Factor = Preamplifier Factor - Antenna Factor - Cable Factor

## Appendix I) Radiated Spurious Emissions

|                                                                                                                                                                                                                                                                                                                                                        |                   |                                  |                |            |                          |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------|----------------------------------|----------------|------------|--------------------------|
| Receiver Setup:                                                                                                                                                                                                                                                                                                                                        | Frequency         | Detector                         | RBW            | VBW        | Remark                   |
|                                                                                                                                                                                                                                                                                                                                                        | 0.009MHz-0.090MHz | Peak                             | 10kHz          | 30kHz      | Peak                     |
|                                                                                                                                                                                                                                                                                                                                                        | 0.009MHz-0.090MHz | Average                          | 10kHz          | 30kHz      | Average                  |
|                                                                                                                                                                                                                                                                                                                                                        | 0.090MHz-0.110MHz | Quasi-peak                       | 10kHz          | 30kHz      | Quasi-peak               |
|                                                                                                                                                                                                                                                                                                                                                        | 0.110MHz-0.490MHz | Peak                             | 10kHz          | 30kHz      | Peak                     |
|                                                                                                                                                                                                                                                                                                                                                        | 0.110MHz-0.490MHz | Average                          | 10kHz          | 30kHz      | Average                  |
|                                                                                                                                                                                                                                                                                                                                                        | 0.490MHz -30MHz   | Quasi-peak                       | 10kHz          | 30kHz      | Quasi-peak               |
|                                                                                                                                                                                                                                                                                                                                                        | 30MHz-1GHz        | Quasi-peak                       | 120kHz         | 300kHz     | Quasi-peak               |
|                                                                                                                                                                                                                                                                                                                                                        | Above 1GHz        | Peak                             | 1MHz           | 3MHz       | Peak                     |
| Peak                                                                                                                                                                                                                                                                                                                                                   |                   | 1MHz                             | 10Hz           | Average    |                          |
| Test Procedure:                                                                                                                                                                                                                                                                                                                                        |                   |                                  |                |            |                          |
| Below 1GHz test procedure as below:                                                                                                                                                                                                                                                                                                                    |                   |                                  |                |            |                          |
| Test method Refer as KDB 558074 D01 v04, Section 12.1                                                                                                                                                                                                                                                                                                  |                   |                                  |                |            |                          |
| a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic camber. The table was rotated 360 degrees to determine the position of the highest radiation.                                                                                                                                              |                   |                                  |                |            |                          |
| b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.                                                                                                                                                                                                             |                   |                                  |                |            |                          |
| c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.                                                                                                                        |                   |                                  |                |            |                          |
| d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable was turned from 0 degrees to 360 degrees to find the maximum reading.                                    |                   |                                  |                |            |                          |
| e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.                                                                                                                                                                                                                                            |                   |                                  |                |            |                          |
| f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet. |                   |                                  |                |            |                          |
| Above 1GHz test procedure as below:                                                                                                                                                                                                                                                                                                                    |                   |                                  |                |            |                          |
| g. Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber and change form table 0.8 meter to 1.5 meter( Above 18GHz the distance is 1 meter and table is 1.5 meter).                                                                                                                                   |                   |                                  |                |            |                          |
| h. Test the EUT in the lowest channel ,the middle channel ,the Highest channel                                                                                                                                                                                                                                                                         |                   |                                  |                |            |                          |
| i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is worse case.                                                                                                                                                                                                |                   |                                  |                |            |                          |
| j. Repeat above procedures until all frequencies measured was complete.                                                                                                                                                                                                                                                                                |                   |                                  |                |            |                          |
| Limit:                                                                                                                                                                                                                                                                                                                                                 | Frequency         | Field strength (microvolt/meter) | Limit (dBµV/m) | Remark     | Measurement distance (m) |
|                                                                                                                                                                                                                                                                                                                                                        | 0.009MHz-0.490MHz | 2400/F(kHz)                      | -              | -          | 300                      |
|                                                                                                                                                                                                                                                                                                                                                        | 0.490MHz-1.705MHz | 24000/F(kHz)                     | -              | -          | 30                       |
|                                                                                                                                                                                                                                                                                                                                                        | 1.705MHz-30MHz    | 30                               | -              | -          | 30                       |
|                                                                                                                                                                                                                                                                                                                                                        | 30MHz-88MHz       | 100                              | 40.0           | Quasi-peak | 3                        |
|                                                                                                                                                                                                                                                                                                                                                        | 88MHz-216MHz      | 150                              | 43.5           | Quasi-peak | 3                        |
|                                                                                                                                                                                                                                                                                                                                                        | 216MHz-960MHz     | 200                              | 46.0           | Quasi-peak | 3                        |
|                                                                                                                                                                                                                                                                                                                                                        | 960MHz-1GHz       | 500                              | 54.0           | Quasi-peak | 3                        |
|                                                                                                                                                                                                                                                                                                                                                        | Above 1GHz        | 500                              | 54.0           | Average    | 3                        |
| Note: 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.                                                                            |                   |                                  |                |            |                          |

### Radiated Spurious Emissions test Data:

#### Radiated Emission below 1GHz

| Mode: |             |                 | BLE GFSK Transmitting |                 |                |                |                | Channel:    |        | 2402     |        |
|-------|-------------|-----------------|-----------------------|-----------------|----------------|----------------|----------------|-------------|--------|----------|--------|
| NO    | Freq. [MHz] | Ant Factor [dB] | Cable loss [dB]       | Pream gain [dB] | Reading [dBμV] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Result | Polarity | Remark |
| 1     | 36.6937     | 11.24           | 0.67                  | -32.11          | 36.85          | 16.65          | 40.00          | 23.35       | Pass   | H        | PK     |
| 2     | 54.6405     | 12.46           | 0.84                  | -32.09          | 31.62          | 12.83          | 40.00          | 27.17       | Pass   | H        | PK     |
| 3     | 87.5268     | 8.83            | 1.08                  | -32.08          | 35.74          | 13.57          | 40.00          | 26.43       | Pass   | H        | PK     |
| 4     | 226.1536    | 11.58           | 1.78                  | -31.92          | 41.12          | 22.56          | 46.00          | 23.44       | Pass   | H        | PK     |
| 5     | 452.1862    | 16.23           | 2.52                  | -31.87          | 41.48          | 28.36          | 46.00          | 17.64       | Pass   | H        | PK     |
| 6     | 879.7080    | 21.86           | 3.55                  | -31.66          | 34.86          | 28.61          | 46.00          | 17.39       | Pass   | H        | PK     |
| 7     | 54.9315     | 12.41           | 0.84                  | -32.08          | 40.75          | 21.92          | 40.00          | 18.08       | Pass   | V        | PK     |
| 8     | 71.8112     | 8.66            | 0.97                  | -32.06          | 38.39          | 15.96          | 40.00          | 24.04       | Pass   | V        | PK     |
| 9     | 130.0170    | 7.70            | 1.33                  | -32.02          | 37.14          | 14.15          | 43.50          | 29.35       | Pass   | V        | PK     |
| 10    | 208.8859    | 11.13           | 1.71                  | -31.94          | 47.02          | 27.92          | 43.50          | 15.58       | Pass   | V        | PK     |
| 11    | 452.2832    | 16.24           | 2.52                  | -31.88          | 39.81          | 26.69          | 46.00          | 19.31       | Pass   | V        | PK     |
| 12    | 844.9785    | 21.44           | 3.50                  | -31.82          | 36.23          | 29.35          | 46.00          | 16.65       | Pass   | V        | PK     |

| Mode: |             |                 | BLE GFSK Transmitting |                 |                |                |                | Channel:    |        | 2440     |        |
|-------|-------------|-----------------|-----------------------|-----------------|----------------|----------------|----------------|-------------|--------|----------|--------|
| NO    | Freq. [MHz] | Ant Factor [dB] | Cable loss [dB]       | Pream gain [dB] | Reading [dBμV] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Result | Polarity | Remark |
| 1     | 36.6937     | 11.24           | 0.67                  | -32.11          | 36.61          | 16.41          | 40.00          | 23.59       | Pass   | H        | PK     |
| 2     | 88.4969     | 9.05            | 1.09                  | -32.08          | 34.75          | 12.81          | 43.50          | 30.69       | Pass   | H        | PK     |
| 3     | 130.0170    | 7.70            | 1.33                  | -32.02          | 38.28          | 15.29          | 43.50          | 28.21       | Pass   | H        | PK     |
| 4     | 226.0566    | 11.58           | 1.78                  | -31.92          | 41.23          | 22.67          | 46.00          | 23.33       | Pass   | H        | PK     |
| 5     | 452.1862    | 16.23           | 2.52                  | -31.87          | 41.71          | 28.59          | 46.00          | 17.41       | Pass   | H        | PK     |
| 6     | 974.9715    | 22.55           | 3.75                  | -30.95          | 37.15          | 32.50          | 54.00          | 21.50       | Pass   | H        | PK     |
| 7     | 54.2524     | 12.52           | 0.83                  | -32.08          | 40.98          | 22.25          | 40.00          | 17.75       | Pass   | V        | PK     |
| 8     | 71.9082     | 8.64            | 0.97                  | -32.05          | 38.79          | 16.35          | 40.00          | 23.65       | Pass   | V        | PK     |
| 9     | 208.8859    | 11.13           | 1.71                  | -31.94          | 47.32          | 28.22          | 43.50          | 15.28       | Pass   | V        | PK     |
| 10    | 452.2832    | 16.24           | 2.52                  | -31.88          | 38.63          | 25.51          | 46.00          | 20.49       | Pass   | V        | PK     |
| 11    | 649.9890    | 19.40           | 3.10                  | -32.07          | 35.66          | 26.09          | 46.00          | 19.91       | Pass   | V        | PK     |
| 12    | 974.9715    | 22.55           | 3.75                  | -30.95          | 35.36          | 30.71          | 54.00          | 23.29       | Pass   | V        | PK     |

| Mode: |                |                       | BLE GFSK Transmitting |                       |                   |                   |                   | Channel:       |        | 2480     |        |
|-------|----------------|-----------------------|-----------------------|-----------------------|-------------------|-------------------|-------------------|----------------|--------|----------|--------|
| NO    | Freq.<br>[MHz] | Ant<br>Factor<br>[dB] | Cable<br>loss<br>[dB] | Pream<br>gain<br>[dB] | Reading<br>[dBμV] | Level<br>[dBμV/m] | Limit<br>[dBμV/m] | Margin<br>[dB] | Result | Polarity | Remark |
| 1     | 36.5967        | 11.21                 | 0.67                  | -32.11                | 37.05             | 16.82             | 40.00             | 23.18          | Pass   | H        | PK     |
| 2     | 87.7208        | 8.88                  | 1.08                  | -32.09                | 35.20             | 13.07             | 40.00             | 26.93          | Pass   | H        | PK     |
| 3     | 226.0566       | 11.58                 | 1.78                  | -31.92                | 41.90             | 23.34             | 46.00             | 22.66          | Pass   | H        | PK     |
| 4     | 452.3802       | 16.24                 | 2.52                  | -31.88                | 40.53             | 27.41             | 46.00             | 18.59          | Pass   | H        | PK     |
| 5     | 687.5318       | 19.70                 | 3.14                  | -32.06                | 36.60             | 27.38             | 46.00             | 18.62          | Pass   | H        | PK     |
| 6     | 974.9715       | 22.55                 | 3.75                  | -30.95                | 35.24             | 30.59             | 54.00             | 23.41          | Pass   | H        | PK     |
| 7     | 54.4464        | 12.49                 | 0.84                  | -32.09                | 40.11             | 21.35             | 40.00             | 18.65          | Pass   | V        | PK     |
| 8     | 120.0250       | 9.20                  | 1.30                  | -32.07                | 36.43             | 14.86             | 43.50             | 28.64          | Pass   | V        | PK     |
| 9     | 208.8859       | 11.13                 | 1.71                  | -31.94                | 46.94             | 27.84             | 43.50             | 15.66          | Pass   | V        | PK     |
| 10    | 290.7621       | 13.02                 | 2.03                  | -31.88                | 41.23             | 24.40             | 46.00             | 21.60          | Pass   | V        | PK     |
| 11    | 452.2832       | 16.24                 | 2.52                  | -31.88                | 39.18             | 26.06             | 46.00             | 19.94          | Pass   | V        | PK     |
| 12    | 974.9715       | 22.55                 | 3.75                  | -30.95                | 36.37             | 31.72             | 54.00             | 22.28          | Pass   | V        | PK     |



**Transmitter Emission above 1GHz**

| Mode: |             |                 | BLE GFSK Transmitting |                 |                |                |                | Channel:    |        | 2402     |        |
|-------|-------------|-----------------|-----------------------|-----------------|----------------|----------------|----------------|-------------|--------|----------|--------|
| NO    | Freq. [MHz] | Ant Factor [dB] | Cable loss [dB]       | Pream gain [dB] | Reading [dBμV] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Result | Polarity | Remark |
| 1     | 1200.4200   | 28.10           | 2.66                  | -42.89          | 57.51          | 45.38          | 74.00          | 28.62       | Pass   | H        | PK     |
| 2     | 1677.6678   | 29.57           | 3.17                  | -42.71          | 55.44          | 45.47          | 74.00          | 28.53       | Pass   | H        | PK     |
| 3     | 3064.0043   | 33.23           | 4.80                  | -42.09          | 50.09          | 46.03          | 74.00          | 27.97       | Pass   | H        | PK     |
| 4     | 6231.2154   | 35.85           | 5.30                  | -41.14          | 46.50          | 46.51          | 74.00          | 27.49       | Pass   | H        | PK     |
| 5     | 8970.3980   | 37.63           | 6.35                  | -40.66          | 45.37          | 48.69          | 74.00          | 25.31       | Pass   | H        | PK     |
| 6     | 13064.6710  | 39.57           | 8.10                  | -41.66          | 46.90          | 52.91          | 74.00          | 21.09       | Pass   | H        | PK     |
| 7     | 1199.8200   | 28.10           | 2.66                  | -42.89          | 60.79          | 48.66          | 74.00          | 25.34       | Pass   | V        | PK     |
| 8     | 1680.8681   | 29.59           | 3.18                  | -42.71          | 56.85          | 46.91          | 74.00          | 27.09       | Pass   | V        | PK     |
| 9     | 3370.0247   | 33.35           | 4.54                  | -41.90          | 49.59          | 45.58          | 74.00          | 28.42       | Pass   | V        | PK     |
| 10    | 7629.3086   | 36.55           | 6.13                  | -40.83          | 46.62          | 48.47          | 74.00          | 25.53       | Pass   | V        | PK     |
| 11    | 11230.5487  | 38.74           | 7.22                  | -41.23          | 47.04          | 51.77          | 74.00          | 22.23       | Pass   | V        | PK     |
| 12    | 14253.7503  | 39.95           | 8.58                  | -41.77          | 47.57          | 54.33          | 74.00          | 19.67       | Pass   | V        | PK     |

| Mode: |             |                 | BLE GFSK Transmitting |                 |                |                |                | Channel:    |        | 2440     |        |
|-------|-------------|-----------------|-----------------------|-----------------|----------------|----------------|----------------|-------------|--------|----------|--------|
| NO    | Freq. [MHz] | Ant Factor [dB] | Cable loss [dB]       | Pream gain [dB] | Reading [dBμV] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Result | Polarity | Remark |
| 1     | 1199.6200   | 28.10           | 2.66                  | -42.89          | 58.84          | 46.71          | 74.00          | 27.29       | Pass   | H        | PK     |
| 2     | 1683.4683   | 29.61           | 3.18                  | -42.70          | 55.19          | 45.28          | 74.00          | 28.72       | Pass   | H        | PK     |
| 3     | 3598.0399   | 33.48           | 4.34                  | -41.61          | 48.95          | 45.16          | 74.00          | 28.84       | Pass   | H        | PK     |
| 4     | 5908.1939   | 35.65           | 5.10                  | -41.00          | 45.90          | 45.65          | 74.00          | 28.35       | Pass   | H        | PK     |
| 5     | 8189.3460   | 36.48           | 6.37                  | -40.83          | 46.58          | 48.60          | 74.00          | 25.40       | Pass   | H        | PK     |
| 6     | 12401.6268  | 39.54           | 7.85                  | -41.12          | 46.81          | 53.08          | 74.00          | 20.92       | Pass   | H        | PK     |
| 7     | 1200.4200   | 28.10           | 2.66                  | -42.89          | 58.75          | 46.62          | 74.00          | 27.38       | Pass   | V        | PK     |
| 8     | 1677.2677   | 29.57           | 3.17                  | -42.71          | 56.40          | 46.43          | 74.00          | 27.57       | Pass   | V        | PK     |
| 9     | 4740.1160   | 34.50           | 4.70                  | -40.71          | 45.48          | 43.97          | 74.00          | 30.03       | Pass   | V        | PK     |
| 10    | 7481.2988   | 36.58           | 5.92                  | -40.79          | 47.40          | 49.11          | 74.00          | 24.89       | Pass   | V        | PK     |
| 11    | 12459.6306  | 39.58           | 7.65                  | -41.11          | 46.26          | 52.38          | 74.00          | 21.62       | Pass   | V        | PK     |
| 12    | 15733.8489  | 41.37           | 9.72                  | -43.17          | 47.28          | 55.20          | 74.00          | 18.80       | Pass   | V        | PK     |

| Mode: |             |                 | BLE GFSK Transmitting |                 |                |                |                | Channel:    |        | 2480     |        |
|-------|-------------|-----------------|-----------------------|-----------------|----------------|----------------|----------------|-------------|--------|----------|--------|
| NO    | Freq. [MHz] | Ant Factor [dB] | Cable loss [dB]       | Pream gain [dB] | Reading [dBμV] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Result | Polarity | Remark |
| 1     | 1200.4200   | 28.10           | 2.66                  | -42.89          | 59.40          | 47.27          | 74.00          | 26.73       | Pass   | H        | PK     |
| 2     | 1678.0678   | 29.58           | 3.17                  | -42.71          | 55.67          | 45.71          | 74.00          | 28.29       | Pass   | H        | PK     |
| 3     | 3353.0235   | 33.34           | 4.52                  | -41.90          | 49.88          | 45.84          | 74.00          | 28.16       | Pass   | H        | PK     |
| 4     | 5549.1699   | 35.08           | 5.16                  | -40.69          | 46.20          | 45.75          | 74.00          | 28.25       | Pass   | H        | PK     |
| 5     | 8242.3495   | 36.50           | 6.23                  | -40.79          | 47.07          | 49.01          | 74.00          | 24.99       | Pass   | H        | PK     |
| 6     | 11768.5846  | 39.11           | 7.47                  | -41.29          | 46.39          | 51.68          | 74.00          | 22.32       | Pass   | H        | PK     |
| 7     | 1200.2200   | 28.10           | 2.66                  | -42.89          | 59.92          | 47.79          | 74.00          | 26.21       | Pass   | V        | PK     |
| 8     | 1500.4500   | 28.40           | 2.99                  | -42.67          | 58.32          | 47.04          | 74.00          | 26.96       | Pass   | V        | PK     |
| 9     | 3738.0492   | 33.59           | 4.32                  | -41.32          | 49.67          | 46.26          | 74.00          | 27.74       | Pass   | V        | PK     |
| 10    | 4770.1180   | 34.50           | 4.59                  | -40.68          | 46.96          | 45.37          | 74.00          | 28.63       | Pass   | V        | PK     |
| 11    | 7054.2703   | 36.15           | 5.70                  | -41.14          | 46.26          | 46.97          | 74.00          | 27.03       | Pass   | V        | PK     |
| 12    | 10134.4756  | 37.99           | 6.87                  | -40.62          | 46.74          | 50.98          | 74.00          | 23.02       | Pass   | V        | PK     |

**Note:**

1) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level = Receiver Reading - Correct Factor

Correct Factor = Preamplifier Factor - Antenna Factor - Cable Factor

2) Scan from 9kHz to 25GHz, the disturbance above 13GHz and below 30MHz was very low, and the above harmonics were the highest point could be found when testing, so only the above harmonics had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.