



**FCC 47 CFR PART 15 SUBPART E
(Class II Permissive Change)**

TEST REPORT

For

802.11a/b/g Mini PCI Card

Model: WLL4071

Trade Name: Askey

Issued to

**ASKEY COMPUTER CORP.
10F, No.119, CHIENKANG RD., CHUNG-HO,
TAIPEI, TAIWAN, R.O.C.**

Issued by

**Compliance Certification Services Inc.
No. 81-1, Lane 210, Bade Rd. 2, Luchu Hsiang,
Taoyuan Hsien, (338) Taiwan, R.O.C.
<http://www.ccsemc.com.tw>
service@tw.ccsemc.com**



Note: This report shall not be reproduced except in full, without the written approval of Compliance Certification Services Inc. This document may be altered or revised by Compliance Certification Services Inc. personnel only, and shall be noted in the revision section of the document.



TABLE OF CONTENTS

1. TEST RESULT CERTIFICATION.....	3
2. EUT DESCRIPTION	4
3. TEST METHODOLOGY	6
3.1 EUT CONFIGURATION	6
3.2 EUT EXERCISE	6
3.3 GENERAL TEST PROCEDURES	6
3.4 FCC PART 15.205 RESTRICTED BANDS OF OPERATIONS	7
3.5 DESCRIPTION OF TEST MODES	8
4. INSTRUMENT CALIBRATION.....	9
4.1 MEASURING INSTRUMENT CALIBRATION	9
4.2 MEASUREMENT EQUIPMENT USED	9
5. FACILITIES AND ACCREDITATIONS	10
5.1 FACILITIES	10
5.2 EQUIPMENT	10
5.3 TABLE OF ACCREDITATIONS AND LISTINGS	11
6. SETUP OF EQUIPMENT UNDER TEST	12
6.1 SETUP CONFIGURATION OF EUT	12
6.2 SUPPORT EQUIPMENT	12
7. FCC PART 15 REQUIREMENTS.....	13
7.1 26 DB EMISSION BANDWIDTH.....	13
7.2 PEAK POWER	16
7.3 BAND EDGES MEASUREMENT	20
7.4 PEAK POWER SPECTRAL DENSITY	26
7.5 PEAK EXCURSION.....	29
7.6 RADIATED UNDESIRABLE EMISSION.....	32
7.7 CONDUCTED UNDESIRABLE EMISSION	39
7.8 TRANSMISSION IN ABSENCE OF DATA	42
7.9 FREQUENCY STABILITY.....	42
APPENDIX I RADIO FREQUENCY EXPOSURE	43
APPENDIX II PHOTOGRAPHS OF TEST SETUP	45



1. TEST RESULT CERTIFICATION

Applicant: ASKEY COMPUTER CORP.
10F, No.119, CHIENKANG RD., CHUNG-HO,
TAIPEI, TAIWAN, R.O.C.

Equipment Under Test: 802.11a/b/g Mini PCI Card

Trade Name: Askey

Model: WLL4071

Date of Test: May 9, 2005 ~ November 24, 2006

APPLICABLE STANDARDS	
STANDARD	TEST RESULT
FCC 47 CFR Part 15 Subpart E	No non-compliance noted
Deviation from Applicable Standard	
DFS and TPC test items were tested at Compliance Certification Services (U.S.A. Lab.). Please refer to the separated DFS / TPC test report.	

We hereby certify that:

Compliance Certification Services Inc. tested the above equipment. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.4: 2003 and the energy emitted by the sample EUT tested as described in this report is in compliance with conducted and radiated emission limits of FCC Rules Part 15.407.

The test results of this report relate only to the tested sample identified in this report.

Approved by:

Gavin Lim
Section Manager
Compliance Certification Services Inc.

Reviewed by:

Amanda Wu
Section Manager
Compliance Certification Services Inc.



2. EUT DESCRIPTION

Product	802.11a/b/g Mini PCI Card
Trade Name	Askey
Model Number	WLL4071
Model Discrepancy	N/A
Power Supply	Powered from host device
Frequency Range	5150 ~ 5350 MHz 5470 ~ 5725 MHz
Transmit Power	5150 ~ 5350 MHz 17.90 dBm 5470 ~ 5725 MHz: 15.59 dBm
Modulation Technique	OFDM (QPSK, BPSK, 16-QAM, 64-QAM)
Transmit Data Rate	54, 48, 36, 24, 18, 12, 9, 6 Mbps
Number of Channels	5150 ~ 5350 MHz: 8 Channels 5470 ~ 5725 MHz: 11 Channels
Antenna Specification	Hitachi / HTL017 5150 ~ 5350 MHz: PIFA Antenna / 1.2 dBi 5470 ~ 5725 MHz: PIFA Antenna / 1.8 dBi Hitachi / HTL008 5150 ~ 5350 MHz: PIFA Antenna / 0.8 dBi 5470 ~ 5725 MHz: PIFA Antenna / 1.2 dBi Tyco / TIAN01 5150 ~ 5350 MHz: PIFA Antenna / 1.6 dBi 5470 ~ 5725 MHz: PIFA Antenna / 1.0 dBi
Class II Permissive Change	The major change filed under this application is: 1. Add 5470MHz~5725MHz operational frequency band and DFS/TPC function for 5250MHz~5350MHz & 5470MHz~5725MHz frequency band 2. Delete turbo mode of 5210MHz~5290MHz. This was upgrade by software / firmware change without hardware changes.

**Operation Frequency:**

UNLICENSED NATIONAL INFORMATION INFRASTRUCTURE (U-NII)	
CHANNEL	MHz
36	5180
40	5200
44	5220
48	5240
52	5260
56	5280
60	5300
64	5320
100	5500
104	5520
108	5540
112	5560
116	5580
120	5600
124	5620
128	5640
132	5660
136	5680
140	5700

Remark:

- 1. The sample selected for test was engineering sample that approximated to production product and was provided by manufacturer.*
- 2. This submittal(s) (test report) is intended for FCC ID: H8NWLL4071 filing to comply with Section 15.407 of the FCC Part 15, Subpart E Rules.*



3. TEST METHODOLOGY

Both conducted and radiated testing was performed according to the procedures in ANSI C63.4. Radiated testing was performed at an antenna to EUT distance 3 meters.

3.1 EUT CONFIGURATION

The EUT configuration for testing is installed for RF field strength measurement to meet the Commissions requirement, and is operated in a manner intended to generate the maximum emission in a continuous normal application.

3.2 EUT EXERCISE

The EUT is operated in the engineering mode to fix the Tx frequency for the purposes of measurement.

According to its specifications, the EUT must comply with the requirements of Section 15.407 under the FCC Rules Part 15 Subpart E.

3.3 GENERAL TEST PROCEDURES

Conducted Emissions

The EUT is placed on the turntable, which is positioned at 0.8 m above the ground plane. According to the requirements in Section 13.1.4.1 of ANSI C63.4, the conducted emission from the EUT is measured in the frequency range between 0.15 MHz and 30MHz, using the CISPR Quasi-Peak detector mode.

Radiated Emissions

The EUT is placed on the turntable, which is 0.8 m above the ground plane. The turntable is then rotated for 360 degrees to determine the proper orientation for the maximum emission level. The EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emission level. And, each emission is to be maximized by changing the horizontal and vertical polarization of the receiving antenna. In order to find out the maximum emissions, exploratory radiated emission measurements were made according to the requirements in Section 13.1.4.1 of ANSI C63.4.



3.4 FCC PART 15.205 RESTRICTED BANDS OF OPERATIONS

- (a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 -	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.52525	2655 - 2900	22.01 - 23.12
8.41425 - 8.41475	156.7 - 156.9	3260 - 3267	23.6 - 24.0
12.29 - 12.293	162.0125 - 167.17	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	167.72 - 173.2	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	240 - 285	3600 - 4400	(²)
13.36 - 13.41	322 - 335.4		

¹ Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

² Above 38.6

- (b) Except as provided in paragraphs (d) and (e), the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section 15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.



3.5 DESCRIPTION OF TEST MODES

The EUT (model: WLL4071) comes with three types of antenna for sale. After the preliminary test, the EUT with antenna (Model: HTL017) was found to emit the worst emissions and therefore had been tested under operating condition.

Software used to control the EUT for staying in continuous transmitting mode was programmed.

After verification, all tests were carried out with the worst case test modes as shown below except radiated spurious emission below 1GHz, which worst case was in normal link mode only.

IEEE 802.11a:

Channel Low (5500MHz), Channel Mid (5600MHz) and Channel High (5700MHz) with 6Mbps data rate were chosen for full testing.



4. INSTRUMENT CALIBRATION

4.1 MEASURING INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment, which is traceable to recognized national standards.

4.2 MEASUREMENT EQUIPMENT USED

Equipment Used for Emissions Measurement

Remark: Each piece of equipment is scheduled for calibration once a year.

Conducted Emissions Test Site				
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
Spectrum Analyzer	Agilent	E4446A	MY43360131	01/18/2007

3M Semi Anechoic Chamber				
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
Spectrum Analyzer	Agilent	E4446A	US42510252	07/24/2007
Test Receiver	Rohde&Schwarz	ESCI	100064	06/27/2007
Switch Controller	TRC	Switch Controller	SC94050010	05/05/2007
4 Port Switch	TRC	4 Port Switch	SC94050020	05/05/2007
Pre-Amplifier	MITEC	AMF-6F-260400-40-8P	929155/937384	N.C.R.
Horn-Antenna	TRC	HA-0502	06	06/02/2007
Horn-Antenna	TRC	HA-0801	04	05/05/2007
Horn-Antenna	TRC	HA-1201A	01	07/03/2007
Horn-Antenna	TRC	HA-1301A	01	07/03/2007
Bilog- Antenna	Sunol Sciences	JB3	A030205	03/09/2007
Turn Table	Max-Full	MFT-120S	T120S940302	N.C.R.
Antenna Tower	Max-Full	MFA-430	A440940302	N.C.R.
Controller	Max-Full	MF-CM886	CC-C-1F-13	N.C.R.
Site NSA	CCS	N/A	FCC: 965860 IC: IC 6106	09/26/2008
Test S/W	LABVIEW (V 6.1)			

Remark: The measurement uncertainty is less than $\pm 2.0065\text{dB}$ (30MHz ~ 1GHz), $\pm 3.0958\text{dB}$ (Above 1GHz) which is evaluated as per the NAMAS NIS 81 and CISPR/A/291/CDV.



5. FACILITIES AND ACCREDITATIONS

5.1 FACILITIES

All measurement facilities used to collect the measurement data are located at

☐ No. 199, Chunghsen Road, Hsintien City, Taipei Hsien, Taiwan, R.O.C.

Tel: 886-2-2217-0894 / Fax: 886-2-2217-1029

☒ No. 11, Wugong 6th Rd., Wugu Industrial Park, Taipei Hsien 248, Taiwan

Tel: 886-2-2299-9720 / Fax: 886-2-2298-4045

☒ No.81-1, Lane 210, Bade 2nd Rd., Luchu Hsiang, Taoyuan Hsien 338, Taiwan

Tel: 886-3-324-0332 / Fax: 886-3-324-5235

The sites are constructed in conformance with the requirements of ANSI C63.7, ANSI C63.4 and CISPR Publication 22.

5.2 EQUIPMENT








Radiated emissions are measured with one or more of the following types of linearly polarized antennas: tuned dipole, biconical, log periodic, bi-log, and/or ridged waveguide, horn. Spectrum analyzers with pre-selectors and quasi-peak detectors are used to perform radiated measurements.

Conducted emissions are measured with Line Impedance Stabilization Networks and EMI Test Receivers.

Calibrated wideband preamplifiers, coaxial cables, and coaxial attenuators are also used for making measurements.

All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

5.3 TABLE OF ACCREDITATIONS AND LISTINGS

Country	Agency	Scope of Accreditation	Logo
USA	A2LA	EN 55011, EN 55014-1/2, CISPR 11, CISPR 14-1/2, EN 55022, EN 55015, CISPR 22, CISPR 15, AS/NZS 3548, VCCI V3 (2001), CFR 47, FCC Part 15/18, CNS 13783-1, CNS 13439, CNS 13438, CNS 13803, CNS 14115, EN 55024, IEC 801-2, IEC 801-3, IEC 801-4, IEC/EN 61000-3-2, EIC/EN 61000-3-3, IEC/EN 61000-4-2/3/4/5/6/8/11, EN 50081-1/ EN 61000-6-3, EN 50081-2/EN 61000-6-4, EN 50081-2/EN 61000-6-1: 2001	 0824-01
USA	FCC	3/10 meter Open Area Test Sites (93105, 90471) / 3M Semi Anechoic Chamber (965860) to perform FCC Part 15/18 measurements	 93105, 90471 965860
Japan	VCCI	3/10 meter Open Area Test Sites to perform conducted/radiated measurements	 R-393/1066/725/879 C-402/747/912
Norway	NEMKO	EN 50081-1/2, EN 50082-1/2, IEC 61000-6-1/2, EN 50091-2, EN 50130-4, EN 55011, EN 55013, EN 55014-1/2, EN 55015, EN 55022, EN 55024, EN 61000-3-2/3, EN 61326-1, IEC 61000-4-2/3/4/5/6/8/11, EN 60601-1-2, EN 300 328, EN 300 422-2, EN 301 419-1, EN 301 489-01/03/07/08/09/17, EN 301 419-2/3, EN 300 454-2, EN 301 357-2	 ELA 124a ELA 124b ELA 124c
Taiwan	TAF	EN 300 328, EN 300 220-1, EN 300 220-2, EN 300 220-3, 47 CFR FCC Part 15 Subpart C, EN 61000-3-2, EN 61000-3-3, CNS 13439, CNS 13783-1, CNS 14115, CNS 13438, AS/NZS CISPR 22, CNS 13022-1, IEC 61000-4-2/3/4/5/6/8/11, CNS 13022-2/3	
Taiwan	BSMI	CNS 13438, CNS 13783-1, CNS 13439, CNS 14115	 SL2-IS-E-0014 SL2-IN-E-0014 SL2-A1-E-0014 SL2-R1-E-0014 SL2-R2-E-0014 SL2-L1-E-0014
Canada	Industry Canada	3/10 meter Open Area Test Sites (IC 3991-3, IC 3991-4) / 3M Semi Anechoic Chamber (IC 6106) to perform RSS 212 Issue 1	 IC 3991-3 IC 3991-4 IC 6106

No part of this report may be used to claim or imply product endorsement by NVLAP or any agency of the US Government.



6. SETUP OF EQUIPMENT UNDER TEST

6.1 SETUP CONFIGURATION OF EUT

See test photographs attached in Appendix 1 for the actual connections between EUT and support equipment.

6.2 SUPPORT EQUIPMENT

No.	Device Type	Brand	Model	Series No.	FCC ID	Data Cable	Power Cord
1.	Notebook PC	IBM	2672(X31)	99PBTKB	WLAN: ANO20030400LEG Bluetooth: ANO20020100MTN	N/A	AC I/P: Unshielded, 1.8m DC O/P: Unshielded, 1.8m with a core
2.	ProCurve Wireless Access Point 530	HP-ProCurve Networking	RSVLC-0501	N/A	B94RSVLC-0501	N/A	N/A

Remark:

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.




7. FCC PART 15 REQUIREMENTS

7.1 26 DB EMISSION BANDWITH

LIMIT

According to §15.303(c), for purposes of this subpart the emission bandwidth shall be determined by measuring the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, that are 26 dB down relative to the maximum level of the modulated carrier. Compliance with the emissions limits is based on the use of measurement instrumentation employing a peak detector function with an instrument resolutions bandwidth approximately equal to 1.0 percent of the emission bandwidth of the device under measurement.

Test Configuration

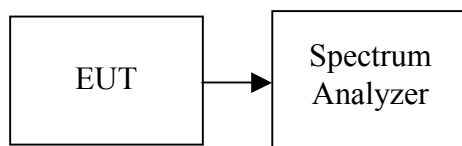

TEST PROCEDURE

1. Place the EUT on the table and set it in the transmitting mode.
 2. Remove the antenna from the EUT and then connect a low-loss RF cable from the antenna port to the spectrum analyzer.
 3. Set the spectrum analyzer as RBW = 1%EBW, VBW = RBW, Span = 50MHz , and Sweep = auto.
- Or Set the spectrum analyzer as RBW > 1%EBW, VBW > RBW, Span >26dB bandwidth, and Sweep = auto.
4. Mark the peak frequency and -26dB (upper and lower) frequency.
 5. Repeat until all the rest channels were investigated.

TEST RESULTS

No non-compliance noted

Test Data

Channel	Frequency (MHz)	Bandwidth (MHz)
Low	5500	26.655
Mid	5600	24.488
High	5700	24.448



Test Plot

CH Low

Agilent 11:00:53 Nov 24, 2006

R L

26 dB BW, a Mode Low Ch.

Ref 20 dBm

Atten 20 dB

#Peak

Log

10

dB/

Offst

11

dB

LgAv

M1 S2

Center 5.500 00 GHz

Span 50 MHz

#Res BW 270 kHz

#VBW 820 kHz

Sweep 1 ms (601 pts)

Occupied Bandwidth

16.9983 MHz

Occ BW % Pwr 99.00 %

x dB -26.00 dB

Transmit Freq Error

7.754 kHz

x dB Bandwidth

26.655 MHz

CH Mid

Agilent 10:47:49 Nov 24, 2006

R L

26 dB BW, a Mode Mid Ch.

Ref 20 dBm

Atten 20 dB

#Peak

Log

10

dB/

Offst

11

dB

LgAv

M1 S2

Center 5.600 00 GHz

Span 50 MHz

#Res BW 300 kHz

#VBW 820 kHz

Sweep 1 ms (601 pts)

Occupied Bandwidth

17.0287 MHz

Occ BW % Pwr 99.00 %

x dB -26.00 dB

Transmit Freq Error

-82.968 kHz

x dB Bandwidth

24.488 MHz



CH High

Agilent 10:55:04 Nov 24, 2006

R L

26 dB BW, a Mode High Ch.

Ref 20 dBm

Atten 20 dB

#Peak

Log

10

dB/

Offst

11

dB

LgAv

M1 S2

Center 5.700 00 GHz

#Res BW 240 kHz

#VBW 750 kHz

Span 50 MHz

Sweep 1 ms (601 pts)

Occupied Bandwidth

16.9145 MHz

Occ BW % Pwr 99.00 %

x dB -26.00 dB

Transmit Freq Error -41.169 kHz

x dB Bandwidth 24.448 MHz



7.2 PEAK POWER

LIMIT

- For the band 5.15-5.25 GHz, the peak transmit power over the frequency band of operation shall not exceed the lesser of 50mW (17dBm) or $4\text{dBm} + 10\log B$, where B is the 26dB emission bandwidth in MHz. In addition, the peak power spectral density shall not exceed 4dBm in any 1 MHz band.
- For the 5.25-5.35 GHz and 5.47-5.725GHz bands, the peak transmit power over the frequency band of operation shall not exceed the lesser of 250mW (24dBm) or $11\text{dBm} + 10\log B$, where B is the 26dB emission bandwidth in MHz. In addition, the peak power spectral density shall not exceed 11dBm in any 1 MHz band.


If transmitting antennas of directional gain greater than 6dBi are used, both the peak transmit power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi. The peak power shall not exceeded the limit as follows:

Channel	Frequency (MHz)	26 dB Bandwidth (B) (MHz)	10 Log B (dB)	11 + 10 Log B (dBm)	Power Limit (dBm)
Low	5500	26.655	14.26	25.26	24.00
Mid	5600	24.488	13.89	24.89	24.00
High	5700	24.448	13.88	24.88	24.00

(Remark: Maximum antenna gain = 1.8 dBi, therefore there is no reduction due to antenna gain.)

**Test Configuration**

The EUT was connected to a spectrum analyzer through a 50 Ω RF cable.

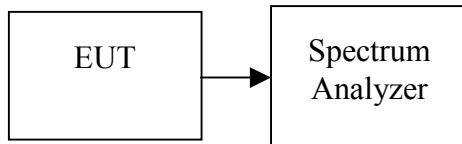**TEST PROCEDURE**

Set span to encompass the entire emission bandwidth (EBW) of the signal.

Set RBW = 1 MHz / Set VBW = 3 MHz.

Use sample detector mode if bin width (i.e., span/number of points in spectrum display) < 0.5 RBW. Otherwise use peak detector mode. Use a video trigger with the trigger level set to enable triggering only on full power pulses. Transmitter must operate at full control power for entire sweep of every sweep. If the device transmits continuously, with no off intervals or reduced power intervals, the trigger may be set to “free run”. Trace average 100 traces in power averaging mode. Compute power by integrating the spectrum across the 26 dB EBW of the signal. The integration can be performed using the spectrum analyzer’s band power measurement function with band limits set equal to the EBW band edges or by summing power levels in each 1 MHz band in linear power terms. The 1 MHz band power levels to be summed can be obtained by averaging, in linear power terms, power levels in each frequency bin across the 1 MHz.

TEST RESULTS

No non-compliance noted

Test Data

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)
Low	5500	15.31	24.00
Mid	5600	15.59	24.00
High	5700	15.37	24.00



Test Plot

CH Low


Agilent 11:01:26 Nov 24, 2006

R L

Peak Transmit Power, a Mode Low Ch.

Ref 30 dBm

Atten 30 dB

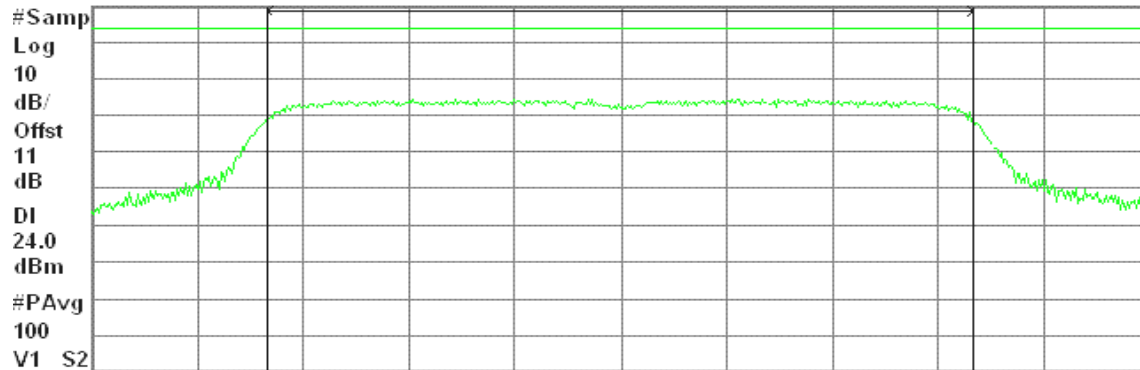

Center 5.500 00 GHz

Span 25.24 MHz

#Res BW 1 MHz

#VBW 3 MHz

Sweep 1 ms (601 pts)

Channel Power

Power Spectral Density

15.31 dBm / 16.8273 MHz

-56.95 dBm/Hz

CH Mid


Agilent 10:48:30 Nov 24, 2006

R L

Peak Transmit Power, a Mode Mid Ch.

Ref 30 dBm

Atten 30 dB

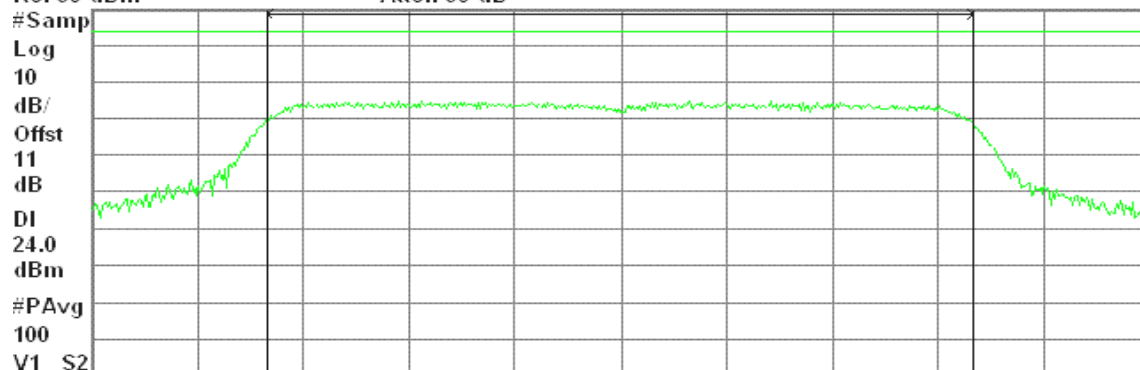

Center 5.600 00 GHz

Span 25.23 MHz

#Res BW 1 MHz

#VBW 3 MHz

Sweep 1 ms (601 pts)

Channel Power

Power Spectral Density

15.59 dBm / 16.8225 MHz

-56.67 dBm/Hz



CH High


Agilent 10:56:18 Nov 24, 2006

R L

Peak Transmit Power, a Mode High Ch.

Ref 30 dBm

Atten 30 dB

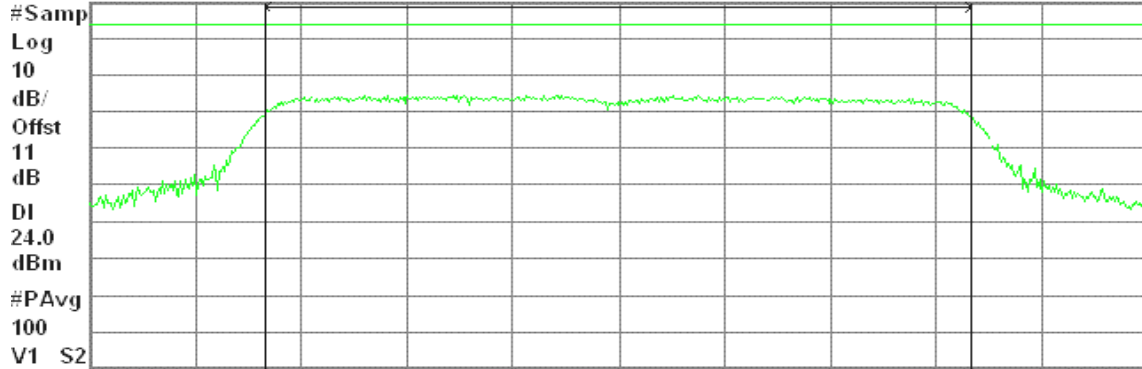

Center 5.700 00 GHz

Span 25.2 MHz

#Res BW 1 MHz

#VBW 3 MHz

Sweep 1 ms (601 pts)

Channel Power

Power Spectral Density

15.37 dBm / 16.7975 MHz

-56.88 dBm/Hz

7.3 BAND EDGES MEASUREMENT


LIMIT

According to §15.407(b), Except as shown in Paragraph (b)(6) of this section, the peak emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:

- (1) For transmitters operating in the 5.15-5.25 GHz band: all emissions outside of the 5.15-5.35 GHz band shall not exceed an EIRP of -27 dBm/MHz.
- (2) For transmitters operating in the 5.25-5.35 GHz band: all emissions outside of the 5.15-5.35 GHz band shall not exceed an EIRP of -27 dBm/MHz. Devices operating in the 5.25-5.35 GHz band that generate emissions in the 5.15-5.25 GHz band must meet all applicable technical requirements for operation in the 5.15-5.25 GHz band (including indoor use) or alternatively meet an out-of-band emission EIRP limit of -27 dBm/MHz in the 5.15-5.25 GHz band.
- (3) For transmitters operating in the 5.47-5.725 GHz band: all emissions outside of the 5.47-5.725 GHz band shall not exceed an EIRP of -27 dBm/MHz.

The provisions of §15.205 apply to intentional radiators operating under this section.

Test Configuration

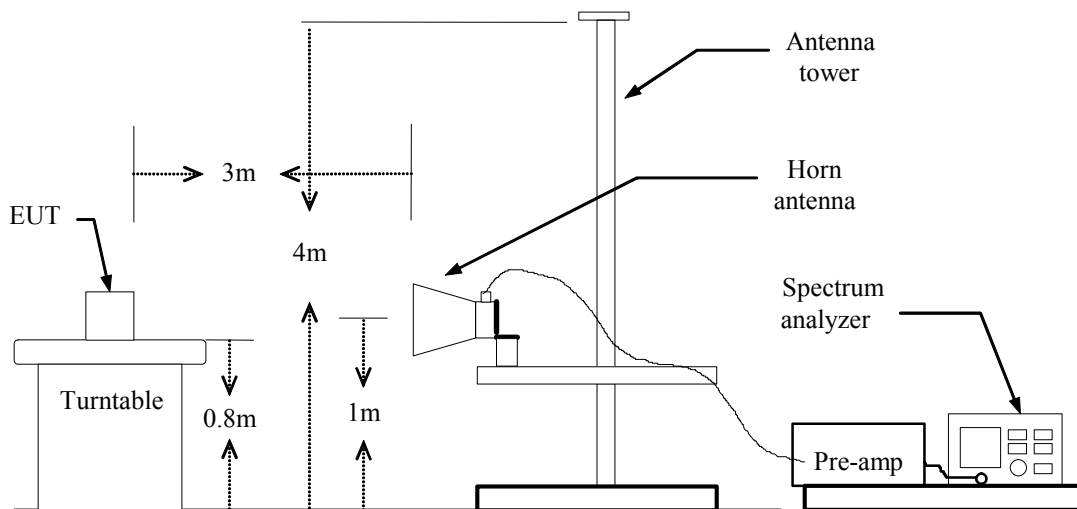



TEST PROCEDURE

1. The EUT is placed on a turntable, which is 0.8m above the ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emission.
4. Set the spectrum analyzer in the following setting in order to capture the lower and upper band-edges of the emission:
 - (a) PEAK: RBW=VBW=1MHz / Sweep=AUTO
 - (b) AVERAGE: RBW=1MHz / VBW=10Hz / Sweep=AUTO
5. Repeat the procedures until all the PEAK and AVERAGE versus POLARIZATION are measured.

REPORTING NOTES

The nearby restricted band stops 10 MHz below the authorized band. A single plot is taken to show both restricted band emission levels and out-of-band radiated spurious emission levels at and near the lower authorized bandedge. The out-of-band spurious limits of -7 dBm Peak EIRP and -27 dBm Average EIRP are converted to the equivalent 3 meter field strengths of 88.2 dBuV/m Peak and 68.2 dBuV/m Average, respectively, for reporting purposes.

The out-of- band radiated spurious emission levels at and near the upper authorized bandedge are reported as EIRP values.


TEST RESULTS

Refer to attach spectrum analyzer data chart.

**Test Plot****IEEE 802.11a mode / CH Low****Detector mode: Peak****Polarity: Vertical**


* Agilent 12:39:20 Nov 21, 2006

T

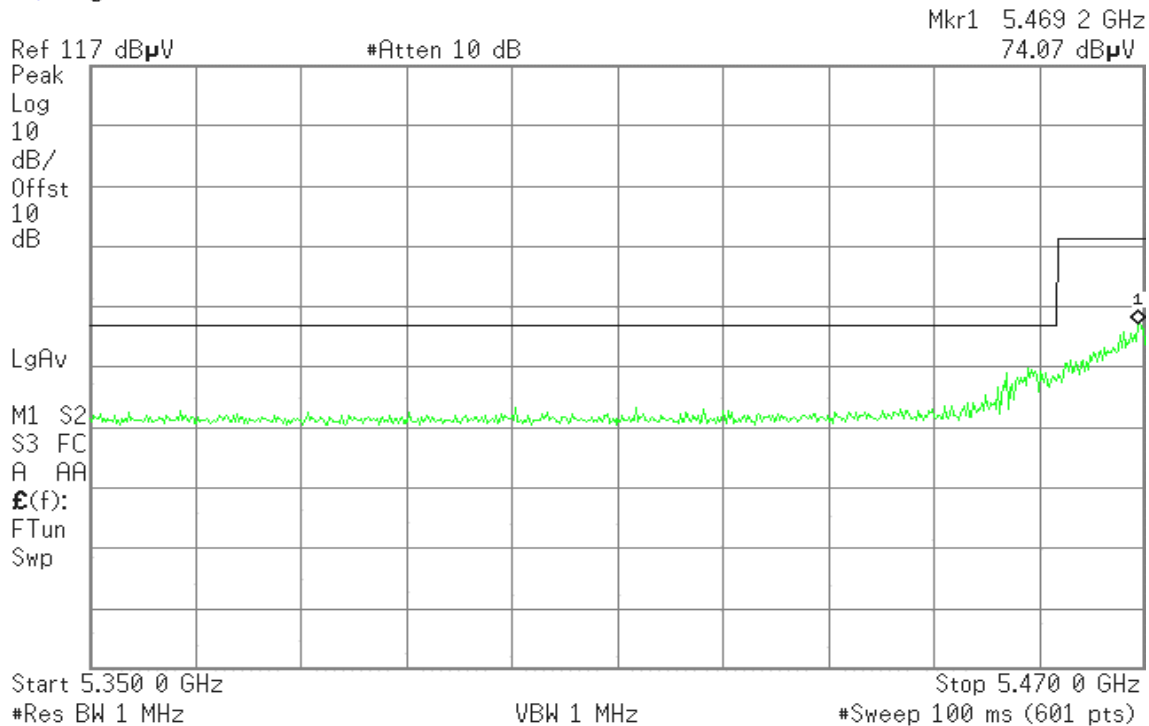**Detector mode: Average****Polarity: Vertical**

* Agilent 12:38:44 Nov 21, 2006

R T

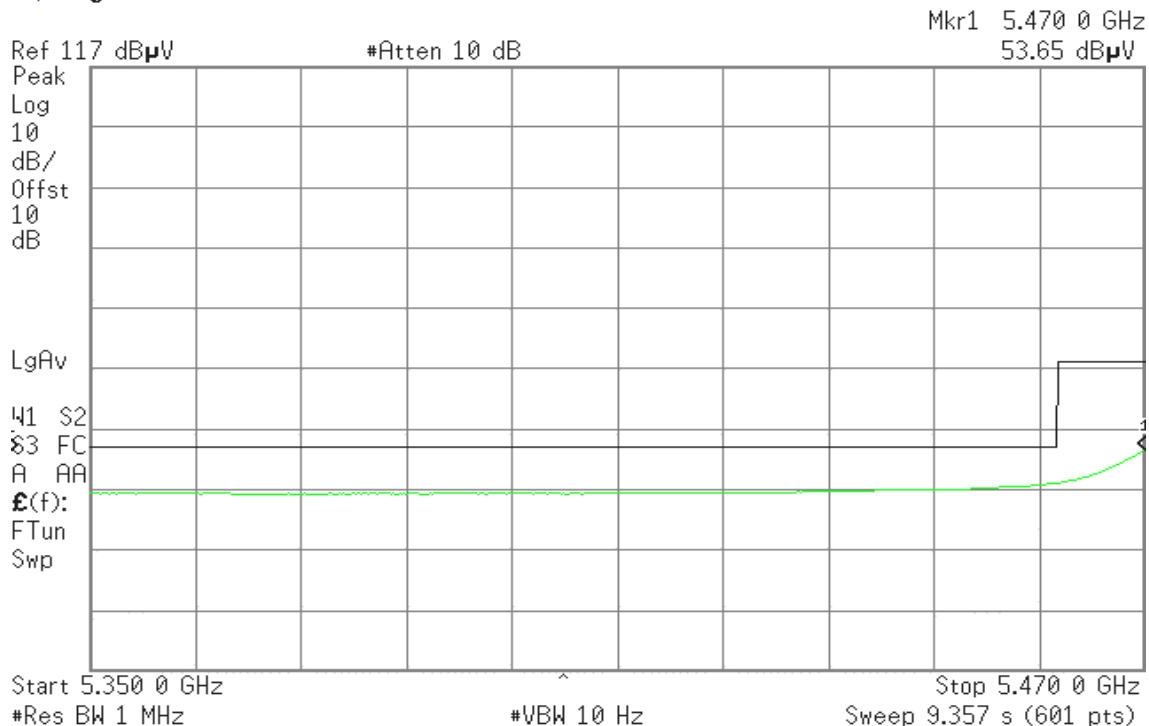



Detector mode: Peak

Polarity: Horizontal

Agilent 12:43:13 Nov 21, 2006

T

Mkr1 5.469 0 GHz
74.33 dB μ VRef 117 dB μ V

#Atten 10 dB

Peak
Log
10
dB/
Offst
10
dB

LgAv

M1 S2
S3 FC
A AA
£(f):
FTun
Swp

Start 5.350 0 GHz

#Res BW 1 MHz

VBW 1 MHz

Stop 5.470 0 GHz

#Sweep 100 ms (601 pts)

Detector mode: Average

Polarity: Horizontal

Agilent 12:43:41 Nov 21, 2006

T

Mkr1 5.469 0 GHz
53.02 dB μ VRef 117 dB μ V

#Atten 10 dB

Peak
Log
10
dB/
Offst
10
dB

LgAv

M1 S2
S3 FC
A AA
£(f):
FTun
Swp

Start 5.350 0 GHz

#Res BW 1 MHz

#VBW 10 Hz


Stop 5.470 0 GHz

Sweep 9.357 s (601 pts)

**IEEE 802.11a mode / CH High****Detector mode: Peak****Polarity: Vertical**


* Agilent 14:01:17 Nov 21, 2006

R T

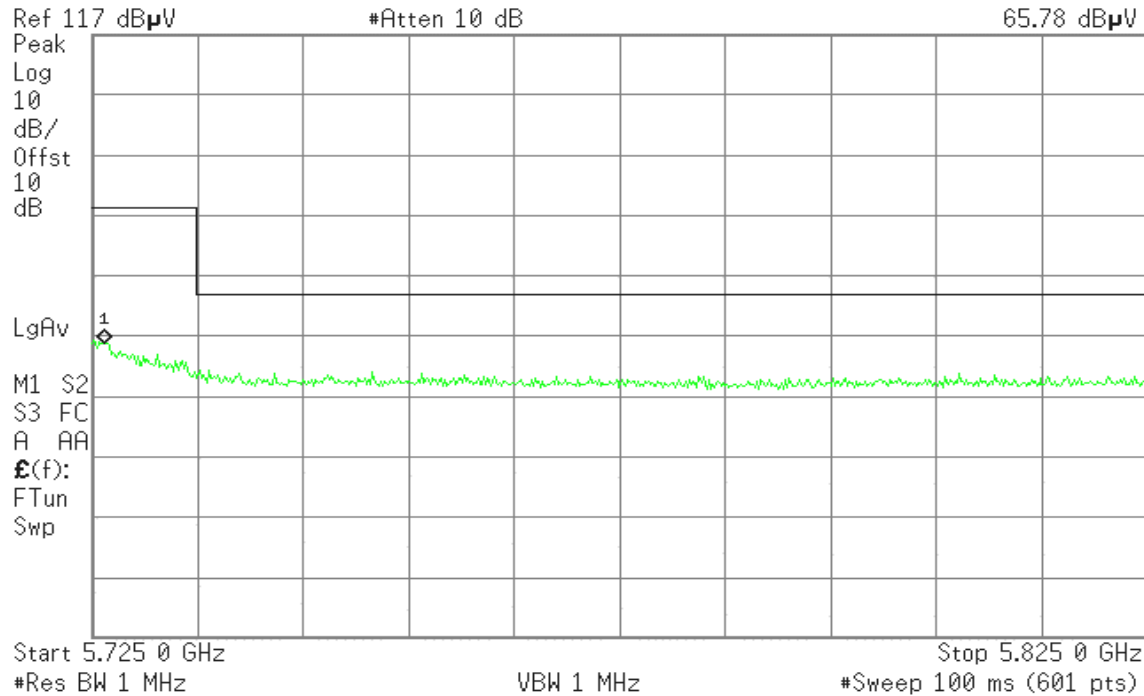Mkr1 5.726 2 GHz
65.78 dB μ V**Detector mode: Average****Polarity: Vertical**

* Agilent 14:01:44 Nov 21, 2006


T

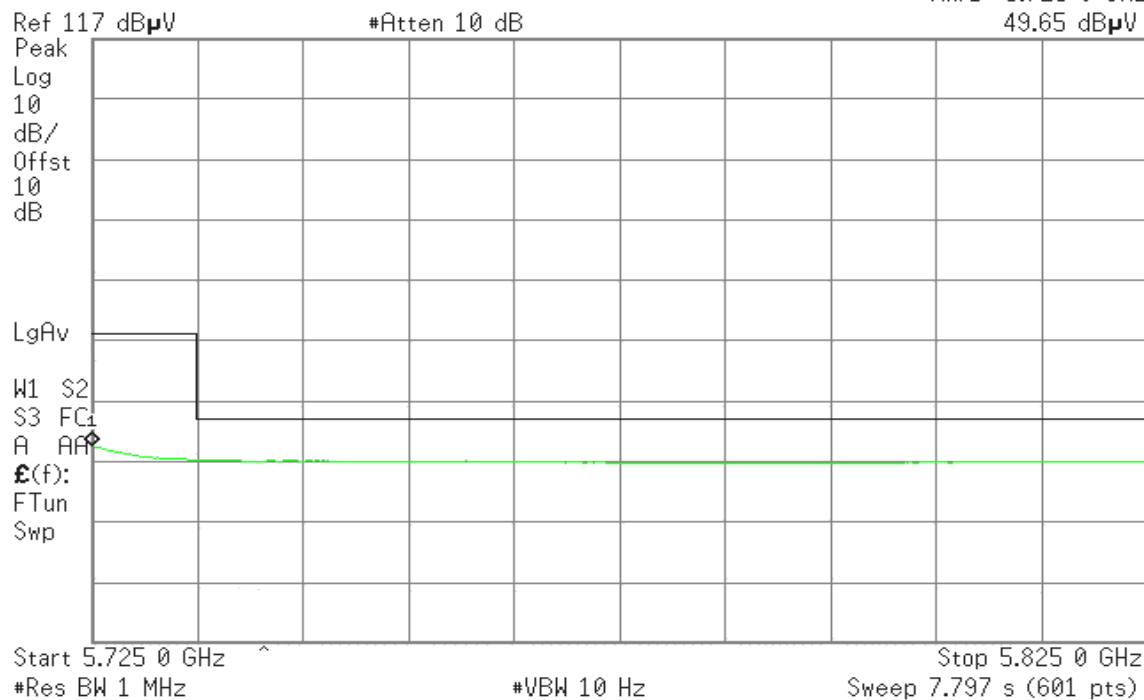Mkr1 5.725 0 GHz
49.65 dB μ V

**Detector mode: Peak****Polarity: Horizontal**


* Agilent 14:05:10 Nov 21, 2006

T

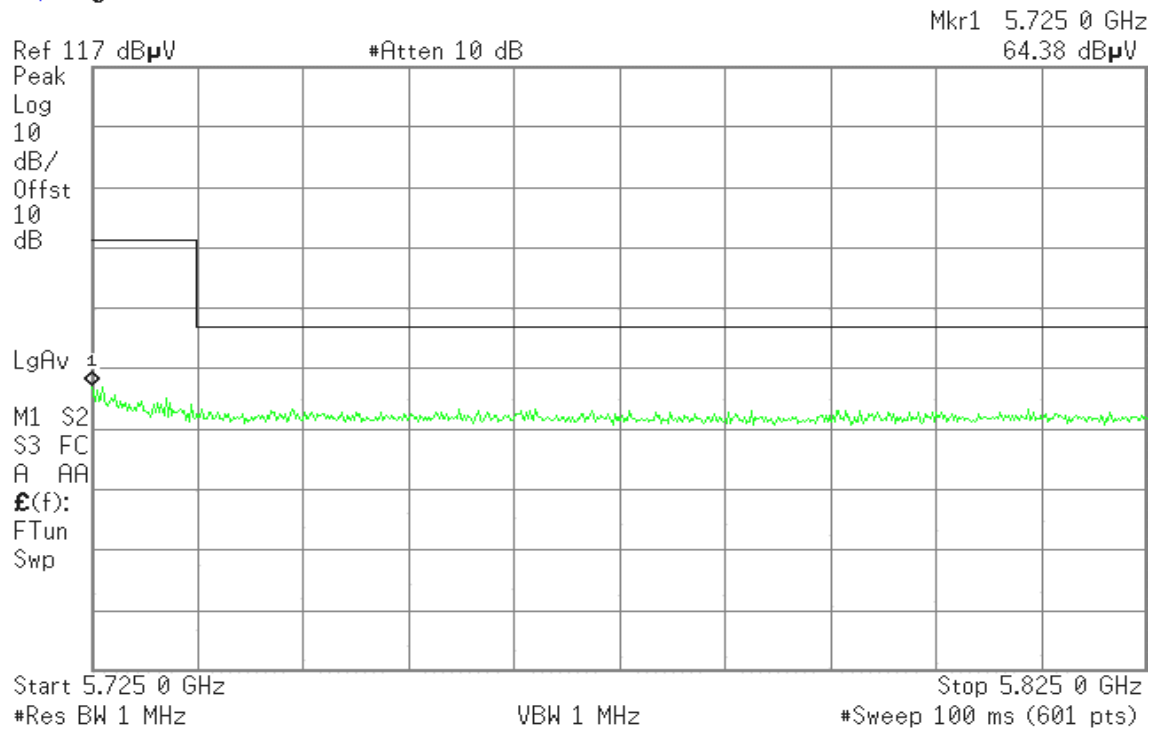**Detector mode: Average****Polarity: Horizontal**

* Agilent 14:05:54 Nov 21, 2006

R T

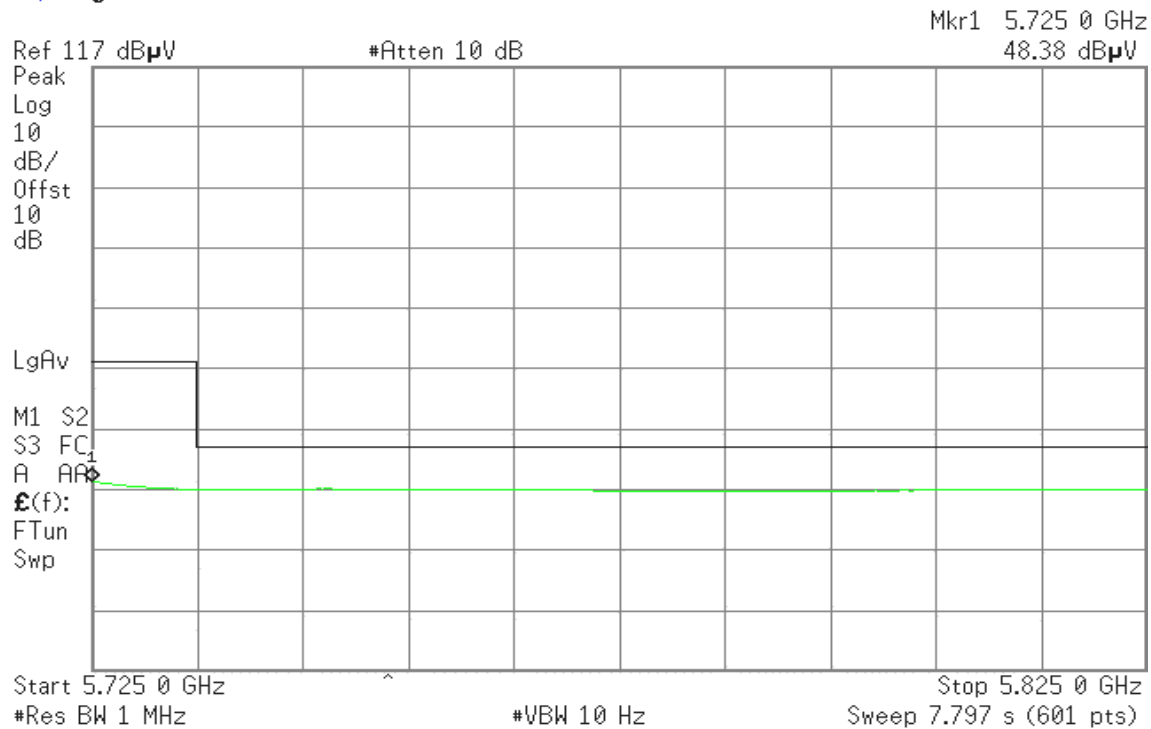




7.4 PEAK POWER SPECTRAL DENSITY

LIMIT

- For the band 5.15-5.25 GHz, the peak power spectral density shall not exceed 4dBm in any 1MHz band.
- For the 5.25-5.35 GHz and 5.47-5.725GHz bands, the peak power spectral density shall not exceed 11dBm in any 1MHz band.

If transmitting antennas of directional gain greater than 6dBi are used, both the peak transmit power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

Test Configuration

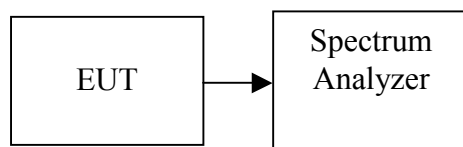

TEST PROCEDURE

1. Place the EUT on the table and set it in transmitting mode.
Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
2. Set the spectrum analyzer as RBW = 1MHz, VBW = 3MHz, Span = 50MHz, Sweep=Auto.
3. Record the max. reading.
4. Repeat the above procedure until the measurements for all frequencies are completed.

TEST RESULTS

No non-compliance noted

Test Data


Channel	Frequency (MHz)	PPSD (dBm)	Limit (dBm)	Result
Low	5500	4.557	11.00	PASS
Mid	5600	4.991	11.00	PASS
High	5700	4.549	11.00	PASS

(Remark: Maximum antenna gain = 1.8 dBi, therefore there is no reduction due to antenna gain.)




Test Plot

CH Low

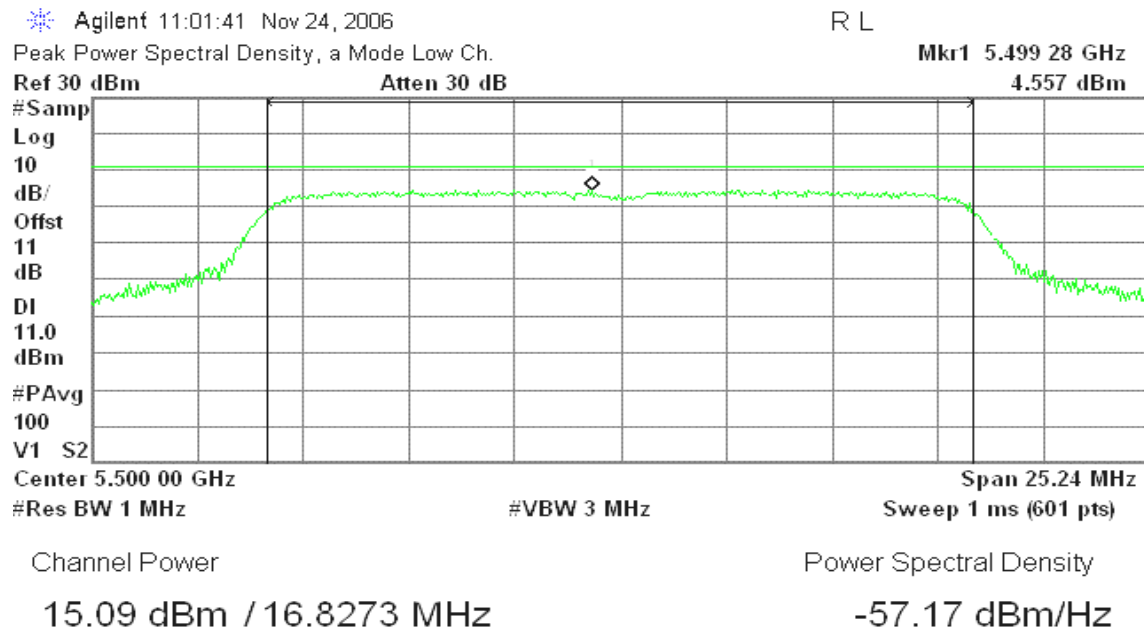

CH Mid

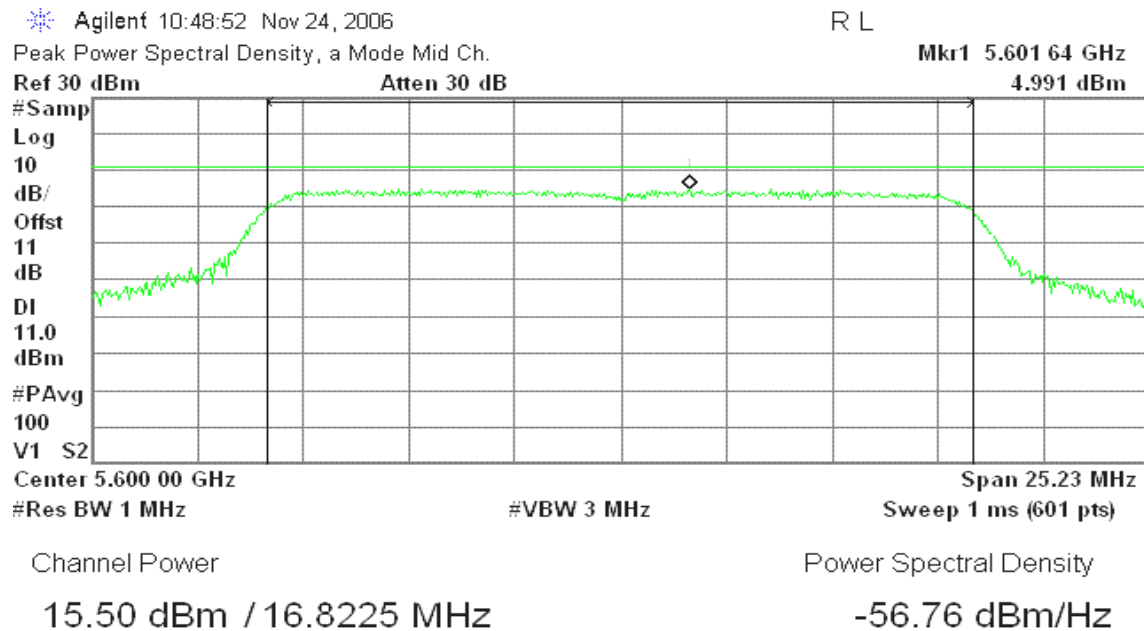



CH High

Agilent 10:56:34 Nov 24, 2006

R L


Peak Power Spectral Density, a Mode High Ch.

Mkr1 5.698 57 GHz

Ref 30 dBm

Atten 30 dB

4.549 dBm

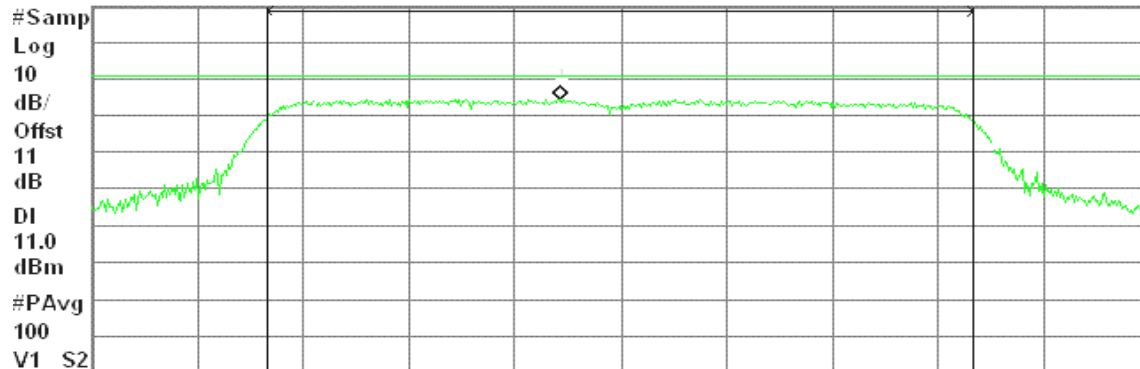

Center 5.700 00 GHz

Span 25.2 MHz

#Res BW 1 MHz

#VBW 3 MHz

Sweep 1 ms (601 pts)

Channel Power

Power Spectral Density

15.15 dBm / 16.7975 MHz

-57.10 dBm/Hz




7.5 PEAK EXCURSION

LIMIT

According to §15.407(a)(6), the ratio of the peak excursion of the modulation envelope (measured using a peak hold function) to the maximum conducted output power (measured as specified above) shall not exceed 13 dB across any 1 MHz bandwidth or the emission bandwidth whichever is less.

Test Configuration

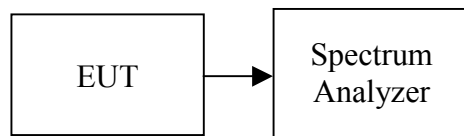

TEST PROCEDURE

The test is performed in accordance with <FCC Public Notice: APPENDIX A Guidelines for Assessing Unlicensed National Information Infrastructure (U-NII) Devices> – Part 15, Subpart E, August 2002.

1. Place the EUT on the table and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to spectrum.
3. Trace A, Set RBW = 1MHz, VBW = 3MHz, Span >26dB bandwidth (Base Mode) / >26dB bandwidth (Turbo Mode), Max. hold.
4. Trace B, Set RBW = 1MHz, VBW = 30kHz, Span >26dB bandwidth (Base Mode) / >26dB bandwidth (Turbo Mode), Max. hold.
5. Delta Mark trace A Maximum frequency and trace B same frequency.
6. Repeat the above procedure until measurements for all frequencies were complete.

TEST RESULTS

No non-compliance noted

Test Data

Channel	Frequency (MHz)	Peak Excursion (dB)	Limit (dBm)	Result
Low	5500	8.99	13.00	PASS
Mid	5600	10.11	13.00	PASS
High	5700	9.41	13.00	PASS



Test Plot

CH Low

Agilent 11:02:07 Nov 24, 2006

R L

Peak Excursion, a Mode Low Ch.

 Δ Mkr1 0 Hz

8.99 dB

Ref 30 dBm

Atten 30 dB

#Peak

Log

10

dB/

Offst

11

dB

#PAvg

V1 V2

Center 5.500 00 GHz

Span 25.24 MHz

#Res BW 1 MHz

#VBW 3 MHz

Sweep 20 ms (601 pts)

Channel Power

Power Spectral Density

21.46 dBm / 16.8273 MHz

-50.80 dBm/Hz

CH Mid

Agilent 10:49:21 Nov 24, 2006

R L

Peak Excursion, a Mode Mid Ch.

 Δ Mkr1 0 Hz

10.11 dB

Ref 30 dBm

Atten 30 dB

#Peak

Log

10

dB/

Offst

11

dB

#PAvg

V1 V2

Center 5.600 00 GHz

Span 25.23 MHz

#Res BW 1 MHz

#VBW 3 MHz

Sweep 20 ms (601 pts)

Channel Power

Power Spectral Density

21.69 dBm / 16.8225 MHz

-50.56 dBm/Hz



CH High

Agilent 10:57:00 Nov 24, 2006

R L

Peak Excursion, a Mode High Ch.

Δ Mkr1 0 Hz

Ref 30 dBm

Atten 30 dB

9.41 dB

#Peak

Log

10

dB/

Offst

11

dB

#PAvg

V1 V2

Center 5.700 00 GHz

#Res BW 1 MHz

#VBW 3 MHz

Span 25.2 MHz

Sweep 20 ms (601 pts)

Channel Power

21.59 dBm / 16.7975 MHz

Power Spectral Density

-50.66 dBm/Hz



7.6 RADIATED UNDESIRABLE EMISSION

1. According to §15.209(a), except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength ($\mu\text{V/m}$)	Measurement Distance (m)
30-88	100*	3
88-216	150*	3
216-960	200*	3
Above 960	500	3


Remark: Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.

2. In the emission table above, the tighter limit applies at the band edges.


Frequency (MHz)	Field Strength ($\mu\text{V/m}$ at 3-meter)	Field Strength (dB $\mu\text{V/m}$ at 3-meter)
30-88	100	40
88-216	150	43.5
216-960	200	46
Above 960	500	54

Test Configuration

Below 1 GHz

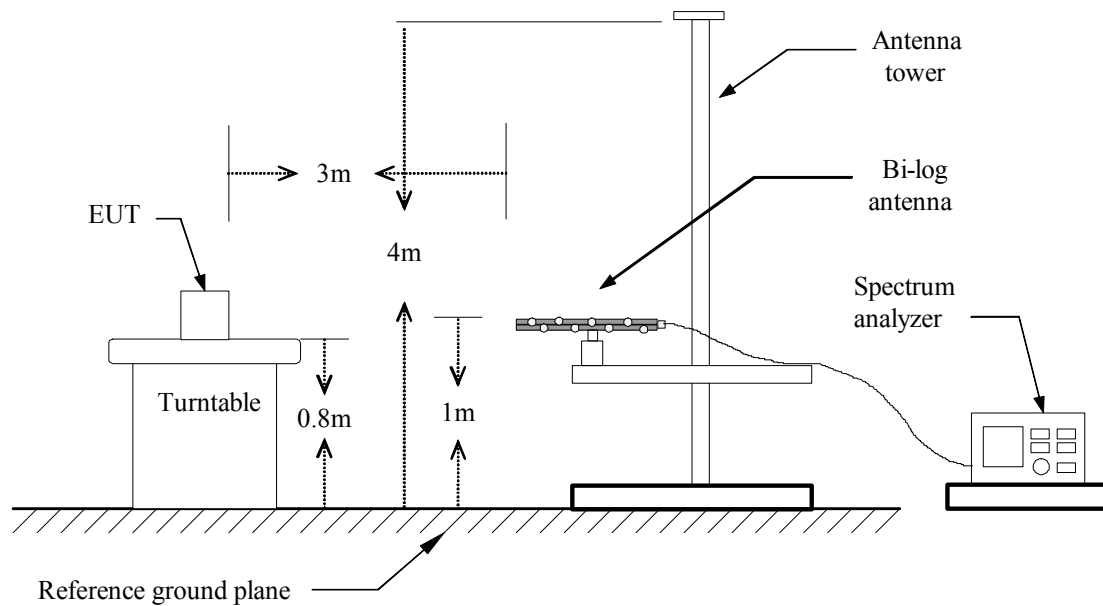

Above 1 GHz

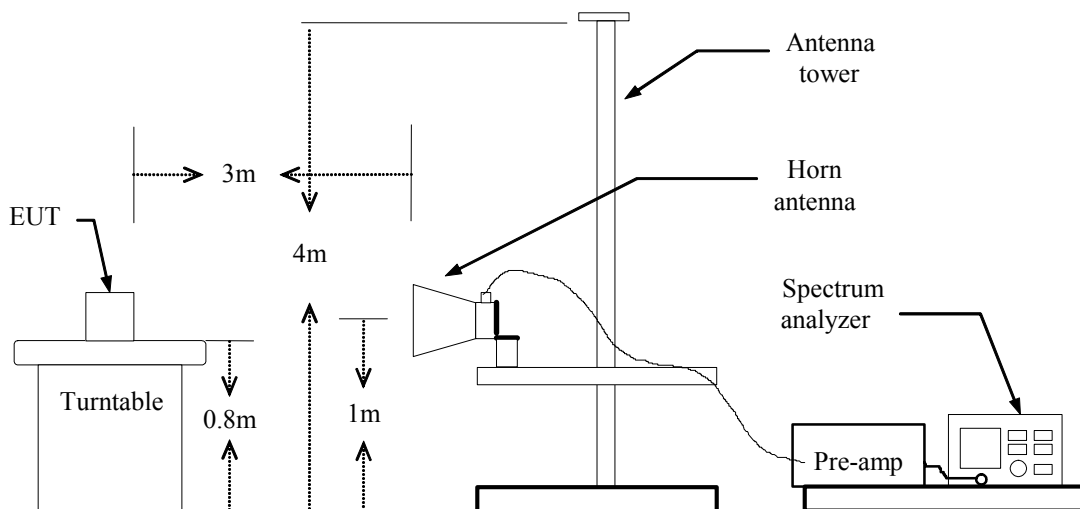



TEST PROCEDURE

1. The EUT is placed on a turntable, which is 0.8m above ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Set the spectrum analyzer in the following setting as:
Below 1GHz:
RBW=100kHz / VBW=300kHz / Sweep=AUTO
Above 1GHz:
(a) PEAK: RBW=VBW=1MHz / Sweep=AUTO
(b) AVERAGE: RBW=1MHz / VBW=10Hz / Sweep=AUTO
7. Repeat above procedures until the measurements for all frequencies are complete.



TEST RESULTS

Below 1 GHz

Operation Mode: Normal Link**Test Date:** May 9, 2005**Temperature:** 25°C**Tested by:** Tom Jen**Humidity:** 55% RH**Polarity:** Ver. / Hor.

Frequency (MHz)	Ant.Pol. H/V	Detector Mode (PK/QP)	Reading (dBuV)	Correction Factor (dB)	Result (dBuV/m)	Limit 3m (dBuV/m)	Margin (dB)
165.50	V	Peak	21.30	10.30	31.60	43.50	-11.90
269.50	V	Peak	14.50	15.60	30.10	46.00	-15.90
400.30	V	Peak	10.50	20.00	30.50	46.00	-15.50
601.50	V	Peak	11.20	22.10	33.30	46.00	-12.70
666.50	V	Peak	8.40	23.60	32.00	46.00	-14.00
935.00	V	Peak	9.70	27.10	36.80	46.00	-9.20
332.60	H	Peak	18.70	17.00	35.70	46.00	-10.30
366.90	H	Peak	19.60	18.50	38.10	46.00	-7.90
433.50	H	Peak	14.70	19.30	34.00	46.00	-12.00
632.00	H	Peak	10.70	23.00	33.70	46.00	-12.30
702.00	H	Peak	10.10	23.90	34.00	46.00	-12.00
930.00	H	Peak	9.70	27.10	36.80	46.00	-9.20

Remark:

1. Measuring frequencies from 30 MHz to the 1GHz.
2. Radiated emissions measured in frequency range from 30 MHz to 1000MHz were made with an instrument using Peak detector mode.
3. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
4. The IF bandwidth of SPA between 30MHz to 1GHz was 100kHz.

**Above 1 GHz****Operation Mode:** TX / IEEE 802.11a / CH Low**Test Date:** November 21, 2006**Temperature:** 25°C**Tested by:** Ryan Chen**Humidity:** 50% RH**Polarity:** Ver. / Hor.

Frequency (MHz)	Ant.Pol. (H/V)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark
2225.00	V	57.60	---	-4.44	53.16	---	74.00	54.00	-0.84	Peak
N/A										
2038.33	H	56.76	---	-4.91	51.85	---	74.00	54.00	-2.15	Peak
N/A										

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).

**Operation Mode:** TX / IEEE 802.11a / CH Mid**Test Date:** November 21, 2006**Temperature:** 25°C**Tested by:** Ryan Chen**Humidity:** 50% RH**Polarity:** Ver. / Hor.

Frequency (MHz)	Ant.Pol. (H/V)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark
2061.67	V	52.97	---	-4.85	48.12	---	74.00	54.00	-5.88	Peak
N/A										
2225.00	H	53.16	---	-4.44	48.71	---	74.00	54.00	-5.29	Peak
N/A										

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).

**Operation Mode:** TX / IEEE 802.11a / CH High**Test Date:** November 21, 2006**Temperature:** 25°C**Tested by:** Ryan Chen**Humidity:** 50% RH**Polarity:** Ver. / Hor.

Frequency (MHz)	Ant.Pol. (H/V)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark
3800.00	V	53.57	---	-1.10	52.47	---	74.00	54.00	-1.53	Peak
N/A										
3800.00	H	54.86	---	-1.10	53.76	---	74.00	54.00	-0.24	Peak
N/A										

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



7.7 CONDUCTED UNDESIRABLE EMISSION


LIMIT

According to 15.407(b),

- (1) For transmitters operating in the 5.15-5.25 GHz band: all emissions outside of the 5.15-5.35 GHz band shall not exceed an EIRP of -27 dBm/MHz.
- (2) For transmitters operating in the 5.25-5.35 GHz band: all emissions outside of the 5.15-5.35 GHz band shall not exceed an EIRP of -27 dBm/MHz. Devices operating in the 5.25-5.35 GHz band that generate emissions in the 5.15-5.25 GHz band must meet all applicable technical requirements for operation in the 5.15-5.25 GHz band (including indoor use) or alternatively meet an out-of-band emission EIRP limit of -27 dBm/MHz in the 5.15-5.25 GHz band.
- (3) For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an EIRP of -27 dBm/MHz.

The provisions of §15.205 apply to intentional radiators operating under this section.

Test Configuration

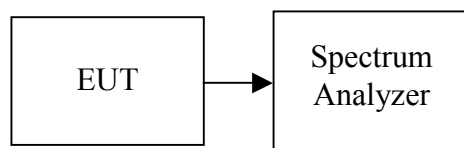

TEST PROCEDURE

Conducted RF measurements of the transmitter output were made to confirm that the EUT antenna port conducted emissions meet the specified limit and to identify any spurious signals that require further investigation or measurements on the radiated emissions site.

The transmitter output is connected to the spectrum analyzer. The resolution bandwidth is set to 1 MHz. The video bandwidth is set to 1 MHz. Peak detection measurements are compared to the average EIRP limit, adjusted for the maximum antenna gain. If necessary, additional average detection measurements are made.

Measurements are made over the 30 MHz to 40 GHz range with the transmitter set to the lowest, middle, and highest channels.

TEST RESULTS

No non-compliance noted



Test Plot

CH Low

30MHz ~ 40GHz

Agilent 11:02:42 Nov 24, 2006

L


Conducted Spur., a Mode Low Ch.

Mkr1 5.51 GHz

Ref 13 dBm

#Atten 12 dB

10.64 dBm

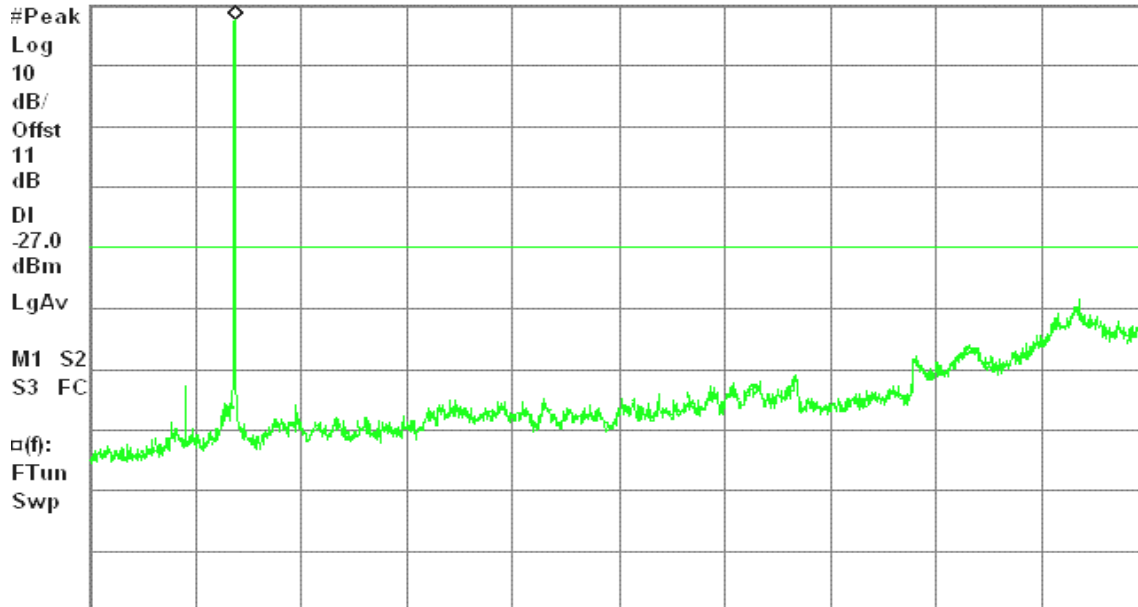

Center 20.02 GHz

Span 39.97 GHz

#Res BW 1 MHz

#VBW 1 MHz

Sweep 100 ms (2001 pts)

CH Mid

30MHz ~ 40GHz

Agilent 10:49:58 Nov 24, 2006

L


Conducted Spur., a Mode Mid Ch.

Mkr1 5.61 GHz

Ref 13 dBm

#Atten 12 dB

10.36 dBm

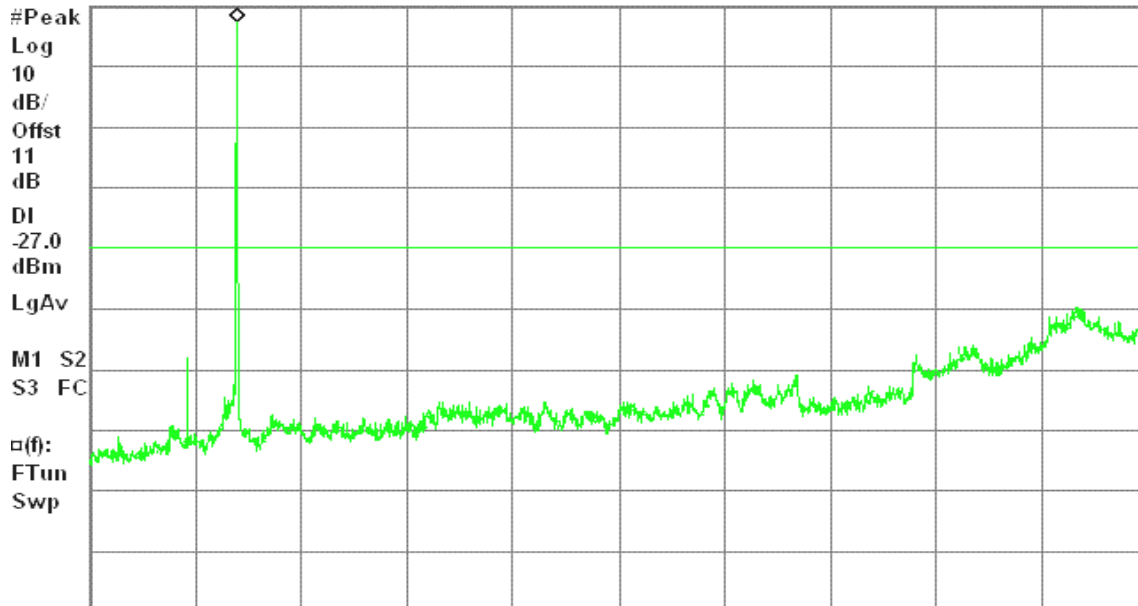

Center 20.02 GHz

Span 39.97 GHz

#Res BW 1 MHz

#VBW 1 MHz

Sweep 100 ms (2001 pts)



CH High

30MHz ~ 40GHz

Agilent 10:57:34 Nov 24, 2006

L


Conducted Spur., a Mode High Ch.

Mkr1 5.69 GHz

Ref 13 dBm

#Atten 12 dB

9.95 dBm

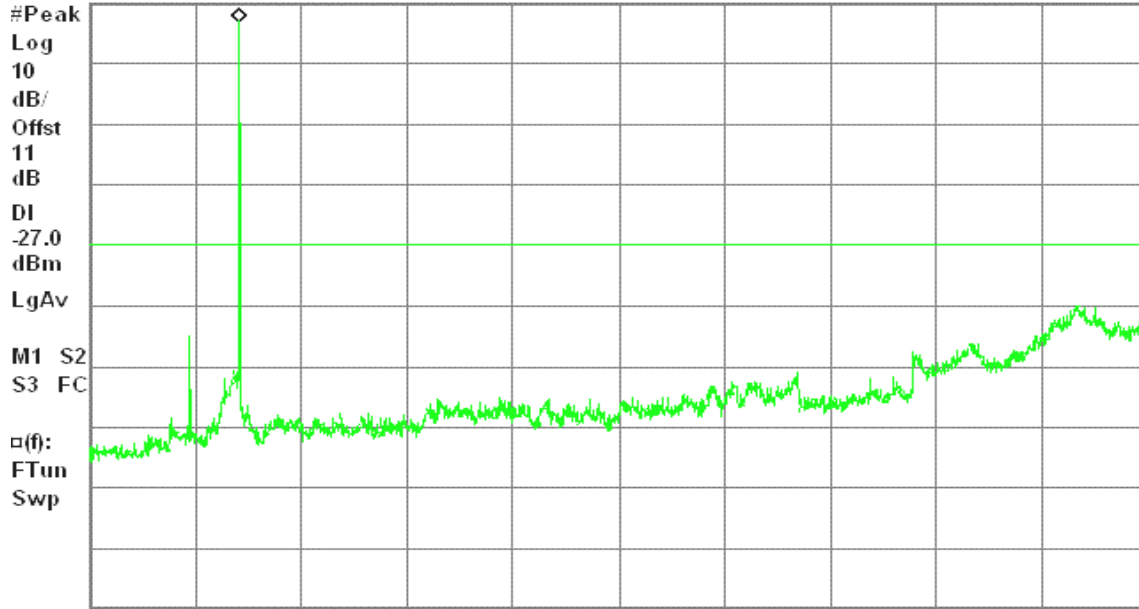

Center 20.02 GHz

Span 39.97 GHz

#Res BW 1 MHz

#VBW 1 MHz

Sweep 100 ms (2001 pts)



7.8 TRANSMISSION IN ABSENCE OF DATA

LIMIT

According to §15.407(c), the device shall automatically discontinue transmission in case of either absence of information to transmit or operational failure. These provisions are not intended to preclude transmission of control and signaling information or use of repetitive codes used by certain digital technologies to complete frame or burst intervals.

Applicants shall include in their application for equipment authorization a description of how this requirement is met.

TEST RESULTS

Please refer to the operational description for details.

Remark: For the details, please refer to the theory of the operation.

7.9 FREQUENCY STABILITY

LIMIT

According to §15.407(g), manufacturers of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the user's manual.

TEST RESULTS

Please refer to the user's manual for further details.

Remark: An examination of the band-edge plots shows that the emission will stay within the authorized band over the entire temperature range.



APPENDIX I RADIO FREQUENCY EXPOSURE

LIMIT

According to §15.407(f), U-NII devices are subject to the radio frequency radiation exposure requirements specified in §§ 1.1307(b), 2.1091 and 2.1093 of this chapter, as appropriate. All equipment shall be considered to operate in a "general population/uncontrolled" environment. Applications for equipment authorization of devices operating under this section must contain a statement confirming compliance with these requirements for both fundamental emissions and unwanted emissions. Technical information showing the basis for this statement must be submitted to the Commission upon request.

EUT Specification

EUT	802.11a/b/g Mini PCI Card
Frequency band (Operating)	<input type="checkbox"/> WLAN: 2.412GHz ~ 2.462GHz <input type="checkbox"/> WLAN: 5.15GHz ~ 5.35GHz <input checked="" type="checkbox"/> WLAN: 5.470GHz ~ 5.725GHz <input type="checkbox"/> WLAN: 5.725GHz ~ 5.850GHz <input type="checkbox"/> Bluetooth: 2.402 GHz ~ 2.482 GHz <input type="checkbox"/> Others _____
Device category	<input type="checkbox"/> Portable (<20cm separation) <input checked="" type="checkbox"/> Mobile (>20cm separation) <input type="checkbox"/> Others _____
Exposure classification	<input type="checkbox"/> Occupational/Controlled exposure (S = 5mW/cm2) <input checked="" type="checkbox"/> General Population/Uncontrolled exposure (S=1mW/cm2)
Antenna diversity	<input type="checkbox"/> Single antenna <input checked="" type="checkbox"/> Multiple antennas <input type="checkbox"/> Tx diversity <input type="checkbox"/> Rx diversity <input checked="" type="checkbox"/> Tx/Rx diversity
Max. output power	15.59 dBm (36.22mW)
Antenna gain (Max)	1.8 dBi (Numeric gain: 1.51)
Evaluation applied	<input checked="" type="checkbox"/> MPE Evaluation* <input type="checkbox"/> SAR Evaluation <input type="checkbox"/> N/A

Remark:

- The maximum output power is 15.59dBm (36.22mW) at 5600MHz (with 1.51 numeric antenna gain.)*
- DTS device is not subject to routine RF evaluation; MPE estimate is used to justify the compliance.*
- For mobile or fixed location transmitters, no SAR consideration applied. The maximum power density is 1.0 mW/cm2 even if the calculation indicates that the power density would be larger.*

TEST RESULTS

No non-compliance noted.

**Calculation**

Given $E = \frac{\sqrt{30 \times P \times G}}{d}$ & $S = \frac{E^2}{3770}$

Where E = Field strength in Volts / meter

P = Power in Watts

G = Numeric antenna gain

d = Distance in meters

S = Power density in milliwatts / square centimeter

Combining equations and re-arranging the terms to express the distance as a function of the remaining variables yields:

$$S = \frac{30 \times P \times G}{3770 d^2}$$

Changing to units of mW and cm, using:

$$P \text{ (mW)} = P \text{ (W)} / 1000 \text{ and}$$

$$d \text{ (cm)} = d \text{ (m)} / 100$$

Yields

$$S = \frac{30 \times (P/1000) \times G}{3770 \times (d/100)^2} = 0.0796 \times \frac{P \times G}{d^2} \quad \text{Equation 1}$$

Where d = Distance in cm

P = Power in mW

G = Numeric antenna gain

S = Power density in mW / cm²

Maximum Permissible Exposure

EUT output power = 36.22mW

Numeric Antenna gain = 1.51

Substituting the MPE safe distance using $d = 20$ cm into Equation 1:

Yields

$$S = 0.000199 \times P \times G$$

Where P = Power in mW

G = Numeric antenna gain

S = Power density in mW / cm²

→ Power density = 0.01088 mW / cm²

(For mobile or fixed location transmitters, the maximum power density is 1.0 mW/cm² even if the calculation indicates that the power density would be larger.)