



FCC PART 15C TEST REPORT No.I22Z62328-EMC04

for

Honor Device Co., Ltd.

Smart Phone

Model Name: RBN-NX1

FCC ID: 2AYGCRBN-NX1

with

Hardware Version: HN2VNEM

Software Version: 6.1.0.9(C900E9R1P1)

Issued Date: 2023-01-12

Note:

The test results in this test report relate only to the devices specified in this report. This report shall not be reproduced except in full without the written approval of CTTL.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the U.S.Government.

Test Laboratory:

CTTL-Telecommunication Technology Labs, CAICT

No. 52, Huayuan North Road, Haidian District, Beijing, P. R. China 100191.

Tel:+86(0)10-62304633-2512, Fax:+86(0)10-62304633-2504

Email: cttl_terminals@caict.ac.cn, website: www.caict.ac.cn



REPORT HISTORY

Report Number	Revision	Description	Issue Date
I22Z62328-EMC04	Rev.0	1 st edition	2023-01-12

CONTENTS

1. TEST LABORATORY	4
1.1. INTRODUCTION & ACCREDITATION	4
1.2. TESTING LOCATION	4
1.3. TESTING ENVIRONMENT	4
1.4. PROJECT DATE.....	4
1.5. SIGNATURE	4
2. CLIENT INFORMATION	5
2.1. APPLICANT INFORMATION	5
2.2. MANUFACTURER INFORMATION	5
3. PRODUCT INFORMATION	6
3.1. ABOUT EUT.....	6
3.2. INTERNAL IDENTIFICATION OF EUT	6
3.3. INTERNAL IDENTIFICATION OF AE	6
3.4. GENERAL DESCRIPTION	8
3.5. INTERPRETATION OF THE TEST ENVIRONMENT	8
4. REFERENCE DOCUMENTS	9
4.1. DOCUMENTS SUPPLIED BY APPLICANT.....	9
4.2. REFERENCE DOCUMENTS FOR TESTING	9
5. SUMMARY OF TEST RESULTS	10
5.1. SUMMARY OF TEST RESULTS	10
5.2. STATEMENTS	10
5.3. TEST CONDITIONS	10
6. TEST FACILITIES UTILIZED	11
7. MEASUREMENT UNCERTAINTY	12
ANNEX A: EUT PARAMETERS.....	13
ANNEX B: ANTENNA REQUIREMENTS	13
ANNEX C: DETAILED TEST RESULTS.....	14
C.1. RADIATED SPURIOUS EMISSION	14
C.1.1 RADIATED SPURIOUS EMISSION- ABOVE 1GHZ.....	16
C.1.2 RADIATED SPURIOUS EMISSION-BELOW 1GHZ	26
C.1.3 BAND EDGES COMPLIANCE– RADIATED	27
C.2. AC POWER-LINE CONDUCTED EMISSION.....	32

1. Test Laboratory

1.1.Introduction & Accreditation

Telecommunication Technology Labs, CAICT is an ISO/IEC 17025:2017 accredited test laboratory under NATIONAL VOLUNTARY LABORATORY ACCREDITATION PROGRAM (NVLAP) with lab code 600118-0, and is also an FCC accredited test laboratory (CN5017), and ISED accredited test laboratory (ISED#: 24849). The detail accreditation scope can be found on NVLAP website.

1.2. Testing Location

Test Location: CTTL (Huayuan North Road)

Address: No. 52 Huayuan North Road, Haidian District, Beijing 100191, P.R. China

1.3. Testing Environment

Normal Temperature: 15-35℃


Relative Humidity: 20-75%

1.4. Project date

Testing Start Date: 2022-04-27

Testing End Date: 2023-01-12

1.5. Signature



Zhang Ying

(Prepared this test report)



An Hui

(Reviewed this test report)



Shi Suolan

(Approved this test report)



2. Client Information

2.1.Applicant Information

Company Name: Honor Device Co., Ltd.
Suite 3401,Unit A,Building 6,Shum Yip Sky Park,No.8089,Hongli
Address /Post: West Road,Xiangmihu Street,Futian District,Shenzhen,Guangdong
518040,People's Republic of China
Contact: /
Email: /
Telephone: /

2.2.Manufacturer Information

Company Name: Honor Device Co., Ltd.
Suite 3401,Unit A,Building 6,Shum Yip Sky Park,No.8089,Hongli
Address /Post: West Road,Xiangmihu Street,Futian District,Shenzhen,Guangdong
518040,People's Republic of China
Contact: /
Email: /
Telephone: /

3. PRODUCT INFORMATION

3.1. About EUT

Description	Smart Phone
Model name	RBN-NX1
FCC ID	2AYGCRBN-NX1

Note: Components list, please refer to documents of the manufacturer; it is also included in the original test record of T CTTL-Telecommunication Technology Labs, CAICT

3.2. Internal Identification of EUT

EUT ID*	SN or IMEI	HW Version	SW Version
UT22a	/	/	/
UT25a	/	/	/
UT27a	/	/	/
UT29a	/	/	/
UT04a	868648060008221/868648060042261	HN2VNEM	6.1.0.9(C900E9R1P1)
UT05a	868648060011795/868648060045835	HN2VNEM	6.1.0.9(C900E9R1P1)
UT07a	868648060010565/868648060044606	HN2VNEM	6.1.0.9(C900E9R1P1)
UT06a	868648060014021/868648060048060	HN2VNEM	6.1.0.9(C900E9R1P1)

*EUT ID: is used to identify the test sample in the lab internally.

3.3. Internal Identification of AE

AE ID*	Name	Model	Manufacturer
AE1-1	Adapter	HN-100225U00	Salcomp
AE1-2	Adapter	HN-100225E00	Salcomp
AE1-3	Adapter	HW-100225U00	Huntkey
AE1-4	Adapter	HW-100225E00	Huntkey
AE1-5	Adapter	HW-100225B00	Huntkey
AE2-1	USB Cable	CUDU01B-HC451-EH	Fuding Precision Components (Shenzhen) Co., Ltd.
AE2-2	USB Cable	AU2-CRO013 HF	Freeport Ji an Electronics Co.,Ltd.
AE2-3	USB Cable	L125UC007-CS-H	Luxshare Precision Industry Co.,Ltd.
AE2-4	USB Cable	2120-00001-0	Guangdong Mingji Hi-Tech Electronics Co.,Ltd.
AE2-5	USB Cable	RY0002	Guangxi Broad Telecommunication Co.,Ltd.
AE3-1	Headset	1293-3283-3.5mm-339	BOLUO COUNTY QUANCHENG ELECTRONIC CO.,LTD.
AE3-2	Headset	EPAB542-2WH05-DH	FOXCONN INTERCONNECT TECHNOLOGY LIMITED
AE3-3	Headset	MEND1532B528A11	Jiangxi Lianchuang Hongsheng Electronic Co., LTD.
AE4-1	Battery	HB496590EFW	SCUD

AE4-2	Battery	HB496590EFW-F	SCUD
AE4-3	Battery	HB496590EFW	NVT
AE4-4	Battery	HB496590EFW-F	NVT

*AE ID: is used to identify the test sample in the lab internally.

Note:

Smart Phone RBN-NX1 manufactured by Honor Device Co., Ltd. is a variant model based on VNE-N41 for conformance test. According to the declaration of changes, adding the tests as follows:

Setup. No	Setup	Test Item
Set.3-1	UT04a + AE1-1 + AE2-1	802.11n 40MHz, CH9 radiated emission 802.11n 40MHz, CH3 bandedge

The Other results are cited from the initial model. The report number for initial model is I22Z60667-EMC04.

3.4. General Description

Equipment Under Test (EUT) is a model of Smart Phone with integrated antenna.

It has MP3, MP4, Camera, USB memory, Bluetooth 5.1, Wi-Fi (802.11b/g/n/ac), GNSS functions.

Manual and specifications of the EUT were provided to fulfil the test.

Samples undergoing test were selected by the client.

EUT feature information is supplied by the applicant or manufacturer, which is the basis of testing.

3.5. Interpretation of the Test Environment

For the test methods, the test environment uncertainty figures correspond to an expansion factor $k=2$.

Measurement Uncertainty

Parameter	Uncertainty
temperature	0.48°C
humidity	2 %
DC voltages	0.003V

4. Reference Documents

4.1. Documents supplied by applicant

EUT feature information is supplied by the applicant or manufacturer, which is the basis of testing.

4.2. Reference Documents for testing

The following documents listed in this section are referred for testing.

Reference	Title	Version
FCC Part15	FCC CFR 47, Part 15, Subpart C:	2021
	15.205 Restricted bands of operation;	
	15.209 Radiated emission limits, general requirements;	
ANSI C63.10	15.247 Operation within the bands 902-928MHz, 2400-2483.5 MHz, and 5725-5850 MHz.	2013
	American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices	
KDB 558074 D01	Federal Communications Commission Office of Engineering and Technology Laboratory Division	2019
	GUIDANCE FOR COMPLIANCE MEASUREMENTS ON DIGITAL TRANSMISSION SYSTEM, FREQUENCY HOPPING SPREAD SPECTRUM SYSTEM, AND HYBRID SYSTEM DEVICES OPERATING UNDER SECTION 15.247 OF THE FCC RULES	

Note: The test methods have no deviation with standards.

5. SUMMARY OF TEST RESULTS

5.1. Summary of Test Results

SUMMARY OF MEASUREMENT RESULTS	Sub-clause of Part15C	Verdict
Radiated Spurious Emission	15.247, 15.205, 15.209	P
AC Power line Conducted Emission	15.107, 15.207	P

Please refer to **ANNEX C** for detail.

Terms used in Verdict column

P	Pass, The EUT complies with the essential requirements in the standard.
NP	Not Perform, The test was not performed by CTTL
BR	Re-use test data from basic model report.
NA	Not Applicable, The test was not applicable
F	Fail, The EUT does not comply with the essential requirements in the standard

5.2. Statements

The test cases as listed in section 5.1 of this report for the EUT specified in section 3 was performed by CTTL and according to the standards or reference documents listed in section 4.2 The EUT met all requirements of the standards or reference documents, and only the WLAN function was tested in this report.

5.3. Test Conditions

For this report, if the test cases listed above are tested under normal temperature and normal voltage, and also under norm humidity, the specific condition is shown as follows:

Temperature	Normal Temperature	26℃
Voltage	Normal Voltage	4.0V
Humidity	Normal Humidity	20-75%

6. Test Facilities Utilized

Radiated emission test system

The equipment for I22Z60667

No.	Equipment	Model	Serial Number	Manufacturer	Calibration Period	Calibration Due date
1	Loop Antenna	HFH2-Z2	829324/007	R&S	1 year	2022-12-22
2	EMI Antenna	3115	00167250	ETS-Lindgren	1 year	2022-07-01
3	EMI Antenna	VULB9163	9163-302	Schwarzbeck	1 year	2022-12-28
4	Test Receiver	ESW44	103023	R&S	1 year	2022-10-28
5	EMI Antenna	3116	2663	ETS-Lindgren	1 year	2022-08-11

The equipment for I22Z62328

No.	Equipment	Model	Serial Number	Manufacturer	Calibration Period	Calibration Due date
1	Test Receiver	ESW44	103015	Rohde & Schwarz	2022-01-24	2023-01-23
2	EMI Antenna	3115	00167250	ETS-Lindgren	2022-06-21	2023-06-20

AC Powerline Conducted Emission

No.	Equipment	Model	Serial Number	Manufacturer	Calibration Period	Calibration Due date
1	LISN	ENV216	101200	Rohde & Schwarz	1 year	2023-06-29
2	Test Receiver	ESCI 7	100344	Rohde & Schwarz	1 year	2023-02-21

7. Measurement Uncertainty

Radiated Spurious Emission

(k=2)

Frequency Range	Uncertainty(dB)
9kHz-30MHz	4.92
$30\text{MHz} \leq f \leq 1\text{GHz}$	5.15
$1\text{GHz} \leq f \leq 18\text{GHz}$	5.54
$18\text{GHz} \leq f \leq 40\text{GHz}$	5.26

AC Power-line Conducted Emission

Measurement Uncertainty (k=2)	3.08dB
-------------------------------	--------

ANNEX A: EUT parameters

Disclaimer: The antenna gain and setting power provided by the client may affect the validity of the measurement results in this report, and the client shall bear the impact and consequences arising therefrom.

ANNEX B: Antenna Requirements

According to FCC 47 CFR § 15.203:

“An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.”

- (1) The antennas of the EUT are permanently attached.
- (2) The EUT complies with the requirement of §15.203

ANNEX C: Detailed Test Results

C.1. Radiated Spurious Emission


Specification Reference

FCC 47 CFR Part 15.247, 15.205, 15.209

Method of Measurement

Testing was performed in according with ANSI C63.10-2013 and KDB 558074.

The radiated emission test is performed in semi-anechoic chamber. The distance from the EUT to the reference point of measurement antenna is 3m. The test is carried out on both vertical and horizontal polarization and only maximization result of both polarizations is kept. During the test, the turntable is rotated 360° and the measurement antenna is moved from 1m to 4m to get the maximization result.

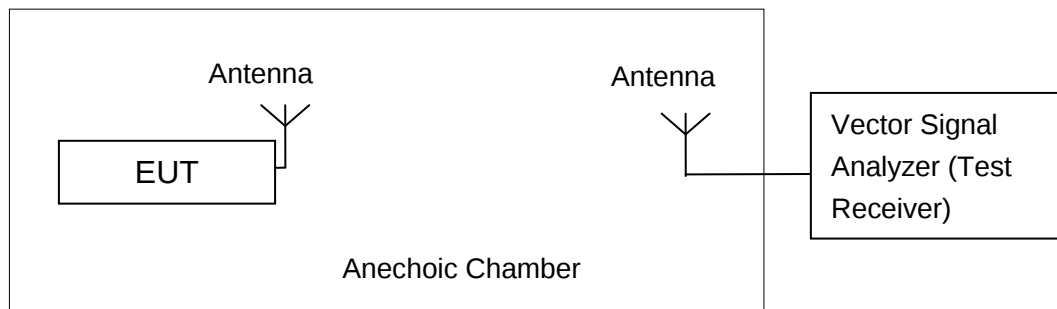

Measurement Limit

Standard	Limit
FCC 47 CFR Part 15.247, 15.205, 15.209	20dB below peak output power

In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a) (see § 15.205(c)).

Limit in restricted band:

Frequency (MHz)	Field strength($\mu\text{V/m}$)	Measurement distance (m)
0.009 - 0.490	$2400/F(\text{kHz})$	300
0.490 - 1.705	$24000/F(\text{kHz})$	30
1.705 – 30.0	30	30

Frequency of emission (MHz)	Field strength(dBμV/m)	Measurement distance(m)
30-88	40.0	3
88-216	43.5	3
216-960	46.0	3
Above 960	54.0	3

Test settings

Frequency of emission (MHz)	RBW/VBW
30-1000	100kHz/300kHz
1000-4000	1MHz/3MHz
4000-18000	1MHz/3MHz
18000-26500	1MHz/3MHz

Sample Calculation

The measurement results are obtained as described below:

$$\text{Result} = P_{\text{Mea}} + A_{\text{Rpl}} = P_{\text{Mea}} + \text{Cable Loss} + \text{Antenna Factor}$$

A "reference path loss" is established and the A_{Rpl} is the attenuation of "reference path loss", and including the gain of receive antenna, the gain of the preamplifier, the cable loss.

P_{Mea} is the field strength recorded from the instrument.

Test Notes

1. The EUT is operating at its maximum duty cycle and its maximum power control level.
2. Investigation has been done on all channel, modes and modulations/data rates. Only the radiated emissions of the configurations that produced the worst case emissions are reported in this section.

C.1.1 Radiated Spurious Emission- above 1GHz

EUT set-up No.	Combination of EUT and AE
Set.1-1	UT22a + AE1-1 + AE2-1
Set.3-1	UT04a + AE1-1 + AE2-1

Peak results

802.11b

Ch1

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17269.000	52.19	-25.90	44.40	33.79	74.00	21.81	H
14200.500	50.09	-29.00	42.00	37.09	74.00	23.91	H
12030.500	48.08	-31.50	39.10	40.48	74.00	25.92	V
9033.000	46.18	-33.80	38.10	41.78	74.00	27.82	V
7233.000	44.23	-35.50	36.40	43.33	74.00	29.77	H
2389.400	55.49	-20.00	28.10	47.49	74.00	18.51	V

Ch6

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17621.000	52.47	-25.70	46.00	32.27	74.00	21.53	V
14281.500	50.15	-28.40	42.30	36.25	74.00	23.85	V
12988.000	47.95	-30.50	39.20	39.25	74.00	26.05	V
9141.500	45.27	-33.80	38.10	41.07	74.00	28.73	H
7411.500	44.10	-35.20	36.70	42.50	74.00	29.90	H
4873.500	42.64	-37.20	33.20	46.64	74.00	31.36	H

Ch11

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17956.500	53.64	-25.50	46.70	32.44	74.00	20.36	V
14092.000	49.91	-29.40	41.70	37.71	74.00	24.09	V
12874.000	48.13	-30.70	39.10	39.63	74.00	25.87	H
9655.000	45.57	-33.10	38.00	40.67	74.00	28.43	V
7692.000	44.35	-34.80	37.00	42.25	74.00	29.65	V
2486.900	55.75	-20.00	28.30	47.45	74.00	18.25	V

802.11g

Ch1

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17713.000	53.46	-25.70	46.00	33.26	74.00	20.54	V
13573.000	51.29	-29.50	40.40	40.39	74.00	22.71	H
12861.000	47.85	-30.70	39.10	39.35	74.00	26.15	H
9645.000	46.22	-33.10	38.00	41.32	74.00	27.78	V
7434.500	44.91	-35.20	36.70	43.31	74.00	29.09	H
2389.700	57.00	-20.00	28.10	49.00	74.00	17.00	H

Ch6

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17300.000	53.37	-25.90	44.40	34.97	74.00	20.63	H
13739.500	49.73	-29.10	40.90	37.93	74.00	24.27	V
12447.500	47.79	-31.20	38.90	40.09	74.00	26.21	V
8659.500	45.49	-34.40	37.90	41.89	74.00	28.51	H
7250.500	43.88	-35.00	36.50	42.28	74.00	30.12	H
4940.000	39.56	-37.10	33.30	43.36	74.00	34.44	V

Ch11

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17791.000	52.80	-25.50	46.70	31.60	74.00	21.20	V
13668.500	49.86	-29.50	40.40	38.96	74.00	24.14	V
12828.000	47.48	-30.70	39.10	38.98	74.00	26.52	H
9727.000	45.73	-33.00	38.00	40.73	74.00	28.27	V
7248.000	43.78	-35.00	36.50	42.18	74.00	30.22	V
2485.100	55.70	-20.00	28.30	47.40	74.00	18.30	V

802.11n-HT20

Ch1

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17982.500	52.44	-25.50	46.70	31.24	74.00	21.56	H
14146.500	49.90	-29.00	42.00	36.90	74.00	24.10	H
12380.000	47.97	-31.10	38.90	40.17	74.00	26.03	V
9684.000	45.55	-33.00	38.00	40.55	74.00	28.45	H
7222.000	44.56	-35.50	36.40	43.66	74.00	29.44	V
2390.000	56.07	-20.00	28.10	48.07	74.00	17.93	H

Ch6

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17687.500	52.81	-25.70	46.00	32.61	74.00	21.19	V
13728.500	50.21	-29.10	40.90	38.41	74.00	23.79	V
12383.000	47.85	-31.10	38.90	40.05	74.00	26.15	H
8642.500	45.64	-34.40	37.90	42.04	74.00	28.36	H
7495.500	43.95	-34.50	36.80	41.65	74.00	30.05	V
4867.000	38.98	-37.20	33.20	42.98	74.00	35.02	H

Ch11

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17774.500	52.80	-25.50	46.70	31.60	74.00	21.20	H
13676.000	49.93	-29.50	40.40	39.03	74.00	24.07	V
12422.000	47.59	-31.20	38.90	39.89	74.00	26.41	V
9184.500	45.98	-33.80	38.10	41.78	74.00	28.02	V
7247.500	44.29	-35.00	36.50	42.69	74.00	29.71	V
2495.500	55.57	-20.00	28.30	47.27	74.00	18.43	V

802.11n-HT40
Ch3

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17319.000	52.31	-25.90	44.40	33.91	74.00	21.69	V
13539.000	50.46	-29.60	40.00	40.06	74.00	23.54	H
12650.000	47.58	-30.50	39.10	38.98	74.00	26.42	H
9117.000	45.63	-33.80	38.10	41.43	74.00	28.37	H
7171.000	44.16	-35.40	36.30	43.26	74.00	29.84	H
2389.700	55.91	-20.00	28.10	47.91	74.00	18.09	H

Ch6

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17396.500	53.10	-26.90	45.20	34.70	74.00	20.90	V
14317.500	50.31	-28.40	42.30	36.41	74.00	23.69	H
12915.000	48.03	-30.50	39.20	39.33	74.00	25.97	H
9183.500	45.67	-33.80	38.10	41.47	74.00	28.33	V
7233.500	44.31	-35.50	36.40	43.41	74.00	29.69	H
4936.000	39.31	-37.10	33.30	43.11	74.00	34.69	H

Ch9

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17541.500	52.76	-26.90	45.20	34.36	74.00	21.24	V
13768.500	49.64	-29.10	40.90	37.84	74.00	24.36	V
12869.000	47.97	-30.70	39.10	39.47	74.00	26.03	V
9121.500	46.05	-33.80	38.10	41.85	74.00	27.95	H
7996.500	44.85	-34.80	37.10	42.55	74.00	29.15	V
2487.200	57.55	-20.00	28.30	49.25	74.00	16.45	H

Results for Set.3-1
802.11n-HT40, 04a

Ch9

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17841.500	51.49	-25.50	46.70	30.29	74.00	22.51	V
14216.500	50.24	-29.00	42.00	37.24	74.00	23.76	V
12869.500	47.30	-30.70	39.10	38.80	74.00	26.70	V
9607.000	45.77	-33.10	38.00	40.87	74.00	28.23	H
6850.000	45.02	-35.50	35.80	44.62	74.00	28.98	H
2488.400	58.15	-20.00	28.30	49.85	74.00	15.85	H

Average results

802.11b

Ch1

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17773.000	41.32	-25.50	46.70	20.12	54.00	12.68	V
13572.000	39.18	-29.50	40.40	28.28	54.00	14.82	V
4824.000	37.74	-37.50	33.10	42.04	54.00	16.26	H
12442.500	36.78	-31.20	38.90	29.08	54.00	17.22	H
9128.500	34.27	-33.80	38.10	30.07	54.00	19.73	V
2386.300	43.03	-20.00	28.10	35.03	54.00	10.97	H

Ch6

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17769.500	41.18	-25.50	46.70	19.98	54.00	12.82	H
13678.500	38.84	-29.50	40.40	27.94	54.00	15.16	V
4874.000	36.97	-37.20	33.20	40.97	54.00	17.03	H
12838.500	36.49	-30.70	39.10	27.99	54.00	17.51	V
9135.000	34.58	-33.80	38.10	30.38	54.00	19.42	V
7234.500	32.92	-35.50	36.40	32.02	54.00	21.08	H

Ch11

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17385.500	41.30	-25.90	44.40	22.90	54.00	12.70	V
13580.500	38.73	-29.50	40.40	27.83	54.00	15.27	H
4924.000	38.04	-37.10	33.30	41.84	54.00	15.96	H
12858.000	36.41	-30.70	39.10	27.91	54.00	17.59	H
9329.500	34.24	-33.90	38.00	30.14	54.00	19.76	V
2486.700	43.53	-20.00	28.30	35.23	54.00	10.47	H

802.11g

Ch1

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17983.500	41.49	-25.50	46.70	20.29	54.00	12.51	H
13662.500	38.94	-29.50	40.40	28.04	54.00	15.06	H
12366.000	36.62	-31.10	38.90	28.82	54.00	17.38	V
9648.000	34.45	-33.10	38.00	29.55	54.00	19.55	H
7222.000	32.93	-35.50	36.40	32.03	54.00	21.07	V
2389.900	44.96	-20.00	28.10	36.96	54.00	9.04	H

Ch6

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17776.000	41.26	-25.50	46.70	20.06	54.00	12.74	V
13573.000	38.84	-29.50	40.40	27.94	54.00	15.16	H
12869.500	36.79	-30.70	39.10	28.29	54.00	17.21	V
9609.000	34.37	-33.10	38.00	29.47	54.00	19.63	H
7995.000	32.99	-34.80	37.10	30.69	54.00	21.01	V
4874.000	28.90	-37.20	33.20	32.90	54.00	25.10	H

Ch11

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17986.500	41.68	-25.50	46.70	20.48	54.00	12.32	H
13633.000	38.92	-29.50	40.40	28.02	54.00	15.08	V
12852.500	36.83	-30.70	39.10	28.33	54.00	17.17	V
9228.000	34.55	-33.70	38.00	30.25	54.00	19.45	V
7233.000	33.02	-35.50	36.40	32.12	54.00	20.98	H
2485.000	44.08	-20.00	28.30	35.78	54.00	9.92	H

802.11n-HT20

Ch1

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17970.000	41.21	-25.50	46.70	20.01	54.00	12.79	H
13638.000	39.01	-29.50	40.40	28.11	54.00	14.99	V
12939.000	36.40	-30.50	39.20	27.70	54.00	17.60	H
9114.000	34.17	-33.80	38.10	29.97	54.00	19.83	V
7215.000	33.08	-35.50	36.40	32.18	54.00	20.92	V
2389.900	44.79	-20.00	28.10	36.79	54.00	9.21	H

Ch6

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17716.000	41.57	-25.70	46.00	21.37	54.00	12.43	H
13584.500	38.86	-29.50	40.40	27.96	54.00	15.14	H
12447.000	36.47	-31.20	38.90	28.77	54.00	17.53	V
9119.000	34.27	-33.80	38.10	30.07	54.00	19.73	V
7527.500	33.20	-34.50	36.80	30.90	54.00	20.80	V
4872.500	29.10	-37.20	33.20	33.10	54.00	24.90	H

Ch11

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17704.500	41.36	-25.70	46.00	21.16	54.00	12.64	V
13627.500	38.92	-29.50	40.40	28.02	54.00	15.08	V
12852.000	36.80	-30.70	39.10	28.30	54.00	17.20	H
9222.500	34.33	-33.70	38.00	30.03	54.00	19.67	V
7221.500	33.15	-35.50	36.40	32.25	54.00	20.85	V
2485.600	44.13	-20.00	28.30	35.83	54.00	9.87	H

802.11n-HT40

Ch3

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17306.000	41.41	-25.90	44.40	23.01	54.00	12.59	H
13677.500	39.00	-29.50	40.40	28.10	54.00	15.00	H
12846.500	36.55	-30.70	39.10	28.05	54.00	17.45	H
9120.500	34.22	-33.80	38.10	30.02	54.00	19.78	H
7232.000	32.88	-35.50	36.40	31.98	54.00	21.12	V
2389.000	45.45	-20.00	28.10	37.45	54.00	8.55	H

Ch6

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17703.000	41.53	-25.70	46.00	21.33	54.00	12.47	V
13623.000	38.95	-29.50	40.40	28.05	54.00	15.05	V
12855.500	36.70	-30.70	39.10	28.20	54.00	17.30	H
9748.000	35.12	-33.00	38.00	30.12	54.00	18.88	V
7227.000	33.24	-35.50	36.40	32.34	54.00	20.76	H
4936.000	28.20	-37.10	33.30	32.00	54.00	25.80	H

Ch9

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17976.500	41.28	-25.50	46.70	20.08	54.00	12.72	V
13760.000	38.70	-29.10	40.90	26.90	54.00	15.30	V
12851.000	36.52	-30.70	39.10	28.02	54.00	17.48	V
9808.000	34.45	-33.50	38.00	29.95	54.00	19.55	V
7217.000	33.47	-35.50	36.40	32.57	54.00	20.53	V
2485.000	46.60	-20.00	28.30	38.30	54.00	7.40	H

Results for Set.3-1**802.11n-HT40, 04a**

Ch9


Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17350.500	39.15	-25.90	44.40	20.75	54.00	14.85	V
13712.500	37.23	-29.10	40.90	25.43	54.00	16.77	H
9808.000	36.55	-33.50	38.00	32.05	54.00	17.45	V
12786.000	35.99	-30.70	39.10	27.49	54.00	18.01	V
7322.000	33.87	-35.10	36.60	32.37	54.00	20.13	V
2485.000	48.04	-20.00	28.30	39.74	54.00	5.96	H

The EUT is no radiated spurious emission above 18GHz, all the signals are background noise.


Conclusion: Pass

C.1.2 Radiated Spurious Emission-BELOW 1GHz

WOSRT CASE FOR BELOW 30MHz (Set.1-1, 802.11b CH1)

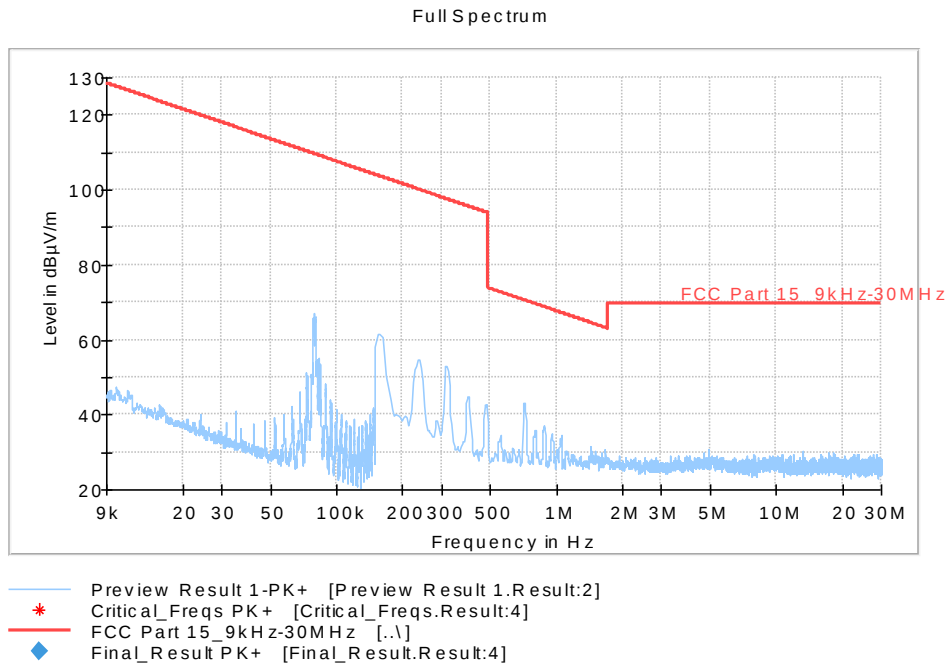

WOSRT CASE FOR BELOW 1GHz (Set.1-1, 802.11b CH1)

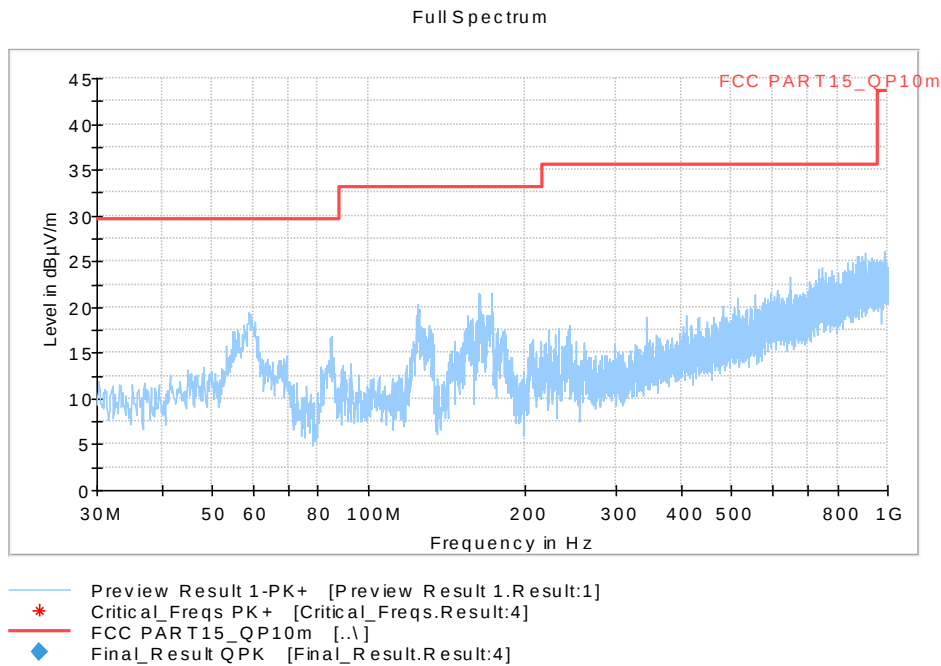

C.1.3 Band Edges Compliance– Radiated

EUT set-up No.	Combination of EUT and AE
Set.1-1	UT22a + AE1-1 + AE2-1
Set.3-1	UT04a + AE1-1 + AE2-1

Results for Set.1-1

802.11b mode

Mode	Channel	Frequency Range	Test Results	Conclusion
802.11b	Power(ch1)	2.31GHz ~2.43GHz	Fig.C.1.3.1	P
	Power(ch11)	2.45GHz ~2.5GHz	Fig.C.1.3.2	P

802.11g mode

Mode	Channel	Frequency Range	Test Results	Conclusion
802.11g	Power(ch1)	2.31GHz ~2.43GHz	Fig.C.1.3.3	P
	Power(ch11)	2.45GHz ~2.5GHz	Fig.C.1.3.4	P

802.11n-HT20 mode

Mode	Channel	Frequency Range	Test Results	Conclusion
802.11n(HT20)	Power(ch1)	2.31GHz ~2.43GHz	Fig.C.1.3.5	P
	Power(ch11)	2.45GHz ~2.5GHz	Fig.C.1.3.6	P

802.11n-HT40 mode

Mode	Channel	Frequency Range	Test Results	Conclusion
802.11n(HT40)	Power(ch3)	2.31GHz ~2.43GHz	Fig.C.1.3.7	P
	Power(ch9)	2.45GHz ~2.5GHz	Fig.C.1.3.8	P

Results for Set.3-1

802.11n-HT40 mode, 04a

Mode	Channel	Frequency Range	Test Results	Conclusion
802.11n(HT40)	Power(ch3)	2.31GHz ~2.43GHz	Fig.C.1.3.9	P
	Power(ch9)	2.45GHz ~2.5GHz	Fig.C.1.3.10	P

Conclusion: PASS

Test graphs as below:



Fig.C.1.3.1 Transmitter Spurious Emission - Radiated (Power): 802.11b, ch1, 2.31 GHz – 2.43GHz

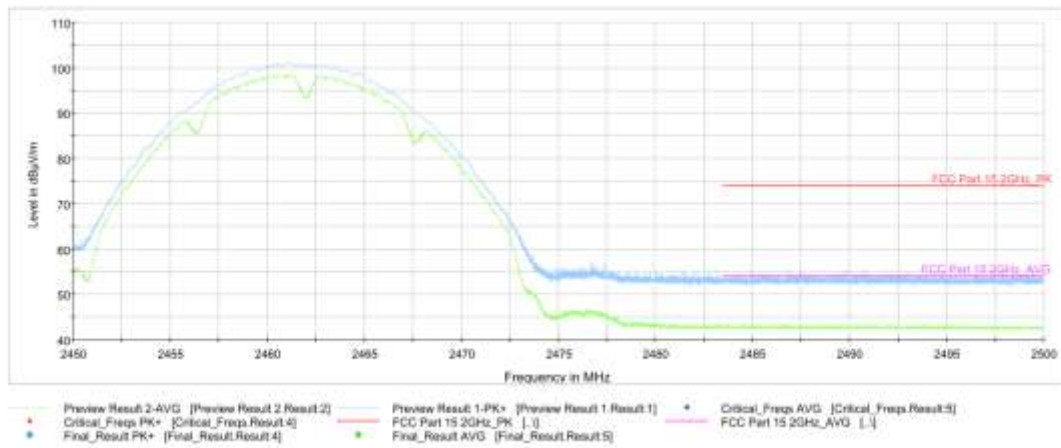


Fig.C.1.3.2 Transmitter Spurious Emission - Radiated (Power): 802.11b, ch11, 2.45 GHz - 2.50GHz

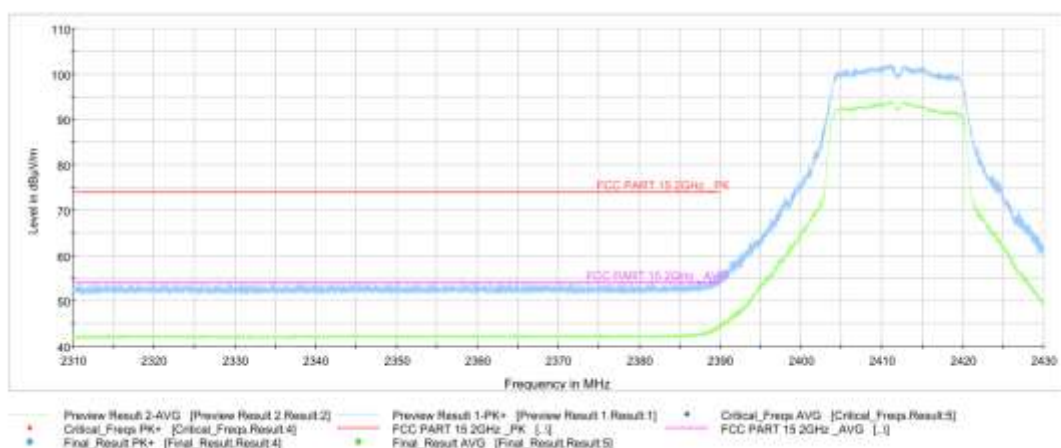


Fig.C.1.3.3 Transmitter Spurious Emission - Radiated (Power): 802.11g, ch1, 2.31 GHz - 2.43GHz

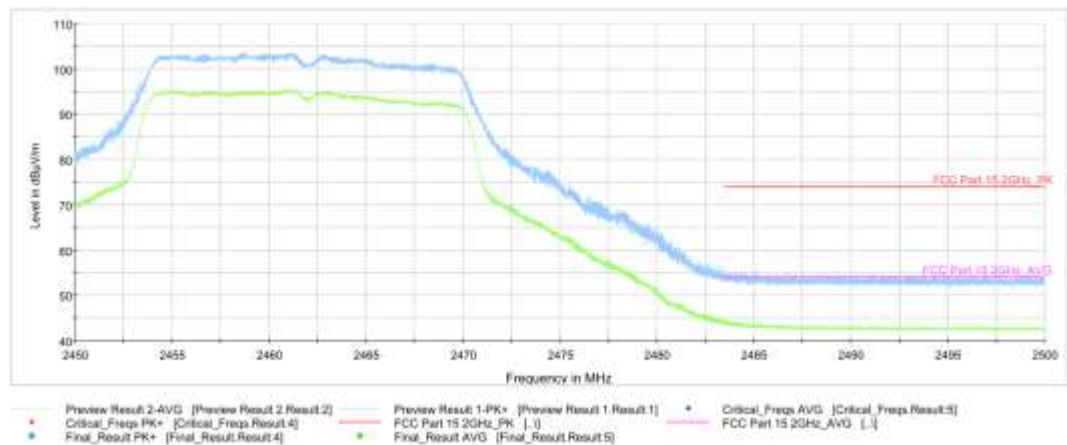


Fig.C.1.3.4 Transmitter Spurious Emission - Radiated (Power): 802.11g, ch11, 2.45 GHz - 2.50GHz

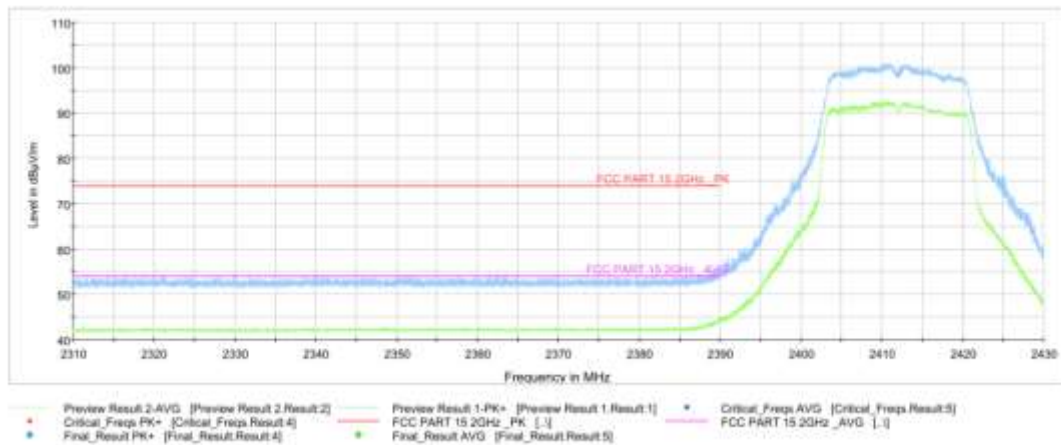


Fig.C.1.3.5 Transmitter Spurious Emission - Radiated (Power): 802.11n-HT20, ch1, 2.31 GHz - 2.43GHz

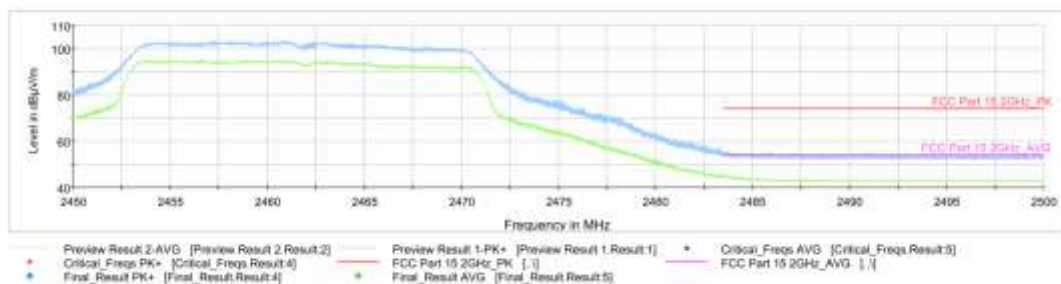


Fig.C.1.3.6 Transmitter Spurious Emission - Radiated (Power): 802.11n-HT20, ch11, 2.45 GHz - 2.50GHz

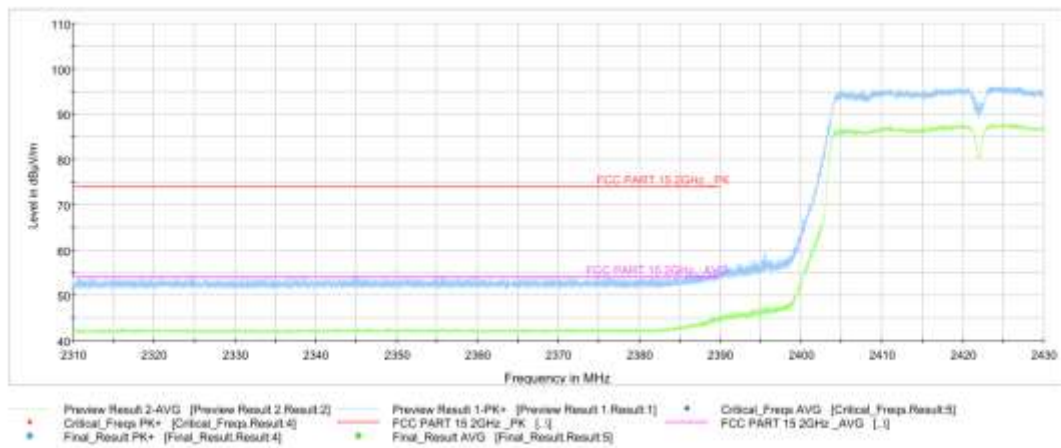


Fig.C.1.3.7 Transmitter Spurious Emission - Radiated (Power): 802.11n-HT40, ch3, 2.31 GHz - 2.43GHz

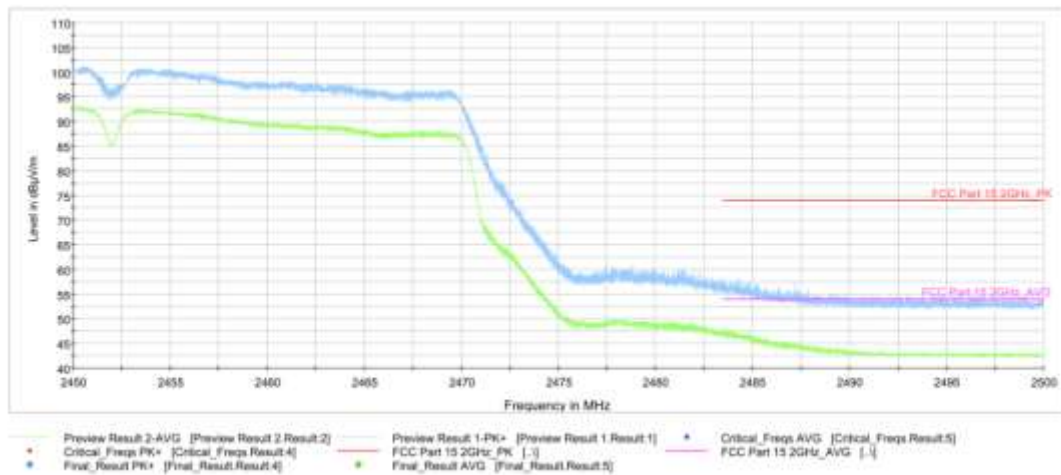


Fig.C.1.3.8 Transmitter Spurious Emission - Radiated (Power): 802.11n-HT40, ch9, 2.45 GHz - 2.50GHz

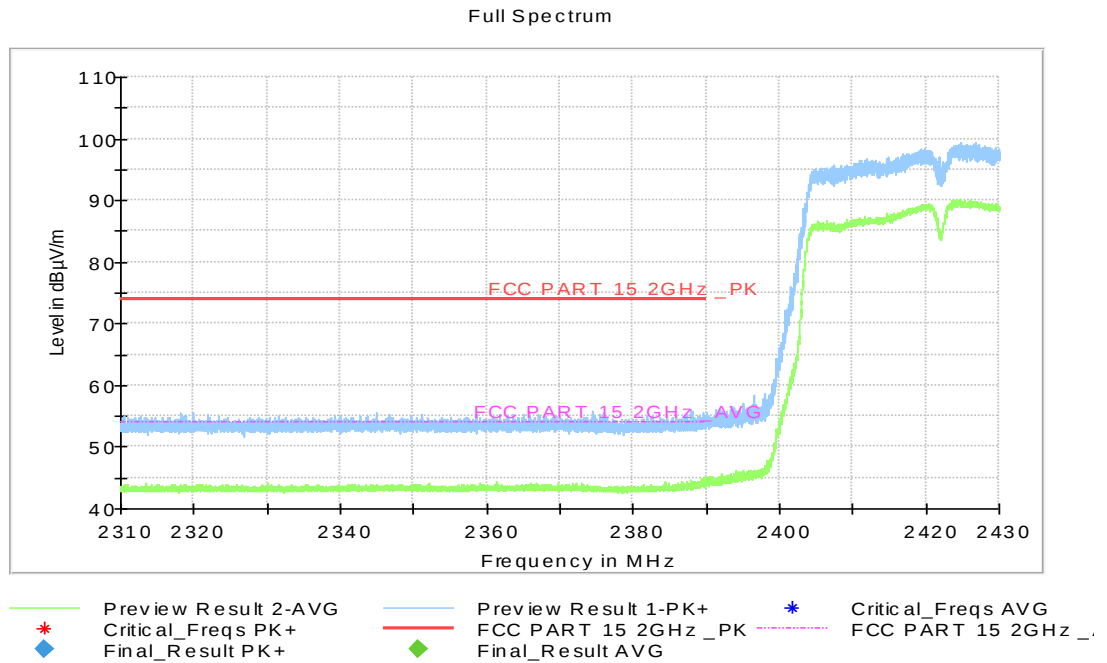


Fig.C.1.3.9 Transmitter Spurious Emission - Radiated (Power): 802.11n-HT40, ch3, 2.31 GHz - 2.43GHz, 04a

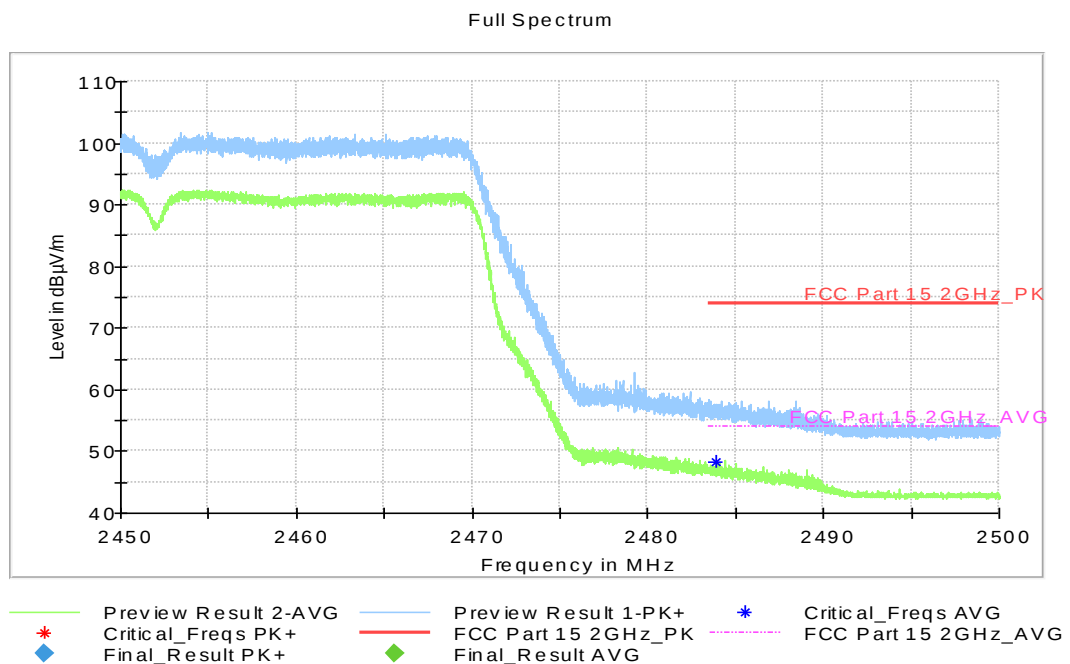


Fig.C.1.3.10 Transmitter Spurious Emission - Radiated (Power): 802.11n-HT40, ch9, 2.45 GHz - 2.50GHz, 04a

C.2. AC Power-line Conducted Emission

Specification Reference

FCC 47 CFR Part 15.207, 15.107

Method of Measurement

See Clause 6.2 of ANSI C63.10-2013 specifically.

See Clause 4 and Clause 5 of ANSI C63.10-2013 generally.

The conducted emissions from the AC port of the EUT are measured in a shielding room. The EUT is connected to a Line Impedance Stabilization Network (LISN). An overview sweep with peak detection was performed. The measurements were performed with a quasi-peak detector and if required, an average detector.

The conducted emission measurements were made with the following detector of the test receiver: Quasi-Peak / Average Detector.


The measurement bandwidth is:

Frequency of Emission (MHz)	RBW/IF bandwidth	Sweep Time(s)
0.15-30	9kHz	1

Test Condition:

Voltage (V)	Frequency (Hz)
120	60

Measurement Setup

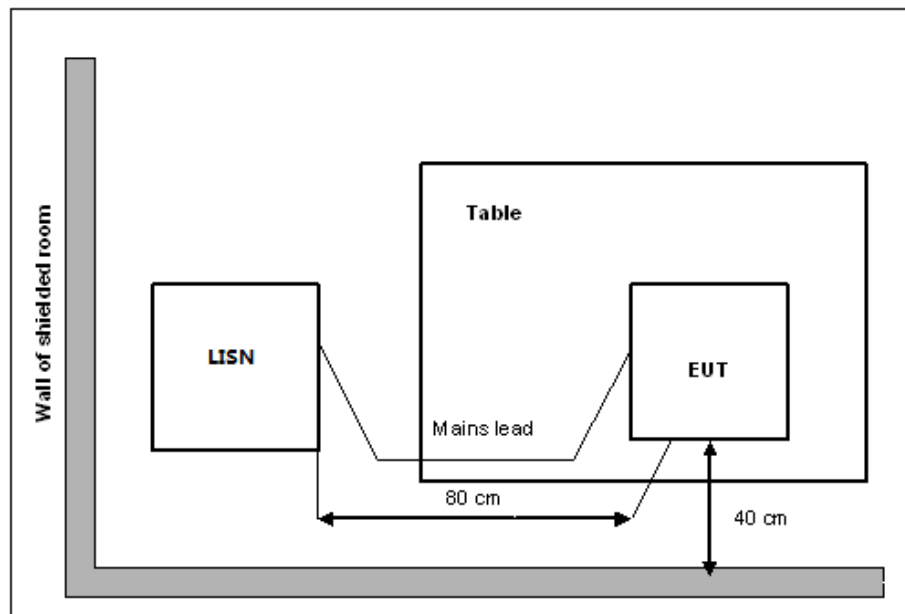

EUT Operating Mode and Test Conditions

The measurement of EUT is carried out under the transmit state.

The EUT is powered by an AC/travel adapter.

Measurement Result and limit:

EUT set-up No. **Combination of EUT and AE**
Set.1-2 EUT1 + AE1-1 + AE2-1 + AE3-3

This configuration is the worst result of Set.1-1 to Set.1-4, Set.3-1 to Set.3-4 in 15B.

Note: all modes have been tested and the worst results shown here.

WLAN (Quasi-peak Limit)

Frequency range (MHz)	Quasi-peak Limit (dBμV)	Result (dBμV)		Conclusion
		With charger		
		802.11b	Idle	
0.15 to 0.5	66 to 56	Fig.C.2.1	Fig.C.2.2	P
0.5 to 5	56			
5 to 30	60			
NOTE: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.				

WLAN (Average Limit)

Frequency range (MHz)	Average Limit (dBμV)	Result (dBμV)		Conclusion
		With charger		
		802.11b	Idle	
0.15 to 0.5	56 to 46	Fig.C.2.1	Fig.C.2.2	P
0.5 to 5	46			
5 to 30	50			
NOTE: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.				

Conclusion: Pass

Test graphs as below:

Set.1-1, 802.11b

Traffic:

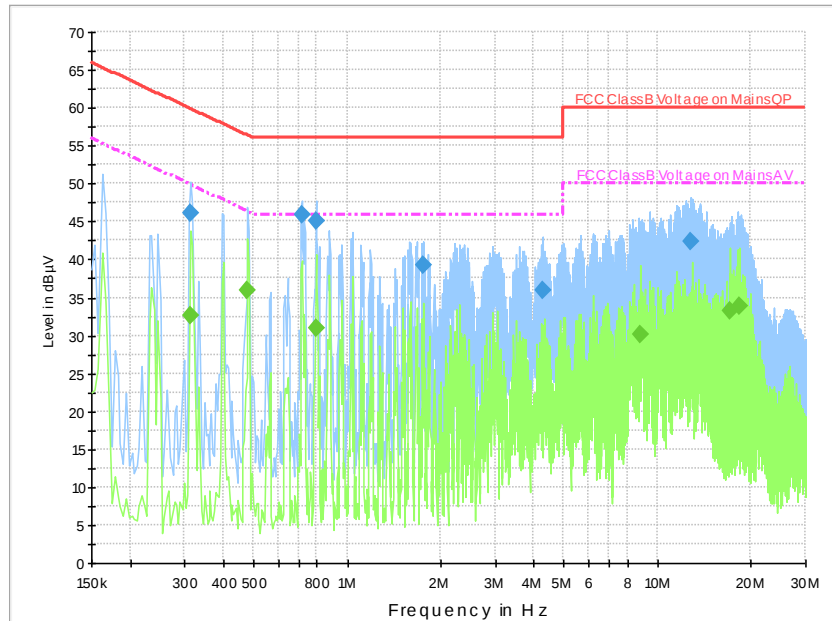


Fig.C.2.1 AC Powerline Conducted Emission-802.11b

Note1: The graphic result above is the maximum of the measurements for both phase line and neutral line.

Final Result 1

Frequency (MHz)	QuasiPeak (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.314000	46.1	5000.0	9.000	On	N	19.8	13.7	59.9
0.714000	45.9	5000.0	9.000	On	L1	19.6	10.1	56.0
0.794000	45.0	5000.0	9.000	On	N	19.6	11.0	56.0
1.754000	39.2	5000.0	9.000	On	L1	19.6	16.8	56.0
4.282000	36.0	5000.0	9.000	On	L1	19.6	20.0	56.0
12.742000	42.4	5000.0	9.000	On	N	19.6	17.6	60.0

Final Result 2

Frequency (MHz)	CAverage (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.314000	32.7	5000.0	9.000	On	N	19.8	17.2	49.9
0.478000	35.8	5000.0	9.000	On	N	19.8	10.5	46.4
0.794000	31.0	5000.0	9.000	On	N	19.6	15.0	46.0
8.842000	30.1	5000.0	9.000	On	L1	19.7	19.9	50.0
17.202000	33.1	5000.0	9.000	On	L1	19.7	16.9	50.0
18.402000	33.8	5000.0	9.000	On	L1	19.7	16.2	50.0

Idle:

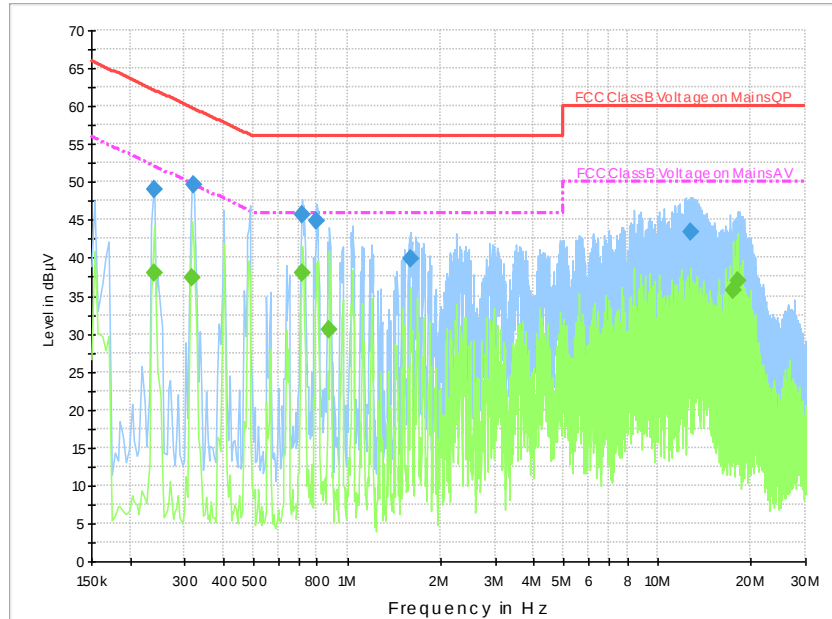


Fig.C.2.2 AC Powerline Conducted Emission-Idle

Note1: The graphic result above is the maximum of the measurements for both phase line and neutral line.

Final Result 1

Frequency (MHz)	QuasiPeak (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.238000	49.0	5000.0	9.000	On	N	19.7	13.2	62.2
0.322000	49.5	5000.0	9.000	On	N	19.7	10.1	59.7
0.714000	45.7	5000.0	9.000	On	N	19.6	10.3	56.0
0.798000	44.9	5000.0	9.000	On	N	19.6	11.1	56.0
1.594000	39.9	5000.0	9.000	On	L1	19.7	16.1	56.0
12.742000	43.4	5000.0	9.000	On	L1	19.7	16.6	60.0

Final Result 2

Frequency (MHz)	CAverage (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.238000	38.0	5000.0	9.000	On	N	19.7	14.1	52.2
0.318000	37.3	5000.0	9.000	On	L1	19.8	12.5	49.8
0.718000	38.0	5000.0	9.000	On	N	19.6	8.0	46.0
0.878000	30.6	5000.0	9.000	On	L1	19.7	15.4	46.0
17.598000	35.7	5000.0	9.000	On	L1	19.7	14.3	50.0
18.078000	36.9	5000.0	9.000	On	L1	19.7	13.1	50.0

*** END OF REPORT BODY ***