



Report No: FCC1604200 File reference No: 2016-05-05

Applicant: Shenzhen Star Sources Electronic Technology Co., Limited

Product: Wireless Mouse

Model No: ST-291, 179393, 179409, 179416, 179294, 179379, 179386

Brand Name: N/A

Test Standards: FCC Part 15.249

Test result:

It is herewith confirmed and found to comply with the

requirements set up by ANSI C63.4&FCC Part 15 Subpart C, Paragraph 15.249 regulations for the evaluation of

electromagnetic compatibility

Approved By

Jack Chung

Jack Chung

Manager

Dated: May 04, 2016

Results appearing herein relate only to the sample tested The technical reports is issued errors and omissions exempt and is subject to withdrawal at

# SHENZHEN TIMEWAY TESTING LABORATORIES

Room 512-519, 5/F., East Tower, Building 4, Anhua Industrial Zone, Futian District, Shenzhen, Guangdong, China

Tel (755) 83448688, Fax (755) 83442996, E-Mail:info@timeway-lab.com

Report No.: FCC1604200 Page 2 of 33

Date: 2016-05-04



# **Special Statement:**

The testing quality ability of our laboratory meet with "Quality Law of People's Republic of China" Clause 19.

The testing quality system of our laboratory meet with ISO/IEC-17025 requirements, which is approved by CNAS. This approval result is accepted by MRA of APLAC.

Our test facility is recognized, certified, or accredited by the following organizations:

# **CNAS-LAB Code: L2292**

The EMC Laboratory has been assessed and in compliance with CNAS-CL01 accreditation criteria for testing Laboratories (identical to ISO/IEC 17025:2005 General Requirements) for the Competence of testing Laboratories.

# FCC-Registration No.: 899988

The EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications commission. The acceptance letter from the FCC is maintained in our files. Registration No.: 899988.

Date: 2016-05-04



# Test Report Conclusion

	Content	
1.0	General Details	4
1.1	Test Lab Details.	4
1.2	Applicant Details	4
1.3	Description of EUT	4
1.4	Submitted Sample.	4
1.5	Test Duration	5
1.6	Test Uncertainty	5
1.7	Test By	5
2.0	List of Measurement Equipment.	6
3.0	Technical Details	7
3.1	Summary of Test Results	7
3.2	Test Standards	7
4.0	EUT Modification.	7
5.0	Power Line Conducted Emission Test.	8
5.1	Schematics of the Test.	8
5.2	Test Method and Test Procedure.	8
5.3	Configuration of the EUT	8
5.4	EUT Operating Condition	9
5.5	Conducted Emission Limit.	9
5.6	Test Result	9
6.0	Radiated Emission test	10
6.1	Test Method and Test Procedure	10
6.2	Configuration of the EUT	10
6.3	EUT Operation Condition	10
6.4	Radiated Emission Limit	11
6.5	Test Result.	12
7.0	Band Edge	20
7.1	Test Method and Test Procedure.	20
7.2	Radiated Test Setup	20
7.3	Configuration of the EUT	20
7.4	EUT Operating Condition.	20
7.5	Band Edge Limit.	20
7.6	Band Edge Test Result.	21
8.0	Antenna Requirement.	22
9.0	20dB bandwidth measurement.	23
10.0	FCC ID Label	26

The report refers only to the sample tested and does not apply to the bulk.

11.0

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

Photo of Test Setup and EUT View.

Report No.: FCC1604200 Page 4 of 33

Date: 2016-05-04



#### 1.0 General Details

#### 1.1 Test Lab Details

Name: SHENZHEN TIMEWAY TESTING LABORATORIES.

Address: Room 512-519,5/F., East Tower, Building 4, Anhua Industrial Zone, Futian District, Shenzhen,

Guangdong China

Telephone: (755) 83448688 Fax: (755) 83442996

Site on File with the Federal Communications Commission – United Sates

Registration Number: 899988 For 3m Anechoic Chamber

Site Listed with Industry Canada of Ottawa, Canada

Registration Number: IC: 5205A-02

For 3m Anechoic Chamber

#### 1.2 Applicant Details

Applicant: Shenzhen Star Sources Electronic Technology Co., Limited

Address: RM2001, Meilan Int'l Business Center, intersection between the road of Xixiang and QianJin

BaoAn District, Shenzhen, China

Telephone: +86-755-86397262 Fax: +86-755-26609516

## 1.3 Description of EUT

Product: Wireless Mouse

Manufacturer: Shenzhen Star Sources Electronic Technology Co., Limited

Address: RM2001, Meilan Int'l Business Center, intersection between the road of Xixiang

and QianJin BaoAn District, Shenzhen, China

Brand Name: N/A Model Number: ST-291

Additional Model Name 179393, 179409, 179416, 179294, 179379, 179386

Input Voltage: DC3V, Two PCS AAA batteries

Modulation Type: GFSK

Operation Frequency 2404-2478MHz

Antenna Designation PCB antenna with gain -0.61dBi Max

#### 1.4 Submitted Sample

2 Sample

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

Report No.: FCC1604200 Page 5 of 33

Date: 2016-05-04



1.5 Test Duration 2016-04-22 to 2016-05-04

1.6 Test UncertaintyConducted Emissions Uncertainty =3.6dBRadiated Emissions Uncertainty =4.7dB

1.7 Test Engineer

The sample tested by

Print Name: Terry Tang

Page 6 of 33 Report No.: FCC1604200



2.0 Test Equipments						
Instrument Type	Manufacturer	Model	Serial No.	Date of Cal.	Due Date	
ESPI Test Receiver	R&S	ESPI 3	100379	2015-08-22	2016-08-21	
TWO	R&S	F7112 75	100204	2015 00 22	2016 00 21	
Line-V-NETW		EZH3-Z5	100294	2015-08-22	2016-08-21	
TWO	R&S	E7112 75	100252	2015 00 22	2016 09 21	
Line-V-NETW		EZH3-Z5	100253	2015-08-22	2016-08-21	
ESDV Test Receiver	R&S	ESDV	100008	2015-08-22	2016-08-21	
Impuls-Begrenzer	R&S	ESH3-Z2	100281	2015-08-22	2016-08-21	
System Controller	CT	SC100	-			
Loop Antenna	EMCO	6502	00042960	2015-08-23	2016-08-22	
ESPI Test Receiver	R&S	ESI26	838786/013	2015-08-22	2016-08-21	
3m Anechoic	Zhana Wa Elaatuan	9.2(L)*6.2(W		2015-08-23	2016-08-22	
Chamber	ZhongYu Electron	)* 6.4(H)		2013-08-23	2010-06-22	
Horn Antenna	R&S	BBHA 9170	BBHA9170265	2015-08-24	2016-08-23	
Horn Antenna	R&S	BBHA 9120D	9120D-631	2015-08-24	2016-08-23	
Power meter	Anritsu	ML2487A	6K00003613	2015-08-22	2016-08-21	
Power sensor	Anritsu	MA2491A	32263	2015-08-22	2016-08-21	
Bilog Antenna	Schwarebeck	VULB9163	9163/340	2015-08-23	2016-08-21	
9*6*6 Anechoic			N/A	2015-08-24	2016-08-23	
EMI Test Receiver	RS	ESCS30	100139	2015-08-22	2016-08-21	
RF Cable	SCHWARZBECK			2015-08-23	2016-08-22	
Pre-Amplifier	HP	8447D	2727A05017	2015-08-05	2016-08-04	
Pre-Amplifier	EM	EM30265		2015-08-05	2016-08-04	

Report No.: FCC1604200 Page 7 of 33

Date: 2016-05-04



#### 3.0 Technical Details

# 3.1 Summary of test results

The EUT	has been	tested	according	to the	following	specifications:

Standard	Test Type	Result	Notes
FCC Part 15, Paragraph 15.207	Conducted Emission Test	PASS	Complies
FCC Part 15 Subpart C Paragraph 15.249(a) & 15.249(b) Limit	Field Strength of Fundamental	PASS	Complies
FCC Part 15, Paragraph 15.209	Radiated Emission Test	PASS	Complies
FCC Part 15 Subpart C Paragraph 15.249(d) Limit	Band Edge Test	PASS	Complies

#### 3.2 Test Standards

FCC Part 15 Subpart C, Paragraph 15.249, ANSI C63.4:2014 and ANSI C63.10:2013

#### 4.0 EUT Modification


No modification by SHENZHEN TIMEWAY TESTING LABORATORIES

Date: 2016-05-04



#### 5. Power Line Conducted Emission Test

#### 5.1 Schematics of the test

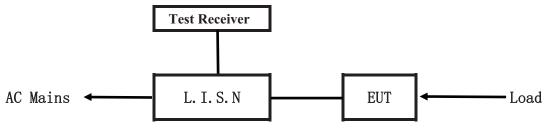


**EUT: Equipment Under Test** 

#### 5.2 Test Method and test Procedure

The EUT was tested according to ANSI C63.4-2014. The Frequency spectrum From 0.15MHz to 30MHz was investigated. The LISN used was 50ohm/50uH as specified by section 5.1 of ANSI C63.4-2014.

# Block diagram of Test setup

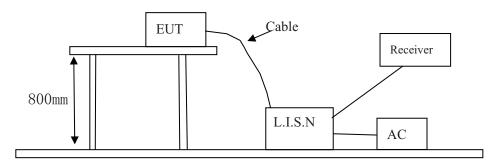

# 5.3 Configuration of The EUT

The EUT was configured according to ANSI C63.4-2014. All interface ports were connected to the appropriate peripherals. All peripherals and cables are listed below.

One channels are provided to the EUT

#### A. EUT

Device	Manufacturer Model		FCC ID
Wireless Mouse	Shenzhen Star Sources Electronic	ST-291, 179393, 179409, 179416,	ZJEST-ST291
	Technology Co., Limited	179294, 179379, 179386	ZJES1-S1291

Report No.: FCC1604200 Page 9 of 33

Date: 2016-05-04



#### B. Internal Device

Device	Manufacturer	Model	FCC ID/DOC
N/A			

# C. Peripherals

Device	Manufacturer	Model	FCC ID/DOC	Cable
N/A				

## 5.4 EUT Operating Condition

Operating condition is according to ANSI C63.4 -2014

- A Setup the EUT and simulators as shown on follow
- B Enable AF signal and confirm EUT active to normal condition

## 5.5 Power line conducted Emission Limit according to Paragraph 15.107 and 15.207

Fraguanay(MUz)	Class A Lir	nits (dB µ V)	Class B Limits (dB µ V)		
Frequency(MHz)	Quasi-peak Level	Average Level	Quasi-peak Level	Average Level	
$0.15 \sim 0.50$	79.0	66.0	66.0~56.0*	56.0~46.0*	
$0.50 \sim 5.00$	73.0	60.0	56.0	46.0	
5.00 ~ 30.00	73.0	60.0	60.0	50.0	

Notes:

- 1. \*Decreasing linearly with logarithm of frequency.
- 2. The tighter limit shall apply at the transition frequencies

# 5.6 Test Results N/A

The frequency spectrum from 0.15MHz to 30MHz was investigated. All reading are quasi-peak values with a resolution bandwidth of 9kHz.

Note: Due to Battery operation, this test item not applicable.

Page 10 of 33

Date: 2016-05-04




#### **6** Radiated Emission Test

Report No.: FCC1604200

- 6.1 Test Method and test Procedure:
- (1) The EUT was tested according to ANSI C63.10-2013. The radiated test was performed at Timeway EMC Laboratory. This site is on file with the FCC laboratory division, Registration No. 899988
- (2) The EUT, peripherals were put on the turntable which table size is 1m x 1.5 m, table high 0.8 m. All set up is according to ANSI C63.10-2013.
- (3) The frequency spectrum from 30 MHz to 1 GHz was investigated. All readings from 30 MHz to 1 GHz are quasi-peak values with a resolution bandwidth of 120 kHz. All readings are above 1 GHz, peak values with a resolution bandwidth of 1 MHz. Measurements were made at 3 meters.
- (4) The antenna high is varied from 1 m to 4 m high to find the maximum emission for each frequency.
- (5) The antenna polarization: Vertical polarization and Horizontal polarization.

# **Block diagram of Test setup**

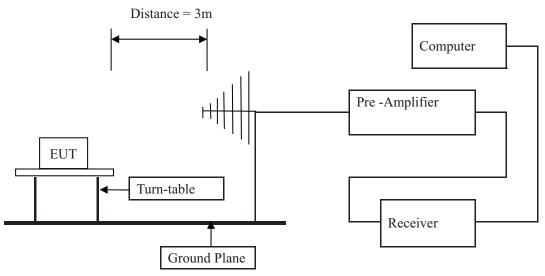

- 6.2 Configuration of The EUT
  Same as section 5.3 of this report
- 6.3 EUT Operating Condition
  Same as section 5.4 of this report.

Report No.: FCC1604200 Page 11 of 33

Date: 2016-05-04



#### 6.4 Radiated Emission Limit

All emission from a digital device, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strength specified below:

## A FCC Part 15 Subpart C Paragraph 15.249(a) Limit

Fundamental Frequency	Field Stre	Strength of Fundamental (3m)			trength of Harmo	nics (3m)
(MHz)	mV/m	dBuV/m		uV/m	dBu	V/m
2400-2483.5	50	94 (Average)	114 (Peak)	500	54 (Average)	74 (Peak)

Note:

- 1. RF Field Strength  $(dBuV) = 20 \log RF \text{ Voltage } (uV)$
- 2.Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system.
- 3. The emission limit in this paragraph is based on measurement instrumentation employing an average detector.

# B. Frequencies in restricted band are complied to limit on Paragraph 15.209.

Frequency Range (MHz)	Distance (m)	Field strength (dB µ V/m)
30-88	3	40.0
88-216	3	43.5
216-960	3	46.0
Above 960	3	54.0

Note:

- 1. RF Voltage (dBuV) = 20 log RF Voltage (uV)
- 2. In the Above Table, the tighter limit applies at the band edges.
- 3. Distance refers to the distance in meters between the measuring instrument antenna and the EUT
- 4 All scanning using PK detector. And the final emission level was get using QP detector for frequency range from 30-1000MHz.As to 1G-18G, the final emission level got using PK. For fundamental measurement, PK detector used.

Report No.: FCC1604200 Page 12 of 33

Date: 2016-05-04



#### 6.5 Test result

# A Fundamental & Harmonics Radiated Emission Data

Product:	Wireless Mouse	Test Mode:	Keep transmitting-Low Channel
Test Item:	Fundamental Radiated Emission	Temperature:	25℃
	Data		
Test Voltage:	DC3V	Humidity:	56%
Test Result:	Pass		

Frequency	Emission PK/AV	Horiz /	Limits PK/AV	Margin
(MHz)	(dBuV/m)	Vert	(dBuV/m)	(dB)
2404	85.87(PK)	Н	114/94	-8.13
2404	85.76(PK)	V	114/94	-8.24
4818		Н	74/54	
7227		V	74/54	
9636		Н	74/54	
12045		V	74/54	
14454		Н	74/54	
16863		V	74/54	
19272		H/V	74/54	
21681		H/V	74/54	
24090		H/V	74/54	

Note: (1) PK= Peak, AV= Average

- (2) Emission Level = Reading Level + Antenna Factor + Cable Loss.
- (3)Margin=Emission-Limits
- (4)According to section 15.35(b), the peak limit is 20dB higher than the average limit
- (5) For fundamental RBW 3MHz VBW 10MHz PK detector is for PK value, RMS detector is for AV value

Report No.: FCC1604200 Page 13 of 33

Date: 2016-05-04



Product:	Wireless Mouse	Test Mode:	Keep transmitting-Middle Channel
Test Item:	Fundamental Radiated Emission	Temperature:	25℃
	Data		
Test Voltage:	DC3V	Humidity:	56%
Test Result:	Pass		

Frequency	Emission PK/AV	Horiz /	Limits PK/AV	Margin
(MHz)	(dBuV/m)	Vert	(dBuV/m)	(dB)
2441	83.98(PK)	Н	114/94	-10.02
2441	83.82(PK)	V	114/94	-10.18
4880		Н	74/54	
7320		V	74/54	
9760		Н	74/54	
12200		V	74/54	
14640		Н	74/54	
17080		V	74/54	
19520		H/V	74/54	
21960		H/V	74/54	
24400		H/V	74/54	

Note: (1) PK= Peak, AV= Average

- (2) Emission Level = Reading Level + Antenna Factor + Cable Loss.
- (3)Margin=Emission-Limits
- (4)According to section 15.35(b), the peak limit is 20dB higher than the average limit
- (5) For fundamental RBW 3MHz VBW 10MHz PK detector is for PK value ,  $\,$  RMS detector is for AV value

Report No.: FCC1604200 Page 14 of 33

Date: 2016-05-04



Product:	Wireless Mouse	Test Mode:	Keep transmitting-High Channel
Test Item:	Fundamental Radiated Emission	Temperature:	25℃
	Data		
Test Voltage:	DC3V	Humidity:	56%
Test Result:	Pass		

Frequency	Emission PK/AV	Horiz /	Limits PK/AV	Margin
(MHz)	(dBuV/m)	Vert	(dBuV/m)	(dB)
2478	83.86(PK)	Н	114/94	-10.14
2478	83.22(PK)	V	114/94	-10.78
4952		Н	74/54	
7428		V	74/54	
9904		Н	74/54	
12380		V	74/54	
14856		Н	74/54	
17332		V	74/54	
19808		H/V	74/54	
22284		H/V	74/54	
24760		H/V	74/54	

Note: (1) PK= Peak, AV= Average

- (2) Emission Level = Reading Level + Antenna Factor + Cable Loss.
- (3)Margin=Emission-Limits
- (4)According to section 15.35(b), the peak limit is 20dB higher than the average limit
- (5) For fundamental RBW 3MHz VBW 10MHz PK detector is for PK value ,  $\,$  RMS detector is for AV value

Date: 2016-05-04




Please refer to the following test plots for details: Low Channel

#### Horizontal



# Vertical

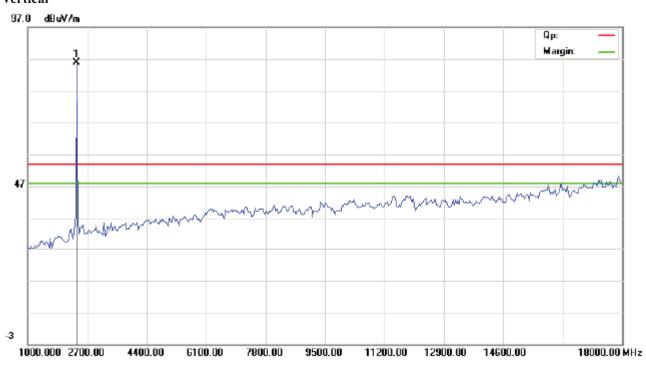

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

Date: 2016-05-04



Please refer to the following test plots for details: Middle Channel

#### Horizontal



# Vertical



The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

Date: 2016-05-04




Please refer to the following test plots for details: High Channel

#### Horizontal



#### Vertical

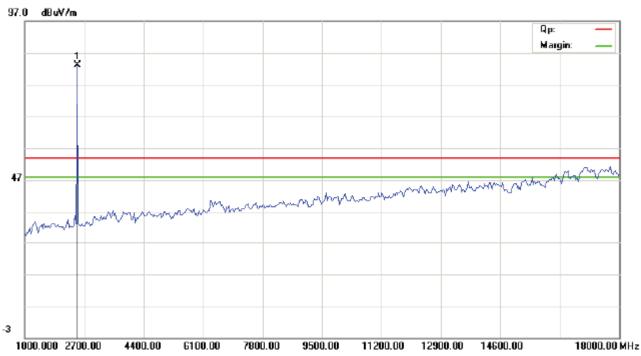

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

Date: 2016-05-04




# B. General Radiated Emission Data Radiated Emission In Horizontal (30MHz----1000MHz)

EUT set Condition: Keep Tx transmitting

Results: Pass

Please refer to following diagram for individual

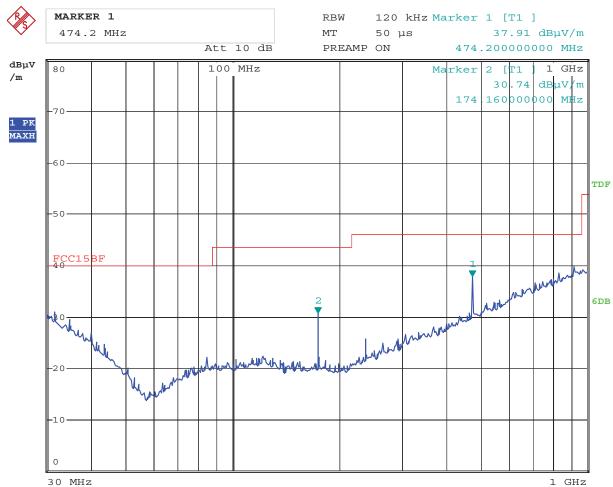

Date: 23.APR.2016 14:22:01

Frequency (MHz)	Frequency (MHz) Level@3m (dB \( \mu \) V/m)		Limit@3m (dB \u03b4 V/m)		
474.200	37.91	Н	46.00		
174.160	30.74	Н	43.50		

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

Date: 2016-05-04




# Radiated Emission In Vertical (30MHz----1000MHz)

EUT set Condition: Keep Tx transmitting

#### Results: Pass

Please refer to following diagram for individual

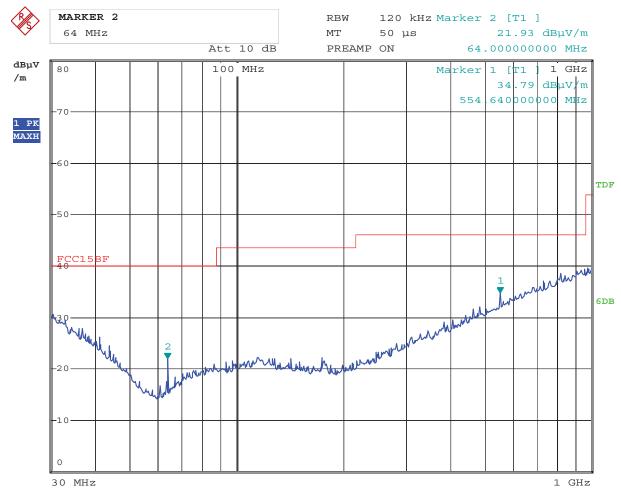

Date: 23.APR.2016 14:17:17

Frequency (MHz)	Level@3m (dB $\mu$ V/m)	Antenna Polarity	Limit@3m (dB \u03b4 V/m)
64.000	21.93	V	40.00
554.640	34.79	V	46.00

Page 20 of 33

Report No.: FCC1604200

Date: 2016-05-04




# 7. Band Edge

#### 7.1 Test Method and test Procedure:

- (1) The EUT was tested according to ANSI C63.10–2013. The radiated test was performed at Timeway EMC Laboratory. This site is on file with the FCC laboratory division, Registration No. 899988
- (2) Set Spectrum as RBW=1MHz,VBW=3MHz and Peak detector used
- (3) The antenna high is varied from 1 m to 4 m high to find the maximum emission for each frequency.
- (4) The antenna polarization: Vertical polarization and Horizontal polarization.

# 7. 2 Radiated Test Setup

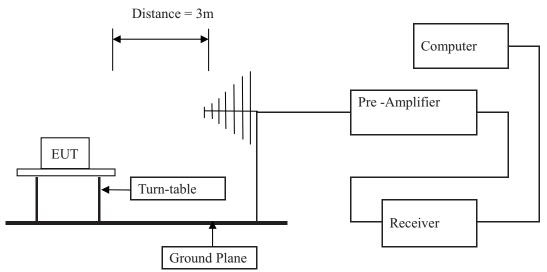

For the actual test configuration, please refer to the related items – Photos of Testing

# 7.3 Configuration of The EUT

Same as section 5.3 of this report

# 7.4 EUT Operating Condition

Same as section 5.4 of this report.

#### 7.5 Band Edge Limit

Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in Section 15.209, whichever is the lesser attenuation.

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

Page 21 of 33

Report No.: FCC1604200

Date: 2016-05-04



### 7.6 Test Result

Product:	Wire	eless Mouse	Polarity	Horizontal
Mode	Keepin	g Transmitting	Test Voltage	DC3V
Temperature	24	4 deg. C,	Humidity	56% RH
Test Result:		Pass		
2400MHz	PK (dBμV/m) 42.56		Limit	$74~dB\mu V/m$
2400MHz	AV (dBμV/m)	(dBμV/m)		$54 \text{ dB}\mu\text{V/m}$
2390 MHz	PK (dBμV/m) 38.11		Limit	$74~dB\mu V/m$
2390 MHz	AV (dBμV/m)	(dBμV/m)		$54~dB\mu V/m$

Product:	Wire	eless Mouse	Detector	Vertical			
Mode	Keeping	g Transmitting	Test Voltage	DC3V			
Temperature	24	4 deg. C,	Humidity	56% RH			
Test Result:		Pass					
2400MHz	PK (dBμV/m)	41.90	Limit	$74~dB\mu V/m$			
2400MHz	AV (dBμV/m)		Limit	$54~dB\mu V/m$			
2390 MHz	PK (dBμV/m)	37.88	Limit	74 dBμV/m			
2390 MHz	AV (dBμV/m)		Limit	54 dBμV/m			

Product:	Wire	eless Mouse	Polarity	Horizontal
Mode	Keeping	g Transmitting	Test Voltage	DC3V
Temperature	24	4 deg. C,	Humidity	56% RH
Test Result:	Pass			
2483.5MHz	PK (dBμV/m)	PK (dBμV/m) 42.56		$74~dB\mu V/m$
2483.5MHz	AV (dBμV/m)		Limit	$54~dB\mu V/m$

Product:	Wir	eless Mouse	Detector	Vertical
Mode	Keepin	g Transmitting	Test Voltage	DC3V
Temperature	2	4 deg. C,	Humidity	56% RH
Test Result:	Pass			
2483.5MHz	PK (dBμV/m)	42.72	Limit	$74~dB\mu V/m$
2483.5MHz	AV (dBμV/m)		Limit	54 dBμV/m

Note: The PK emission level less than the AV limit. No necessary to record the AV emission level.

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

Report No.: FCC1604200 Page 22 of 33

Date: 2016-05-04



#### 8.0 Antenna Requirement

#### **Applicable Standard**

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

This product has a PCB antenna. The antenna gain is -0.61dBi Max. It fulfills the requirement of this section. Test Result: Pass

Page 23 of 33

Report No.: FCC1604200



Product: Wireless Mouse					Test Mode:		Keep tran	smitting	
Mode	Keeping Transmitting			Т	Test Voltage		DC:	3V	
Temperature		deg. C,		-	Humidity		56%	RH	
Test Result:		Pass			Detector		PF	ζ	
20dB Bandwidth	2	.22MHz							
<u> </u>	Marker 1	. [T1 ndE	3]	RBW	100 kH	Iz Ri	7 Att	20 dB	
Ref Lvl	ndB	20.00	dB	VBW	300 kF	Ιz			
10 dBm	BW 2.	22444890	MHz	SWT	5 ms	s Uı	nit	dBm	ı
10					<b>v</b> <sub>1</sub>	[T1]	-11	07 dBm	
							2.40405	511 GHz	I
0					ndB		20	.00 dB	
					BW		2.22444	890 MHz	
-10					$\nabla_{\mathrm{T1}}$	[T1]	-31		1
		$\wedge$		. ^	$\bigvee$	[mal]		293 GHz	
-20		/`		<u> </u>	172	[T1]	2.40518	.15 dBm	
1MAX	TA	√			\ \hat{\pi}	T2	2.10310	, 5 , GIIZ	11
-30	ممسر								
-40							m	· · · · · · · · · · · · · · · · · · ·	
-50									
-60									
-70									
-80									
-90									×
Center 2.40	4 GHz		500 kHz	/			Spa	n 5 MHz	

Page 24 of 33

Report No.: FCC1604200



Mode   Keeping Transmitting   Test Voltage   DC3V	Product:		Wireless Mouse				Test Mode:		Keep trai	nsmitting	
Test Result:  20dB Bandwidth  2.32MHz   Marker 1 [T1 ndB] RBW 100 kHz RF Att 20 dB ndB 20.00 dB VBW 300 kHz SWT 5 ms Unit dBm  10 V1 [T1] -17.44 dBm  2.444104509 GHz  10 dBm BW 2.32464930 MHz SWT 5 ms Unit dBm  2.44936 MHz 2.32464930 MHz VT SWT SWT SWT SWT SWT SWT SWT SWT SWT SW	Mode		Keeping Transmitting			7	Test Voltage		DC3V		
20dB Bandwidth	Temperature	;	2	24 deg. C,			Humidity		56%	RH	
Marker 1 [T1 ndB] RBW 100 kHz RF Att 20 dB  Ref Lvl ndB 20.00 dB VBW 300 kHz  10 dBm BW 2.32464930 MHz SWT 5 ms Unit dBm    T1	Test Result:			Pass			Detector		P	K	
Ref Lv1 ndB 20.00 dB VBW 300 kHz  10 dBm BW 2.32464930 MHz SWT 5 ms Unit dBm  V1 [T1] -11.44 dBm 2.44104509 GHz  10 ndB 20.00 dB BW 2.32464930 MHz  2.4398279 GHz  -10 2.4398279 GHz  -20 1MAX T3  -30 T2  Center 2.441 GHz 500 kHz/ Span 5 MHz	20dB Bandwic	lth	2	2.32MHz					-	-	
10 dBm BW 2.32464930 MHz SWT 5 ms Unit dBm  V1 [T1]	(F)		Marker			RBW	100 k	Hz R	F Att	20 dB	
T1 [T1] -13.44 dBm 2.44104509 GHz 2.000 dB BW 2.32464930 MHz 2.43989279 GHz 2.43989279 GHz 2.43989279 GHz 2.44221743 GHz 1MA  -10	•										
T1 [T1] -11.44 dBm 2.44104509 GHz 2.44104509 GHz 2.32464930 MHz  T1		m	BW 2	2.324649	930 MHz	SWT	5 π	ns U	nit	dBm	ı
2.44104509 GHz  ndB 20.00 dB  BW 2.3246930 MHz  -3.34 dBm  2.43983279 GHz  -70  1MAX  -10  1MAX  -10  1MAX  -20  1MAX  -30  -40  -50  -60  -70  -80  Center 2.441 GHz  500 kHz/  Span 5 MHz	10						<b>V</b> <sub>1</sub>	[T1]	-11	.44 dBm	7
-10 -10 -10 -10 -10 -20 -20 -20 -20 -20 -20 -20 -20 -20 -2									2.44104	509 GHz	A
-10 -20 -20 -20 -20 -31.07 dBn -3	0						ndI	8	20	.00 dB	
2.43989279 GHz -31.07 dBm 2.44221743 GHz  1MAX -30 -40 -60 -70 -80 -90 Center 2.441 GHz 500 kHz/ Span 5 MHz									2.32464		
-20 IMAX	-10				,,,,	1	V <sub>T</sub> :	[T1]			
2.44221743 GH2  1MAX  -30  -40  -60  -70  -80  Center 2.441 GHz  500 kHz/  Span 5 MHz				/	\~~\	$\sim$	<b>→</b>				
-30 -40 -50 -60 -70 -80 -90 Center 2.441 GHz 500 kHz/ Span 5 MHz	-20			\	V		V T	2 [TI]			
-40 -50 -60 -70 -80 -90 Center 2.441 GHz 500 kHz/ Span 5 MHz	1MAX			مركم					2.44221	.743 GHZ	1MA
-40 -50 -60 -70 -80 -90 Center 2.441 GHz 500 kHz/ Span 5 MHz	2.0		т1/					T2			
-50 -60 -70 -80 -90 Center 2.441 GHz 500 kHz/ Span 5 MHz	- 3 0		7								
-50 -60 -70 -80 -90 Center 2.441 GHz 500 kHz/ Span 5 MHz	-40										
-60 -70 -80 -90 Center 2.441 GHz 500 kHz/ Span 5 MHz	40	/~~	ممس						/~~		
-70 -80 -90 Center 2.441 GHz 500 kHz/ Span 5 MHz	-50	<u>'</u>							Variation 1	~~~	
-70 -80 -90 Center 2.441 GHz 500 kHz/ Span 5 MHz											
-70 -80 -90 Center 2.441 GHz 500 kHz/ Span 5 MHz	6.0										
-80 -90 Center 2.441 GHz 500 kHz/ Span 5 MHz	- 0 0										
-80 -90 Center 2.441 GHz 500 kHz/ Span 5 MHz											
-90 Center 2.441 GHz 500 kHz/ Span 5 MHz	-70										
-90 Center 2.441 GHz 500 kHz/ Span 5 MHz											
Center 2.441 GHz 500 kHz/ Span 5 MHz	- 8 0										
Center 2.441 GHz 500 kHz/ Span 5 MHz											
	-90										
Date: 4.MAY.2016 11:09:34	Center	2.441 G	Hz		500	kHz/			Spa	an 5 MHz	
	Date:	4.MAY.20	016 11:	09:34							

Page 25 of 33

Report No.: FCC1604200



Product:	Wireless Mouse					To	est Mode:		Keep transmitting			
Mode		Keepir	ng Transmi	Transmitting			Test Voltage		DC3V			
Temperature	24 deg. C,				Humidity			56% RH				
Test Result:			]	Detector		PK						
20dB Bandwidth	2	2.34MHz										
Ř.	ľ	Marker	1 [T1 ndB]		R.	BW	100 k	Hz R	F Att	20 dI	dB	
Ref Lvl	r	ndB	20.	00 dB	V	BW	300 k					
10 dBm	F	BW 2	2.344689	58938 MHz		$T^{W}$	5 ms		Unit		3m	
10							<b>v</b> <sub>1</sub>	[T1]	-12	3.33 dE	3m	
									2.47803	507 GH	A Iz	
0							ndB	3	20	.00 dE	3	
							BW		2.34468	938 ME	[z	
-10					1		$ abla_{\mathrm{Ti}}$	[T1]	-32			
			,				$\wedge$		2.47688			
-20			\\	$\vee$		$\sim$	$\bigvee_{\mathbf{T}_{2}} \nabla_{\mathbf{T}_{2}}$	[T1]		.18 dE		
1MAX			کم				$\sim$		2.47922	745 GH	IZ 1MA	
-30		Y						V				
-40												
	~~~	ممسمو								~		
-50											~	
,												
-60												
7.0												
-70												
- 8 0											$\dashv$	
-90												
Center 2.478 GHz 500 kHz/ Span 5 MHz											Iz	
Date: 4.1	MAY.201	6 11:	12:11									

Report No.: FCC1604200 Page 26 of 33

Date: 2016-05-04




#### 10.0 FCC ID Label

#### FCC ID: ZJEST-ST291

The label must not be a stick-on paper label. The label on these products must be permanently affixed to the product and readily visible at the time of purchase and must last the expected lifetime of the equipment not be readily detachable.

#### **Mark Location:**

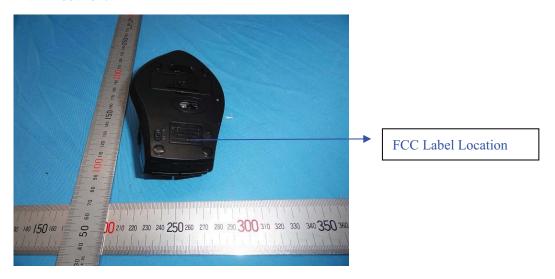

Date: 2016-05-04




#### 11.0 **Photo of testing**

#### 11.1 Conducted test View--

N/A

#### 11.2 Radiated emission test view

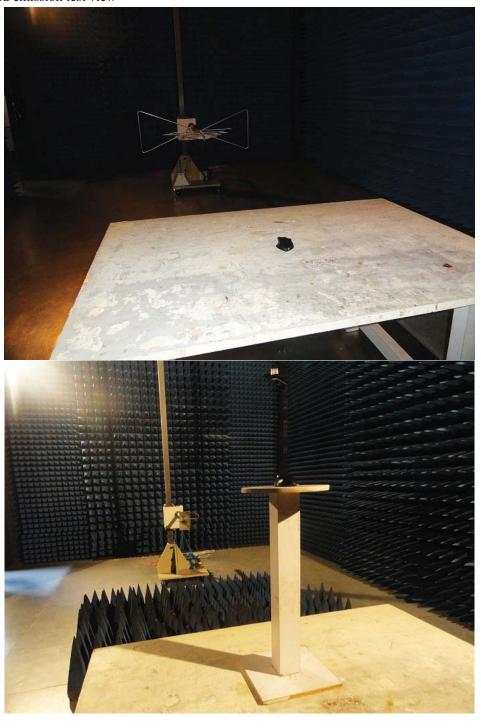

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

Date: 2016-05-04



#### 11.3 Photographs - EUT

#### Outside view





The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

Page 29 of 33

Report No.: FCC1604200

Date: 2016-05-04



Outside view





The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

Report No.: FCC1604200 Page 30 of 33



Outside view



Page 31 of 33


Report No.: FCC1604200

Date: 2016-05-04



Inside view



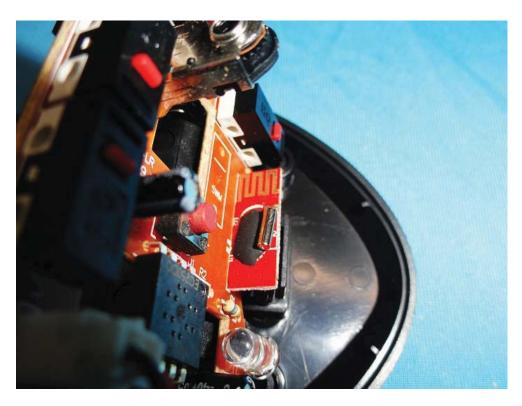

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.


Page 32 of 33


Report No.: FCC1604200

Date: 2016-05-04



Inside view

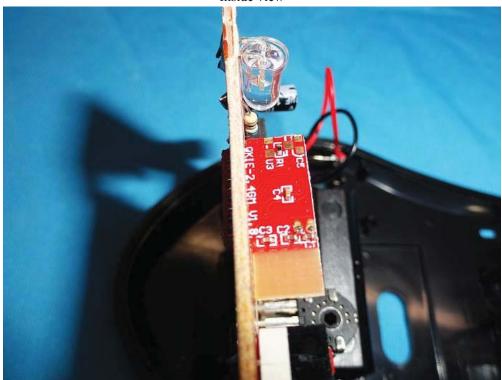

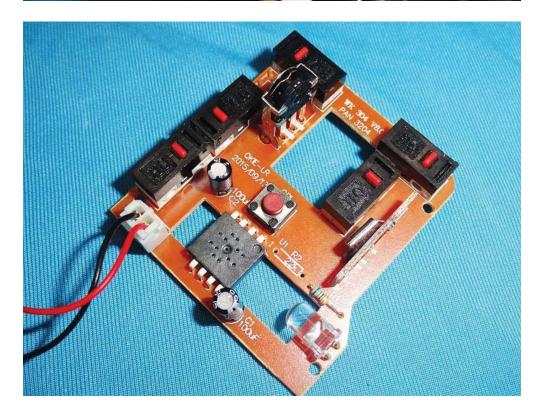

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.


In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to


adopt any other remedies which may be appropriate.

Date: 2016-05-04



Inside view

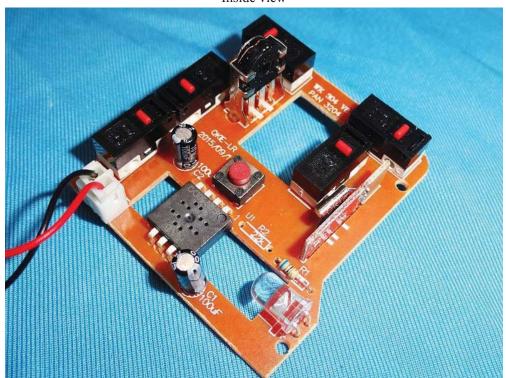

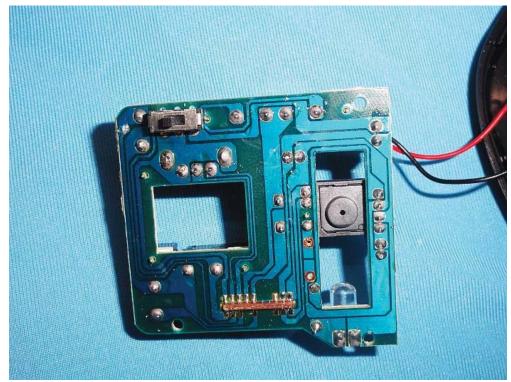

-- End of the report--

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to

adopt any other remedies which may be appropriate.