

## RF TEST REPORT

**FCC ID:2A7DX-WAVE6**

**Product Name** : Smart phone  
**Test Model** : WAVE 6C,WAVE 6  
**Brand Name** : Blackview  
**Applicant** : DOKE COMMUNICATION (HK) LIMITED  
**Address** : RM 1902 EASEY COMM BLDG 253-261 HENNESSY ROAD WANCHAI  
HK CHINA  
**Manufacturer** : Shenzhen DOKE Electronic Co., Ltd  
**Address** : 801, Building3, 7th Industrial Zone, Yulv Community, Yutang Road,  
Guangming District, Shenzhen, China.  
**Date of Receipt** : 2023.09.22  
**Date of Test** : 2023.09.22-2023.11.24  
**Issued Date** : 2023.12.04  
**Report Version** : V1.0  
**Test Sample** : Engineering Sample No.:AIT23092216-1  
**Standard(s)** : FCC Part 22H & 24E &27C Rules;  
ANSI C63.26:2015

Lab:Dongguan Yaxu (AiT) Technology Limited

Add:No.22,Jinqianling 3rd Street,Jitigang,Huangjiang,Dongguan,  
Guangdong,China

Tel.: +86-769-8202 0499

Fax.: +86-769-8202 0495

This device described above has been tested by Dongguan Yaxu (AiT) Technology Limited and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

Note: This report shall not be reproduced except in full, without the written approval of Dongguan Yaxu (AiT) Technology Limited, this document may be altered or revised by Dongguan Yaxu (AiT) Technology Limited, personal only, and shall be noted in the revision of the document. This test report must not be used by the client to claim product endorsement.

**Reviewed by:**



Simba huang

**Approved by:**



Seal Chen

# Table of Contents

<b>1. General Information .....</b>	<b>5</b>
Basic Description of Equipment Under Test .....	5
1.1 Technical Specification.....	6
<b>2. Summary of Test Results .....</b>	<b>7</b>
2.1 Application of Standard.....	7
Band4 (1710-1755MHz paired with 2110-2155MHz).....	8
Band5 (824MHz-848) .....	8
Band7 (2496-2690MHz paired with 2496-2690MHz) .....	9
Band12/17 (633-716MHz paired with 729-746 MHz) .....	10
<b>3. General Test Frequency and Configuration .....</b>	<b>13</b>
3.1 Test Modes .....	13
3.2 Test Frequency .....	13
3.3 Test Environment .....	15
3.4 Test Instruments .....	16
3.5 Measurement Uncertainty.....	17
3.6 Test Location.....	17
3.7 Deviation from Standards .....	17
3.8 Abnormalities from Standard Conditions.....	17
<b>4. Test Setup and Conditions .....</b>	<b>18</b>
4.1 Test Setup 1 .....	18
4.2 Test Setup 2.....	18
4.3 Test Setup 3.....	19
Step 1: Pre-test.....	19
Step 2: Substitution method to verify the maximum ERP/EIRP .....	19
4.4 Test Conditions .....	20
<b>5. Description of Tests.....</b>	<b>22</b>
5.1 Effective (Isotropic) Radiated Power.....	22
5.2 Peak-Average Ratio.....	23
5.3 Occupied Bandwidth .....	24

5.4	Band Edge Compliance .....	25
5.5	Spurious and Harmonic Emissions at Antenna Terminal.....	26
5.6	Field Strength of Spurious Radiation .....	27
5.7	Frequency Stability / Temperature Variation.....	37

## Revision History

Revision	Issue Date	Revisions	Revised By
V1.0	2023.12.04	Initial Issue	Seal Chen

## 1. General Information

<b>Manufacturer</b>	Shenzhen DOKE Electronic Co., Ltd
<b>Address</b>	801, Building3, 7th Industrial Zone, Yulv Community, Yutang Road, Guangming District, Shenzhen, China.
<b>Product Designation</b>	Smart phone
<b>Test Model</b>	WAVE 6C
<b>Serial model</b>	WAVE 6
<b>Brand Name</b>	Blackview
<b>Model Different</b>	The circuit principle is the same, the model name, memory size and color is different.
<b>Deviation</b>	No any deviation from the test method.
<b>Condition of Test Sample</b>	Normal
<b>Test Result</b>	Pass

Note:

For a more detailed features description, please refer to the manufacturer' s specifications or the User's Manual.

### Basic Description of Equipment Under Test

Battery	DC 3.80V 5100mAh	
Antenna Type:	FPC antenna	
Operating Temperature	-10~50℃	
Hardware Version	N/A	
Software Version	N/A	
EUT Stage	○Product Unit	●Final-Sample
Radio SystemType	LTE	
Operating Band	Band 2,Band 4,Band 5,Band 7,Band 12,Band 13,Band 17	

**Note:**

- 1.The measurement uncertainty is not included in the test result.
- 2.Antenna gain values are provided by the customer and are not claimed by the laboratory.

## 1.1 Technical Specification

Characteristics	Description	
Radio System Type	LTE	
Supported Frequency Range	LTE Band 2	Transmission (TX):1850 to 1910 MHz
		Receiving (RX):1930 to 1990 MHz
	LTE Band 4	Transmission (TX):1710 to 1755 MHz
		Receiving (RX):2110 to 2155 MHz
	LTE Band 5	Transmission (TX):824MHz-849MHz
		Receiving (RX):824MHz-849MHz
	LTE Band 7	Transmission (TX):2500 to 2570 MHz
		Receiving (RX):2620 to 2690 MHz
	LTE Band12	Transmission (TX):699 to 716 MHz
		Receiving (RX):729 to 746 MHz
TX and RX Antenna Ports	TX & RX port:	1
		0
	RX-only port:	1
ERP/EIRP TX Output Power	LTE Band 2:23.39dBm; LTE Band 4:22.29dBm; LTE Band 5:19.50dBm; LTE Band 7:23.51dBm; LTE Band 12:19.90dBm;LTE Band 13:19.20dBm; LTE Band 17:19.93dBm;	
Antenna Gain:	LTE Band 2:1.83dBm; LTE Band 4:1.58dBm; LTE Band 5:-1.29dBm; LTE Band 7:0.94dBm; LTE Band 12:-1.58dBm;LTE Band 13:-1.29dBm; LTE Band 17:-1.58dBm;	
Supported Channel Bandwidth	LTE Band 2	1.4 MHz, 3 MHz, 5 MHz,10 MHz,15 MHz, 20 MHz
	LTE Band 4	1.4 MHz, 3 MHz, 5 MHz, 10 MHz, 15 MHz, 20 MHz
	LTE Band 5	1.4 MHz, 3 MHz, 5 MHz, 10 MHz
	LTE Band 7	5 MHz, 10 MHz, 15 MHz, 20 MHz
	LTE Band12	1.4 MHz, 3 MHz, 5 MHz, 10 MHz
	LTE Band 13	5 MHz, 10 MHz
	LTE Band 17	5 MHz, 10 MHz

## 2. Summary of Test Results

### 2.1 Application of Standard

47 CFR FCC Part 2

47 CFR FCC Part 22/24/27

KDB 971168 D01 Power Meas License Digital Systems v03r01

ANSI C63.26:2015

#### Band2 (1850-1910MHz paired with 1930-1990MHz)

Test Item	FCC Rule No.	Requirements	Test Result	Verdict (Note1)
Effective (Isotropic) Radiated Power Output Data	Part 2.1046, 24.232	$EIRP \leq 2 \text{ W}$	Appendix A	Pass
Peak-Average Ratio	Part 2.1046, 24.232	Limit $\leq 13 \text{ dB}$	Appendix B	Pass
Bandwidth	Part 2.1049	OBW: No limit. EBW: No limit.	Appendix C	Pass
Band Edges Compliance	Part 2.1051, 24.238	$\leq -13 \text{ dBm}/1\% \cdot \text{EBW}$ , in 1 MHz bands immediately outside and adjacent to the frequency block.	Appendix D	Pass
Spurious Emission at Antenna Terminals	Part 2.1051, 24.238	$\leq -13 \text{ dBm}/1 \text{ MHz}$ , from 9 kHz to 10th harmonics but outside authorized operating frequency ranges.	Appendix E	Pass
Field Strength of Spurious Radiation	Part 2.1053, 24.238	$\leq -13 \text{ dBm}/1 \text{ MHz}$ .	Appendix E	Pass
Frequency Stability	Part 2.1055, 24.235	$\leq \pm 2.5 \text{ ppm}$ .	Appendix F	Pass

Note1: For the verdict, the "N/A" denotes "not applicable", the "N/T" denotes "not tested".

### Band4 (1710-1755MHz paired with 2110-2155MHz)

Test Item	FCC Rule No.	Requirements	Test Result	Verdict (Note1)
Effective(Isotropic) Radiated Power Output Data	Part 2.1046, 27.50(d)	$EIRP \leq 1W$	Appendix A	Pass
Peak-Average Ratio	Part 2.1046, 27.50(d)	Limit $\leq 13$ dB	Appendix B	Pass
Bandwidth	Part 2.1049	OBW:No limit. EBW:No limit.	Appendix C	Pass
Band Edges Compliance	Part 2.1051, 27.53(h)	$\leq -13$ dBm/1%*EBW,in1MHz bands immediately outside and adjacent to the frequency block.	Appendix D	Pass
Spurious Emission at Antenna Terminals	Part 2.1051, 27.53(h)	$\leq -13$ dBm/1MHz,from9 kHz to 10 <sup>th</sup> harmonics but out sideauthorized operating frequency ranges.	Appendix E	Pass
Field Strength of Spurious Radiation	Part 2.1053, 27.53(h)	$\leq -13$ dBm/1MHz.	Appendix E	Pass
Frequency Stability	Part 2.1055, 27.54	$\leq \pm 2.5$ ppm.	Appendix F	Pass
Note1: For the verdict, the"N/A"denotes"not applicable",the"N/T"denotes"not tested".				



### Band5 (824MHz-848)

Test Item	FCC Rule No.	Requirements	Test Result	Verdict (Note1)
Effective(Isotropic) Radiated Power Output Data	Part 2.1046, 22.913(a)	$EIRP \leq 1W$	Appendix A	Pass
Peak-Average Ratio	--	Limit $\leq 13$ dB	Appendix B	Pass
Bandwidth	Part 2.1049	OBW:No limit. EBW:No limit.	Appendix C	Pass
Band Edges Compliance	Part 2.1051, 22.917(a)	$\leq -13$ dBm/1%*EBW,in1MHz bands immediately outside and adjacent to the frequency block.	Appendix D	Pass
Spurious Emission at Antenna Terminals	Part 2.1051, 22.917(a)	$\leq -13$ dBm/1MHz,from9 kHz to 10 <sup>th</sup> harmonics but out sideauthorized operating frequency ranges.	Appendix E	Pass



Field Strength of Spurious Radiation	Part 2.1051, 22.917(a)	$\leq -13$ dBm/1MHz.	Appendix E	Pass
Frequency Stability	Part 2.1055, 22.355	$\leq \pm 2.5$ ppm.	Appendix F	Pass
Note1: For the verdict, the "N/A" denotes "not applicable", the "N/T" denotes "not tested".				

### Band7 (2496-2690MHz paired with 2496-2690MHz)

Test Item	FCC Rule No.	Requirements	Test Result	Verdict (Note1)
Effective (Isotropic) Radiated Power Output Data	Part 2.1046 27.50(h)	EIRP $\leq 2$ W	Appendix A	Pass
Peak-Average Ratio	Part 27.50(a)	Limit $\leq 13$ dB	Appendix B	Pass
Bandwidth	Part 2.1049	OBW: No limit. EBW: No limit.	Appendix C	Pass
Band Edges Compliance	Part 2.1051, 27.53(m4)	For mobile digital stations, the attenuation factor shall be not less than $40 + 10 \log (P)$ dB on all frequencies between the channel edge and 5 megahertz from the channel edge, $43 + 10 \log (P)$ dB on all frequencies between 5 megahertz and X megahertz from the channel edge, and $55 + 10 \log (P)$ dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth as defined in paragraph (m)(6) of this section.	Appendix D	Pass
Spurious Emission at Antenna Terminals	Part 2.1051, 27.53(m)		Appendix E	Pass
Field Strength of Spurious Radiation	Part 2.1053, 27.53(m)		Appendix E	Pass

Frequency Stability	Part 2.1055, 27.54	Within authorized bands of operation/frequency block.	Appendix F	Pass
Modulation Characteristics	Part 2.1047	Digital modulation	Appendix G	Pass
Note1: For the verdict, the "N/A" denotes "not applicable", the "N/T" denotes "not tested".				

### Band12/17 (633-716MHz paired with 729-746 MHz)

Test Item	FCC Rule No	Requirements	Test Result	Verdict (Note1)
Effective (Isotropic) Radiated Power Output Data	Part 27.50(c)	FCC: ERP $\leq$ 3 W.	Appendix A	Pass
Peak-Average Ratio	Part 2.1046, Part 27.50(c)	Limit $\leq$ 13 dB	Appendix B	Pass
Bandwidth	Part 2.1049	OBW: No limit. EBW: No limit.	Appendix C	Pass
Band Edges Compliance	Part 2.1051, Part 27.53(g) ,	$\leq$ -13 dBm/1%*EBW, in 1 MHz bands immediately outside and adjacent to the frequency block.	Appendix D	Pass
Spurious Emission at Antenna Terminals	Part 2.1051, 27.53(g)	FCC: $\leq$ -13 dBm/100 kHz, from 9 kHz to 10th harmonics but outside authorized operating frequency ranges.	Appendix E	Pass
Field Strength of Spurious Radiation	Part 2.1053, 27.53(g)	FCC: $\leq$ -13 dBm/100 kHz.	Appendix E	Pass
Frequency Stability	Part 2.1055 27.54	$\leq \pm 2.5$ ppm.	Appendix F	Pass
Modulation Characteristics	Part 2.1047	Digital modulation	Appendix G	Pass
Note1: For the verdict, the "N/A" denotes "not applicable", the "N/T" denotes "not tested".				

### Band13 (777 MHz -787MHz)

Test Item	FCC Rule No	Requirements	Test Result	Verdict (Note1)
Effective (Isotropic) Radiated Power Output Data	Part 2.1046, Part 27.50(b)	FCC: ERP $\leq$ 3 W.	Appendix A	Pass

Peak-Average Ratio	Part 27.50	Limit $\leq 13$ dB	Appendix B	Pass
Bandwidth	Part 2.1049	OBW: No limit. EBW: No limit.	Appendix C	Pass
Band Edges Compliance	Part 2.1051, Part 27.53(c) ,	$\leq -13$ dBm/1%*EBW, in 1 MHz bands immediately outside and adjacent to the frequency block.	Appendix D	Pass
Spurious Emission at Antenna Terminals	Part 2.1051, Part 27.53(c) Part 27.53(f)	FCC: $\leq -13$ dBm/100 kHz, from 9 kHz to 10th harmonics but outside authorized operating frequency ranges. On all frequencies between 763–775 MHz and 793–805 MHz, by a factor not less than $65 + 10 \log (P)$ dB in a 6.25 kHz band segment, for mobile and portable stations. For operations in the 746-758 MHz, 775-788 MHz, and 805-806 MHz bands, emissions in the band 1559-1610 MHz shall be limited to $-70$ dBW/MHz equivalent isotropically radiated power (EIRP) for wideband signals, and $-80$ dBW EIRP for discrete emissions of less than 700 Hz bandwidth.	Appendix E	Pass
Field Strength of Spurious Radiation	Part 2.1053, Part 27.53(c) Part 27.53(f)	FCC: $\leq -13$ dBm/100 kHz. For operations in the 746-758 MHz, 775-788 MHz, and 805-806 MHz bands, emissions in the band 1559-1610 MHz shall be limited to $-70$ dBW/MHz equivalent isotropically radiated power (EIRP) for wideband signals, and $-80$ dBW EIRP for discrete emissions of less than 700 Hz bandwidth.	Appendix E	Pass
Frequency Stability	Part 2.1055 27.54	$\leq \pm 2.5$ ppm.	Appendix F	Pass

Modulation Characteristics	Part 2.1047	Digital modulation	Appendix G	Pass
Note1: For the verdict, the "N/A" denotes "not applicable", the "N/T" denotes "not tested".				

### 3. General Test Frequency and Configuration

#### 3.1 Test Modes

Test Mode	Test Modes Description
LTE/TM1	LTE system, QPSK modulation
LTE/TM2	LTE system, 16QAM modulation

#### 3.2 Test Frequency

Test Mode	TX / RX	RF Channel		
		Low (B)	Middle (M)	High (T)
LTE Band 2	TX(1.4M)	Channel 18607	Channel 18900	Channel 19193
		1850.7 MHz	1880 MHz	1909.3 MHz
	TX(3M)	Channel 18615	Channel 18900	Channel 19185
		1851.5 MHz	1880 MHz	1908.5 MHz
	TX(5M)	Channel 18625	Channel 18900	Channel 19175
		1852.5 MHz	1880 MHz	1907.5 MHz
	TX(10M)	Channel 18650	Channel 18900	Channel 19150
		1855 MHz	1880 MHz	1905 MHz
	TX(15M)	Channel 18675	Channel 18900	Channel 19125
		1857.5 MHz	1880 MHz	1902.5 MHz
	TX(20M)	Channel 18700	Channel 18900	Channel 19100
		1860 MHz	1880 MHz	1900 MHz
Test Mode	TX / RX	RF Channel		
		Low (B)	Middle (M)	High (T)
LTE Band 4	TX(1.4M)	Channel 19957	Channel 20175	Channel 20393
		1710.7 MHz	1732.5 MHz	1754.3 MHz
	TX(3M)	Channel 19965	Channel 20175	Channel 20385
		1711.5 MHz	1732.5 MHz	1753.5 MHz
	TX(5M)	Channel 19975	Channel 20175	Channel 20375
		1712.5 MHz	1732.5 MHz	1752.5 MHz
	TX(10M)	Channel 20000	Channel 20175	Channel 20350
		1715 MHz	1732.5 MHz	1750 MHz
	TX(15M)	Channel 20025	Channel 20175	Channel 20325
		1717.5 MHz	1732.5 MHz	1747.5 MHz
	TX(20M)	Channel 20050	Channel 20175	Channel 20300
		1720 MHz	1732.5 MHz	1745 MHz

Test Mode	TX / RX	RF Channel		
		Low (B)	Middle (M)	High (T)
LTE Band 5	TX(1.4M)	Channel 20407	Channel 20525	Channel 20643
		824.7MHz	836.5MHz	848.3MHz
	TX(3M)	Channel 20415	Channel 20525	Channel 20635
		825.5MHz	836.5MHz	847.5MHz
	TX(5M)	Channel 20425	Channel 20525	Channel 20625
		826.5MHz	836.5MHz	846.5MHz
	TX(10M)	Channel 20450	Channel 20525	Channel 20600
		829MHz	836.5MHz	844MHz

Test Mode	TX / RX	RF Channel		
		Low (B)	Middle (M)	High (T)
LTE Band 7	TX(5M)	CH20775	CH21100	CH21425
		2502.5MHz	2535MHz	2567.5MHz
	TX(10M)	CH20800	CH21100	CH21400
		2505MHz	2535MHz	2565MHz
	TX(15M)	CH20825	CH21100	CH21375
		2507.5MHz	2535MHz	2562.5MHz
	TX(20M)	CH20850	CH21100	CH21350
		2510MHz	2535MHz	2560MHz

Test Mode	TX / RX	RF Channel		
		Low (B)	Middle (M)	High (T)
LTE Band 12	TX(1.4M)	Channel 23017	Channel 23095	Channel 23173
		699.7 MHz	707.5 MHz	715.3 MHz
	TX(3M)	Channel 23025	Channel 23095	Channel 23165
		700.5 MHz	707.5 MHz	714.5 MHz
	TX(5M)	Channel 23035	Channel 23095	Channel 23155
		701.5 MHz	707.5 MHz	713.5 MHz
	TX(10M)	Channel 23060	Channel 23095	Channel 23130
		704 MHz	707.5 MHz	711 MHz

Test Mode	TX / RX	RF Channel		
		Low (B)	Middle (M)	High (T)
LTE Band 13	TX(5M)	Channel 23025	Channel 23230	Channel 23255
		779.5 MHz	782 MHz	784.5 MHz
	TX(10M)	Channel 23230	Channel 23230	Channel 23230
		782 MHz	782 MHz	782 MHz

Test Mode	TX / RX	RF Channel		
		Low (B)	Middle (M)	High (T)
LTE Band 17	TX(5M)	Channel 23755	Channel 23790	Channel 23825
		706.5MHz	710MHz	713.5MHz
	TX(10M)	Channel 23780	Channel 23790	Channel 23800
		709MHz	710MHz	711MHz

### 3.3 Test Environment

Applicable to	Environmental conditions	Input Power	Tested by
Transmitter Conducted Power Output	24.5°C, 52 % RH	120Vac, 60Hz	Simba Huang
Peak-Average Ratio	24.5°C, 52 % RH	120Vac, 60Hz	Simba Huang
Modulation Characteristics	24.5°C, 52 % RH	120Vac, 60Hz	Simba Huang
Bandwidth	24.5°C, 52 % RH	120Vac, 60Hz	Simba Huang
Emission Mask	24.5°C, 52 % RH	120Vac, 60Hz	Simba Huang
Spurious Emission at Antenna Terminals	24.5°C, 53 % RH	120Vac, 60Hz	Simba Huang
Field Strength of Spurious Radiation	24.4°C, 53 % RH	120Vac, 60Hz	Simba Huang
Frequency Stability	24.5°C, 52 % RH	120Vac, 60Hz	Simba Huang

The applicant declare the operating environment of EUT as below:

Normal conditions: 3.8V DC, 15°C ~35°C

Extreme conditions: 3.42V DC~4.18V DC, -10°C ~50°C

VL= lower extreme test voltage, VN= nominal voltage, VH= upper extreme test voltage

TL= lower extreme test temperature, TN= normal temperature, TH= upper extreme test temperature

### 3.4 Test Instruments

No	Test Equipment	Manufacturer	Model No	Serial No	Cal. Date	Cal. Due Date
1	Spectrum Analyzer	R&S	FSV40	101470	2023.09.08	2024.09.07
2	EMI Measuring Receiver	R&S	ESR	101160	2023.09.08	2024.09.07
3	Low Noise Pre Amplifier	HP	HP8447E	AiT-F01319	2023.09.08	2024.09.07
4	Low Noise Pre Amplifier	Tsj	MLA-0120-A02-34	2648A04738	2023.09.08	2024.09.07
5	Passive Loop	ETS	6512	00165355	2022.09.04	2024.09.03
6	TRILOG Super Broadband test Antenna	SCHWARZBECK	VULB9160	9160-3206	2021.08.29	2024.08.28
7	Broadband Horn Antenna	SCHWARZBECK	BBHA9120D	452	2021.08.29	2024.08.28
8	SHF-EHF Horn Antenna 15-40GHz	SCHWARZBECK	BBHA9170	BBHA9170367d	2020.11.24	2023.11.23
9	EMI Test Receiver	R&S	ESCI	100124	2023.09.08	2024.09.07
10	LISN	Kyoritsu	KNW-242	8-837-4	2023.09.08	2024.09.07
11	LISN	R&S	ESH3-Z5	892785/016	2023.09.08	2024.09.07
12	Pro.Temp&Humi.chamber	MENTEK	MHP-150-1C	MAA08112501	2023.09.08	2024.09.07
13	RF Automatic Test system	MW	MW100-RFCB	21033016	2023.09.08	2024.09.07
14	Signal Generator	Agilent	N5182A	MY50143009	2023.09.08	2024.09.07
15	Wideband Radio communication tester	R&S	CMW500	1201.0002K50	2023.09.08	2024.09.07
16	RF Automatic Test system	MW	MW100-RFCB	21033016	2023.09.08	2024.09.07
17	DC power supply	ZHAOXIN	RXN-305D-2	28070002559	N/A	N/A
18	RE Software	EZ	EZ-EMC_RE	Ver.AIT-03A	N/A	N/A
19	CE Software	EZ	EZ-EMC_CE	Ver.AIT-03A	N/A	N/A
20	RF Software	MW	MTS 8310	2.0.0.0	N/A	N/A
21	temporary antenna connector(Note)	NTS	R001	N/A	N/A	N/A
22	Pulse Limiter	R&S	ESH3-Z2	03578810.54	2023.09.08	2024.09.07
23	Switch	MFJ Rhinos	MFJ-2702	CZ3457	2023.09.08	2024.09.07



Note: The temporary antenna connector is soldered on the PCB board in order to perform conducted tests and this temporary antenna connector is listed in the equipment list.

### 3.5 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT.

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of  $k=2$ .

Uncertainty	
Parameter	Uncertainty
Occupied Channel Bandwidth	$\pm 142.08\text{KHz}$
RF power conducted	$\pm 0.74\text{dB}$
Band Edge Compliance	$\pm 1.24\text{dB}$
Frequency stability	$\pm 0.12\text{ ppm}$
Spurious emissions, radiated (0.009MHz~30MHz)	3.10dB
Spurious emissions, radiated (30MHz~1GHz)	3.75dB
Spurious emissions, radiated (1GHz~18GHz)	3.88dB
Spurious emissions, radiated (18GHz ~ 40GHz)	3.88dB
Humidity	$\pm 4.0\%$
Temperature	$\pm 0.5^{\circ}\text{C}$
Time	$\pm 1.20\%$

### 3.6 Test Location

Company:	Dongguan Yaxu (AiT) Technology Limited
Address:	No.22, Jinqianling 3rd Street, Jitigang, Huangjiang,Dongguan, Guangdong, China
CNAS Registration Number:	CNAS L14158
A2LA Registration Number:	6317.01
FCC Accredited Lab. Designation Number:	CN1313
FCC Test Firm Registration Number:	703111

### 3.7 Deviation from Standards


None

### 3.8 Abnormalities from Standard Conditions


None

## 4. Test Setup and Conditions

### 4.1 Test Setup 1

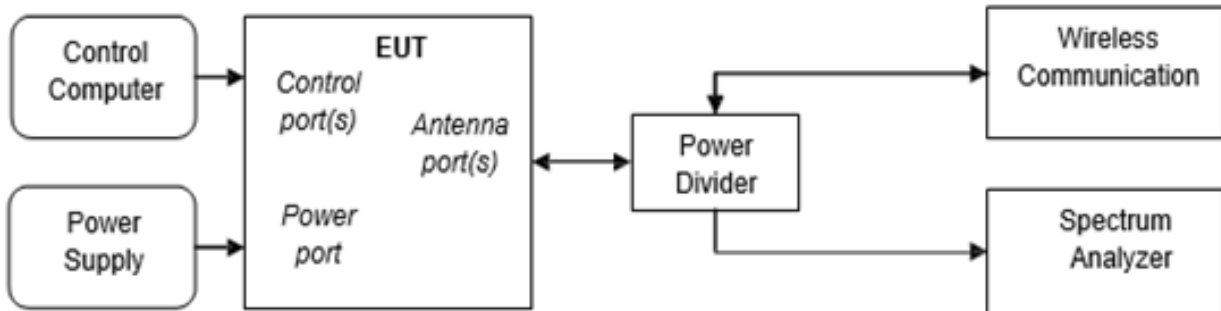


### 4.2 Test Setup 2

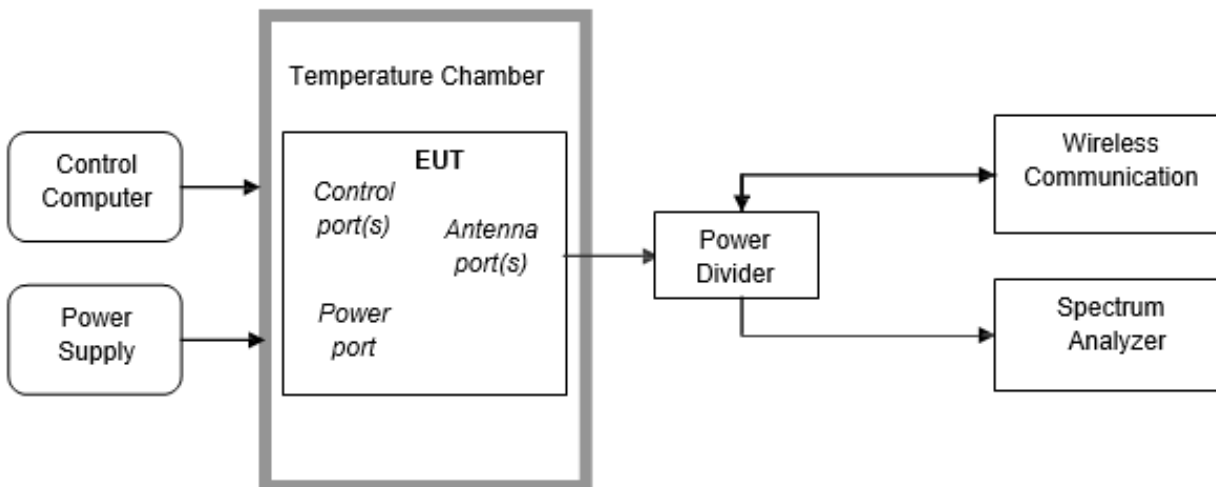


### 4.3 Test Setup 3

NOTE: Effective radiated power (ERP) and Equivalent Isotropic Radiated Power (EIRP) refers to the radiation power output of the EUT, assuming all emissions are radiated from half-wave dipole antennas.

#### Step 1: Pre-test

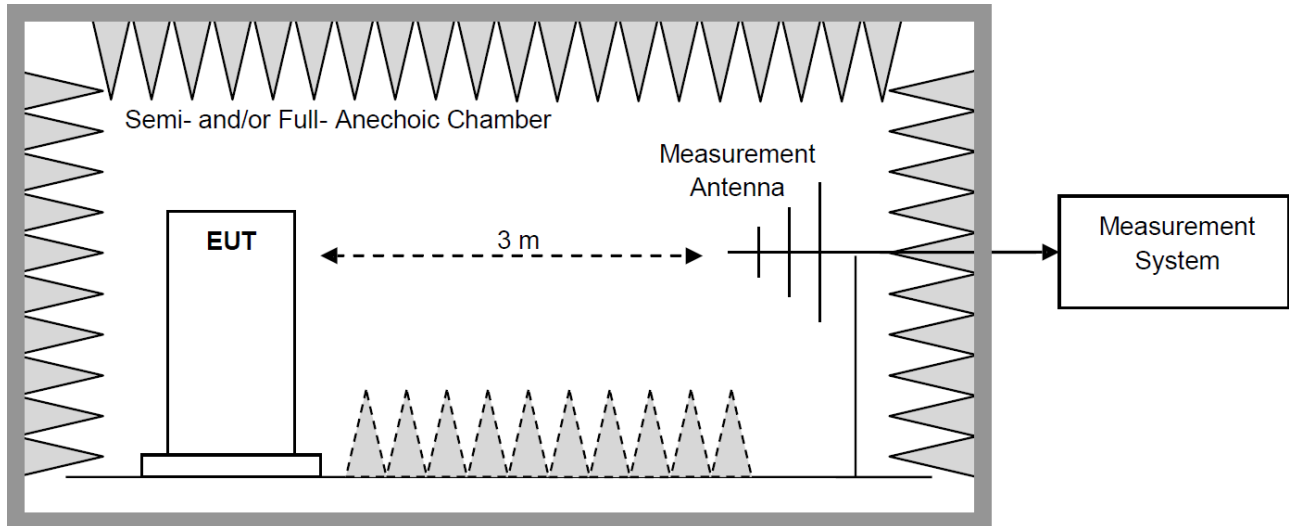

#### Step 2: Substitution method to verify the maximum ERP/EIRP

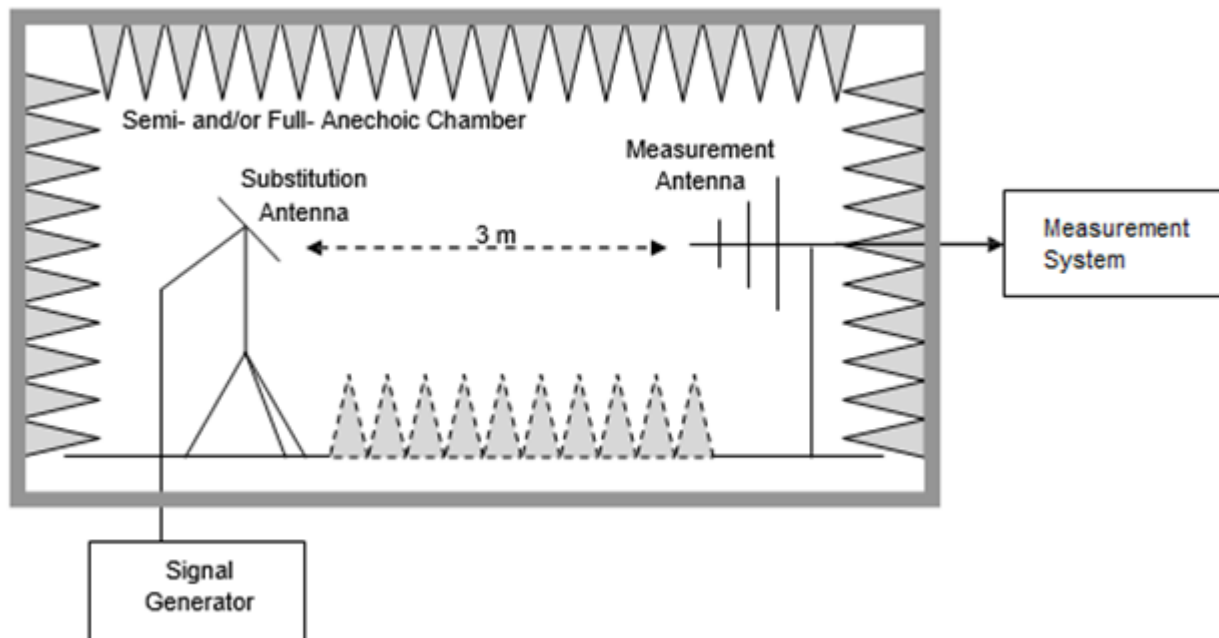

#### 4.4 Test Conditions

Test Case		Test Conditions	
Transmit Output Power Data	Average Power, Total	Test Env.	Ambient Climate & Rated Voltage
		Test Setup	Test Setup 1
		RF Channels (TX)	L, M, H (L= low channel, M= middle channel, H= high channel)
		Test Mode	LTE/TM1, LTE/TM2
	Average Power, Spectral Density (if required)	Test Env.	Ambient Climate & Rated Voltage
		Test Setup	Test Setup 1
		RF Channels (TX)	L, M, H (L= low channel, M= middle channel, H= high channel)
		Test Mode	LTE/TM1,LTE/TM2
Peak-to-Average Ratio (if required)		Test Env.	Ambient Climate & Rated Voltage
		Test Setup	Test Setup 1
		RF Channels (TX)	L, M, H (L= low channel, M= middle channel, H= high channel)
		Test Mode	LTE/TM1,LTE/TM2
Bandwidth	Occupied Bandwidth	Test Env.	Ambient Climate & Rated Voltage
		Test Setup	Test Setup 1
		RF Channels (TX)	L, M, H (L= low channel, M= middle channel, H= high channel)
		Test Mode	LTE/TM1,LTE/TM2
	Emission Bandwidth (if required)	Test Env.	Ambient Climate & Rated Voltage
		Test Setup	Test Setup 1
		RF Channels (TX)	L, M, H (L= low channel, M= middle channel, H= high channel)
		Test Mode	LTE/TM1,LTE/TM2
Band Edges Compliance		Test Env.	Ambient Climate & Rated Voltage
		Test Setup	Test Setup 1
		RF Channels (TX)	L, H (L= low channel, M= middle channel, H= high channel)
		Test Mode	LTE/TM1,LTE/TM2
Spurious Emission at AntennaTerminals		Test Env.	Ambient Climate & Rated Voltage
		Test Setup	Test Setup 1
		RF Channels (TX)	L, M, H (L= low channel, M= middle channel, H= high channel)
		Test Mode	LTE/TM1,LTE/TM2
Field Strength of SpuriousRadiation		Test Env.	Ambient Climate & Rated Voltage
		Test Setup	Test Setup 3
		RF Channels (TX)	L, M, H (L= low channel, M= middle channel, H= high channel)
		Test Mode	LTE/TM1, LTE/TM2 NOTE: If applicable, the EUT conf. that has maximum

		power density (based on the equivalent power level) is selected.
Frequency Stability	Test Env.	(1) -30 °C to +50 °C with step 10 °C at Rated Voltage; (2) VL, VN and VH of Rated Voltage at Ambient Climate.
	Test Setup	Test Setup 2
	RF Channels (TX)	L, M, H (L= low channel, M= middle channel, H= high channel)
	Test Mode	LTE/TM1, LTE/TM2

## 5. Description of Tests

### 5.1 Effective (Isotropic) Radiated Power

#### **Below 1GHz test procedure as below:**

- 1). The EUT was powered ON and placed on a 0.8m high table in the chamber. The antenna of the transmitter was extended to its maximum length.
- 2). The disturbance of the transmitter was maximized on the test receiver display by raising and lowering from 1m to 4m the receive antenna and by rotating through 360° the turntable. After the fundamental emission was maximized, a field strength measurement was made.
- 3). Steps 1) and 2) were performed with the EUT and the receive antenna in both vertical and horizontal polarization.
- 4). The transmitter was then removed and replaced with another antenna. The center of the antenna was approximately at the same location as the center of the transmitter.
- 5). A signal at the disturbance was fed to the substitution antenna by means of a non-radiating cable. With both the substitution and the receive antennas horizontally polarized, the receive antenna was raised and lowered to obtain a maximum reading at the test receiver. The level of the signal generator was adjusted until the measured field strength level in step 2) is obtained for this set of conditions.
- 6). The output power into the substitution antenna was then measured.
- 7). Steps 5) and 6) were repeated with both antennas polarized.
- 8). Calculate power in dBm by the following formula:  $ERP\ (dBm) = Pg(dBm) - \text{cable loss (dB)} + \text{antenna gain (dBd)}$  Where:  $Pg$  is the generator output power into the substitution antenna.

#### **Above 1GHz test procedure as below:**

- 1). Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber
- 2). Calculate power in dBm by the following formula:  $EIRP(dBm) = Pg(dBm) - \text{cable loss (dB)} + \text{antenna gain (dBi)}$   $EIRP=ERP+2.15dB$  Where:  $Pg$  is the generator output power into the substitution antenna.
- 3). Test the EUT in the lowest channel, the middle channel the Highest channel
- 4). The radiation measurements are performed in X, Y, Z axis positioning. And found the X axis positioning which it is worse case, Only the test worst case mode is recorded in the report.
- 5). Repeat above procedures until all frequencies measured was complete.

#### **Test Procedures Used**

FCC KDB 971168 D01 V03r01 ; ANSI/ C63.10

Note: Reference test setup 3

#### **Test Result**

Please refer to AIT23092216FW5\_Appendix H \_Test Data LTE - Band 2/4/5/7/12/13/17:

Appendix A

## 5.2 Peak-Average Ratio

A peak to average ratio measurement is performed at the conducted port of the EUT. For WCDMA signals, the spectrum analyzers Complementary Cumulative Distribution Function (CCDF) measurement profile is used to determine the largest deviation between the average and the peak power of the EUT in a given bandwidth. The CCDF curve shows how much time the peak waveform spends at or above a given average power level. The percent of time the signal spends at or above the level defines the probability for that particular power level. For GSM signals, an average and a peak trace are used on a spectrum analyzer to determine the largest deviation between the average and the peak power of the EUT in a bandwidth greater than the emission bandwidth. The traces are generated with the spectrum analyzer set to zero span mode.

### Test Settings

1. The signal analyzer's CCDF measurement profile is enabled
2. Frequency = carrier center frequency
3. Measurement BW > Emission bandwidth of signal
4. The signal analyzer was set to collect one million samples to generate the CCDF curve
5. The measurement interval was set depending on the type of signal analyzed. For continuous signals (>98% duty cycle), the measurement interval was set to 1ms. For burst transmissions, the spectrum analyzer is set to use an internal "RF Burst" trigger that is synced with an incoming pulse and the measurement interval is set to less than the duration of the "on time" of one burst to ensure that energy is only captured during a time in which the transmitter is operating at maximum power

### **Test Procedures Used**

FCC KDB 971168 D01 V03r01 Section 5.7.1

Note: Reference test setup 1

### **Test result**

Please refer to AIT23092216FW5\_Appendix H \_Test Data LTE - Band 2/4/5/7/12/13/17:  
Appendix B

### 5.3 Occupied Bandwidth

The occupied bandwidth, that is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission shall be measured. The transmitter output was connected to a calibrated coaxial cable, attenuator and Spectrum analyser, the other end of which was connected to a Base Station Simulator. The Base Station Simulator was set to force the EUT to its maximum power setting. The tests were performed at three frequencies (low channel, middle channel and high channel). The span of the analyzer shall be set to capture all products of the modulation process, including the emission skirts. The resolution bandwidth shall be set to as close to 1 percent of the selected span as is possible without being below 1 percent. The video bandwidth shall be set to 3 times the resolution bandwidth. Video averaging is not permitted. Where practical, a sampling detector shall be used since a peak or, peak hold, may produce a wider bandwidth than actual. The trace data points are recovered and are directly summed in linear terms. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5 percent of the total is reached and that frequency recorded. The process is repeated for the highest frequency data points. This frequency is recorded. The span between the two recorded frequencies is the occupied bandwidth.

#### Test Procedures Used:

FCC KDB 971168 D01 V03r01 Section 4.2

#### Test Settings

1. The signal analyzer's automatic bandwidth measurement capability was used to perform the 99% occupied bandwidth and the 26dB bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. RBW = 1 – 5% of the expected OBW
3. VBW  $\geq 3 \times$  RBW
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple
7. The trace was allowed to stabilize
8. If necessary, steps 2 – 7 were repeated after changing the RBW such that it would be within 1 – 5% of the 99% occupied bandwidth observed in Step 7

Note: Reference test setup 1.

#### Test Result

Please refer to AIT23092216FW5\_Appendix H \_Test Data LTE - Band 2/4/5/7/12/13/17:  
Appendix C



## 5.4 Band Edge Compliance

The transmitter output was connected to a calibrated coaxial cable, attenuator and Spectrum analyser, the other end of which was connected to a Base Station Simulator. The Base Station Simulator was set to force the EUT to its maximum power setting. The tests were performed at three frequencies (low channel and high channel). In the 1MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of 100kHz or 1% of the emission bandwidth of the fundamental emission of the transmitter may be employed. The EUT emission bandwidth is measured as the width of the signal between two points, outside of which all emission are attenuated at least 26dB below the transmitter power. The video bandwidth of the spectrum analyzer was set at thrice the resolution bandwidth. Detector Mode was set to peak or peak hold power.

### Test Procedures Used

FCC KDB 971168 D01 V03r01 Section 6.0

### Test Settings

1. Start and stop frequency were set such that the band edge would be placed in the center of the plot
2. Span was set large enough so as to capture all out of band emissions near the band edge
3. RBW > 1% of the emission bandwidth
4. VBW > 3 x RBW
5. Detector = RMS
6. Number of sweep points  $\geq 2 \times \text{Span/RBW}$
7. Trace mode = Max Hold
8. Sweep time = auto couple
9. The trace was allowed to stabilize

Note: Reference test setup 1.

### Test Result

Please refer to AIT23092216FW5\_Appendix H \_Test Data LTE - Band 2/4/5/7/12/13/17:  
Appendix D

## 5.5 Spurious and Harmonic Emissions at Antenna Terminal

The transmitter output was connected to a calibrated coaxial cable, attenuator and Spectrum analyzer, the other end of which was connected to a Base Station Simulator. The Base Station Simulator was set to force the EUT to its maximum power setting. The tests were performed at three frequencies (low channel and high channel). The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer. The spectrum is scanned from the lowest frequency generated in the equipment up to a frequency including its 10th harmonic. On any frequency outside a licensee's frequency block, the power of any emission shall be attenuated below the transmitter power (P) by at least  $43 + 10 \log(P)$  dB. Compliance with these provisions is based on the use of measurement instrumentation employing a resolution bandwidth of 1 MHz or greater. However, in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emission are attenuated at least 26 dB below the transmitter power.

### Test Procedures Used

FCC KDB 971168 D01 V03r01

#### Test Settings

1. Start frequency was set to 30MHz and stop frequency was set to at least  $10 \times$  the fundamental frequency (separated into at least two plots per channel)
2. Detector = RMS
3. Trace mode = trace average for continuous emissions, max hold for pulse emissions
4. Sweep time = auto couple
5. The trace was allowed to stabilize
6. Please see test notes below for RBW and VBW settings

Note: Reference test setup 1.

### Test Result:

Please refer to AIT23092216FW5\_Appendix H \_Test Data LTE - Band 2/4/5/7/12/13/17:  
Appendix E

## 5.6 Field Strength of Spurious Radiation

### PROVISIONS APPLICABLE:

(A) On any frequency outside a licensee's frequency block (e.g. A, D, B, etc.) within the USPCS spectrum, the power of any emission shall be attenuated below the transmitter power (P, in Watts) by at least  $43+10\log(P)$  dB. The specification that emissions shall be attenuated below the transmitter power (P) by at least  $43 + 10 \log(P)$  dB, translates in the relevant power range (1 to 0.001 W) to -13 dBm.

At 1 W the specified minimum attenuation becomes 43 dB and relative to a 30 dBm (1 W) carrier becomes a limit of -13 dBm. At 0.001 W (0 dBm) the minimum attenuation is 13 dB, which again yields a limit of -13 dBm. In this way a translation of the specification from relative to absolute terms is carried out.

(B) For specific criteria, please refer to the description in section 10.2 of the report for corresponding evaluation.

### MEASUREMENT PROCEDURE:

- 1). The EUT was placed on the top of the turntable 0.8 or 1.5 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
- 2). Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
- 3). The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
- 4). For each suspected emissions, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
- 5). Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
- 6). For emissions above 1GHz, use 1MHz VBW and RBW for peak reading. Then 1MHz RBW and 10Hz VBW for average reading in spectrum analyzer. Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.
- 7). When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum values.
- 8). If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
- 9). For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit

(that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.

10). In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High - Low scan is not required in this case.

11). For spurious emissions above 1GHz, a horn antenna is substituted in place of the EUT.

The substitute antenna is driven by a signal generator and the previously recorded signal was duplicated.

The spurious emissions is calculated by the following formula;

$$\text{Result(dBm)} = \text{Pg(dBm)} + \text{Factor(dB)}$$

$$\text{Factor(dB)} = \text{Ant Gain(dB)} - \text{Cable Loss(dB)} + \text{Power Splitter(dB)} \text{ (Above 1GHz)}$$

$$\text{Factor(dB)} = \text{Ant Gain(dB)} - \text{Cable Loss(dB)} \text{ (Below 1GHz)}$$

Where: Pg is the generator output power into the substitution antenna.

If the fundamental frequency is below 1GHz, RF output power has been converted to EIRP.

$$\text{EIRP(dBm)} = \text{ERP(dBm)} + 2.15$$

Examples of Factor parameters for testing radiation spurious:

FrequencyRange(MHz)	Factor(dB)
30-500	6.18
500-1000	9.37
1000-1500	27.56
1500-2000	28.27
2000-3000	29.45
3000-5000	30.15
5000-10000	31.26
10000-15000	32.78
15000-20000	33.99
Above 20GHz	35.04

### Test Procedures Used

FCC KDB 971168 D01 V03r01; ANSI/ C63.10

Note: Reference test setup 3.

**Test Result:**
**LTE Band 2\_TX Mode  
Low channel**

Frequency (MHz)	Polarity (H/V)	Emission Level (dBm)	Limit (dBm)	Margin (dB)
5580	V	-40.93	-13	-27.93
3720	V	-40.10	-13	-27.10
695.5	V	-48.03	-13	-35.03
412.1	V	-49.82	-13	-36.82
5580	H	-39.28	-13	-26.28
3720	H	-40.26	-13	-27.26
678.3	H	-47.69	-13	-34.69
452.1	H	-49.64	-13	-36.64

**Middle channel**

Frequency (MHz)	Polarity (H/V)	Emission Level (dBm)	Limit (dBm)	Margin (dB)
5640	V	-41.10	-13	-28.10
3760	V	-39.95	-13	-26.95
885.1	V	-48.16	-13	-35.16
618.7	V	-48.98	-13	-35.98
5640	H	-48.65	-13	-35.65
3760	H	-41.26	-13	-28.26
851.3	H	-44.28	-13	-31.28
732.5	H	-48.53	-13	-35.53

**High channel**

Frequency (MHz)	Polarity (H/V)	Emission Level (dBm)	Limit (dBm)	Margin (dB)
5700	V	-41.04	-13	-28.04
3800	V	-41.87	-13	-28.87
664.5	V	-46.46	-13	-33.46
525.8	V	-46.21	-13	-33.21
5700	H	-39.37	-13	-26.37
3800	H	-39.09	-13	-26.09
669.8	H	-47.40	-13	-34.40
574.4	H	-47.46	-13	-34.46

**LTE Band 4\_TX Mode**  
**Low channel**

Frequency (MHz)	Polarity (H/V)	Emission Level (dBm)	Limit (dBm)	Margin (dB)
5160	V	-39.17	-13	-26.17
3440	V	-39.31	-13	-26.31
745.5	V	-45.22	-13	-32.22
528.1	V	-47.68	-13	-34.68
5160	H	-38.93	-13	-25.93
3440	H	-39.24	-13	-26.24
520.5	H	-45.83	-13	-32.83
395.8	H	-43.95	-13	-30.95

**Middle channel**

Frequency (MHz)	Polarity (H/V)	Emission Level (dBm)	Limit (dBm)	Margin (dB)
5197.5	V	-38.61	-13	-25.61
3465	V	-38.56	-13	-25.56
669.4	V	-45.06	-13	-32.06
512.5	V	-47.80	-13	-34.80
5197.5	H	-38.98	-13	-25.98
3465	H	-39.73	-13	-26.73
569.4	H	-46.99	-13	-33.99
469.3	H	-45.39	-13	-32.39

**High channel**

Frequency (MHz)	Polarity (H/V)	Emission Level (dBm)	Limit (dBm)	Margin (dB)
5235	V	-39.04	-13	-26.04
3490	V	-39.38	-13	-26.38
711.1	V	-47.97	-13	-34.97
528.7	V	-47.28	-13	-34.28
5235	H	-38.29	-13	-25.29
3490	H	-37.73	-13	-24.73
612.5	H	-45.44	-13	-32.44
553.9	H	-45.79	-13	-32.79

**LTE Band 5\_TX Mode**  
**Low channel**

Frequency (MHz)	Polarity (H/V)	Emission Level (dBm)	Limit (dBm)	Margin (dB)
2487	V	-41.19	-13	-28.19
1658	V	-42.46	-13	-29.46
512.2	V	-46.34	-13	-33.34
365.5	V	-46.84	-13	-33.84
2487	H	-40.02	-13	-27.02
1658	H	-40.01	-13	-27.01
521.1	H	-45.24	-13	-32.24
336.5	H	-45.10	-13	-32.10

**Middle channel**

Frequency (MHz)	Polarity (H/V)	Emission Level (dBm)	Limit (dBm)	Margin (dB)
2509.5	V	-43.09	-13	-30.09
1673	V	-43.06	-13	-30.06
725.8	V	-46.19	-13	-33.19
616.6	V	-46.47	-13	-33.47
2509.5	H	-40.88	-13	-27.88
1673	H	-42.27	-13	-29.27
705.5	H	-45.97	-13	-32.97
558.9	H	-44.98	-13	-31.98

**High channel**

Frequency (MHz)	Polarity (H/V)	Emission Level (dBm)	Limit (dBm)	Margin (dB)
2532	V	-39.13	-13	-26.13
1688	V	-40.32	-13	-27.32
648.3	V	-46.25	-13	-33.25
482.7	V	-46.42	-13	-33.42
2532	H	-40.31	-13	-27.31
1688	H	-41.36	-13	-28.36
785.6	H	-46.58	-13	-33.58
615.7	H	-47.55	-13	-34.55

**LTE Band 7\_TX Mode**  
**Low channel**

Frequency (MHz)	Polarity (H/V)	Emission Level (dBm)	Limit (dBm)	Margin (dB)
2111.31	V	-27.38	-25	-2.38
1407.51	V	-34.44	-25	-9.44
657.99	V	-35.19	-25	-10.19
516.67	V	-32.03	-25	-7.03
2111.98	H	-26.76	-25	-1.76
1407.28	H	-34.95	-25	-9.95
713.71	H	-34.95	-25	-9.95
669.09	H	-36.64	-25	-11.64

**Middle channel**

Frequency (MHz)	Polarity (H/V)	Emission Level (dBm)	Limit (dBm)	Margin (dB)
2111.32	V	-28.13	-25	-3.13
1407.34	V	-34.65	-25	-9.65
657.37	V	-35.73	-25	-10.73
516.19	V	-32.46	-25	-7.46
2111.91	H	-26.75	-25	-1.75
1407.57	H	-34.34	-25	-9.34
713.73	H	-35.14	-25	-10.14
668.54	H	-36.59	-25	-11.59

**High channel**

Frequency (MHz)	Polarity (H/V)	Emission Level (dBm)	Limit (dBm)	Margin (dB)
2111.46	V	-27.81	-25	-2.81
1407.76	V	-34.45	-25	-9.45
657.91	V	-35.42	-25	-10.42
516.14	V	-32.09	-25	-7.09
2111.26	H	-26.35	-25	-1.35
1408.00	H	-34.94	-25	-9.94
713.65	H	-35.09	-25	-10.09
668.59	H	-36.53	-25	-11.53



**LTE Band 12\_TX Mode**  
**Low channel**

Frequency (MHz)	Polarity (H/V)	Emission Level (dBm)	Limit (dBm)	Margin (dB)
2112.0	V	-27.33	-13	-14.33
1408	V	-34.11	-13	-21.11
658.1	V	-35.56	-13	-22.56
516.9	V	-31.91	-13	-18.91
2112	H	-26.71	-13	-13.71
1408	H	-34.52	-13	-21.52
714.4	H	-35.93	-13	-22.93
669.5	H	-35.88	-13	-22.88

**Middle channel**

Frequency (MHz)	Polarity (H/V)	Emission Level (dBm)	Limit (dBm)	Margin (dB)
2122.5	V	-27.99	-13	-14.99
1415	V	-33.95	-13	-20.95
651.5	V	-34.87	-13	-21.87
512.7	V	-32.13	-13	-19.13
2122.5	H	-26.39	-13	-13.39
1415	H	-34.91	-13	-21.91
525.4	H	-35.82	-13	-22.82
498.7	H	-36.42	-13	-23.42

**High channel**

Frequency (MHz)	Polarity (H/V)	Emission Level (dBm)	Limit (dBm)	Margin (dB)
2133	V	-27.95	-13	-14.95
1422	V	-34.37	-13	-21.37
653.3	V	-35.69	-13	-22.69
592.7	V	-32.29	-13	-19.29
2133	H	-26.33	-13	-13.33
1422	H	-34.61	-13	-21.61
641.5	H	-35.26	-13	-22.26
558.3	H	-36.12	-13	-23.12

**LTE Band 12\_TX Mode**  
**Low channel**

Frequency (MHz)	Polarity (H/V)	Emission Level (dBm)	Limit (dBm)	Margin (dB)
2111.28	V	-27.73	-13	-14.73
1407.76	V	-34.63	-13	-21.63
657.25	V	-36.53	-13	-23.53
516.55	V	-32.90	-13	-19.90
2111.47	H	-27.23	-13	-14.23
1407.85	H	-34.91	-13	-21.91
714.31	H	-36.23	-13	-23.23
668.56	H	-36.26	-13	-23.26

**Middle channel**

Frequency (MHz)	Polarity (H/V)	Emission Level (dBm)	Limit (dBm)	Margin (dB)
2121.62	V	-28.86	-13	-15.86
1414.64	V	-34.02	-13	-21.02
650.86	V	-35.49	-13	-22.49
512.26	V	-32.54	-13	-19.54
2121.59	H	-26.60	-13	-13.60
1414.24	H	-35.04	-13	-22.04
525.23	H	-35.94	-13	-22.94
497.75	H	-37.16	-13	-24.16

**High channel**

Frequency (MHz)	Polarity (H/V)	Emission Level (dBm)	Limit (dBm)	Margin (dB)
2132.66	V	-28.38	-13	-15.38
1421.31	V	-34.49	-13	-21.49
653.13	V	-35.91	-13	-22.91
591.94	V	-32.67	-13	-19.67
2132.45	H	-26.79	-13	-13.79
1421.19	H	-35.09	-13	-22.09
640.86	H	-36.02	-13	-23.02
557.88	H	-36.49	-13	-23.49

### LTE Band 17\_TX Mode

#### Low channel

Frequency (MHz)	Polarity (H/V)	Emission Level (dBm)	Limit (dBm)	Margin (dB)
2487.29	V	-39.93	-13	-26.93
1658.95	V	-42.40	-13	-29.40
513.19	V	-46.11	-13	-33.11
365.93	V	-46.62	-13	-33.62
2487.05	H	-41.08	-13	-28.08
1658.10	H	-40.17	-13	-27.17
521.93	H	-44.83	-13	-31.83
337.33	H	-44.18	-13	-31.18

#### Middle channel

Frequency (MHz)	Polarity (H/V)	Emission Level (dBm)	Limit (dBm)	Margin (dB)
2509.67	V	-40.33	-13	-27.33
1673.49	V	-43.23	-13	-30.23
726.57	V	-46.36	-13	-33.36
617.53	V	-45.84	-13	-32.84
2509.83	H	-39.54	-13	-26.54
1673.61	H	-39.83	-13	-26.83
706.05	H	-45.19	-13	-32.19
559.86	H	-44.43	-13	-31.43

#### High channel

Frequency (MHz)	Polarity (H/V)	Emission Level (dBm)	Limit (dBm)	Margin (dB)
2532.79	V	-41.53	-13	-28.53
1688.89	V	-43.20	-13	-30.20
648.34	V	-46.93	-13	-33.93
482.82	V	-46.37	-13	-33.37
2532.63	H	-40.25	-13	-27.25
1688.61	H	-40.13	-13	-27.13
785.93	H	-44.88	-13	-31.88
615.98	H	-45.11	-13	-32.11

**Note:** 1. Margin (dB) = Emission Level(dBm) -Limit(dBm)

Emission Level(dBm)= Measurement Reading(dBm)+Factor(dB)

Factor(dB) = ANT Gain -Cable Loss + Power Splitter

2. The test refers to the value of Factor, please refer to the results listed in the test method in this section of the report.
3. The radiated spurious emission has been tested with maximum bandwidth QPSK modulation, resource block size 1 and resource block offset 0.
4. Below 30MHz, no spurious emission was found, and only the worst mode data above 30MHz is recorded in the report.

## 5.7 Frequency Stability / Temperature Variation

The frequency stability of the transmitter is measured by:

- a.) Temperature: The temperature is varied from -10°C to +50°C in 10°C increments using an environmental chamber.
- b.) Primary Supply Voltage: The primary supply voltage is varied from 85% to 115% of the nominal value for non hand-carried battery and AC powered equipment. For hand-carried, battery-powered equipment, primary supply voltage is reduced to the battery operating end point which shall be specified by the manufacturer. Specification – The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained within  $\pm 0.00025\%$  ( $\pm 2.5$  ppm ) of the center frequency.

Time Period and Procedure:

1. The carrier frequency of the transmitter is measured at room temperature (20°C to provide a reference).
2. The equipment is turned on in a “standby” condition for fifteen minutes before applying power to the transmitter. Measurement of the carrier frequency of the transmitter is made within one minute after applying power to the transmitter.
3. Frequency measurements are made at 10°C intervals ranging from -10°C to +50°C. A period of at least one half-hour is provided to allow stabilization of the equipment at each temperature level.

### Test Procedures Used

Frequency stability testing is performed in accordance with the guidelines of FCC KDB 971168 D01 V03r01; ANSI/ C63.10

Note: Reference test setup 2.

### Test Result

PASS

---

(END OF REPORT)