

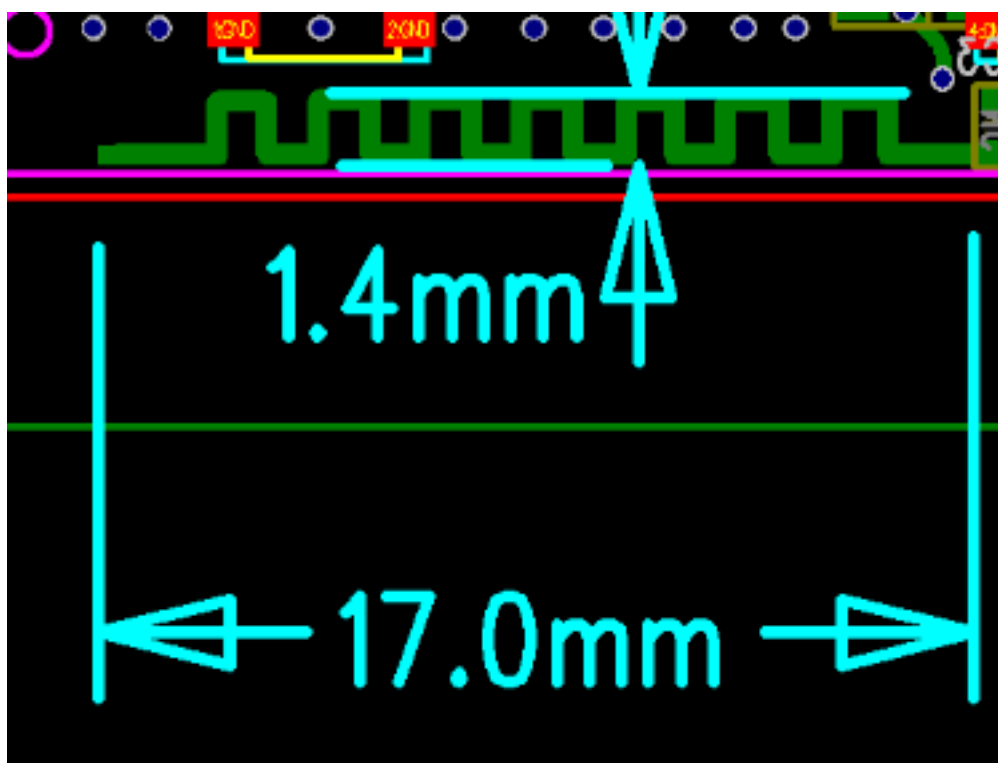


一 RFPCB：深圳市芯时代科技有限公司

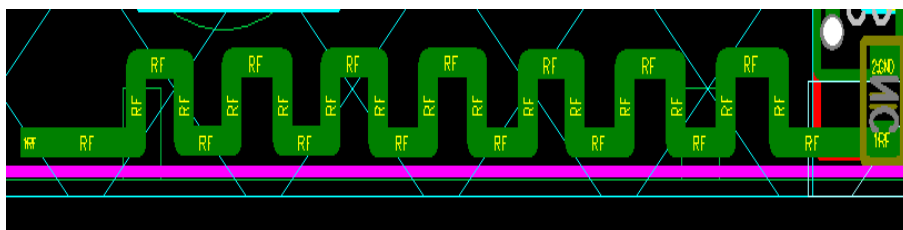


二. Return Loss

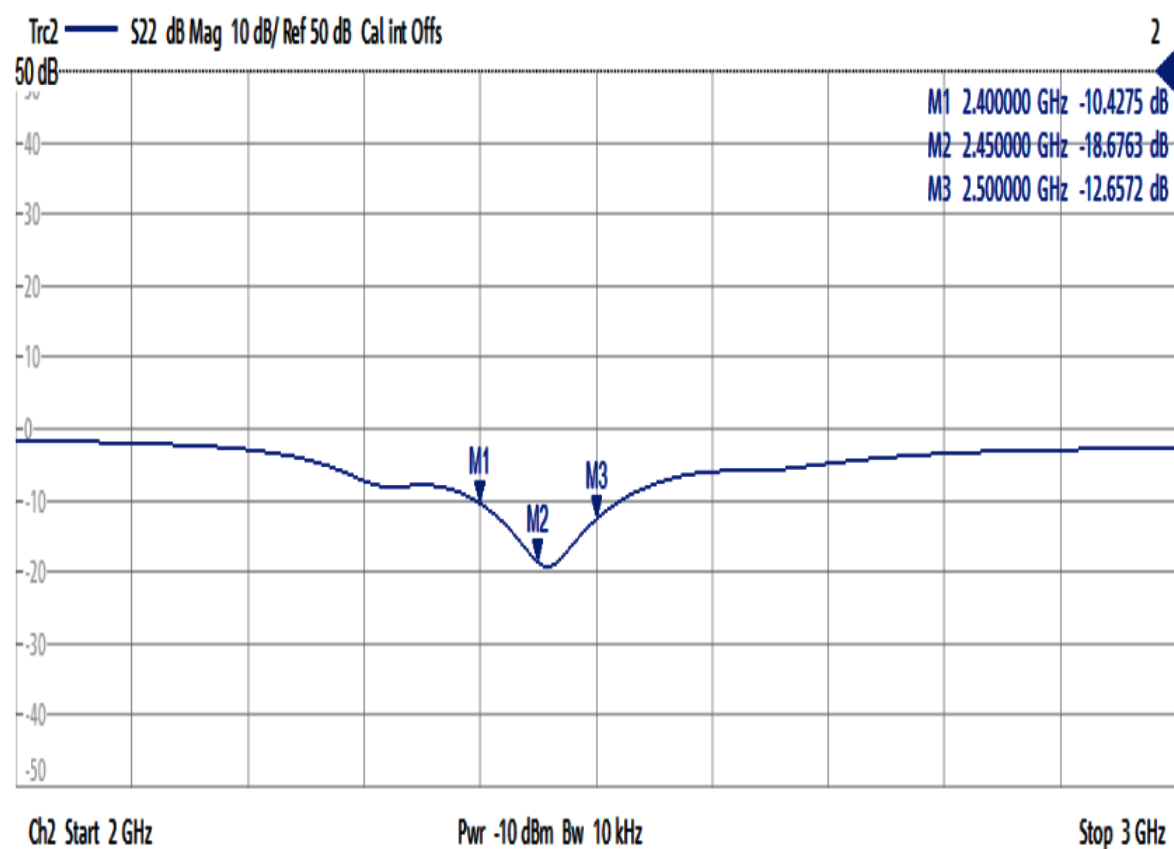

三. 2D Radiation Patterns


2400 Polar

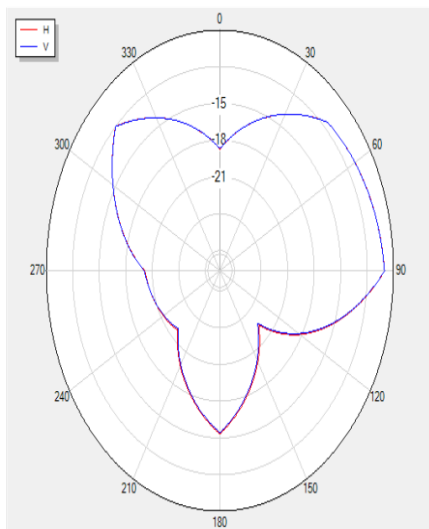

2500 Polar



2450 Polar

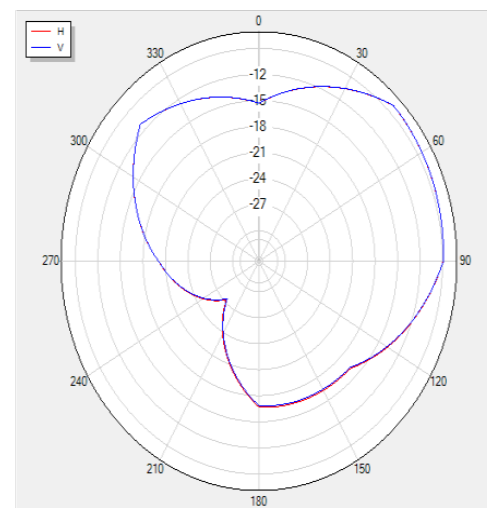

Frequency (MHz)	2400	2450	2500
Efficiency	-12.34	-10.16	-7.91
Gain	-4.04	-1.53	0.5
Percentage	5.84%	9.64%	16.19%

Standard	Band	Chan	Freq	Type	MAX	TRP/TIS
BT	BLUETOOTH	1	2403	Trp	-0.11	-4.52
BT	BLUETOOTH	37	2439	Trp	2.01	-2.44
BT	BLUETOOTH	78	2480	Trp	1.37	-3.32
BT	BLUETOOTH	1	2403	Tis_Rssi	-86.68	-78.11
BT	BLUETOOTH	37	2439	Tis_Rssi	-86.9	-78.75
BT	BLUETOOTH	78	2480	Tis_Rssi	-87.2	-79.12