

Inverted F Antenna Specification


Summary

ITEM	ANT SPEC					
Model Name	2.4G ANT					
Center Frequency	Horizontal			Vertical		
	2400MHz	2450MHz	2500MHz	2400MHz	2450MHz	2500MHz
	-1.26	-0.76	-0.58	-0.42	-0.33	0.07
MAX. Gain	0.07 dBi					
Polarization	Horizontal and Vertical					
Azimuth Beam Pattern	Omni-directional					
Impedance	50 Ohm					
Antenna Length	38.20mm					

Manufacturer: Shenzhen kenhaitong antenna technology co ,ltd

Address: 3rd floor, west of No.1 Building, Hezhou Zhongkenuo Industrial Park, Hangcheng Street, Bao'an District, Shenzhen


Antenna Photo & Length (mm)

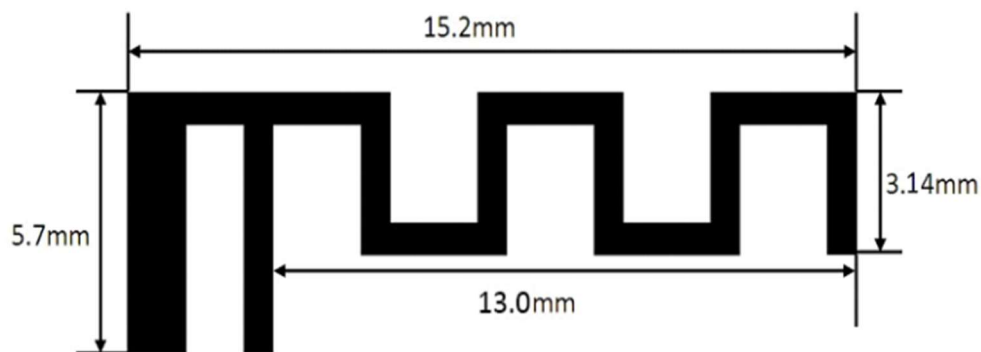

Horizontal: 2400 MHz 2450 MHz 2500 MHz

Power (dBm)

Max: 0 Min: -40 Scale: 5/div

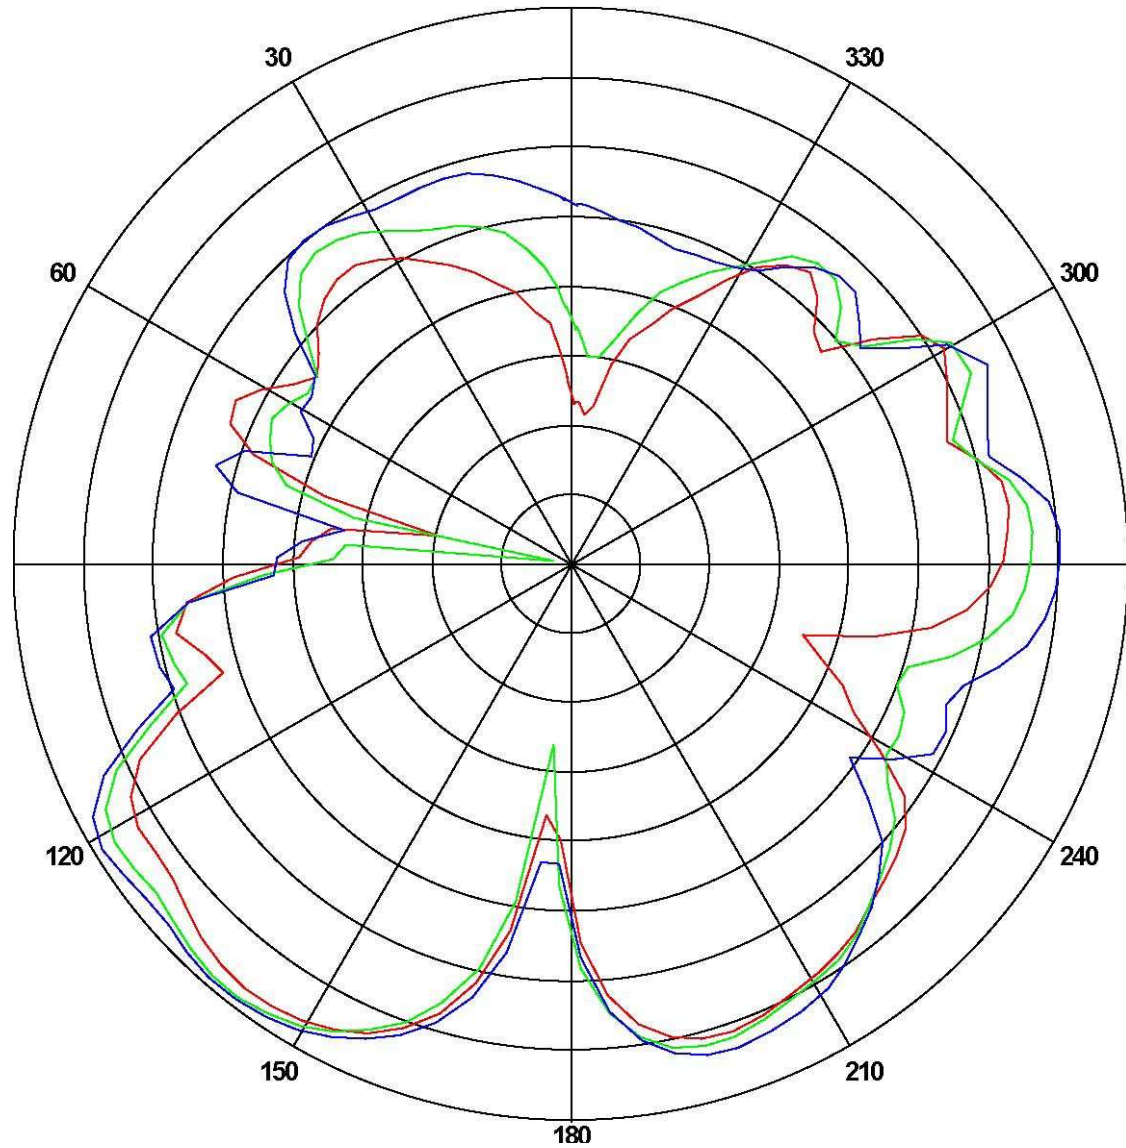


Frequency (MHz)	Gain(dBi)		
	Max	Min	Avg
2400	-1.26174	-30.0801	-7.18716
2450	-0.765802	-36.5604	-7.48023
2500	-0.585582	-22.0315	-6.59127

Vertical: 2400 MHz 2450 MHz 2500 MHz



Power (dBm)


Max: 0 Min: -30 Scale: 5/div

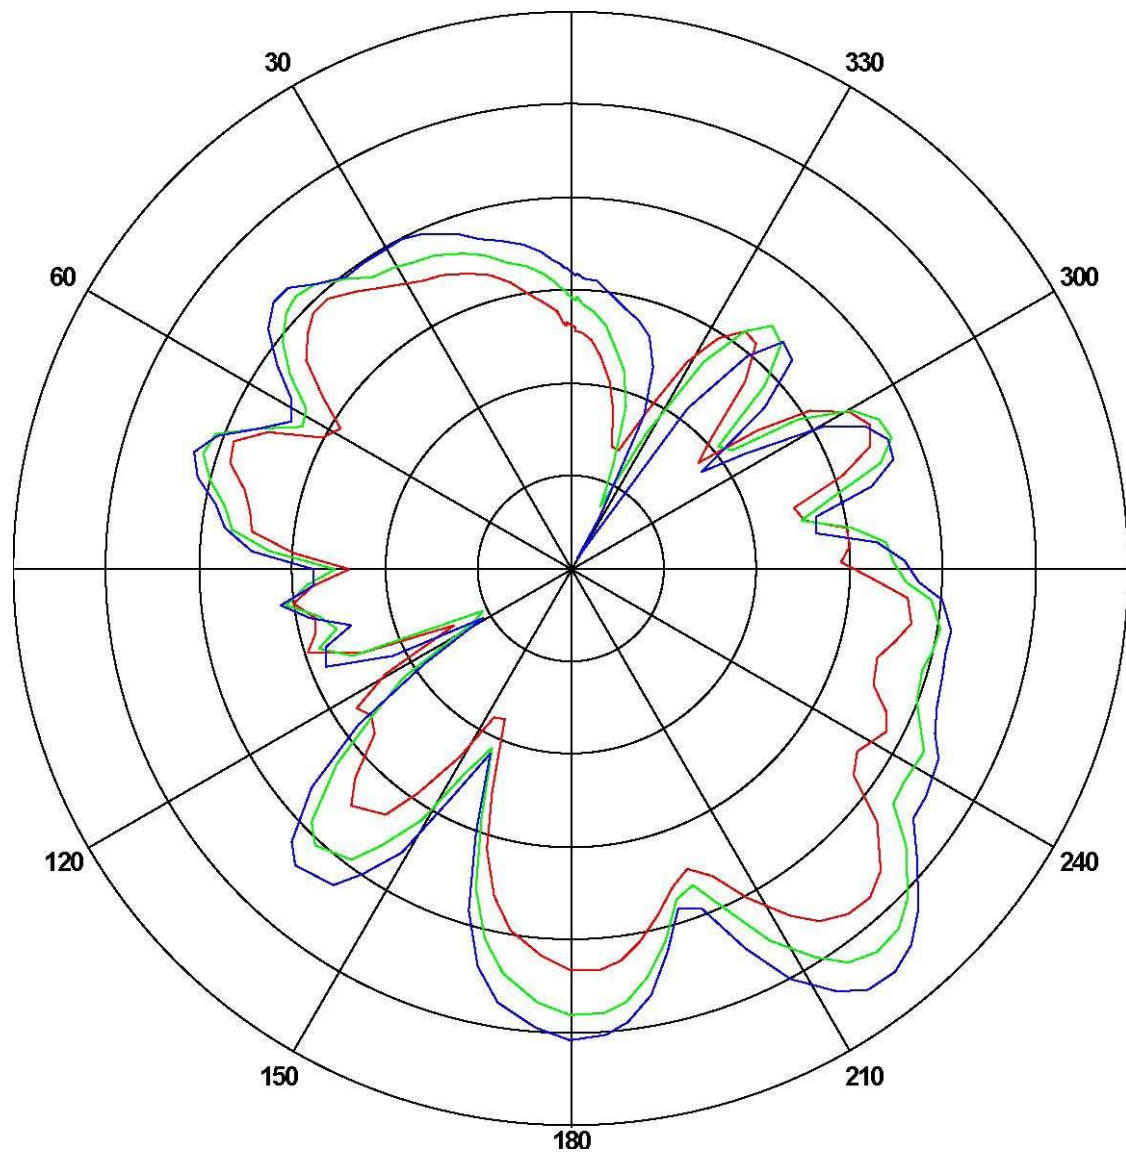

Frequency (MHz)	Gain(dBi)		
	Max	Min	Avg
2400	-0.4229	-22.1424	-12.4294
2450	-0.3355	-24.5837	-10.4702
2500	0.07660	-29.5214	-9.20432

ANT Test Labs:

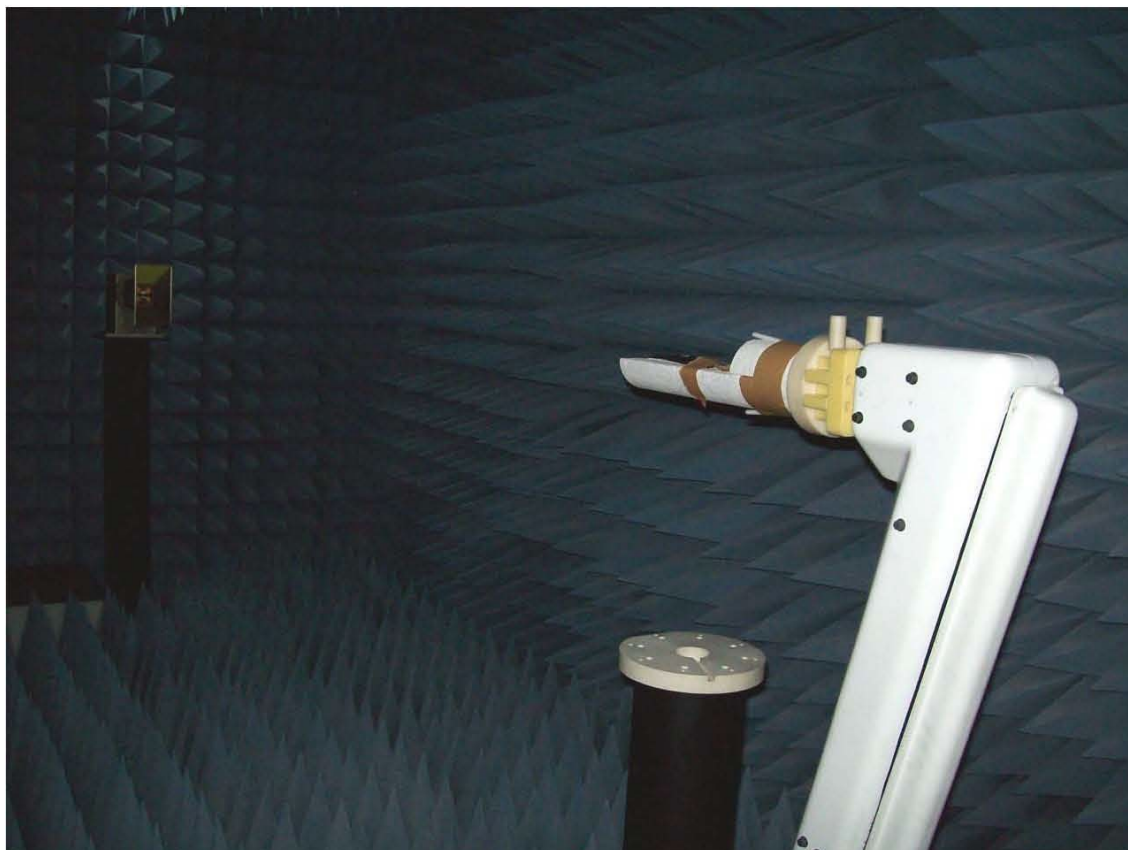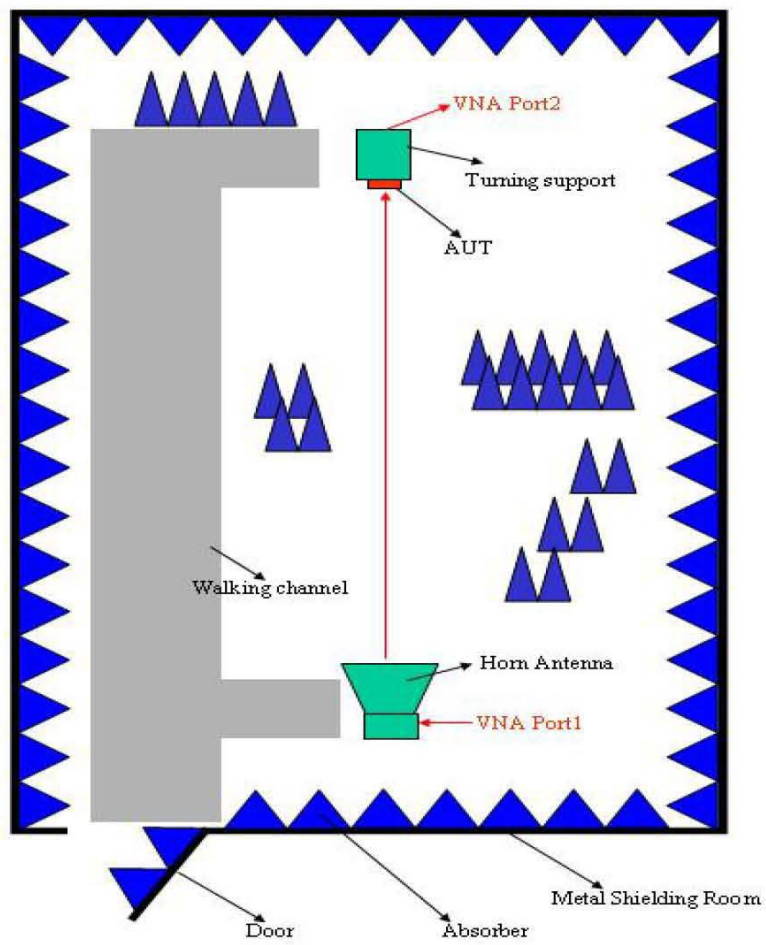

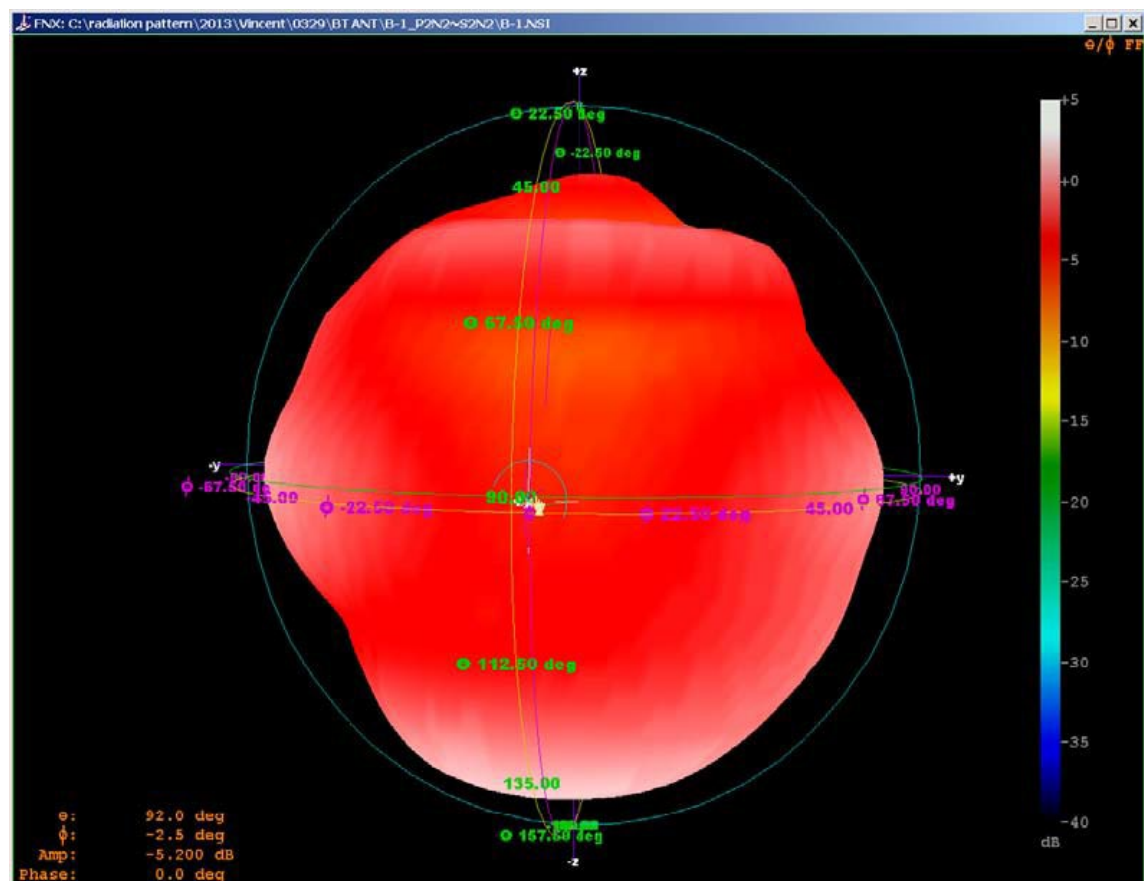

3D radiation pattern diagram