

**Table 13.26: SAR Values (WLAN 2.4G - Body)**

| Ambient Temperature: 22.6°C |     |           |               |                   | Liquid Temperature: 22.1°C |                          |                         |                         |                 |
|-----------------------------|-----|-----------|---------------|-------------------|----------------------------|--------------------------|-------------------------|-------------------------|-----------------|
| Frequency                   |     | Test Mode | Test Position | Figure No. / Note | Conducted Power (dBm)      | Max. tune-up Power (dBm) | Measured SAR(1g) (W/kg) | Reported SAR(1g) (W/kg) | Power Drift(dB) |
| MHz                         | Ch. |           |               |                   |                            |                          |                         |                         |                 |
| Test Data (10mm)            |     |           |               |                   |                            |                          |                         |                         |                 |
| 2462                        | 11  | 802.11b   | Front         | /                 | 18.28                      | 18.5                     | 0.169                   | 0.18                    | -0.13           |
| 2462                        | 11  | 802.11b   | Rear          | 28                | 18.28                      | 18.5                     | 0.421                   | 0.44                    | -0.16           |
| 2462                        | 11  | 802.11b   | Left          | /                 | 18.28                      | 18.5                     | 0.041                   | 0.04                    | -0.11           |
| 2462                        | 11  | 802.11b   | Right         | /                 | 18.28                      | 18.5                     | 0.287                   | 0.30                    | 0.05            |
| 2462                        | 11  | 802.11b   | Top           | /                 | 18.28                      | 18.5                     | 0.189                   | 0.20                    | 0.05            |

Note1: For all positions/configurations tested using the initial test position and subsequent test positions, when the reported SAR is > 0.8 W/kg, SAR is measured for these test positions/configurations on the subsequent next highest measured output power channel until the reported SAR is ≤ 1.2 W/kg or all required channels are tested.

According to the KDB248227 D01, The reported SAR must be scaled to 100% transmission duty factor to determine compliance at the maximum tune-up tolerance limit.

**Table 13.27: SAR Values (WLAN - Body) – 802.11b (Scaled Reported SAR)**

| Frequency |     | Test Position | Actual duty factor | maximum duty factor | Reported SAR (1g)(W/kg) | Scaled reported SAR (1g)(W/kg) |
|-----------|-----|---------------|--------------------|---------------------|-------------------------|--------------------------------|
| MHz       | Ch. |               |                    |                     |                         |                                |
| 2462      | 11  | Rear          | 100%               | 100%                | 0.44                    | <b>0.44</b>                    |

SAR is not required for OFDM because the 802.11b adjusted SAR ≤ 1.2 W/kg.

## 14. SAR Measurement Variability

SAR measurement variability must be assessed for each frequency band, which is determined by the SAR probe calibration point and tissue-equivalent medium used for the device measurements. When both head and body tissue-equivalent media are required for SAR measurements in a frequency band, the variability measurement procedures should be applied to the tissue medium with the highest measured SAR, using the highest measured SAR configuration for that tissue-equivalent medium.

The following procedures are applied to determine if repeated measurements are required.

- 1) Repeated measurement is not required when the original highest measured SAR is  $< 0.80$  W/kg; steps 2) through 4) do not apply.
- 2) When the original highest measured SAR is  $\geq 0.80$  W/kg, repeat that measurement once.
- 3) Perform a second repeated measurement only if the ratio of largest to smallest SAR for the original and first repeated measurements is  $> 1.20$  or when the original or repeated measurement is  $\geq 1.45$  W/kg (~ 10% from the 1-g SAR limit).
- 4) Perform a third repeated measurement only if the original, first or second repeated measurement is  $\geq 1.5$  W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is  $> 1.20$ .

**Table 14.1: SAR Measurement Variability for Body – LTE Band 4**

| Frequency |      | Test Position | Original   | 1 <sup>st</sup> Repeated | Ratio | 2 <sup>nd</sup> Repeated |
|-----------|------|---------------|------------|--------------------------|-------|--------------------------|
| MHz       | Ch.  |               | SAR (W/kg) | SAR (W/kg)               |       | SAR (W/kg)               |
| 20300     | 1745 | Bottom        | 0.822      | 0.813                    | 1.01  | /                        |

**Table 14.2: SAR Measurement Variability for Body – LTE Band 66**

| Frequency |      | Test Position | Original   | 1 <sup>st</sup> Repeated | Ratio | 2 <sup>nd</sup> Repeated |
|-----------|------|---------------|------------|--------------------------|-------|--------------------------|
| MHz       | Ch.  |               | SAR (W/kg) | SAR (W/kg)               |       | SAR (W/kg)               |
| 132322    | 1745 | Bottom        | 0.851      | 0.836                    | 1.02  | /                        |

**Table 14.3: SAR Measurement Variability for Head – WLAN 2.4G**

| Frequency |     | Test Position | Original   | 1 <sup>st</sup> Repeated | Ratio | 2 <sup>nd</sup> Repeated |
|-----------|-----|---------------|------------|--------------------------|-------|--------------------------|
| MHz       | Ch. |               | SAR (W/kg) | SAR (W/kg)               |       | SAR (W/kg)               |
| 2437      | 6   | Left Cheek    | 0.925      | 0.914                    | 1.01  | /                        |

## 15. Measurement Uncertainty

### 15.1. Measurement Uncertainty for Normal SAR Tests (300MHz~3GHz)

| No.                                                | Error Description                               | Type                                       | Uncertainty value | Probably Distribution | Div.       | (Ci) 1g      | (Ci) 10g     | Std. Unc. (1g) | Std. Unc. (10g) | Degree of freedom |
|----------------------------------------------------|-------------------------------------------------|--------------------------------------------|-------------------|-----------------------|------------|--------------|--------------|----------------|-----------------|-------------------|
| <b>Measurement system</b>                          |                                                 |                                            |                   |                       |            |              |              |                |                 |                   |
| 1                                                  | Probe calibration                               | B                                          | 12                | N                     | 2          | 1            | 1            | 6.0            | 6.0             | $\infty$          |
| 2                                                  | Axial isotropy                                  | B                                          | 4.7               | R                     | $\sqrt{3}$ | $\sqrt{0.5}$ | $\sqrt{0.5}$ | 4.3            | 4.3             | $\infty$          |
| 3                                                  | Hemispherical isotropy                          | B                                          | 9.6               | R                     | $\sqrt{3}$ | 1            | 1            | 4.8            | 4.8             | $\infty$          |
| 4                                                  | Boundary effect                                 | B                                          | 1.1               | R                     | $\sqrt{3}$ | 1            | 1            | 0.6            | 0.6             | $\infty$          |
| 5                                                  | Linearity                                       | B                                          | 4.7               | R                     | $\sqrt{3}$ | 1            | 1            | 2.7            | 2.7             | $\infty$          |
| 6                                                  | Detection limit                                 | B                                          | 1.0               | R                     | $\sqrt{3}$ | 1            | 1            | 0.6            | 0.6             | $\infty$          |
| 7                                                  | Modulation response                             | B                                          | 4.0               | R                     | $\sqrt{3}$ | 1            | 1            | 2.3            | 2.3             | $\infty$          |
| 8                                                  | Readout electronics                             | B                                          | 1.0               | N                     | 1          | 1            | 1            | 1.0            | 1.0             | $\infty$          |
| 9                                                  | Response time                                   | B                                          | 0.8               | R                     | $\sqrt{3}$ | 1            | 1            | 0.5            | 0.5             | $\infty$          |
| 10                                                 | Integration time                                | B                                          | 1.7               | R                     | $\sqrt{3}$ | 1            | 1            | 1.0            | 1.0             | $\infty$          |
| 11                                                 | RF ambient conditions-noise                     | B                                          | 3.0               | R                     | $\sqrt{3}$ | 1            | 1            | 1.7            | 1.7             | $\infty$          |
| 12                                                 | RF ambient conditions-reflection                | B                                          | 3.0               | R                     | $\sqrt{3}$ | 1            | 1            | 1.7            | 1.7             | $\infty$          |
| 13                                                 | Probe positioned mech. restrictions             | B                                          | 0.35              | R                     | $\sqrt{3}$ | 1            | 1            | 0.2            | 0.2             | $\infty$          |
| 14                                                 | Probe positioning with respect to phantom shell | B                                          | 2.9               | R                     | $\sqrt{3}$ | 1            | 1            | 1.7            | 1.7             | $\infty$          |
| 15                                                 | Post-processing                                 | B                                          | 1.0               | R                     | $\sqrt{3}$ | 1            | 1            | 0.6            | 0.6             | $\infty$          |
| <b>Test sample related</b>                         |                                                 |                                            |                   |                       |            |              |              |                |                 |                   |
| 16                                                 | Test sample positioning                         | A                                          | 3.3               | N                     | 1          | 1            | 1            | 3.3            | 3.3             | 5                 |
| 17                                                 | Device holder uncertainty                       | A                                          | 3.4               | N                     | 1          | 1            | 1            | 3.4            | 3.4             | 5                 |
| 18                                                 | Drift of output power                           | B                                          | 5.0               | R                     | $\sqrt{3}$ | 1            | 1            | 2.9            | 2.9             | $\infty$          |
| <b>Phantom and set-up</b>                          |                                                 |                                            |                   |                       |            |              |              |                |                 |                   |
| 19                                                 | Phantom uncertainty                             | B                                          | 1.0               | R                     | $\sqrt{3}$ | 1            | 1            | 0.6            | 0.6             | $\infty$          |
| 20                                                 | Liquid conductivity (target)                    | B                                          | 5.0               | R                     | $\sqrt{3}$ | 0.64         | 0.43         | 1.8            | 1.2             | $\infty$          |
| 21                                                 | Liquid conductivity (meas.)                     | A                                          | 1.3               | N                     | 1          | 0.64         | 0.43         | 0.83           | 0.56            | 9                 |
| 22                                                 | Liquid permittivity (target)                    | B                                          | 5.0               | R                     | $\sqrt{3}$ | 0.6          | 0.49         | 1.7            | 1.4             | $\infty$          |
| 23                                                 | Liquid permittivity (meas.)                     | A                                          | 1.6               | N                     | 1          | 0.6          | 0.49         | 0.96           | 0.78            | 9                 |
| Combined standard uncertainty                      |                                                 | $u_c = \sqrt{\sum_{i=1}^{23} c_i^2 u_i^2}$ |                   |                       |            |              |              | 11.3           | 11.2            | 95.5              |
| Expanded uncertainty (Confidence interval of 95 %) |                                                 | $u_e = 2u_c$                               |                   |                       |            |              |              | 22.6           | 22.4            |                   |

## 16. Main Test Instruments

**Table 16.1: List of Main Instruments**

| No. | Name                         | Type    | Serial Number | Calibration Date | Valid Period |
|-----|------------------------------|---------|---------------|------------------|--------------|
| 01  | Network analyzer             | E5071C  | MY46103759    | 2020-11-15       | One year     |
| 02  | Dielectric probe             | 85070E  | MY44300317    | /                | /            |
| 03  | Power meter                  | E4418B  | MY50000366    | 2020-12-13       | One year     |
| 04  | Power sensor                 | E9304A  | MY50000188    |                  |              |
| 05  | Power meter                  | NRP     | 101460        | 2020-01-15       | One year     |
| 06  | Power sensor                 | NRP-Z91 | 100553        |                  |              |
| 07  | Signal Generator             | E8257D  | MY47461211    | 2020-01-15       | One year     |
| 08  | Amplifier                    | VTL5400 | 0404          | /                | /            |
| 09  | E-field Probe                | EX3DV4  | 3633          | 2020-04-01       | One year     |
| 10  | DAE                          | DAE4    | 786           | 2020-03-03       | One year     |
| 11  | Dipole Validation Kit        | D750V3  | 1163          | 2019-09-03       | Three year   |
| 12  | Dipole Validation Kit        | D835V2  | 4d057         | 2018-10-09       | Three year   |
| 13  | Dipole Validation Kit        | D1750V2 | 1152          | 2019-08-30       | Three year   |
| 14  | Dipole Validation Kit        | D1900V2 | 5d088         | 2018-10-24       | Three year   |
| 15  | Dipole Validation Kit        | D2450V2 | 873           | 2018-10-26       | Three year   |
| 16  | Dipole Validation Kit        | D2550V2 | 1010          | 2018-08-24       | Three year   |
| 17  | BTS                          | E5515C  | GB46110722    | 2020-01-15       | One year     |
| 18  | Radio Communication Analyzer | MT8820C | 6201341853    | 2020-01-15       | One year     |
| 19  | Software                     | DASY5   | 52.8.8.1222   | /                | /            |

## ANNEX A: Graph Results

### GSM850 Head

Date: 2021-1-9

Electronics: DAE4 Sn786

Medium: Head 835MHz

Medium parameters used (interpolated):  $f = 836.6$  MHz;  $\sigma = 0.91$  S/m;  $\epsilon_r = 40.731$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.0°C Liquid Temperature: 21.5°C

Communication System: UID 0, GSM (0) Frequency: 836.6 MHz Duty Cycle: 1:8.3

Probe: EX3DV4 – SN3633 ConvF (9.59, 9.59, 9.59);

**Left Cheek Middle/Area Scan (61x61x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.274 W/kg

**Left Cheek Middle/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.046 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 0.333 W/kg

**SAR(1 g) = 0.265 W/kg; SAR(10 g) = 0.201 W/kg**

Maximum value of SAR (measured) = 0.304 W/kg

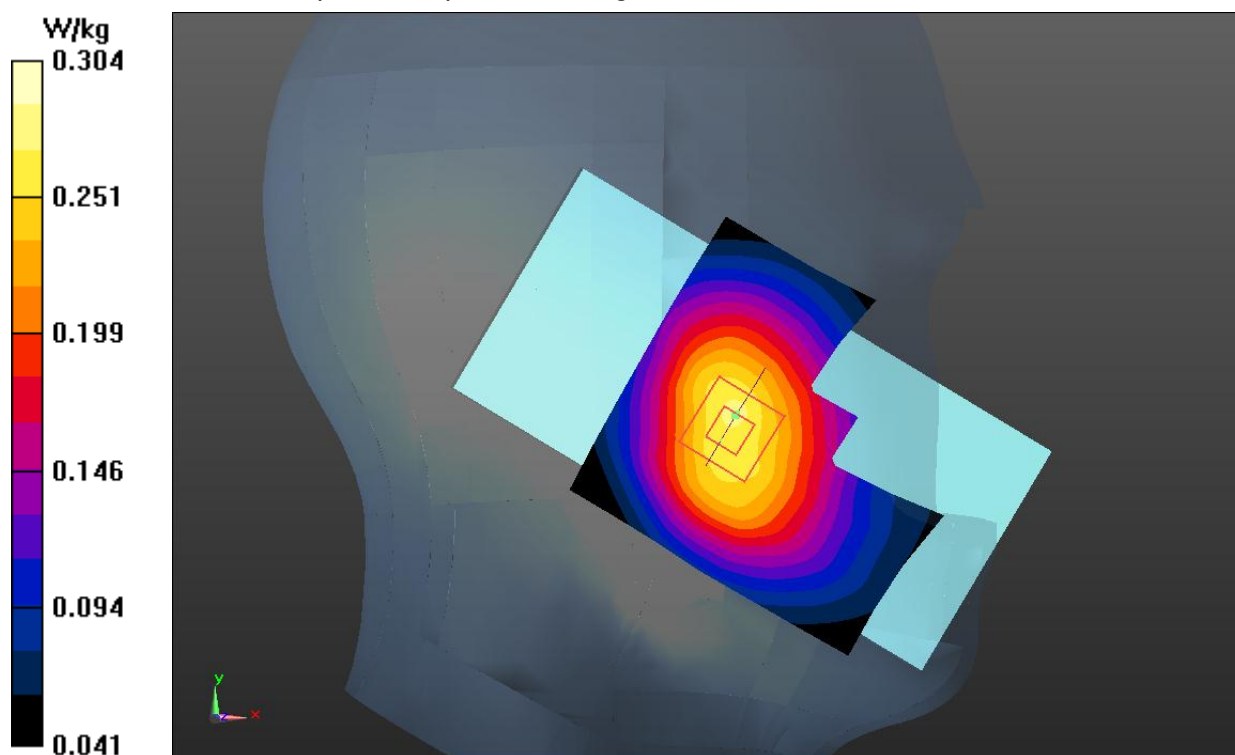


Fig.1 GSM 850 Head

### GSM850 Body

Date: 2021-1-9

Electronics: DAE4 Sn786

Medium: Head 835MHz

Medium parameters used (interpolated):  $f = 836.6$  MHz;  $\sigma = 0.91$  S/m;  $\epsilon_r = 40.731$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.0°C Liquid Temperature: 21.5°C

Communication System: UID 0, GPRS 2Txslot (0) Frequency: 836.6 MHz Duty Cycle: 1:4

Probe: EX3DV4 – SN3633 ConvF (9.59, 9.59, 9.59);

**Rear Side Middle/Area Scan (61x61x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.533 W/kg

**Rear Side Middle/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 21.80 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.603 W/kg

**SAR(1 g) = 0.481 W/kg; SAR(10 g) = 0.367 W/kg**

Maximum value of SAR (measured) = 0.529 W/kg

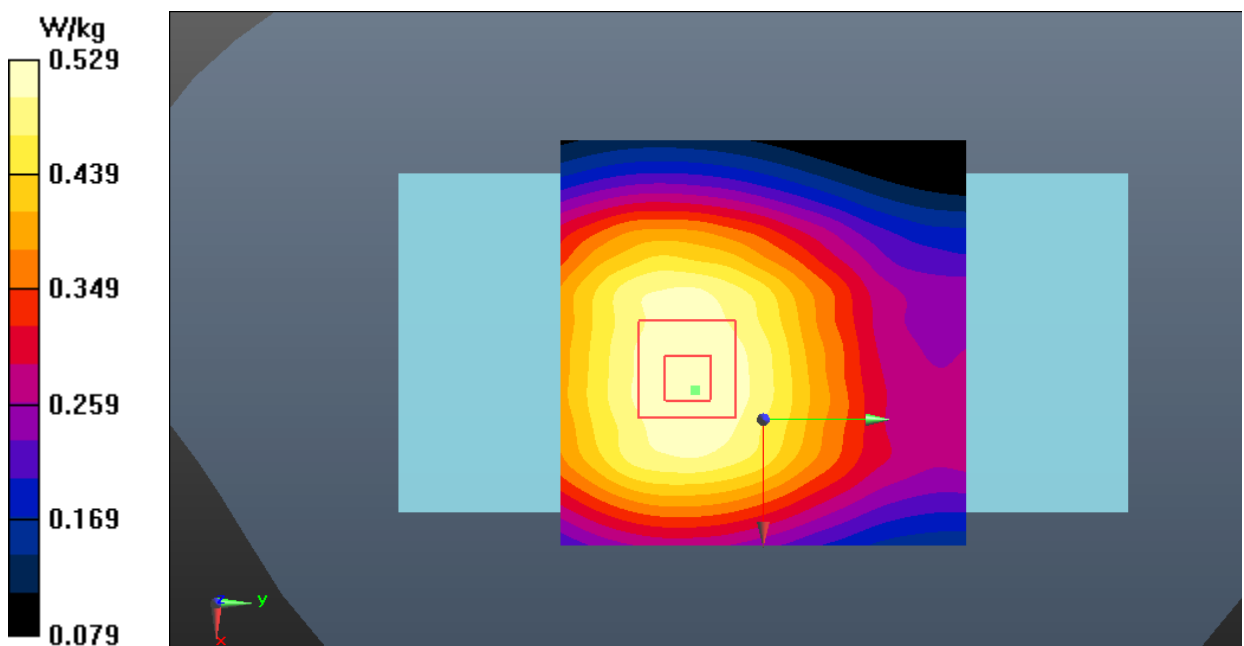


Fig.2 GSM 850 Body

# GSM1900 Head

Date: 2021-1-12

Electronics: DAE4 Sn786

Medium: Head 1900MHz

Medium parameters used:  $f = 1880 \text{ MHz}$ ;  $\sigma = 1.375 \text{ S/m}$ ;  $\epsilon_r = 40.752$ ;  $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature:  $22.0^\circ\text{C}$  Liquid Temperature:  $21.5^\circ\text{C}$

Communication System: UID 0, GSM (0) Frequency: 1880 MHz Duty Cycle: 1:8.3

Probe: EX3DV4 – SN3633 ConvF (7.76, 7.76, 7.76);

**Left Cheek Middle/Area Scan (61x61x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) =  $0.148 \text{ W/kg}$

**Left Cheek Middle/Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value =  $0.246 \text{ V/m}$ ; Power Drift =  $0.09 \text{ dB}$

Peak SAR (extrapolated) =  $0.192 \text{ W/kg}$

**SAR(1 g) =  $0.128 \text{ W/kg}$ ; SAR(10 g) =  $0.082 \text{ W/kg}$**

Maximum value of SAR (measured) =  $0.159 \text{ W/kg}$

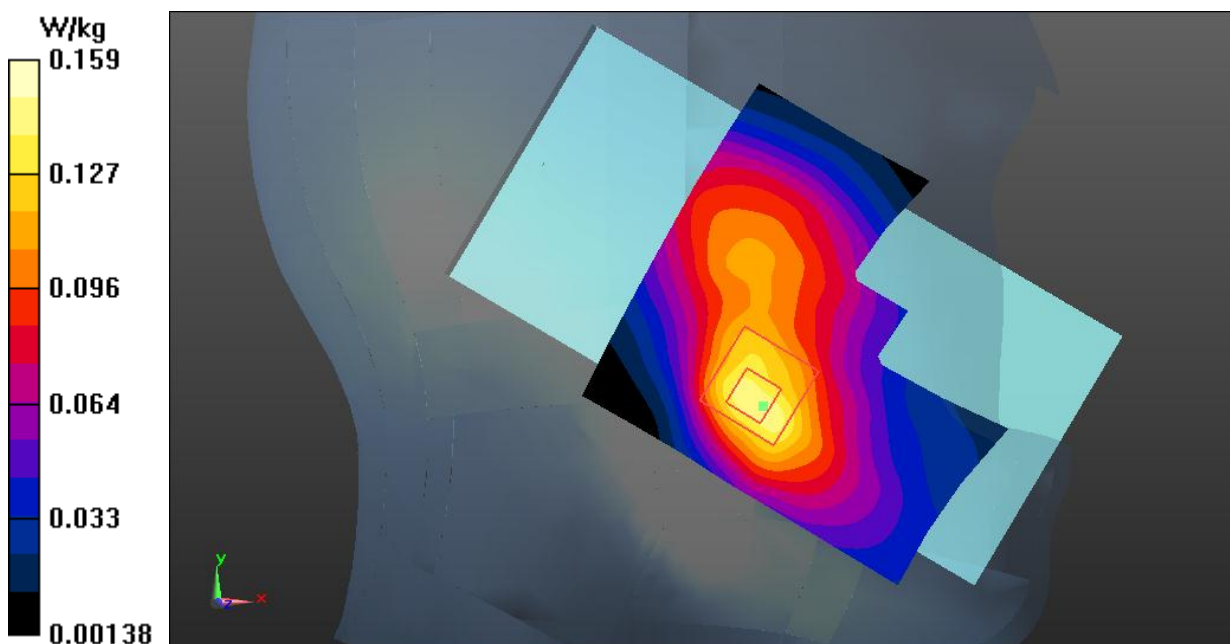


Fig.3 GSM 1900 Head

### GSM1900 Body

Date: 2021-1-12

Electronics: DAE4 Sn786

Medium: Head 1900MHz

Medium parameters used:  $f = 1880 \text{ MHz}$ ;  $\sigma = 1.375 \text{ S/m}$ ;  $\epsilon_r = 40.752$ ;  $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature:  $22.0^\circ\text{C}$  Liquid Temperature:  $21.5^\circ\text{C}$

Communication System: UID 0, GPRS 2Txslot (0) Frequency: 1880 MHz Duty Cycle: 1:4

Probe: EX3DV4 – SN3633 ConvF (7.76, 7.76, 7.76);

**Front Side Middle/Area Scan (61x61x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) =  $0.598 \text{ W/kg}$

**Front Side Middle/Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value =  $11.85 \text{ V/m}$ ; Power Drift =  $0.08 \text{ dB}$

Peak SAR (extrapolated) =  $0.833 \text{ W/kg}$

**SAR(1 g) =  $0.487 \text{ W/kg}$ ; SAR(10 g) =  $0.273 \text{ W/kg}$**

Maximum value of SAR (measured) =  $0.594 \text{ W/kg}$

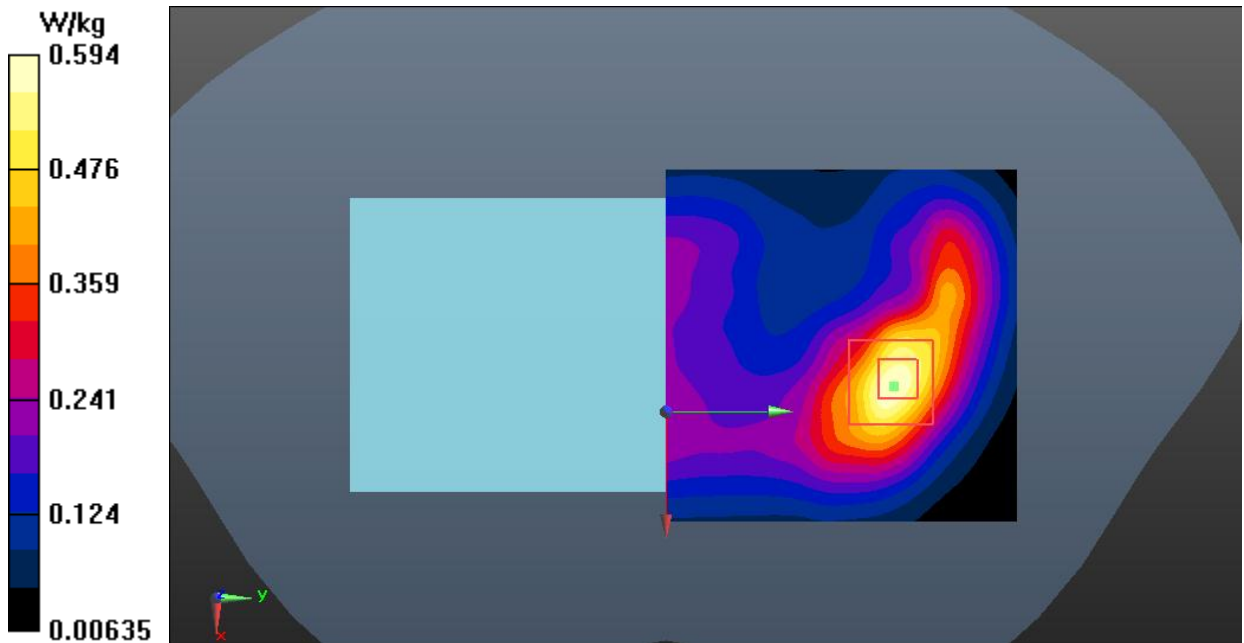


Fig.4 GSM 1900 Body

### WCDMA Band 2 Head

Date: 2021-1-12

Electronics: DAE4 Sn786

Medium: Head 1900MHz

Medium parameters used:  $f = 1880 \text{ MHz}$ ;  $\sigma = 1.375 \text{ S/m}$ ;  $\epsilon_r = 40.752$ ;  $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature:  $22.0^\circ\text{C}$  Liquid Temperature:  $21.5^\circ\text{C}$

Communication System: UID 0, WCDMA (0) Frequency: 1880 MHz Duty Cycle: 1:1

Probe: EX3DV4 – SN3633 ConvF (7.76, 7.76, 7.76);

**Left Cheek Middle/Area Scan (61x61x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) =  $0.320 \text{ W/kg}$

**Left Cheek Middle/Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value =  $2.620 \text{ V/m}$ ; Power Drift =  $0.02 \text{ dB}$

Peak SAR (extrapolated) =  $0.436 \text{ W/kg}$

**SAR(1 g) =  $0.289 \text{ W/kg}$ ; SAR(10 g) =  $0.182 \text{ W/kg}$**

Maximum value of SAR (measured) =  $0.359 \text{ W/kg}$

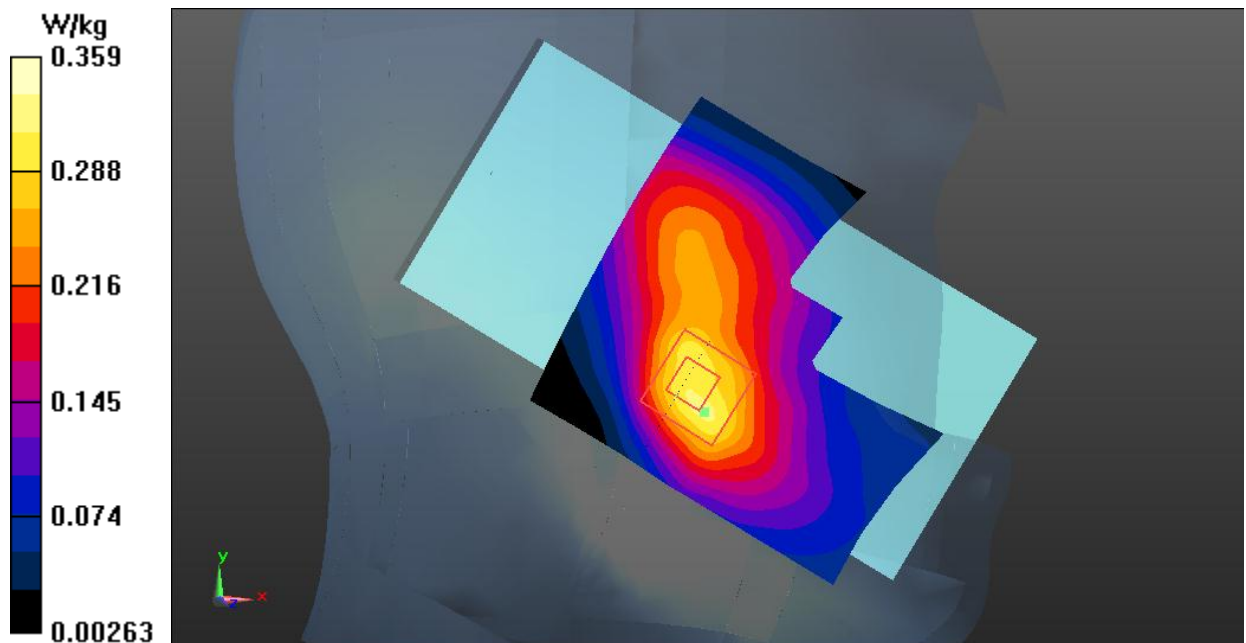


Fig.5 WCDMA Band 2 Head

### WCDMA Band 2 Body

Date: 2021-1-12

Electronics: DAE4 Sn786

Medium: Head 1900MHz

Medium parameters used:  $f = 1880 \text{ MHz}$ ;  $\sigma = 1.375 \text{ S/m}$ ;  $\epsilon_r = 40.752$ ;  $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature:  $22.0^\circ\text{C}$  Liquid Temperature:  $21.5^\circ\text{C}$

Communication System: UID 0, WCDMA (0) Frequency: 1880 MHz Duty Cycle: 1:1

Probe: EX3DV4 – SN3633 ConvF (7.76, 7.76, 7.76);

**Front Side Middle/Area Scan (61x61x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) =  $0.658 \text{ W/kg}$

**Front Side Middle/Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value =  $13.25 \text{ V/m}$ ; Power Drift =  $0.01 \text{ dB}$

Peak SAR (extrapolated) =  $0.936 \text{ W/kg}$

**SAR(1 g) =  $0.549 \text{ W/kg}$ ; SAR(10 g) =  $0.306 \text{ W/kg}$**

Maximum value of SAR (measured) =  $0.743 \text{ W/kg}$

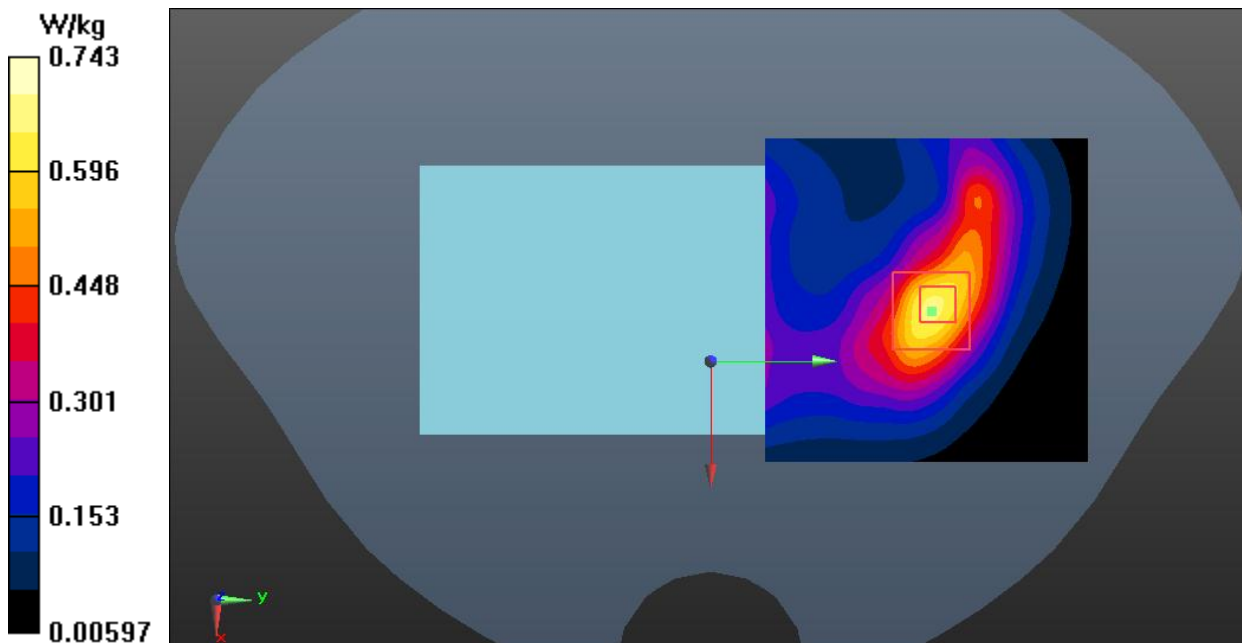


Fig.6 WCDMA Band 2 Body

### WCDMA Band 4 Head

Date: 2021-1-11

Electronics: DAE4 Sn786

Medium: Head 1750MHz

Medium parameters used:  $f = 1733 \text{ MHz}$ ;  $\sigma = 1.369 \text{ S/m}$ ;  $\epsilon_r = 39.602$ ;  $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature:  $22.0^\circ\text{C}$  Liquid Temperature:  $21.5^\circ\text{C}$

Communication System: UID 0, WCDMA (0) Frequency:  $1732.6 \text{ MHz}$  Duty Cycle: 1:1

Probe: EX3DV4 – SN3633 ConvF (8.09, 8.09, 8.09);

**Right Cheek Middle/Area Scan (61x61x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) =  $0.250 \text{ W/kg}$

**Right Cheek Middle/Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value =  $2.875 \text{ V/m}$ ; Power Drift =  $0.11 \text{ dB}$

Peak SAR (extrapolated) =  $0.308 \text{ W/kg}$

**SAR(1 g) =  $0.208 \text{ W/kg}$ ; SAR(10 g) =  $0.134 \text{ W/kg}$**

Maximum value of SAR (measured) =  $0.255 \text{ W/kg}$

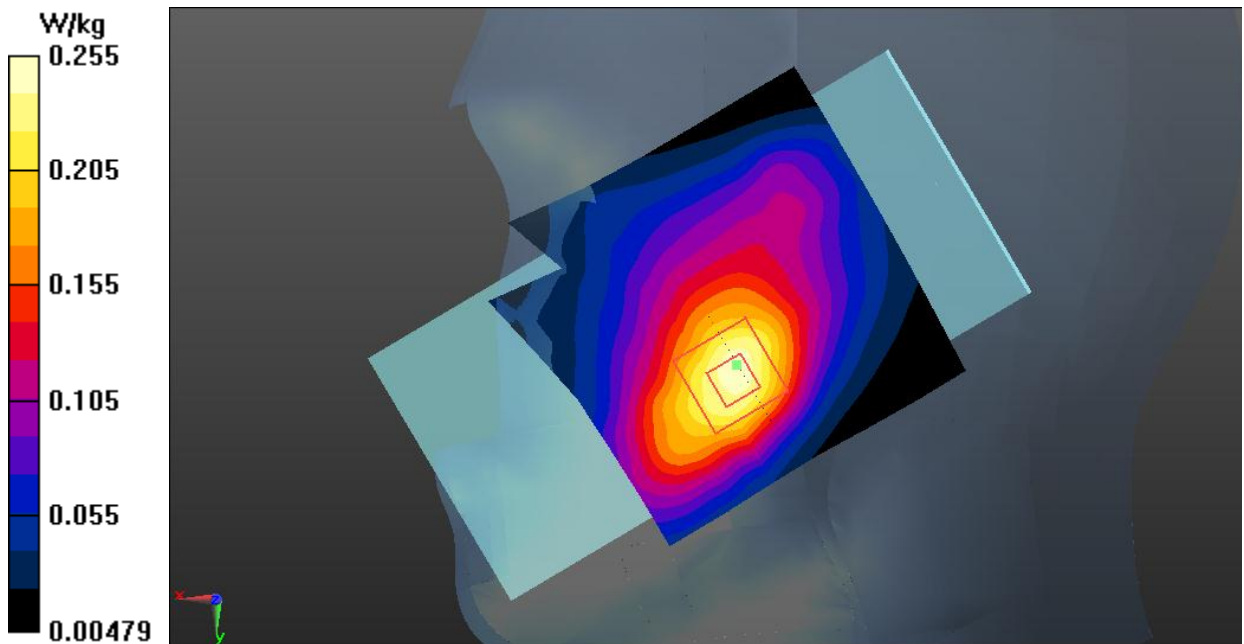


Fig.7 WCDMA Band 4 Head

### WCDMA Band 4 Body

Date: 2021-1-11

Electronics: DAE4 Sn786

Medium: Head 1750MHz

Medium parameters used:  $f = 1733$  MHz;  $\sigma = 1.369$  S/m;  $\epsilon_r = 39.602$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.0°C Liquid Temperature: 21.5°C

Communication System: UID 0, WCDMA (0) Frequency: 1732.6 MHz Duty Cycle: 1:1

Probe: EX3DV4 – SN3633 ConvF (8.09, 8.09, 8.09);

**Bottom Side Middle/Area Scan (41x61x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.914 W/kg


**Bottom Side Middle/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 23.95 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 1.20 W/kg

**SAR(1 g) = 0.731 W/kg; SAR(10 g) = 0.407 W/kg**

Maximum value of SAR (measured) = 0.984 W/kg

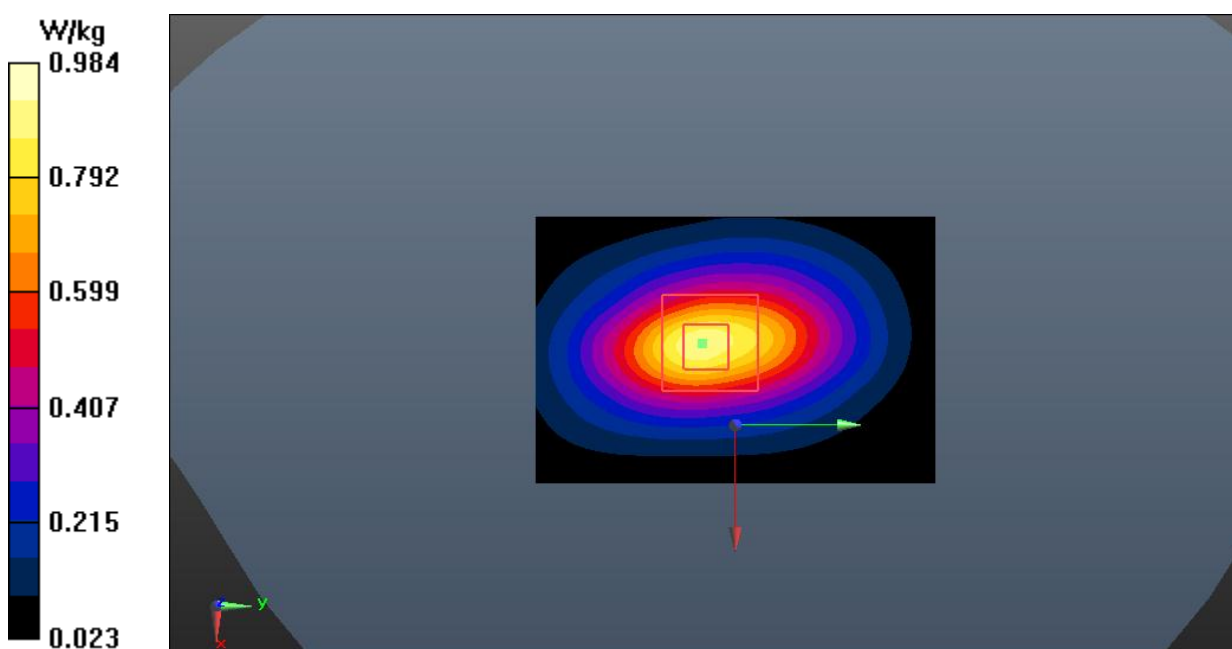

**Fig.8 WCDMA Band 4 Body**

### WCDMA Band 5 Head

Date: 2021-1-9

Electronics: DAE4 Sn786

Medium: Head 835MHz

Medium parameters used (interpolated):  $f = 836.4$  MHz;  $\sigma = 0.91$  S/m;  $\epsilon_r = 40.733$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.0°C Liquid Temperature: 21.5°C

Communication System: UID 0, WCDMA (0) Frequency: 836.4 MHz Duty Cycle: 1:1

Probe: EX3DV4 – SN3633 ConvF (9.59, 9.59, 9.59);

**Left Cheek Middle/Area Scan (61x61x1):** Interpolated grid:  $dx=1.500$  mm,  $dy=1.500$  mm

Maximum value of SAR (interpolated) = 0.289 W/kg

**Left Cheek Middle/Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8$ mm,  $dy=8$ mm,  $dz=5$ mm

Reference Value = 2.188 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.352 W/kg

**SAR(1 g) = 0.277 W/kg; SAR(10 g) = 0.208 W/kg**

Maximum value of SAR (measured) = 0.318 W/kg

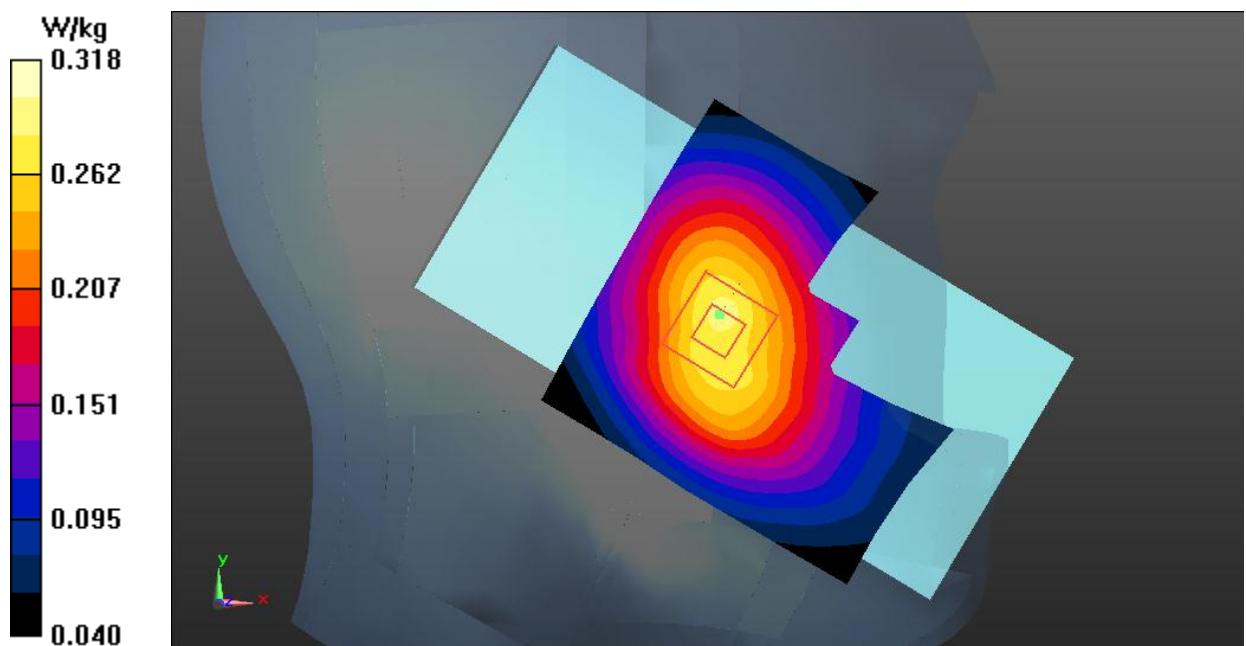


Fig.9 WCDMA Band 5 Head

### WCDMA Band 5 Body

Date: 2021-1-9

Electronics: DAE4 Sn786

Medium: Head 835MHz

Medium parameters used (interpolated):  $f = 836.4$  MHz;  $\sigma = 0.91$  S/m;  $\epsilon_r = 40.733$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.0°C Liquid Temperature: 21.5°C

Communication System: UID 0, WCDMA (0) Frequency: 836.4 MHz Duty Cycle: 1:1

Probe: EX3DV4 – SN3633 ConvF (9.59, 9.59, 9.59);

**Rear Side Middle/Area Scan (61x71x1):** Interpolated grid:  $dx=1.500$  mm,  $dy=1.500$  mm

Maximum value of SAR (interpolated) = 0.302 W/kg

**Rear Side Middle/Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8$ mm,  $dy=8$ mm,  $dz=5$ mm

Reference Value = 16.33 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.434 W/kg

**SAR(1 g) = 0.264 W/kg; SAR(10 g) = 0.161 W/kg**

Maximum value of SAR (measured) = 0.337 W/kg

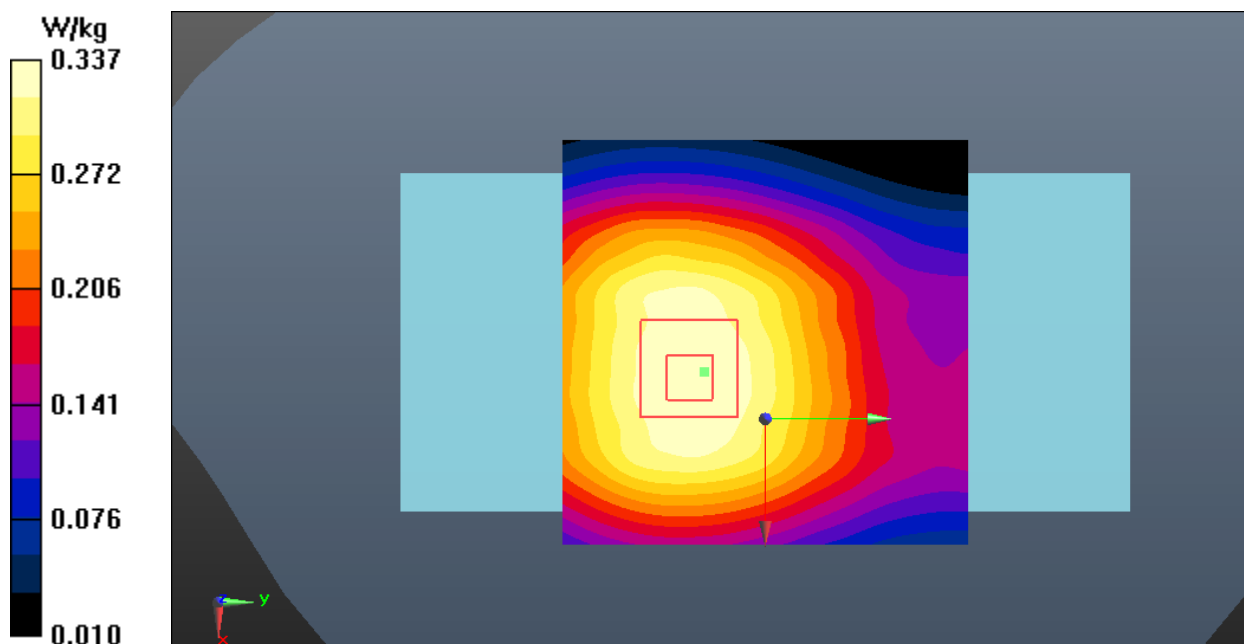


Fig.10 WCDMA Band 5 Body

### LTE Band 2 Head

Date: 2021-1-12

Electronics: DAE4 Sn786

Medium: Head 1900MHz

Medium parameters used:  $f = 1880 \text{ MHz}$ ;  $\sigma = 1.375 \text{ S/m}$ ;  $\epsilon_r = 40.752$ ;  $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature:  $22.0^\circ\text{C}$  Liquid Temperature:  $21.5^\circ\text{C}$

Communication System: UID 0, LTE\_FDD (0) Frequency:  $1880 \text{ MHz}$  Duty Cycle: 1:1

Probe: EX3DV4 – SN3633 ConvF (7.76, 7.76, 7.76);

**Left Tilt Middle 1RB\_50/Area Scan (61x61x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) =  $0.318 \text{ W/kg}$


**Left Tilt Middle 1RB\_50/Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value =  $5.856 \text{ V/m}$ ; Power Drift =  $-0.09 \text{ dB}$

Peak SAR (extrapolated) =  $0.406 \text{ W/kg}$

**SAR(1 g) =  $0.262 \text{ W/kg}$ ; SAR(10 g) =  $0.163 \text{ W/kg}$**

Maximum value of SAR (measured) =  $0.313 \text{ W/kg}$

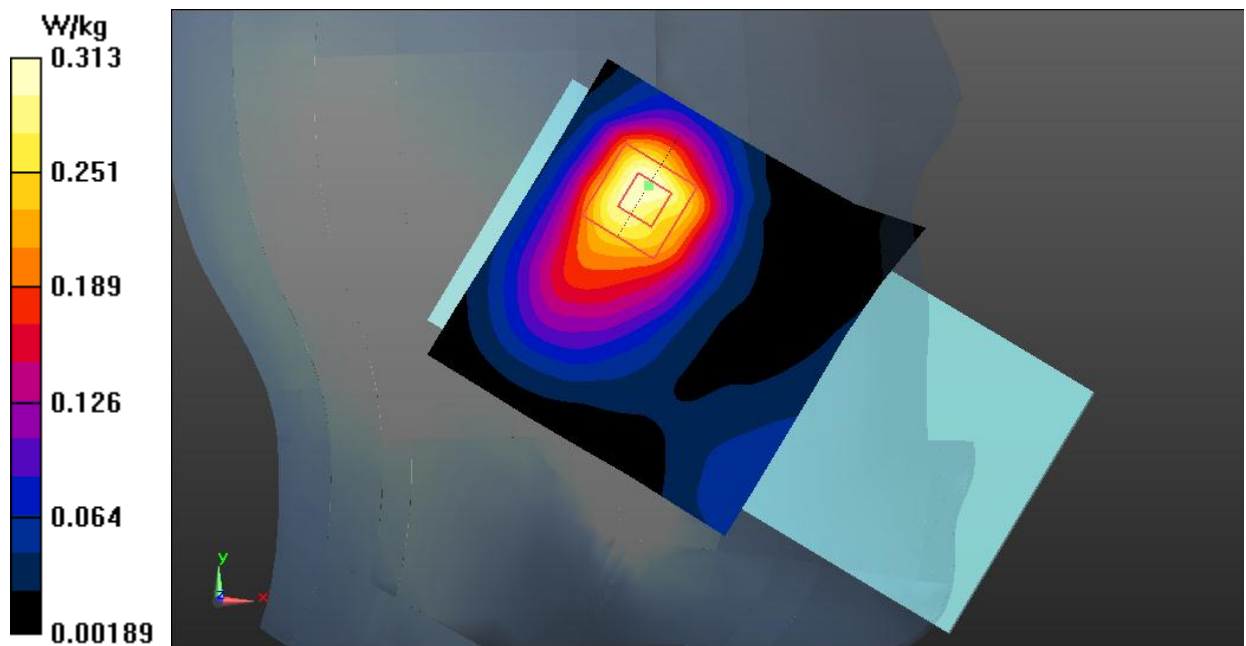

**Fig.11 LTE Band 2 Head**

### LTE Band 2 Body

Date: 2021-1-12

Electronics: DAE4 Sn786

Medium: Head 1900MHz

Medium parameters used:  $f = 1900 \text{ MHz}$ ;  $\sigma = 1.393 \text{ S/m}$ ;  $\epsilon_r = 40.674$ ;  $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature:  $22.0^\circ\text{C}$  Liquid Temperature:  $21.5^\circ\text{C}$

Communication System: UID 0, LTE\_FDD (0) Frequency: 1900 MHz Duty Cycle: 1:1

Probe: EX3DV4 – SN3633 ConvF (7.76, 7.76, 7.76);

**Front Side High 1RB\_50/Area Scan (61x61x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) =  $0.867 \text{ W/kg}$

**Front Side High 1RB\_50/Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value =  $13.40 \text{ V/m}$ ; Power Drift =  $0.05 \text{ dB}$

Peak SAR (extrapolated) =  $1.22 \text{ W/kg}$

**SAR(1 g) =  $0.727 \text{ W/kg}$ ; SAR(10 g) =  $0.410 \text{ W/kg}$**

Maximum value of SAR (measured) =  $0.992 \text{ W/kg}$

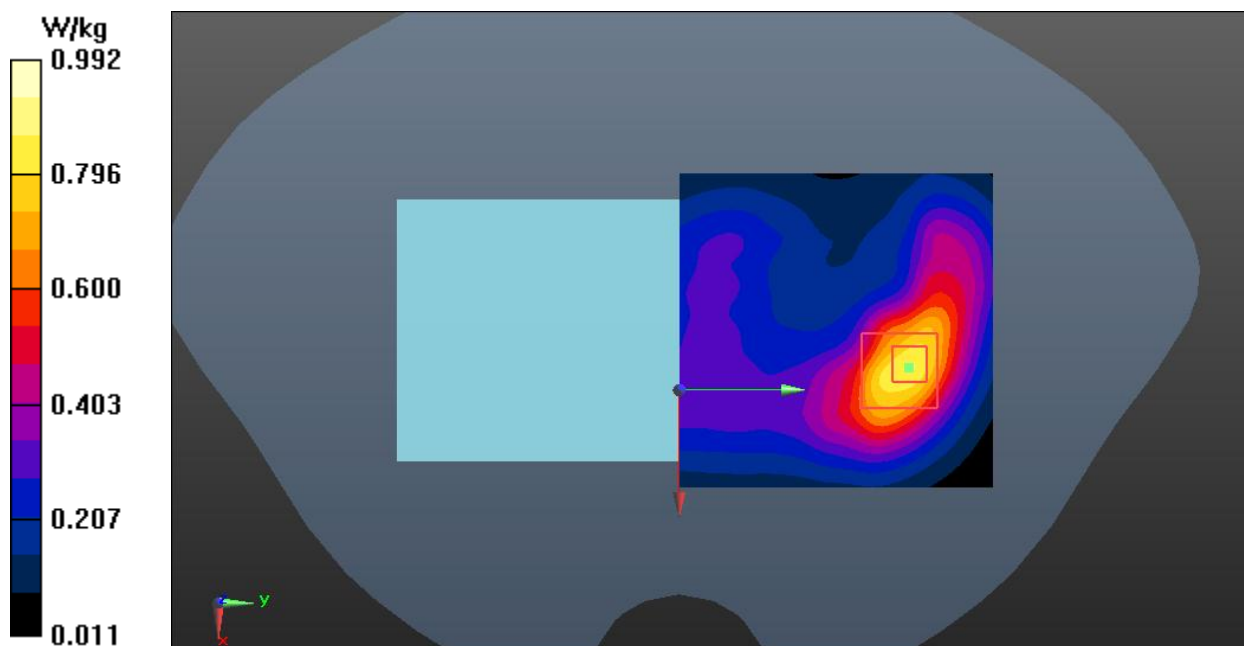


Fig.12 LTE Band 2 Body

### LTE Band 4 Head

Date: 2021-1-11

Electronics: DAE4 Sn786

Medium: Head 1750MHz

Medium parameters used:  $f = 1745 \text{ MHz}$ ;  $\sigma = 1.38 \text{ S/m}$ ;  $\epsilon_r = 39.556$ ;  $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature:  $22.0^\circ\text{C}$  Liquid Temperature:  $21.5^\circ\text{C}$

Communication System: UID 0, LTE\_FDD (0) Frequency:  $1745 \text{ MHz}$  Duty Cycle: 1:1

Probe: EX3DV4 – SN3633 ConvF (8.09, 8.09, 8.09);

**Right Cheek High 1RB\_50/Area Scan (61x61x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) =  $0.221 \text{ W/kg}$

**Right Cheek High 1RB\_50/Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value =  $2.892 \text{ V/m}$ ; Power Drift =  $-0.03 \text{ dB}$

Peak SAR (extrapolated) =  $0.266 \text{ W/kg}$

**SAR(1 g) =  $0.185 \text{ W/kg}$ ; SAR(10 g) =  $0.119 \text{ W/kg}$**

Maximum value of SAR (measured) =  $0.211 \text{ W/kg}$

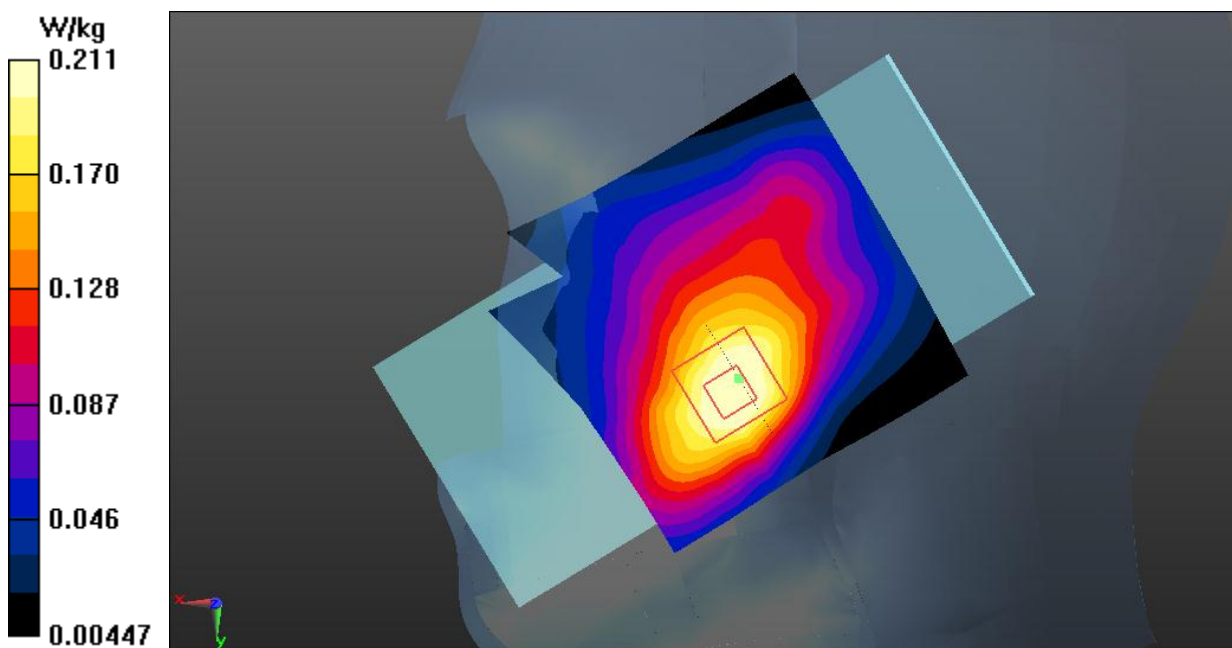


Fig.13 LTE Band 4 Head

### LTE Band 4 Body

Date: 2021-1-11

Electronics: DAE4 Sn786

Medium: Head 1750MHz

Medium parameters used:  $f = 1745 \text{ MHz}$ ;  $\sigma = 1.38 \text{ S/m}$ ;  $\epsilon_r = 39.556$ ;  $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature:  $22.0^\circ\text{C}$  Liquid Temperature:  $21.5^\circ\text{C}$

Communication System: UID 0, LTE\_FDD (0) Frequency: 1745 MHz Duty Cycle: 1:1

Probe: EX3DV4 – SN3633 ConvF (8.09, 8.09, 8.09);

**Bottom Side High 1RB\_50/Area Scan (41x61x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) =  $1.21 \text{ W/kg}$

**Bottom Side High 1RB\_50/Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value =  $23.31 \text{ V/m}$ ; Power Drift =  $0.04 \text{ dB}$

Peak SAR (extrapolated) =  $1.55 \text{ W/kg}$

**SAR(1 g) =  $0.822 \text{ W/kg}$ ; SAR(10 g) =  $0.415 \text{ W/kg}$**

Maximum value of SAR (measured) =  $1.17 \text{ W/kg}$

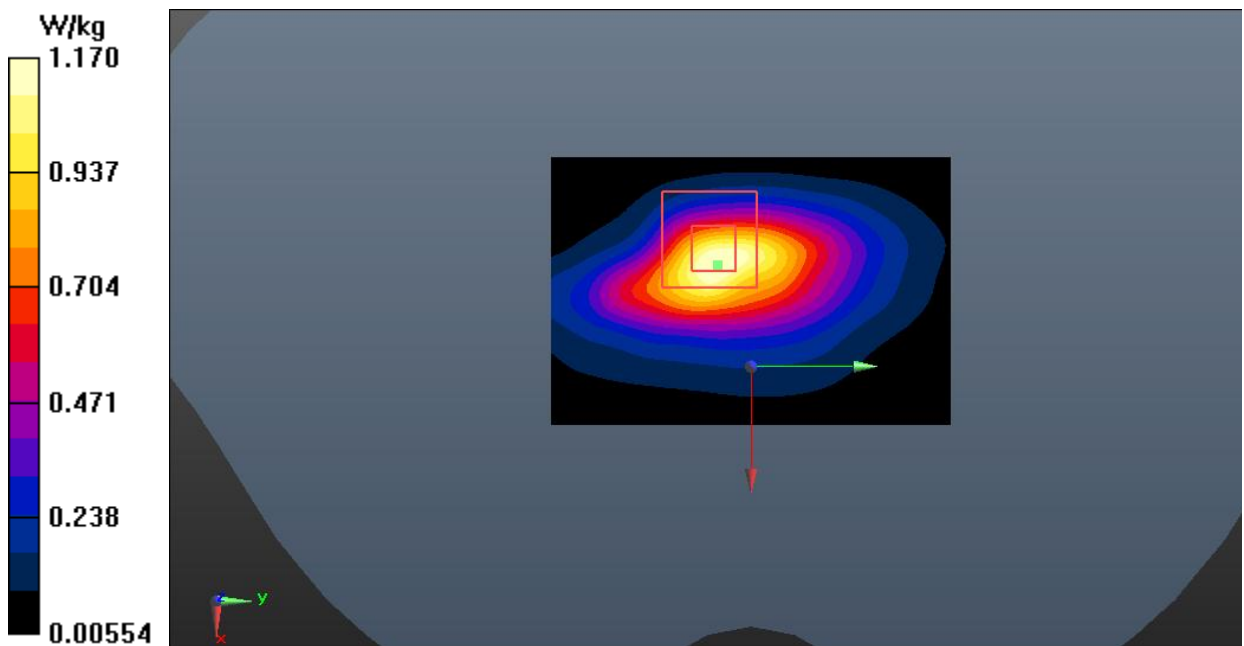


Fig.14 LTE Band 4 Body

# LTE Band 5 Head

Date: 2021-1-9

Electronics: DAE4 Sn786

Medium: Head 835MHz

Medium parameters used (interpolated):  $f = 836.5$  MHz;  $\sigma = 0.91$  S/m;  $\epsilon_r = 40.732$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.0°C Liquid Temperature: 21.5°C

Communication System: UID 0, LTE\_FDD (0) Frequency: 836.5 MHz Duty Cycle: 1:1

Probe: EX3DV4 – SN3633 ConvF (9.59, 9.59, 9.59);

**Right Cheek Middle 1RB\_24/Area Scan (61x61x1):** Interpolated grid:  $dx=1.500$  mm,  $dy=1.500$  mm

Maximum value of SAR (interpolated) = 0.273 W/kg

**Right Cheek Middle 1RB\_24/Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8$ mm,  $dy=8$ mm,  $dz=5$ mm

Reference Value = 3.831 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 0.345 W/kg

**SAR(1 g) = 0.251 W/kg; SAR(10 g) = 0.189 W/kg**

Maximum value of SAR (measured) = 0.274 W/kg

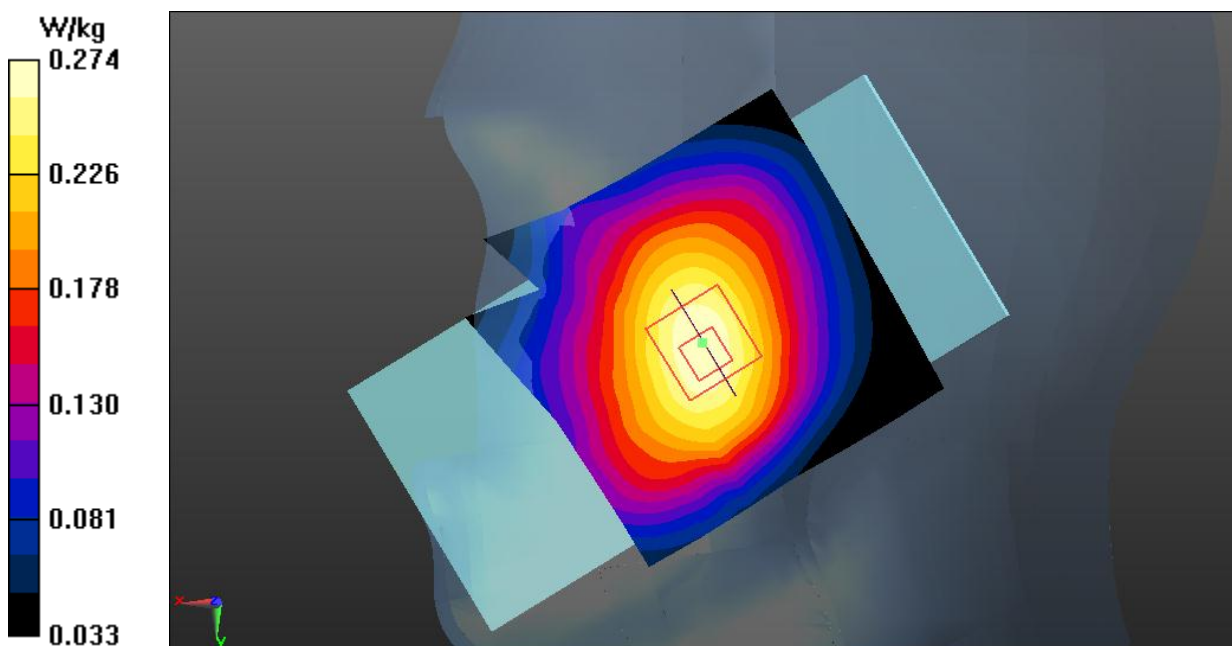


Fig.15 LTE Band 5 Head

### LTE Band 5 Body

Date: 2021-1-9

Electronics: DAE4 Sn786

Medium: Head 835MHz

Medium parameters used (interpolated):  $f = 836.5$  MHz;  $\sigma = 0.91$  S/m;  $\epsilon_r = 40.732$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.0°C Liquid Temperature: 21.5°C

Communication System: UID 0, LTE\_FDD (0) Frequency: 836.5 MHz Duty Cycle: 1:1

Probe: EX3DV4 – SN3633 ConvF (9.59, 9.59, 9.59);

**Rear Side Middle 1RB\_24/Area Scan (61x71x1):** Interpolated grid:  $dx=1.500$  mm,  $dy=1.500$  mm

Maximum value of SAR (interpolated) = 0.348 W/kg

**Rear Side Middle 1RB\_24/Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8$ mm,  $dy=8$ mm,  $dz=5$ mm

Reference Value = 16.66 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 0.406 W/kg

**SAR(1 g) = 0.304 W/kg; SAR(10 g) = 0.226 W/kg**

Maximum value of SAR (measured) = 0.364 W/kg

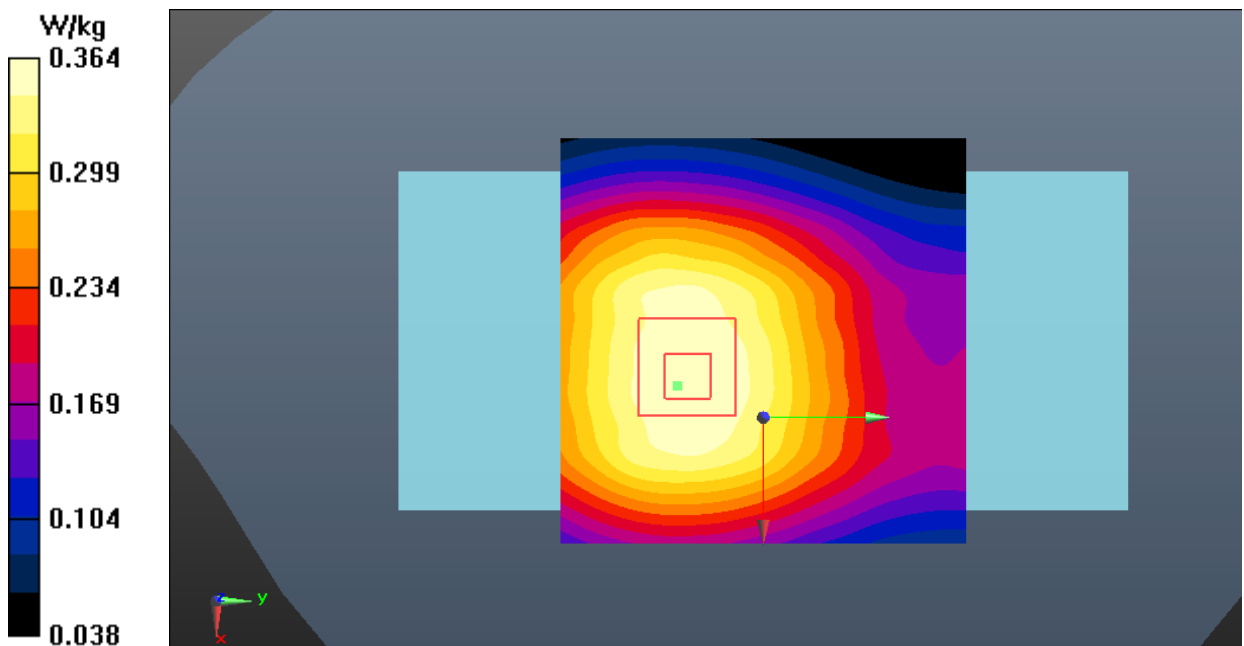


Fig.16 LTE Band 5 Body

### LTE Band 7 Head

Date: 2021-1-13

Electronics: DAE4 Sn786

Medium: Head 2550MHz

Medium parameters used:  $f = 2510$  MHz;  $\sigma = 1.908$  S/m;  $\epsilon_r = 38.665$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.0°C Liquid Temperature: 21.5°C

Communication System: UID 0, LTE\_FDD (0) Frequency: 2510 MHz Duty Cycle: 1:1

Probe: EX3DV4 – SN3633 ConvF (7.43, 7.43, 7.43);

**Right Cheek Low 1RB\_50/Area Scan (91x91x1):** Interpolated grid:  $dx=1.000$  mm,  $dy=1.000$  mm

Maximum value of SAR (interpolated) = 0.097 W/kg

**Right Cheek Low 1RB\_50/Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  $dx=5$ mm,  $dy=5$ mm,  $dz=5$ mm

Reference Value = 1.063 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 0.146 W/kg

**SAR(1 g) = 0.081 W/kg; SAR(10 g) = 0.039 W/kg**

Maximum value of SAR (interpolated) = 0.104 W/kg

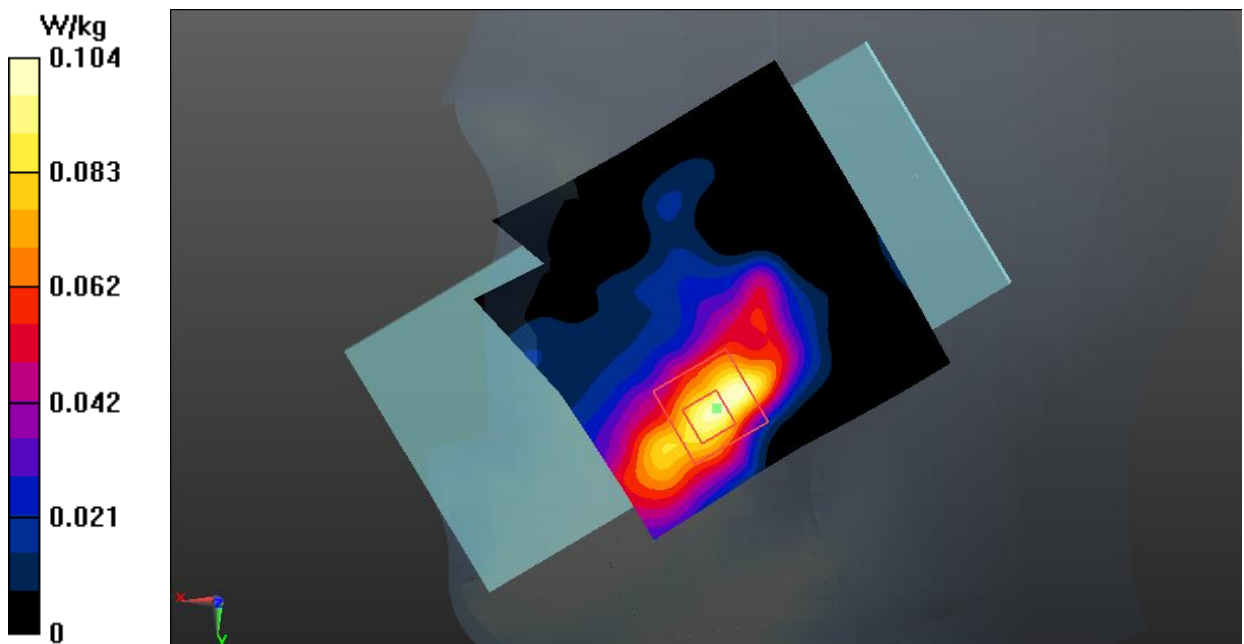


Fig.17 LTE Band 7 Head

### LTE Band 7 Body

Date: 2021-1-13

Electronics: DAE4 Sn786

Medium: Head 2550MHz

Medium parameters used (interpolated):  $f = 2535$  MHz;  $\sigma = 1.937$  S/m;  $\epsilon_r = 38.583$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.0°C Liquid Temperature: 21.5°C

Communication System: UID 0, LTE\_FDD (0) Frequency: 2535 MHz Duty Cycle: 1:1

Probe: EX3DV4 – SN3633 ConvF (7.43, 7.43, 7.43);

**Bottom Side Middle 1RB\_50/Area Scan (61x91x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 1.06 W/kg

**Bottom Side Middle 1RB\_50/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 12.72 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 1.59 W/kg

**SAR(1 g) = 0.797 W/kg; SAR(10 g) = 0.390 W/kg**

Maximum value of SAR (measured) = 1.20 W/kg

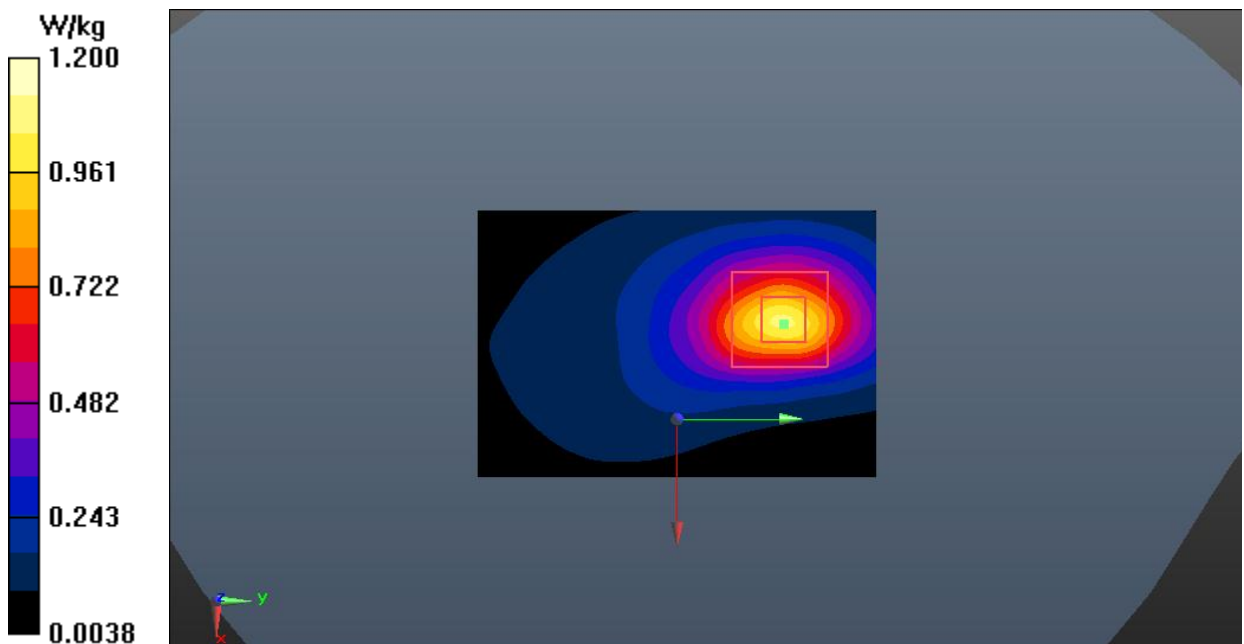


Fig.18 LTE Band 7 Body

### LTE Band 12 Head

Date: 2021-1-10

Electronics: DAE4 Sn786

Medium: Head 750MHz

Medium parameters used:  $f = 708 \text{ MHz}$ ;  $\sigma = 0.856 \text{ S/m}$ ;  $\epsilon_r = 43.12$ ;  $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature:  $22.0^\circ\text{C}$  Liquid Temperature:  $21.5^\circ\text{C}$

Communication System: UID 0, LTE\_FDD (0) Frequency:  $707.5 \text{ MHz}$  Duty Cycle: 1:1

Probe: EX3DV4 – SN3633 ConvF (9.59, 9.59, 9.59);

**Left Cheek Middle 1RB\_24/Area Scan (61x61x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) =  $0.199 \text{ W/kg}$


**Left Cheek Middle 1RB\_24/Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value =  $3.440 \text{ V/m}$ ; Power Drift =  $0.06 \text{ dB}$

Peak SAR (extrapolated) =  $0.243 \text{ W/kg}$

**SAR(1 g) =  $0.196 \text{ W/kg}$ ; SAR(10 g) =  $0.150 \text{ W/kg}$**

Maximum value of SAR (measured) =  $0.213 \text{ W/kg}$

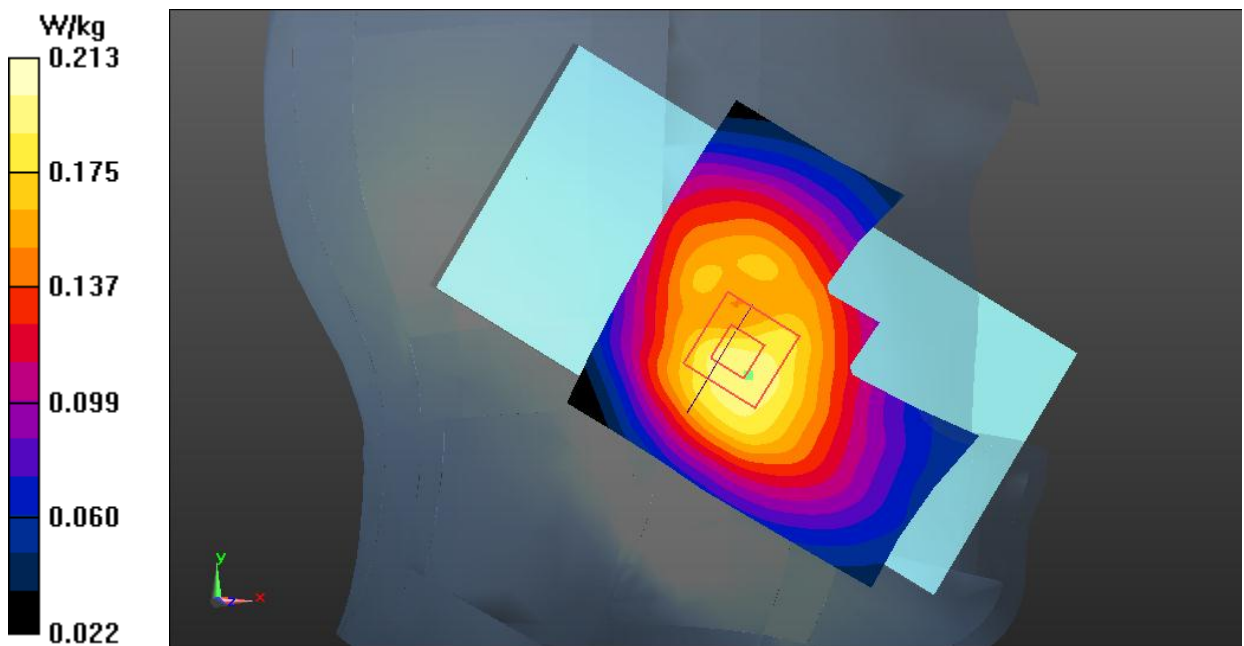

**Fig.19 LTE Band 12 Head**

### LTE Band 12 Body

Date: 2021-1-10

Electronics: DAE4 Sn786

Medium: Head 750MHz

Medium parameters used:  $f = 708 \text{ MHz}$ ;  $\sigma = 0.856 \text{ S/m}$ ;  $\epsilon_r = 43.12$ ;  $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature:  $22.0^\circ\text{C}$  Liquid Temperature:  $21.5^\circ\text{C}$

Communication System: UID 0, LTE\_FDD (0) Frequency: 707.5 MHz Duty Cycle: 1:1

Probe: EX3DV4 – SN3633 ConvF (9.59, 9.59, 9.59);

**Rear Side Middle 1RB\_24/Area Scan (61x61x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) =  $0.390 \text{ W/kg}$

**Rear Side Middle 1RB\_24/Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value =  $19.62 \text{ V/m}$ ; Power Drift =  $0.03 \text{ dB}$

Peak SAR (extrapolated) =  $0.487 \text{ W/kg}$

**SAR(1 g) =  $0.358 \text{ W/kg}$ ; SAR(10 g) =  $0.269 \text{ W/kg}$**

Maximum value of SAR (measured) =  $0.411 \text{ W/kg}$

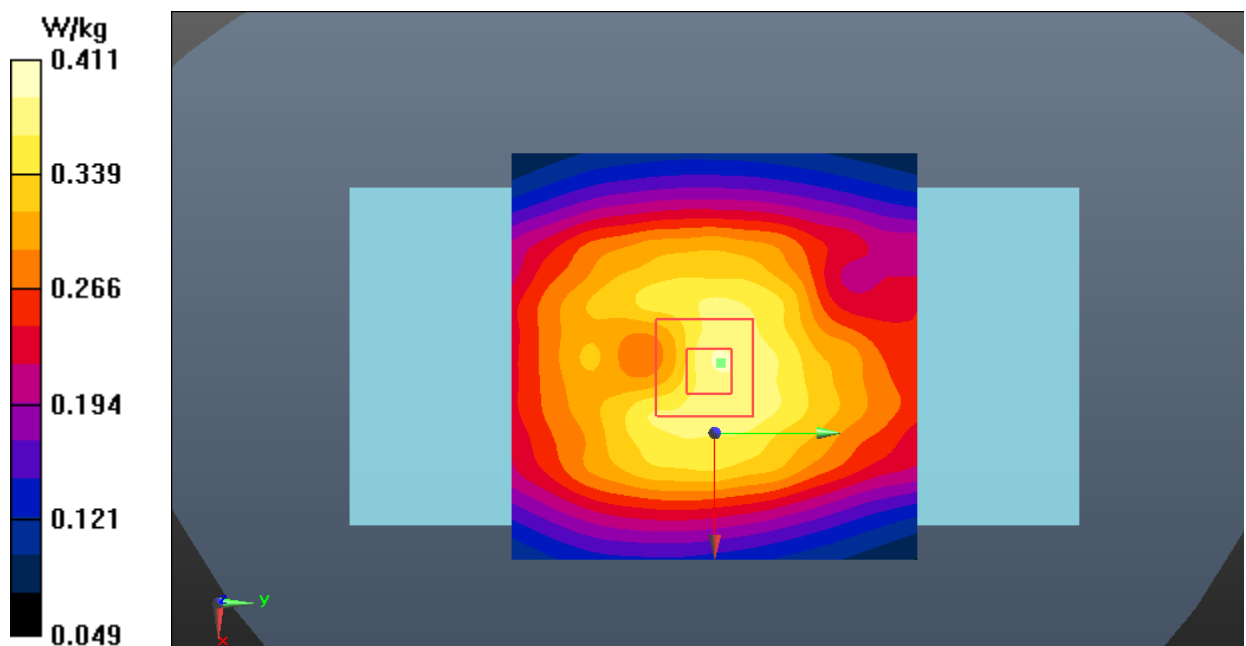


Fig.20 LTE Band 12 Body

### LTE Band 17 Head

Date: 2021-1-10

Electronics: DAE4 Sn786

Medium: Head 750MHz

Medium parameters used (interpolated):  $f = 711 \text{ MHz}$ ;  $\sigma = 0.858 \text{ S/m}$ ;  $\epsilon_r = 43.084$ ;  $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature:  $22.0^\circ\text{C}$  Liquid Temperature:  $21.5^\circ\text{C}$

Communication System: UID 0, LTE\_FDD (0) Frequency: 711 MHz Duty Cycle: 1:1

Probe: EX3DV4 – SN3633 ConvF (9.59, 9.59, 9.59);

**Right Cheek High 1RB\_24/Area Scan (61x61x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) =  $0.221 \text{ W/kg}$


**Right Cheek High 1RB\_24/Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value =  $4.118 \text{ V/m}$ ; Power Drift =  $0.15 \text{ dB}$

Peak SAR (extrapolated) =  $0.321 \text{ W/kg}$

**SAR(1 g) =  $0.208 \text{ W/kg}$ ; SAR(10 g) =  $0.155 \text{ W/kg}$**

Maximum value of SAR (measured) =  $0.221 \text{ W/kg}$

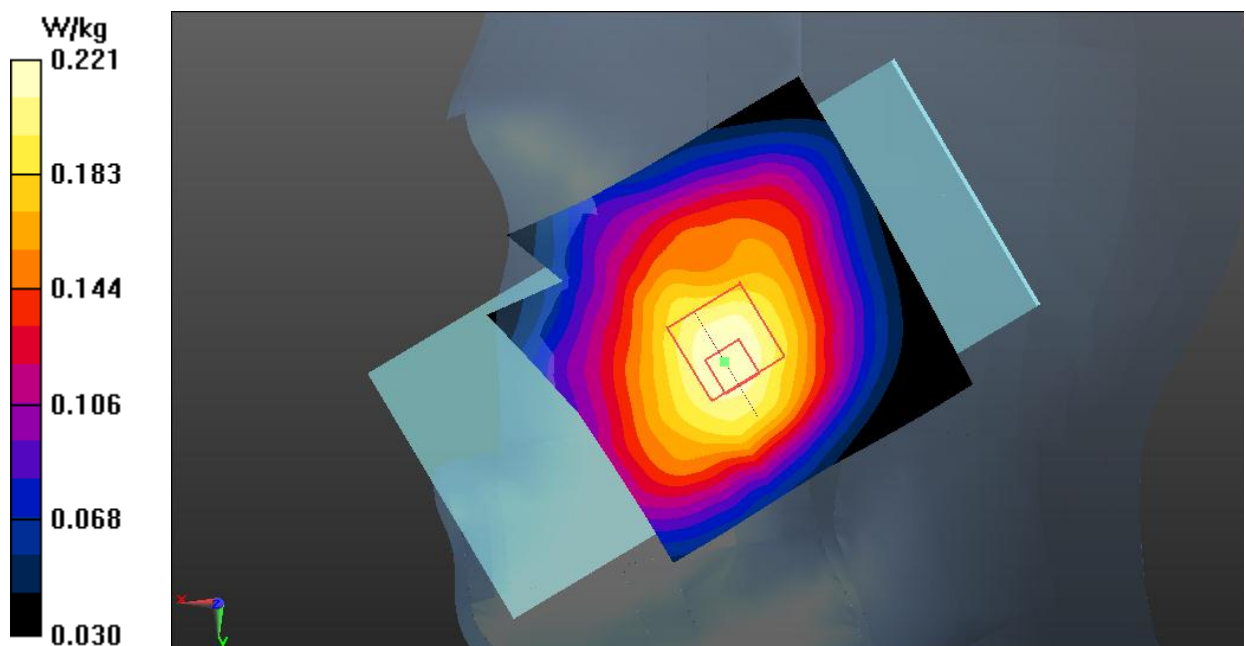

**Fig.21 LTE Band 17 Head**

### LTE Band 17 Body

Date: 2021-1-10

Electronics: DAE4 Sn786

Medium: Head 750MHz

Medium parameters used (interpolated):  $f = 711$  MHz;  $\sigma = 0.858$  S/m;  $\epsilon_r = 43.084$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.0°C Liquid Temperature: 21.5°C

Communication System: UID 0, LTE\_FDD (0) Frequency: 711 MHz Duty Cycle: 1:1

Probe: EX3DV4 – SN3633 ConvF (9.59, 9.59, 9.59);

**Rear Side High 1RB\_24/Area Scan (61x61x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.345 W/kg

**Rear Side High 1RB\_24/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 18.53 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.448 W/kg

**SAR(1 g) = 0.314 W/kg; SAR(10 g) = 0.236 W/kg**

Maximum value of SAR (measured) = 0.362 W/kg

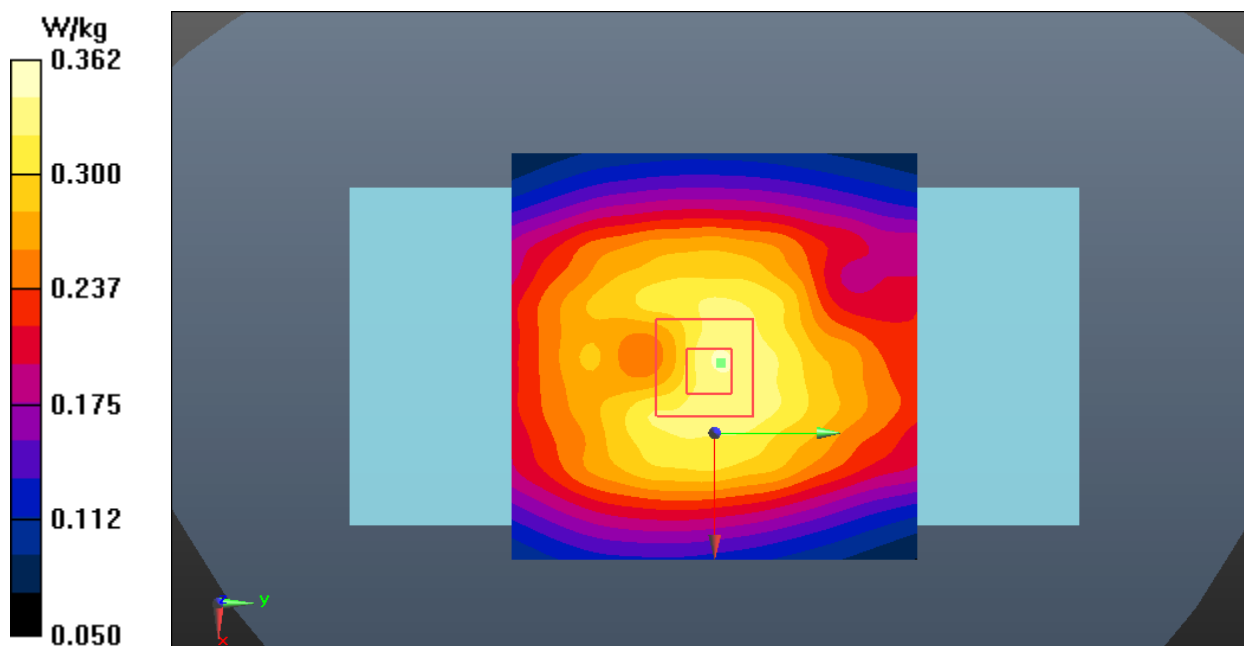


Fig.22 LTE Band 17 Body

### LTE Band 66 Head

Date: 2021-1-11

Electronics: DAE4 Sn786

Medium: Head 1750MHz

Medium parameters used:  $f = 1770$  MHz;  $\sigma = 1.402$  S/m;  $\epsilon_r = 39.458$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.0°C Liquid Temperature: 21.5°C

Communication System: UID 0, LTE\_FDD (0) Frequency: 1770 MHz Duty Cycle: 1:1

Probe: EX3DV4 – SN3633 ConvF (8.09, 8.09, 8.09);

**Right Cheek High 1RB\_50/Area Scan (61x61x1):** Interpolated grid:  $dx=1.500$  mm,  $dy=1.500$  mm

Maximum value of SAR (interpolated) = 0.244 W/kg


**Right Cheek High 1RB\_50/Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8$ mm,  $dy=8$ mm,  $dz=5$ mm

Reference Value = 3.152 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 0.308 W/kg

**SAR(1 g) = 0.205 W/kg; SAR(10 g) = 0.130 W/kg**

Maximum value of SAR (measured) = 0.249 W/kg

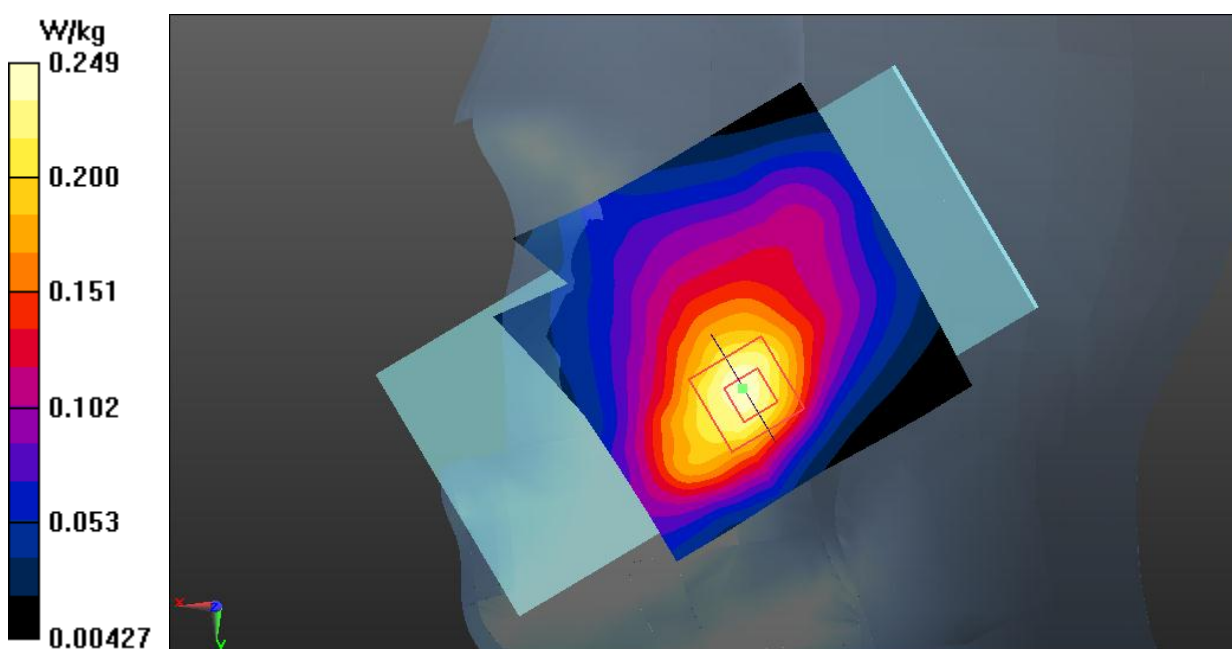

**Fig.23 LTE Band 66 Head**

### LTE Band 66 Body

Date: 2021-1-11

Electronics: DAE4 Sn786

Medium: Head 1750MHz

Medium parameters used:  $f = 1745 \text{ MHz}$ ;  $\sigma = 1.38 \text{ S/m}$ ;  $\epsilon_r = 39.556$ ;  $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature:  $22.0^\circ\text{C}$  Liquid Temperature:  $21.5^\circ\text{C}$

Communication System: UID 0, LTE\_FDD (0) Frequency: 1745 MHz Duty Cycle: 1:1

Probe: EX3DV4 – SN3633 ConvF (8.09, 8.09, 8.09);

**Bottom Side Middle 1RB\_50/Area Scan (41x61x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) =  $1.06 \text{ W/kg}$


**Bottom Side Middle 1RB\_50/Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value =  $25.50 \text{ V/m}$ ; Power Drift =  $-0.12 \text{ dB}$

Peak SAR (extrapolated) =  $1.39 \text{ W/kg}$

**SAR(1 g) =  $0.851 \text{ W/kg}$ ; SAR(10 g) =  $0.482 \text{ W/kg}$**

Maximum value of SAR (measured) =  $1.13 \text{ W/kg}$

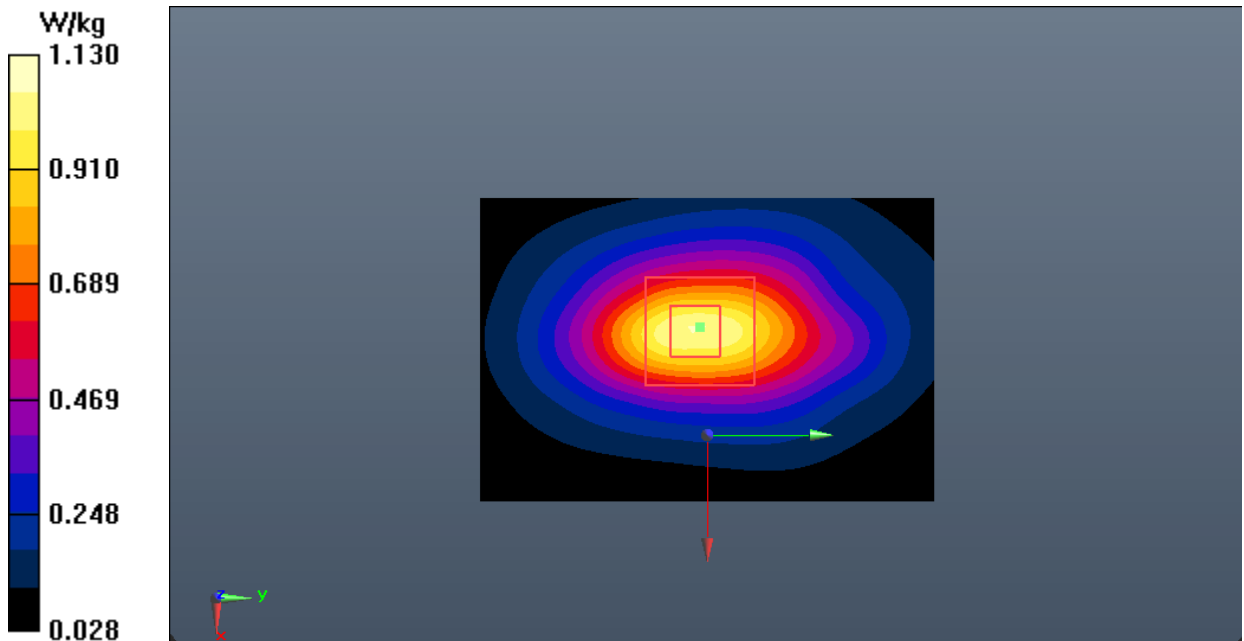

**Fig.24 LTE Band 66 Body**

# WLAN 2.4G Head

Date: 2021-1-14

Electronics: DAE4 Sn786

Medium: Head 2450MHz

Medium parameters used (interpolated):  $f = 2437$  MHz;  $\sigma = 1.819$  S/m;  $\epsilon_r = 38.458$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.0°C Liquid Temperature: 21.5°C

Communication System: UID 0, WiFi (0) Frequency: 2437 MHz Duty Cycle: 1:1

Probe: EX3DV4 – SN3633 ConvF (7.43, 7.43, 7.43);

**Left Cheek Middle/Area Scan (91x91x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 1.18 W/kg

**Left Cheek Middle/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 7.934 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 1.94 W/kg

**SAR(1 g) = 0.925 W/kg; SAR(10 g) = 0.456 W/kg**

Maximum value of SAR (measured) = 1.11 W/kg

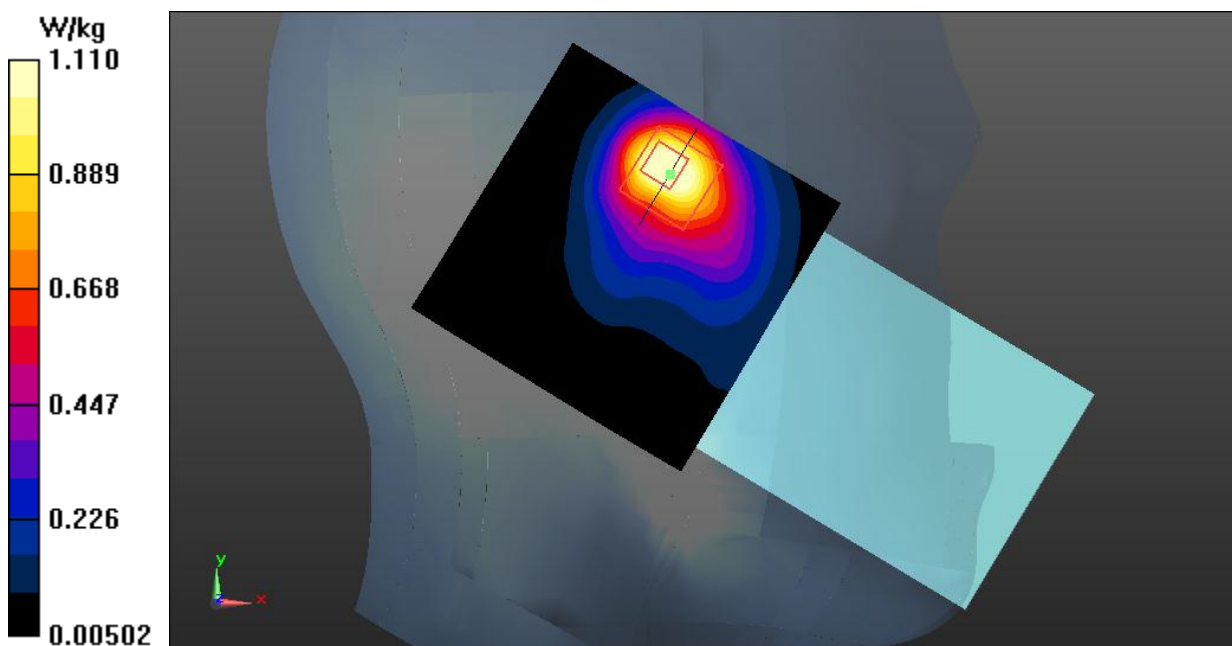


Fig.25 WLAN 2.4G Head

### WLAN 2.4G Body

Date: 2021-1-14

Electronics: DAE4 Sn786

Medium: Head 2450MHz

Medium parameters used:  $f = 2462$  MHz;  $\sigma = 1.848$  S/m;  $\epsilon_r = 38.375$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.0°C Liquid Temperature: 21.5°C

Communication System: UID 0, WiFi (0) Frequency: 2462 MHz Duty Cycle: 1:1

Probe: EX3DV4 – SN3633 ConvF (7.43, 7.43, 7.43);

**Rear Side High/Area Scan (91x91x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.520 W/kg

**Rear Side High/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.597 V/m; Power Drift = -0.16 dB

Peak SAR (extrapolated) = 0.862 W/kg

**SAR(1 g) = 0.421 W/kg; SAR(10 g) = 0.212 W/kg**

Maximum value of SAR (measured) = 0.513 W/kg

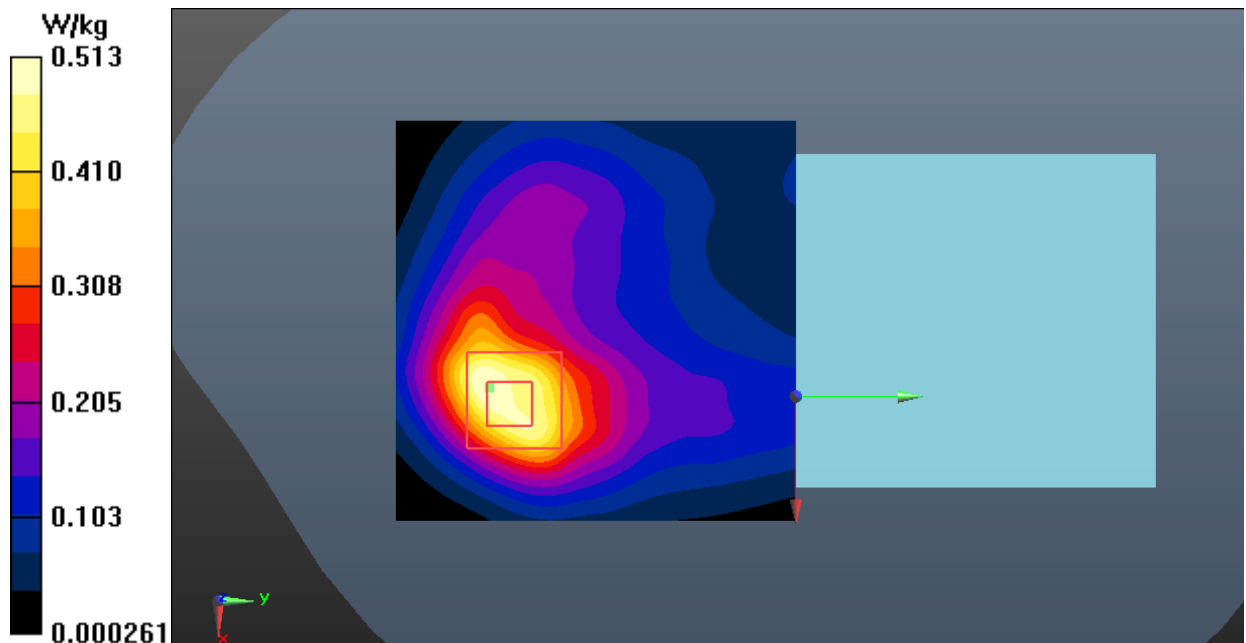


Fig.26 WLAN 2.4G Body

## ANNEX B: SystemVerification Results

### 750MHz

Date: 2021-1-10

Electronics: DAE4 Sn786

Medium: Head 750MHz

Medium parameters used:  $f = 750 \text{ MHz}$ ;  $\sigma = 0.883 \text{ S/m}$ ;  $\epsilon_r = 42.616$ ;  $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature:  $22.5^\circ\text{C}$  Liquid Temperature:  $22.0^\circ\text{C}$

Communication System: CW\_TMC Frequency: 750 MHz Duty Cycle: 1:1

Probe: EX3DV4 – SN3633 ConvF (9.59, 9.59, 9.59);

**System Validation/Area Scan (81x161x1):** Interpolated grid:  $dx=1.000 \text{ mm}$ ,  $dy=1.000 \text{ mm}$

Reference Value =  $58.756 \text{ V/m}$ ; Power Drift =  $-0.08 \text{ dB}$

**SAR(1 g) =  $2.11 \text{ W/kg}$ ; SAR(10 g) =  $1.43 \text{ W/kg}$**

Maximum value of SAR (interpolated) =  $2.71 \text{ W/kg}$


**System Validation/Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=5\text{mm}$

Reference Value =  $58.756 \text{ V/m}$ ; Power Drift =  $-0.08 \text{ dB}$

Peak SAR (extrapolated) =  $2.95 \text{ W/kg}$

**SAR(1 g) =  $2.07 \text{ W/kg}$ ; SAR(10 g) =  $1.41 \text{ W/kg}$**

Maximum value of SAR (measured) =  $2.68 \text{ W/kg}$

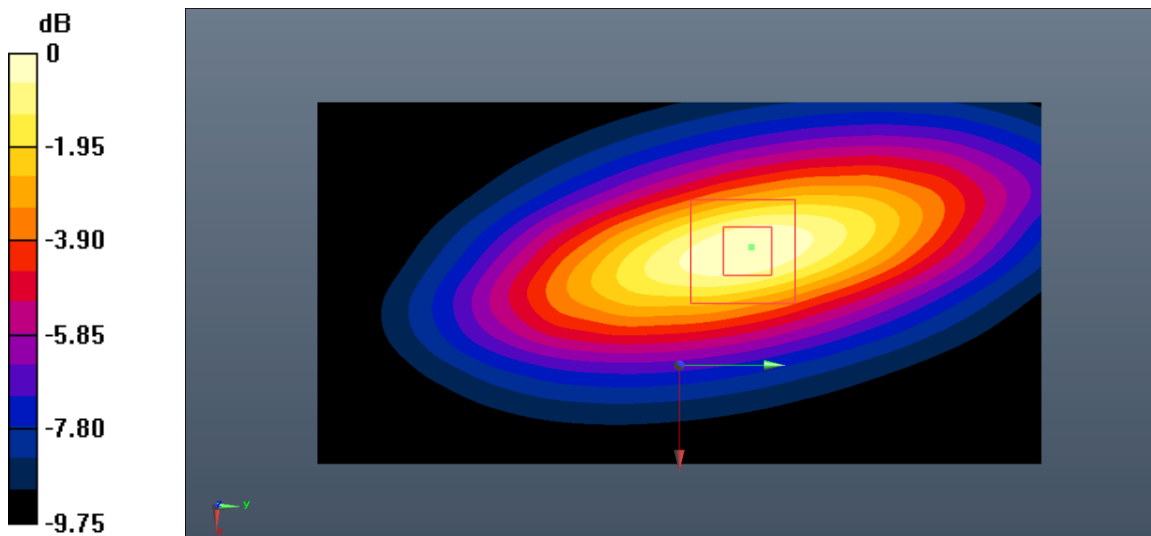

0 dB =  $2.68 \text{ W/kg}$  =  $4.28 \text{ dB W/kg}$

**Fig.B.1. Validation 750MHz 250mW**

### 835MHz

Date: 2021-1-9

Electronics: DAE4 Sn786

Medium: Head 835MHz

Medium parameters used:  $f = 835 \text{ MHz}$ ;  $\sigma = 0.909 \text{ S/m}$ ;  $\epsilon_r = 40.75$ ;  $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature:  $22.5^\circ\text{C}$  Liquid Temperature:  $22.0^\circ\text{C}$

Communication System: CW Frequency: 835 MHz Duty Cycle: 1:1

Probe: EX3DV4 – SN3633 ConvF (9.59, 9.59, 9.59);

**System Validation/Area Scan (91x161x1):** Interpolated grid:  $dx=1.000 \text{ mm}$ ,  $dy=1.000 \text{ mm}$

Reference Value =  $63.124 \text{ V/m}$ ; Power Drift =  $0.10 \text{ dB}$

**SAR(1 g) =  $2.37 \text{ W/kg}$ ; SAR(10 g) =  $1.55 \text{ W/kg}$**

Maximum value of SAR (interpolated) =  $3.46 \text{ W/kg}$


**System Validation/Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=5\text{mm}$

Reference Value =  $63.124 \text{ V/m}$ ; Power Drift =  $0.10 \text{ dB}$

Peak SAR (extrapolated) =  $4.25 \text{ W/kg}$

**SAR(1 g) =  $2.45 \text{ W/kg}$ ; SAR(10 g) =  $1.59 \text{ W/kg}$**

Maximum value of SAR (measured) =  $3.50 \text{ W/kg}$

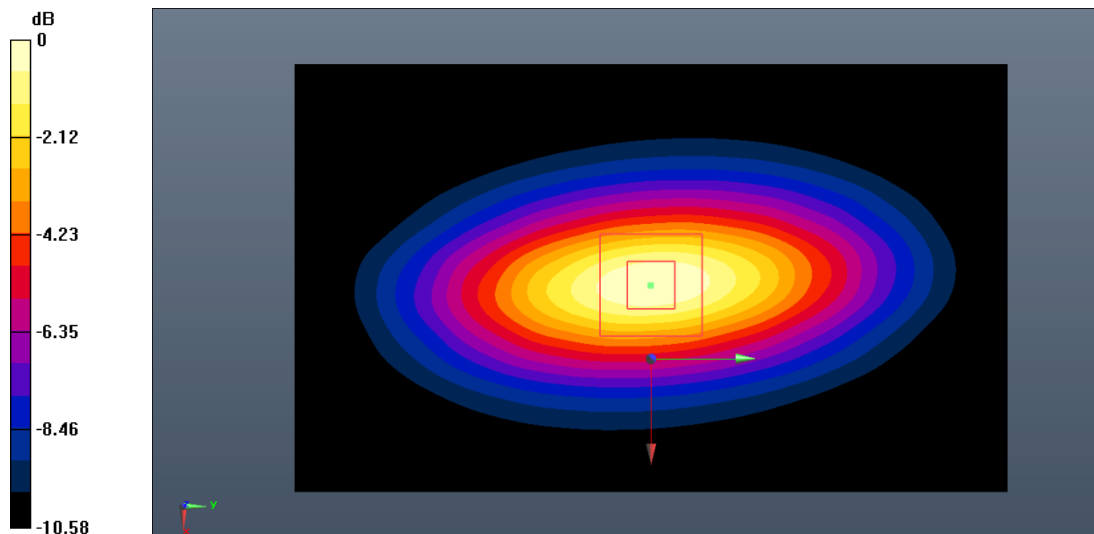

0 dB =  $3.50 \text{ W/kg}$  =  $5.44 \text{ dB W/kg}$

**Fig.B.2. Validation 835MHz 250mW**

### 1750MHz

Date: 2021-1-11

Electronics: DAE4 Sn786

Medium: Head 1750MHz

Medium parameters used:  $f = 1750 \text{ MHz}$ ;  $\sigma = 1.384 \text{ S/m}$ ;  $\epsilon_r = 39.536$ ;  $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature:  $22.2^\circ\text{C}$  Liquid Temperature:  $21.7^\circ\text{C}$

Communication System: CW\_TMC Frequency: 1750 MHz Duty Cycle: 1:1

Probe: EX3DV4 – SN3633 ConvF (8.09, 8.09, 8.09);

**System Validation/Area Scan (81x121x1):** Interpolated grid:  $dx=1.000 \text{ mm}$ ,  $dy=1.000 \text{ mm}$

Reference Value =  $78.009 \text{ V/m}$ ; Power Drift =  $0.05 \text{ dB}$

**SAR(1 g) =  $9.32 \text{ W/kg}$ ; SAR(10 g) =  $4.86 \text{ W/kg}$**

Maximum value of SAR (interpolated) =  $10.6 \text{ W/kg}$


**System Validation/Zoom Scan (7x7x7)/Cube0:** Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=5\text{mm}$

Reference Value =  $78.009 \text{ V/m}$ ; Power Drift =  $0.05 \text{ dB}$

Peak SAR (extrapolated) =  $18.5 \text{ W/kg}$

**SAR(1 g) =  $9.47 \text{ W/kg}$ ; SAR(10 g) =  $4.95 \text{ W/kg}$**

Maximum value of SAR (measured) =  $10.7 \text{ W/kg}$

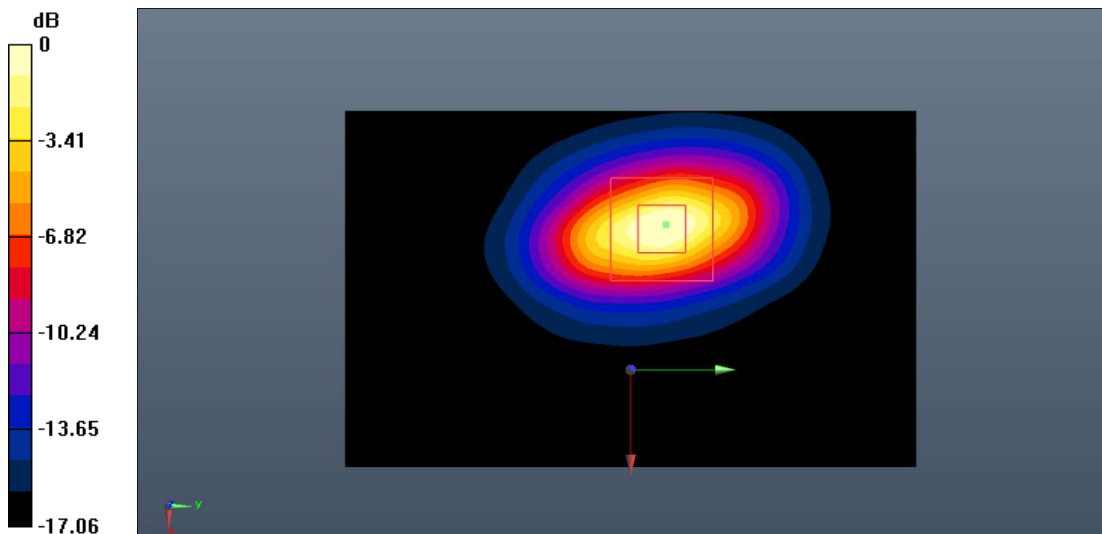

0 dB =  $10.7 \text{ W/kg}$  =  $10.29 \text{ dB W/kg}$

**Fig.B.3. Validation 1750MHz 250mW**

# 1900MHz

Date: 2021-1-12

Electronics: DAE4 Sn786

Medium: Head 1900MHz

Medium parameters used:  $f = 1900 \text{ MHz}$ ;  $\sigma = 1.393 \text{ S/m}$ ;  $\epsilon_r = 40.674$ ;  $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature:  $22.5^\circ\text{C}$  Liquid Temperature:  $22.0^\circ\text{C}$

Communication System: CW\_TMC Frequency: 1900 MHz Duty Cycle: 1:1

Probe: EX3DV4 – SN3633 ConvF (7.76, 7.76, 7.76);

**System Validation/Area Scan (91x91x1):** Interpolated grid:  $dx=1.000 \text{ mm}$ ,  $dy=1.000 \text{ mm}$

Reference Value = 78.842 V/m; Power Drift = -0.03 dB

**SAR(1 g) = 10.0 W/kg; SAR(10 g) = 5.26 W/kg**

Maximum value of SAR (interpolated) = 11.5 W/kg


**System Validation/Zoom Scan (7x7x7)/Cube0:** Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 78.842 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 19.9 W/kg

**SAR(1 g) = 9.86 W/kg; SAR(10 g) = 5.18 W/kg**

Maximum value of SAR (measured) = 11.2 W/kg

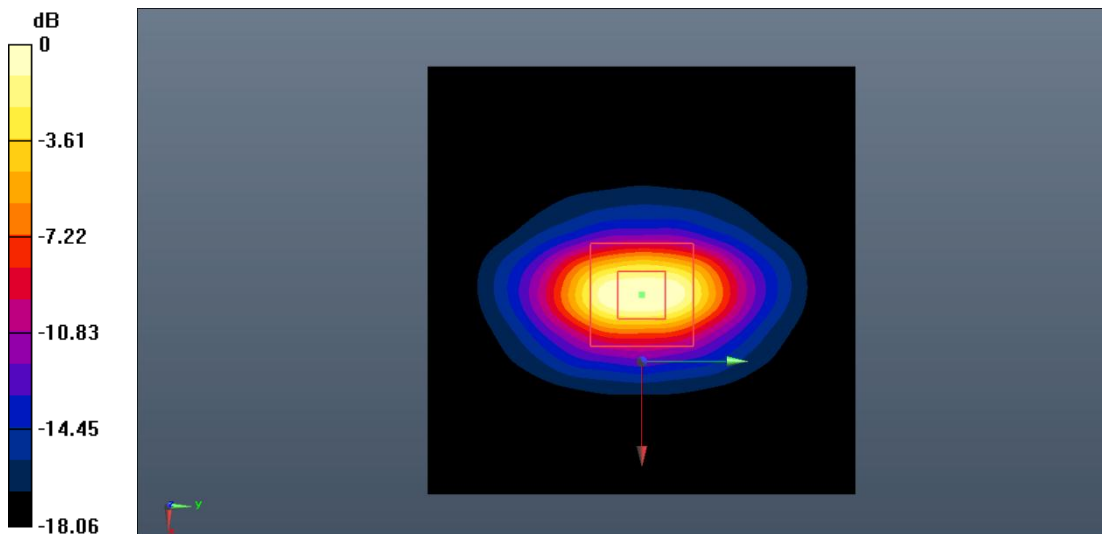

0 dB = 11.2 W/kg = 10.49 dB W/kg

**Fig.B.4. Validation 1900MHz 250mW**

## 2450MHz

Date: 2021-1-14

Electronics: DAE4 Sn786

Medium: Head 2450MHz

Medium parameters used:  $f = 2450$  MHz;  $\sigma = 1.834$  S/m;  $\epsilon_r = 38.415$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.3°C Liquid Temperature: 21.8°C

Communication System: CW\_TMC Frequency: 2450 MHz Duty Cycle: 1:1

Probe: EX3DV4 – SN3633 ConvF (7.43, 7.43, 7.43);

**System Validation/Area Scan (81x121x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Reference Value = 89.055 V/m; Power Drift = -0.02 dB

**SAR(1 g) = 13.6 W/kg; SAR(10 g) = 6.18 W/kg**

Maximum value of SAR (interpolated) = 15.4 W/kg


**System Validation/Zoom Scan (7x7x7)/Cube0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 89.055 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 30.9 W/kg

**SAR(1 g) = 13.4 W/kg; SAR(10 g) = 6.10 W/kg**

Maximum value of SAR (measured) = 15.1 W/kg

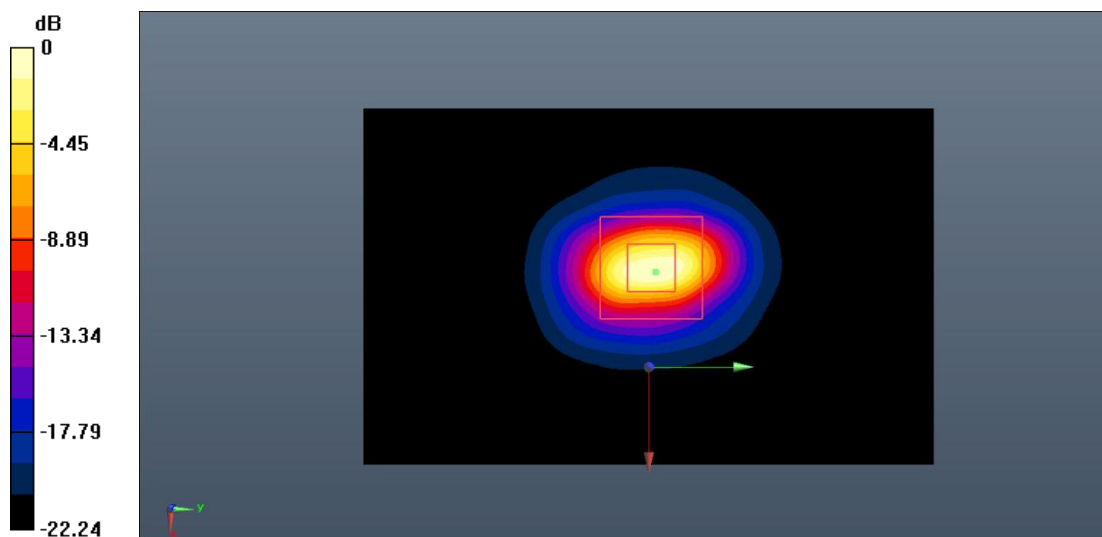

0 dB = 15.1 W/kg = 11.79 dB W/kg

**Fig.B.5. Validation 2450MHz 250mW**

## 2550MHz

Date: 2021-1-13

Electronics: DAE4 Sn786

Medium: Head 2550MHz

Medium parameters used:  $f = 2550 \text{ MHz}$ ;  $\sigma = 1.955 \text{ S/m}$ ;  $\epsilon_r = 38.533$ ;  $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature:  $22.5^\circ\text{C}$  Liquid Temperature:  $22.0^\circ\text{C}$

Communication System: CW\_TMC Frequency: 2550 MHz Duty Cycle: 1:1

Probe: EX3DV4 – SN3633 ConvF (7.20, 7.20, 7.20);

**System Validation/Area Scan (91x91x1):** Interpolated grid:  $dx=1.000 \text{ mm}$ ,  $dy=1.000 \text{ mm}$

Reference Value =  $94.652 \text{ V/m}$ ; Power Drift =  $0.09 \text{ dB}$

**SAR(1 g) =  $14.6 \text{ W/kg}$ ; SAR(10 g) =  $6.62 \text{ W/kg}$**

Maximum value of SAR (interpolated) =  $16.9 \text{ W/kg}$


**System Validation/Zoom Scan (7x7x7)/Cube0:** Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=5\text{mm}$

Reference Value =  $94.652 \text{ V/m}$ ; Power Drift =  $0.09 \text{ dB}$

Peak SAR (extrapolated) =  $35.5 \text{ W/kg}$

**SAR(1 g) =  $15.0 \text{ W/kg}$ ; SAR(10 g) =  $6.82 \text{ W/kg}$**

Maximum value of SAR (measured) =  $17.2 \text{ W/kg}$

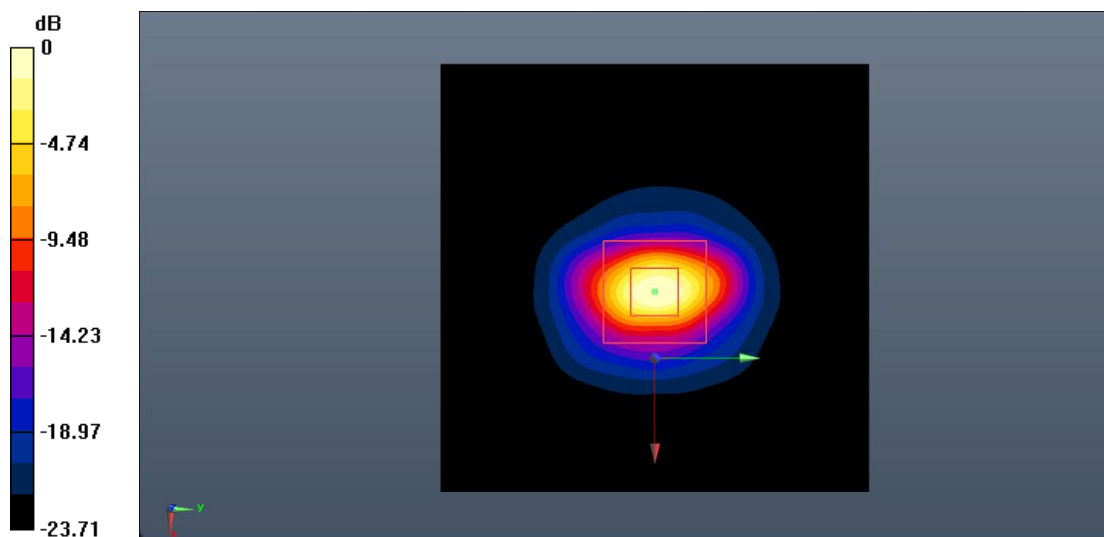


0 dB =  $17.2 \text{ W/kg}$  =  $12.36 \text{ dB W/kg}$

**Fig.B.6. Validation 2550MHz 250mW**

## ANNEX C: SAR Measurement Setup

### C.1. Measurement Set-up

DASY5 system for performing compliance tests is illustrated above graphically. This system consists of the following items:

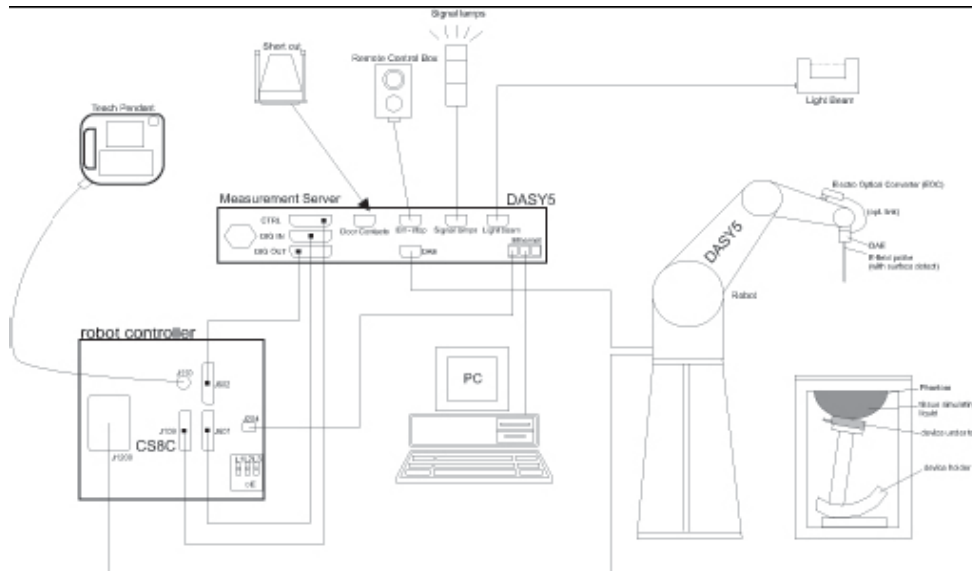

Picture C.1 SAR Lab Test Measurement Set-up

- A standard high precision 6-axis robot (Stäubli TX=RX family) with controller, teach pendant and software. An arm extension for accommodating the data acquisition electronics (DAE).
- An isotropic field probe optimized and calibrated for the targeted measurement.
- A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- The Electro-optical converter (EOC) performs the conversion from optical to electrical signals for the digital communication to the DAE. To use optical surface detection, a special version of the EOC is required. The EOC signal is transmitted to the measurement server.
- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- The Light Beam used is for probe alignment. This improves the (absolute) accuracy of the probe positioning.
- A computer running WinXP and the DASY5 software.
- Remote control and teach pendant as well as additional circuitry for robot safety such as warning lamps, etc.
- The phantom, the device holder and other accessories according to the targeted measurement.

## C.2. DASY5 E-field Probe System

The SAR measurements were conducted with the dosimetric probe designed in the classical triangular configuration and optimized for dosimetric evaluation. The probe is constructed using the thick film technique; with printed resistive lines on ceramic substrates. The probe is equipped with an optical multifiber line ending at the front of the probe tip. It is connected to the EOC box on the robot arm and provides an automatic detection of the phantom surface. Half of the fibers are connected to a pulsed infrared transmitter, the other half to a synchronized receiver. As the probe approaches the surface, the reflection from the surface produces a coupling from the transmitting to the receiving fibers. This reflection increases first during the approach, reaches maximum and then decreases. If the probe is flatly touching the surface, the coupling is zero. The distance of the coupling maximum to the surface is independent of the surface reflectivity and largely independent of the surface to probe angle. The DASY5 software reads the reflection during a software approach and looks for the maximum using 2<sup>nd</sup> order curve fitting. The approach is stopped at reaching the maximum.

### Probe Specifications:

|                       |                                                                                                   |
|-----------------------|---------------------------------------------------------------------------------------------------|
| <b>Model:</b>         | ES3DV3, EX3DV4                                                                                    |
| <b>Frequency</b>      | 10MHz — 6.0GHz(EX3DV4)                                                                            |
| <b>Range:</b>         | 10MHz — 4GHz(ES3DV3)                                                                              |
| <b>Calibration:</b>   | In head and body simulating tissue at<br>Frequencies from 835 up to 5800MHz                       |
| <b>Linearity:</b>     | ± 0.2 dB(30 MHz to 6 GHz) for EX3DV4<br>± 0.2 dB(30 MHz to 4 GHz) for ES3DV3                      |
| <b>Dynamic Range:</b> | 10 mW/kg — 100W/kg                                                                                |
| <b>Probe Length:</b>  | 330 mm                                                                                            |
| <b>Probe Tip</b>      |                                                                                                   |
| <b>Length:</b>        | 20 mm                                                                                             |
| <b>Body Diameter:</b> | 12 mm                                                                                             |
| <b>Tip Diameter:</b>  | 2.5 mm (3.9 mm for ES3DV3)                                                                        |
| <b>Tip-Center:</b>    | 1 mm (2.0mm for ES3DV3)                                                                           |
| <b>Application:</b>   | SAR Dosimetry Testing<br>Compliance tests of mobile phones<br>Dosimetry in strong gradient fields |



Picture C.2 Near-field Probe



Picture C.3 E-field Probe

## C.3. E-field Probe Calibration

Each E-Probe/Probe Amplifier combination has unique calibration parameters. A TEM cell calibration procedure is conducted to determine the proper amplifier settings to enter in the probe parameters. The amplifier settings are determined for a given frequency by subjecting the probe to a known E-field density (1 mW/cm<sup>2</sup>) using an RF Signal generator, TEM cell, and RF Power Meter.

The free space E-field from amplified probe outputs is determined in a test chamber. This calibration can be performed in a TEM cell if the frequency is below 1 GHz and in a waveguide or other methodologies above 1 GHz for free space. For the free space calibration, the probe is placed

in the volumetric center of the cavity and at the proper orientation with the field. The probe is then rotated 360 degrees until the three channels show the maximum reading. The power density readings equates to 1 mW/ cm<sup>2</sup>:

E-field temperature correlation calibration is performed in a flat phantom filled with the appropriate simulated brain tissue. The E-field in the medium correlates with the temperature rise in the dielectric medium. For temperature correlation calibration a RF transparent thermistor-based temperature probe is used in conjunction with the E-field probe.

$$SAR = C \frac{\Delta T}{\Delta t}$$

Where:

$\Delta t$  = Exposure time (30 seconds),

C = Heat capacity of tissue (brain or muscle),

$\Delta T$  = Temperature increase due to RF exposure.

$$SAR = \frac{|E|^2 \cdot \sigma}{\rho}$$

Where:

$\sigma$  = Simulated tissue conductivity,

$\rho$  = Tissue density (kg/m<sup>3</sup>).

## C.4. Other Test Equipment

### C.4.1. Data Acquisition Electronics (DAE)

The data acquisition electronics consist of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD-converter and a command decoder with a control logic unit. Transmission to the measurement server is accomplished through an optical downlink for data and status information, as well as an optical uplink for commands and the clock.

The mechanical probe mounting device includes two different sensor systems for frontal and sideways probe contacts. They are used for mechanical surface detection and probe collision detection.

The input impedance of the DAE is 200 MOhm; the inputs are symmetrical and floating. Common mode rejection is above 80 dB.



PictureC.4: DAE

#### C.4.2. Robot

The SPEAG DASY system uses the high precision robots (DASY5: RX160L) type from Stäubli SA (France). For the 6-axis controller system, the robot controller version from Stäubli is used. The Stäubli robot series have many features that are important for our application:

- High precision (repeatability 0.02mm)
- High reliability (industrial design)
- Low maintenance costs (virtually maintenance free due to direct drive gears; no belt drives)
- Jerk-free straight movements (brushless synchron motors; no stepper motors)
- Low ELF interference (motor control fields shielded via the closed metallic construction shields)



Picture C.5 DASY 5

#### C.4.3. Measurement Server

The Measurement server is based on a PC/104 CPU board with CPU (DASY5: 400 MHz, Intel Celeron), chipdisk (DASY5:128MB), RAM (DASY5:128MB). The necessary circuits for communication with the DAE electronic box, as well as the 16 bit AD converter system for optical detection and digital I/O interface are contained on the DASY I/O board, which is directly connected to the PC/104 bus of the CPU board.

The measurement server performs all real-time data evaluation of field measurements and surface detection, controls robot movements and handles safety operation. The PC operating system cannot interfere with these time critical processes. All connections are supervised by a watchdog, and disconnection of any of the cables to the measurement server will automatically disarm the robot and disable all program-controlled robot movements. Furthermore, the measurement server is equipped with an expansion port which is reserved for future applications. Please note that this expansion port does not have a standardized pinout, and therefore only devices provided by SPEAG can be connected. Devices from any other supplier could seriously damage the measurement server.



Picture C.6 Server for DASY 5

#### C.4.4. Device Holder for Phantom

The SAR in the phantom is approximately inversely proportional to the square of the distance between the source and the liquid surface. For a source at 5mm distance, a positioning uncertainty of  $\pm 0.5\text{mm}$  would produce a SAR uncertainty of  $\pm 20\%$ . Accurate device positioning is therefore crucial for accurate and repeatable measurements. The positions in which the devices must be measured are defined by the standards.

The DASY device holder is designed to cope with the different positions given in the standard. It has two scales for device rotation (with respect to the body axis) and device inclination (with respect to the line between the ear reference points). The rotation centers for both scales is the ear reference point (ERP). Thus the device needs no repositioning when changing the angles.

The DASY device holder is constructed of low-loss POM material having the following dielectric

parameters: relative permittivity  $\epsilon = 3$  and loss tangent  $\delta = 0.02$ . The amount of dielectric material has been reduced in the closest vicinity of the device, since measurements have suggested that the influence of the clamp on the test results could thus be lowered.

<Laptop Extension Kit>

The extension is lightweight and made of POM, acrylic glass and foam. It fits easily on the upper part of the Mounting Device in place of the phone positioner. The extension is fully compatible with the Twin-SAM and ELI phantoms.



Picture C.7-1: Device Holder



Picture C.7-2: Laptop Extension Kit

#### C.4.5. Phantom

The SAM Twin Phantom V4.0 is constructed of a fiberglass shell integrated in a table. The shape of the shell is based on data from an anatomical study designed to

Represent the 90<sup>th</sup> percentile of the population. The phantom enables the dissymmetric evaluation of SAR for both left and right handed handset usage, as well as body-worn usage using the flat phantom region. Reference markings on the Phantom allow the complete setup of all predefined phantom positions and measurement grids by manually teaching three points in the robot. The shell phantom has a 2mm shell thickness (except the ear region where shell thickness increases to 6 mm).

Shell Thickness:  $2 \pm 0.2$  mm  
Filling Volume: Approx. 25 liters  
Dimensions: 810 x 1000 x 500 mm (H x L x W)  
Available: Special




**Picture C.8: SAM Twin Phantom**

## ANNEX D: Position of the wireless device in relation to the phantom

### D.1. General considerations

This standard specifies two handset test positions against the head phantom – the “cheek” position and the “tilt” position.

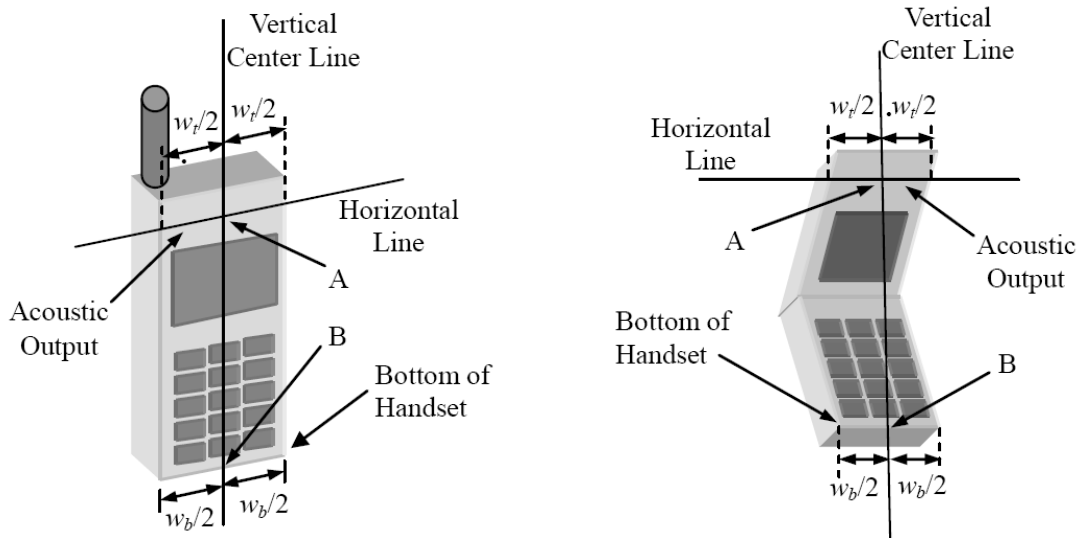


$w_t$  Width of the handset at the level of the acoustic

$w_b$  Width of the bottom of the handset


A Midpoint of the width  $w_t$  of the handset at the level of the acoustic output

B Midpoint of the width  $w_b$  of the bottom of the handset

Picture D.1-a Typical “fixed” case handset      Picture D.1-b Typical “clam-shell” case handset

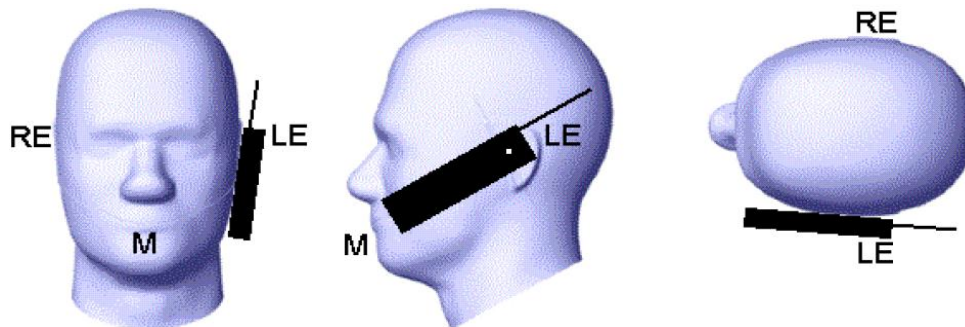


Picture D.2 Cheek position of the wireless device on the left side of SAM

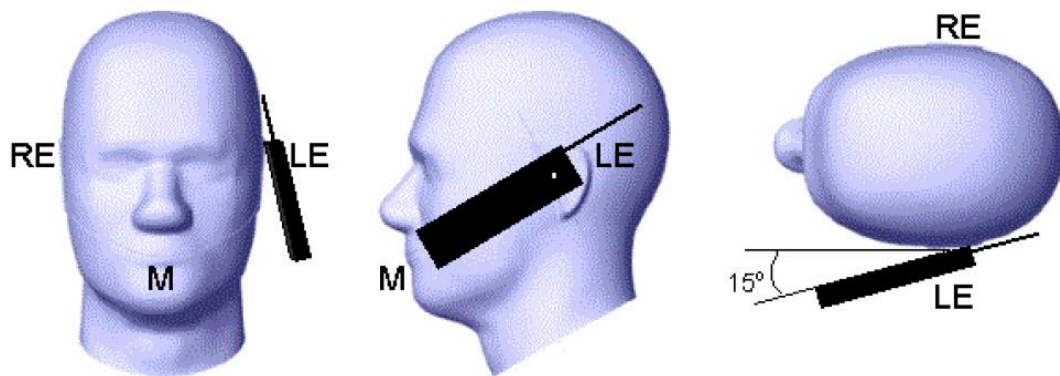

Picture D.3 Tilt position of the wireless device on the left side of SAM

## D.2. Body-worn device

A typical example of a body-worn device is a mobile phone, wireless enabled PDA or other battery operated wireless device with the ability to transmit while mounted on a person's body using a carry accessory approved by the wireless device manufacturer.

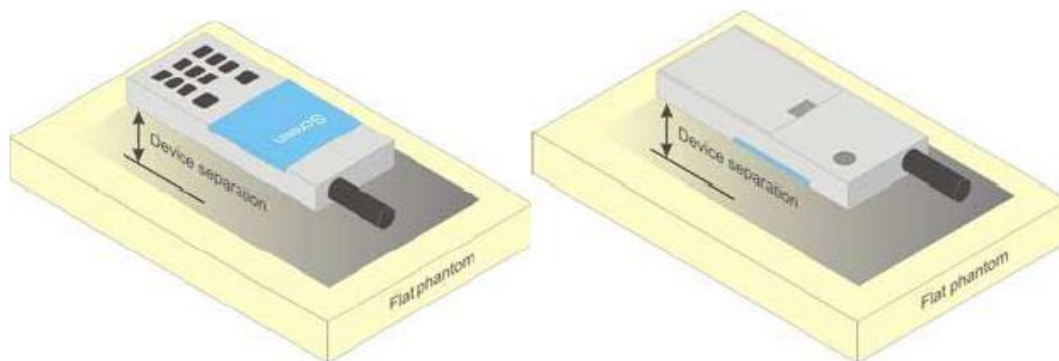


Picture D.4 Test positions for body-worn devices

## D.3. Desktop device

A typical example of a desktop device is a wireless enabled desktop computer placed on a table or desk when used.

The DUT shall be positioned at the distance and in the orientation to the phantom that corresponds to the intended use as specified by the manufacturer in the user instructions. For devices that employ an external antenna with variable positions, tests shall be performed for all antenna positions specified. Picture 8.5 show positions for desktop device SAR tests. If the intended use is not specified, the device shall be tested directly against the flat phantom.

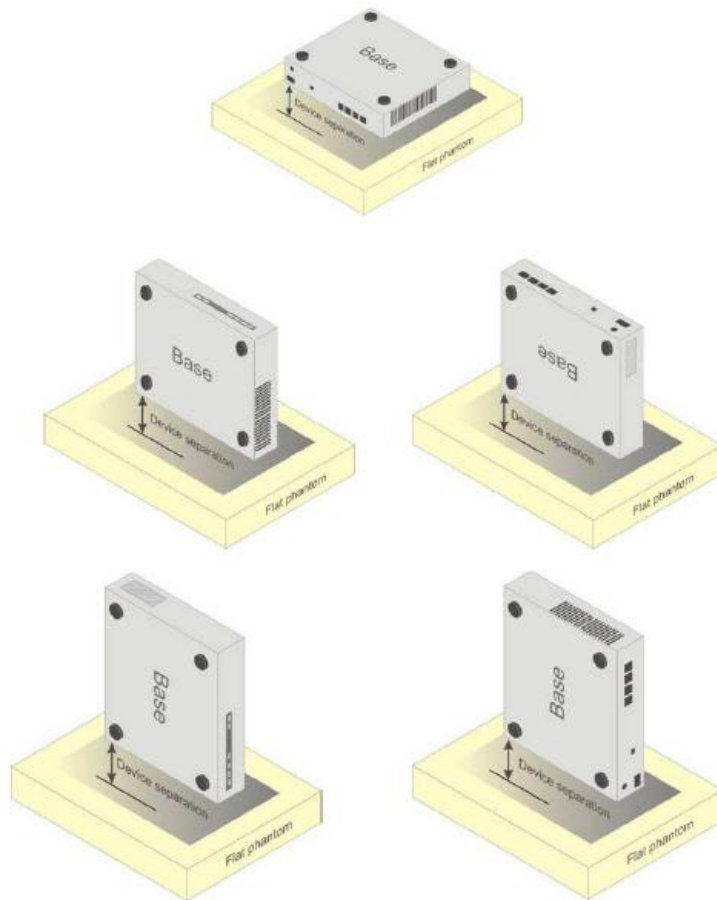

Picture D.5 Test positions for desktop devices

#### D.4. DUT Setup Photos



Picture D.6

## ANNEX E: Equivalent Media Recipes

The liquid used for the frequency range of 700-6000 MHz consisted of water, sugar, salt, preventol, glycol monobutyl and Cellulose. The liquid has been previously proven to be suited for worst-case. The Table E.1 shows the detail solution. It's satisfying the latest tissue dielectric parameters requirements proposed by the IEEE 1528 and IEC 62209.

**Table E.1: Composition of the Tissue Equivalent Matter**

| Frequency (MHz)                    | 835 Head                         | 835 Body                         | 1900 Head                        | 1900 Body                        | 2450 Head                        | 2450 Body                        | 5800 Head                        | 5800 Body                        |
|------------------------------------|----------------------------------|----------------------------------|----------------------------------|----------------------------------|----------------------------------|----------------------------------|----------------------------------|----------------------------------|
| Ingredients (% by weight)          |                                  |                                  |                                  |                                  |                                  |                                  |                                  |                                  |
| Water                              | 41.45                            | 52.5                             | 55.242                           | 69.91                            | 58.79                            | 72.60                            | 65.53                            | 65.53                            |
| Sugar                              | 56.0                             | 45.0                             | \                                | \                                | \                                | \                                | \                                | \                                |
| Salt                               | 1.45                             | 1.4                              | 0.306                            | 0.13                             | 0.06                             | 0.18                             | \                                | \                                |
| Preventol                          | 0.1                              | 0.1                              | \                                | \                                | \                                | \                                | \                                | \                                |
| Cellulose                          | 1.0                              | 1.0                              | \                                | \                                | \                                | \                                | \                                | \                                |
| Glycol Monobutyl                   | \                                | \                                | 44.452                           | 29.96                            | 41.15                            | 27.22                            | \                                | \                                |
| Diethylenglycol monohexylether     | \                                | \                                | \                                | \                                | \                                | \                                | 17.24                            | 17.24                            |
| Triton X-100                       | \                                | \                                | \                                | \                                | \                                | \                                | 17.24                            | 17.24                            |
| Dielectric Parameters Target Value | $\epsilon=41.5$<br>$\sigma=0.90$ | $\epsilon=55.2$<br>$\sigma=0.97$ | $\epsilon=40.0$<br>$\sigma=1.40$ | $\epsilon=53.3$<br>$\sigma=1.52$ | $\epsilon=39.2$<br>$\sigma=1.80$ | $\epsilon=52.7$<br>$\sigma=1.95$ | $\epsilon=35.3$<br>$\sigma=5.27$ | $\epsilon=48.2$<br>$\sigma=6.00$ |

**Note: There is a little adjustment respectively for 750, 1800, 2600, 5200, 5300, and 5600, based on the recipe of closest frequency in table E.1**

## ANNEX F: System Validation

The SAR system must be validated against its performance specifications before it is deployed. When SAR probes, system components or software are changed, upgraded or recalibrated, these must be validated with the SAR system(s) that operates with such components.

**Table F.1: System Validation**

| Probe SN. | Liquid name  | Validation date | Frequency point | Status (OK or Not) |
|-----------|--------------|-----------------|-----------------|--------------------|
| 3633      | Head 750MHz  | 2020-04-03      | 750 MHz         | OK                 |
| 3633      | Head 835MHz  | 2020-04-03      | 835 MHz         | OK                 |
| 3633      | Head 1750MHz | 2020-04-03      | 1750 MHz        | OK                 |
| 3633      | Head 1900MHz | 2020-04-03      | 1900 MHz        | OK                 |
| 3633      | Head 2300MHz | 2020-04-04      | 2300 MHz        | OK                 |
| 3633      | Head 2450MHz | 2020-04-04      | 2450 MHz        | OK                 |
| 3633      | Head 2550MHz | 2020-04-04      | 2550 MHz        | OK                 |
| 3633      | Head 5200MHz | 2020-04-05      | 5250 MHz        | OK                 |
| 3633      | Head 5600MHz | 2020-04-05      | 5600 MHz        | OK                 |
| 3633      | Head 5750MHz | 2020-04-05      | 5750 MHz        | OK                 |



No. I20N03261-SAR

**ANNEX G: DAE Calibration Certificate****DAE4 SN: 786 Calibration Certificate**In Collaboration with  
**s p e a g**  
CALIBRATION LABORATORYAdd: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China  
Tel: +86-10-62304633-2512 Fax: +86-10-62304633-2504  
E-mail: cttl@chinattl.com [Http://www.chinattl.cn](http://www.chinattl.cn)中国认可  
国际互认  
校准  
CALIBRATION  
CNAS L0570Client : **CTTL(South Branch)**Certificate No: **Z20-60101****CALIBRATION CERTIFICATE**Object **DAE4 - SN: 786**Calibration Procedure(s) **FF-Z11-002-01  
Calibration Procedure for the Data Acquisition Electronics  
(DAEx)**Calibration date: **March 03, 2020**

This calibration Certificate documents the traceability to national standards, which realize the physical units of measurements(SI). The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature(22±3)°C and humidity<70%.

Calibration Equipment used (M&amp;TE critical for calibration)

| Primary Standards      | ID #    | Cal Date(Calibrated by, Certificate No.) | Scheduled Calibration |
|------------------------|---------|------------------------------------------|-----------------------|
| Process Calibrator 753 | 1971018 | 24-Jun-19 (CTTL, No.J19X05126)           | Jun-20                |

|                | Name        | Function           | Signature |
|----------------|-------------|--------------------|-----------|
| Calibrated by: | Yu Zongying | SAR Test Engineer  |           |
| Reviewed by:   | Lin Hao     | SAR Test Engineer  |           |
| Approved by:   | Qi Dianyuan | SAR Project Leader |           |

Issued: March 05, 2020

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

Certificate No: Z20-60101

Page 1 of 3



Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China  
Tel: +86-10-62304633-2512 Fax: +86-10-62304633-2504  
E-mail: [ctl@chinattl.com](mailto:ctl@chinattl.com) [Http://www.chinattl.cn](http://www.chinattl.cn)

**Glossary:**

DAE data acquisition electronics  
Connector angle information used in DASY system to align probe sensor X to the robot coordinate system.

**Methods Applied and Interpretation of Parameters:**

- *DC Voltage Measurement:* Calibration Factor assessed for use in DASY system by comparison with a calibrated instrument traceable to national standards. The figure given corresponds to the full scale range of the voltmeter in the respective range.
- *Connector angle:* The angle of the connector is assessed measuring the angle mechanically by a tool inserted. Uncertainty is not required.
- The report provide only calibration results for DAE, it does not contain other performance test results.



Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China  
Tel: +86-10-62304633-2512 Fax: +86-10-62304633-2504  
E-mail: cttl@chinattl.com Http://www.chinattl.cn

#### DC Voltage Measurement

A/D - Converter Resolution nominal

High Range: 1LSB =  $6.1\mu\text{V}$ , full range =  $-100\dots+300\text{ mV}$

Low Range: 1LSB =  $61\text{nV}$ , full range =  $-1\dots+3\text{mV}$



DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

| Calibration Factors | X                          | Y                          | Z                          |
|---------------------|----------------------------|----------------------------|----------------------------|
| High Range          | $404.081 \pm 0.15\% (k=2)$ | $404.251 \pm 0.15\% (k=2)$ | $404.649 \pm 0.15\% (k=2)$ |
| Low Range           | $3.97247 \pm 0.7\% (k=2)$  | $3.97408 \pm 0.7\% (k=2)$  | $3.95771 \pm 0.7\% (k=2)$  |

#### Connector Angle

|                                           |                           |
|-------------------------------------------|---------------------------|
| Connector Angle to be used in DASY system | $229.5^\circ \pm 1^\circ$ |
|-------------------------------------------|---------------------------|

**ANNEX H: Probe Calibration Certificate****Probe EX3DV4-SN: 3633 Calibration Certificate**

|                                                                                                                                                                                                                                                                           |                                                                       |                                                                                                                                                                        |                                                                                                    |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------|
|  In Collaboration with<br><br><b>CALIBRATION LABORATORY</b>                                             |                                                                       |   | 中国认可<br>国际互认<br>校准<br>CALIBRATION<br>CNAS L0570                                                    |
| Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China<br>Tel: +86-10-62304633-2512 Fax: +86-10-62304633-2504<br>E-mail: cttl@chinattl.com <a href="http://www.chinattl.cn">Http://www.chinattl.cn</a>                                                         |                                                                       |                                                                                                                                                                        |                                                                                                    |
| Client                                                                                                                                                                                                                                                                    | <b>CTTL(South Branch)</b>                                             |                                                                                                                                                                        | Certificate No: <b>Z20-60108</b>                                                                   |
| <b>CALIBRATION CERTIFICATE</b>                                                                                                                                                                                                                                            |                                                                       |                                                                                                                                                                        |                                                                                                    |
| Object                                                                                                                                                                                                                                                                    | EX3DV4 - SN : 3633                                                    |                                                                                                                                                                        |                                                                                                    |
| Calibration Procedure(s)                                                                                                                                                                                                                                                  | FF-Z11-004-01<br>Calibration Procedures for Dosimetric E-field Probes |                                                                                                                                                                        |                                                                                                    |
| Calibration date:                                                                                                                                                                                                                                                         | April 01, 2020                                                        |                                                                                                                                                                        |                                                                                                    |
| This calibration Certificate documents the traceability to national standards, which realize the physical units of measurements(SI). The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate. |                                                                       |                                                                                                                                                                        |                                                                                                    |
| All calibrations have been conducted in the closed laboratory facility: environment temperature(22±3)℃ and humidity<70%.                                                                                                                                                  |                                                                       |                                                                                                                                                                        |                                                                                                    |
| Calibration Equipment used (M&TE critical for calibration)                                                                                                                                                                                                                |                                                                       |                                                                                                                                                                        |                                                                                                    |
| Primary Standards                                                                                                                                                                                                                                                         | ID #                                                                  | Cal Date(Calibrated by, Certificate No.)                                                                                                                               | Scheduled Calibration                                                                              |
| Power Meter NRP2                                                                                                                                                                                                                                                          | 101919                                                                | 18-Jun-19(CTTL, No.J19X05125)                                                                                                                                          | Jun-20                                                                                             |
| Power sensor NRP-Z91                                                                                                                                                                                                                                                      | 101547                                                                | 18-Jun-19(CTTL, No.J19X05125)                                                                                                                                          | Jun-20                                                                                             |
| Power sensor NRP-Z91                                                                                                                                                                                                                                                      | 101548                                                                | 18-Jun-19(CTTL, No.J19X05125)                                                                                                                                          | Jun-20                                                                                             |
| Reference 10dBAttenuator                                                                                                                                                                                                                                                  | 18N50W-10dB                                                           | 10-Feb-20(CTTL, No.J20X00525)                                                                                                                                          | Feb-22                                                                                             |
| Reference 20dBAttenuator                                                                                                                                                                                                                                                  | 18N50W-20dB                                                           | 10-Feb-20(CTTL, No.J20X00526)                                                                                                                                          | Feb-22                                                                                             |
| Reference Probe EX3DV4                                                                                                                                                                                                                                                    | SN 7307                                                               | 24-May-19(SPEAG, No.EX3-7307_May19/2)                                                                                                                                  | May-20                                                                                             |
| DAE4                                                                                                                                                                                                                                                                      | SN 1525                                                               | 26-Aug-19(SPEAG, No.DAE4-1525_Aug19)                                                                                                                                   | Aug-20                                                                                             |
| Secondary Standards                                                                                                                                                                                                                                                       | ID #                                                                  | Cal Date(Calibrated by, Certificate No.)                                                                                                                               | Scheduled Calibration                                                                              |
| SignalGenerator MG3700A                                                                                                                                                                                                                                                   | 6201052605                                                            | 18-Jun-19(CTTL, No.J19X05127)                                                                                                                                          | Jun-20                                                                                             |
| Network Analyzer E5071C                                                                                                                                                                                                                                                   | MY46110673                                                            | 10-Feb-20(CTTL, No.J20X00515)                                                                                                                                          | Feb-21                                                                                             |
| Calibrated by:                                                                                                                                                                                                                                                            | Name<br>Yu Zongying                                                   | Function<br>SAR Test Engineer                                                                                                                                          | Signature<br> |
| Reviewed by:                                                                                                                                                                                                                                                              | Name<br>Lin Hao                                                       | Function<br>SAR Test Engineer                                                                                                                                          | Signature<br> |
| Approved by:                                                                                                                                                                                                                                                              | Name<br>Qi Dianyuan                                                   | Function<br>SAR Project Leader                                                                                                                                         | Signature<br> |
| Issued: April 03, 2020                                                                                                                                                                                                                                                    |                                                                       |                                                                                                                                                                        |                                                                                                    |
| This calibration certificate shall not be reproduced except in full without written approval of the laboratory.                                                                                                                                                           |                                                                       |                                                                                                                                                                        |                                                                                                    |

Certificate No: Z20-60108

Page 1 of 10



In Collaboration with  
**s p e a g**  
CALIBRATION LABORATORY

Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China  
Tel: +86-10-62304633-2512 Fax: +86-10-62304633-2504  
E-mail: cttl@chinattl.com [Http://www.chinattl.cn](http://www.chinattl.cn)

#### Glossary:

|                       |                                                                                                                                             |
|-----------------------|---------------------------------------------------------------------------------------------------------------------------------------------|
| TSL                   | tissue simulating liquid                                                                                                                    |
| NORM <sub>x,y,z</sub> | sensitivity in free space                                                                                                                   |
| ConvF                 | sensitivity in TSL / NORM <sub>x,y,z</sub>                                                                                                  |
| DCP                   | diode compression point                                                                                                                     |
| CF                    | crest factor (1/duty_cycle) of the RF signal                                                                                                |
| A,B,C,D               | modulation dependent linearization parameters                                                                                               |
| Polarization $\Phi$   | $\Phi$ rotation around probe axis                                                                                                           |
| Polarization $\theta$ | $\theta$ rotation around an axis that is in the plane normal to probe axis (at measurement center), i<br>$\theta=0$ is normal to probe axis |

Connector Angle information used in DASY system to align probe sensor X to the robot coordinate system

#### Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- IEC 62209-1, "Measurement procedure for the assessment of Specific Absorption Rate (SAR) from hand-held and body-mounted devices used next to the ear (frequency range of 300 MHz to 6 GHz)", July 2016
- IEC 62209-2, "Procedure to determine the Specific Absorption Rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz)", March 2010
- KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

#### Methods Applied and Interpretation of Parameters:

- NORM<sub>x,y,z</sub>:** Assessed for E-field polarization  $\theta=0$  ( $f \leq 900\text{MHz}$  in TEM-cell;  $f > 1800\text{MHz}$ : waveguide). NORM<sub>x,y,z</sub> are only intermediate values, i.e., the uncertainties of NORM<sub>x,y,z</sub> does not effect the  $E^2$ -field uncertainty inside TSL (see below ConvF).
- NORM( $f$ ),<sub>x,y,z</sub> = NORM<sub>x,y,z</sub> \* frequency\_response** (see Frequency Response Chart). This linearization is implemented in DASY4 software versions later than 4.2. The uncertainty of the frequency response is included in the stated uncertainty of ConvF.
- DCP<sub>x,y,z</sub>:** DCP are numerical linearization parameters assessed based on the data of power sweep (no uncertainty required). DCP does not depend on frequency nor media.
- PAR:** PAR is the Peak to Average Ratio that is not calibrated but determined based on the signal characteristics.
- A<sub>x,y,z</sub>; B<sub>x,y,z</sub>; C<sub>x,y,z</sub>; V<sub>R</sub><sub>x,y,z</sub>; A,B,C** are numerical linearization parameters assessed based on the data of power sweep for specific modulation signal. The parameters do not depend on frequency nor media. VR is the maximum calibration range expressed in RMS voltage across the diode.
- ConvF and Boundary Effect Parameters:** Assessed in flat phantom using E-field (or Temperature Transfer Standard for  $f \leq 800\text{MHz}$ ) and inside waveguide using analytical field distributions based on power measurements for  $f > 800\text{MHz}$ . The same setups are used for assessment of the parameters applied for boundary compensation (alpha, depth) of which typical uncertainty valued are given. These parameters are used in DASY4 software to improve probe accuracy close to the boundary. The sensitivity in TSL corresponds to NORM<sub>x,y,z</sub> ConvF whereby the uncertainty corresponds to that given for ConvF. A frequency dependent ConvF is used in DASY version 4.4 and higher which allows extending the validity from  $\pm 50\text{MHz}$  to  $\pm 100\text{MHz}$ .
- Spherical isotropy (3D deviation from isotropy):** in a field of low gradients realized using a flat phantom exposed by a patch antenna.
- Sensor Offset:** The sensor offset corresponds to the offset of virtual measurement center from the probe tip (on probe axis). No tolerance required.
- Connector Angle:** The angle is assessed using the information gained by determining the NORM<sub>x</sub> (no uncertainty required).



Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China  
Tel: +86-10-62304633-2512 Fax: +86-10-62304633-2504  
E-mail: cttl@chinattl.com [Http://www.chinattl.cn](http://www.chinattl.cn)

## DASY/EASY – Parameters of Probe: EX3DV4 – SN:3633

### Basic Calibration Parameters

|                                      | Sensor X | Sensor Y | Sensor Z | Unc (k=2) |
|--------------------------------------|----------|----------|----------|-----------|
| Norm( $\mu V/(V/m)^2$ ) <sup>A</sup> | 0.37     | 0.37     | 0.39     | ±10.0%    |
| DCP(mV) <sup>B</sup>                 | 98.2     | 98.8     | 98.0     |           |

### Modulation Calibration Parameters

| UID | Communication System Name |   | A dB | B dB/ $\mu V$ | C   | D dB | VR mV | Unc <sup>E</sup> (k=2) |
|-----|---------------------------|---|------|---------------|-----|------|-------|------------------------|
| 0   | CW                        | X | 0.0  | 0.0           | 1.0 | 0.00 | 141.5 | ±2.3%                  |
|     |                           | Y | 0.0  | 0.0           | 1.0 |      | 141.5 |                        |
|     |                           | Z | 0.0  | 0.0           | 1.0 |      | 141.9 |                        |

The reported uncertainty of measurement is stated as the standard uncertainty of Measurement multiplied by the coverage factor k=2, which for a normal distribution Corresponds to a coverage probability of approximately 95%.

<sup>A</sup> The uncertainties of Norm X, Y, Z do not affect the E<sup>2</sup>-field uncertainty inside TSL (see Page 4 and Page 5).

<sup>B</sup> Numerical linearization parameter: uncertainty not required.

<sup>E</sup> Uncertainty is determined using the max. deviation from linear response applying rectangular distribution and is expressed for the square of the field value.



Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China  
Tel: +86-10-62304633-2512 Fax: +86-10-62304633-2504  
E-mail: [ctl@chinattl.com](mailto:ctl@chinattl.com) <http://www.chinattl.cn>

## DASY/EASY – Parameters of Probe: EX3DV4 – SN: 3633

### Calibration Parameter Determined in Head Tissue Simulating Media

| f [MHz] <sup>C</sup> | Relative Permittivity <sup>F</sup> | Conductivity (S/m) <sup>F</sup> | ConvF X | ConvF Y | ConvF Z | Alpha <sup>G</sup> | Depth <sup>G</sup> (mm) | Unct. (k=2) |
|----------------------|------------------------------------|---------------------------------|---------|---------|---------|--------------------|-------------------------|-------------|
| 750                  | 41.9                               | 0.89                            | 9.59    | 9.59    | 9.59    | 0.40               | 0.75                    | ± 12.1%     |
| 900                  | 41.5                               | 0.97                            | 9.33    | 9.33    | 9.33    | 0.21               | 1.14                    | ± 12.1%     |
| 1640                 | 40.3                               | 1.29                            | 8.17    | 8.17    | 8.17    | 0.16               | 1.22                    | ± 12.1%     |
| 1750                 | 40.1                               | 1.37                            | 8.09    | 8.09    | 8.09    | 0.15               | 1.42                    | ± 12.1%     |
| 1900                 | 40.0                               | 1.40                            | 7.76    | 7.76    | 7.76    | 0.19               | 1.14                    | ± 12.1%     |
| 2100                 | 39.8                               | 1.49                            | 7.73    | 7.73    | 7.73    | 0.18               | 1.26                    | ± 12.1%     |
| 2300                 | 39.5                               | 1.67                            | 7.69    | 7.69    | 7.69    | 0.48               | 0.78                    | ± 12.1%     |
| 2450                 | 39.2                               | 1.80                            | 7.43    | 7.43    | 7.43    | 0.50               | 0.77                    | ± 12.1%     |
| 2600                 | 39.0                               | 1.96                            | 7.20    | 7.20    | 7.20    | 0.58               | 0.72                    | ± 12.1%     |
| 3500                 | 37.9                               | 2.91                            | 6.88    | 6.88    | 6.88    | 0.35               | 1.23                    | ± 13.3%     |
| 3700                 | 37.7                               | 3.12                            | 6.57    | 6.57    | 6.57    | 0.44               | 0.98                    | ± 13.3%     |
| 3900                 | 37.5                               | 3.32                            | 6.51    | 6.51    | 6.51    | 0.35               | 1.40                    | ± 13.3%     |
| 4100                 | 37.2                               | 3.53                            | 6.44    | 6.44    | 6.44    | 0.40               | 1.20                    | ± 13.3%     |
| 4400                 | 36.9                               | 3.84                            | 6.30    | 6.30    | 6.30    | 0.35               | 1.35                    | ± 13.3%     |
| 4600                 | 36.7                               | 4.04                            | 6.10    | 6.10    | 6.10    | 0.45               | 1.40                    | ± 13.3%     |
| 4800                 | 36.4                               | 4.25                            | 5.98    | 5.98    | 5.98    | 0.45               | 1.60                    | ± 13.3%     |
| 4950                 | 36.3                               | 4.40                            | 5.80    | 5.80    | 5.80    | 0.45               | 1.45                    | ± 13.3%     |
| 5250                 | 35.9                               | 4.71                            | 5.47    | 5.47    | 5.47    | 0.45               | 1.25                    | ± 13.3%     |
| 5600                 | 35.5                               | 5.07                            | 4.72    | 4.72    | 4.72    | 0.45               | 1.50                    | ± 13.3%     |
| 5750                 | 35.4                               | 5.22                            | 4.73    | 4.73    | 4.73    | 0.45               | 1.50                    | ± 13.3%     |

<sup>C</sup> Frequency validity above 300 MHz of ±100MHz only applies for DASY v4.4 and higher (Page 2), else it is restricted to ±50MHz. The uncertainty is the RSS of ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band. Frequency validity below 300 MHz is ± 10, 25, 40, 50 and 70 MHz for ConvF assessments at 30, 64, 128, 150 and 220 MHz respectively. Above 5 GHz frequency validity can be extended to ± 110 MHz.

<sup>F</sup> At frequency below 3 GHz, the validity of tissue parameters ( $\epsilon$  and  $\sigma$ ) can be relaxed to ±10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters ( $\epsilon$  and  $\sigma$ ) is restricted to ±5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

<sup>G</sup> Alpha/Depth are determined during calibration. SPEAG warrants that the remaining deviation due to the boundary effect after compensation is always less than ± 1% for frequencies below 3 GHz and below ± 2% for the frequencies between 3-6 GHz at any distance larger than half the probe tip diameter from the boundary.



Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China  
Tel: +86-10-62304633-2512 Fax: +86-10-62304633-2504  
E-mail: cttl@chinattl.com [Http://www.chinattl.cn](http://www.chinattl.cn)

## DASY/EASY – Parameters of Probe: EX3DV4 – SN: 3633

### Calibration Parameter Determined in Body Tissue Simulating Media

| f [MHz] <sup>C</sup> | Relative Permittivity <sup>F</sup> | Conductivity (S/m) <sup>F</sup> | ConvF X | ConvF Y | ConvF Z | Alpha <sup>G</sup> | Depth <sup>G</sup> (mm) | Unct. (k=2) |
|----------------------|------------------------------------|---------------------------------|---------|---------|---------|--------------------|-------------------------|-------------|
| 750                  | 55.5                               | 0.96                            | 9.57    | 9.57    | 9.57    | 0.40               | 0.80                    | ±12.1%      |
| 900                  | 55.0                               | 1.05                            | 9.34    | 9.34    | 9.34    | 0.25               | 1.11                    | ±12.1%      |
| 1640                 | 53.8                               | 1.40                            | 8.05    | 8.05    | 8.05    | 0.22               | 1.19                    | ±12.1%      |
| 1750                 | 53.4                               | 1.49                            | 7.85    | 7.85    | 7.85    | 0.16               | 1.35                    | ±12.1%      |
| 1900                 | 53.3                               | 1.52                            | 7.66    | 7.66    | 7.66    | 0.17               | 1.32                    | ±12.1%      |
| 2100                 | 53.2                               | 1.62                            | 7.69    | 7.69    | 7.69    | 0.21               | 1.30                    | ±12.1%      |
| 2300                 | 52.9                               | 1.81                            | 7.61    | 7.61    | 7.61    | 0.50               | 0.86                    | ±12.1%      |
| 2450                 | 52.7                               | 1.95                            | 7.56    | 7.56    | 7.56    | 0.50               | 0.83                    | ±12.1%      |
| 2600                 | 52.5                               | 2.16                            | 7.33    | 7.33    | 7.33    | 0.59               | 0.74                    | ±12.1%      |
| 3500                 | 52.3                               | 3.31                            | 6.28    | 6.28    | 6.28    | 0.40               | 1.30                    | ±13.3%      |
| 3700                 | 52.1                               | 3.55                            | 6.14    | 6.14    | 6.14    | 0.40               | 1.35                    | ±13.3%      |
| 3900                 | 50.8                               | 3.78                            | 6.13    | 6.13    | 6.13    | 0.40               | 1.45                    | ±13.3%      |
| 4100                 | 50.5                               | 4.01                            | 6.12    | 6.12    | 6.12    | 0.35               | 1.40                    | ±13.3%      |
| 4400                 | 50.1                               | 4.37                            | 5.93    | 5.93    | 5.93    | 0.35               | 1.70                    | ±13.3%      |
| 4600                 | 49.8                               | 4.60                            | 5.60    | 5.60    | 5.60    | 0.45               | 1.50                    | ±13.3%      |
| 4800                 | 49.6                               | 4.83                            | 5.42    | 5.42    | 5.42    | 0.45               | 1.60                    | ±13.3%      |
| 4950                 | 49.4                               | 5.01                            | 5.22    | 5.22    | 5.22    | 0.45               | 1.70                    | ±13.3%      |
| 5250                 | 48.9                               | 5.36                            | 5.04    | 5.04    | 5.04    | 0.50               | 1.45                    | ±13.3%      |
| 5600                 | 48.5                               | 5.77                            | 4.16    | 4.16    | 4.16    | 0.55               | 1.50                    | ±13.3%      |
| 5750                 | 48.3                               | 5.94                            | 4.26    | 4.26    | 4.26    | 0.55               | 1.60                    | ±13.3%      |

<sup>C</sup> Frequency validity above 300 MHz of ±100MHz only applies for DASY v4.4 and higher (Page 2), else it is restricted to ±50MHz. The uncertainty is the RSS of ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band. Frequency validity below 300 MHz is ± 10, 25, 40, 50 and 70 MHz for ConvF assessments at 30, 64, 128, 150 and 220 MHz respectively. Above 5 GHz frequency validity can be extended to ± 110 MHz.


<sup>F</sup> At frequency below 3 GHz, the validity of tissue parameters ( $\epsilon$  and  $\sigma$ ) can be relaxed to ±10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters ( $\epsilon$  and  $\sigma$ ) is restricted to ±5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

<sup>G</sup> Alpha/Depth are determined during calibration. SPEAG warrants that the remaining deviation due to the boundary effect after compensation is always less than ± 1% for frequencies below 3 GHz and below ± 2% for the frequencies between 3-6 GHz at any distance larger than half the probe tip diameter from the boundary.



Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China  
 Tel: +86-10-62304633-2512 Fax: +86-10-62304633-2504  
 E-mail: cttl@chinattl.com [Http://www.chinattl.cn](http://www.chinattl.cn)

### Frequency Response of E-Field (TEM-Cell: ifi110 EXX, Waveguide: R22)

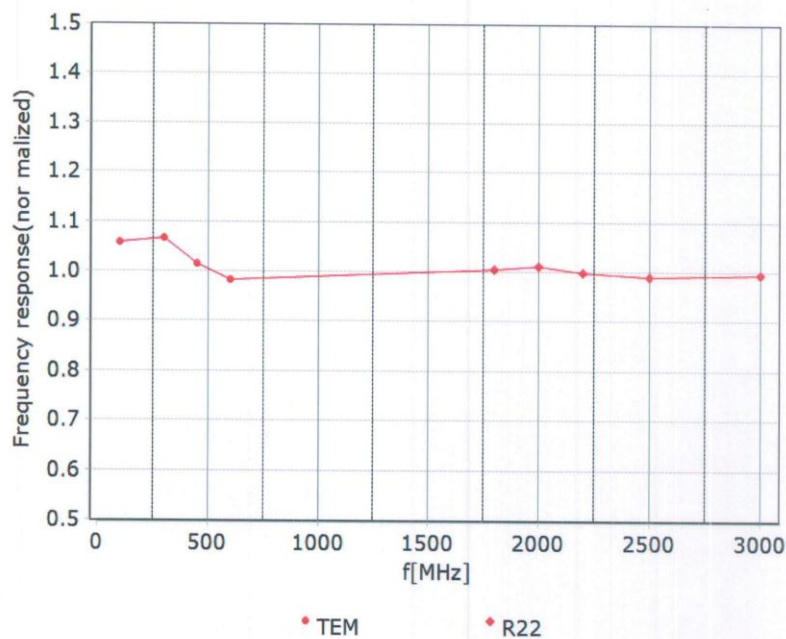


Uncertainty of Frequency Response of E-field:  $\pm 7.4\%$  ( $k=2$ )





Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China  
Tel: +86-10-62304633-2512 Fax: +86-10-62304633-2504  
E-mail: cttl@chinattl.com [Http://www.chinattl.cn](http://www.chinattl.cn)

## Receiving Pattern ( $\Phi$ ), $\theta=0^\circ$

**f=600 MHz, TEM**

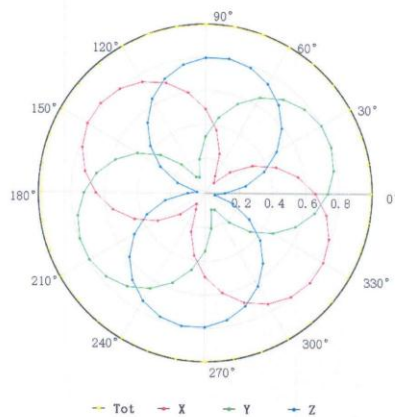

**f=1800 MHz, R22**

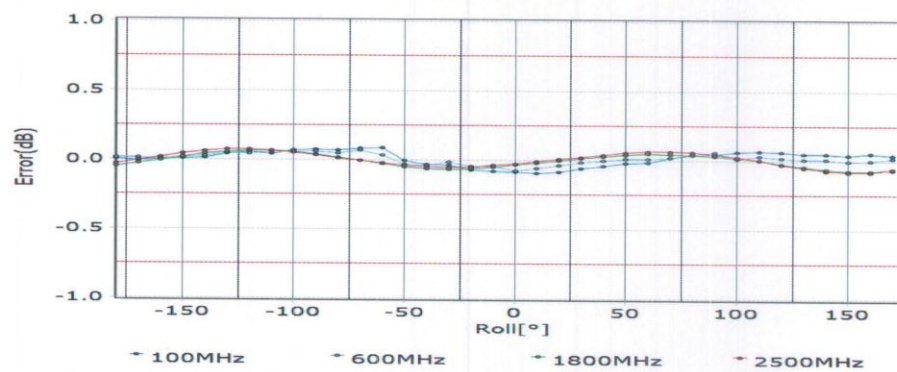
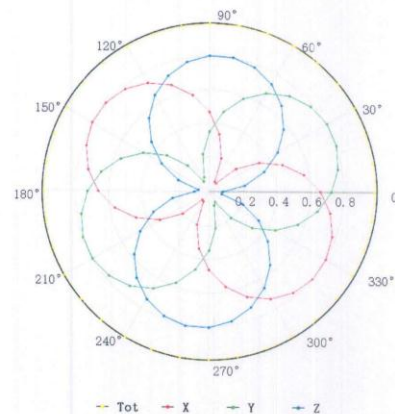


Uncertainty of Axial Isotropy Assessment:  $\pm 1.2\%$  (k=2)



Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China  
Tel: +86-10-62304633-2512 Fax: +86-10-62304633-2504  
E-mail: [ctl@chinattl.com](mailto:ctl@chinattl.com) <http://www.chinattl.cn>

### Dynamic Range $f(\text{SAR}_{\text{head}})$ (TEM cell, $f = 900 \text{ MHz}$ )

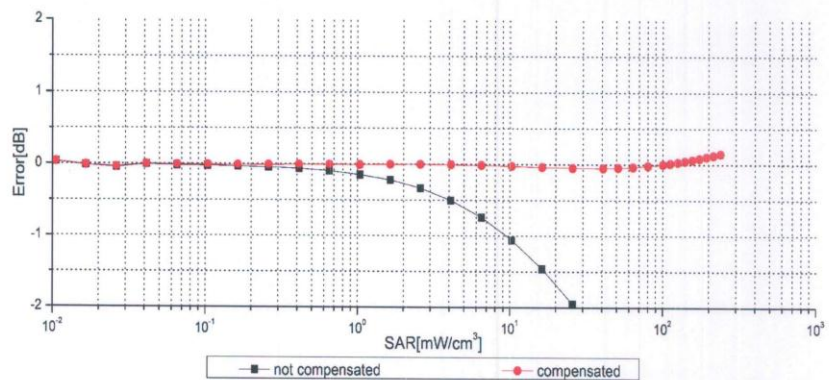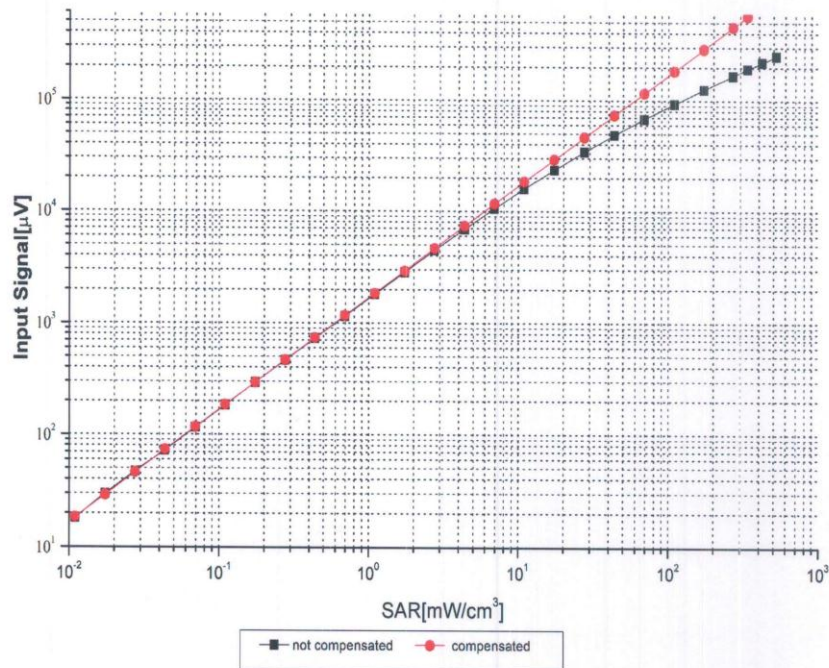

Uncertainty of Linearity Assessment:  $\pm 0.9\%$  ( $k=2$ )





Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China  
Tel: +86-10-62304633-2512 Fax: +86-10-62304633-2504  
E-mail: cttl@chinattl.com [Http://www.chinattl.cn](http://www.chinattl.cn)


## Conversion Factor Assessment

$f=750\text{ MHz}$ , WGLS R9(H\_convF)

$f=1750\text{ MHz}$ , WGLS R22(H\_convF)

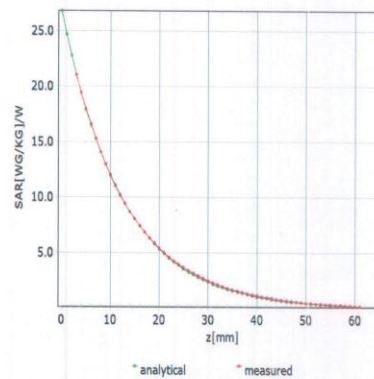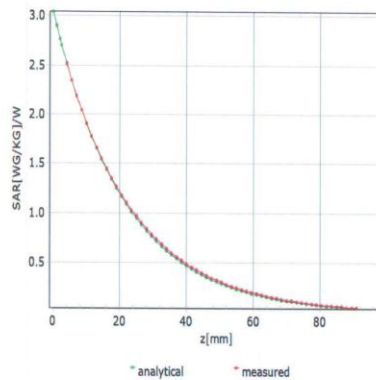

## Deviation from Isotropy in Liquid

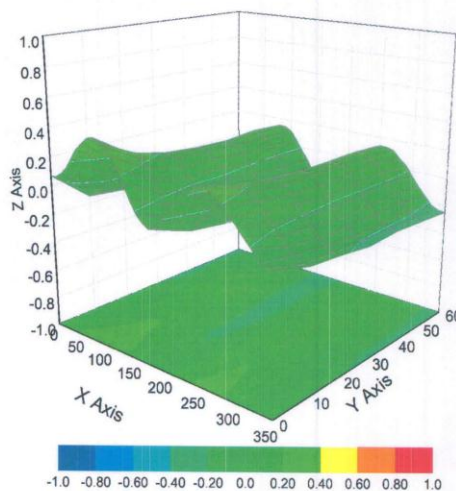

Uncertainty of Spherical Isotropy Assessment:  $\pm 3.2\%$  (K=2)

Certificate No: Z20-60108

Page 9 of 10



Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China  
Tel: +86-10-62304633-2512 Fax: +86-10-62304633-2504  
E-mail: cttl@chinattl.com [Http://www.chinattl.cn](http://www.chinattl.cn)

## DASY/EASY – Parameters of Probe: EX3DV4 – SN:3633

### Other Probe Parameters

|                                               |            |
|-----------------------------------------------|------------|
| Sensor Arrangement                            | Triangular |
| Connector Angle (°)                           | 71.2       |
| Mechanical Surface Detection Mode             | enabled    |
| Optical Surface Detection Mode                | disable    |
| Probe Overall Length                          | 337mm      |
| Probe Body Diameter                           | 10mm       |
| Tip Length                                    | 10mm       |
| Tip Diameter                                  | 2.5mm      |
| Probe Tip to Sensor X Calibration Point       | 1mm        |
| Probe Tip to Sensor Y Calibration Point       | 1mm        |
| Probe Tip to Sensor Z Calibration Point       | 1mm        |
| Recommended Measurement Distance from Surface | 1.4mm      |