



TESTING LABORATORY
CERTIFICATE #4820.01



FCC PART 15.247

TEST REPORT

For

Hytera Communications Corporation Limited

Hytera Tower, Hi-Tech Industrial Park North, 9108# Beihuan Road, Nanshan District, Shenzhen,
518057 China

FCC ID: YAMVM780

Report Type: Original Report	Product Type: Body Worn Camera
Report Number: RDG190606010-00A	
Report Date: 2019-07-25	
Reviewed By:	Jerry Zhang EMC Manager
Test Laboratory:	Bay Area Compliance Laboratories Corp. (Dongguan) No.69 Pulongcun, Puxinhu Industry Area, Tangxia, Dongguan, Guangdong, China Tel: +86-769-86858888 Fax: +86-769-86858891 www.baclcorp.com.cn

Note: This test report is prepared for the customer shown above and for the device described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. (Dongguan). This report must not be used by the customer to claim product certification, approval, or endorsement by A2LA* or any agency of the Federal Government. * This report may contain data that are not covered by the A2LA accreditation and are marked with an asterisk “*”

TABLE OF CONTENTS

GENERAL INFORMATION.....	4
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	4
OBJECTIVE	4
RELATED SUBMITTAL(S)/GRANT(S).....	4
TEST METHODOLOGY	5
MEASUREMENT UNCERTAINTY	5
TEST FACILITY	5
SYSTEM TEST CONFIGURATION.....	6
DESCRIPTION OF TEST CONFIGURATION	6
EUT EXERCISE SOFTWARE	6
EQUIPMENT MODIFICATIONS	6
SUPPORT CABLE LIST AND DETAILS	6
BLOCK DIAGRAM OF TEST SETUP	6
SUMMARY OF TEST RESULTS	7
FCC §15.247 (i) & §1.1310 & §2.1093- RF EXPOSURE.....	8
APPLICABLE STANDARD	8
FCC §15.203 - ANTENNA REQUIREMENT.....	9
APPLICABLE STANDARD	9
ANTENNA CONNECTOR CONSTRUCTION	9
FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS	10
APPLICABLE STANDARD	10
EUT SETUP	10
EMI TEST RECEIVER SETUP.....	10
TEST PROCEDURE	11
CORRECTED AMPLITUDE & MARGIN CALCULATION	11
TEST EQUIPMENT LIST AND DETAILS.....	11
TEST DATA	11
FCC §15.209, §15.205 & §15.247(d) - SPURIOUS EMISSIONS.....	14
APPLICABLE STANDARD	14
EUT SETUP	14
EMI TEST RECEIVER & SPECTRUM ANALYZER SETUP	15
TEST PROCEDURE	15
TEST EQUIPMENT LIST AND DETAILS.....	15
CORRECTED AMPLITUDE & MARGIN CALCULATION	16
TEST DATA	16
FCC §15.247(a) (1) - CHANNEL SEPARATION TEST	22
APPLICABLE STANDARD	22
TEST EQUIPMENT LIST AND DETAILS.....	22
TEST PROCEDURE	22
TEST DATA	22
FCC §15.247(a) (1) –BANDWIDTH TESTING.....	28
APPLICABLE STANDARD	28
TEST PROCEDURE	28
TEST EQUIPMENT LIST AND DETAILS.....	28
TEST DATA	28

FCC §15.247(a) (1) (iii) - QUANTITY OF HOPPING CHANNEL TEST	34
APPLICABLE STANDARD	34
TEST PROCEDURE	34
TEST EQUIPMENT LIST AND DETAILS.....	34
TEST DATA	34
FCC §15.247(a) (1) (iii) - TIME OF OCCUPANCY (DWELL TIME).....	37
APPLICABLE STANDARD	37
TEST PROCEDURE	37
TEST EQUIPMENT LIST AND DETAILS.....	37
TEST DATA	37
FCC §15.247(b) (1) - PEAK OUTPUT POWER MEASUREMENT	43
APPLICABLE STANDARD	43
TEST PROCEDURE	43
TEST EQUIPMENT LIST AND DETAILS.....	43
TEST DATA	43
FCC §15.247(d) - BAND EDGES TESTING	49
APPLICABLE STANDARD	49
TEST PROCEDURE	49
TEST EQUIPMENT LIST AND DETAILS.....	49
TEST DATA	50

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

EUT Name:		Body Worn Camera
EUT Model:		VM780
Multiple Models:		DSJ-HYTH7A1
Operation Frequency:		2402-2480 MHz
Maximum Output Power (Conducted):		10.27dBm
Modulation Type:		GFSK, $\pi/4$ -DQPSK, 8DPSK
Adapter Information	Model:	S010WU0500200
	Input:	AC 100-240V 50/60Hz 400mA
	Output:	DC 5V 2000mA
External Dimension:		115mm(L)*63mm(W)*26mm(H)
Rated Input Voltage:		DC 3.85V from battery or DC 5V charging from adapter
Serial Number:		190606010
EUT Received Date:		2019-06-12

Note: The series product, models DSJ-HYTH7A1 and VM780 are electrically identical, the difference between them please refer to the declaration letter for details. For marketing purpose, we selected VM780 for fully test.

Objective

This report is prepared on behalf of **Hytera Communications Corporation Limited** in accordance with Part 2, Subpart J, Part 15, Subparts A and C of the Federal Communications Commission's rules,

The tests were performed in order to determine the Bluetooth BDR and EDR mode of EUT compliance with FCC Rules Part 15, Subpart C, and section 15.203, 15.205, 15.207, 15.209 and 15.247 rules

Related Submittal(s)/Grant(s)

FCC Part 22H, 24E, 27, 90 PCB submissions with FCC ID: YAMVM780.
FCC Part 15C DTS submissions with FCC ID: YAMVM780.
FCC Part 15C DXX submissions with FCC ID: YAMVM780.

Test Methodology

All measurements detailed in this Test Report were performed in accordance with ANSI C63.10-2013 “American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices”.

All emissions measurement was performed and Bay Area Compliance Laboratories Corp. (Dongguan).

Measurement Uncertainty

Parameter	Measurement Uncertainty
Occupied Channel Bandwidth	±5 %
RF output power, conducted	±0.61dB
Power Spectral Density, conducted	±0.61 dB
Unwanted Emissions, radiated	30M~200MHz: 4.55 dB, 200M~1GHz: 5.92 dB, 1G~6GHz: 4.98 dB, 6G~18GHz: 5.89 dB, 18G~26.5G: 5.47 dB, 26.5G~40G: 5.63 dB
Unwanted Emissions, conducted	±1.5 dB
Temperature	±1 °C
Humidity	±5%
DC and low frequency voltages	±0.4%
Duty Cycle	1%
AC Power Lines Conducted Emission	3.12 dB (150 kHz to 30 MHz)

Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Dongguan) to collect test data is located on the No.69 Pulongcun, Puxinhu Industry Area, Tangxia, Dongguan, Guangdong, China.

The lab has been recognized as the FCC accredited lab under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No. : 897218, the FCC Designation No. : CN1220.

The lab has been recognized by Innovation, Science and Economic Development Canada to test to Canadian radio equipment requirements, the CAB identifier: CN0022.

SYSTEM TEST CONFIGURATION

Description of Test Configuration

The system was configured for testing in engineering mode.

EUT Exercise Software

The Engineering Mode configured the maximum power level as default setting.

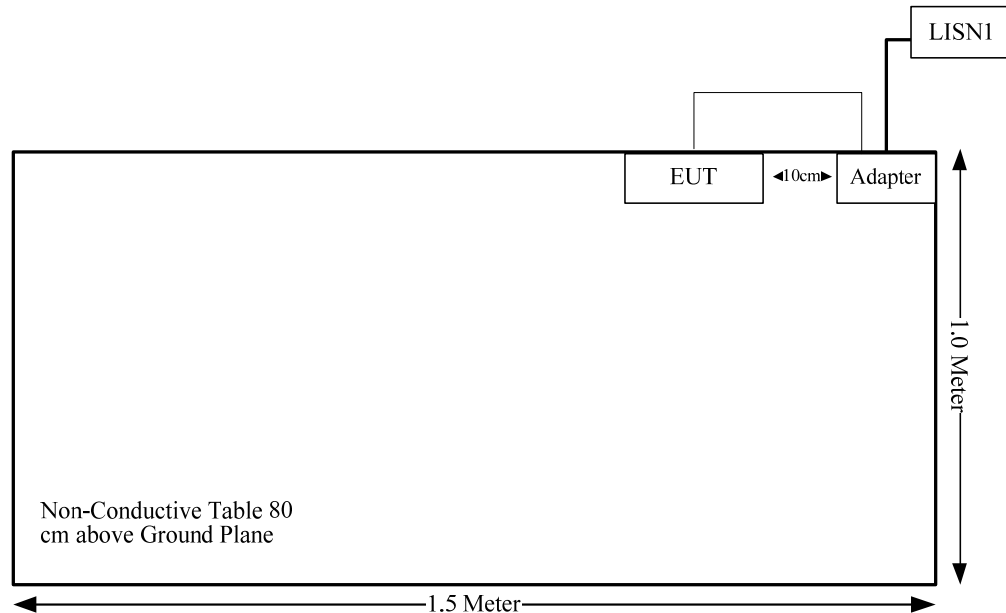
Equipment Modifications

No modification was made to the EUT.

Support Cable List and Details

Cable Description	Shielding Type	Ferrite Core	Length (m)	From	To
USB Cable	No	No	1.1	Adapter	EUT

Block Diagram of Test Setup



SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
FCC§15.247 (i) & §1.1310 & §2.1093	RF Exposure	Compliance
FCC§15.203	Antenna Requirement	Compliance
FCC§15.207 (a)	AC line conducted emissions	Compliance
FCC§15.205, §15.209, §15.247(d)	Spurious Emissions	Compliance
FCC§15.247 (a)(1)	Bandwidth Test	Compliance
FCC§15.247(a)(1)	Channel Separation Test	Compliance
FCC§15.247(a)(1)(iii)	Time of Occupancy (Dwell Time)	Compliance
FCC§15.247(a)(1)(iii)	Quantity of hopping channel Test	Compliance
FCC§15.247(b)(1)	Peak Output Power Measurement	Compliance
FCC§15.247(d)	Band Edges	Compliance

FCC §15.247 (i) & §1.1310 & §2.1093- RF EXPOSURE

Applicable Standard

According to §15.247(i) and §1.1310, systems operating under the provisions of this section shall be operated in a manner that ensure that the public is not exposed to radio frequency energy level in excess of the Commission's guideline.

Measurement Result

Please refer to the SAR report: RDG190606010-20A.

Result: Compliance.

FCC §15.203 - ANTENNA REQUIREMENT

Applicable Standard

According to FCC § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

Antenna Connector Construction

The EUT has one internal antenna arrangement, fulfill the requirement of this section. Please refer to below information and the EUT photos:

Antenna Type	input impedance (Ohm)	Antenna Gain /Frequency Range
FPC	50	0 dBi/2.4~2.5GHz

Result: Compliance.

FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS

Applicable Standard

FCC§15.207(a)

EUT Setup



Note: 1. Support units were connected to second LISN.
2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.207 limits.

The spacing between the peripherals was 10 cm.

The adapter was connected to the main LISN with a 120 V/60 Hz AC power source.

EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

Test Procedure

During the conducted emission test, the adapter was connected to the outlet of the first LISN. Maximizing procedure was performed on the six (6) highest emissions of the EUT. All data was recorded in the Quasi-peak and average detection mode.

Corrected Amplitude & Margin Calculation

The basic equation is as follows:

$$V_C = V_R + A_C + VDF$$

Herein,

V_C : corrected voltage amplitude

V_R : reading voltage amplitude

A_C : attenuation caused by cable loss

VDF : voltage division factor of AMN or ISN

The “**Margin**” column of the following data tables indicates the degree of compliance within the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Unknown	Coaxial Cable	C-NJNJ-50	C-0200-01	2018-09-05	2019-09-05
R&S	Test Software	EMC32	Version8.53.0	N/A	N/A
R&S	Two-line V-network	ENV 216	101614	2018-12-10	2019-12-10
R&S	EMI Test Receiver	ESPI	100120	2019-05-09	2020-05-09

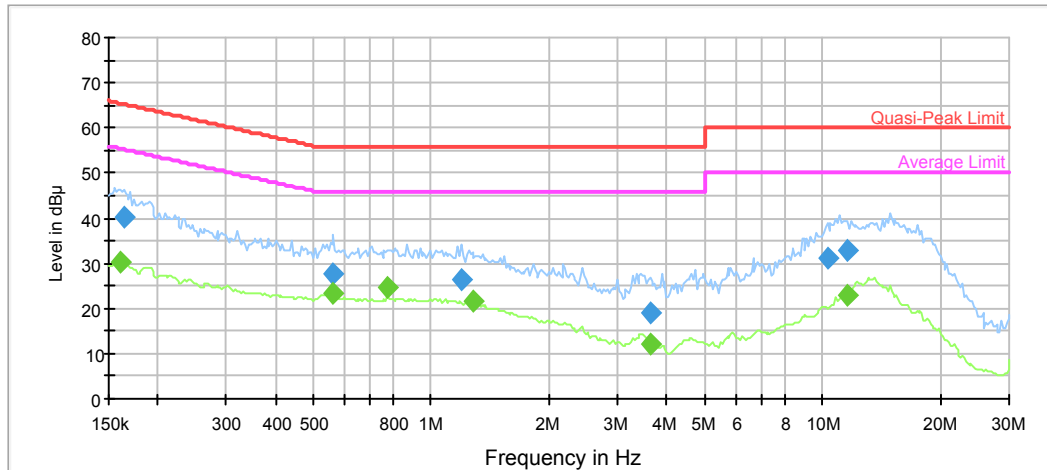
* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data

Environmental Conditions

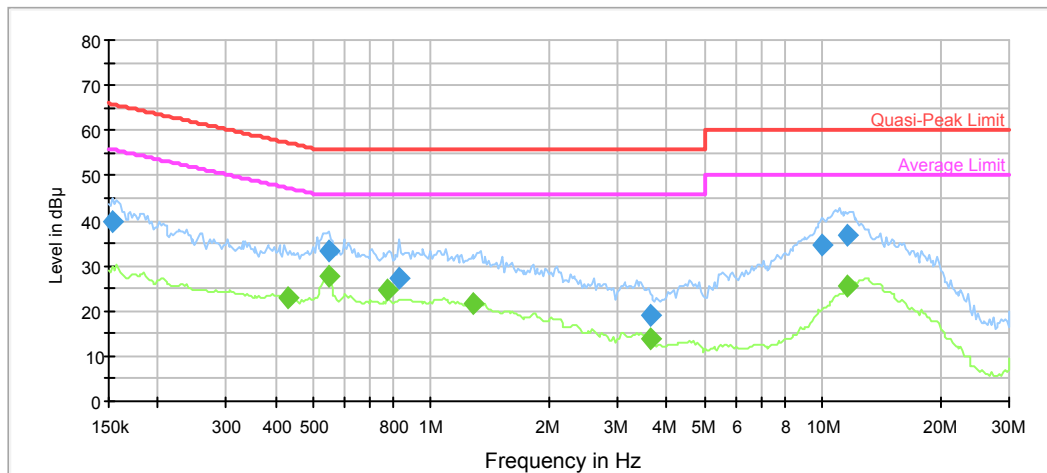
Temperature:	28.0 °C
Relative Humidity:	52 %
ATM Pressure:	100.6 kPa
Tester:	Lily Xie
Test Date:	2019-06-22

Test Result: Compliance

Test Mode: Transmitting**AC120V, 60 Hz, Line:**

Frequency (MHz)	QuasiPeak (dBμV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.164053	40.1	9.000	L1	11.0	25.2	65.3
0.563423	27.7	9.000	L1	9.8	28.3	56.0
1.200214	26.6	9.000	L1	9.8	29.4	56.0
3.621856	19.0	9.000	L1	9.8	37.0	56.0
10.296163	31.2	9.000	L1	9.8	28.8	60.0
11.601974	32.9	9.000	L1	9.8	27.1	60.0

Frequency (MHz)	Average (dBμV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.160820	30.4	9.000	L1	11.0	25.0	55.4
0.563423	23.2	9.000	L1	9.8	22.8	46.0
0.774673	24.5	9.000	L1	9.8	21.5	46.0
1.286792	21.5	9.000	L1	9.8	24.5	46.0
3.621856	12.1	9.000	L1	9.8	33.9	46.0
11.601974	22.7	9.000	L1	9.8	27.3	50.0

AC120V, 60 Hz, Neutral:

Frequency (MHz)	QuasiPeak (dBμV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.153015	39.7	9.000	N	11.1	26.1	65.8
0.546852	33.1	9.000	N	9.8	22.9	56.0
0.830554	27.2	9.000	N	9.8	28.8	56.0
3.621856	19.2	9.000	N	9.8	36.8	56.0
9.993354	34.5	9.000	N	9.8	25.5	60.0
11.601974	36.8	9.000	N	9.8	23.2	60.0

Frequency (MHz)	Average (dBμV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.430682	23.1	9.000	N	9.9	24.1	47.2
0.546852	27.5	9.000	N	9.8	18.5	46.0
0.774673	24.8	9.000	N	9.8	21.2	46.0
1.286792	21.7	9.000	N	9.8	24.3	46.0
3.621856	13.7	9.000	N	9.8	32.3	46.0
11.601974	25.6	9.000	N	9.8	24.4	50.0

FCC §15.209, §15.205 & §15.247(d) - SPURIOUS EMISSIONS

Applicable Standard

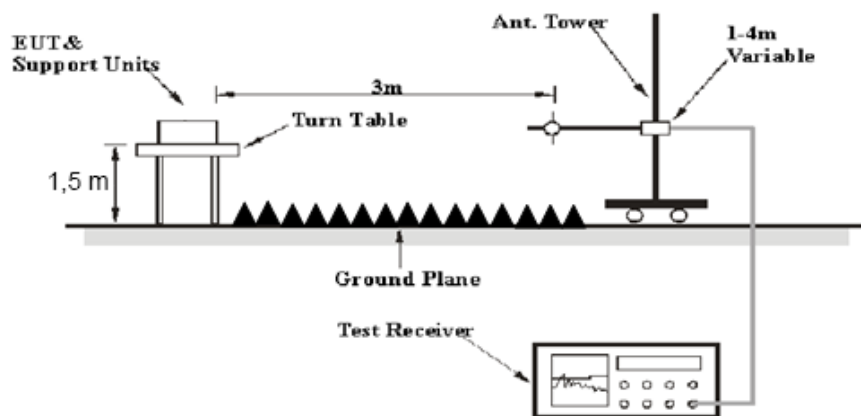
FCC §15.247 (d); §15.209; §15.205

EUT Setup

Below 1GHz:



Above 1GHz:



The radiated emission Below 1GHz tests were performed in the 3 meters chamber A, above 1GHz tests were performed in the 3 meters chamber A, using the setup accordance with the ANSI C63.10-2013. The specification used was the FCC 15.209, and FCC 15.247 limits.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.

EMI Test Receiver & Spectrum Analyzer Setup

The system was investigated from 30 MHz to 25 GHz.

According to FCC public notice: DA-00-705, during the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

Frequency Range	RBW	Video B/W	IF B/W	Measurement
30 MHz – 1000 MHz	120 kHz	300 kHz	120 kHz	QP
Above 1 GHz	1MHz	3 MHz	/	PK
	1MHz	10 Hz	/	AV

If the maximized peak measured value complies with under the QP/Average limit more than 6dB, then it is unnecessary to perform an QP/Average measurement.

Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

Data was recorded in Quasi-peak detection mode for frequency range of 30 MHz - 1 GHz, peak and average detection modes for frequencies above 1 GHz.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	EMI Test Receiver	ESR3	102453	2018-06-26	2019-06-26
Farad	Test Software	EZ-EMC	V1.1.4.2	N/A	N/A
Sunol Sciences	Antenna	JB3	A060611-1	2017-11-10	2020-11-10
Unknown	Coaxial Cable	C-NJNJ-50	C-0400-01	2018-09-05	2019-09-05
Unknown	Coaxial Cable	C-NJNJ-50	C-0075-01	2018-09-05	2019-09-05
Unknown	Coaxial Cable	C-NJNJ-50	C-1400-01	2019-05-06	2020-05-06
HP	Amplifier	8447D	2727A05902	2018-09-05	2019-09-05
R&S	Spectrum Analyzer	FSP 38	100478	2019-05-09	2020-05-09
TDK RF	Horn Antenna	HRN-0118	130 084	2018-10-12	2021-10-12
Ducommun Technologies	Horn Antenna	ARH-4223-02	1007726-01 1304	2016-11-18	2019-11-18
MICRO-COAX	Coaxial Cable	UFA147-1-2362-100100	64639 231029-001	2019-02-24	2020-02-24
Mini	Pre-amplifier	ZVA-183-S+	5969001149	2018-09-05	2019-09-05
Quinstar	Amplifier	QLW-18405536-JO	15964001001	2019-06-27	2020-06-27
E-Microwave	Band-stop Filters	OBSF-2400-2483.5-S	OE01601525	2019-06-16	2020-06-16
Micro-tronics	High Pass Filter	HPM50111	S/N-G217	2019-06-16	2020-06-16

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\text{Corrected Amplitude} = \text{Meter Reading} + \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

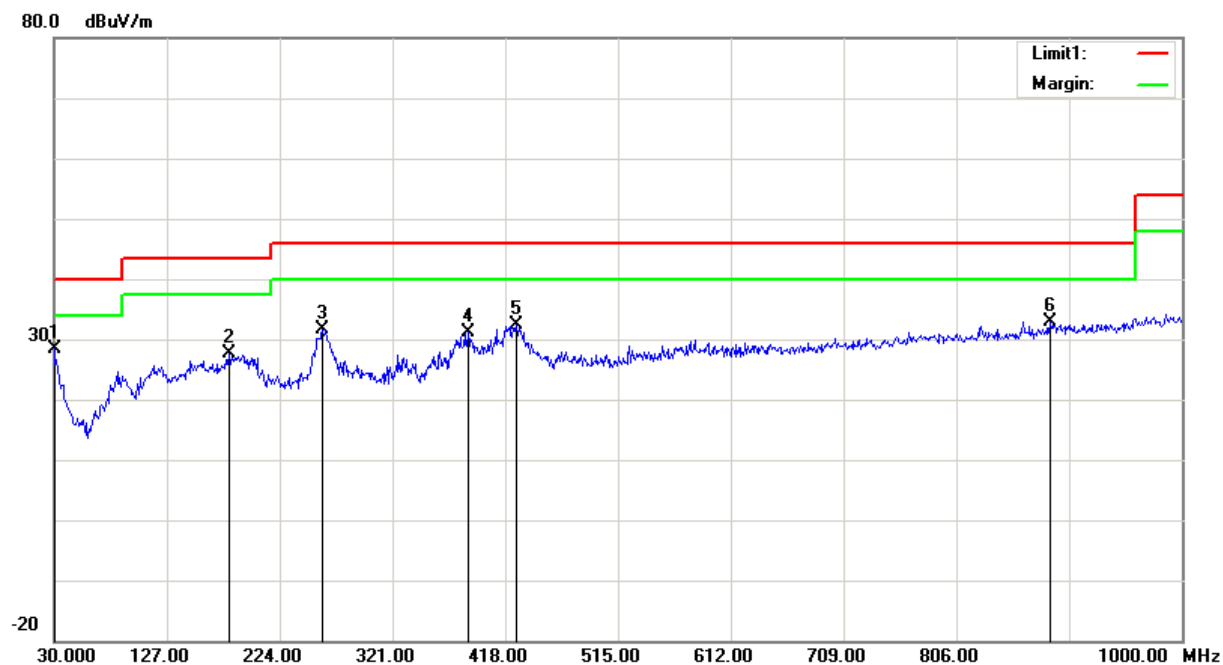
Test Data

Environmental Conditions

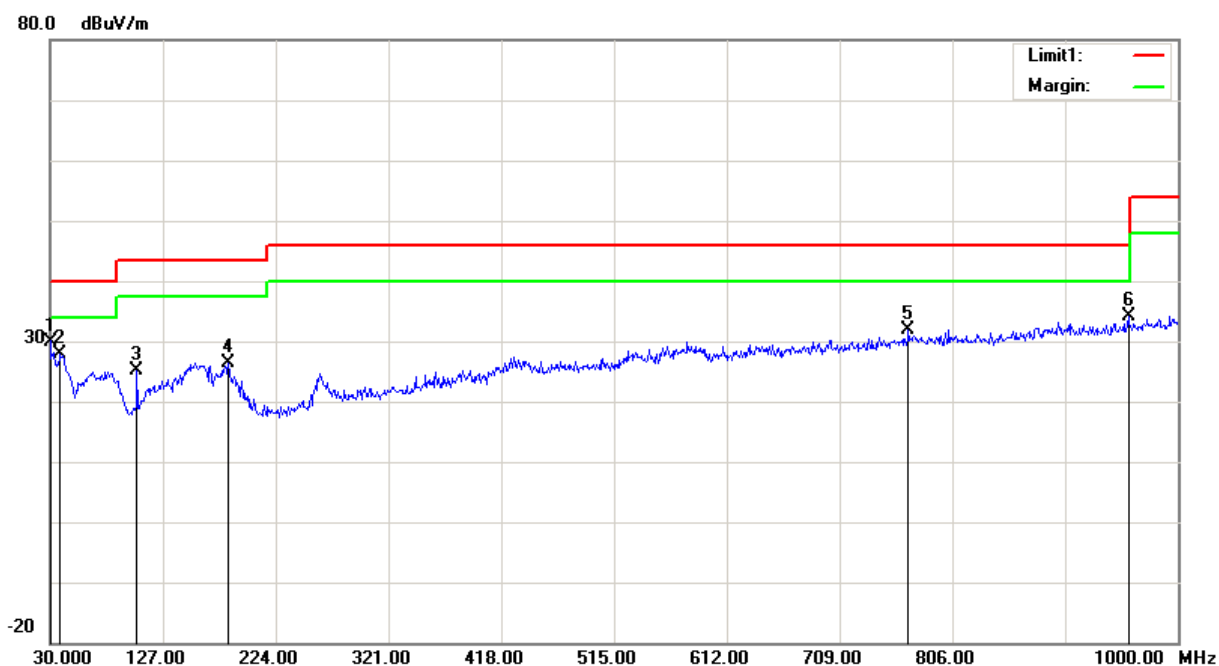
Test Items	Radiation Below 1GHz	Radiation Above 1GHz
Temperature:	28 °C	25.6~27.7°C
Relative Humidity:	45%	35~50 %
ATM Pressure:	100.1 kPa	100.1 kPa
Tester:	Tyler Pan	Tyler Pan
Test Date:	2019-06-17	2019-06-20

Test Mode: Transmitting

Please refer to following table and plots:

1) 30MHz-1GHz (GFSK Middle channel was the worst)**Horizontal:**

Frequency (MHz)	Reading (dB μ V)	Detector	Corrected (dB/m)	Result (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
30.0000	26.64	peak	1.72	28.36	40.00	11.64
180.3500	34.76	peak	-7.17	27.59	43.50	15.91
260.8600	36.76	peak	-5.11	31.65	46.00	14.35
385.9900	33.52	peak	-2.38	31.14	46.00	14.86
427.7000	33.72	peak	-1.34	32.38	46.00	13.62
886.5100	33.21	peak	-0.24	32.97	46.00	13.03

Vertical:

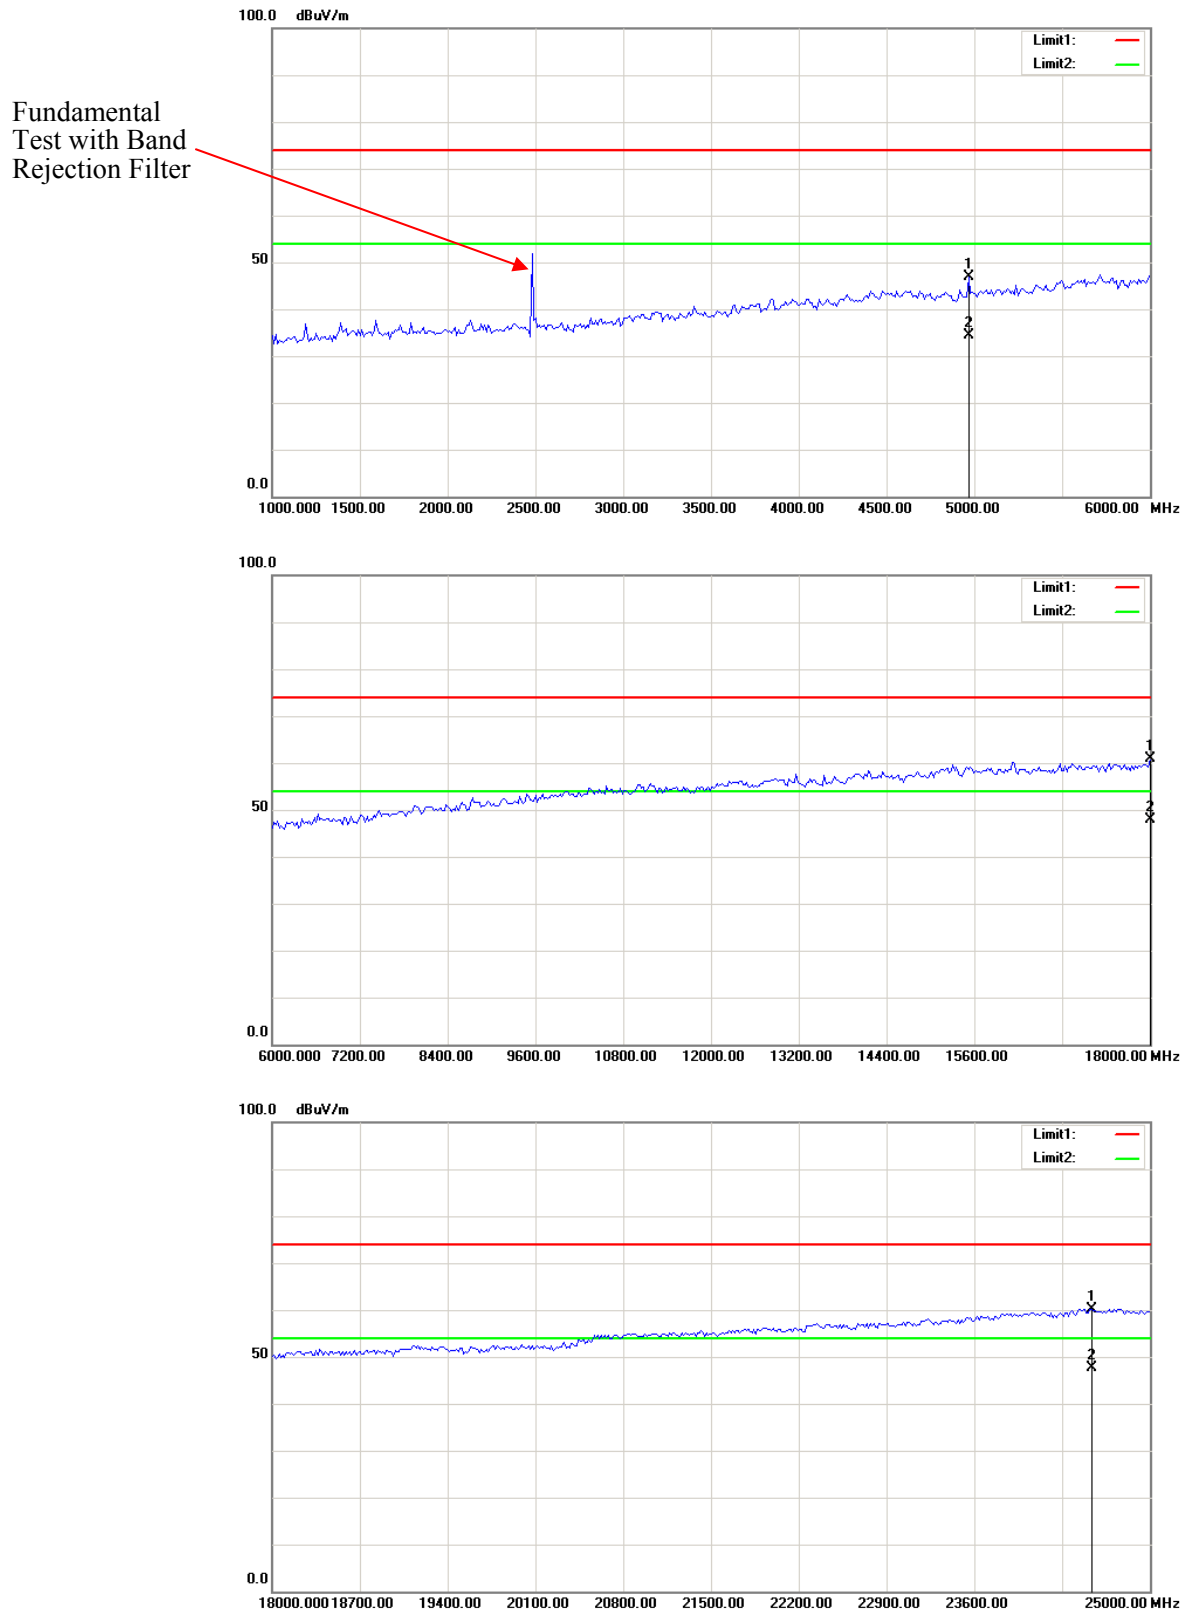
Frequency (MHz)	Reading (dB μ V)	Detector	Corrected (dB/m)	Result (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
30.0000	28.28	peak	1.72	30.00	40.00	10.00
38.7300	32.73	peak	-4.95	27.78	40.00	12.22
104.6900	32.79	peak	-7.61	25.18	43.50	18.32
183.2600	33.66	peak	-7.35	26.31	43.50	17.19
768.1700	27.51	peak	4.26	31.77	46.00	14.23
957.3200	33.13	peak	0.94	34.07	46.00	11.93

2)1GHz-25GHz:*BDR Mode (GFSK) was the worst*

Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Remark	Polar (H/V)	Factor (dB/m)					
Low Channel: 2402 MHz									
2402.00	68.62	PK	H	24.82	3.34	0.00	96.78	N/A	N/A
2402.00	56.32	AV	H	24.82	3.34	0.00	84.48	N/A	N/A
2402.00	66.78	PK	V	24.82	3.34	0.00	94.94	N/A	N/A
2402.00	54.41	AV	V	24.82	3.34	0.00	82.57	N/A	N/A
2390.00	24.71	PK	H	24.80	3.33	0.00	52.84	74.00	21.16
2390.00	12.32	AV	H	24.80	3.33	0.00	40.45	54.00	13.55
4804.00	38.56	PK	H	29.71	4.58	27.36	45.49	74.00	28.51
4804.00	26.23	AV	H	29.71	4.58	27.36	33.16	54.00	20.84
7206.00	38.10	PK	H	33.93	5.59	27.19	50.43	74.00	23.57
7206.00	25.68	AV	H	33.93	5.59	27.19	38.01	54.00	15.99
Middle Channel: 2441 MHz									
2441.00	69.75	PK	H	24.89	3.36	0.00	98.00	N/A	N/A
2441.00	57.60	AV	H	24.89	3.36	0.00	85.85	N/A	N/A
2441.00	67.90	PK	V	24.89	3.36	0.00	96.15	N/A	N/A
2441.00	55.76	AV	V	24.89	3.36	0.00	84.01	N/A	N/A
4882.00	39.41	PK	H	29.86	4.56	27.56	46.27	74.00	27.73
4882.00	26.89	AV	H	29.86	4.56	27.56	33.75	54.00	20.25
7323.00	37.96	PK	H	34.12	5.69	27.26	50.51	74.00	23.49
7323.00	25.67	AV	H	34.12	5.69	27.26	38.22	54.00	15.78
High Channel: 2480 MHz									
2480.00	69.86	PK	H	24.96	3.38	0.00	98.20	N/A	N/A
2480.00	57.61	AV	H	24.96	3.38	0.00	85.95	N/A	N/A
2480.00	67.86	PK	V	24.96	3.38	0.00	96.20	N/A	N/A
2480.00	55.67	AV	V	24.96	3.38	0.00	84.01	N/A	N/A
2483.50	33.81	PK	H	24.97	3.38	0.00	62.16	74.00	11.84
2483.50	19.21	AV	H	24.97	3.38	0.00	47.56	54.00	6.44
4960.00	39.55	PK	H	30.02	4.58	27.37	46.78	74.00	27.22
4960.00	27.13	AV	H	30.02	4.58	27.37	34.36	54.00	19.64
7440.00	37.89	PK	H	34.30	5.79	27.22	50.76	74.00	23.24
7440.00	25.43	AV	H	34.30	5.79	27.22	38.30	54.00	15.70

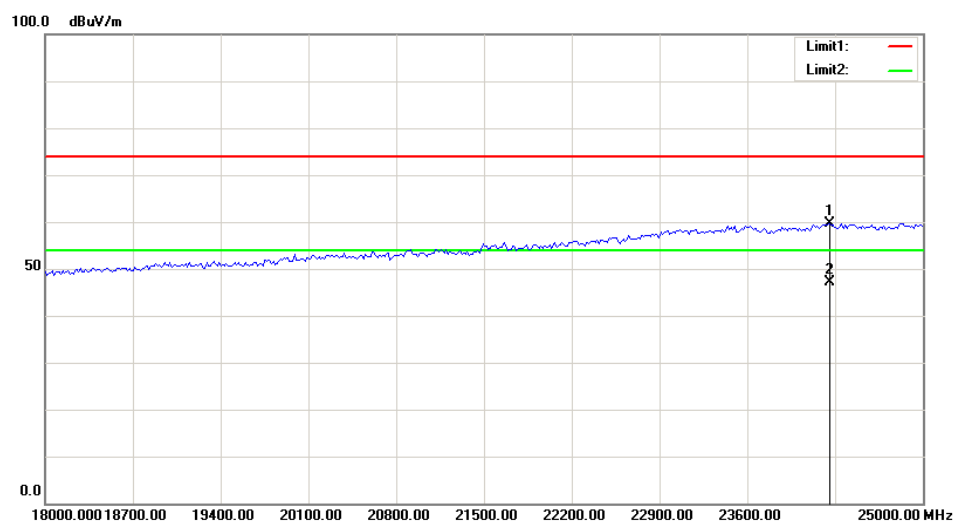
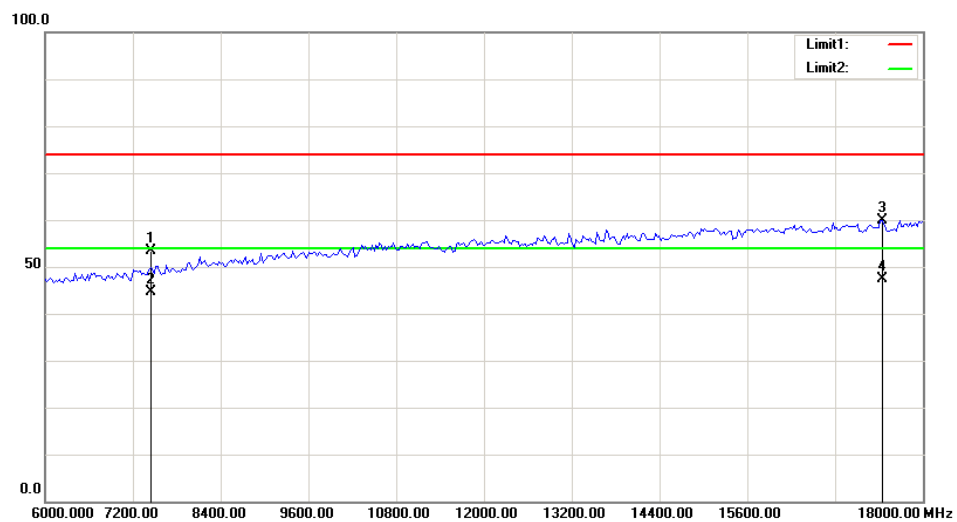
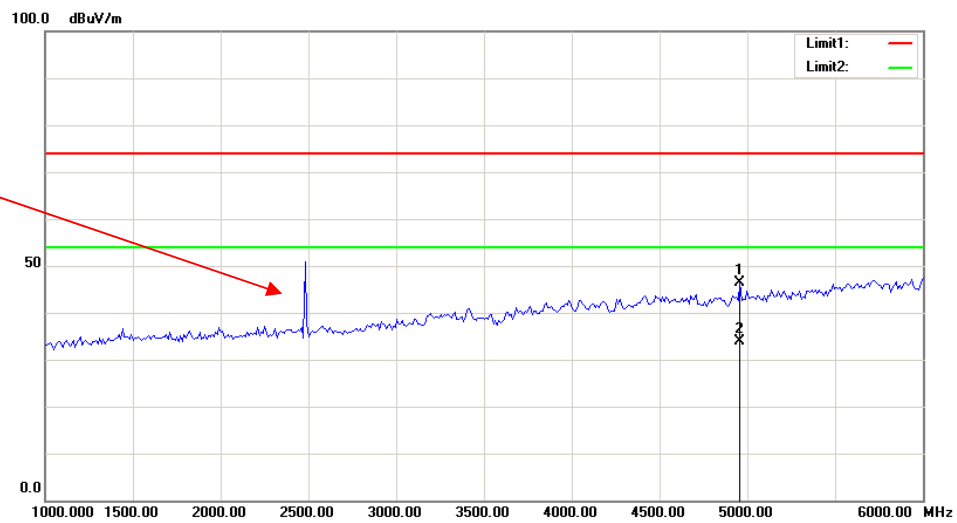
Worst plots (GFSK High channel was the worst)

Horizontal:



Vertical

Fundamental
Test with Band
Rejection Filter



FCC §15.247(a) (1) - CHANNEL SEPARATION TEST**Applicable Standard**

According to FCC §15.247(a) (1)

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.50 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20dB bandwidth of the hopping channel, whichever is greater provided the systems operate with an output power no greater than 125 mW.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	EMI Test Receiver	ESR3	102453	2018-06-26	2019-06-26
Unknown	Coaxial Cable	C-SJ00-0010	C0010/01	Each time	N/A

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Procedure

1. Set the EUT in transmitting mode, spectrum Bandwidth was set at 30 kHz, maxhold the channel.
2. Set the adjacent channel of the EUT maxhold another trace.
3. Measure the channel separation.

Test Data**Environmental Conditions**

Temperature:	29.2 °C
Relative Humidity:	46 %
ATM Pressure:	99.2 kPa
Tester:	Vern Shen
Test Date:	2019-06-19

Test Result: Compliance.

Please refer to following tables and plots

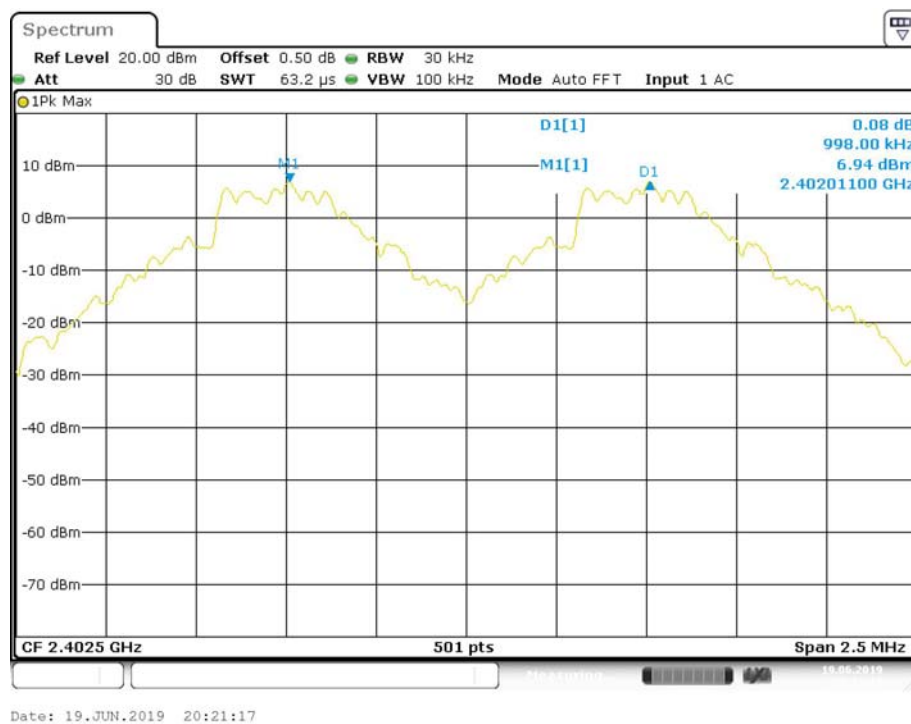
Test Mode: Transmitting

Mode	Channel	Frequency (MHz)	Channel Separation (MHz)	Limit (MHz)
BDR (GFSK)	Low	2402	0.998	0.61
	Middle	2441	0.998	0.61
	High	2480	0.998	0.62
EDR ($\pi/4$ -DQPSK)	Low	2402	1.003	0.83
	Middle	2441	1.003	0.84
	High	2480	0.998	0.84
EDR (8-DPSK)	Low	2402	1.003	0.82
	Middle	2441	1.003	0.82
	High	2480	1.003	0.82

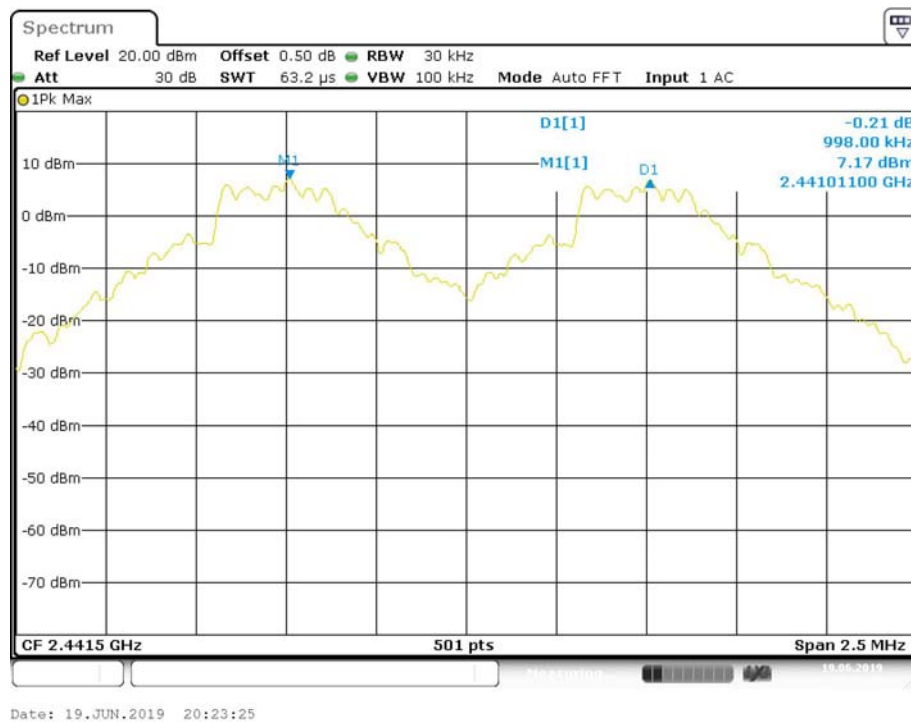
Note: Limit = $(2/3) \times 20\text{dB bandwidth}$

BDR Mode (GFSK):

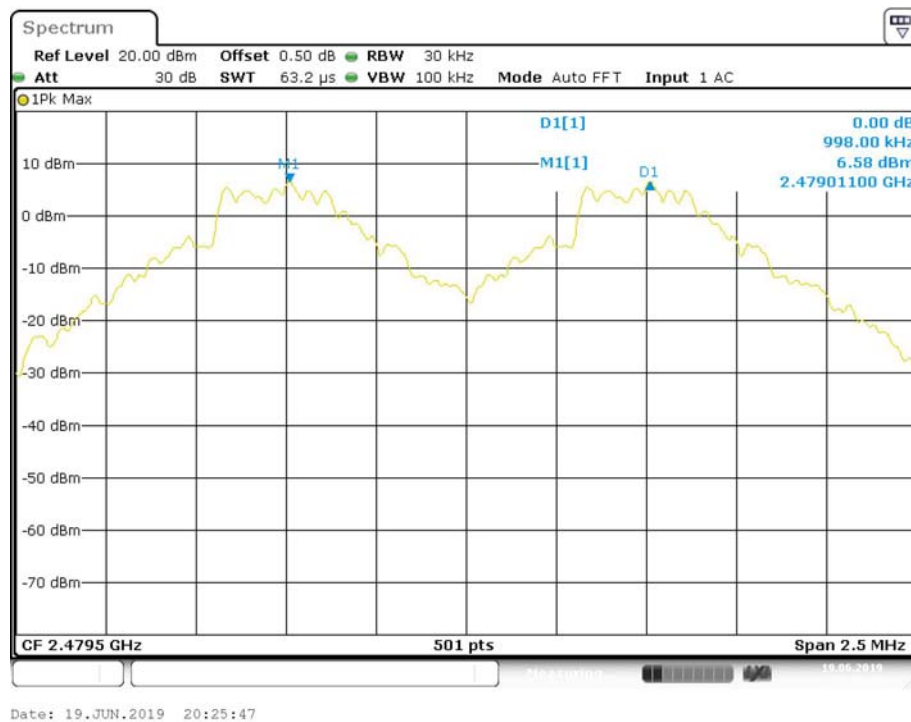
Low Channel



Middle Channel

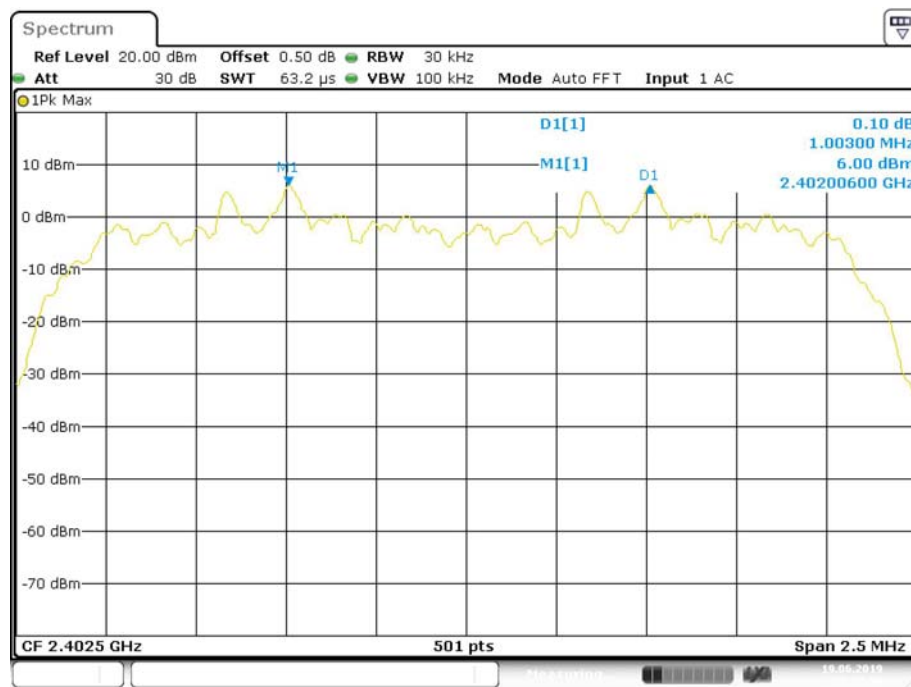


High Channel



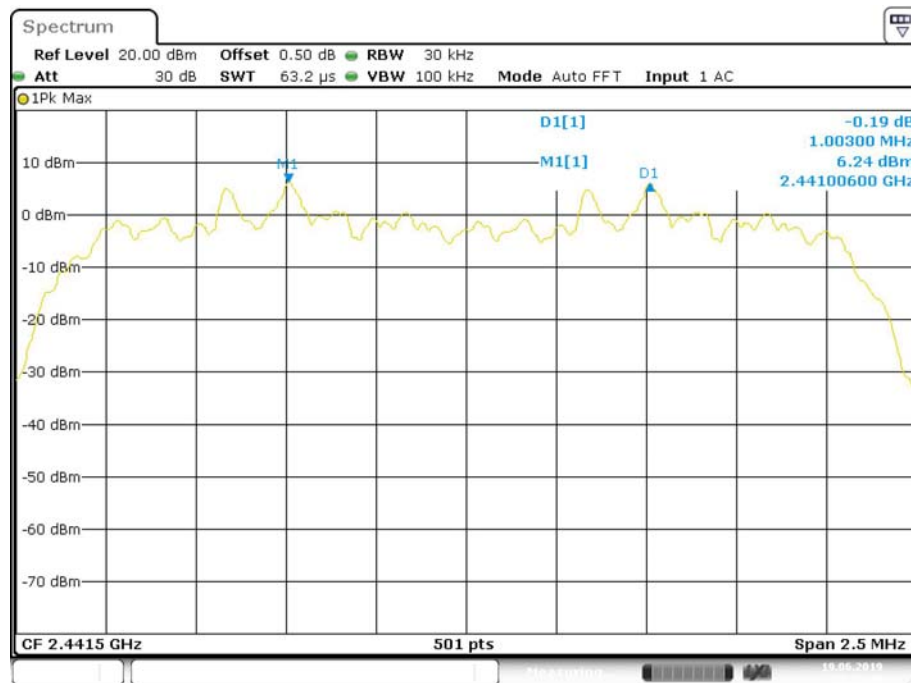
EDR Mode ($\pi/4$ -DQPSK):

Low Channel

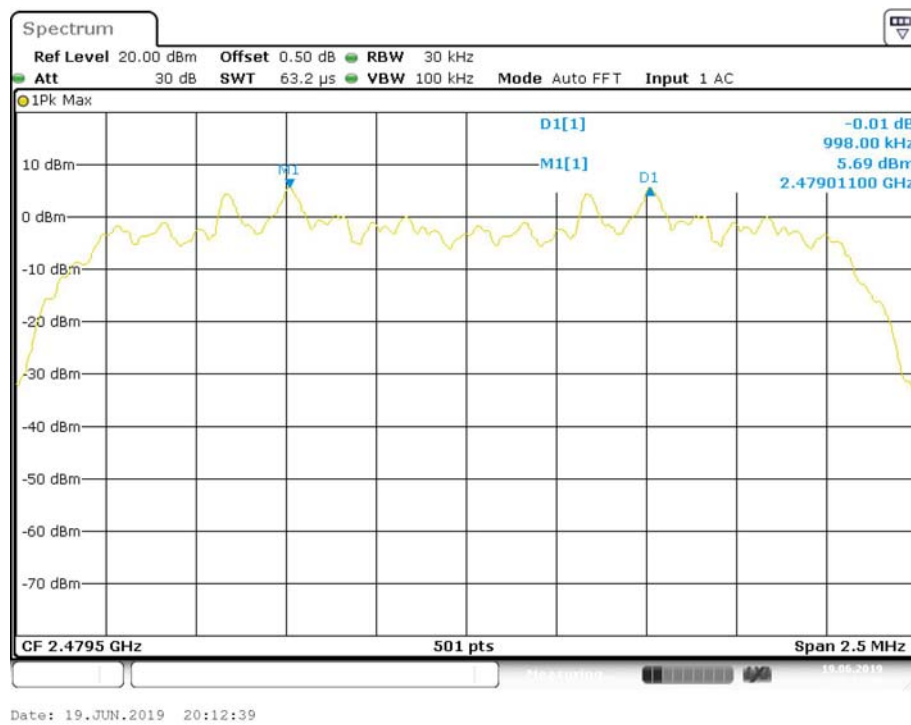
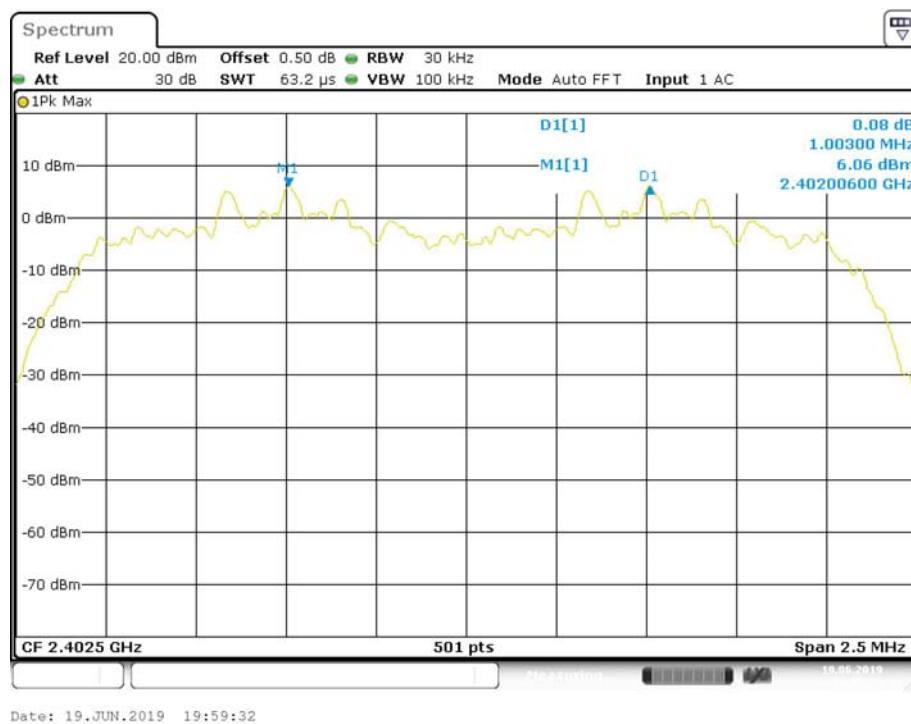


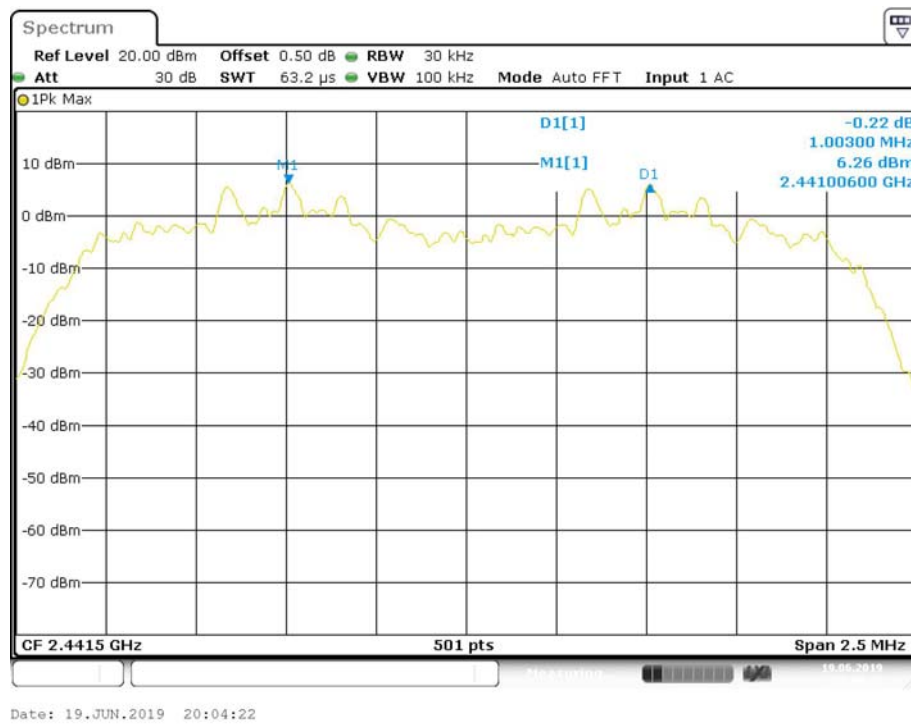
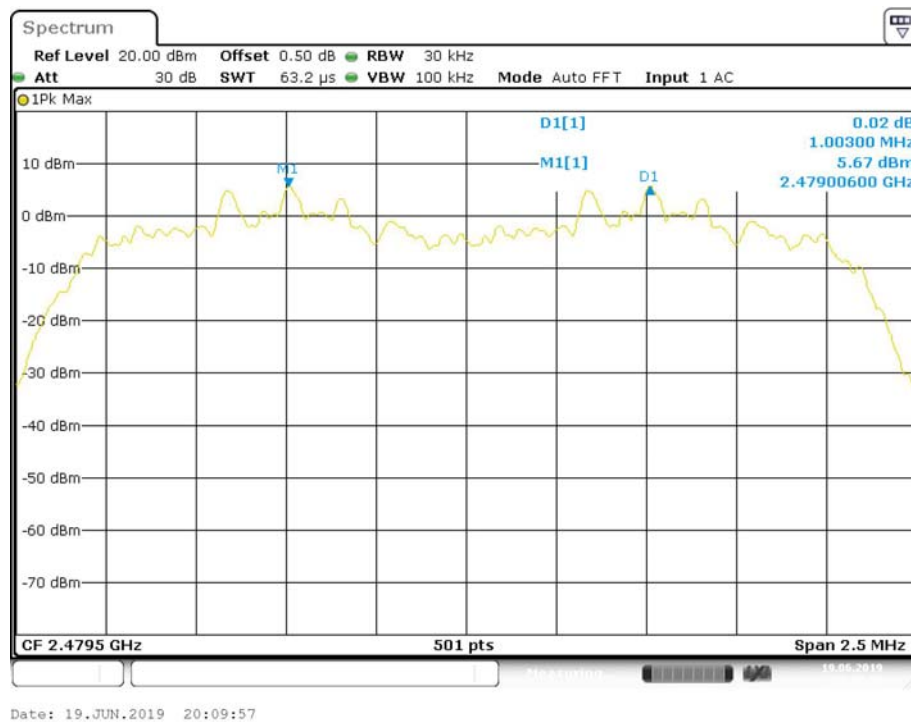
Date: 19.JUN.2019 20:19:56

Middle Channel



Date: 19.JUN.2019 20:16:38

High Channel*EDR Mode (8-DPSK):***Low Channel**

Middle Channel**High Channel**

FCC §15.247(a) (1) –BANDWIDTH TESTING**Applicable Standard**

According to FCC §15.247(a) (1):

Alternatively, frequency hopping systems operating in the 2400–2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT on the test table without connection to measurement instrument. Turn on the EUT. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
3. Measure the frequency difference of two frequencies that were attenuated 20 dB from the reference level. Record the frequency difference as the emission bandwidth.
4. Repeat above procedures until all frequencies measured were complete.
5. Use the OBW test function test the 99% Occupied bandwidth.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	EMI Test Receiver	ESR3	102453	2018-06-26	2019-06-26
Unknown	Coaxial Cable	C-SJ00-0010	C0010/01	Each time	N/A

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data**Environmental Conditions**

Temperature:	29.2 °C
Relative Humidity:	46 %
ATM Pressure:	99.2 kPa
Tester:	Vern Shen
Test Date:	2019-06-19

Test Result: Compliance.

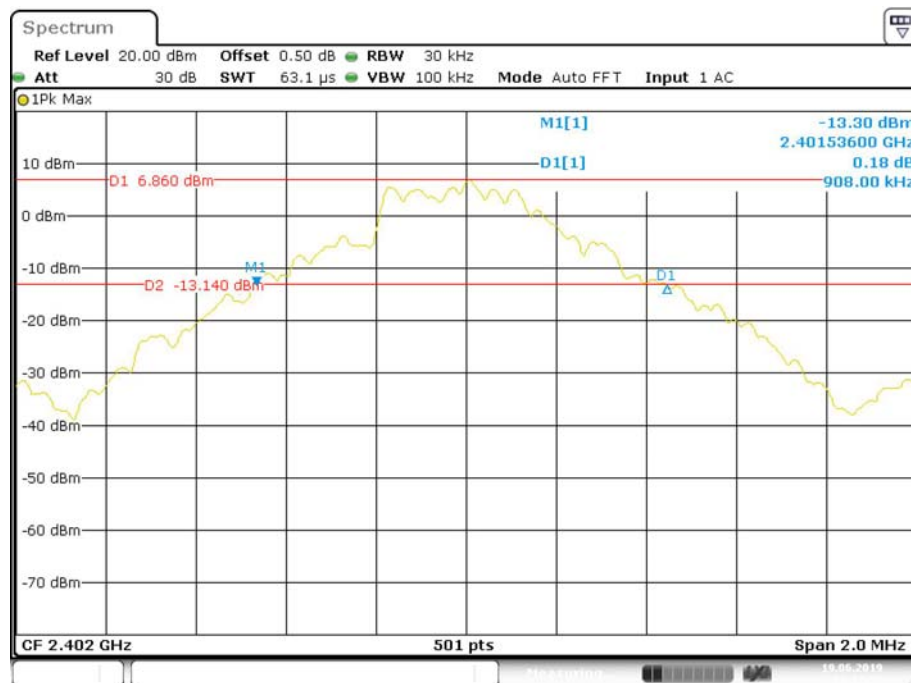
Please refer to following tables and plots

Test Mode: Transmitting

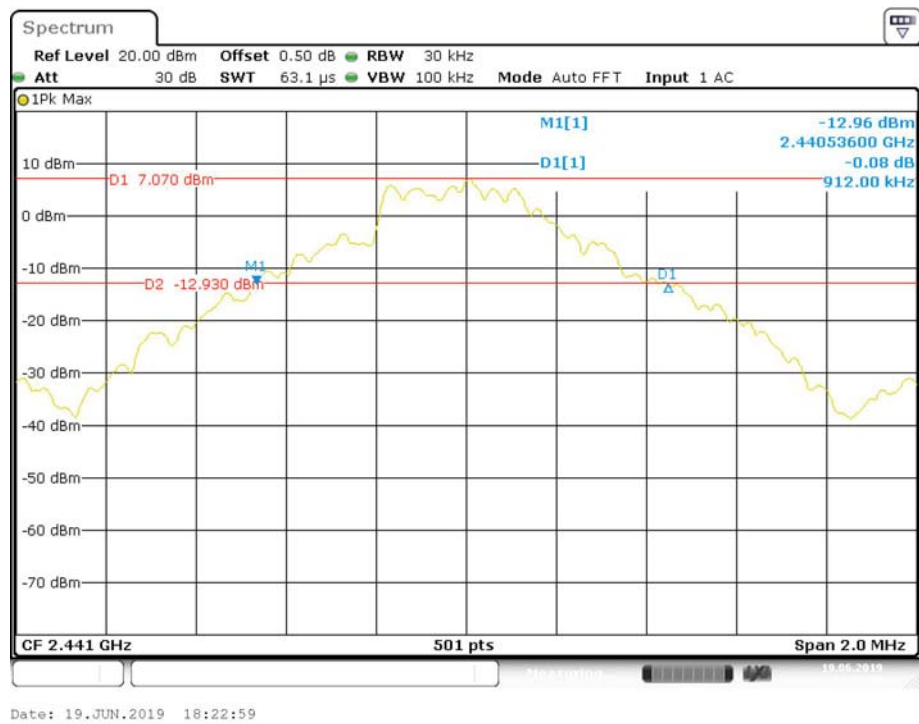
Mode	Channel	Frequency (MHz)	20 dB Bandwidth (MHz)
BDR Mode (GFSK)	Low	2402	0.908
	Middle	2441	0.912
	High	2480	0.936
EDR Mode ($\pi/4$ -DQPSK)	Low	2402	1.252
	Middle	2441	1.256
	High	2480	1.256
EDR Mode (8-DPSK)	Low	2402	1.224
	Middle	2441	1.224
	High	2480	1.224

BDR Mode (GFSK):

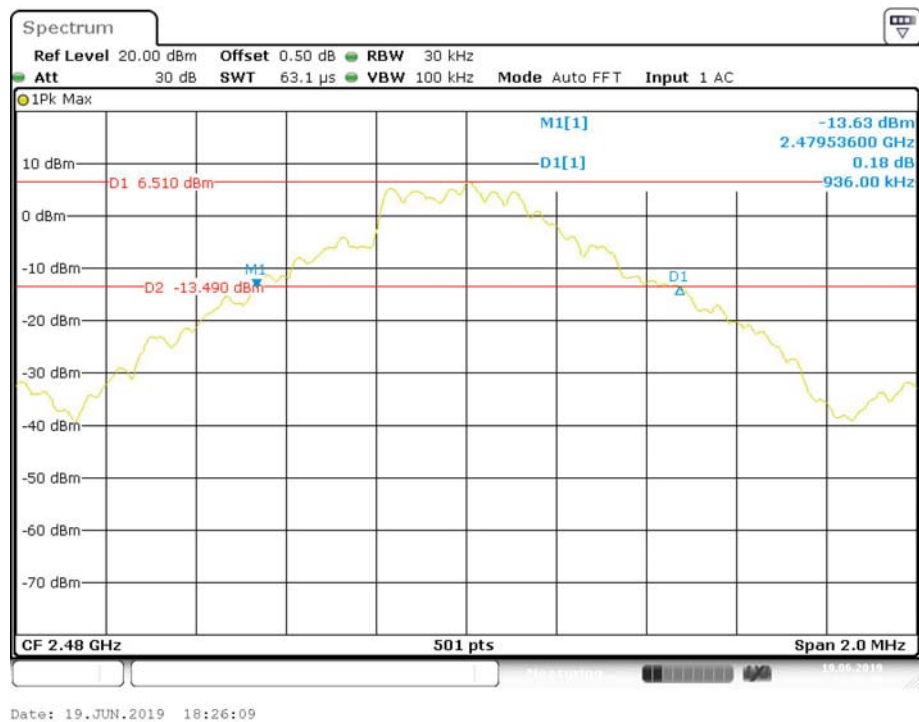
Low Channel



Middle Channel

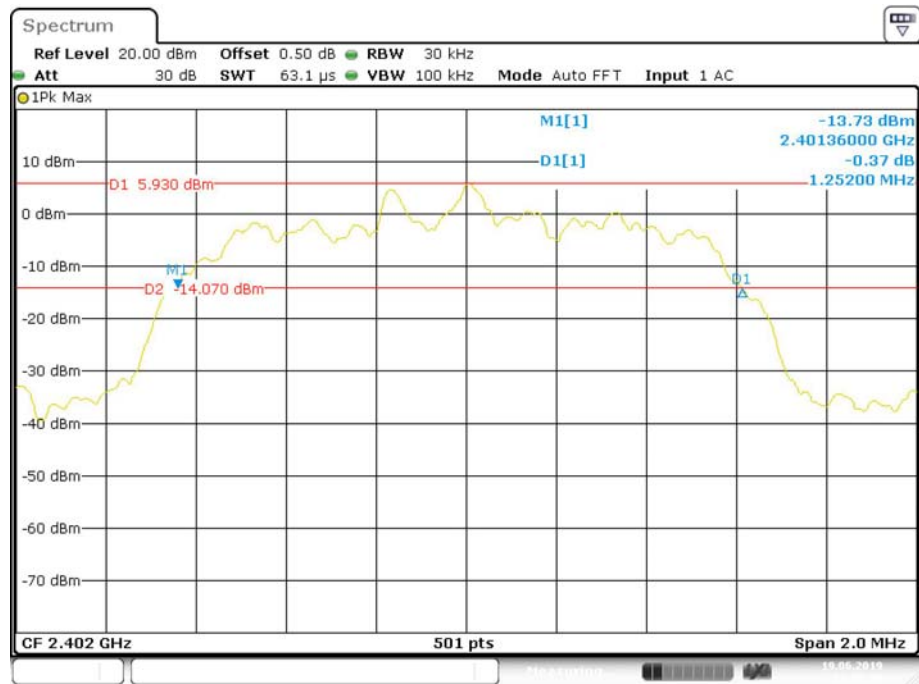


High Channel



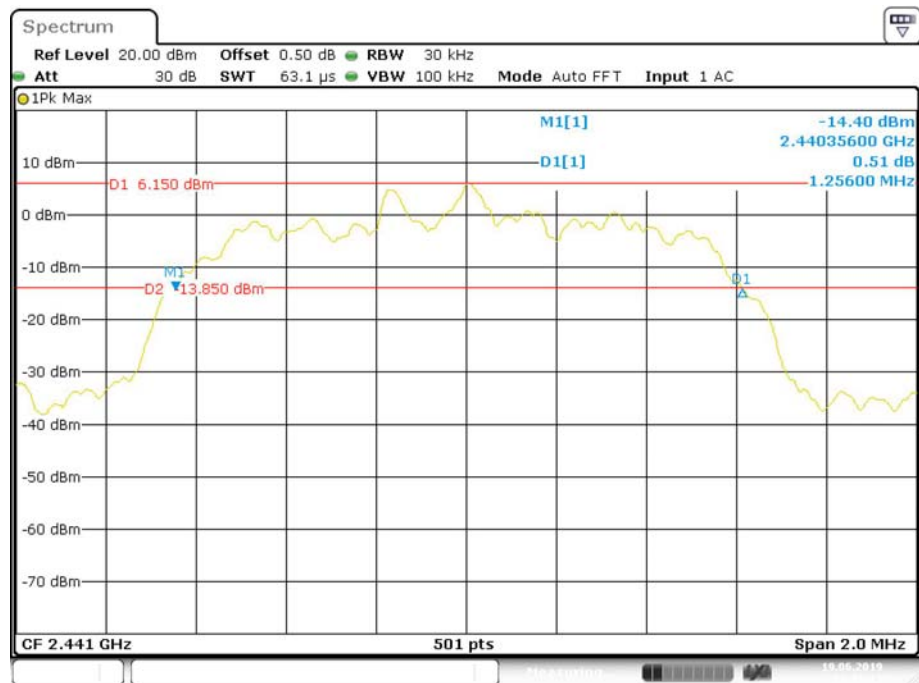
EDR Mode ($\pi/4$ -DQPSK):

Low Channel

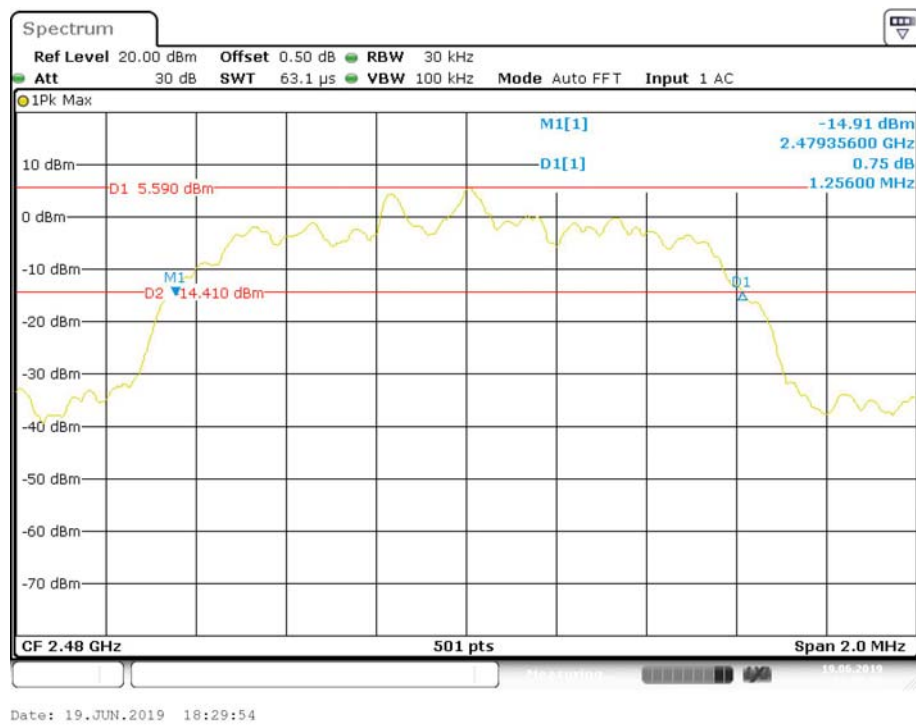
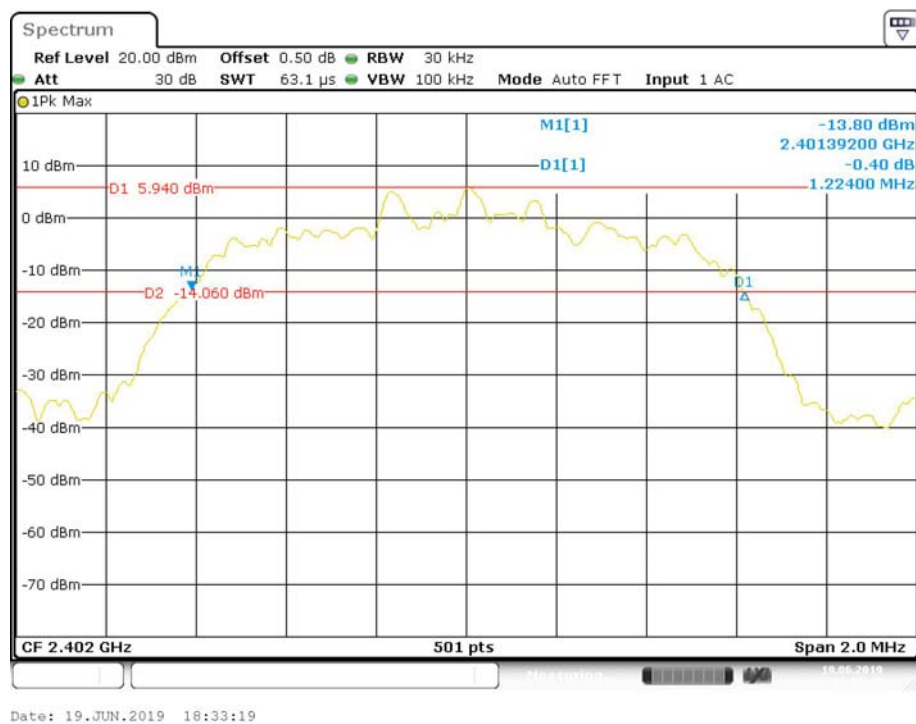


Date: 19.JUN.2019 18:32:09

Middle Channel



Date: 19.JUN.2019 18:31:11

High Channel*EDR Mode (8-DPSK):***Low Channel**

FCC §15.247(a) (1) (iii) - QUANTITY OF HOPPING CHANNEL TEST

Applicable Standard

According to FCC §15.247(a) (1) (iii)

Frequency hopping systems in the 2400–2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

Test Procedure

1. Check the calibration of the measuring instrument (SA) using either an internal calibrator or a known signal from an external generator.
2. Set the EUT in hopping mode from first channel to last.
3. By using the Max-Hold function record the Quantity of the channel.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	EMI Test Receiver	ESR3	102453	2018-06-26	2019-06-26
Unknown	Coaxial Cable	C-SJ00-0010	C0010/01	Each time	N/A

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data

Environmental Conditions

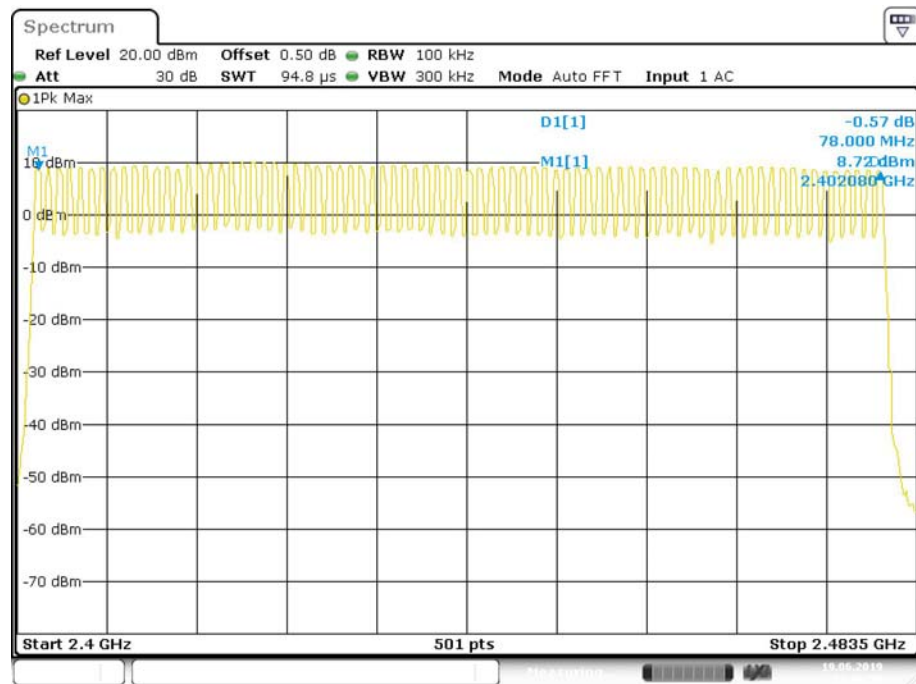
Temperature:	29.2 °C
Relative Humidity:	46 %
ATM Pressure:	99.2 kPa
Tester:	Vern Shen
Test Date:	2019-06-19

Test Result: Compliance.

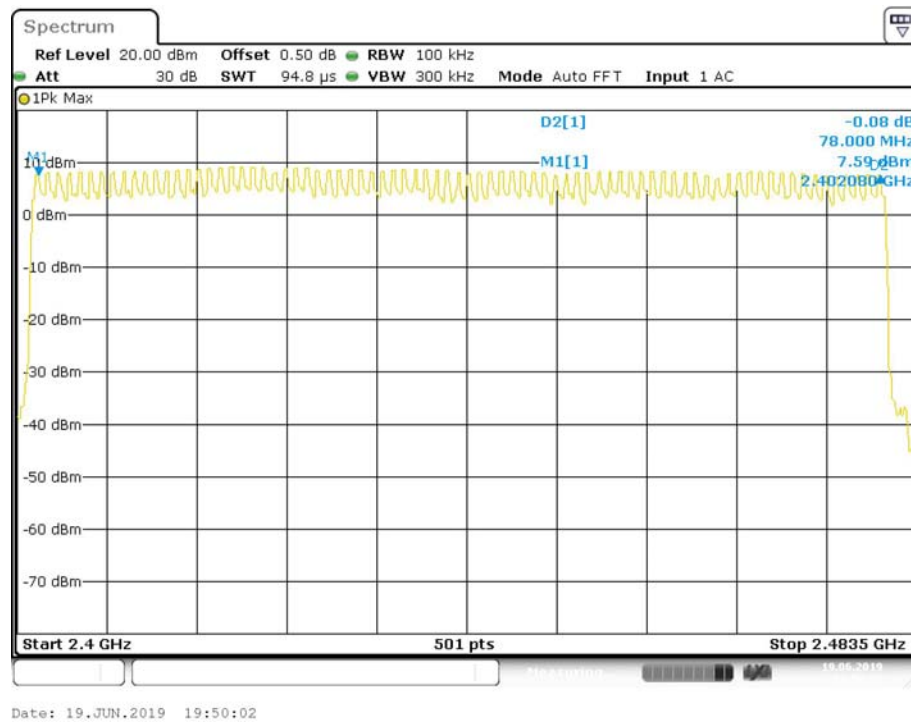
Please refer to following tables and plots

Test Mode: Transmitting

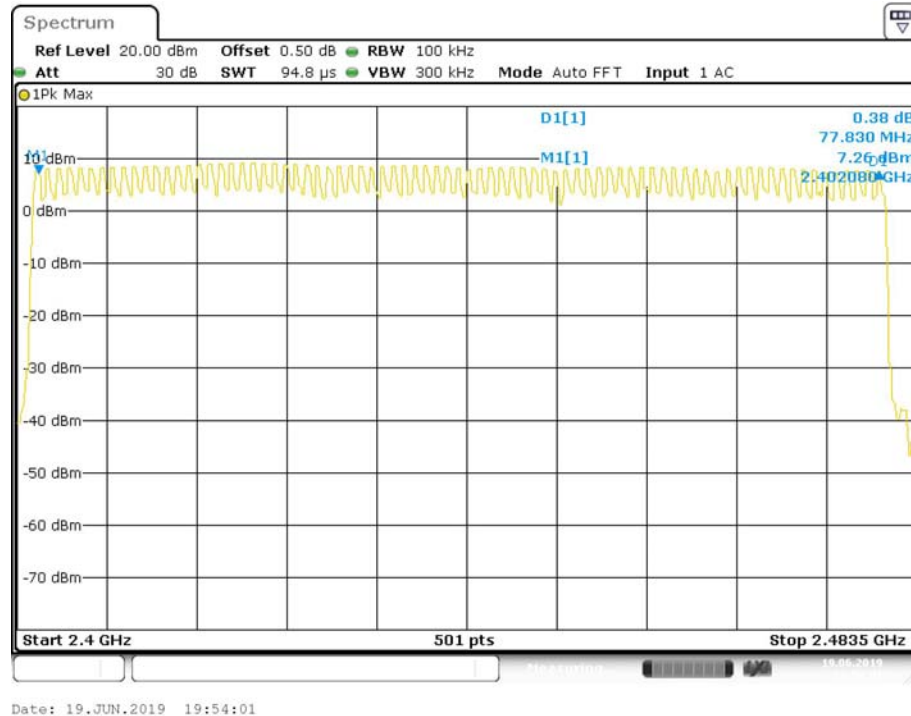
Test mode	Frequency Range (MHz)	Number of Hopping Channel	Limit
GFSK	2400-2483.5	79	≥15
$\pi/4$ -DQPSK	2400-2483.5	79	≥15
8-DPSK	2400-2483.5	79	≥15

GFSK

Date: 19.JUN.2019 19:46:59

$\pi/4$ -DQPSK

8-DPSK



FCC §15.247(a) (1) (iii) - TIME OF OCCUPANCY (DWELL TIME)**Applicable Standard**

According to FCC §15.247(a) (1) (iii)

Frequency hopping systems in the 2400-2483.5 MHz shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

Test Procedure

The EUT was worked in channel hopping; the time of single pulses was tested.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	EMI Test Receiver	ESR3	102453	2018-06-26	2019-06-26
Unknown	Coaxial Cable	C-SJ00-0010	C0010/01	Each time	N/A

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data**Environmental Conditions**

Temperature:	29.2 °C
Relative Humidity:	46 %
ATM Pressure:	99.2 kPa
Tester:	Vern Shen
Test Date:	2019-06-19

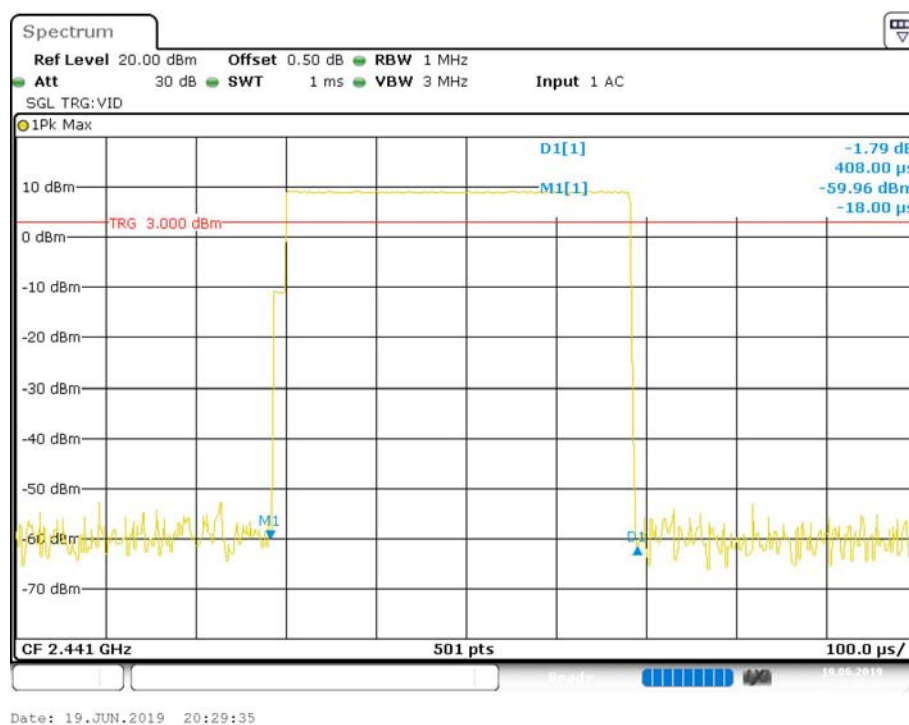
Test Result: Compliance.

Please refer to following tables and plots

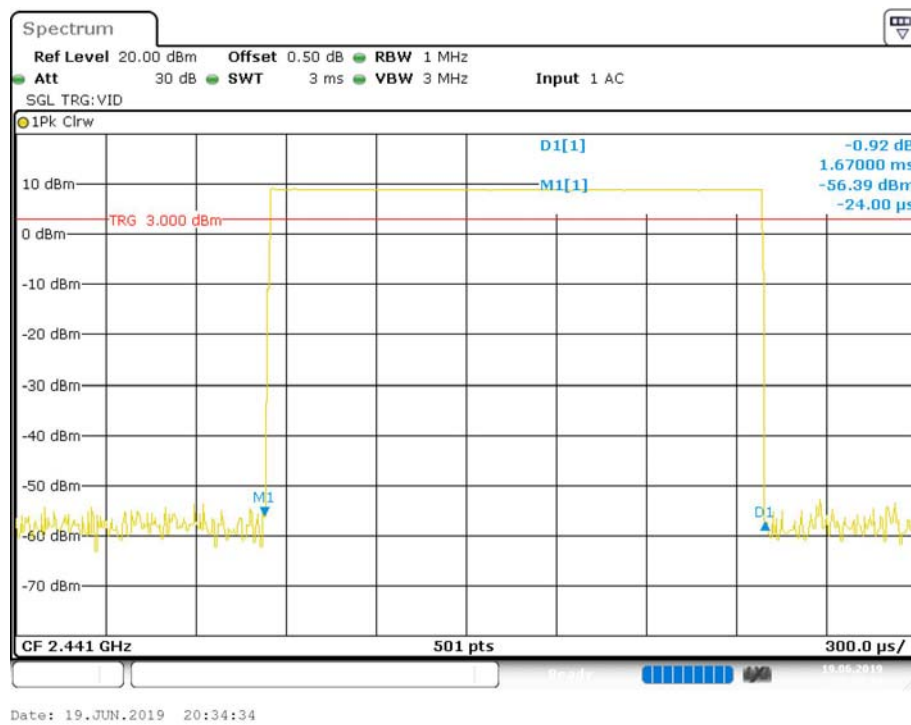
Test Mode: Transmitting

Mode	Packet type	Channel	Frequency (MHz)	Pulse width (ms)	Result (s)	Limit (s)
GFSK	DH1	Middle	2441	0.408	0.131	0.4
	DH3	Middle	2441	1.670	0.267	
	DH5	Middle	2441	2.940	0.314	
$\pi/4$ DQPSK	2DH1	Middle	2441	0.414	0.132	
	2DH3	Middle	2441	1.674	0.268	
	2DH5	Middle	2441	2.930	0.313	
8-DPSK	3DH1	Middle	2441	0.414	0.132	
	3DH3	Middle	2441	1.674	0.268	
	3DH5	Middle	2441	2.950	0.315	

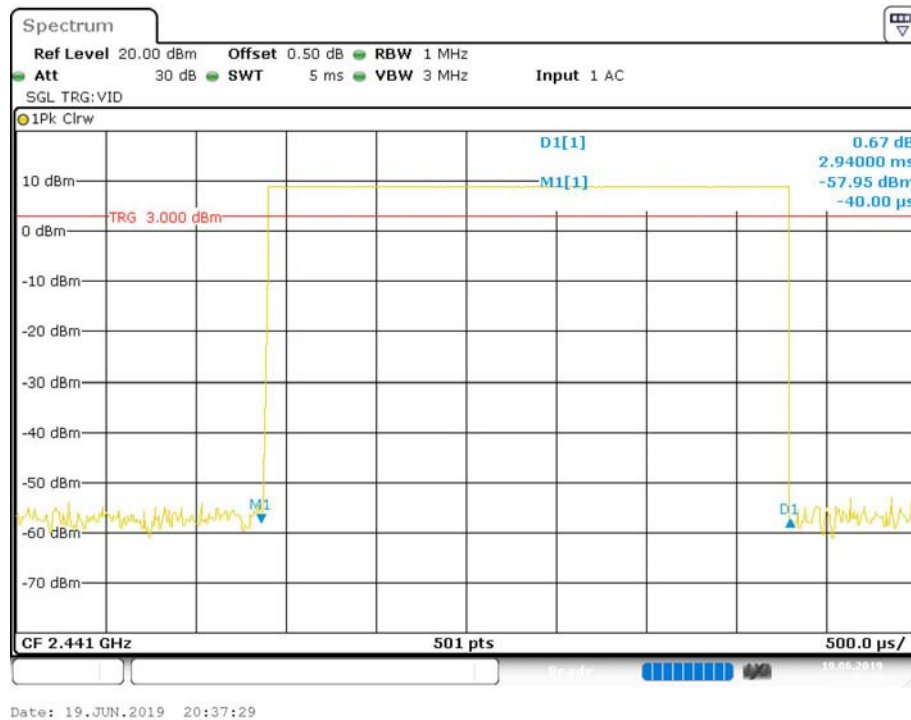
Note:
DH1:Dwell time=Pulse time (ms) $\times$ (1600/2/79) $\times$ 31.6 s
DH3:Dwell time=Pulse time (ms) $\times$ (1600/4/79) $\times$ 31.6 s
DH5:Dwell time=Pulse time (ms) $\times$ (1600/6/79) $\times$ 31.6 s

*BDR Mode (GFSK):***DH1: Middle Channel**

DH3: Middle Channel

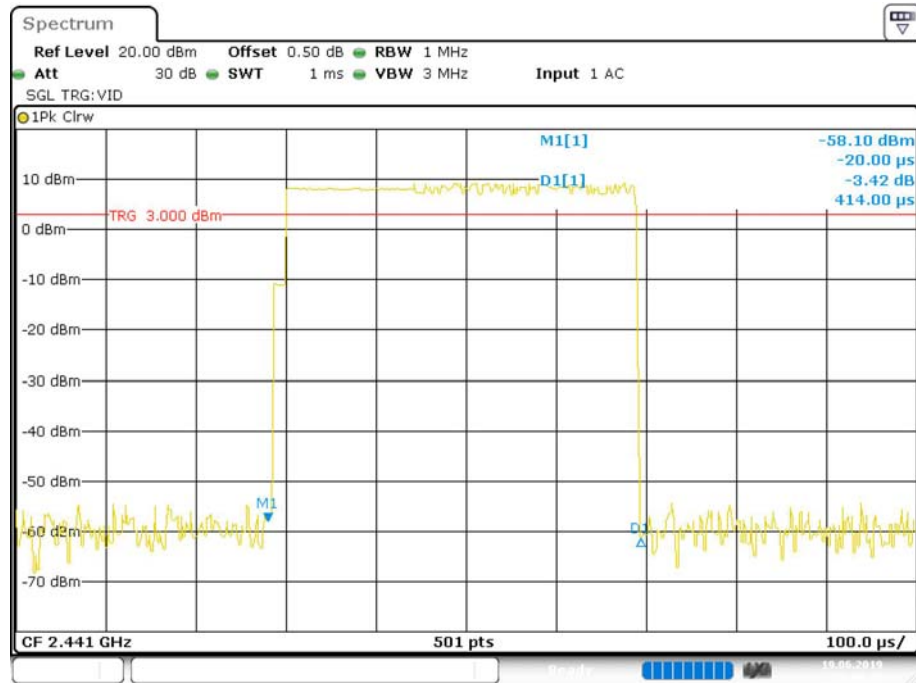


DH5: Middle Channel

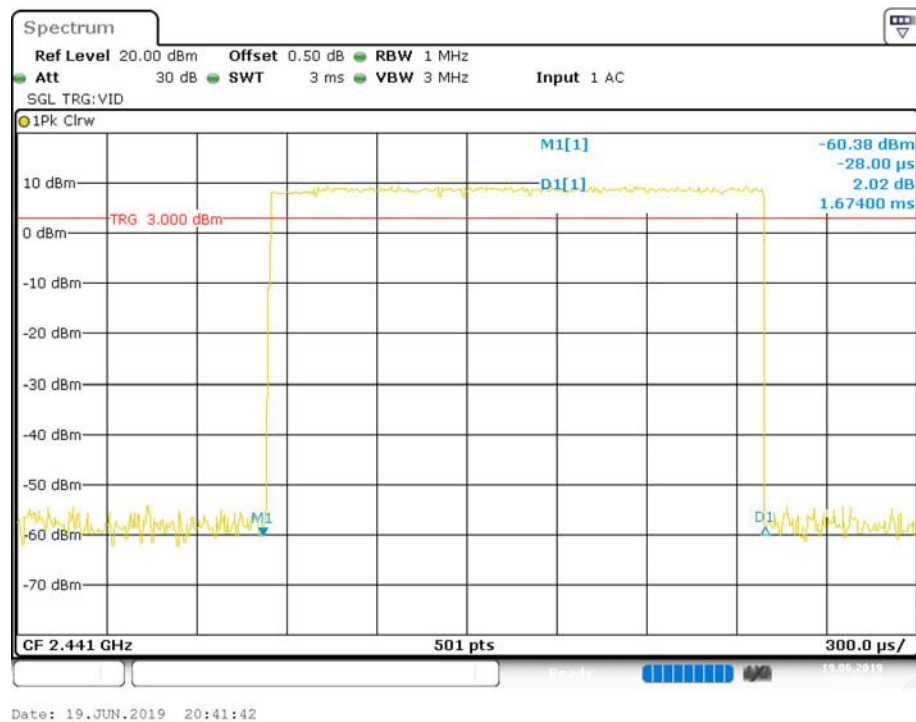


EDR Mode ($\pi/4$ -DQPSK):

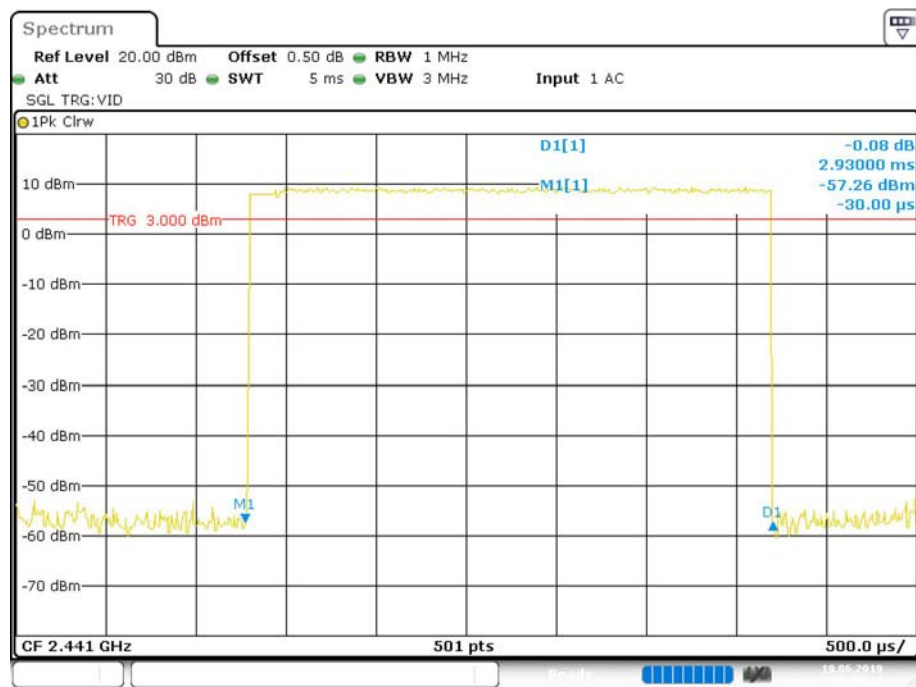
2DH1: Middle Channel



2DH3: Middle Channel



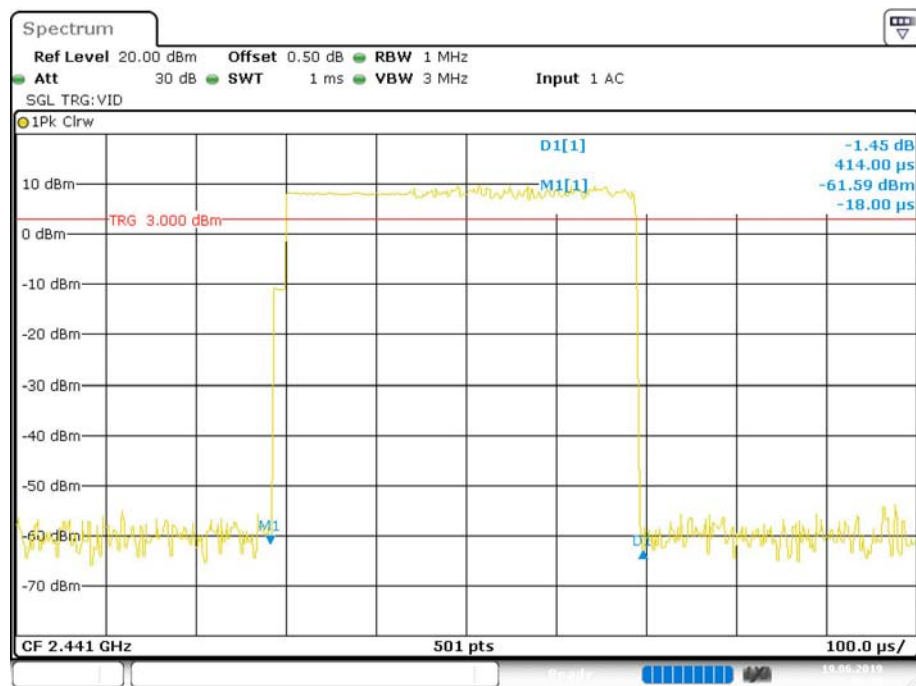
2DH5: Middle Channel



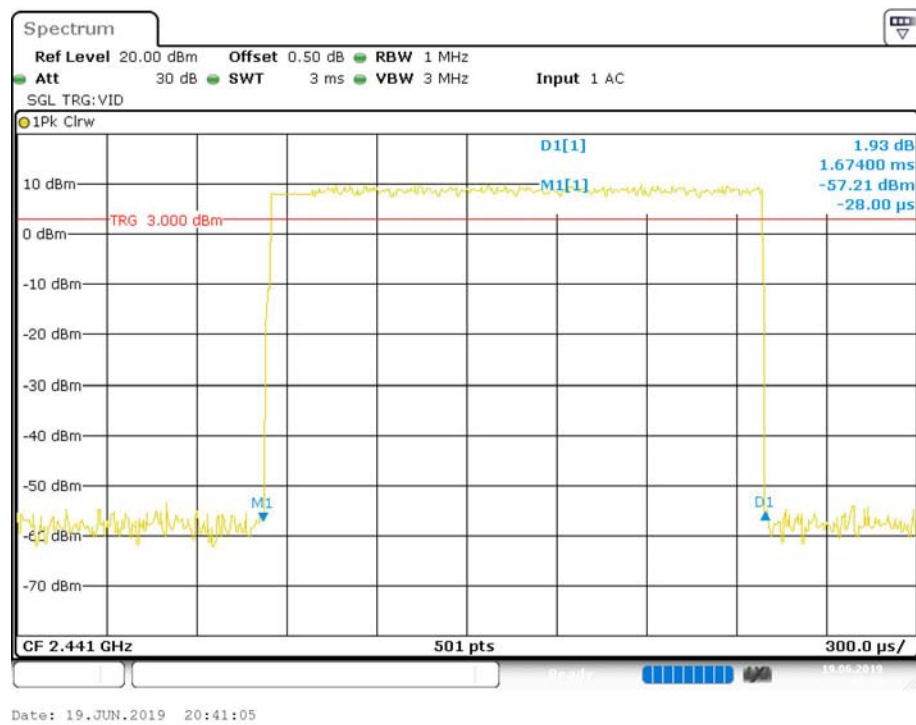
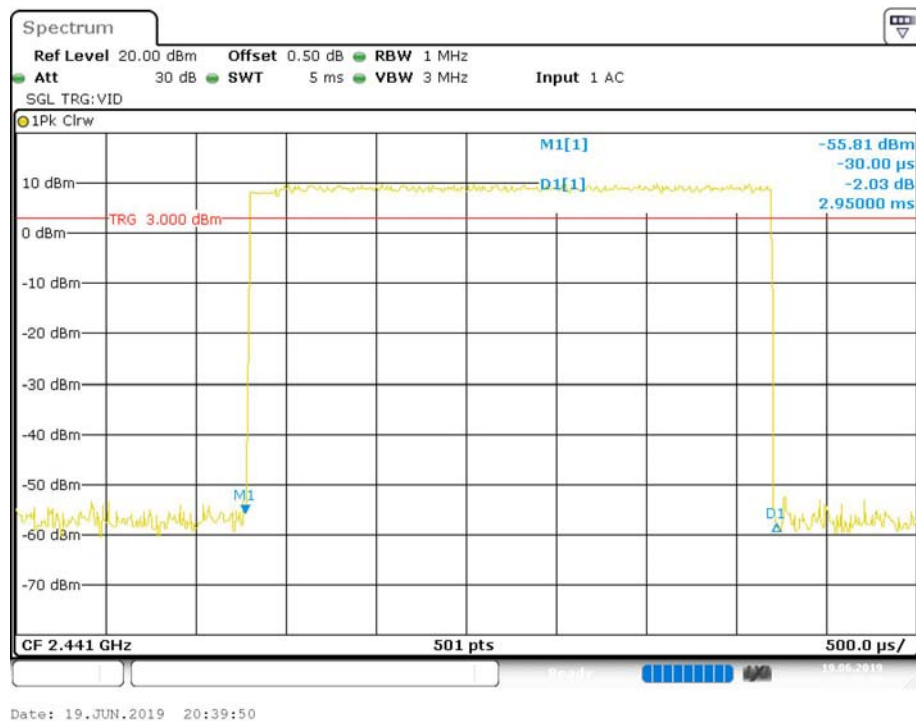
Date: 19.JUN.2019 20:39:12

EDR Mode (8-DPSK):

3DH1: Middle Channel



Date: 19.JUN.2019 20:46:00

3DH3: Middle Channel**3DH5: Middle Channel**

FCC §15.247(b) (1) - PEAK OUTPUT POWER MEASUREMENT**Applicable Standard**

According to §15.247(b) (1), for frequency hopping systems operating in the 2400–2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725–5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400–2483.5 MHz band: 0.125 watts

Test Procedure

1. Place the EUT on a bench and set in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to one test equipment.
3. Add a correction factor to the display.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	EMI Test Receiver	ESR3	102453	2018-06-26	2019-06-26
Unknown	Coaxial Cable	C-SJ00-0010	C0010/01	Each time	N/A

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data**Environmental Conditions**

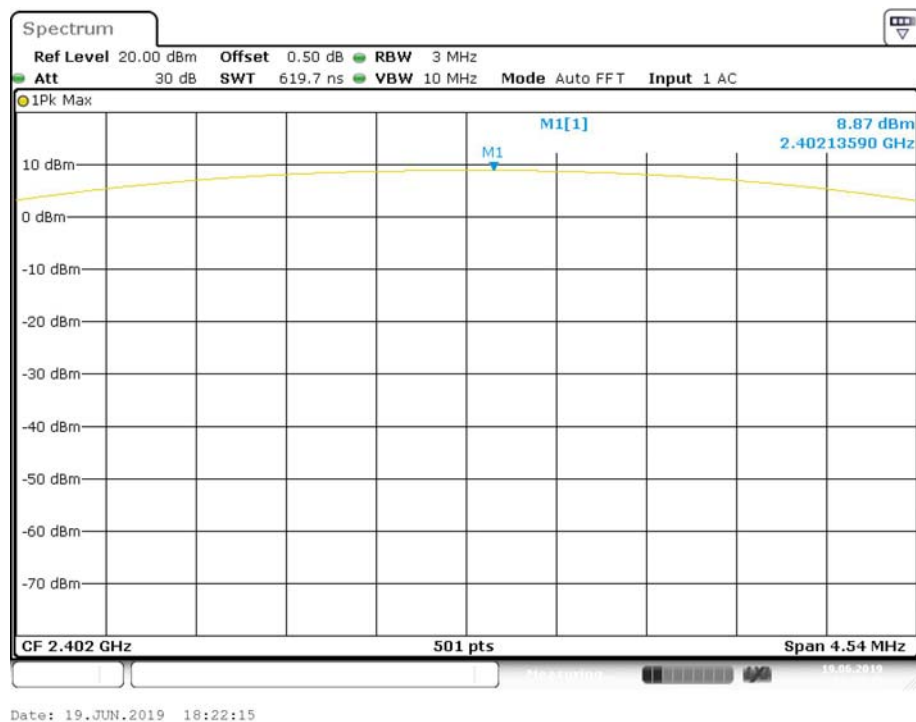
Temperature:	29.2 °C
Relative Humidity:	46 %
ATM Pressure:	99.2 kPa
Tester:	Vern Shen
Test Date:	2019-06-19

Test Result: Compliance.

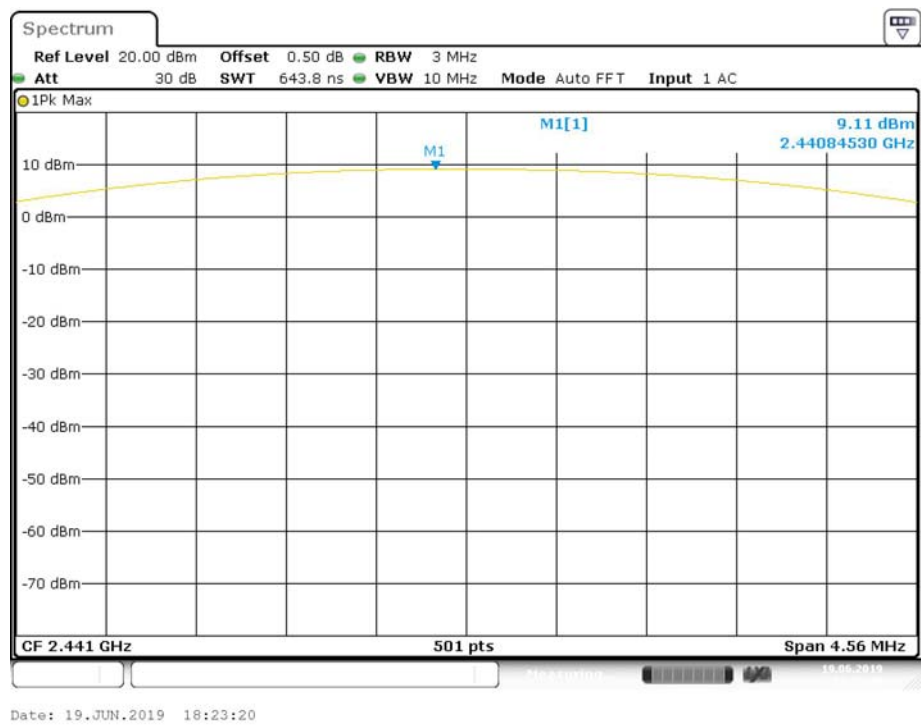
Test Mode: Transmitting

Mode	Frequency (MHz)	Peak Conducted Output power (dBm)	Limit (dBm)
BDR Mode (GFSK)	2402	8.87	21
	2441	9.11	21
	2480	8.59	21
EDR Mode ($\pi/4$ -DQPSK)	2402	9.54	21
	2441	9.80	21
	2480	9.29	21
EDR Mode (8-DPSK)	2402	10.02	21
	2441	10.27	21
	2480	9.76	21

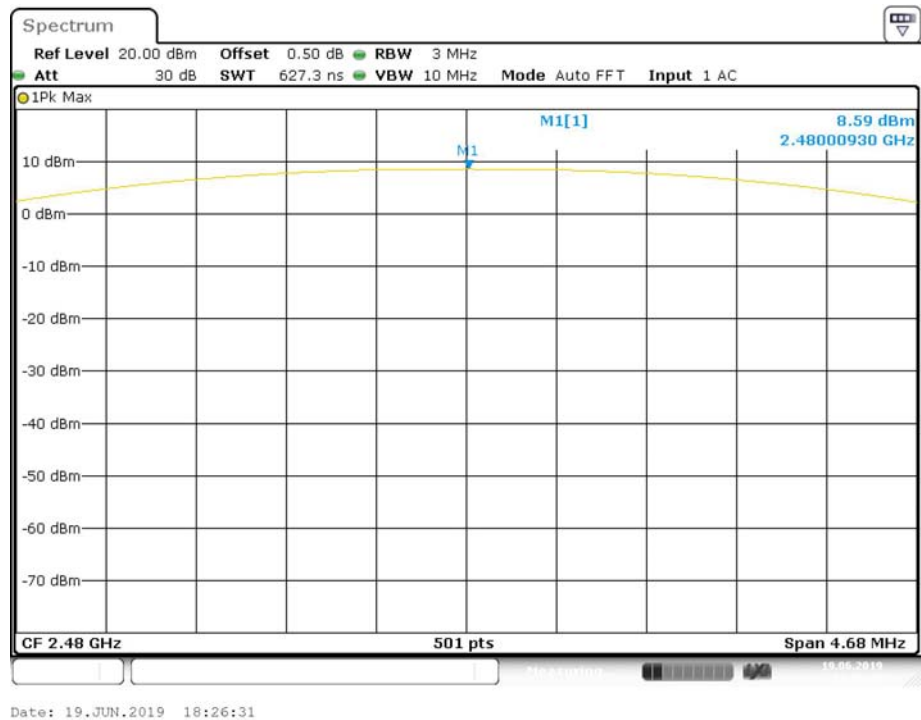
Note: The data above was tested in conducted mode, the antenna gain is 0 dBi.

*BDR Mode (GFSK):***Low Channel**

Middle Channel

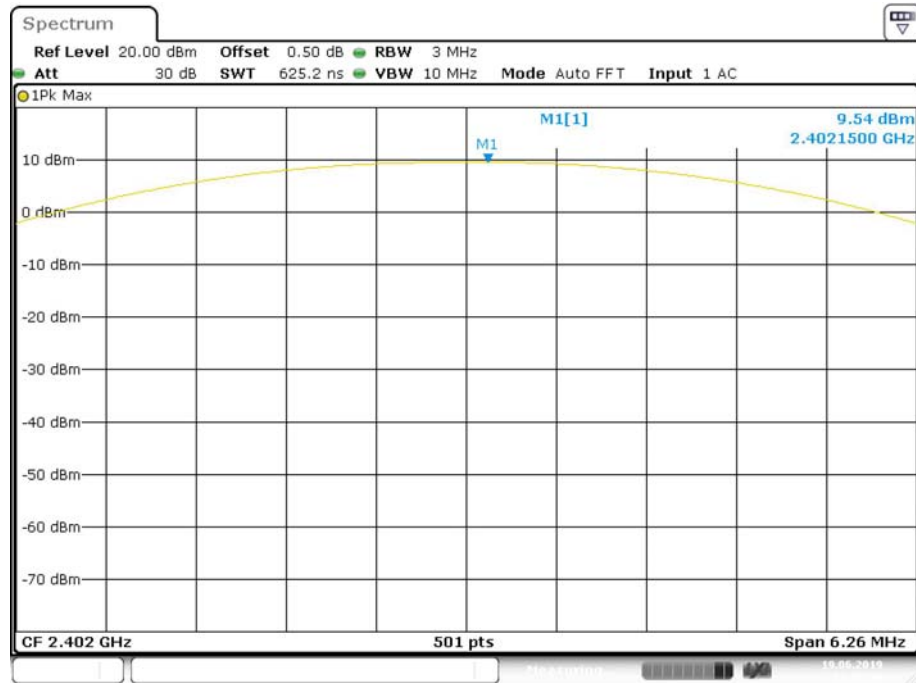


High Channel



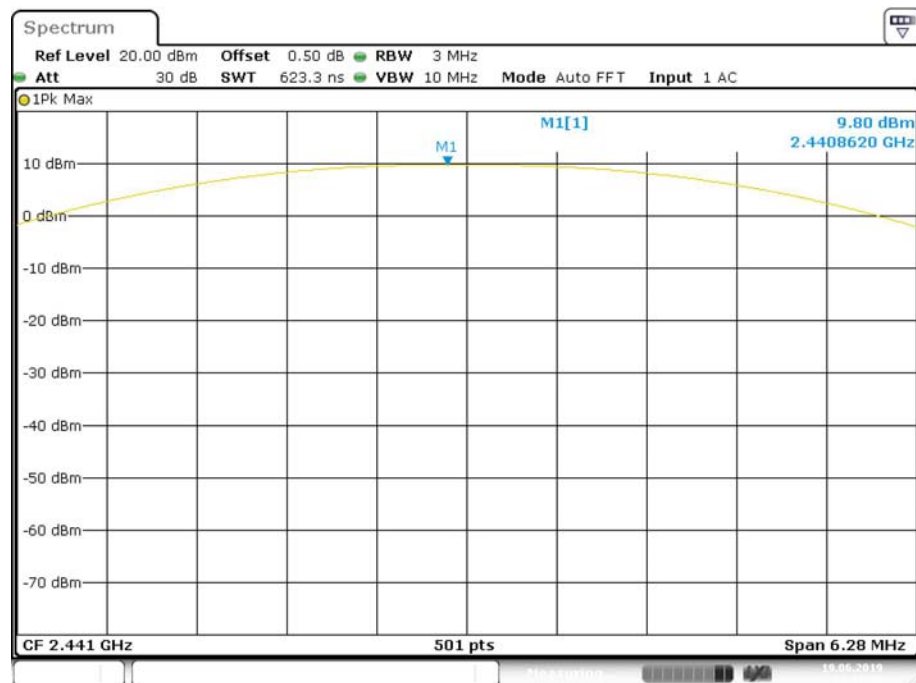
EDR Mode ($\pi/4$ -DQPSK):

Low Channel

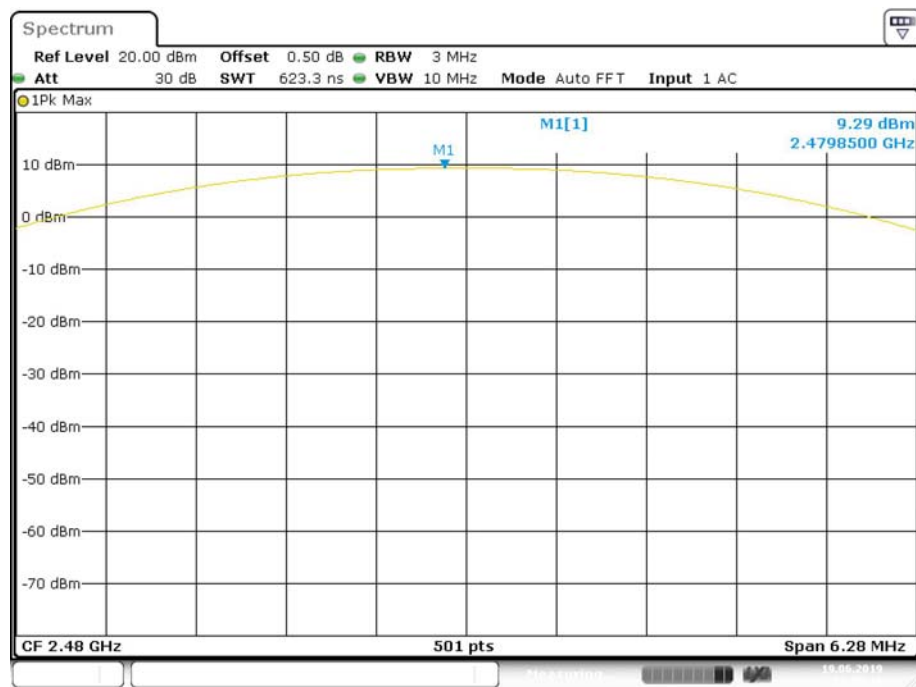


Date: 19.JUN.2019 18:32:36

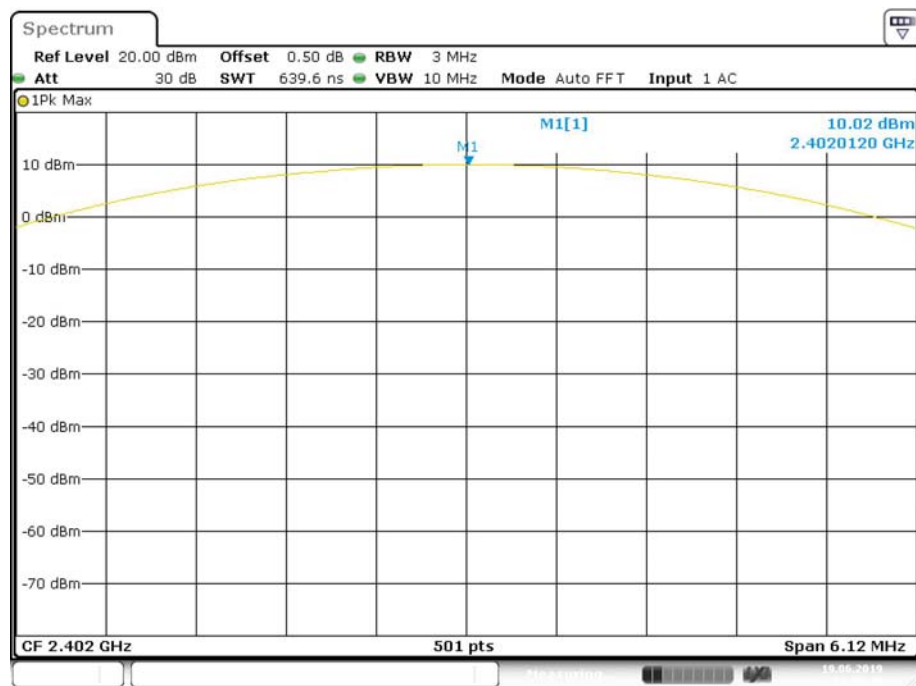
Middle Channel



Date: 19.JUN.2019 18:31:34

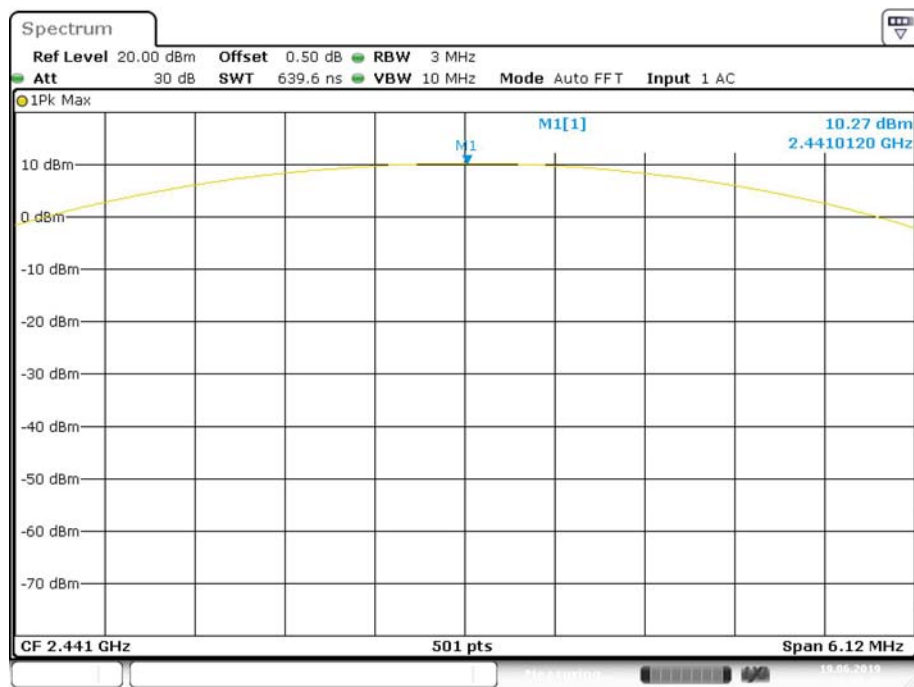
High Channel

Date: 19.JUN.2019 18:30:16

*EDR Mode (8-DPSK):***Low Channel**

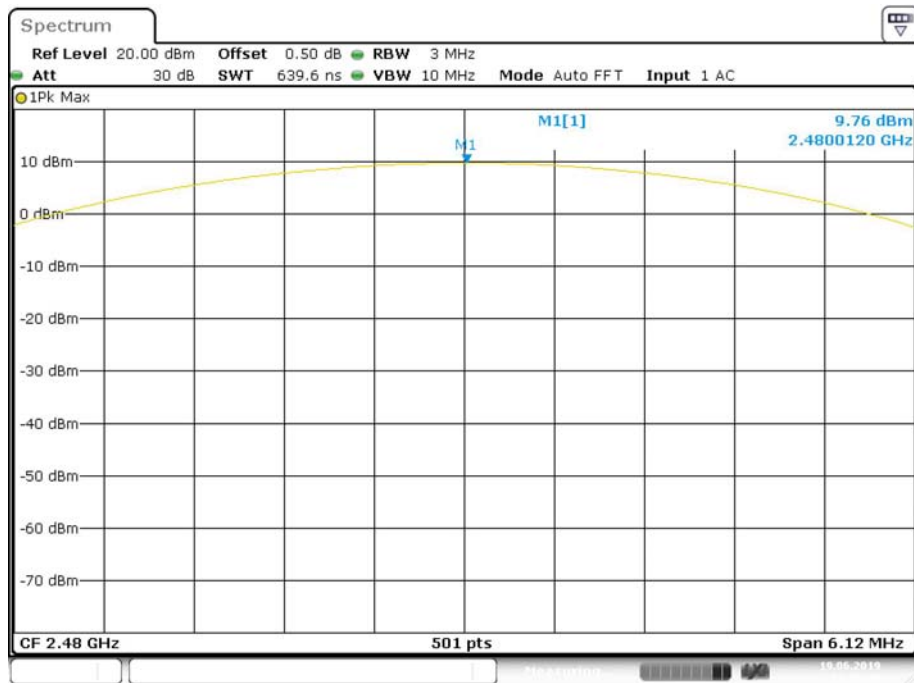
Date: 19.JUN.2019 18:33:40

Middle Channel



Date: 19.JUN.2019 18:34:47

High Channel



Date: 19.JUN.2019 18:35:40

FCC §15.247(d) - BAND EDGES TESTING**Applicable Standard**

According to FCC §15.247(d):

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Remove the antenna from the EUT and then connect to a low loss RF cable from the antenna port to a EMI test receiver, then turn on the EUT and make it operate in transmitting mode. Then set it to Low Channel and High Channel within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW/ VBW of spectrum analyzer to 100/300 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

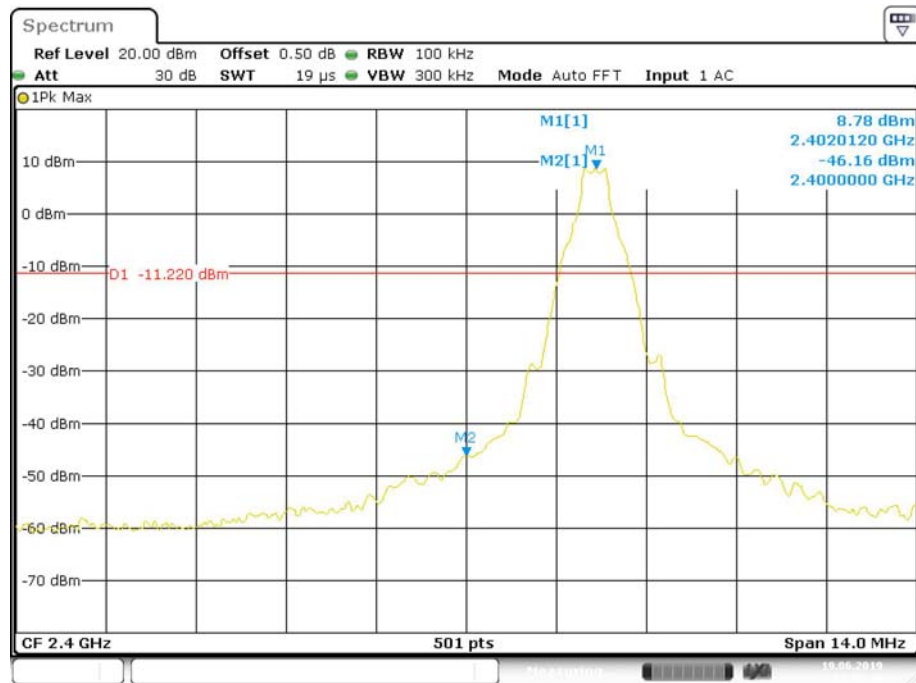
Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	EMI Test Receiver	ESR3	102453	2018-06-26	2019-06-26
Unknown	Coaxial Cable	C-SJ00-0010	C0010/01	Each time	N/A

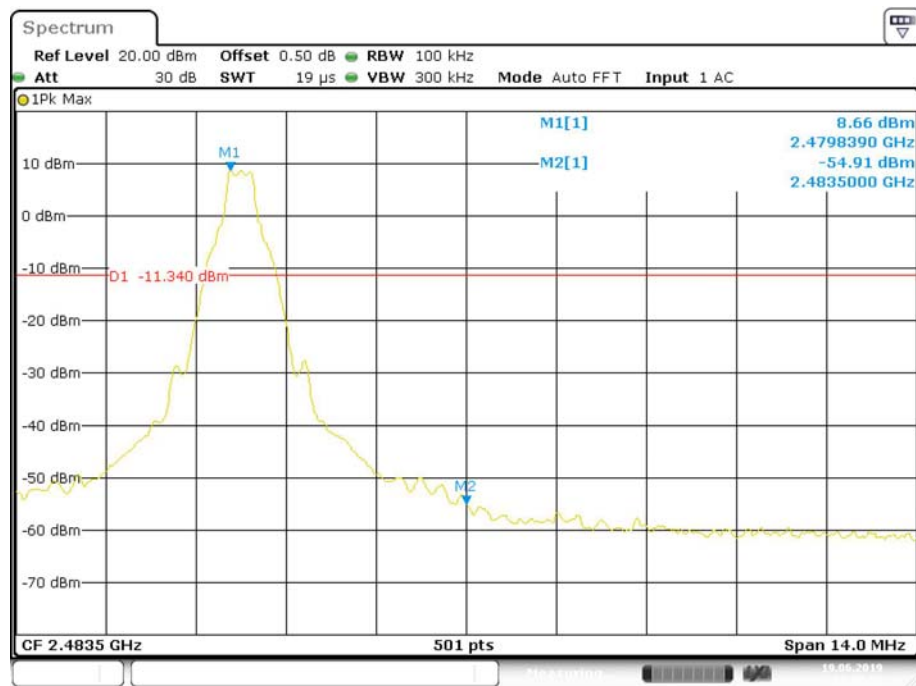
* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data**Environmental Conditions**

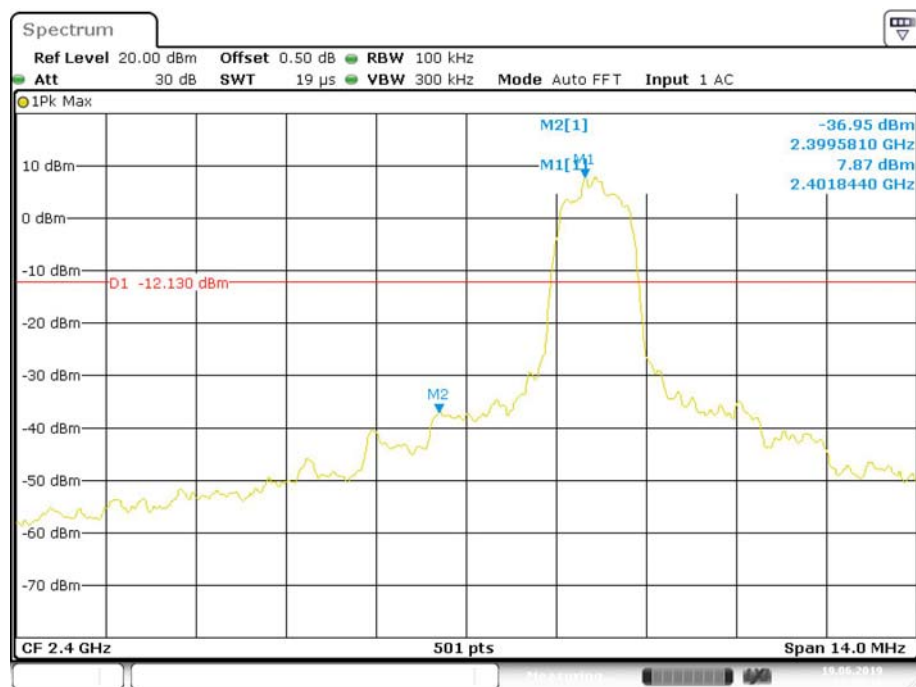
Temperature:	29.2 °C
Relative Humidity:	46 %
ATM Pressure:	99.2 kPa
Tester:	Vern Shen
Test Date:	2019-06-19

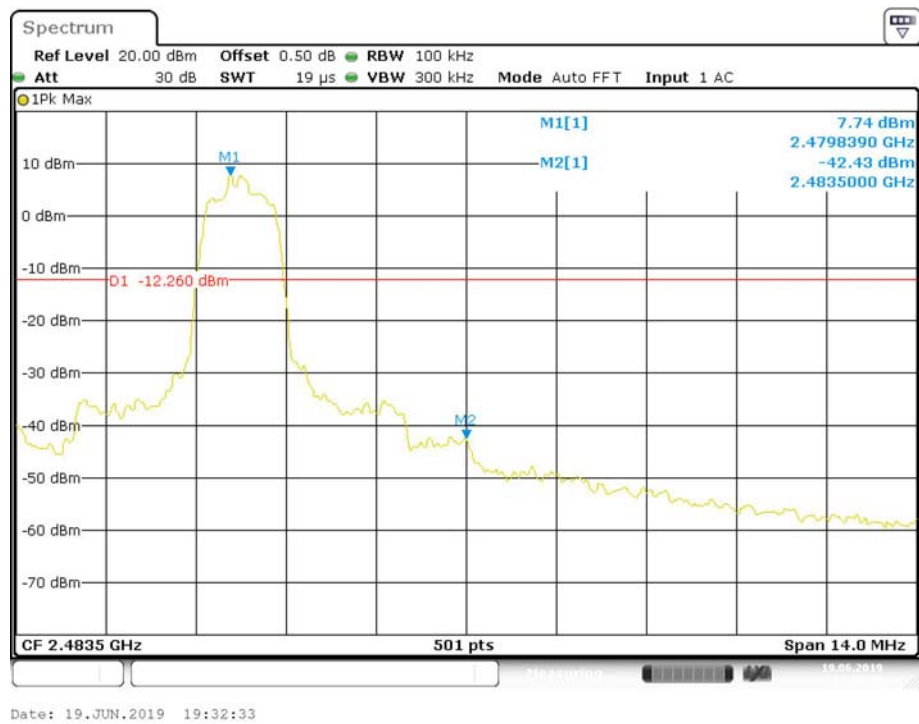
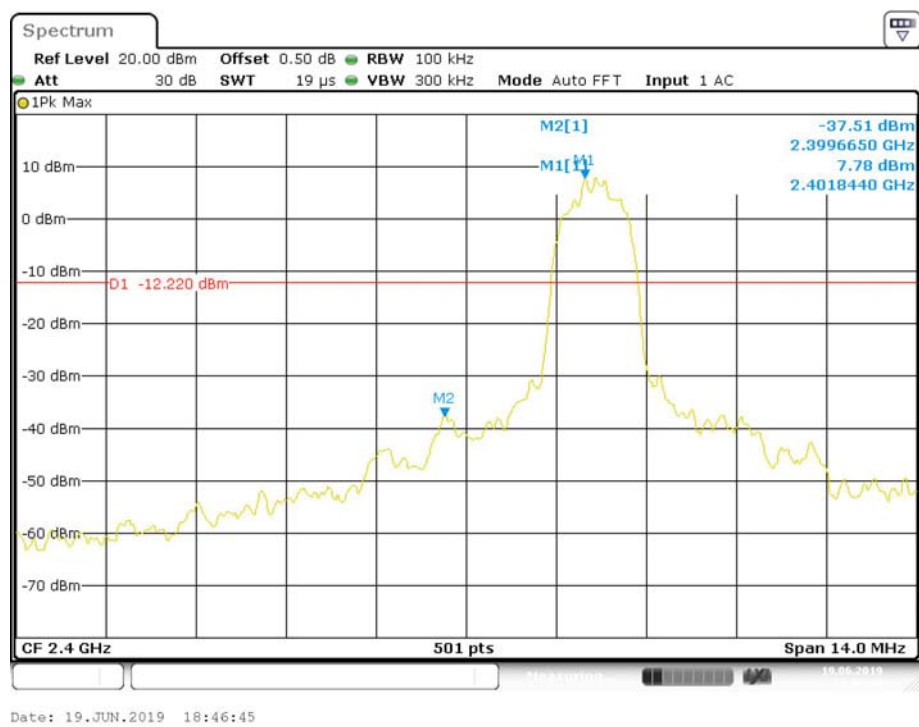
Test Result: Compliance*Single Channel:**BDR Mode (GFSK):***Band Edge, Left Side**

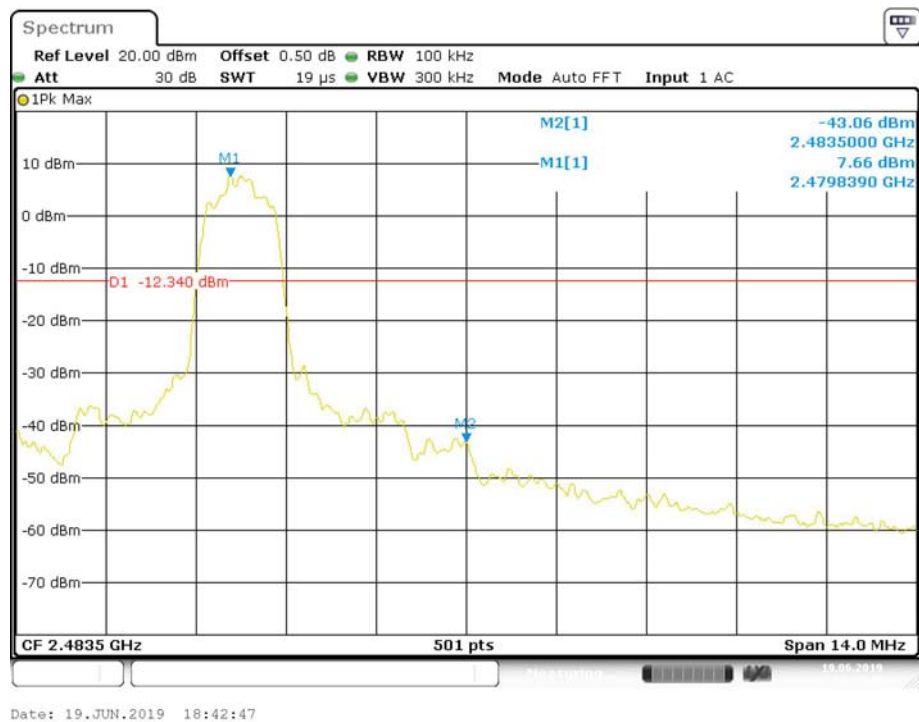
Date: 19.JUN.2019 19:39:46

Band Edge, Right Side

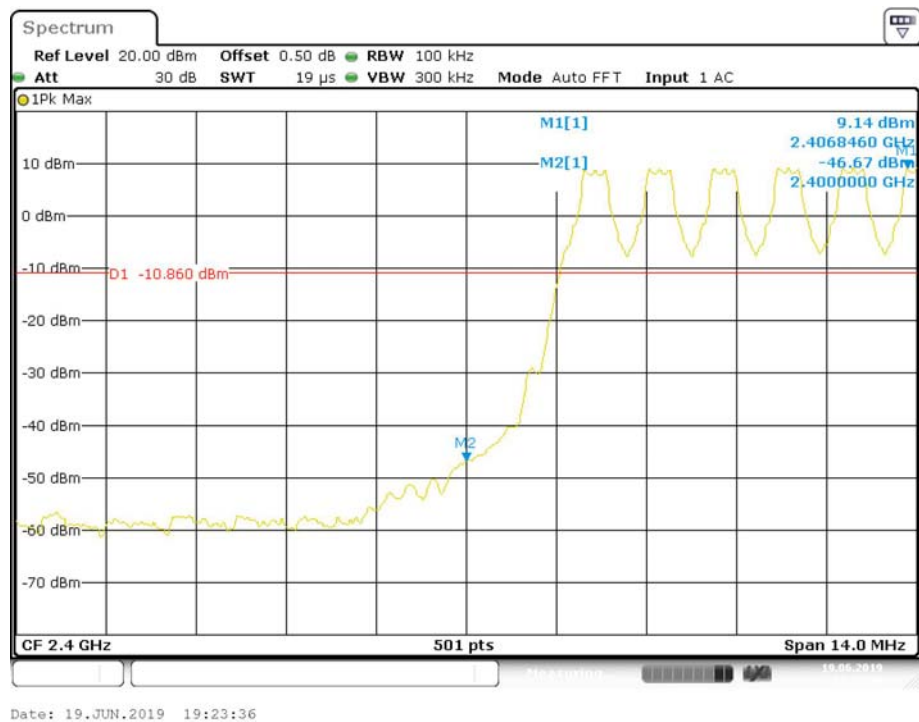
EDR Mode ($\pi/4$ -DQPSK):

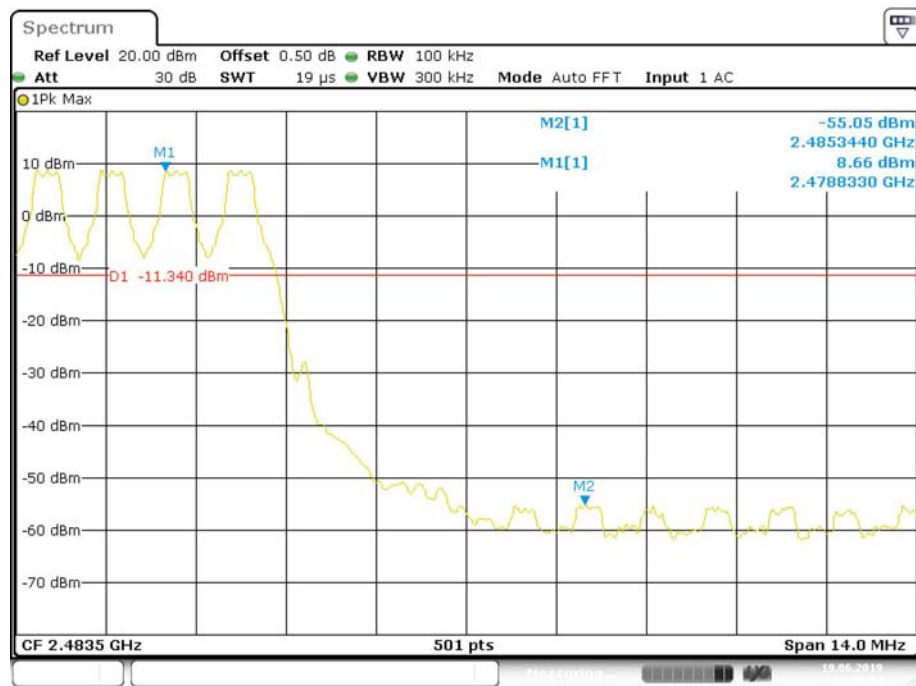
Band Edge, Left Side

Band Edge, Right Side*EDR Mode (8-DPSK)***Band Edge, Left Side**

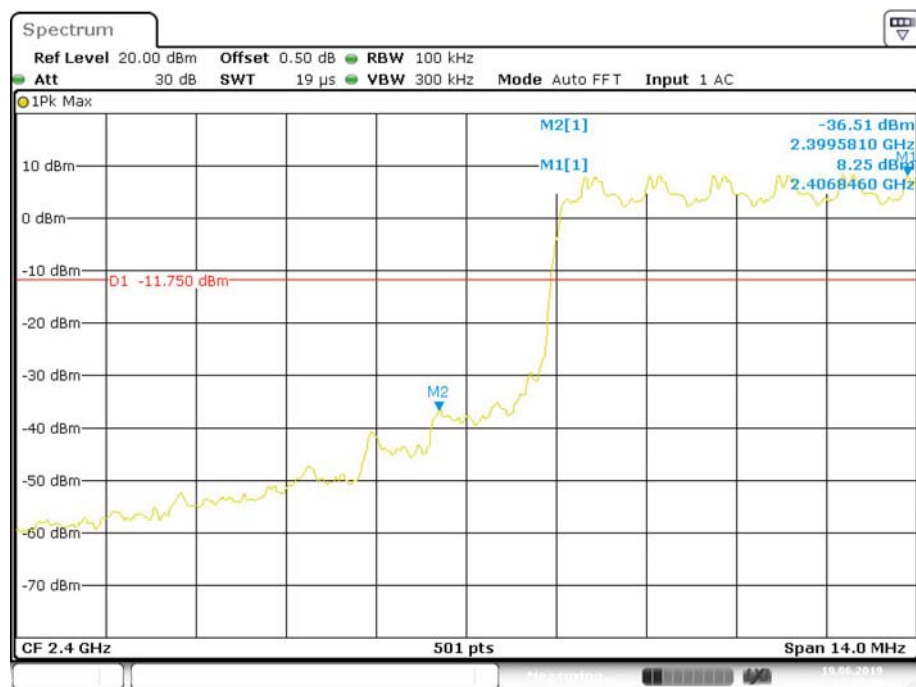
Band Edge, Right Side

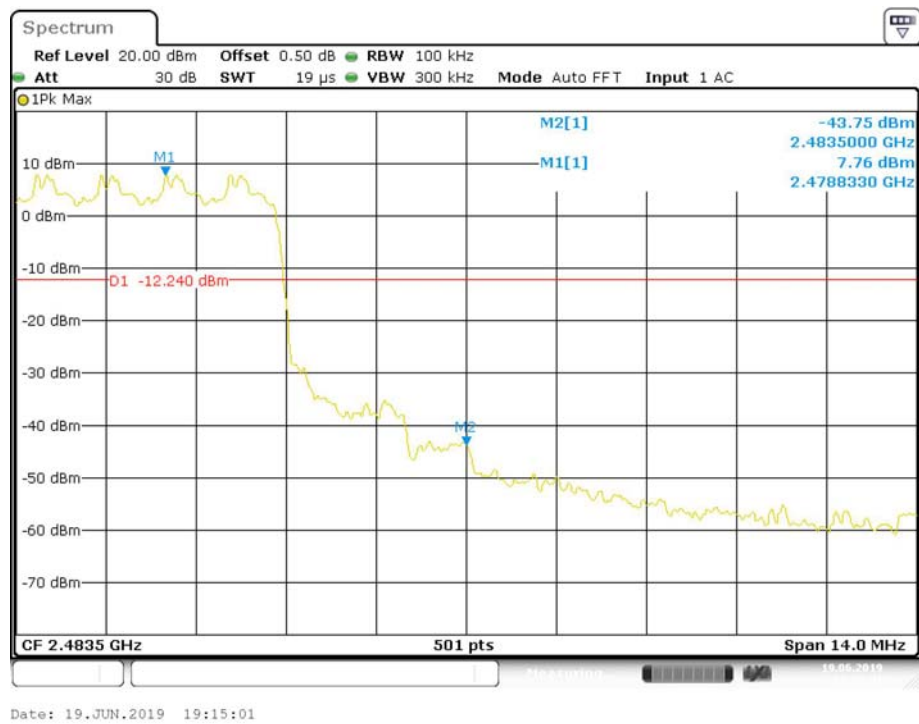
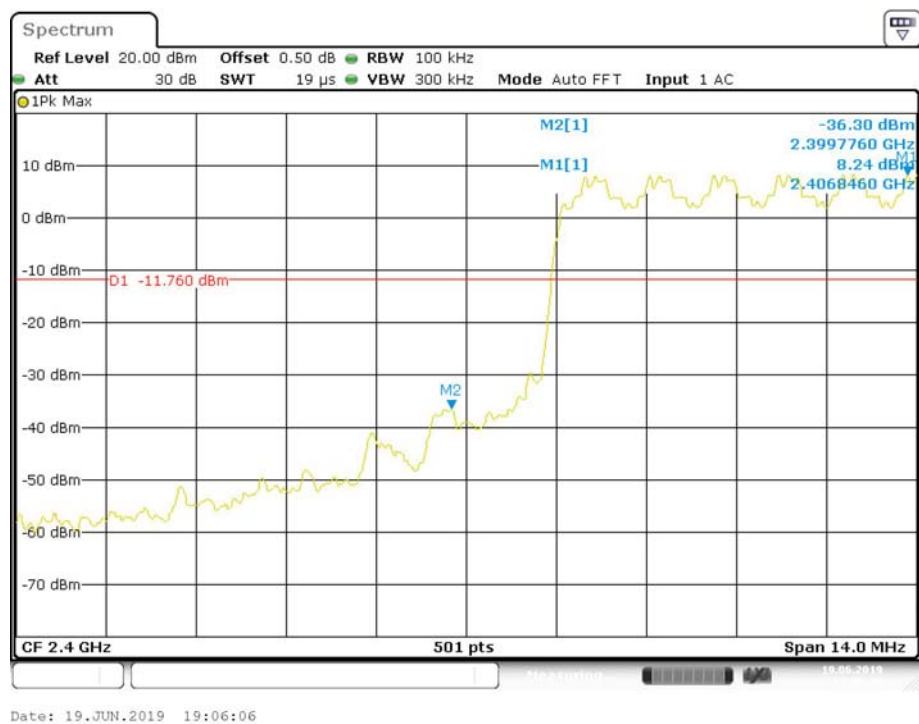
*Hopping Mode,
BDR Mode (GFSK):*

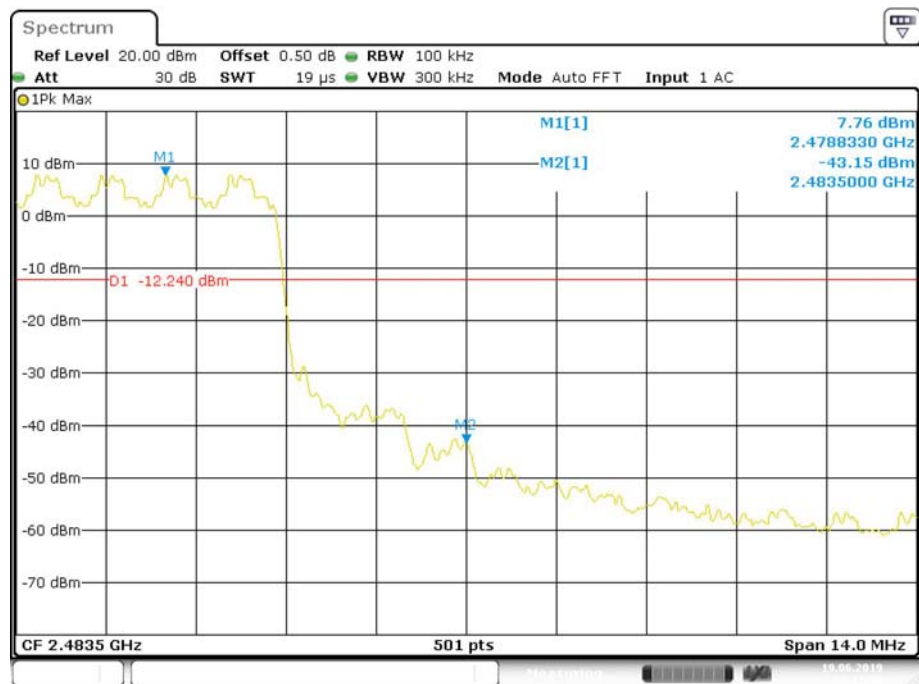
Band Edge, Left Side

Band Edge, Right Side

EDR Mode ($\pi/4$ -DQPSK):

Band Edge, Left Side

Band Edge, Right Side*EDR Mode (8-DPSK):***Band Edge, Left Side**

Band Edge, Right Side

Date: 19.JUN.2019 19:11:56

****** END OF REPORT ******