



Date: 2014-09-05 Page 1 of 93

No.: DM116531

Applicant: HORI Co., Ltd.

640 Saedo-Cho, Tsuzuki-ku, Yokohama-shi, Kanagawa-ken

224-0054, Japan

Manufacturer: HORI Co., Ltd.

640 Saedo-Cho, Tsuzuki-ku, Yokohama-shi, Kanagawa-ken

224-0054, Japan

Description of Sample(s): Product: Hori PAD Wireless

Brand Name: HORI

Model Number: HIP-043(U/E) FCC ID: RQZHIP-1716

Date Sample(s) Received: 2014-08-12

Date Tested: 2014-08-25 to 2014-09-03

Investigation Requested: Perform ElectroMagnetic Interference measurement in

accordance with FCC 47CFR [Codes of Federal

Regulations] Part 15: 2013 and ANSI C63.4: 2009 for FCC

Certification.

Conclusion(s): The submitted product <u>COMPLIED</u> with the requirements

of Federal Communications Commission [FCC] Rules and Regulations Part 15. The tests were performed in accordance with the standards described above and on Section 2.2 in this

Test Report.

Remark(s): Bluetooth DSS (GFSK / π /4-DQPSK / 8DPSK

LONG Yun Jian, Along
Authorized Signatory
ElectroMagnetic Compatibility Department
For and on behalf of
STC (Dongguan) Company Limited



Date: 2014-09-05 Page 2 of 93

Page 1 of 93

No.: DM116531

CONTENT:

	Cover Content	Page 1 of 93 Page 2-3 of 93
<u>1.0</u>	General Details	
1.1	Test Laboratory	Page 4 of 93
1.2	Equipment Under Test [EUT] Description of EUT operation	Page 4 of 93
1.3	Date of Order	Page 4 of 93
1.4	Submitted Sample	Page 4 of 93
1.5	Test Duration	Page 4 of 94
1.6	Country of Origin	Page 4 of 93
1.7	RF Module Details	Page 5 of 93
1.8	Antenna Details	Page 5 of 93
<u>2.0</u>	Technical Details	
2.1	Investigations Requested	Page 6 of 93
2.2	Test Standards and Results Summary	Page 6 of 94
2.3	Table for Test Modes	Page 7 of 93
<u>3.0</u>	Test Results	
3 1	Emission	Page 8 - 87 of 93



Date: 2014-09-05 Page 3 of 93

No.: DM116531

Appendix A

List of Measurement Equipment Page 88 of 93

Appendix B

Ancillary Equipment Page 89 of 93

Appendix C

Photographs Page 90- 93 of 93



Date: 2014-09-05 Page 4 of 93

No.: DM116531

1.0 General Details

1.1 Test Laboratory

STC (Dongguan) Company Limited

EMC Laboratory

68 Fumin Nan Road, Dalang, Dongguan, Guangdong, China

Telephone: (86 769) 81119888 Fax: (86 769) 81116222

1.2 Equipment Under Test [EUT] Description of Sample(s)

Product: Hori PAD Wireless Manufacturer: HORI Co., Ltd.

Brand Name: HORI

Model Number: HIP-043(U/E)

Rating: 5.0Vd.c. (Powered by PC USB port) / Li-ion rechargeable

battery x1 = 3.7Vd.c

1.2.1 Description of EUT Operation

The Equipment Under Test (EUT) is a Wireless game controller of HORI Co., Ltd., it is Audio System, modulation by IC; and type is frequency hopping spread spectrum Modulation.

1.3 Date of Order

2014-08-12

1.4 Submitted Sample(s):

1 Sample

1.5 Test Duration

2014-08-25 to 2014-09-03

1.6 Country of Origin

China



Date: 2014-09-05 Page 5 of 93

No.: DM116531

1.7 RF Module Details

Module Model Number: MARB0201

Module FCC ID: N/A

Module Transmission Type: Bluetooth V2.1+EDR

Modulation: FHSS (GFSK / π /4-DQPSK / 8DPSK)

Data Rates: 1MBps: GFSK

2 MBps: $\pi/4$ -DQPSK

3 MBps: 8DPSK

Frequency Range: 2400-2483.5MHz Carrier Frequencies: 2402MHz – 2480MHz

Module Specification (specification provided by manufacturer)

1.8 Antenna Details

Antenna Type: PCB Layout Meanderline antenna

Antenna Gain: 0dBi



Date: 2014-09-05 Page 6 of 93

No.: DM116531

2.0 Technical Details

2.1 Investigations Requested

Perform Electromagnetic Interference measurements in accordance with FCC 47CFR [Codes of Federal Regulations] Part 15: 2013 Regulations. FCC Pubic Notice DA 00-705 and ANSI C63.4: 2009 for FCC Certification.

2.2 Test Standards and Results Summary Tables

EMISSION Populte Summons						
Results Summary Test Condition Test Requirement Test Method			Class / Severity	Pass	est Resu Fail	ılt N/A
Maximum Peak Conducted Output Power	FCC 47CFR 15.247(b)(1)	FCC Pubic Notice DA 00-705	N/A	M		N/A
Radiated Spurious Emissions	FCC 47CFR 15.209	ANSI C63.4:2009	N/A			
AC Mains Conducted Emissions	FCC 47CFR 15.207	ANSI C63.4:2009	N/A			
Number of Hopping Frequency	FCC 47CFR 15.247(a)(2)(b)(1)	FCC Pubic Notice DA 00-705	N/A			
20dB Bandwidth	FCC 47CFR 15.247(a)(2)	FCC Pubic Notice DA 00-705	N/A			
Hopping Channel Separation	FCC 47CFR 15.247(a)(1)	FCC Pubic Notice DA 00-705	N/A			
Band-edge measurement (Radiated)	FCC 47CFR 15.247(c)	FCC Pubic Notice DA 00-705	N/A			
Pseudorandom Hopping Algorithm	FCC 47CFR 15.247(a)(1)	N/A	N/A			
Time of Occupancy (Dwell Time)	FCC 47CFR 15.247(a)(1)(iii)	FCC Pubic Notice DA 00-705	N/A			
Antenna requirement	FCC 47CFR 15.203	N/A	N/A			
RF Exposure	FCC 47CFR 15.247(i)	N/A	N/A	\boxtimes		

Note: N/A - Not Applicable



Date: 2014-09-05 Page 7 of 93

No.: DM116531

2.3 Table for Test Modes

Preliminary tests were performed in different data rate to find the worst radiated emission. The data rate in the table below is the worst case rate with respect to the specific test item. Investigation has been done on all the possible configurations for searching the worst cases. The following table is a list of the test modes shown in this test report.

Test Items Mode **Data Rate** Maximum Peak Conducted Output Power GFSK / π/4-DOPSK / 8DPSK 1MBps / 2MBps / 3MBps Hopping Channel Separation GFSK / π /4-DQPSK / 8DPSK 1MBps / 2MBps / 3MBps Number of Hopping Frequency GFSK / π/4-DQPSK / 8DPSK 2MBps Time of Occupancy(Dwell Time) 8DPSK (DH1 / DH3 / DH5) 2MBps Radiated Spurious Emissions GFSK / π/4-DQPSK / 8DPSK 1MBps / 2MBps / 3MBps Band-edge compliance of Conducted GFSK / π /4-DQPSK / 8DPSK 2MBps Emission



Date: 2014-09-05 Page 8 of 93

No.: DM116531

3.0 Test Results

3.1 Emission

3.1.1 Maximum Peak Conducted Output Power

Test Requirement: FCC 47CFR 15.247(b)(1)
Test Method: FCC Pubic Notice DA 00-705

Test Date: 2014-08-25 Mode of Operation: Tx mode

Test Method:


The RF output of the EUT was connected to the spectrum analyzer. All the attenuation or cable loss will be added to the measured maximum output power. The results are recorded in dBm.

Spectrum Analyzer Setting:

RBW = 3 MHz, VBW= 3MHz, Sweep = Auto, Span = 10MHz

Detector = Peak, Trace = Max. hold

Test Setup:

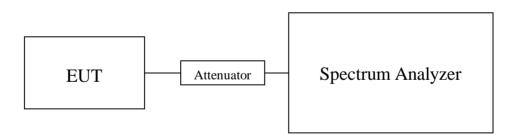



Date: 2014-09-05 Page 9 of 93

No.: DM116531

Limits for Maximum Peak Conducted Output Power [FCC 47CFR 15.247]:

The maximum peak output power shall not exceeded the following limits: For frequency hopping systems employing at least 75 hopping channels: 1 Watt

For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 Watts

For Digital Transmission systems in 2400-2483.5 MHz Band: 1 Watt

Results of Bluetooth Communication mode (GFSK) (Fundamental Power): Pass

Transmitter Frequency (MHz)	Maximum conducted output power (Watt)
2402	0.00058

Transmitter Frequency (MHz)	Maximum conducted output power (Watt)
2441	0.00070

Transmitter Frequency (MHz)	Maximum conducted output power (Watt)
2480	0.00069

Results of Bluetooth Communication mode (π /4-DQPSK) (Fundamental Power): Pass

Transmitter Frequency (MHz)	Maximum conducted output power (Watt)
2402	0.00066

Transmitter Frequency (MHz)	Maximum conducted output power (Watt)
2441	0.00068

Transmitter Frequency (MHz)	Maximum conducted output power (Watt)
2480	0.00069

Results of Bluetooth Communication mode (8 DPSK) (Fundamental Power): Pass

Transmitter Frequency (MHz)	Maximum conducted output power (Watt)
2402	0.00064

Transmitter Frequency (MHz)	Maximum conducted output power (Watt)
2441	0.00079

Transmitter Frequency (MHz)	Maximum conducted output power (Watt)
2480	0.00072

Calculated measurement uncertainty : 30MHz to 1GHz 1.7dB 1GHz to 18GHz 1.7dB

Remark:

- 1. All test data for each data rate were verified, but only the worst case was reported.
- 2. The EUT is programmed to transmit signals continuously for all testing.

STC (Dongguan) Company Limited

68 Fumin Nan Road, Dalang, Dongguan, China. (Zip Code: 523 770)


Tel: (86 769) 8111 9888 Fax: (86 769) 8111 6222 E-mail: dgstc@dgstc.org Homepage: www.dgstc.org



Date: 2014-09-05 Page 10 of 93


No.: DM116531

Test plot of Maximum Peak Conducted Output Power : Bluetooth Communication mode (GFSK, 2402MHz)

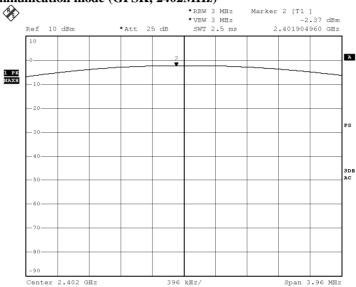

Date: 25.AUG.2014 19:44:26

Bluetooth Communication mode (GFSK, 2441MHz)

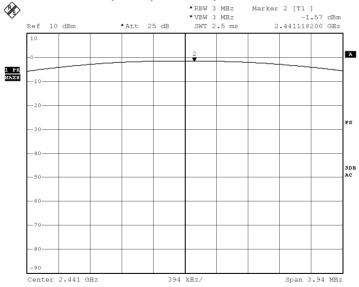

Date: 25.AUG.2014 19:45:33

STC (Dongguan) Company Limited

68 Fumin Nan Road, Dalang, Dongguan, China. (Zip Code : 523 770)


Tel : (86 769) 8111 9888 Fax : (86 769) 8111 6222 E-mail : dgstc@dgstc.org Homepage : www.dgstc.org



Date: 2014-09-05 Page 11 of 93


No.: DM116531

Bluetooth Communication mode (GFSK, 2480MHz)

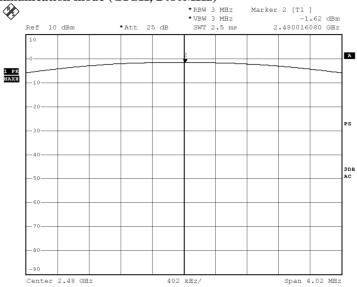

Date: 25.AUG.2014 19:46:26

Bluetooth Communication mode ($\pi/4$ -DQPSK, 2402MHz)

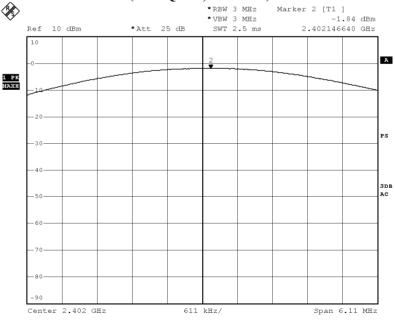

Date: 25.AUG.2014 19:47:26

STC (Dongguan) Company Limited

68 Fumin Nan Road, Dalang, Dongguan, China. (Zip Code: 523 770)


Tel: (86 769) 8111 9888 Fax: (86 769) 8111 6222 E-mail: dgstc@dgstc.org Homepage: www.dgstc.org



Date: 2014-09-05 Page 12 of 93


No.: DM116531

Bluetooth Communication mode ($\pi/4$ -DQPSK, 2441MHz)

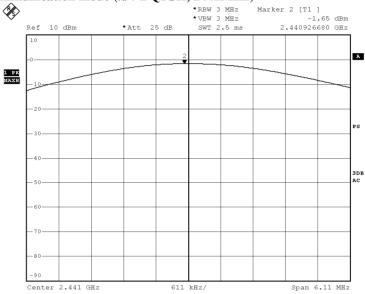

Date: 25.AUG.2014 19:48:07

Bluetooth Communication mode ($\pi/4$ -DQPSK, 2480MHz)

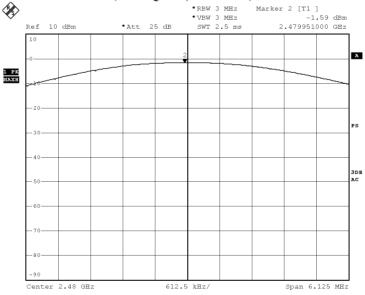

Date: 25.AUG.2014 19:49:00

STC (Dongguan) Company Limited

68 Fumin Nan Road, Dalang, Dongguan, China. (Zip Code : 523 770)


Tel : (86 769) 8111 9888 Fax : (86 769) 8111 6222 E-mail : dgstc@dgstc.org Homepage : www.dgstc.org



Date: 2014-09-05 Page 13 of 93


No.: DM116531

Bluetooth Communication mode (8DPSK, 2402MHz)

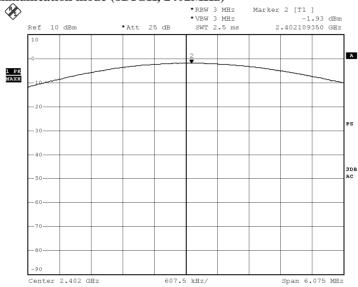

Date: 25.AUG.2014 19:49:47

Bluetooth Communication mode (8DPSK, 2441MHz)

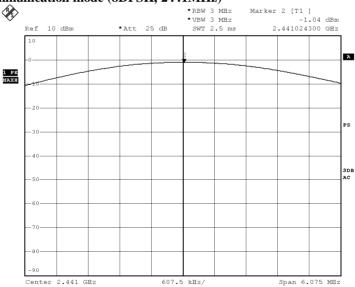

Date: 25.AUG.2014 19:50:38

STC (Dongguan) Company Limited

68 Fumin Nan Road, Dalang, Dongguan, China. (Zip Code: 523 770)


Tel: (86 769) 8111 9888 Fax: (86 769) 8111 6222 E-mail: dgstc@dgstc.org Homepage: www.dgstc.org



Date: 2014-09-05 Page 14 of 93

No.: DM116531

Bluetooth Communication mode (8DPSK, 2480MHz)

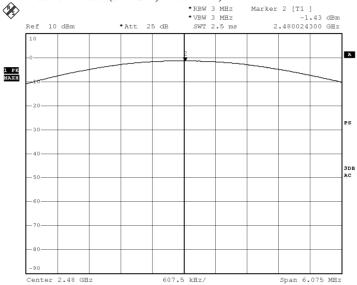

Date: 25.AUG.2014 19:51:33



Date: 2014-09-05 Page 15 of 93

No.: DM116531

3.1.2 Radiated Spurious Emissions

Test Requirement: FCC 47CFR 15.209
Test Method: ANSI C63.4:2009
Test Date: 2014-09-02

Mode of Operation: Bluetooth mode / Bluetooth +Charging mode (GFSK / π /4-

DQPSK/8DPSK)

Test Method:

The sample was placed 0.8m above the ground plane of semi-anechoic Chamber*. Measurements in both horizontal and vertical polarities were performed. During the test, each emission was maximized by: having the EUT continuously working, investigated all operating modes, considered typical configuration to obtain worst position, manipulating interconnecting cables, rotating turntable, varying antenna height from 1m to 4m in both horizontal and vertical polarizations. The emissions worst -case are shown in Test Results of the following pages.

*: Semi-anechoic chamber located on the STC (Dongguan) Company Ltd. 68 Fumin Nan Road, Dalang, Dongguan, Guangdong, PRC with a metal ground plane filed with the FCC pursuant to section 2.948 of the FCC rules, with Registration Number: 629686.



Date: 2014-09-05 Page 16 of 93

No.: DM116531

Spectrum Analyzer Setting:

9KHz – 30MHz (Pk & Av) RBW: 10kHz

VBW: 30kHz Sweep: Auto

Span: Fully capture the emissions being measured

Trace: Max. hold

30MHz – 1GHz (QP) RBW: 120kHz

VBW: 120kHz Sweep: Auto

Span: Fully capture the emissions being measured

Trace: Max. hold


Above 1GHz (Pk & Av) RBW: 1MHz

VBW: 3MHz Sweep: Auto

Span: Fully capture the emissions being measured

Trace: Max. hold

Test Setup:

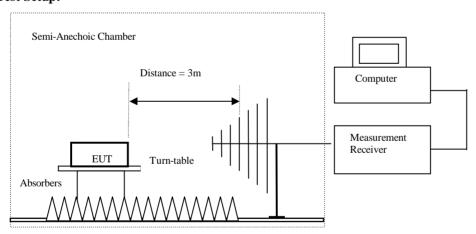

Ground Plane

- Absorbers placed on top of the ground plane are for measurements above 1000MHz only.
- Measurements between 30MHz to 1000MHz made with Bi-log antennas, above 1000MHz horn antennas are used, 9kHz to 30MHz loop antennas are used.



Date: 2014-09-05 Page 17 of 93

No.: DM116531

Limits for Radiated Emissions [FCC 47 CFR 15.209 Class B]:

Emilia for Reduced Emissions [1 ee 47 effective emissions].			
Quasi-Peak Limits			
$[\mu V/m]$			
2400/F (kHz)			
24000/F (kHz)			
30			
100			
150			
200			
500			

The emission limits shown in the above table are based on measurement employing a CISPR quasi-peak detector and above 1000MHz are based on measurements employing an average detector.

Result of Tx mode (2402.0 MHz) (GFSK mode) (9kHz - 30MHz): Pass

	Field Strength of Spurious Emissions								
Peak Value									
Frequency	Measured	Correction	Field	Field	Limit	E-Field			
	Level	Factor	Strength	Strength		Polarity			
MHz	dBuV	dB/m	dBuV/m	u V/m	u V/m				
	Emissions detected are more than 20 dB below the FCC Limits								

Result of Tx mode (2402.0 MHz) (GFSK mode) (30MHz - 1GHz): Pass

icount of TAIN	csuit of 1x mode (2402.0 MHz) (GF51X mode) (30MHz = 1GHz). 1 ass									
Field Strength of Spurious Emissions										
Quasi-Peak Value										
Frequency	Measured	Correction	Field	Field	Limit	E-Field				
	Level	Factor	Strength	Strength		Polarity				
MHz	dBu V	dB/m	dBuV/m	u V/m	u V/m					
	Emissions detected are more than 20 dB below the FCC Limits									

Result of Tx mode (2402.0 MHz) (GFSK mode) (Above 1GHz): Pass

		Field Streng	th of Spuriou	s Emissions					
Peak Value									
Frequency	Measured	Correction	Field	Limit	Margin	E-Field			
	Level @3m	Factor	Strength	@ 3m		Polarity			
MHz	dΒμV	dB/m	dBμV/m	dBμV/m	dBμV/m				
4804.0	15.1	41.5	56.6	74.0	17.4	Vertical			
4804.0	13.4	42.4	55.8	74.0	18.2	Horizontal			
7206.0	10.3	45.1	55.4	74.0	18.6	Vertical			
7206.0	9.0	46.2	55.2	74.0	18.8	Horizontal			
9608.0	7.0	48.0	55.0	74.0	19.0	Vertical			
9608.0	8.0	48.8	56.8	74.0	17.2	Horizontal			
12010.0	4.1	51.5	55.6	74.0	18.4	Vertical			
12010.0	3.8	52.4	56.2	74.0	17.8	Horizontal			



Date: 2014-09-05 Page 18 of 93

No.: DM116531

Result of Tx mode (2402.0 MHz) (GFSK mode) (Above 1GHz): Pass

		Field Streng	th of Spuriou	ıs Emissions						
	Average Value									
Frequency	Measured	Correction	Field	Limit	Margin	E-Field				
	Level @3m	Factor	Strength	@ 3m		Polarity				
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dBuV/m					
4804.0	0.9	41.5	42.4	54.0	11.6	Vertical				
4804.0	-1.8	42.4	40.6	54.0	13.4	Horizontal				
7206.0	-4.2	45.1	40.9	54.0	13.1	Vertical				
7206.0	-6.6	46.2	39.6	54.0	14.4	Horizontal				
9608.0	-7.8	48.0	40.2	54.0	13.8	Vertical				
9608.0	-7.4	48.8	41.4	54.0	12.6	Horizontal				
12010.0	-11.2	51.5	40.3	54.0	13.7	Vertical				
12010.0	-10.5	52.4	41.9	54.0	12.1	Horizontal				

Result of Tx mode (2441.0 MHz) (GFSK mode) (9kHz - 30MHz): Pass

	Field Strength of Spurious Emissions								
Peak Value									
Frequency	Measured	Correction	Field	Field	Limit	E-Field			
	Level	Factor	Strength	Strength		Polarity			
MHz	dBuV	dB/m	dBuV/m	u V/m	u V/m				
	Emissions detected are more than 20 dB below the FCC Limits								

Results of Tx mode (2441.0 MHz) (GFSK mode) (30MHz - 1000MHz): PASS

	Field Strength of Spurious Emissions								
Quasi-Peak Value									
Frequency	Measured	Correction	Field	Field	Limit	E-Field			
	Level	Factor	Strength	Strength		Polarity			
MHz	dBuV	dB/m	dBuV/m	u V/m	u V/m				
	Emissions detected are more than 20 dB below the FCC Limits								



Date: 2014-09-05 Page 19 of 93

No.: DM116531

Result of Tx mode (2441.0 MHz) (GFSK mode) (Above 1GHz): Pass

		Field Streng	th of Spuriou	ıs Emissions						
	Peak Value									
Frequency	Measured	Correction	Field	Limit	Margin	E-Field				
	Level @3m	Factor	Strength	@ 3m		Polarity				
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dBuV/m					
4882.0	12.8	41.6	54.4	74.0	19.6	Vertical				
4882.0	12.1	42.5	54.6	74.0	19.4	Horizontal				
7323.0	10.5	45.2	55.7	74.0	18.3	Vertical				
7323.0	8.7	46.3	55.0	74.0	19.0	Horizontal				
9764.0	7.5	48.1	55.6	74.0	18.4	Vertical				
9764.0	4.9	48.9	53.8	74.0	20.2	Horizontal				
12205.0	4.0	51.6	55.6	74.0	18.4	Vertical				
12205.0	3.4	52.5	55.9	74.0	18.1	Horizontal				

Result of Tx mode (2441.0 MHz) (GFSK mode) (Above 1GHz): Pass

		Field Streng	th of Spuriou	ıs Emissions						
Average Value										
Frequency	Measured	Correction	Field	Limit	Margin	E-Field				
	Level @3m	Factor	Strength	@ 3m		Polarity				
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dBuV/m					
4882.0	-1.8	41.6	39.8	54.0	14.2	Vertical				
4882.0	-3.5	42.5	39.0	54.0	15.0	Horizontal				
7323.0	-5.0	45.2	40.2	54.0	13.8	Vertical				
7323.0	-6.9	46.3	39.4	54.0	14.6	Horizontal				
9764.0	-7.9	48.1	40.2	54.0	13.8	Vertical				
9764.0	-11.3	48.9	37.6	54.0	16.4	Horizontal				
12205.0	-11.4	51.6	40.2	54.0	13.8	Vertical				
12205.0	-10.6	52.5	41.9	54.0	12.1	Horizontal				



Date: 2014-09-05 Page 20 of 93

No.: DM116531

Result of Tx mode (2480.0 MHz) (GFSK mode) (9kHz - 30MHz): Pass

	Field Strength of Spurious Emissions								
Peak Value									
Frequency	Measured	Correction	Field	Field	Limit	E-Field			
	Level	Factor	Strength	Strength		Polarity			
MHz	dBuV	dB/m	dBuV/m	u V/m	u V/m				
	Emissions detected are more than 20 dB below the FCC Limits								

Results of Tx mode (2480.0 MHz) (GFSK mode) (30MHz - 1000MHz): PASS

	Field Strength of Spurious Emissions								
Quasi-Peak Value									
Frequency	Measured	Correction	Field	Field	Limit	E-Field			
	Level	Factor	Strength	Strength		Polarity			
MHz	dBuV	dB/m	dBuV/m	u V/m	uV/m				
	Emissions detected are more than 20 dB below the FCC Limits								

Result of Tx mode (2480.0 MHz) (GFSK mode) (Above 1GHz): Pass

			Field Streng	th of Spuriou	ıs E	missions				
Peak Value										
Frequency	1	Measured	Correction	Field		Limit	Margin	E-Field		
	L	evel@3m	Factor	Strength		@ 3m		Polarity		
MHz		dBuV	dB/m	dBuV/m		dBuV/m	dBuV/m			
4960.0		13.1	41.4	54.5		74.0	19.5	Vertical		
4960.0		12.6	42.7	55.3		74.0	18.7	Horizontal		
7440.0		9.8	45.6	55.4		74.0	18.6	Vertical		
7440.0		8.7	46.5	55.2		74.0	18.8	Horizontal		
9920.0		7.2	48.6	55.8		74.0	18.2	Vertical		
9920.0		5.6	49.7	55.3		74.0	18.7	Horizontal		
12400.0		3.3	51.7	55.0		74.0	19.0	Vertical		
12400.0		3.2	52.7	55.9		74.0	18.1	Horizontal		



Date: 2014-09-05 Page 21 of 93

No.: DM116531

Result of Tx mode (2480.0 MHz) (GFSK mode) (Above 1GHz): Pass

		Field Streng	th of Spuriou	ıs Emissions						
	Average Value									
Frequency	Measured	Correction	Field	Limit	Margin	E-Field				
	Level @3m	Factor	Strength	@ 3m		Polarity				
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dBuV/m					
4960.0	-2.2	41.4	39.2	54.0	14.8	Vertical				
4960.0	-2.2	42.7	40.5	54.0	13.5	Horizontal				
7440.0	-5.3	45.6	40.3	54.0	13.7	Vertical				
7440.0	-5.2	46.5	41.3	54.0	12.7	Horizontal				
9920.0	-9.4	48.6	39.2	54.0	14.8	Vertical				
9920.0	-9.5	49.7	40.2	54.0	13.8	Horizontal				
12400.0	-10.4	51.7	41.3	54.0	12.7	Vertical				
12400.0	-12.3	52.7	40.4	54.0	13.6	Horizontal				

Result of Tx mode (2402.0 MHz) (π /4-DQPSK mode) (9kHz – 30MHz): Pass

	Field Strength of Spurious Emissions								
Peak Value									
Frequency	Measured	Correction	Field	Field	Limit	E-Field			
	Level	Factor	Strength	Strength		Polarity			
MHz	dBuV	dB/m	dBuV/m	u V/m	u V/m				
	Emissions detected are more than 20 dB below the FCC Limits								

Result of Tx mode (2402.0 MHz) (π /4-DOPSK mode) (30MHz – 1GHz): Pass

	Field Strength of Spurious Emissions								
Quasi-Peak Value									
Frequency	Measured	Correction	Field	Field	Limit	E-Field			
	Level	Factor	Strength	Strength		Polarity			
MHz	dBuV	dB/m	dBuV/m	u V/m	u V/m				
	Emissions detected are more than 20 dB below the FCC Limits								



Date: 2014-09-05 Page 22 of 93

No.: DM116531

Result of Tx mode (2402.0 MHz) (π /4-DQPSK mode) (Above 1GHz): Pass

		Field Streng	th of Spuriou	s Emissions						
	Peak Value									
Frequency	Measured	Correction	Field	Limit	Margin	E-Field				
	Level @3m	Factor	Strength	@ 3m		Polarity				
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dBuV/m					
4804.0	13.8	41.5	55.3	74.0	18.7	Vertical				
4804.0	10.8	42.4	53.2	74.0	20.8	Horizontal				
7206.0	8.9	45.1	54.0	74.0	20.0	Vertical				
7206.0	9.7	46.2	55.9	74.0	18.1	Horizontal				
9608.0	7.4	48.0	55.4	74.0	18.6	Vertical				
9608.0	6.2	48.8	55.0	74.0	19.0	Horizontal				
12010.0	5.3	51.5	56.8	74.0	17.2	Vertical				
12010.0	2.6	52.4	55.0	74.0	19.0	Horizontal				

Result of Tx mode (2402.0 MHz) (π /4-DQPSK mode) (Above 1GHz): Pass

			Field Streng	th of Spurio	us	Emissions			
Average Value									
Frequency	N	Measured	Correction	Field		Limit	Margin	E-Field	
	L	evel@3m	Factor	Strength		@ 3m		Polarity	
MHz		dBuV	dB/m	dBuV/m		dBuV/m	dBuV/m		
4804.0		-1.3	41.5	40.2		54.0	13.8	Vertical	
4804.0		-4.2	42.4	38.2		54.0	15.8	Horizontal	
7206.0		-5.3	45.1	39.8		54.0	14.2	Vertical	
7206.0		-5.8	46.2	40.4		54.0	13.6	Horizontal	
9608.0		-7.5	48.0	40.5		54.0	13.5	Vertical	
9608.0		-7.2	48.8	41.6		54.0	12.4	Horizontal	
12010.0		-8.8	51.5	42.7		54.0	11.3	Vertical	
12010.0		-9.8	52.4	42.6		54.0	11.4	Horizontal	



Date: 2014-09-05 Page 23 of 93

No.: DM116531

Result of Tx mode (2441.0 MHz) (π /4-DQPSK mode) (9kHz – 30MHz): Pass

	Field Strength of Spurious Emissions								
Peak Value									
Frequency	Measured	Correction	Field	Field	Limit	E-Field			
	Level	Factor	Strength	Strength		Polarity			
MHz	dBuV	dB/m	dBuV/m	u V/m	u V/m				
	Emissions detected are more than 20 dB below the FCC Limits								

Results of Tx mode (2441.0 MHz) (π /4-DQPSK mode) (30MHz – 1000MHz): PASS

	Field Strength of Spurious Emissions							
	Quasi-Peak Value							
Frequency	Measured	Correction	Field	Field	Limit	E-Field		
	Level	Factor	Strength	Strength		Polarity		
MHz	dBuV	dB/m	dBuV/m	u V/m	u V/m			
	Emissions detected are more than 20 dB below the FCC Limits							

Result of Tx mode (2441.0 MHz) (π /4-DQPSK mode) (Above 1GHz): Pass

		Field Streng	th of Spuriou	ıs Emissions						
	Peak Value									
Frequency	Measured	Correction	Field	Limit	Margin	E-Field				
	Level @3m	Factor	Strength	@ 3m		Polarity				
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dBuV/m					
4882.0	14.6	41.6	56.2	74.0	17.8	Vertical				
4882.0	11.5	42.5	54.0	74.0	20.0	Horizontal				
7323.0	10.4	45.2	55.6	74.0	18.4	Vertical				
7323.0	8.3	46.3	54.6	74.0	19.4	Horizontal				
9764.0	6.9	48.1	55.0	74.0	19.0	Vertical				
9764.0	6.7	48.9	55.6	74.0	18.4	Horizontal				
12205.0	5.0	51.6	56.6	74.0	17.4	Vertical				
12205.0	2.8	52.5	55.3	74.0	18.7	Horizontal				



Date: 2014-09-05 Page 24 of 93

No.: DM116531

Result of Tx mode (2441.0 MHz) (π /4-DQPSK mode) (Above 1GHz): Pass

		Field Streng	th of Spuriou	ıs Emissions						
	Average Value									
Frequency	Measured	Correction	Field	Limit	Margin	E-Field				
	Level @3m	Factor	Strength	@ 3m		Polarity				
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dBuV/m					
4882.0	-0.5	41.6	41.1	54.0	12.9	Vertical				
4882.0	-2.2	42.5	40.3	54.0	13.7	Horizontal				
7323.0	-3.4	45.2	41.8	54.0	12.2	Vertical				
7323.0	-5.5	46.3	40.8	54.0	13.2	Horizontal				
9764.0	-6.6	48.1	41.5	54.0	12.5	Vertical				
9764.0	-8.0	48.9	40.9	54.0	13.1	Horizontal				
12205.0	-10.9	51.6	40.7	54.0	13.3	Vertical				
12205.0	-11.5	52.5	41.0	54.0	13.0	Horizontal				

Result of Tx mode (2480.0 MHz) (π /4-DQPSK mode) (9kHz – 30MHz): Pass

	Field Strength of Spurious Emissions								
Peak Value									
Frequency	Measured	Correction	Field	Field	Limit	E-Field			
	Level	Factor	Strength	Strength		Polarity			
MHz	dBuV	dB/m	dBuV/m	u V/m	u V/m				
	Emissions detected are more than 20 dB below the FCC Limits								

Results of Tx mode (2480.0 MHz) (π /4-DQPSK mode) (30MHz – 1000MHz): PASS

	Field Strength of Spurious Emissions								
	Quasi-Peak Value								
Frequency	Measured	Correction	Field	Field	Limit	E-Field			
	Level	Factor	Strength	Strength		Polarity			
MHz	dBuV	dB/m	dBuV/m	u V/m	u V/m				
	Emissions detected are more than 20 dB below the FCC Limits								



Date: 2014-09-05 Page 25 of 93

No.: DM116531

Result of Tx mode (2480.0 MHz) (π /4-DQPSK mode) (Above 1GHz): Pass

		Field Streng	th of Spuriou	ıs Emissions						
	Peak Value									
Frequency	Measured	Correction	Field	Limit	Margin	E-Field				
	Level @3m	Factor	Strength	@ 3m		Polarity				
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dBuV/m					
4960.0	14.6	41.4	56.0	74.0	18.0	Vertical				
4960.0	10.3	42.7	53.0	74.0	21.0	Horizontal				
7440.0	9.6	45.6	55.2	74.0	18.8	Vertical				
7440.0	8.8	46.5	55.3	74.0	18.7	Horizontal				
9920.0	6.6	48.6	55.2	74.0	18.8	Vertical				
9920.0	5.6	49.7	55.3	74.0	18.7	Horizontal				
12400.0	4.8	51.7	56.5	74.0	17.5	Vertical				
12400.0	2.7	52.7	55.4	74.0	18.6	Horizontal				

Result of Tx mode (2480.0 MHz) (π /4-DQPSK mode) (Above 1GHz): Pass

		Field Streng	th of Spuriou	ıs Emissions						
	Average Value									
Frequency	Measured	Correction	Field	Limit	Margin	E-Field				
	Level @3m	Factor	Strength	@ 3m		Polarity				
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dBuV/m					
4960.0	0.8	41.4	42.2	54.0	11.8	Vertical				
4960.0	-3.1	42.7	39.6	54.0	14.4	Horizontal				
7440.0	-3.8	45.6	41.8	54.0	12.2	Vertical				
7440.0	-5.6	46.5	40.9	54.0	13.1	Horizontal				
9920.0	-8.1	48.6	40.5	54.0	13.5	Vertical				
9920.0	-8.3	49.7	41.4	54.0	12.6	Horizontal				
12400.0	-10.7	51.7	41.0	54.0	13.0	Vertical				
12400.0	-11.8	52.7	40.9	54.0	13.1	Horizontal				



Date: 2014-09-05 Page 26 of 93

No.: DM116531

Result of Tx mode (2402.0 MHz) (8DPSK) (9kHz - 30MHz): Pass

	Field Strength of Spurious Emissions								
Peak Value									
Frequency	Measured	Measured Correction Field Field Limit E-Field							
	Level	Factor	Strength	Strength		Polarity			
MHz	dBuV	dB/m	dBuV/m	u V/m	u V/m				
	Emissions detected are more than 20 dB below the FCC Limits								

Result of Tx mode (2402.0 MHz) (8DPSK) (30MHz - 1GHz): Pass

	Field Strength of Spurious Emissions								
Quasi-Peak Value									
Frequency	Measured Correction Field Field Limit E-Field								
	Level	Factor	Strength	Strength		Polarity			
MHz	dBuV	dB/m	dBuV/m	uV/m	u V/m				
	Emissions detected are more than 20 dB below the FCC Limits								

Result of Tx mode (2402.0 MHz) (8DPSK) (Above 1GHz): Pass

		Field Streng	th of Spuriou	us Emissions						
	Peak Value									
Frequency	Measured	Correction	Field	Limit	Margin	E-Field				
	Level @3m	Factor	Strength	@ 3m		Polarity				
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dBuV/m					
4804.0	14.9	41.5	56.4	74.0	17.6	Vertical				
4804.0	11.2	42.4	53.6	74.0	20.4	Horizontal				
7206.0	8.7	45.1	53.8	74.0	20.2	Vertical				
7206.0	9.1	46.2	55.3	74.0	18.7	Horizontal				
9608.0	7.3	48.0	55.3	74.0	18.7	Vertical				
9608.0	6.9	48.8	55.7	74.0	18.3	Horizontal				
12010.0	4.7	51.8	56.5	74.0	17.5	Vertical				
12010.0	4.4	52.4	56.8	74.0	17.2	Horizontal				



Date: 2014-09-05 Page 27 of 93

No.: DM116531

Result of Tx mode (2402.0 MHz) (8DPSK) (Above 1GHz): Pass

		Field Streng	th of Spuriou	ıs Emissions					
Average Value									
Frequency	Measured	Correction	Field	Limit	Margin	E-Field			
	Level @3m	Factor	Strength	@ 3m		Polarity			
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dBuV/m				
4804.0	-0.5	41.5	41.0	54.0	13.0	Vertical			
4804.0	-4.0	42.4	38.4	54.0	15.6	Horizontal			
7206.0	-5.5	45.1	39.6	54.0	14.4	Vertical			
7206.0	-5.5	46.2	40.7	54.0	13.3	Horizontal			
9608.0	-7.2	48.0	40.8	54.0	13.2	Vertical			
9608.0	-8.8	48.8	40.0	54.0	14.0	Horizontal			
12010.0	-11.8	51.8	40.0	54.0	14.0	Vertical			
12010.0	-11.2	52.4	41.2	54.0	12.8	Horizontal			

Result of Tx mode (2441.0 MHz) (8DPSK) (9kHz - 30MHz): Pass

	Field Strength of Spurious Emissions								
Peak Value									
Frequency	Measured	Correction	Field	Field	Limit	E-Field			
	Level	Factor	Strength	Strength		Polarity			
MHz	dBuV	dB/m	dBuV/m	u V/m	u V/m				
	Emissions detected are more than 20 dB below the FCC Limits								

Results of Tx mode (2441.0 MHz) (8DPSK) (30MHz - 1000MHz): PASS

	Field Strength of Spurious Emissions								
Quasi-Peak Value									
Frequency	Measured	Correction	Field	Field	Limit	E-Field			
	Level	Factor	Strength	Strength		Polarity			
MHz	dBuV	dB/m	dBuV/m	uV/m	u V/m				
	Emissions detected are more than 20 dB below the FCC Limits								



Date: 2014-09-05 Page 28 of 93

No.: DM116531

Result of Tx mode (2441.0 MHz) (8DPSK) (Above 1GHz): Pass

		Field Streng	th of Spuriou	ıs Emissions						
	Peak Value									
Frequency	Measured	Correction	Field	Limit	Margin	E-Field				
	Level @3m	Factor	Strength	@ 3m		Polarity				
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dBuV/m					
4882.0	13.8	41.6	55.4	74.0	18.6	Vertical				
4882.0	11.7	42.5	54.2	74.0	19.8	Horizontal				
7323.0	10.5	45.2	55.7	74.0	18.3	Vertical				
7323.0	7.7	46.3	54.0	74.0	20.0	Horizontal				
9764.0	7.6	48.1	55.7	74.0	18.3	Vertical				
9764.0	6.4	48.9	55.3	74.0	18.7	Horizontal				
12205.0	3.9	51.6	55.5	74.0	18.5	Vertical				
12205.0	4.3	52.5	56.8	74.0	17.2	Horizontal				

Result of Tx mode (2441.0 MHz) (8DPSK) (Above 1GHz): Pass

Result of 1x in	`	/ \	,	s Emissions						
	Average Value									
Frequency	Measured	Correction	Field	Limit	Margin	E-Field				
	Level @3m	Factor	Strength	@ 3m		Polarity				
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dBuV/m					
4882.0	-1.0	41.6	40.6	54.0	13.4	Vertical				
4882.0	-1.6	42.5	40.9	54.0	13.1	Horizontal				
7323.0	-4.5	45.2	40.7	54.0	13.3	Vertical				
7323.0	-5.5	46.3	40.8	54.0	13.2	Horizontal				
9764.0	-8.2	48.1	39.9	54.0	14.1	Vertical				
9764.0	-8.5	48.9	40.4	54.0	13.6	Horizontal				
12205.0	-10.9	51.6	40.7	54.0	13.3	Vertical				
12205.0	-11.0	52.5	41.5	54.0	12.5	Horizontal				



Date: 2014-09-05 Page 29 of 93

No.: DM116531

Result of Tx mode (2480.0 MHz) (8DPSK) (9kHz - 30MHz): Pass

	Field Strength of Spurious Emissions								
Peak Value									
Frequency	Measured	Correction	Field	Field	Limit	E-Field			
	Level	Factor	Strength	Strength		Polarity			
MHz	dBuV	dB/m	dBuV/m	u V/m	u V/m				
	Emissions detected are more than 20 dB below the FCC Limits								

Results of Tx mode (2480.0 MHz) (8DPSK) (30MHz - 1000MHz): PASS

	Field Strength of Spurious Emissions								
Quasi-Peak Value									
Frequency	Measured	Correction	Field	Field	Limit	E-Field			
	Level	Factor	Strength	Strength		Polarity			
MHz	dBuV	dB/m	dBuV/m	u V/m	u V/m				
	Emissions detected are more than 20 dB below the FCC Limits								

Result of Tx mode (2480.0 MHz) (8DPSK) (Above 1GHz): Pass

			Field Streng	th of Spuriou	ıs I	Emissions				
	Peak Value									
Frequency	N	Measured	Correction	Field		Limit	Margin	E-Field		
	L	evel@3m	Factor	Strength		@ 3m		Polarity		
MHz		dBuV	dB/m	dBuV/m		$dBuV\!/m$	dBuV/m			
4960.0		16.6	41.4	58.0		74.0	16.0	Vertical		
4960.0		10.9	42.7	53.6		74.0	20.4	Horizontal		
7440.0		9.7	45.6	55.3		74.0	18.7	Vertical		
7440.0		7.7	46.5	54.2		74.0	19.8	Horizontal		
9920.0		6.5	48.6	55.1		74.0	18.9	Vertical		
9920.0		5.9	49.7	55.6		74.0	18.4	Horizontal		
12400.0		4.3	51.7	56.0		74.0	18.0	Vertical		
12400.0		2.9	52.7	55.6		74.0	18.4	Horizontal		



Date: 2014-09-05 Page 30 of 93

No.: DM116531

Result of Tx mode (2480.0 MHz) (8DPSK) (Above 1GHz): Pass

		Field Streng	th of Spuriou	ıs Emissions						
	Average Value									
Frequency	Measured	Correction	Field	Limit	Margin	E-Field				
	Level @3m	Factor	Strength	@ 3m		Polarity				
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dBuV/m					
4960.0	1.2	41.4	42.6	54.0	11.4	Vertical				
4960.0	-4.5	42.7	38.2	54.0	15.8	Horizontal				
7440.0	-3.8	45.6	41.8	54.0	12.2	Vertical				
7440.0	-7.3	46.5	39.2	54.0	14.8	Horizontal				
9920.0	-6.7	48.6	41.9	54.0	12.1	Vertical				
9920.0	-9.3	49.7	40.4	54.0	13.6	Horizontal				
12400.0	-9.8	51.7	41.9	54.0	12.1	Vertical				
12400.0	-10.9	52.7	41.8	54.0	12.2	Horizontal				

Remarks:

* Denotes restricted band of operation.

Measurements were made using a peak detector. Any emission less than 1000MHz and falling within the restricted bands of FCC Rules Part 15 Section 15.205 and the limits of FCC Rules Part 15 Section 15.209 were applied.

Correction Factor included Antenna Factor and Cable Attenuation.

Calculated measurement uncertainty: (9kHz - 30MHz): 3.3dB

(30MHz - 1GHz): 4.6dB (1GHz - 26GHz): 4.4dB

Emissions in the vertical and horizontal polarizations have been investigated and the worst-case test results are recorded in this report.



Date: 2014-09-05 Page 31 of 93

No.: DM116531


Limits for Radiated Emissions [FCC 47 CFR 15.209 Class B]:

Emilis for Radiated Emissions [1 CC 47 Cf R 15:20) Class B].				
Quasi-Peak Limits				
$[\mu V/m]$				
2400/F (kHz)				
24000/F (kHz)				
30				
100				
150				
200				
500				

The emission limits shown in the above table are based on measurement employing a CISPR quasi-peak detector and above 1000MHz are based on measurements employing an average detector.

Result of Bluetooth Communication mode (EUT paired with iPod) (GFSK / π /4-DQPSK/ 8DPSK) (30MHz – 1GHz): Pass

Please refer to the following table for result details

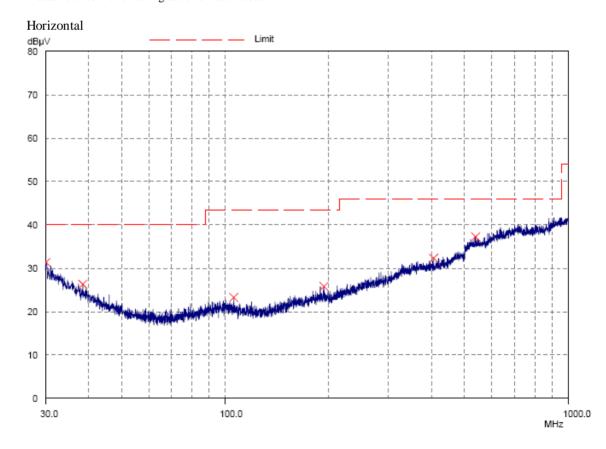



Date: 2014-09-05 Page 32 of 93

No.: DM116531

Result of Bluetooth Communication mode (EUT paired with iPod) (GFSK / π /4-DQPSK/ 8DPSK) (30MHz – 1GHz): Pass

Radiated Emissions Quasi-Peak					
Frequency	Polarity	@ 3m	@ 3m	@ 3m	@ 3m
MHz		dBμV/m	dBμV/m	μV/m	μV/m
30.1	Horizontal	31.4	40.0	37.2	100
38.6	Horizontal	26.3	40.0	20.7	100
106.2	Horizontal	23.3	43.5	14.6	150
194.4	Horizontal	25.8	43.5	19.5	150
406.1	Horizontal	32.3	46.0	41.2	200
538.1	Horizontal	37.3	46.0	73.3	200



Date: 2014-09-05 Page 33 of 93

No.: DM116531


Limits for Radiated Emissions [FCC 47 CFR 15.209 Class B]:

Emilio for Radiated Emissions [1 66 47 61 R 15.207 6 Rass B].					
Quasi-Peak Limits					
$[\mu V/m]$					
2400/F (kHz)					
24000/F (kHz)					
30					
100					
150					
200					
500					

The emission limits shown in the above table are based on measurement employing a CISPR quasi-peak detector and above 1000MHz are based on measurements employing an average detector.

Result of Bluetooth Communication mode (EUT paired with iPod) (GFSK / π /4-DQPSK/ 8DPSK) (30MHz – 1GHz): Pass

Please refer to the following table for result details

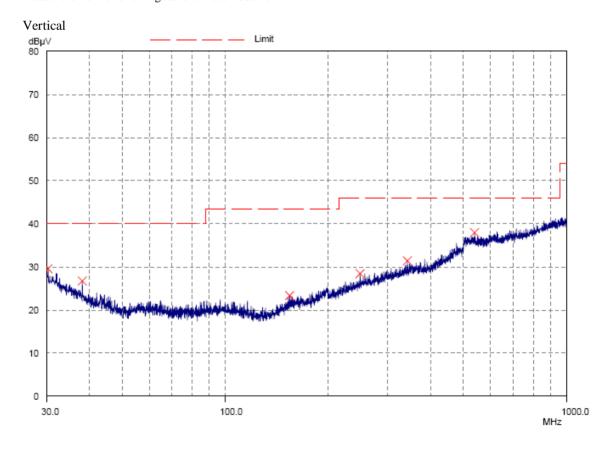



Date: 2014-09-05 Page 34 of 93

No.: DM116531

Result of Bluetooth Communication mode (EUT paired with iPod) (GFSK / π /4-DQPSK/ 8DPSK) (30MHz – 1GHz): Pass

Radiated Emissions					
Quasi-Peak					
Emission	E-Field	Level	Limit	Level	Limit
Frequency	Polarity	@ 3m	@ 3m	@ 3m	@ 3m
MHz		dBµV/m	dBμV/m	μV/m	μV/m
38.2	Vertical	26.8	40.0	21.9	100
154.7	Vertical	23.4	43.5	14.8	150
248.7	Vertical	28.4	46.0	26.3	200
342.1	Vertical	31.4	46.0	37.2	200
538.6	Vertical	38.0	46.0	79.4	200



Date: 2014-09-05 Page 35 of 93

No.: DM116531


Limits for Radiated Emissions [FCC 47 CFR 15.209 Class B]:

Quasi-Peak Limits
$[\mu V/m]$
2400/F (kHz)
24000/F (kHz)
30
100
150
200
500

The emission limits shown in the above table are based on measurement employing a CISPR quasi-peak detector and above 1000MHz are based on measurements employing an average detector.

Result of Bluetooth Communication + Charging mode (EUT paired with iPod, USB port connected to PC) (GFSK / π /4-DQPSK/ 8DPSK) (30MHz – 1GHz): Pass

Please refer to the following table for result details

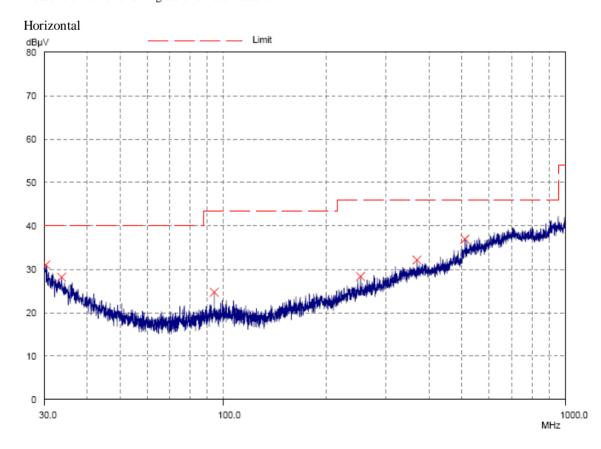



Date: 2014-09-05 Page 36 of 93

No.: DM116531

Result of Bluetooth Communication + Charging mode (EUT paired with iPod, USB port connected to PC) (GFSK / π /4-DOPSK/8DPSK) (30MHz = 1GHz): Pass

301C) (GFSK / 1//4-DQFSK) (301/HIZ - TGHZ). Tass					
Radiated Emissions Quasi-Peak					
Frequency	Polarity	@ 3m	@ 3m	@ 3m	@ 3m
MHz		dBμV/m	dBμV/m	μV/m	μV/m
30.4	Horizontal	31.0	40.0	35.5	100
33.8	Horizontal	28.2	40.0	25.7	100
94.3	Horizontal	24.8	43.5	17.4	150
252.5	Horizontal	28.3	46.0	26.0	200
369.0	Horizontal	32.2	46.0	40.7	200
509.7	Horizontal	36.9	46.0	70.0	200



Date: 2014-09-05 Page 37 of 93

No.: DM116531


Limits for Radiated Emissions [FCC 47 CFR 15.209 Class B]:

Quasi-Peak Limits
$[\mu V/m]$
2400/F (kHz)
24000/F (kHz)
30
100
150
200
500

The emission limits shown in the above table are based on measurement employing a CISPR quasi-peak detector and above 1000MHz are based on measurements employing an average detector.

Result of Bluetooth Communication + Charging mode (EUT paired with iPod, USB port connected to PC) (GFSK / π /4-DQPSK/ 8DPSK) (30MHz – 1GHz): Pass

Please refer to the following table for result details

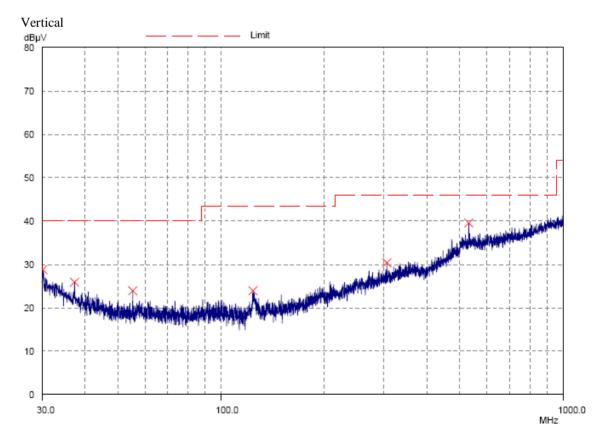



Date: 2014-09-05 Page 38 of 93

No.: DM116531

Result of Bluetooth Communication + Charging mode (EUT paired with iPod, USB port connected to PC) (GFSK / π /4-DQPSK/ 8DPSK) (30MHz – 1GHz): Pass

	Radiated Emissions				
		Quasi	-Peak		
Emission	E-Field	Level	Limit	Level	Limit
Frequency	Polarity	@ 3m	@ 3m	@ 3m	@ 3m
MHz		dBμV/m	dBμV/m	μV/m	μV/m
37.4	Vertical	25.9	40.0	19.7	100
55.3	Vertical	23.9	40.0	15.7	100
124.1	Vertical	24.0	43.5	15.8	150
305.8	Vertical	30.4	46.0	33.1	200
530.6	Vertical	39.6	46.0	95.5	200

Remarks:

Calculated measurement uncertainty (30MHz - 1GHz): 4.6dB

Emissions in the vertical and horizontal polarizations have been investigated and the worst -case test results are recorded in this report.



Date: 2014-09-05 Page 39 of 93

No.: DM116531

3.1.3 AC Mains Conducted Emissions (0.15MHz to 30MHz)

Test Requirement: FCC 47CFR 15.207 Test Method: ANSI C63.4:2009 Test Date: 2014-08-29


Mode of Operation: Bluetooth Communication + Charging mode

Test Voltage: 120Va.c. 60Hz

Test Method:

The test was performed in accordance with ANSI C63.4: 2009, with the following: an initial measurement was performed in peak and average detection mode on the live line, any emissions recorded within 30dB of the relevant limit line were re-measured using quasi-peak and average detection on the live and neutral lines with the worst case recorded in the table of results.

Test Setup:

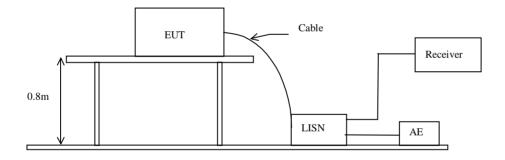



Date: 2014-09-05 Page 40 of 93

No.: DM116531

Limit for Conducted Emissions (FCC 47 CFR 15.207):


Frequency Range	Quasi-Peak Limits	Average
[MHz]	[dBµV]	[dBµV]
0.15-0.5	66 to 56*	56 to 46*
0.5-5.0	56	46
5.0-30.0	60	50

^{*} Decreases with the logarithm of the frequency.

Limits for Conducted Emissions Test, please refer to limit lines (Quasi-Peak and Average) in the following diagram.

Result of Bluetooth Communication + Charging mode (EUT paired with iPod, USB port connected to PC) (L): PASS

Please refer to the following diagram for individual results.

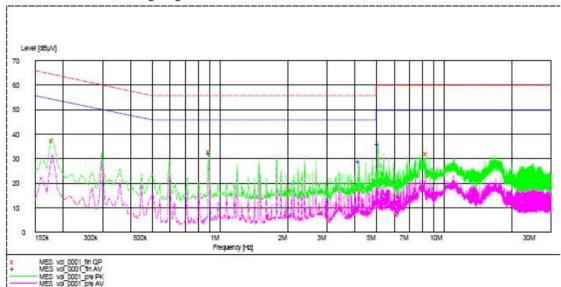

		Quasi-peak		Ave	rage
Conductor	Frequency	Level	Limit	Level	Limit
Live or Neutral	MHz	dΒμV	dΒμV	dΒμV	dΒμV
Live	0.180	37.3	65.0	_*_	_*_
Live	0.900	33.0	56.0	_*_	_*_
Live	8.395	32.2	60.0	_*_	_*_
Live	0.900	_*_	_*_	32.0	46.0
Live	4.195	_*_	_*_	28.8	46.0
Live	5.095	_*_	_*_	35.9	50.0



Date: 2014-09-05 Page 41 of 93

No.: DM116531

Limit for Conducted Emissions (FCC 47 CFR 15.207):


Frequency Range	Quasi-Peak Limits	Average
[MHz]	[dBµV]	[dBµV]
0.15-0.5	66 to 56*	56 to 46*
0.5-5.0	56	46
5.0-30.0	60	50

^{*} Decreases with the logarithm of the frequency.

Limits for Conducted Emissions Test, please refer to limit lines (Quasi-Peak and Average) in the following diagram.

Result of Bluetooth Communication + Charging mode (EUT paired with iPod, USB port connected to PC) (N): PASS $\,$

Please refer to the following diagram for individual results.

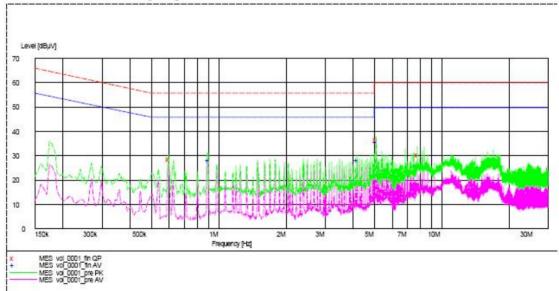

		Quasi-peak		Ave	rage
Conductor	Frequency	Level	Limit	Level	Limit
Live or Neutral	MHz	dΒμV	dΒμV	dΒμV	dΒμV
Neutral	0.600	28.5	56.0	_*_	_*_
Neutral	5.095	36.8	60.0	_*_	_*_
Neutral	7.790	30.5	60.0	_*_	_*_
Neutral	0.900	_*_	_*_	28.3	46.0
Neutral	4.195	_*_	_*_	28.4	46.0
Neutral	5.095	_*_	_*_	35.6	50.0

Remarks:

Calculated measurement uncertainty (0.15MHz - 30MHz): 3.2dB

STC (Dongguan) Company Limited

68 Fumin Nan Road, Dalang, Dongguan, China. (Zip Code: 523 770)

Tel: (86 769) 8111 9888 Fax: (86 769) 8111 6222 E-mail: dgstc@dgstc.org Homepage: www.dgstc.org

^{-*-} Emission(s) that is far below the corresponding limit line.



Date: 2014-09-05 Page 42 of 93

No.: DM116531

3.1.4 Number of Hopping Frequency

Limit of Number of Hopping Frequency

Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels

Test Method:

The RF output of the EUT was connected to the spectrum analyzer by a low loss cable.

Spectrum Analyzer Setting:


RBW = 1MHz, $VBW \ge RBW$, Sweep = Auto, Span = the frequency band of operation <math>Detector = Peak, Trace = Max. hold

Test Setup:

As Test Setup of clause 3.1.1 in this test report.

Measurement Data:

GFSK: 79 of 79 Channel

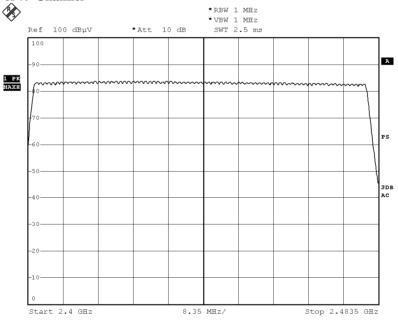


Date: 25.AUG.2014 11:41:38



Date: 2014-09-05 Page 43 of 93

No.: DM116531

Pi/4 DQPSK: 79 of 79 Channel

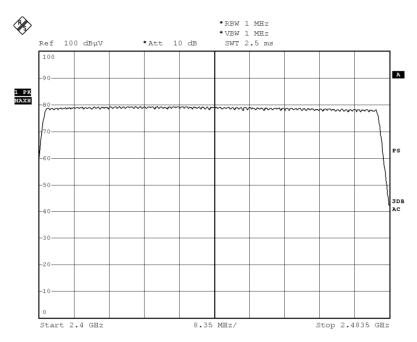


Date: 25.AUG.2014 12:05:11



Date: 2014-09-05 Page 44 of 93

No.: DM116531

8DPSK: 79 of 79 Channel

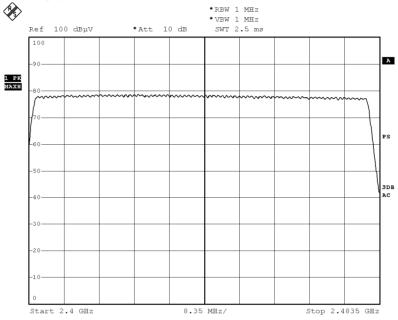

Date: 25.AUG.2014 12:06:43



Date: 2014-09-05 Page 45 of 93

No.: DM116531

3.1.5 20dB Bandwidth

Test Requirement: FCC 47CFR 15.247(a)(1)

Test Method: ANSI C63.4:2009

Test Date: 2014-08-25

Mode of Operation: Communication mode

Remark:

The result has been done on all the possible configurations for searching the worst cases.

Test Method:

The bandwidth is measured at an amplitude level reduced from the reference level by a specified ratio. The reference level is the level of the highest amplitude signal observed from the transmitter at the fundamental frequency. Once the reference level is established, the equipment is conditioned with typical modulating signal to produce the worst-case (i.e. the widest) bandwidth.

Test Setup:

As Test Setup of clause 3.1.1 in this test report.




Date: 2014-09-05 Page 46 of 93

No.: DM116531

Fundamental Frequency	20dB Bandwidth	FCC Limits
[MHz]	[MHz]	[MHz]
2402	0.792	Within 2400-2483.5

(Lowest Operating Frequency) - (GFSK)

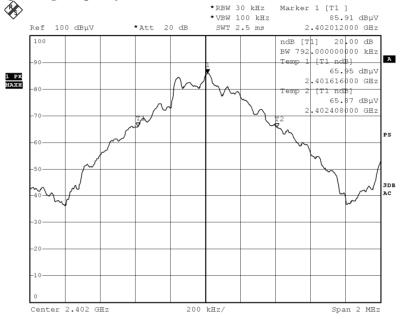

Date: 25.AUG.2014 10:36:09




Date: 2014-09-05 Page 47 of 93

No.: DM116531

Fundamental Frequency	20dB Bandwidth	FCC Limits
[MHz]	[MHz]	[MHz]
2441	0.788	Within 2400-2483.5

(Middle Operating Frequency) - (GFSK)

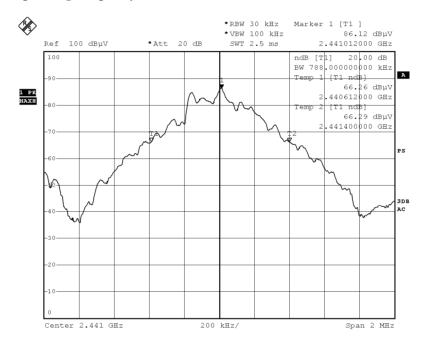

Date: 25.AUG.2014 10:35:17




Date: 2014-09-05 Page 48 of 93

No.: DM116531

Fundamental Frequency	20dB Bandwidth	FCC Limits
[MHz]	[MHz]	[MHz]
2480	0.804	Within 2400-2483.5

(Highest Operating Frequency) - (GFSK)

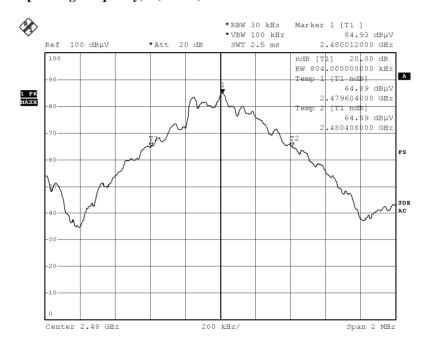

Date: 25.AUG.2014 10:34:25




Date: 2014-09-05 Page 49 of 93

No.: DM116531

Fundamental Frequency	20dB Bandwidth	FCC Limits
[MHz]	[MHz]	[MHz]
2402	1.222	Within 2400-2483.5

(Lowest Operating Frequency) - $(\pi/4$ -DQPSK)

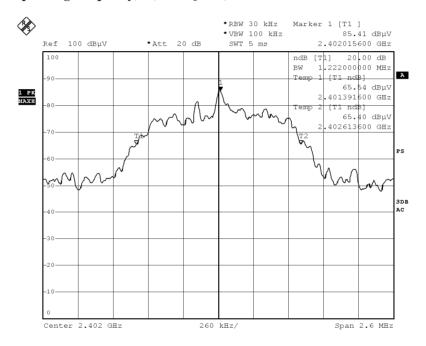

Date: 25.AUG.2014 11:00:45




Date: 2014-09-05 Page 50 of 93

No.: DM116531

Fundamental Frequency	20dB Bandwidth	FCC Limits
[MHz]	[MHz]	[MHz]
2441	1.222	Within 2400-2483.5

(Middle Operating Frequency) - $(\pi/4 - DQPSK)$

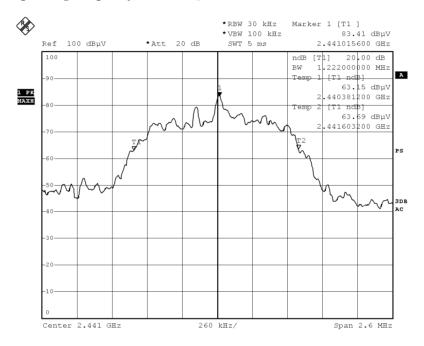

Date: 25.AUG.2014 11:03:39




Date: 2014-09-05 Page 51 of 93

No.: DM116531

Fundamental Frequency	20dB Bandwidth	FCC Limits
[MHz]	[MHz]	[MHz]
2480	1.225	Within 2400-2483.5

(Highest Operating Frequency) - $(\pi/4 - DQPSK)$

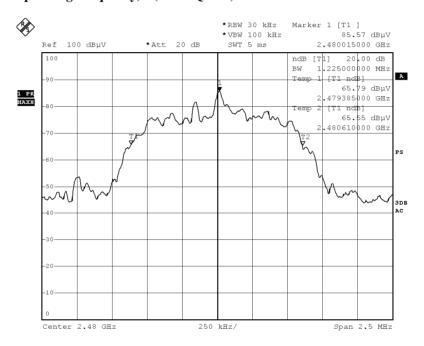

Date: 25.AUG.2014 10:51:23




Date: 2014-09-05 Page 52 of 93

No.: DM116531

Fundamental Frequency	20dB Bandwidth	FCC Limits
[MHz]	[MHz]	[MHz]
2402	1.215	Within 2400-2483.5

(Lowest Operating Frequency) - (8DPSK)

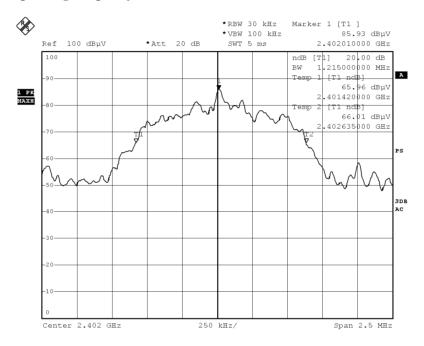

Date: 25.AUG.2014 11:04:53




Date: 2014-09-05 Page 53 of 93

No.: DM116531

Fundamental Frequency	20dB Bandwidth	FCC Limits
[MHz]	[MHz]	[MHz]
2441	1.215	Within 2400-2483.5

(Middle Operating Frequency) - (8DPSK)

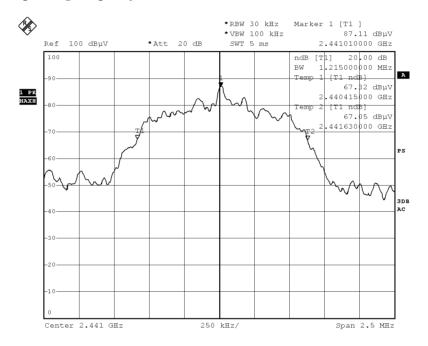

Date: 25.AUG.2014 11:08:01




Date: 2014-09-05 Page 54 of 93

No.: DM116531

Fundamental Frequency	20dB Bandwidth	FCC Limits
[MHz]	[MHz]	[MHz]
2480	1.215	Within 2400-2483.5

(Highest Operating Frequency) - (8DPSK)

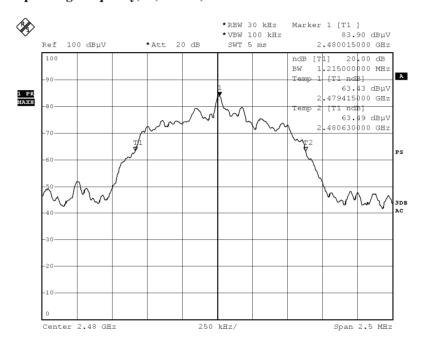

Date: 25.AUG.2014 11:09:15



Date: 2014-09-05 Page 55 of 93

No.: DM116531

3.1.6 Hopping Channel Separation

Requirements:

Frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

Limit:

The measured maximum bandwidth * 2/3 = 1.225MHz * 2/3 = 816.7kHz




Date: 2014-09-05 Page 56 of 93

No.: DM116531

Channel separation = 1MHz (>816.7kHz) (GFSK)

Channel 0 - Channel 1, Pass

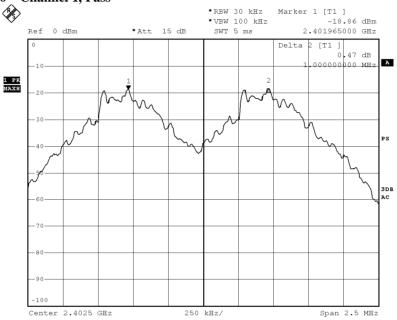


Date: 25.AUG.2014 21:01:36



Date: 2014-09-05 Page 57 of 93

No.: DM116531

Channel 39 - Channel 40, Pass

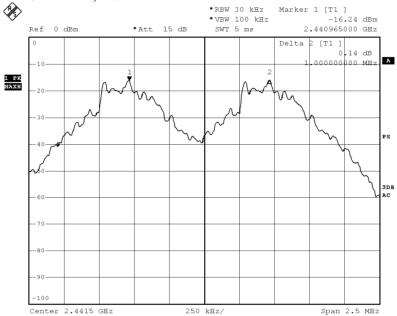


Date: 25.AUG.2014 21:02:58



Date: 2014-09-05 Page 58 of 93

No.: DM116531

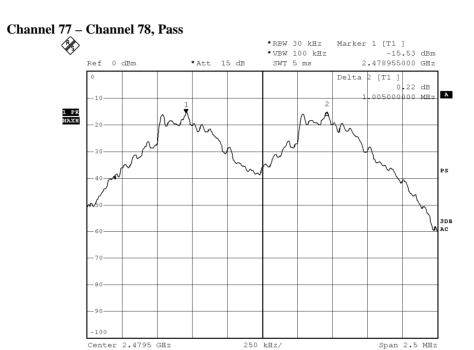

Date: 25.AUG.2014 21:03:48




Date: 2014-09-05 Page 59 of 93

No.: DM116531

Channel separation = 1MHz (>816.7kHz) (π /4- DQPSK)



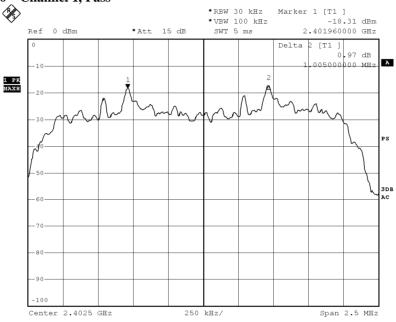


Date: 25.AUG.2014 21:06:08



Date: 2014-09-05 Page 60 of 93

No.: DM116531

Channel 39 - Channel 40, Pass

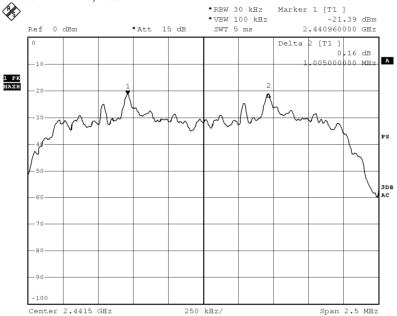

Date: 25.AUG.2014 21:05:24



Date: 2014-09-05 Page 61 of 93

No.: DM116531

Channel 77 - Channel 78, Pass *REW 30 kHz Marker 1 [T1] *VBW 100 kHz -16.05 dBm 2.478955000 GHz Delta 2 [T1] 0 12 dB 1.005000000 MHz -20 -30 -60 -70 -80 -90

250 kHz/

Span 2.5 MHz

Date: 25.AUG.2014 21:04:37

Center 2.4795 GHz




Date: 2014-09-05 Page 62 of 93

No.: DM116531

Channel separation = 1MHz (>816.7kHz) (8DPSK)



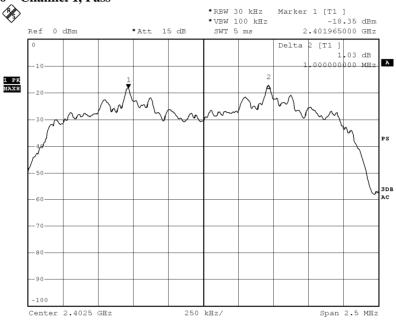


Date: 25.AUG.2014 21:06:53



Date: 2014-09-05 Page 63 of 93

No.: DM116531

Channel 39 - Channel 40, Pass

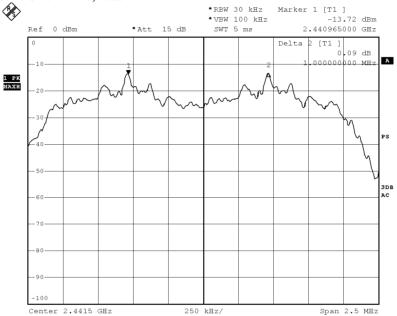


Date: 25.AUG.2014 21:08:02



Date: 2014-09-05 Page 64 of 93

No.: DM116531

Channel 77 – Channel 78, Pass

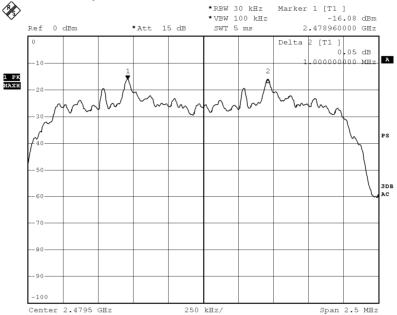

Date: 25.AUG.2014 21:11:19



Date: 2014-09-05 Page 65 of 93


No.: DM116531

3.1.7 Band-edge Compliance of RF Conducted Emissions Measurement:

Limit:

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required.

Frequency Range	Radiated Emission Attenuated below the
	Fundamental
[MHz]	[dB]
2400 – Lowest Fundamental (2402)	43.61

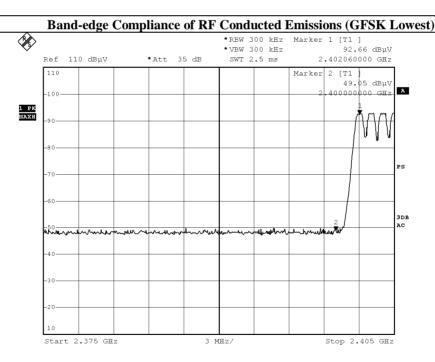

Date: 25.AUG.2014 12:41:33




Date: 2014-09-05 Page 66 of 93

No.: DM116531

Band-edge Compliance of RF Conducted Emissions Measurement:

Frequency Range	Radiated Emission Attenuated below the
	Fundamental
[MHz]	[dB]
Highest Fundamental (2480) - 2483.5	44.78

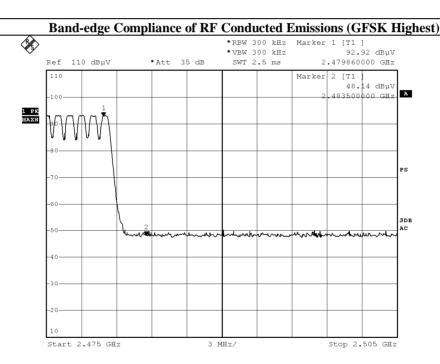

Date: 25.AUG.2014 12:43:34




Date: 2014-09-05 Page 67 of 93

No.: DM116531

Band-edge Compliance of RF Conducted Emissions Measurement:

Frequency Range	Radiated Emission Attenuated below the		
	Fundamental		
[MHz]	[dB]		
2400 - Lowest Fundamental (2402)	36.27		

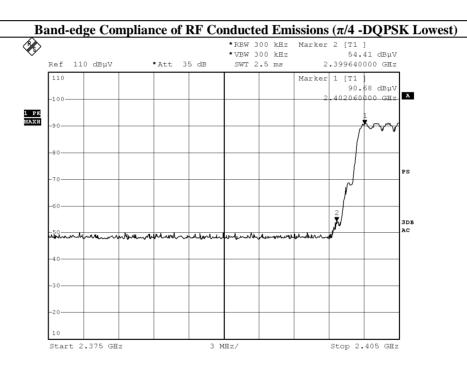

Date: 25.AUG.2014 12:37:43




Date: 2014-09-05 Page 68 of 93

No.: DM116531

Band-edge Compliance of RF Conducted Emissions Measurement:

Frequency Range	Radiated Emission Attenuated below the
	Fundamental
[MHz]	[dB]
Highest Fundamental (2480) - 2483.5	42.28

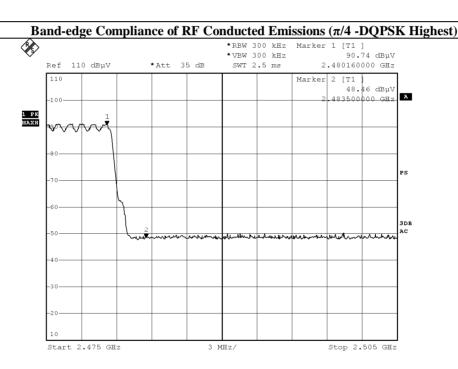

Date: 25.AUG.2014 12:28:49




Date: 2014-09-05 Page 69 of 93

No.: DM116531

Band-edge Compliance of RF Conducted Emissions Measurement:

Frequency Range	Radiated Emission Attenuated below the		
	Fundamental		
[MHz]	[dB]		
2400 - Lowest Fundamental (2402)	34.46		

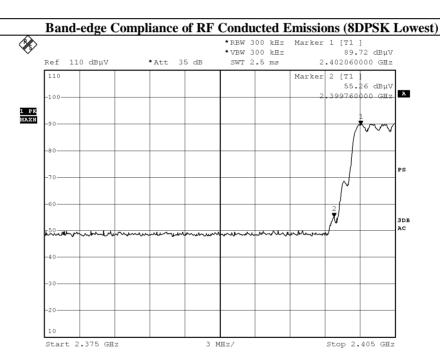

Date: 25.AUG.2014 12:14:40




Date: 2014-09-05 Page 70 of 93

No.: DM116531

Band-edge Compliance of RF Conducted Emissions Measurement:

Frequency Range	Radiated Emission Attenuated below the
	Fundamental
[MHz]	[dB]
Highest Fundamental (2480) - 2483.5	40.63

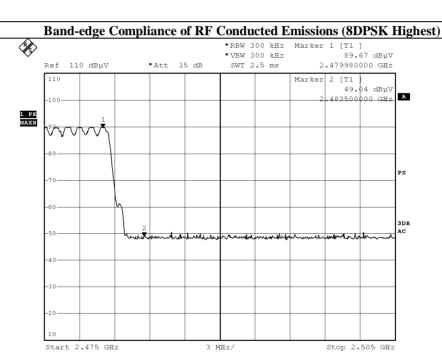

Date: 25.AUG.2014 12:17:40



Date: 2014-09-05 Page 71 of 93

No.: DM116531

Band-edge Compliance of RF Radiated Emissions Measurement:

Limit:

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 5.205(c)).

Result: Band-edge Compliance of RF Radiated Emissions (GFSK Lowest)

Field Strength of Band-edge Compliance						
			Peak Value			
Frequency	Measured	Correction	Field	Limit	Margin	E-Field
	Level @3m	Factor	Strength	@ 3m		Polarity
MHz	dΒμV	dB/m	dBμV/m	dBμV/m	dBμV/m	
2400.0	21.7	36.8	58.5	74.0	15.5	Vertical

	F	ield Strength	of Band-edg	e Compliance		
		A	verage Valu	e		
Frequency	Measured	Correction	Field	Limit	Margin	E-Field
	Level @3m	Factor	Strength	@ 3m		Polarity
MHz	dΒμV	dB/m	dBμV/m	dBμV/m	dBμV/m	
2400.0	3.6	36.8	40.4	54.0	13.6	Vertical



Date: 2014-09-05 Page 72 of 93

No.: DM116531

Result: Band-edge Compliance of RF Radiated Emissions (GFSK Highest)

Field Strength of Band-edge Compliance						
Peak Value						
Frequency	Measured	Correction	Field	Limit	Margin	E-Field
	Level @3m	Factor	Strength	@ 3m		Polarity
MHz	dΒμV	dB/m	$dB\mu V\!/m$	dBμV/m	dBμV/m	
2483.5	21.0	36.4	57.4	74.0	16.6	Horizontal
Field Strength of Band-edge Compliance						
	F	ield Strength	of Band-edg	e Compliance		
	F		of Band-edg verage Valu	_		
Frequency	Measured			_	Margin	E-Field
Frequency		A	verage Valu	e	Margin	E-Field Polarity
Frequency	Measured	A	verage Valu Field	e Limit	Margin dBμV/m	

Result: Band-edge Compliance of RF Radiated Emissions (π/4 -DQPSK Lowest)

Field Strength of Band-edge Compliance									
Peak Value									
Frequency	Measured	Correction	Field	Limit	Margin	E-Field			
	Level @3m	Factor	Strength	@ 3m		Polarity			
MHz	dΒμV	dB/m	$dB\mu V\!/m$	dBμV/m	$dB\muV/m$				
2400.0	21.4	36.8	58.2	74.0	15.8	Vertical			
Field Strength of Band-edge Compliance									
	ľ	ieia Strength	i oi Bana-eag	e Compliance					
	r		i of Band-edg Average Valu	_					
Frequency	Measured			_	Margin	E-Field			
Frequency	1	A	verage Valu	e	Margin	E-Field Polarity			
Frequency MHz	Measured	A Correction	verage Valu Field	e Limit	Margin dBμV/m				

Result: Band-edge Compliance of RF Radiated Emissions (π/4 -DQPSK Highest)

Field Strength of Band-edge Compliance									
Peak Value									
Frequency	Measured	Correction	Field	Limit	Margin	E-Field			
	Level @3m	Factor	Strength	@ 3m		Polarity			
MHz	dΒμV	dB/m	dBμV/m	dBμV/m	dBμV/m				
2483.5	21.3	36.4	57.7	74.0	16.3	Horizontal			
Field Strength of Band-edge Compliance									
Average Value									
Frequency	Measured	Correction	Field	Limit	Margin	E-Field			
	Level @3m	Factor	Strength	@ 3m		Polarity			
MHz	dΒμV	dB/m	dBμV/m	dBμV/m	dBμV/m				
2483.5	2.1	36.4	38.5	54.0	15.5	Horizontal			



Date: 2014-09-05 Page 73 of 93

No.: DM116531

Result: Band-edge Compliance of RF Radiated Emissions (8DPSK Lowest)

Field Strength of Band-edge Compliance								
Peak Value								
Frequency	Measured	Correction	Field	Limit	Margin	E-Field		
	Level @3m	Factor	Strength	@ 3m		Polarity		
MHz	dΒμV	dB/m	dBμV/m	dBμV/m	dBμV/m			
2400.0	21.1	36.8	57.9	74.0	16.1	Vertical		
Field Strength of Band-edge Compliance								
	F	ield Strength	of Band-edg	ge Compliance				
	F		of Band-edg verage Valu					
Frequency	Measured				Margin	E-Field		
Frequency	ı	A	verage Valu	e	Margin	E-Field Polarity		
Frequency	Measured	Correction	verage Valu Field	e Limit	Margin dBμV/m			

Result: Band-edge Compliance of RF Radiated Emissions (8DPSK Highest)

Field Strength of Band-edge Compliance								
Peak Value								
Frequency	Measured	Correction	Correction Field		Margin	E-Field		
	Level @3m	Factor	Strength	@ 3m		Polarity		
MHz	dΒμV	dB/m	dBμV/m	dBμV/m	dBμV/m			
2483.5	20.3	36.4 56.7		74.0	17.3	Horizontal		
Field Strength of Band-edge Compliance								
	F	ield Strength	of Band-edg	ge Compliance				
	F	U	of Band-edg verage Valu	_				
Frequency	Measured	U		_	Margin	E-Field		
Frequency	1	A	verage Valu	e	Margin	E-Field Polarity		
Frequency	Measured	A	verage Valu Field	e Limit	Margin dBμV/m			



Date: 2014-09-05 Page 74 of 93

No.: DM116531

3.1.8 Time of Occupancy (Dwell Time)

Requirements:


The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channel employed. No requirements for Digital Transmission System.

Dwell Time = Pulse Duration * hop rate / number of channel * observation duration

Observed duration: $0.4s \times 79 = 31.6s$

Measurement Data:

Channel Occupied in 8DPSK: 79 of 79 Channel

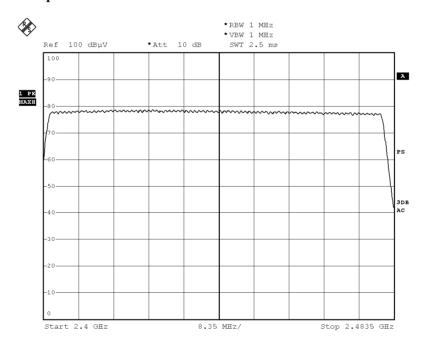

Date: 25.AUG.2014 12:06:43




Date: 2014-09-05 Page 75 of 93

No.: DM116531

DH5 Packet:

DH5 Packet permit maximum 1600/79/6 = 3.37 hops per second in each channel (5 time slots RX, 1 time slot TX). The Dwell time is the time duration of the pulse times $3.37 \times 31.6 = 106.6$ within 31.6 seconds

Fig. A [Pulse duration of Lowest Channel]

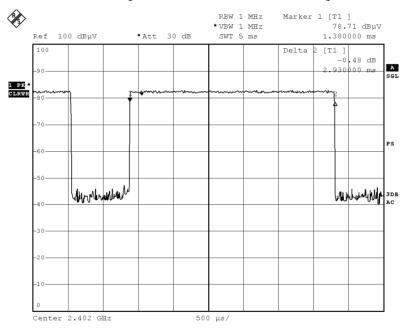



Date: 25.AUG.2014 11:17:16



Date: 2014-09-05 Page 76 of 93

No.: DM116531



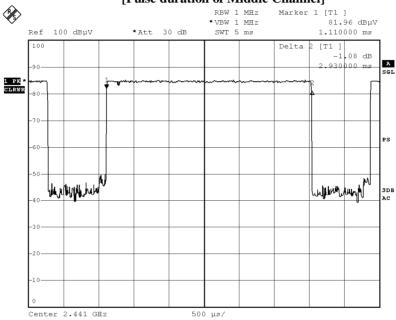



Date: 25.AUG.2014 11:19:09



Date: 2014-09-05 Page 77 of 93

No.: DM116531



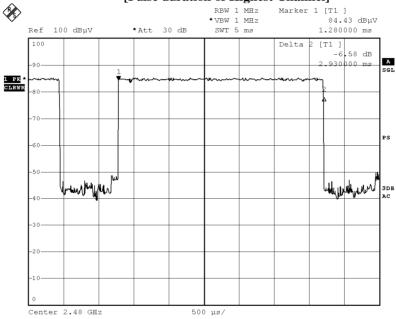

Date: 25.AUG.2014 11:21:14




Date: 2014-09-05 Page 78 of 93

No.: DM116531

DH3 Packet:

DH3 Packet permit maximum 1600/79/4 = 5.06 hops per second in each channel (3 time slots RX, 1 time slot TX). The Dwell time is the time duration of the pulse times $5.06 \times 31.6 = 160$ within 31.6 seconds

Fig. D
[Pulse duration of Lowest Channel]

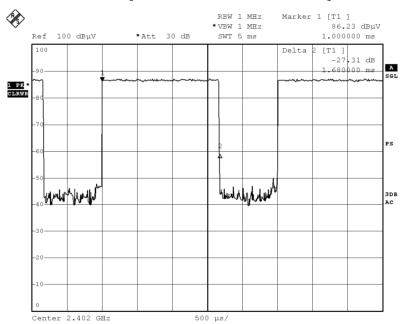


Date: 25.AUG.2014 11:16:42



Date: 2014-09-05 Page 79 of 93

No.: DM116531

Fig. E [Pulse duration of Middle Channel]

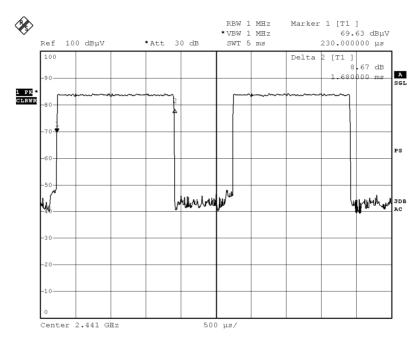


Date: 25.AUG.2014 11:18:13



Date: 2014-09-05 Page 80 of 93

No.: DM116531

Fig. F
[Pulse duration of Highest Channel]

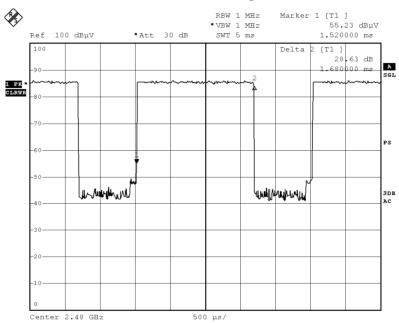

Date: 25.AUG.2014 11:20:09




Date: 2014-09-05 Page 81 of 93

No.: DM116531

DH1 Packet:

DH1 Packet permit maximum 1600/79/2 = 10.12 hops per second in each channel (3 time slots RX, 1 time slot TX). The Dwell time is the time duration of the pulse times $10.12 \times 31.6 = 320$ within 31.6 seconds

Fig. G [Pulse duration of Lowest Channel]

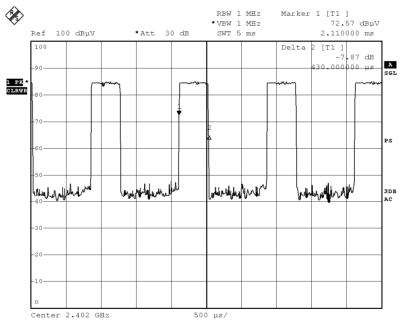



Date: 25.AUG.2014 11:15:10



Date: 2014-09-05 Page 82 of 93

No.: DM116531



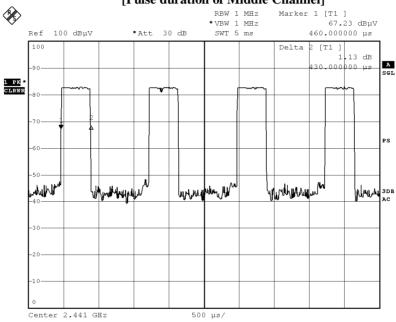


Date: 25.AUG.2014 11:14:13



Date: 2014-09-05 Page 83 of 93

No.: DM116531

Fig. I [Pulse duration of Highest Channel]

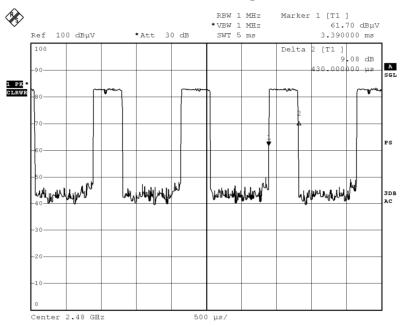

Date: 25.AUG.2014 11:11:58

Time of occupancy (Dwell Time):

Data Packet	Frequency	Pulse Duration	Dwell Time	Limits	Test Results
	(MHz)	(ms)	(s)	(s)	
DH5	2402	2.930	0.312	0.400	Complies
DH5	2441	2.930	0.312	0.400	Complies
DH5	2480	2.930	0.312	0.400	Complies
DH3	2402	1.680	0.269	0.400	Complies
DH3	2441	1.680	0.269	0.400	Complies
DH3	2480	1.680	0.269	0.400	Complies
DH1	2402	0.430	0.138	0.400	Complies
DH1	2441	0.430	0.138	0.400	Complies
DH1	2480	0.430	0.138	0.400	Complies



Date: 2014-09-05 Page 84 of 93

No.: DM116531

3.1.9 Channel Centre Frequency

Requirements:

Frequency hopping system in the 2400-2483.5MHz band shall use at least 79 (Channel 0 to 78) non-overlapping channels.

The EUT operates in according with the Bluetooth system specification within the 2400 - 2483.5 MHz frequency band.

RF channels for Bluetooth systems are spaced 1 MHz and are ordered in channel number k. In order to comply with out-of-band regulations, a lower frequency guard band of 2.0 MHz and a higher frequency guard band of 3.5MHz is used.

The operating frequencies of each channel are as follows:

First RF channel start from 2400MHz + 2MHz guard band = 2402MHz Frequency of RF Channel = 2402+k MHz, k = 0,...,78 (Channel separation = 1MHz)



Date: 2014-09-05 Page 85 of 93

No.: DM116531

3.1.10 Pseudorandom Hopping Algorithm

Requirements:

The channel frequencies shall be selected from a pseudorandom ordered list of hopping frequencies. Each frequency must be used equally by the transmitter.

EUT Pseudorandom Hopping Algorithm

The EUT is a Bluetooth device, the Pseudo-random hopping pattern; hopping characteristics and algorithm are based on the Bluetooth specification.



Date: 2014-09-05 Page 86 of 93

No.: DM116531

3.1.11 Antenna Requirement

Test Requirements: § 15.203

Test Specification:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

Test Results:

This is Meander line antenna. There is no external antenna, the antenna gain = 0dBi. User is unable to remove or changed the Antenna.



Date: 2014-09-05 Page 87 of 93

No.: DM116531

3.1.12 RF Exposure

Test Requirement: FCC 47CFR 15.247(i)

Test Date: 2014-09-03 Mode of Operation: BT mode

Dimension of EUT: 155mm x 110mm x 60mm

Requirements:

In 15.247(i), an equipment shall be operated in a manner that ensures that the public is not exposed to radio frequency energy levels in excess of the limits in §§ 1.1310 and 2.1093 of this chapter. Applications to the Commission for construction permits, licenses to transmit or renewals thereof, equipment authorizations or modifications in existing facilities must contain a statement confirming compliance with the limits unless the facility, operation, or transmitter is categorically excluded, as discussed below. Technical information showing the basis for this statement must be submitted to the Commission upon request.

According to KDB447498 D01 General RF Exposure Guidance v05, unless specifically required by the published RF exposure KDB procedures, standalone 1-g head or body and 10-g extremity SAR evaluation for general population exposure conditions, by measurement or numerical simulation, is not required when the corresponding SAR Exclusion Threshold condition.

Test Results:

RF Exposure Evaluation

The Maximum conducted output power = 0.79 mW (at frequency = 2.441 GHz)

It's Conducted source-based time-averaging output power = 0.63 mW (at frequency = 2.441 GHz)

Since the SAR test exclusion thresholds for 2450MHz at test separation distances \leq 15 mm = 29mW and the Conducted source-based time-averaging output power is less than 10mW.

Therefore. the SAR evaluation can be exempted.



Date: 2014-09-05 Page 88 of 93

No.: DM116531

Appendix A

List of Measurement Equipment

EQP NO.	DESCRIPTION	MANUFACTURER	MODEL NO.	SERIAL NO.	LAST CAL	DUE CAL
EMD004	LISN	ROHDE & SCHWARZ	ESH3-Z5	100102	2014.03.21	2015.03.21
EMD022	EMI Test Receiver	ROHDE & SCHWARZ	ESCS30	100314	2014.03.21	2015.03.21
EMD035	EMI Test Receiver	ROHDE & SCHWARZ	ESCI	100441	2014.06.10	2015.06.10
EMD036	EMI Test Receiver	ROHDE & SCHWARZ	ESIB 26	100388	2014.06.10	2015.06.10
EMD041	TWO-LINE V- NETWORK	ROHDE & SCHWARZ	ENV216	100261	2014.03.21	2015.03.21
EMD061	Biconilog Antenna	ETS.LINDGREN	3142C	00060439	2012.11.28	2014.11.28
EMD062	Double-Ridged Waveguide (1GHz – 18GHz)	ETS.LINDGREN	3117	00075933	2013.01.19	2015.01.19
EMD084	MULTI-DVICE CONTROLLER	ETS.LINDGREN	2090	00060107	N/A	N/A
EMD088	Video Contol Unit	ETS.LINDGREN	Y21953A	2601073	N/A	N/A
EMD093	Monitor	ViewSonic	VA9036	Q8X064201876	N/A	N/A
EMD102	Intelligent Frequency	Ainuo Instrument Co., Ltd	AN97005SS	79707454	N/A	N/A
EMD103	Intelligent Frequency	Ainuo Instrument Co., Ltd	AN97005SS	79707455	N/A	N/A
EMD105	FACT-3 EMC Chamber	ETS.LINDGREN	FACT-3	3803	N/A	N/A
EMD106	Shielding Room #1	ETS.LINDGREN	RFD-100	3802	N/A	N/A
EMD111	Power meter	ROHDE & SCHWARZ	NRVD	102051	2014.03.21	2015.03.21
	100V Insertion Unit	ROHDE & SCHWARZ	URV5-Z4	100464	2014.03.21	2015.03.21
EMD113	Pre-Amplifier	ROHDE & SCHWARZ	N/A	1129588	2014.03.21	2015.03.21
EMD124	Loop Antenna	ETS-Lindgren	6502	00104905	2014.04.28	2016.04.28
EMD131	Standard Gain Horn Antenna (18GHz – 26.5GHz)	Chengdu AINFO Inc.	JXTXLB-42- 15-C-KF	J2021100721001	2013.04.09	2015.04.09

Remarks:-

N/A Not Applicable or Not Available



Date: 2014-09-05 Page 89 of 93

No.: DM116531

Appendix B

Ancillary Equipment

ITEM NO.	DESCRIPTION	MODEL NO.	FCC ID	REMARK
1	DELL COMPUTER	DMC	N/A	N/A
2	DELL MONITOR	E177FPB	ARSCM356N	RESOLUTION 1024*768 (DURING TESTING) 1.0M UNSHIEDED POWER VORD CONNECTED TO THE COMPUTER 1.5M SHIELDED CABLE CONNECTED TO THE COMPUTER
3	DELL KEYBOARD	SK-8110	N/A	1.8M SHIELDED COILED CABLE CONNECTED TO THE COMPUTER
4	DELL MOUSE	N/A	N/A	2.4M UNSHIELDED CABLE CONNECTED TO THE COMPUTER
5	LASER PRINTER	HP LASERJET 1020 PLUS	N/A	1.8M UNSHIELDED POWER CORD 2.8M SHIELDED CABLE (BUNDLED TO 1M) CONNECTED TO THE COMPUTER
6	iPod Touch	A1367	BCG-E2407	N/A



Date: 2014-09-05 Page 90 of 93

No.: DM116531

Appendix C

Photographs of EUT

Front View of the product



Inside View of the product



Inner Circuit Bottom View




Rear View of the product



Inner Circuit Top View



Inner Circuit Bottom View



STC (Dongguan) Company Limited

68 Furnin Nan Road, Dalang, Dongguan, China. (Zip Code : 523 770)

Tel : (86 769) 8111 9888 Fax : (86 769) 8111 6222 E-mail : dgstc@dgstc.org Homepage : www.dgstc.org




Date: 2014-09-05 Page 91 of 93

No.: DM116531

Photographs of EUT

Inner Circuit Top View



Inner Circuit Bottom View



Inner Circuit Top View



Inner Circuit Bottom View



Battery View of the Product



STC (Dongguan) Company Limited

68 Fumin Nan Road, Dalang, Dongguan, China. (Zip Code : 523 770)


Tel : (86 769) 8111 9888 Fax : (86 769) 8111 6222 E-mail : dgstc@dgstc.org Homepage : www.dgstc.org




Date: 2014-09-05 Page 92 of 93

No.: DM116531

Photographs of EUT

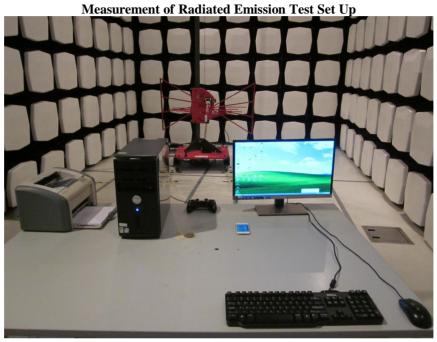

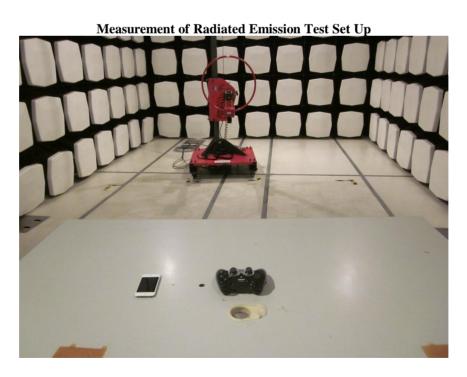

STC (Dongguan) Company Limited

68 Fumin Nan Road, Dalang, Dongguan, China. (Zip Code : 523 770)


Tel : (86 769) 8111 9888 Fax : (86 769) 8111 6222 E-mail : dgstc@dgstc.org Homepage : www.dgstc.org



Date: 2014-09-05 Page 93 of 93

No.: DM116531

Photographs of EUT

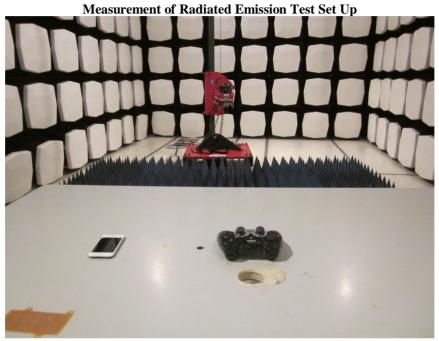

Measurement of Conducted Emission Test Set Up

STC

www.stc-group.org

***** End of Test Report *****

STC (Dongguan) Company Limited

68 Fumin Nan Road, Dalang, Dongguan, China. (Zip Code : 523 770)

Tel : (86 769) 8111 9888 Fax : (86 769) 8111 6222 E-mail : dgstc@dgstc.org Homepage : www.dgstc.org