


CH11



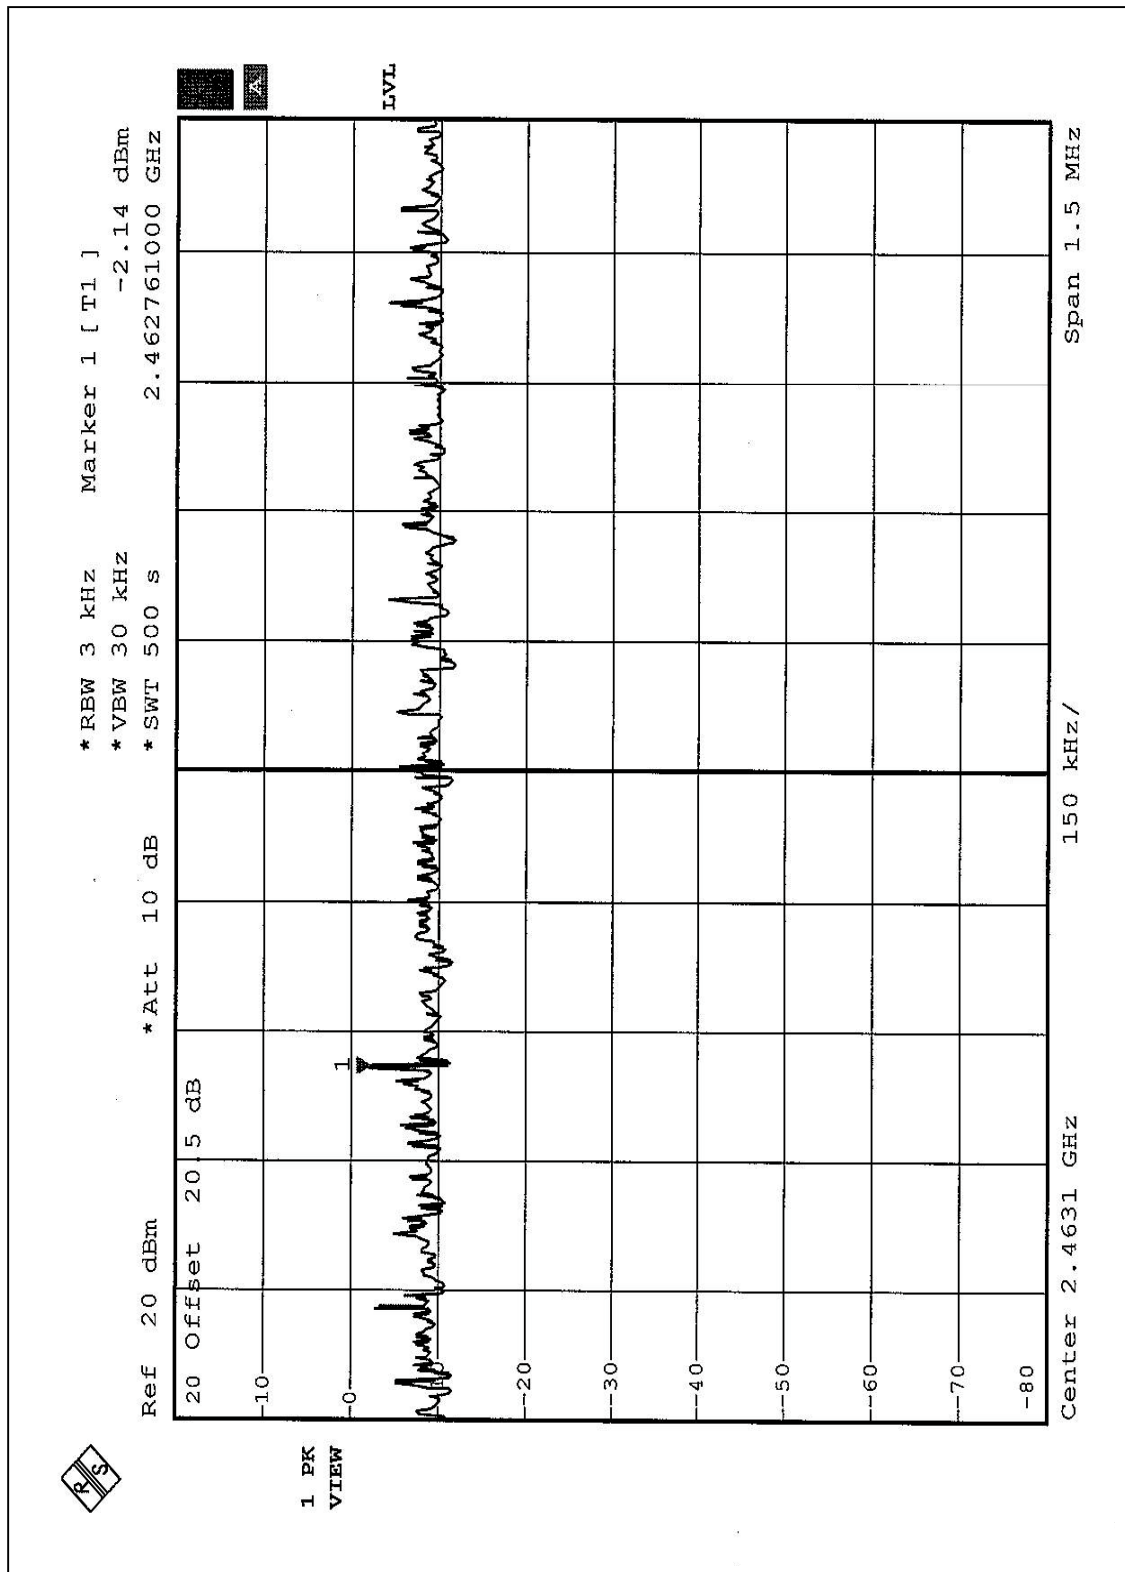


4.5.8 TEST RESULTS (B)

EUT	802.11b/g MiniPCI module		
MODEL	T60H786	ENVIRONMENTAL CONDITIONS	21 deg. C, 58 %RH, 974 hPa
INPUT POWER (SYSTEM)	120Vac, 60 Hz	TESTED BY	Eric Lee

CHANNEL NUMBER	CHANNEL FREQUENCY (MHz)	RF POWER LEVEL IN 3 KHz BW (dBm)	MAXIMUM LIMIT (dBm)	PASS/FAIL
1	2412	-5.41	8	PASS
6	2437	-3.22	8	PASS
11	2462	-4.86	8	PASS

CH1

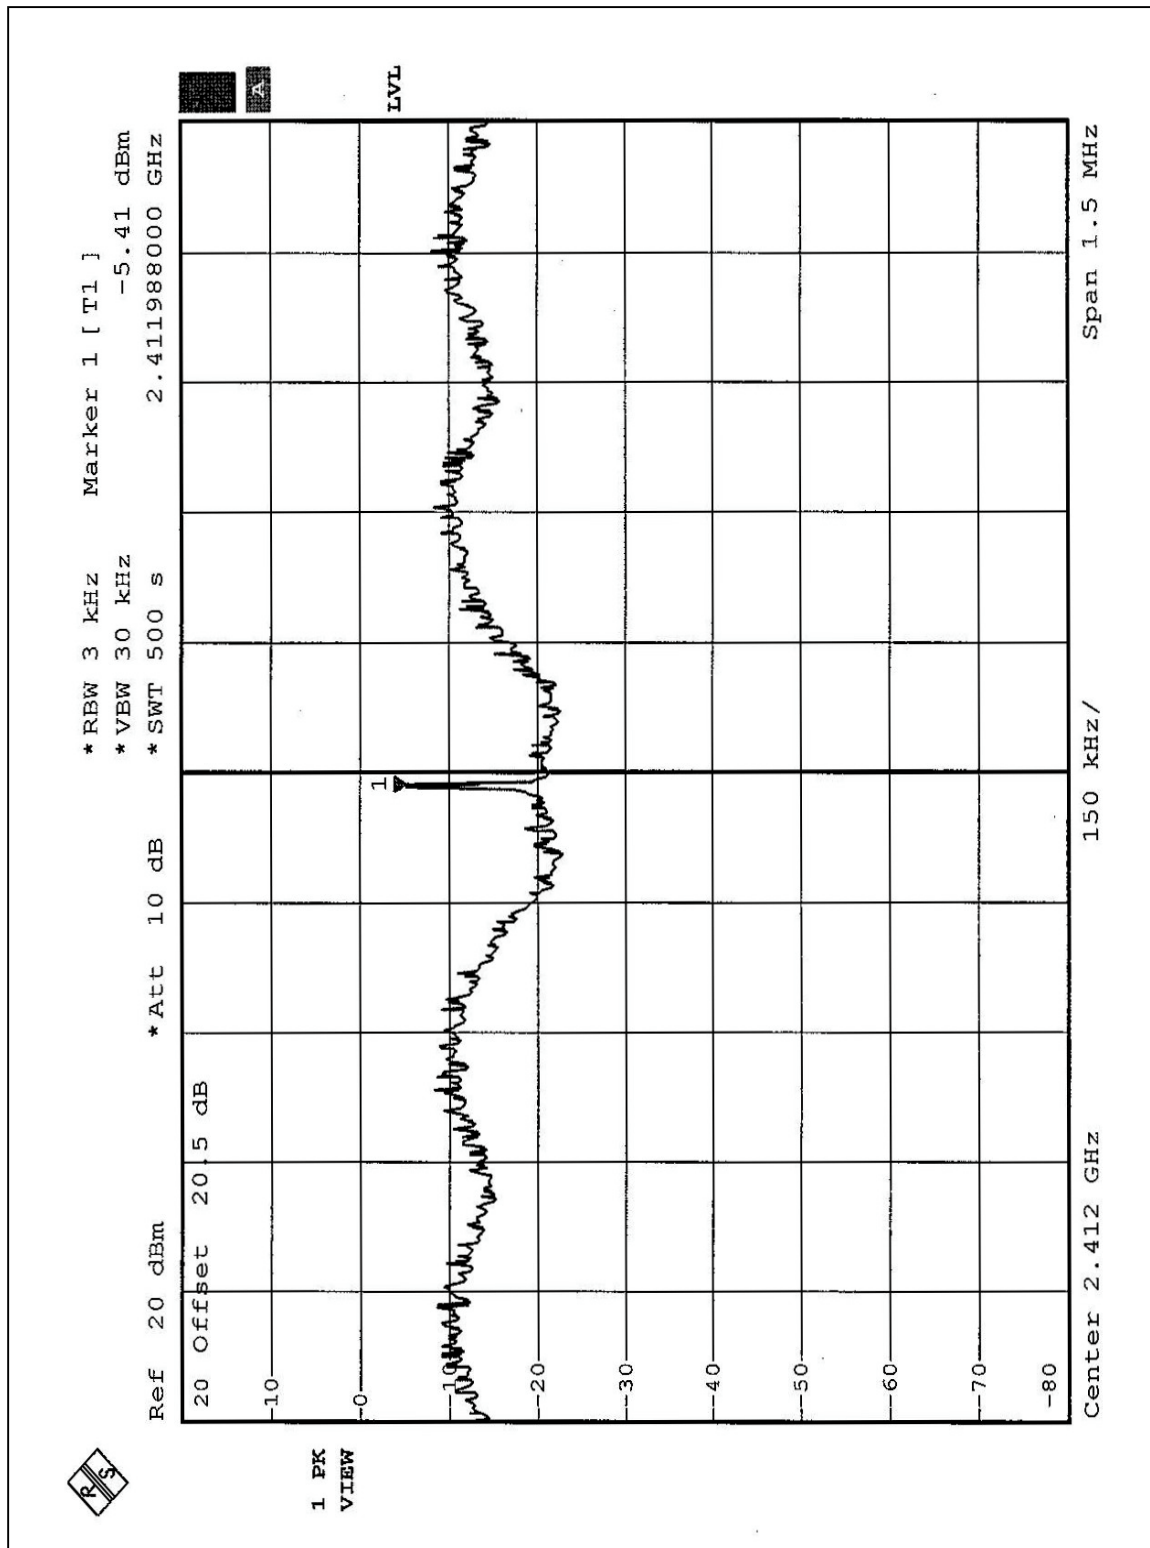


*RBW 3 kHz Marker 1 [T1]
 *VBW 30 kHz -3.22 dBm
 *SWT 500 s 2.436988000 GHz

Ref 20 dBm *Att 10 dB 20 Offset 20.5 dB

1 PK
 VIEW

Center 2.437 GHz 150 kHz/ Span 1.5 MHz

CH11

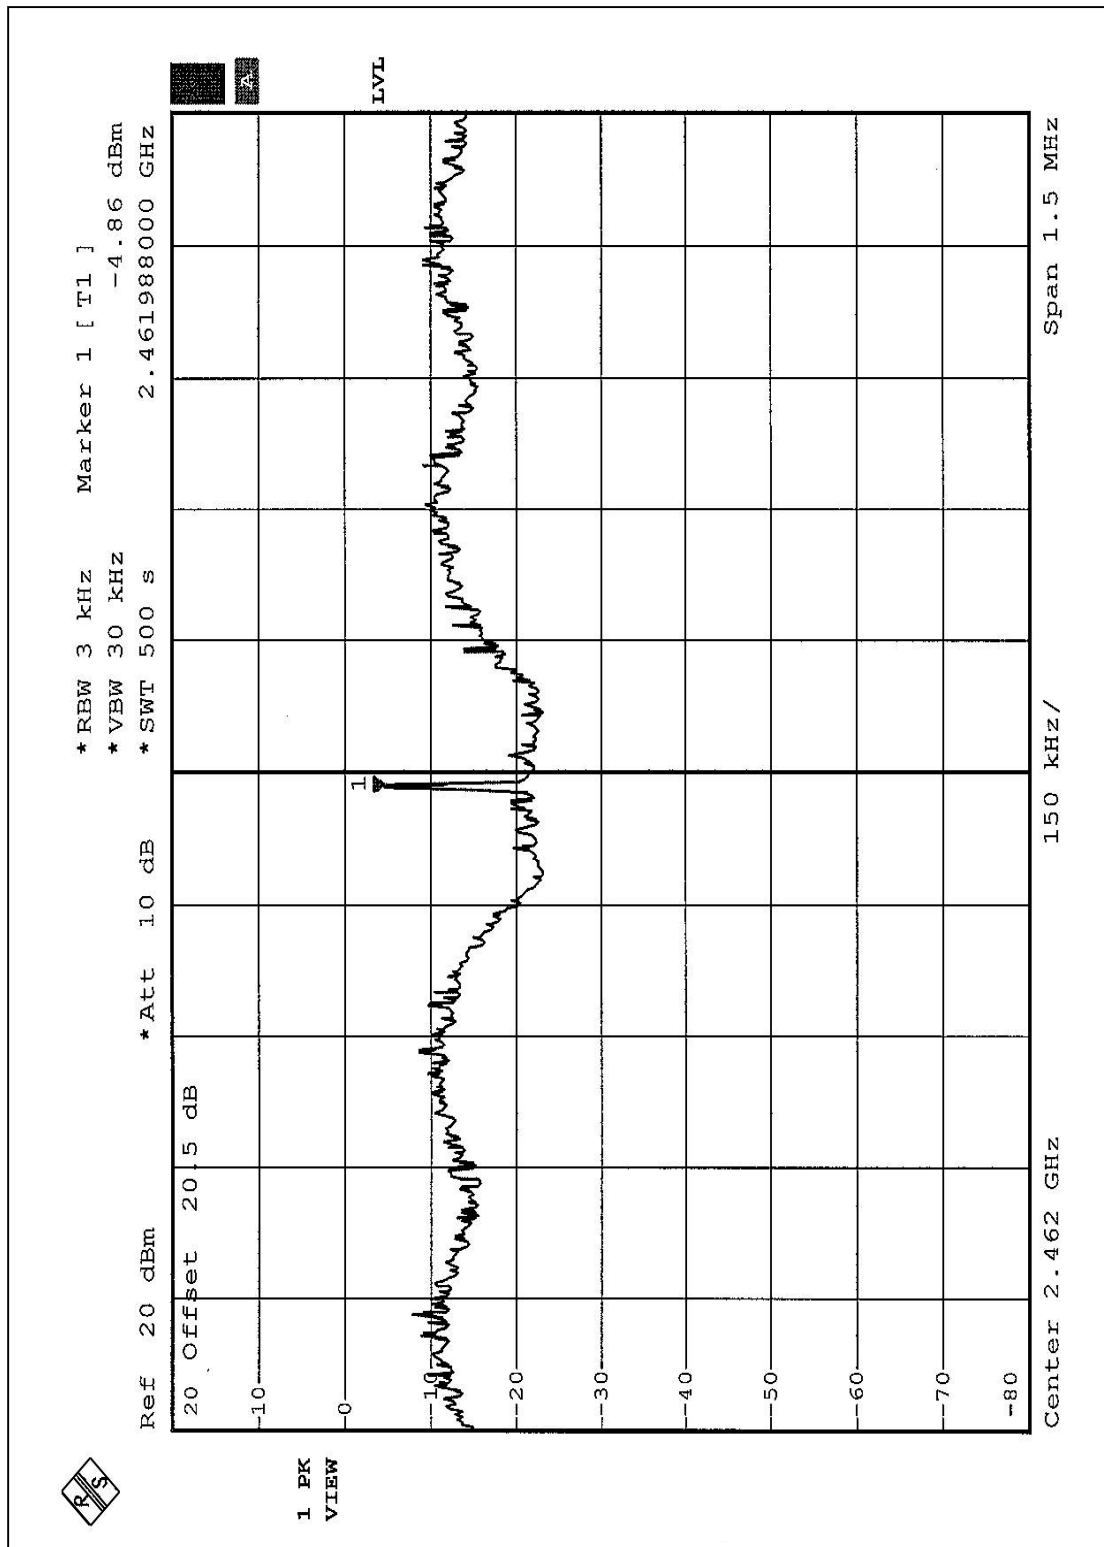

4.6 BAND EDGES MEASUREMENT

4.6.1 LIMITS OF BAND EDGES MEASUREMENT

Below -20dB of the highest emission level of operating band (in 100KHz Resolution Bandwidth).

4.6.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
R&S SPECTRUM ANALYZER	FSP40	100037	May 06, 2004

NOTE:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.6.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer via a low loss cable. Set both RBW and VBW of spectrum analyzer to 1MHz and 300Hz with suitable frequency span including 100 MHz bandwidth from band edge. The band edges was measured and recorded.

4.6.4 EUT OPERATING CONDITION

Same as Item 4.3.6

4.6.5 TEST RESULTS (A)

The spectrum plots are attached on the following 4 pages. D1 line indicates the highest level, D2 line indicates the 20dB offset below D1. It shows compliance with the requirement in part 15.247(C).

Test Mode A


NOTE (1): The band edge emission plot on the following 1 ~ 2 page shows 58.33dB delta between carrier maximum power and local maximum emission in restrict band (2.3900GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.2.8 is 105.1dBuV/m, so the maximum field strength in restrict band is $105.1 - 58.33 = 46.77$ dBuV/m which is under 54 dBuV/m limit.


NOTE (2): The band edge emission plot on the following 3 ~ 4 page shows 57.36dB delta between carrier maximum power and local maximum emission in restrict band (2.4835GHz). The emission of carrier strength list in the test result of channel 11 at the item 4.2.8 is 105.2dBuV/m, so the maximum field strength in restrict band is $105.2 - 57.36 = 47.84$ dBuV/m which is under 54 dBuV/m limit.


Test Mode B


NOTE (1): The band edge emission plot on the following 1 ~ 2 page shows 58.33dB delta between carrier maximum power and local maximum emission in restrict band (2.3900GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.2.8 is 102.7dBuV/m, so the maximum field strength in restrict band is $102.7 - 58.33 = 44.37$ dBuV/m which is under 54 dBuV/m limit.

NOTE (2): The band edge emission plot on the following 3 ~ 4 page shows 57.36dB delta between carrier maximum power and local maximum emission in restrict band (2.4835GHz). The emission of carrier strength list in the test result of channel 11 at the item 4.2.8 is 106.0dBuV/m, so the maximum field strength in restrict band is $106.0 - 57.36 = 48.64$ dBuV/m which is under 54 dBuV/m limit.

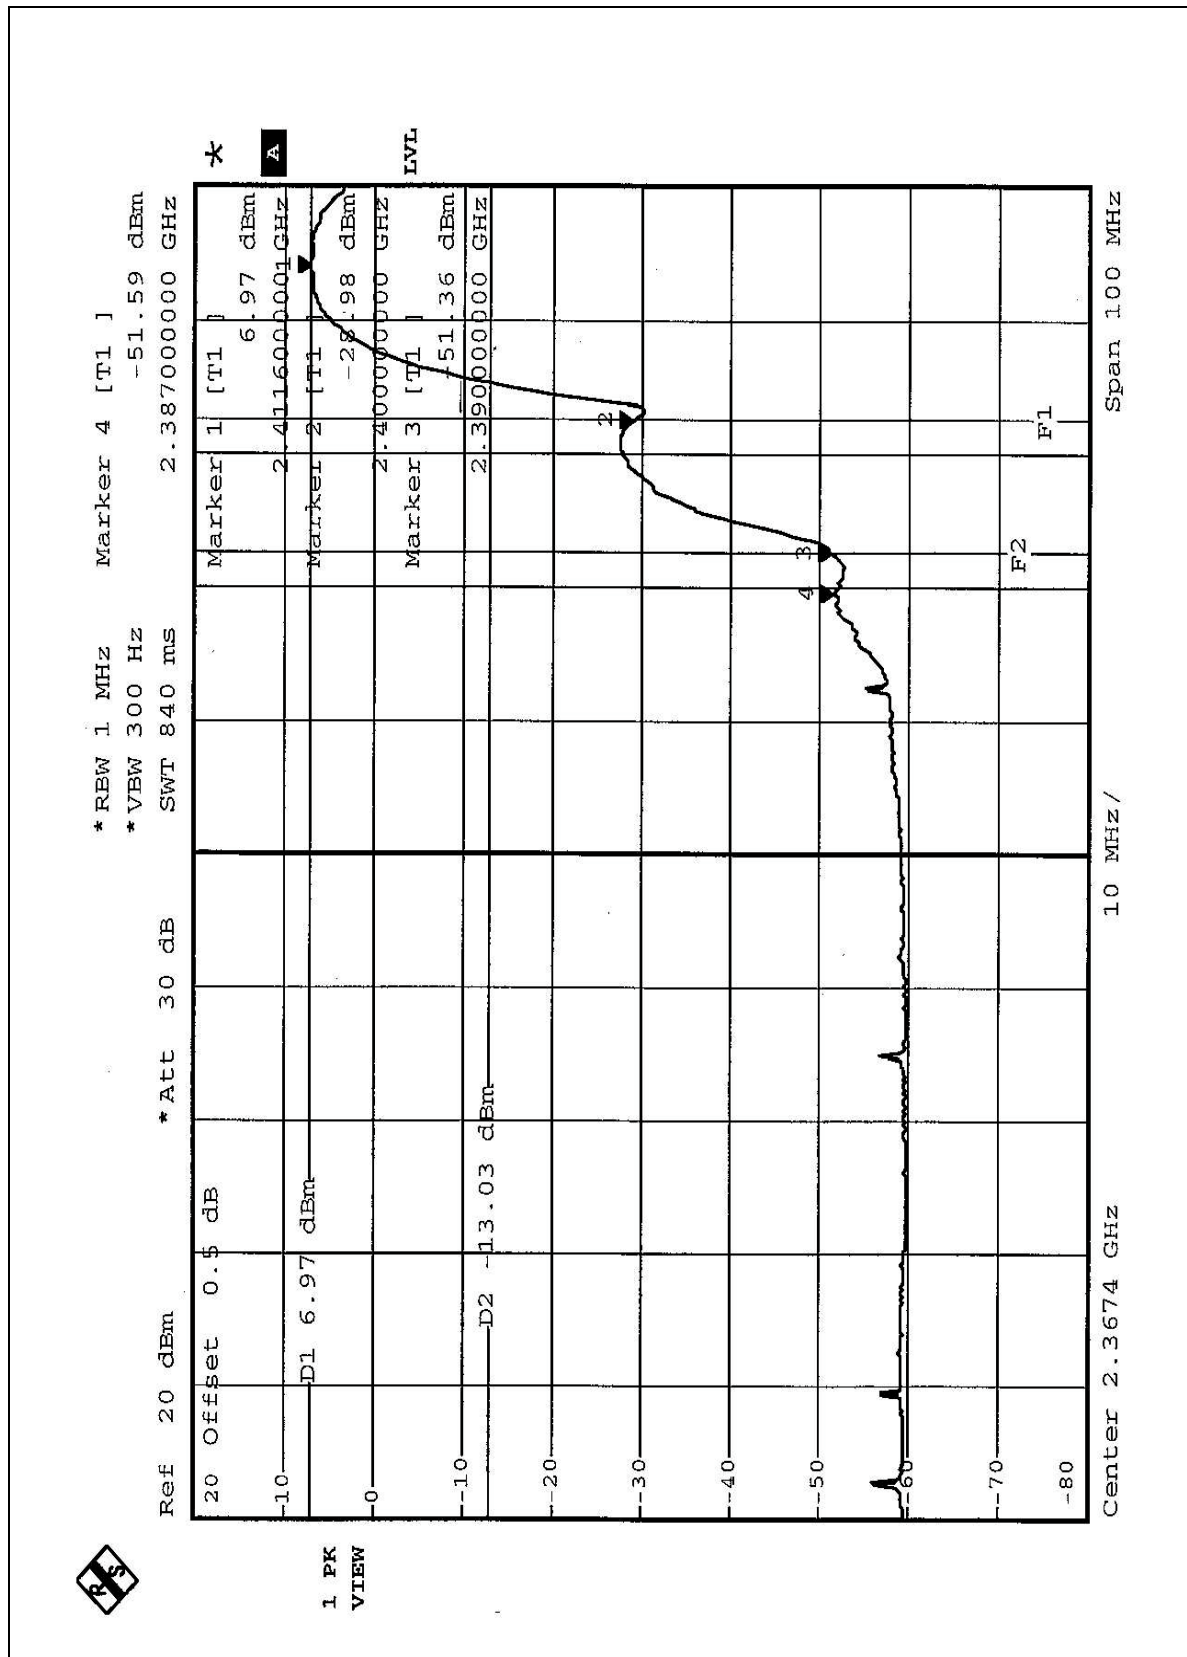

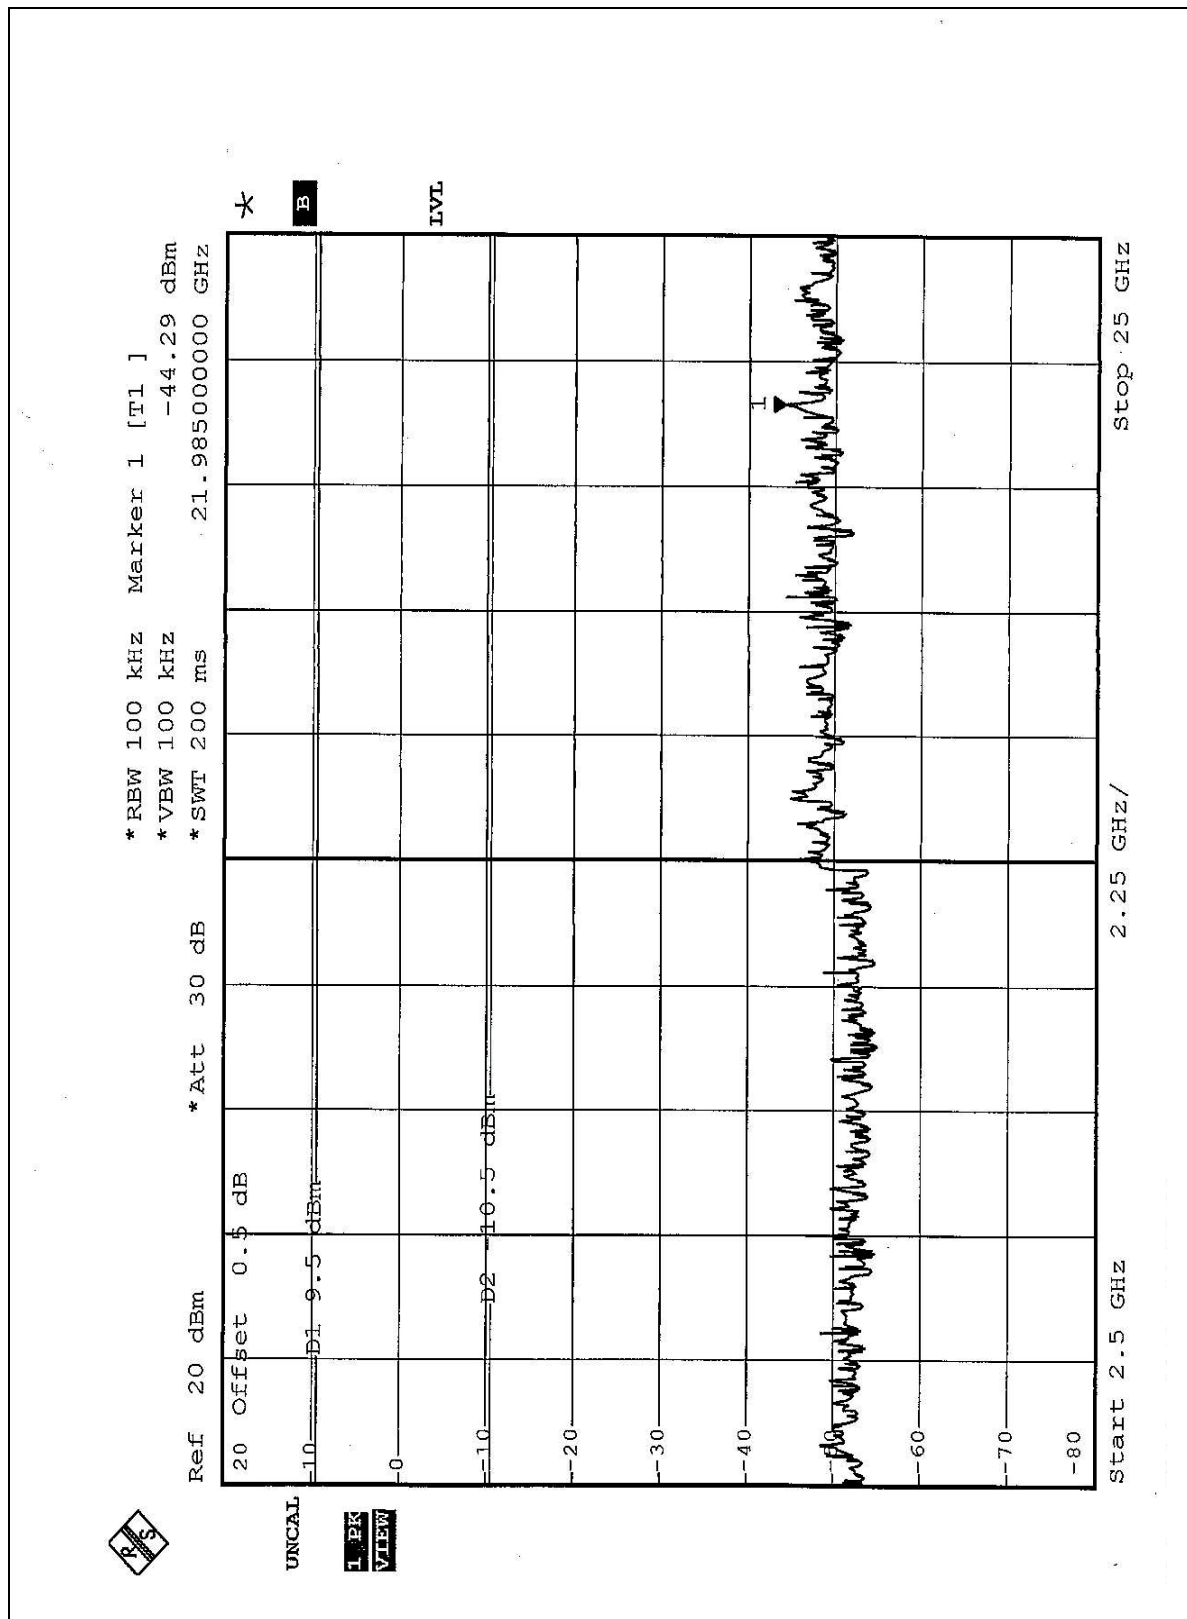

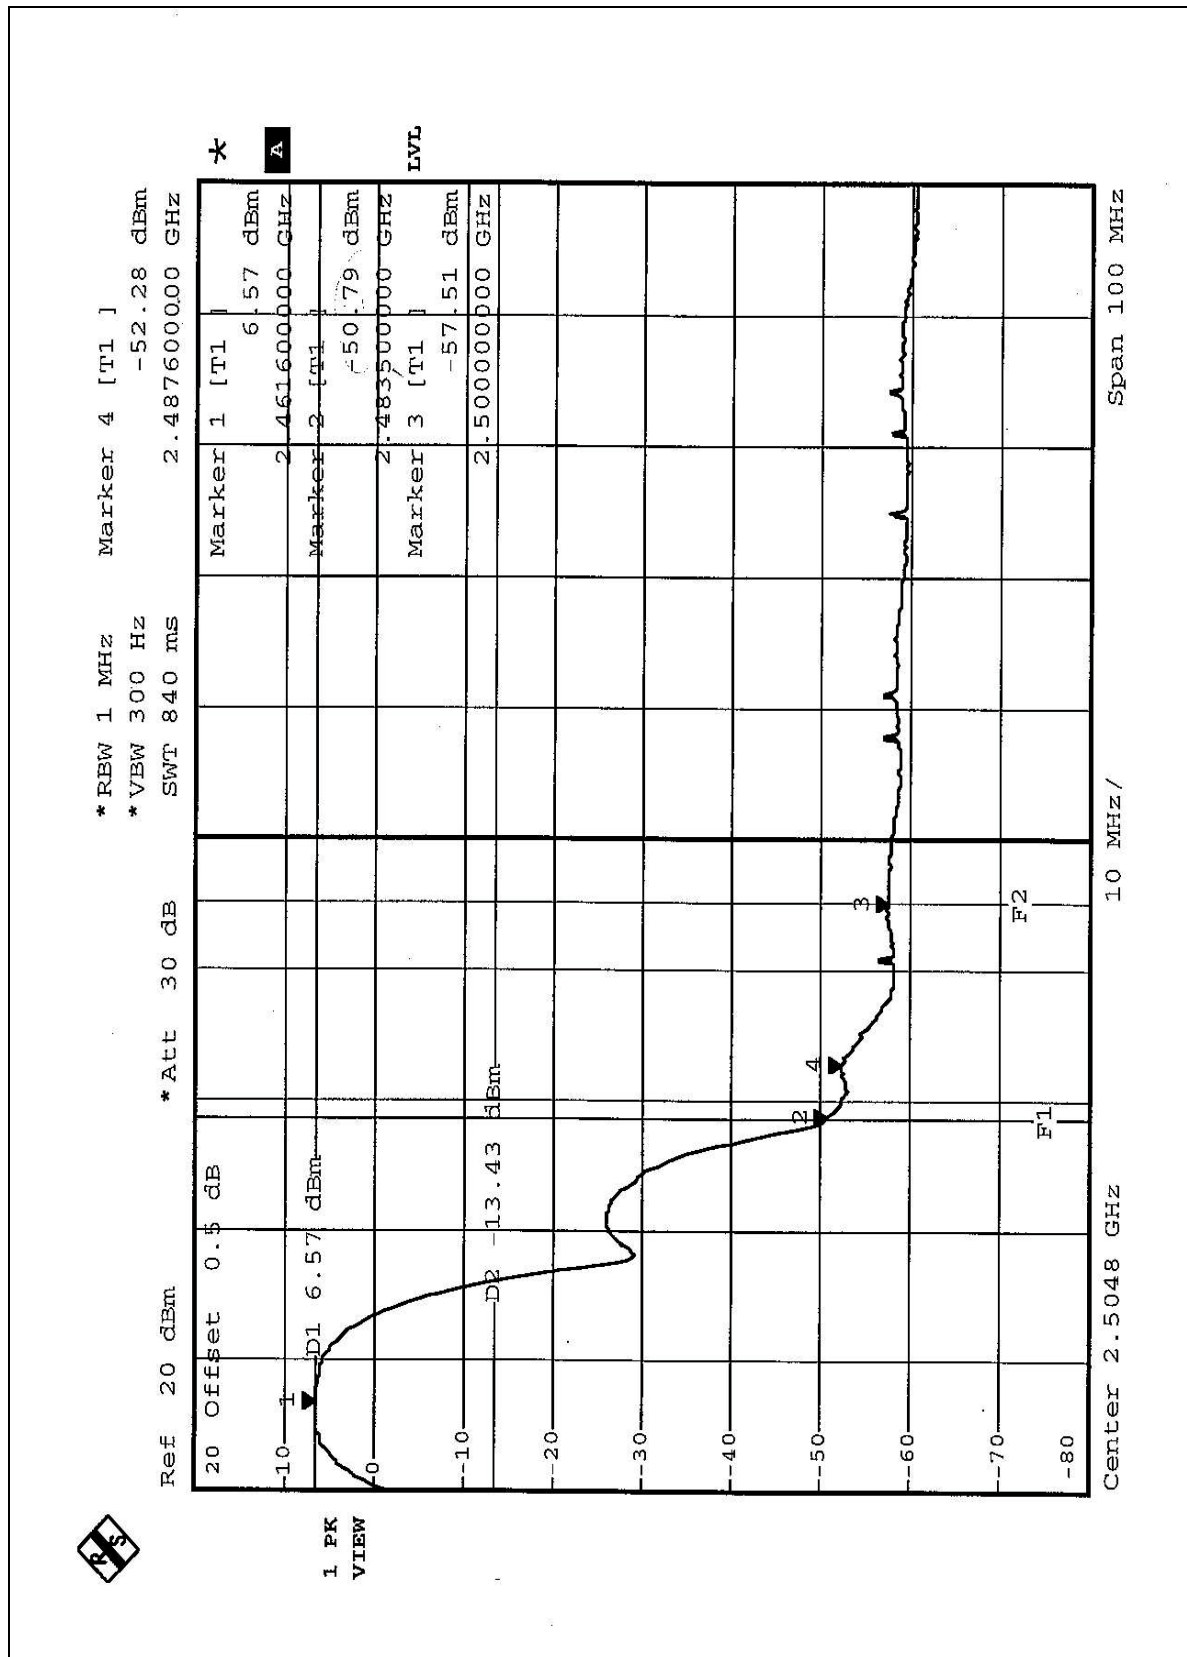

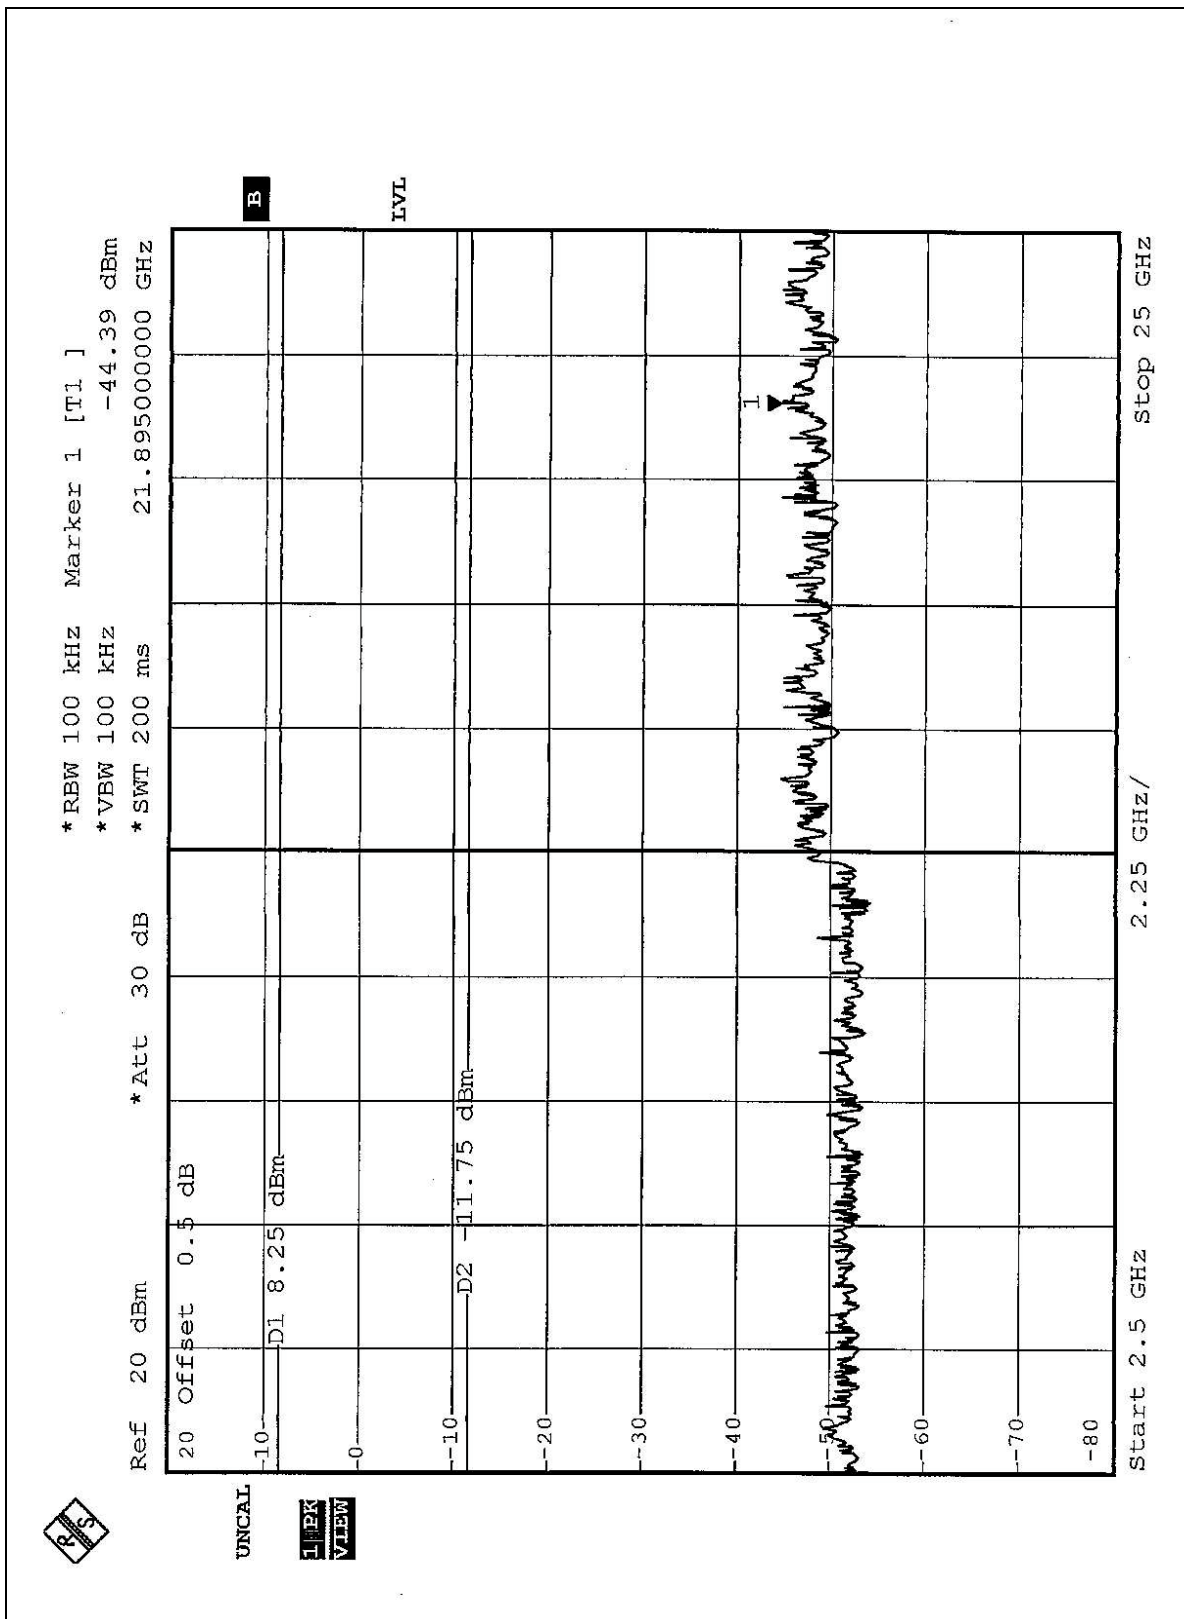

4.6.6 TEST RESULTS (B)

The spectrum plots are attached on the following 4 pages. D1 line indicates the highest level, D2 line indicates the 20dB offset below D1. It shows compliance with the requirement in part 15.247(C).

Test Mode A


NOTE (1): The band edge emission plot on the following 1 ~ 2 page shows 46.39dB delta between carrier maximum power and local maximum emission in restrict band (2.3900GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.2.9 is 99.8dBuV/m, so the maximum field strength in restrict band is $99.8 - 46.39 = 53.41$ dBuV/m which is under 54 dBuV/m limit.


NOTE (2): The band edge emission plot on the following 3 ~ 4 page shows 44.12dB delta between carrier maximum power and local maximum emission in restrict band (2.4835GHz). The emission of carrier strength list in the test result of channel 11 at the item 4.2.9 is 97.3dBuV/m, so the maximum field strength in restrict band is $97.3 - 44.12 = 53.18$ dBuV/m which is under 54 dBuV/m limit.


Test Mode B


NOTE (1): The band edge emission plot on the following 1 ~ 2 page shows 46.39dB delta between carrier maximum power and local maximum emission in restrict band (2.3900GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.2.9 is 99.3dBuV/m, so the maximum field strength in restrict band is $99.3 - 46.39 = 52.91$ dBuV/m which is under 54 dBuV/m limit.

NOTE (2): The band edge emission plot on the following 3 ~ 4 page shows 44.12dB delta between carrier maximum power and local maximum emission in restrict band (2.4835GHz). The emission of carrier strength list in the test result of channel 11 at the item 4.2.9 is 97.5dBuV/m, so the maximum field strength in restrict band is $97.5 - 44.12 = 53.38$ dBuV/m which is under 54 dBuV/m limit.

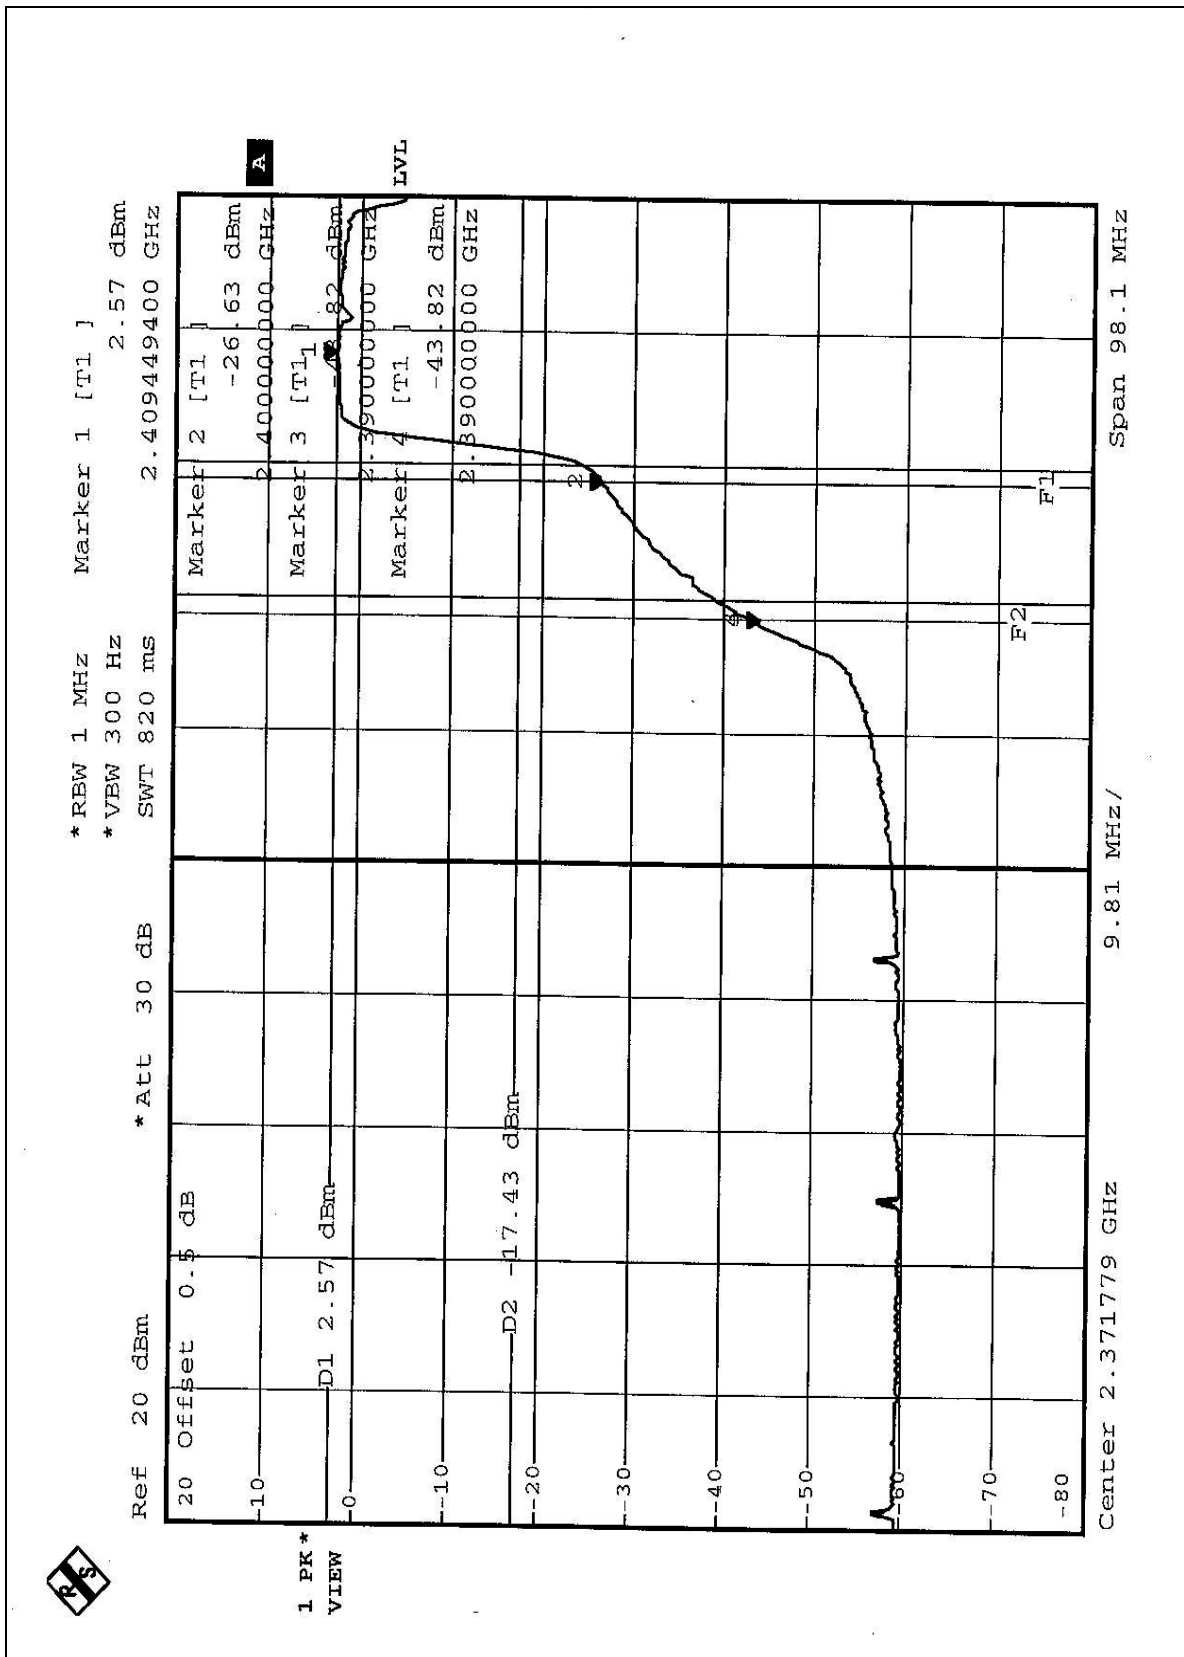

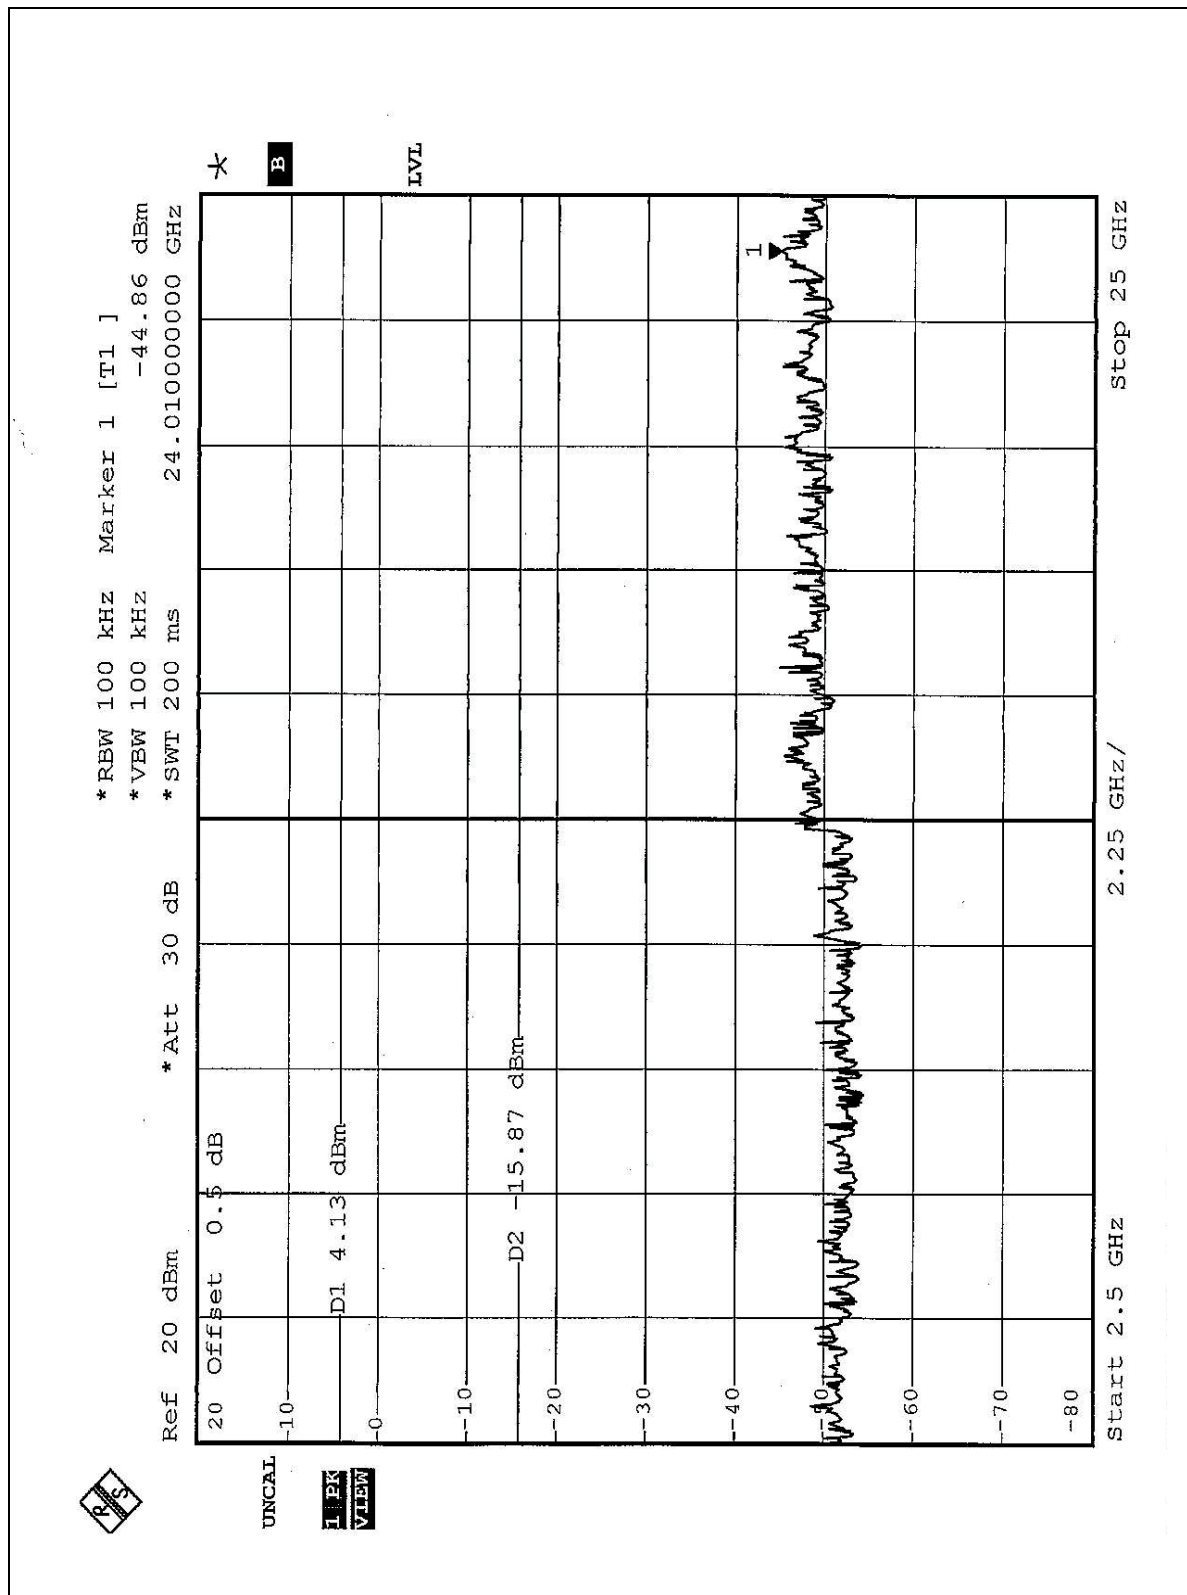

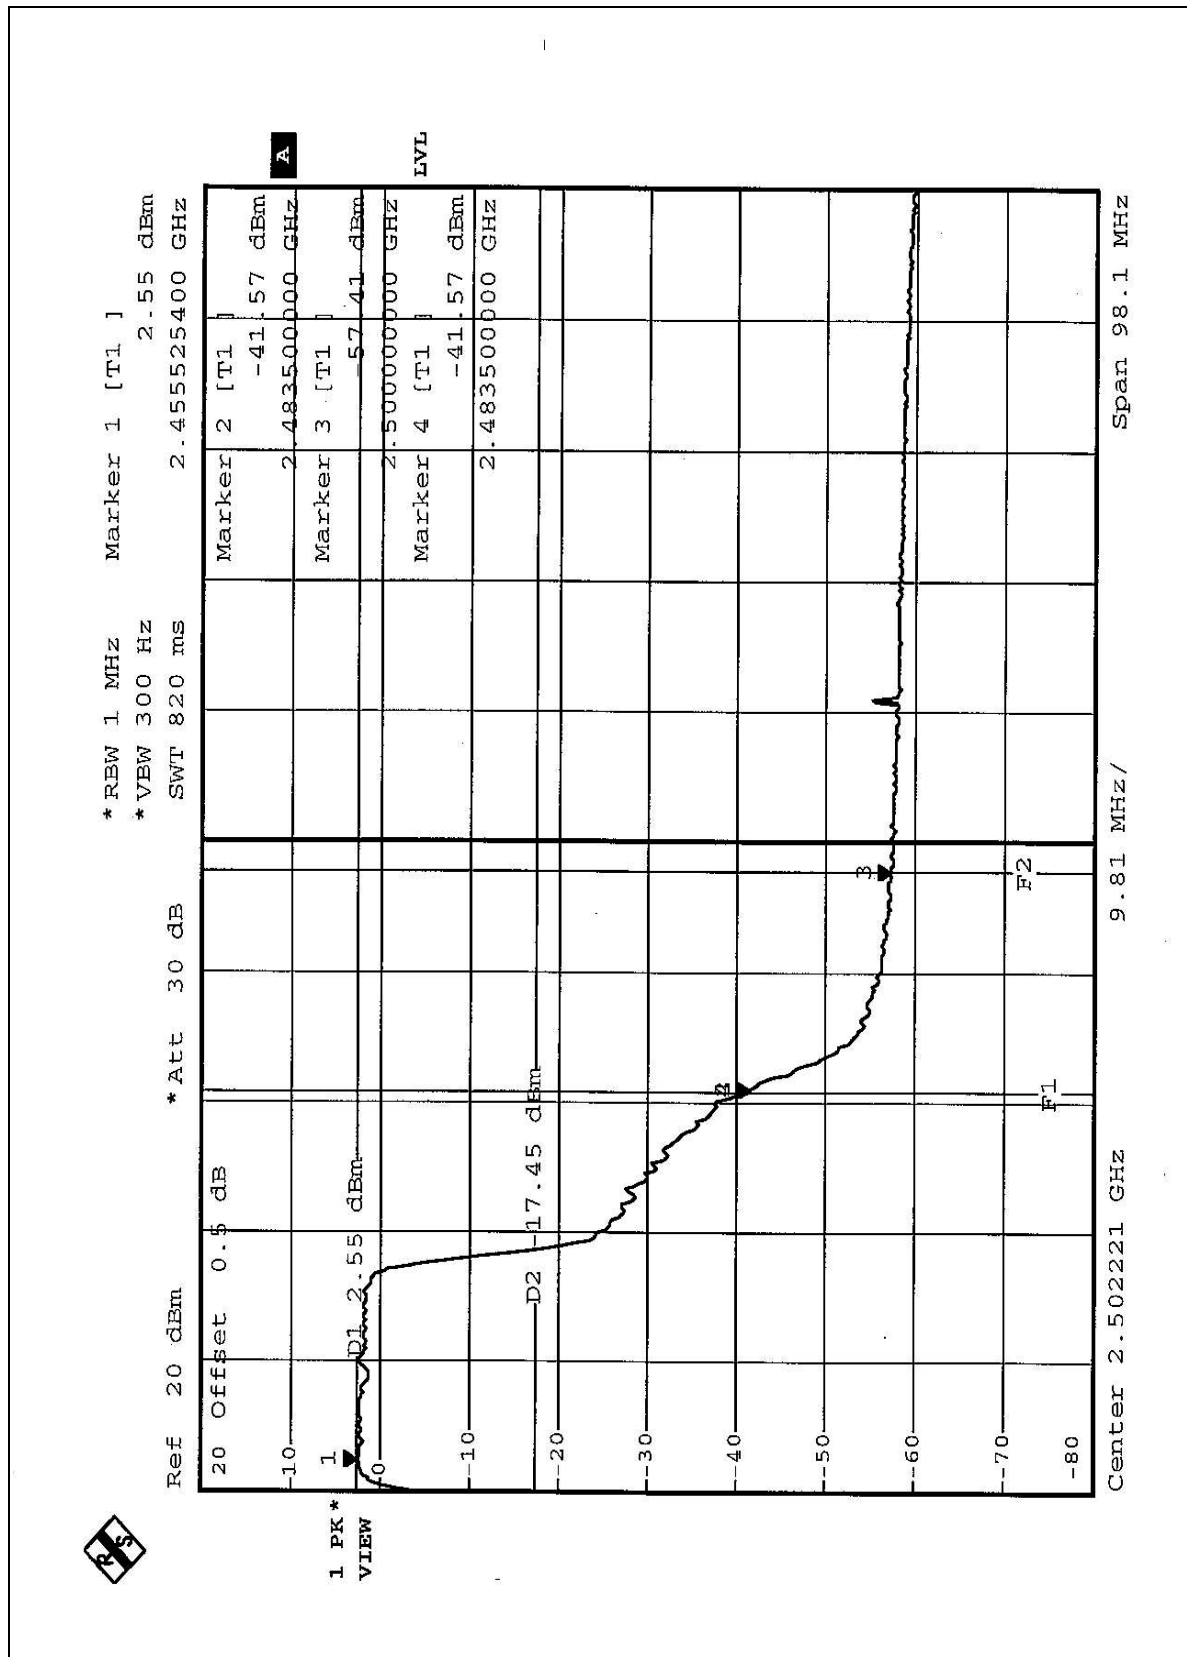

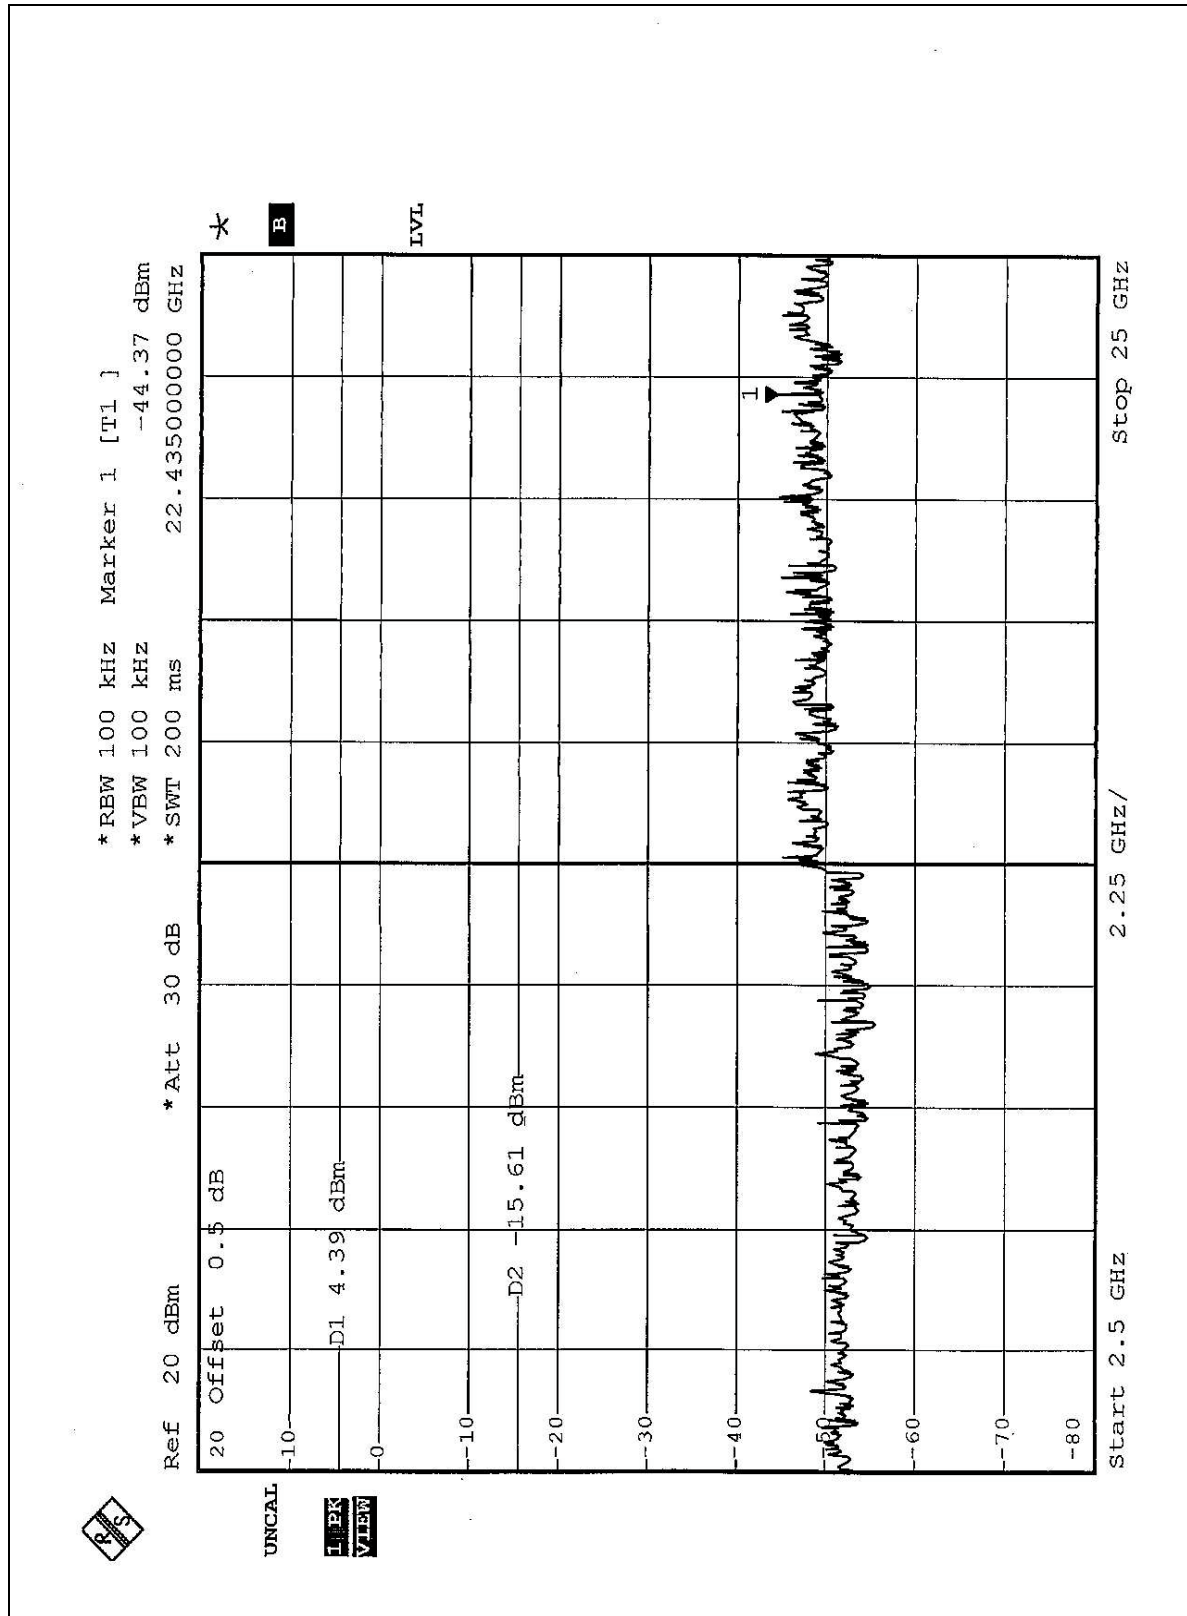



4.7 ANTENNA REQUIREMENT

4.7.1 STANDARD APPLICABLE

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

4.7.2 ANTENNA CONNECTED CONSTRUCTION

The antenna types used in this product are PIFA Antenna and Lambda/4 PIFI Antenna with HRS connector And the maximum Gain of this antenna is only 0.6dBi.

5 PHOTOGRAPHS OF THE TEST CONFIGURATION

CONDUCTED EMISSION TEST (Test Mode A)





(Test Mode B)






RADIATED EMISSION TEST (Test Mode A)





(Test Mode B)

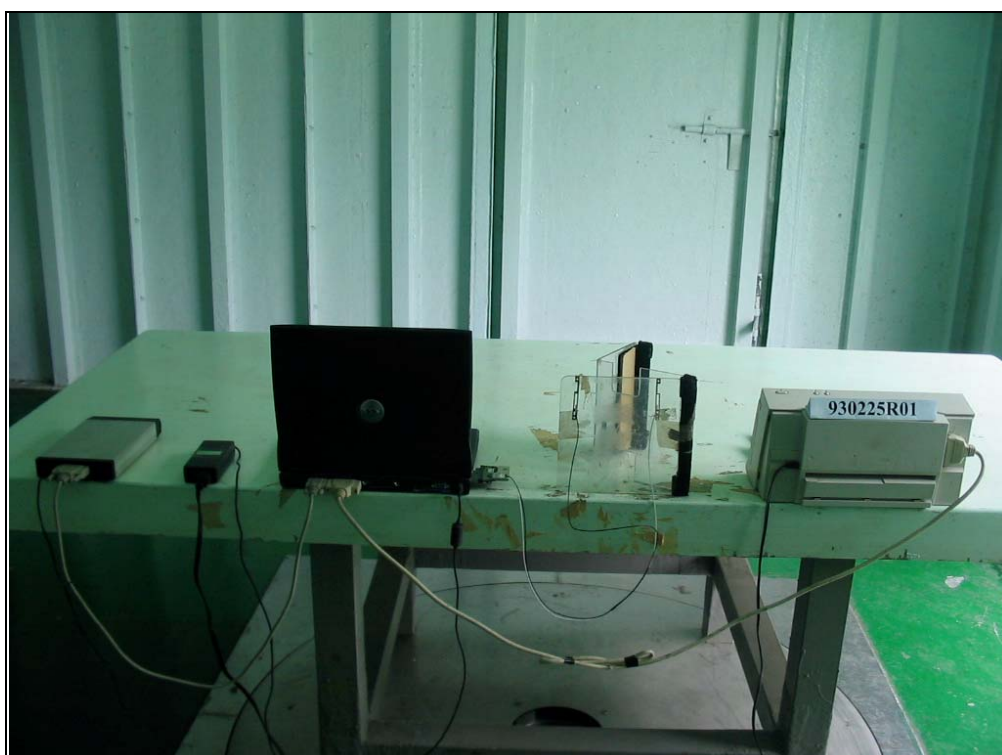





6 INFORMATION ON THE TESTING LABORATORIES

We, ADT Corp., were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved by the following approval agencies according to ISO/IEC 17025, Guide 25 or EN 45001:

USA	FCC, NVLAP, UL
Germany	TUV Rheinland
Japan	VCCI
Norway	NEMKO
Canada	INDUSTRY CANADA , CSA
R.O.C.	CNLA, BSMI, DGT
Netherlands	Telefication
Singapore	PSB , GOST-ASIA(MOU)
Russia	CERTIS(MOU)

Copies of accreditation certificates of our laboratories obtained from approval agencies can be downloaded from our web site:

www.adt.com.tw/index.5/phtml. If you have any comments, please feel free to contact us at the following:

Linko EMC/RF Lab:

Tel: 886-2-26052180

Fax: 886-2-26052943

Hsin Chu EMC/RF Lab:

Tel: 886-3-5935343

Fax: 886-3-5935342

Hwa Ya EMC/RF/Safety Lab:

Tel: 886-3-3183232

Fax: 886-3-3185050

Linko RF & Telecom Lab.

Tel: 886-3-3270910

Fax: 886-3-3270892

Email: service@mail.adt.com.tw

Web Site: www.adt.com.tw

The address and road map of all our labs can be found in our web site also.