

CRAFTSMAN®

Open Door Monitor Model 139.53696

⚠ WARNING

To prevent possible **SERIOUS INJURY** or **DEATH** from a closing garage door:


- Activate door **ONLY** when it can be seen clearly, is properly adjusted, and there are no obstructions to door travel.
- **ALWAYS** keep garage door in sight until completely closed. **NEVER** permit anyone to cross path of closing garage door.

Know when your garage door is open or closed !

Thank you for purchasing the Craftsman Open Door Monitor. Monitor the status of your garage door from inside your home. No longer will you have to run downstairs or go outside just to see if you or your children have left the garage door open.

INSTALLING THE BATTERY IN THE OPEN DOOR INDICATOR TRANSMITTER


1. Place the screw driver blade **on** the tab at the end of the case and gently press down and in toward the case.
2. Insert the the lithium battery into the battery clip with the + (positive) side face up.
3. Push the case back together tightly by inserting the top hooks into the back cover, then snap shut the bottom of the case.

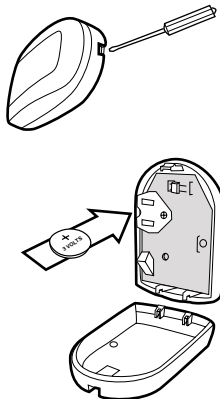


NOTE: It is normal to hear a rattle from the tilt switch in the Transmitter when tilted or rotated to another position.

INDOOR RECEIVER SETUP

1. Plug the AC adapter into any standard 110 volt AC electrical wall outlet and the small plug into the back of the Indoor Receiver.
2. The Receiver has a 9" antenna wire which comes out the back. The antenna should be straight and not touching metal.

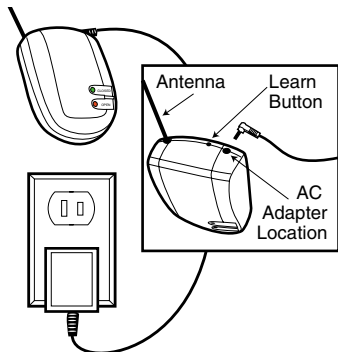

OPEN DOOR MONITOR SYSTEM

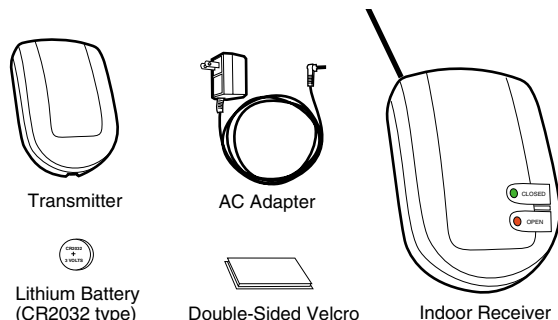

PRE-INSTALLATION SYSTEM TEST

1. The transmitter and receiver are pre-matched (programmed) at the factory. Test the system by flipping the transmitter over while it is a few feet away from the receiver. The receiver will show a green light for closed when the transmitter is face up in the vertical position with the **round end** of the case pointing down (*Figure 1*). The red light will flash when the transmitter is face down in the horizontal position (*Figure 2*).
2. If the green or the red receiver lights do not come on, or do not react as described, see the Troubleshooting or Learning section of these instructions.

Figure 1





Figure 2



MOUNTING THE TRANSMITTER

Attach the transmitter to the inside of the garage door using the double-sided velcro. Mount the transmitter near the top of the garage door for best results. The **round end** of the case should be pointing down when the garage door is closed.

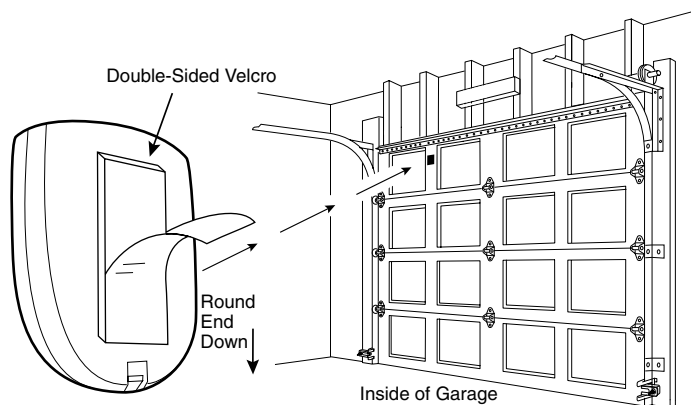

OPEN DOOR MONITOR OPERATION

When the receiver is powered up, both red and green LED's will blink once. The receiver will display the current status of the programmed door transmitter. If no door transmitter(s) is programmed to the receiver, the green and red LED will flash simultaneously. See Learning section.


The transmitter sends a closed signal when the garage door is closed (vertical) and an open signal as the transmitter changes to open (horizontal) position.

Up to 4 door mounted transmitters will work in conjunction with one receiver.

The red LED will blink once every half-second if one or more of the programmed transmitters are not in the closed position. The green LED comes on steady only when all the programmed transmitters are in the closed position.

LEARNING MORE THAN ONE TRANSMITTER(S)

1. Door must be closed and the green LED on steadily.
2. Press and hold the learn button for 2 seconds, the receiver will enter the learn mode. The green LED will blink on and off in 1/2 second increments.
3. The additional transmitter(s) must be moved from a vertical position to a horizontal position or vice versa.
4. Both green and red LED's will turn on for 1 second to indicate a successful learn. Upon success, the receiver immediately exits the learn mode and returns to normal operation.



5. If no signal is received within 30 seconds, the receiver will exit the learn mode and return to normal operation.

ERASING OR CLEARING THE MEMORY

1. Unplug the small plug from the AC Adapter on the Receiver.
2. Make sure the AC Adapter is plugged into a wall outlet.
3. To erase the memory of all programmed transmitters, press and hold the learn button while the plugging the small plug on the AC Adapter into the Receiver.
4. Both red and green LED's will blink simultaneously. This also indicates that no transmitter(s) are in memory.
5. Proceed to Step 2 of *Learning More Than One Transmitter* to program the Transmitter to the Receiver.

TROUBLESHOOTING

The transmitter battery must be replaced every year to assure consistent operation.

If replacing the battery does not rectify the issue, move the receiver into the garage for additional troubleshooting. If the monitor works flawlessly in close proximity, the transmitter(s) signal is being either blocked or interfered with in the previous location and may require placement in a room closer to the garage door(s).

OPTIONAL ACCESSORIES

You can purchase additional transmitters if you have more than one garage door. The receiver will learn up to 4 transmitters -- and the red light will blink if any one of the garage doors is open.

ITEM	PART #
Transmitter	53690
Indoor Receiver	2C507-1
12 volt AC Adapter	2C508-1

Specifications:

Transmitter

Battery:	Lithium Type 2032. 1 year life.
Temperature:	-18°F to 140°F (-25°C to 60°C).
Codes:	254 randomly set codes.

Receiver

Power Supply:	12 volt DC, 50 mA.
Temperature:	14°F to 122°F (-10°C to 50°C).
Codes:	Learns codes of up to 4 transmitters

1-800-4-MY-HOME® (1-800-469-4663)

NOTICE: To comply with FCC and or Industry Canada rules, adjustment or modifications of this receiver and/or transmitter are prohibited, except for changing the code setting or replacing the battery. THERE ARE NO OTHER USER SERVICEABLE PARTS.

Tested to Comply with FCC Standards FOR HOME OR OFFICE USE. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.