

FCC Test Report (GFSK)

Report No.: RFBDKG-WTW-P20120458

FCC ID: JNZMR0087

Test Model: MR0087

Received Date: Dec. 14, 2020

Test Date: Jan. 08 to 09, 2021

Issued Date: Jan. 22, 2021

Applicant: LOGITECH FAR EAST LTD.

Address: #2 Creation Rd. 4, Science-Based Ind. Park Hsinchu Taiwan, R.O.C.

Issued By: Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch
Hsin Chu Laboratory

Lab Address: E-2, No.1, Li Hsin 1st Road, Hsinchu Science Park, Hsinchu City 300,
Taiwan

Test Location: E-2, No.1, Li Hsin 1st Road, Hsinchu Science Park, Hsinchu City 300,
Taiwan

**FCC Registration /
Designation Number:** 723255 / TW2022



This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification.

Table of Contents

| | |
|-------------------------------------------------------------------|-----------|
| Release Control Record | 3 |
| 1 Certificate of Conformity | 4 |
| 2 Summary of Test Results | 5 |
| 2.1 Measurement Uncertainty | 5 |
| 2.2 Modification Record | 5 |
| 3 General Information | 6 |
| 3.1 General Description of EUT (GFSK) | 6 |
| 3.2 Description of Test Modes | 7 |
| 3.2.1 Test Mode Applicability and Tested Channel Detail | 8 |
| 3.3 Duty Cycle of Test Signal | 9 |
| 3.4 Description of Support Units | 10 |
| 3.4.1 Configuration of System under Test | 10 |
| 3.5 General Description of Applied Standards and References | 11 |
| 4 Test Types and Results | 12 |
| 4.1 Radiated Emission and Bandedge Measurement | 12 |
| 4.1.1 Limits of Radiated Emission and Bandedge Measurement | 12 |
| 4.1.2 Test Instruments | 13 |
| 4.1.3 Test Procedures | 15 |
| 4.1.4 Deviation from Test Standard | 15 |
| 4.1.5 Test Setup | 16 |
| 4.1.6 EUT Operating Conditions | 17 |
| 4.1.7 Test Results | 18 |
| 4.2 Conducted Output Power Measurement | 23 |
| 4.2.1 Limits of Conducted Output Power Measurement | 23 |
| 4.2.2 Test Setup | 23 |
| 4.2.3 Test Instruments | 23 |
| 4.2.4 Test Procedures | 23 |
| 4.2.5 Deviation from Test Standard | 23 |
| 4.2.6 EUT Operating Conditions | 23 |
| 5 Pictures of Test Arrangements | 25 |
| Annex A - Band-Edge Measurement | 26 |
| Appendix – Information of the Testing Laboratories | 27 |

Release Control Record

| Issue No. | Description | Date Issued |
|----------------------|-------------------|---------------|
| RFBDKG-WTW-P20120458 | Original release. | Jan. 22, 2021 |

1 Certificate of Conformity

Product: Wireless Mouse

Brand: Logitech

Test Model: MR0087

Sample Status: ENGINEERING SAMPLE


Applicant: LOGITECH FAR EAST LTD.

Test Date: Jan. 08 to 09, 2021

Standards: 47 CFR FCC Part 15, Subpart C (Section 15.247)
ANSI C63.10: 2013

The above equipment has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

Prepared by :


Joyce Kuo / Specialist

Date:

Jan. 22, 2021

Approved by :



Clark Lin / Technical Manager

Date:

Jan. 22, 2021

2 Summary of Test Results

| 47 CFR FCC Part 15, Subpart C (Section 15.247) | | | |
|------------------------------------------------|----------------------------------------------|--------|-----------------------------------------------------------------------------------|
| FCC Clause | Test Item | Result | Remarks |
| 15.207 | AC Power Conducted Emission | NA | Without AC power port of the EUT. |
| 15.205 / 15.209 / 15.247(d) | Radiated Emissions and Band Edge Measurement | PASS | Meet the requirement of limit. Minimum passing margin is -4.2 dB at 30.02 MHz. |
| 15.247(d) | Antenna Port Emission | NA | Refer to Note 1 below |
| 15.247(a)(2) | 6dB bandwidth | NA | Refer to Note 1 below |
| 15.247(b) | Conducted power | PASS | Meet the requirement of limit. |
| 15.247(e) | Power Spectral Density | NA | Refer to Note 1 below |
| 15.203 | Antenna Requirement | PASS | No antenna connector is used. |

Note:

1. Radiated Emissions & Band Edge Measurement and Conducted power were performed for this addendum. The others testing data refer to original test report.
2. For 2.4 GHz band compliance with rule 15.247(d) of the band-edge items, the test plots were recorded in Annex A.
3. Determining compliance based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.

2.1 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

| Measurement | Frequency | Expanded Uncertainty (k=2) (\pm) |
|--------------------------------|---------------|--------------------------------------|
| Conducted emissions | - | 2.5 dB |
| Radiated Emissions up to 1 GHz | 9kHz ~ 30MHz | 3.1 dB |
| | 30MHz ~ 1GHz | 5.5 dB |
| Radiated Emissions above 1 GHz | 1GHz ~ 18GHz | 5.1 dB |
| | 18GHz ~ 40GHz | 5.3 dB |

2.2 Modification Record

There were no modifications required for compliance.

3 General Information

3.1 General Description of EUT (GFSK)

| | |
|-----------------------|---------------------|
| Product | Wireless Mouse |
| Brand | Logitech |
| Test Model | MR0087 |
| Status of EUT | ENGINEERING SAMPLE |
| Power Supply Rating | 1.5Vdc from battery |
| Modulation Type | GFSK |
| Modulation Technology | DTS |
| Transfer Rate | Up to 2Mbps |
| Operating Frequency | 2405 ~ 2474MHz |
| Number of Channel | 10 |
| Output Power | 0.7998mW |
| Antenna Type | Refer to Note |
| Antenna Connector | Refer to Note |
| Accessory Device | NA |
| Data Cable Supplied | NA |

Note:

1. This report is prepared for FCC class II change. The difference compared with the Report No.: RF200619E02 as the following:
 - ◆ Added the enclosure, but hardware is the same.
2. According to above conditions, only Radiated Emissions & Band Edge Measurement and Conducted power test items need to be performed. And all data was verified to meet the requirements.
3. The EUT may have a lot of colors for marketing requirement.
4. The antenna provided to the EUT, please refer to the following table:

| Antenna Gain (dBi) | Frequency range(GHz) | Antenna Type | Connector Type |
|--------------------|----------------------|-----------------|----------------|
| 5 | 2.4~2.4835 | Printed Antenna | None |

5. The above EUT information is declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or user's manual.
6. The above antenna information is declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications, the laboratory shall not be held responsible.

3.2 Description of Test Modes

10 channels are provided to this EUT:

| Channel | Frequency | Channel | Frequency |
|---------|-----------|---------|-----------|
| 1 | 2405MHz | 6 | 2450MHz |
| 2 | 2408MHz | 7 | 2455MHz |
| 3 | 2419MHz | 8 | 2461MHz |
| 4 | 2428MHz | 9 | 2469MHz |
| 5 | 2444MHz | 10 | 2474MHz |

3.2.1 Test Mode Applicability and Tested Channel Detail

| EUT CONFIGURE MODE | APPLICABLE TO | | | | DESCRIPTION |
|--------------------|---------------|-------|-----|------|-------------|
| | RE \geq 1G | RE<1G | PLC | APCM | |
| - | √ | √ | - | √ | - |

Where **RE \geq 1G**: Radiated Emission above 1GHz & Bandedge Measurement
RE<1G: Radiated Emission below 1GHz
PLC: Power Line Conducted Emission
APCM: Antenna Port Conducted Measurement

NOTE: No need to concern of Conducted Emission due to the EUT is powered by battery.

Radiated Emission Test (Above 1GHz):

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

| AVAILABLE CHANNEL | TESTED CHANNEL | MODULATION TYPE |
|-------------------|----------------|-----------------|
| 1 to 10 | 1, 5, 10 | GFSK |

Radiated Emission Test (Below 1GHz):

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

| AVAILABLE CHANNEL | TESTED CHANNEL | MODULATION TYPE |
|-------------------|----------------|-----------------|
| 1 to 10 | 10 | GFSK |

Antenna Port Conducted Measurement:

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.


| AVAILABLE CHANNEL | TESTED CHANNEL | MODULATION TYPE |
|-------------------|----------------|-----------------|
| 1 to 10 | 1, 5, 10 | GFSK |

Test Condition:

| APPLICABLE TO | ENVIRONMENTAL CONDITIONS | INPUT POWER | TESTED BY |
|---------------|--------------------------|-------------|--------------|
| RE \geq 1G | 24deg. C, 69%RH | 1.5Vdc | Sampson Chen |
| RE<1G | 25deg. C, 65%RH | 1.5Vdc | Sampson Chen |
| APCM | 25deg. C, 65%RH | 1.5Vdc | Jyunchun Lin |

3.3 Duty Cycle of Test Signal

Duty cycle = 0.32 ms / 8.018 ms = 0.04

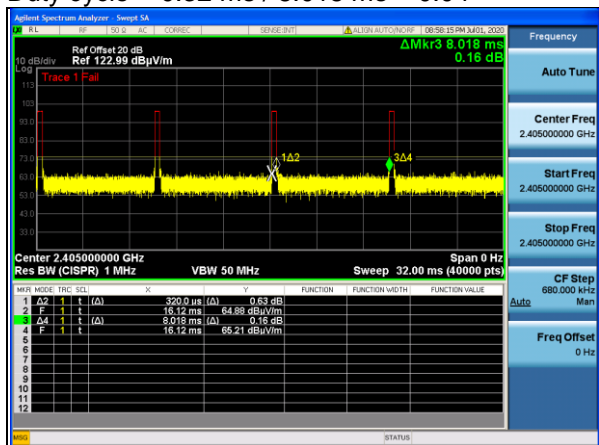


3.4 Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

| ID | Product | Brand | Model No. | Serial No. | FCC ID | Remarks |
|----|---------|----------|-----------|------------|--------|-----------------|
| A. | Battery | Duracell | AA | NA | NA | Provided by Lab |

3.4.1 Configuration of System under Test

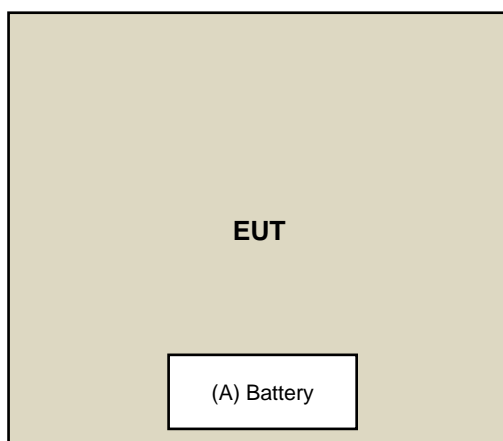

3.5 General Description of Applied Standards and References

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards and references:

Test Standard:

FCC Part 15, Subpart C (15.247)

ANSI C63.10-2013

All test items have been performed and recorded as per the above standards.

References Test Guidance:

KDB 558074 D01 15.247 Meas Guidance v05r02

All test items have been performed as a reference to the above KDB test guidance.

4 Test Types and Results

4.1 Radiated Emission and Bandedge Measurement

4.1.1 Limits of Radiated Emission and Bandedge Measurement

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table. Other emissions shall be at least 20dB below the highest level of the desired power:

| Frequencies (MHz) | Field Strength (microvolts/meter) | Measurement Distance (meters) |
|-------------------|-----------------------------------|-------------------------------|
| 0.009 ~ 0.490 | 2400/F(kHz) | 300 |
| 0.490 ~ 1.705 | 24000/F(kHz) | 30 |
| 1.705 ~ 30.0 | 30 | 30 |
| 30 ~ 88 | 100 | 3 |
| 88 ~ 216 | 150 | 3 |
| 216 ~ 960 | 200 | 3 |
| Above 960 | 500 | 3 |

Note:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. For frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

4.1.2 Test Instruments

For Radiated emission & BandEdge test:

| DESCRIPTION & MANUFACTURER | MODEL NO. | SERIAL NO. | CALIBRATED DATE | CALIBRATED UNTIL |
|-----------------------------------------------------|----------------------|-------------|-----------------|------------------|
| Test Receiver Agilent | N9038A | MY51210202 | Dec. 01, 2020 | Nov. 30, 2021 |
| Pre-Amplifier EMCI | EMC001340 | 980142 | May 25, 2020 | May 24, 2021 |
| Loop Antenna Electro-Metrics | EM-6879 | 264 | Feb. 18, 2020 | Feb. 17, 2021 |
| RF Cable | NA | LOOPCAB-001 | Jan. 07, 2021 | Jan. 06, 2022 |
| RF Cable | NA | LOOPCAB-002 | Jan. 07, 2021 | Jan. 06, 2022 |
| Pre-Amplifier Mini-Circuits | ZFL-1000VH2B | AMP-ZFL-05 | Apr. 28, 2020 | Apr. 27, 2021 |
| Trilog Broadband Antenna SCHWARZBECK | VULB 9168 | 9168-406 | Nov. 06, 2020 | Nov. 05, 2021 |
| RF Cable | 8D | 966-6-1 | Apr. 04, 2020 | Apr. 03, 2021 |
| RF Cable | 8D | 966-4-2 | Mar. 18, 2020 | Mar. 17, 2021 |
| RF Cable | 8D | 966-4-3 | Mar. 18, 2020 | Mar. 17, 2021 |
| Fixed attenuator Mini-Circuits | UNAT-5+ | PAD-ATT5-03 | Jan. 14, 2020 | Jan. 13, 2021 |
| Horn_Antenna SCHWARZBECK | BBHA 9120D | 9120D-783 | Nov. 22, 2020 | Nov. 21, 2021 |
| Pre-Amplifier EMCI | EMC 12630 SE | 980638 | Apr. 08, 2020 | Apr. 07, 2021 |
| RF Cable | EMC104-SM-SM-1200 | 160922 | Dec. 25, 2020 | Dec. 24, 2021 |
| RF Cable | EMC104-SM-SM-2000 | 180502 | Apr. 29, 2020 | Apr. 28, 2021 |
| RF Cable | EMC104-SM-SM-6000 | 180418 | Apr. 29, 2020 | Apr. 28, 2021 |
| Pre-Amplifier EMCI | EMC184045SE | 980387 | Jan. 15, 2020 | Jan. 14, 2021 |
| Horn_Antenna SCHWARZBECK | BBHA 9170 | BBHA9170519 | Nov. 22, 2020 | Nov. 21, 2021 |
| RF Cable | EMC102-KM-KM-1200 | 160924 | Jan. 15, 2020 | Jan. 14, 2021 |
| RF Cable | EMC-KM-KM-4000 | 200214 | Mar. 11, 2020 | Mar. 10, 2021 |
| Software | ADT_Radiated_V8.7.08 | NA | NA | NA |
| Boresight Antenna Tower & Turn Table Max-Full | MF-7802BS | MF780208530 | NA | NA |

Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in 966 Chamber No. 4.
3. Tested Date: Jan. 08 to 09, 2021

For other test items:

| DESCRIPTION & MANUFACTURER | MODEL NO. | SERIAL NO. | CALIBRATED DATE | CALIBRATED UNTIL |
|-----------------------------------|----------------------------------|---------------|-----------------|------------------|
| Spectrum Analyzer R&S | FSV40 | 100964 | May 29, 2020 | May 28, 2021 |
| Power meter Anritsu | ML2495A | 1529002 | July 22, 2020 | July 21, 2021 |
| Power sensor Anritsu | MA2411B | 1339443 | July 22, 2020 | July 21, 2021 |
| Fixed Attenuator Mini-Circuits | MDCS18N-10 | MDCS18N-10-01 | Apr. 14, 2020 | Apr. 13, 2021 |
| Software | ADT_RF Test Software V6.6.5.4 | NA | NA | NA |

- NOTE:**
1. The test was performed in Oven room 2.
 2. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
 3. Tested Date: Jan. 09, 2021

4.1.3 Test Procedures

For Radiated emission below 30MHz

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter chamber room. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. Parallel, perpendicular, and ground-parallel orientations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Quasi-Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

Note:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 9kHz at frequency below 30MHz.

For Radiated emission above 30MHz

- a. The EUT was placed on the top of a rotating table 0.8 meters (for 30MHz ~ 1GHz) / 1.5 meters (for above 1GHz) above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- f. The test-receiver system was set to peak and average detects function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.

Note:


1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Average detection (AV) at frequency above 1GHz.
4. All modes of operation were investigated and the worst-case emissions are reported.

4.1.4 Deviation from Test Standard


No deviation.

4.1.5 Test Setup


For Radiated emission below 30MHz

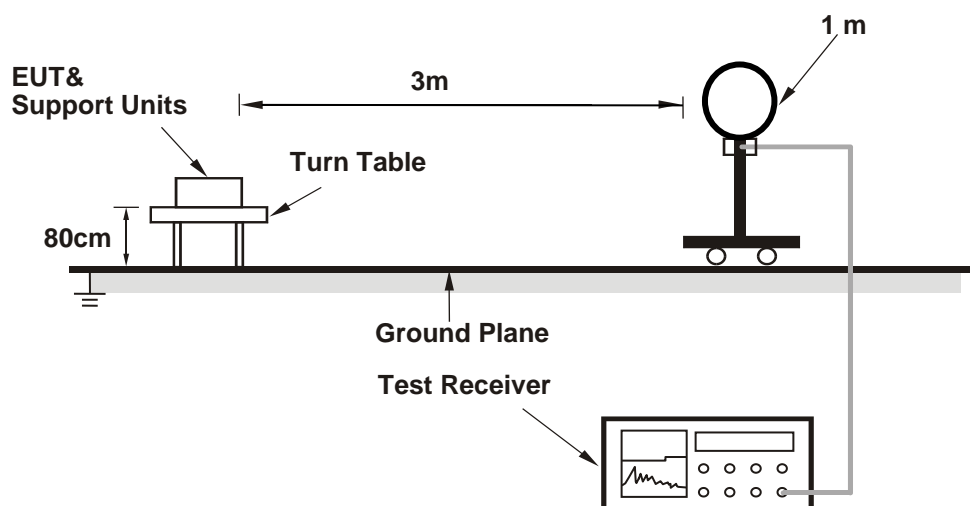

For Radiated emission 30MHz to 1GHz

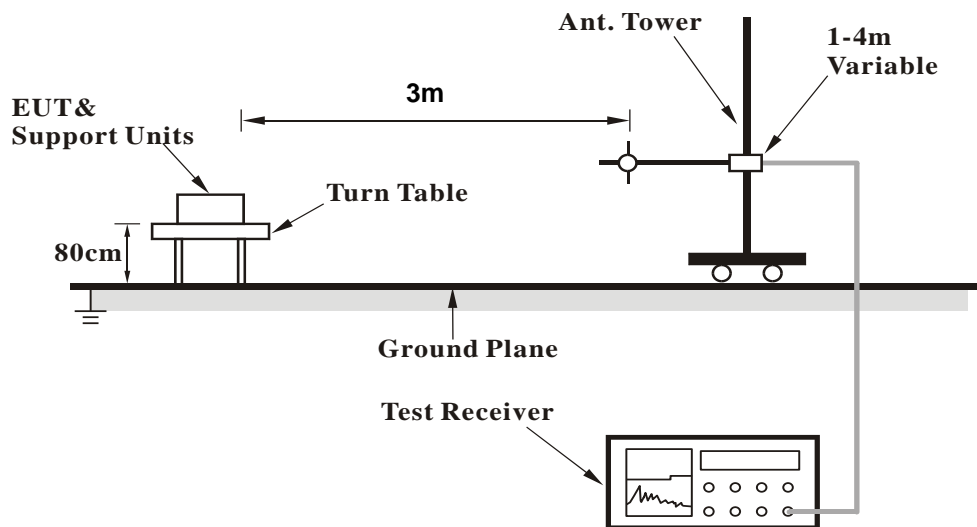

For Radiated emission above 1GHz

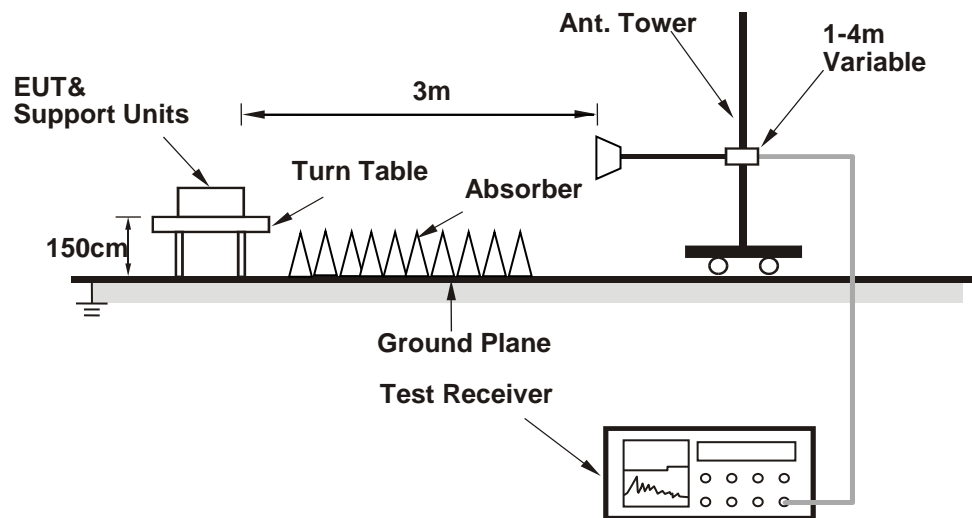

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.1.6 EUT Operating Conditions

- a. Placed the EUT on the testing table.
- b. Controlling software (RF sample click button) has been activated to set the EUT under transmission condition continuously at specific channel frequency.

4.1.7 Test Results

Above 1GHz Data:

| | | | |
|------------------------|--------------|--------------------------|---------------------------|
| RF Mode | TX GFSK | Channel | CH 1 : 2405 MHz |
| Frequency Range | 1GHz ~ 25GHz | Detector Function | Peak (PK) Average (AV) |

| Antenna Polarity & Test Distance : Horizontal at 3 m | | | | | | | | |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 2372.30 | 54.9 PK | 74.0 | -19.1 | 1.03 H | 95 | 59.3 | -4.4 |
| 2 | 2372.30 | 44.5 AV | 54.0 | -9.5 | 1.03 H | 95 | 48.9 | -4.4 |
| 3 | *2405.00 | 98.8 PK | | | 1.03 H | 95 | 103.2 | -4.4 |
| 4 | *2405.00 | 70.8 AV | | | 1.03 H | 95 | 75.2 | -4.4 |
| 5 | 4810.00 | 57.1 PK | 74.0 | -16.9 | 1.34 H | 157 | 57.1 | 0.0 |
| 6 | 4810.00 | 29.1 AV | 54.0 | -24.9 | 1.34 H | 157 | 29.1 | 0.0 |
| Antenna Polarity & Test Distance : Vertical at 3 m | | | | | | | | |
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 2371.70 | 54.4 PK | 74.0 | -19.6 | 3.78 V | 331 | 58.8 | -4.4 |
| 2 | 2371.70 | 43.9 AV | 54.0 | -10.1 | 3.78 V | 331 | 48.3 | -4.4 |
| 3 | *2405.00 | 86.1 PK | | | 3.78 V | 331 | 90.5 | -4.4 |
| 4 | *2405.00 | 58.1 AV | | | 3.78 V | 331 | 62.5 | -4.4 |
| 5 | 4810.00 | 56.5 PK | 74.0 | -17.5 | 1.21 V | 318 | 56.5 | 0.0 |
| 6 | 4810.00 | 28.5 AV | 54.0 | -25.5 | 1.21 V | 318 | 28.5 | 0.0 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.
6. The average value of fundamental and harmonic frequency is: Average = Peak value + 20 log(Duty cycle) Where the duty factor is calculated from following formula:

$$20 \log(\text{Duty cycle}) = 20 \log(0.32 \text{ ms} / 8.018 \text{ ms}) = -28.0 \text{ dB}$$
 Please see page 9 for plotted duty.

| | | | |
|-----------------|--------------|-------------------|---------------------------|
| RF Mode | TX GFSK | Channel | CH 5 : 2444 MHz |
| Frequency Range | 1GHz ~ 25GHz | Detector Function | Peak (PK) Average (AV) |

| Antenna Polarity & Test Distance : Horizontal at 3 m | | | | | | | | |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | *2444.00 | 97.7 PK | | | 1.06 H | 101 | 102.1 | -4.4 |
| 2 | *2444.00 | 69.7 AV | | | 1.06 H | 101 | 74.1 | -4.4 |
| 3 | 4888.00 | 58.8 PK | 74.0 | -15.2 | 1.34 H | 159 | 58.6 | 0.2 |
| 4 | 4888.00 | 30.8 AV | 54.0 | -23.2 | 1.34 H | 159 | 30.6 | 0.2 |
| 5 | 7332.00 | 60.3 PK | 74.0 | -13.7 | 1.13 H | 298 | 53.9 | 6.4 |
| 6 | 7332.00 | 32.3 AV | 54.0 | -21.7 | 1.13 H | 298 | 25.9 | 6.4 |
| Antenna Polarity & Test Distance : Vertical at 3 m | | | | | | | | |
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | *2444.00 | 88.3 PK | | | 3.67 V | 337 | 92.7 | -4.4 |
| 2 | *2444.00 | 60.3 AV | | | 3.67 V | 337 | 64.7 | -4.4 |
| 3 | 4888.00 | 57.3 PK | 74.0 | -16.7 | 1.27 V | 343 | 57.1 | 0.2 |
| 4 | 4888.00 | 29.3 AV | 54.0 | -24.7 | 1.27 V | 343 | 29.1 | 0.2 |
| 5 | 7332.00 | 52.9 PK | 74.0 | -21.1 | 1.98 V | 187 | 46.5 | 6.4 |
| 6 | 7332.00 | 24.9 AV | 54.0 | -29.1 | 1.98 V | 187 | 18.5 | 6.4 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.
6. The average value of fundamental and harmonic frequency is: Average = Peak value + 20 log(Duty cycle) Where the duty factor is calculated from following formula:

$$20 \log(\text{Duty cycle}) = 20 \log(0.32 \text{ ms} / 8.018 \text{ ms}) = -28.0 \text{ dB}$$
 Please see page 9 for plotted duty.

| | | | |
|-----------------|--------------|-------------------|---------------------------|
| RF Mode | TX GFSK | Channel | CH 10 : 2474 MHz |
| Frequency Range | 1GHz ~ 25GHz | Detector Function | Peak (PK) Average (AV) |

| Antenna Polarity & Test Distance : Horizontal at 3 m | | | | | | | | |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | *2474.00 | 97.9 PK | | | 1.00 H | 99 | 102.3 | -4.4 |
| 2 | *2474.00 | 69.9 AV | | | 1.00 H | 99 | 74.3 | -4.4 |
| 3 | 2484.50 | 55.1 PK | 74.0 | -18.9 | 1.00 H | 99 | 59.6 | -4.5 |
| 4 | 2484.50 | 45.5 AV | 54.0 | -8.5 | 1.00 H | 99 | 50.0 | -4.5 |
| 5 | 4948.00 | 57.3 PK | 74.0 | -16.7 | 1.20 H | 173 | 56.8 | 0.5 |
| 6 | 4948.00 | 29.3 AV | 54.0 | -24.7 | 1.20 H | 173 | 28.8 | 0.5 |
| 7 | 7422.00 | 60.1 PK | 74.0 | -13.9 | 1.09 H | 316 | 53.4 | 6.7 |
| 8 | 7422.00 | 32.1 AV | 54.0 | -21.9 | 1.09 H | 316 | 25.4 | 6.7 |

| Antenna Polarity & Test Distance : Vertical at 3 m | | | | | | | | |
|----------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | *2474.00 | 87.5 PK | | | 3.55 V | 328 | 91.9 | -4.4 |
| 2 | *2474.00 | 59.5 AV | | | 3.55 V | 328 | 63.9 | -4.4 |
| 3 | 2490.00 | 54.1 PK | 74.0 | -19.9 | 3.55 V | 328 | 58.6 | -4.5 |
| 4 | 2490.00 | 44.0 AV | 54.0 | -10.0 | 3.55 V | 328 | 48.5 | -4.5 |
| 5 | 4948.00 | 57.4 PK | 74.0 | -16.6 | 1.34 V | 335 | 56.9 | 0.5 |
| 6 | 4948.00 | 29.4 AV | 54.0 | -24.6 | 1.34 V | 335 | 28.9 | 0.5 |
| 7 | 7422.00 | 53.7 PK | 74.0 | -20.3 | 2.34 V | 162 | 47.0 | 6.7 |
| 8 | 7422.00 | 25.7 AV | 54.0 | -28.3 | 2.34 V | 162 | 19.0 | 6.7 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.
6. The average value of fundamental and harmonic frequency is: Average = Peak value + 20 log(Duty cycle) Where the duty factor is calculated from following formula:

$$20 \log(\text{Duty cycle}) = 20 \log(0.32 \text{ ms} / 8.018 \text{ ms}) = -28.0 \text{ dB}$$
 Please see page 9 for plotted duty.


Below 1GHz Data:

| | | | |
|-----------------|-------------|-------------------|------------------|
| RF Mode | TX GFSK | Channel | CH 10 : 2474 MHz |
| Frequency Range | 9kHz ~ 1GHz | Detector Function | Quasi-Peak (QP) |

| Antenna Polarity & Test Distance : Horizontal at 3 m | | | | | | | | |
|------------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 30.27 | 24.5 QP | 40.0 | -15.5 | 2.00 H | 225 | 34.6 | -10.1 |
| 2 | 73.80 | 21.0 QP | 40.0 | -19.0 | 1.00 H | 175 | 33.2 | -12.2 |
| 3 | 98.09 | 26.3 QP | 43.5 | -17.2 | 1.00 H | 146 | 39.7 | -13.4 |
| 4 | 157.53 | 19.1 QP | 43.5 | -24.4 | 1.00 H | 104 | 27.6 | -8.5 |
| 5 | 349.95 | 22.9 QP | 46.0 | -23.1 | 1.50 H | 0 | 29.9 | -7.0 |
| 6 | 759.61 | 27.7 QP | 46.0 | -18.3 | 2.00 H | 96 | 26.0 | 1.7 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30MHz~1000MHz.
5. The emission levels were very low against the limit of frequency range 9kHz~30MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

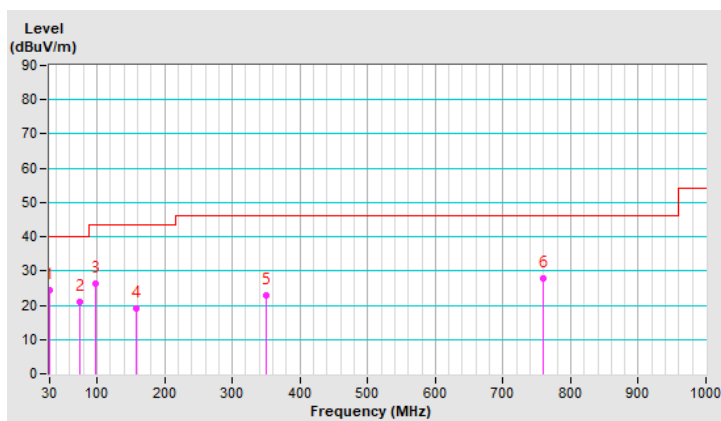


| | | | |
|-----------------|-------------|-------------------|------------------|
| RF Mode | TX GFSK | Channel | CH 10 : 2474 MHz |
| Frequency Range | 9kHz ~ 1GHz | Detector Function | Quasi-Peak (QP) |

| Antenna Polarity & Test Distance : Vertical at 3 m | | | | | | | | |
|----------------------------------------------------|-----------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 30.02 | 35.8 QP | 40.0 | -4.2 | 1.00 V | 19 | 45.9 | -10.1 |
| 2 | 97.92 | 33.7 QP | 43.5 | -9.8 | 1.50 V | 72 | 47.1 | -13.4 |
| 3 | 141.65 | 24.6 QP | 43.5 | -18.9 | 1.00 V | 155 | 33.4 | -8.8 |
| 4 | 400.95 | 24.8 QP | 46.0 | -21.2 | 2.50 V | 84 | 30.5 | -5.7 |
| 5 | 593.04 | 28.9 QP | 46.0 | -17.1 | 1.50 V | 178 | 30.0 | -1.1 |
| 6 | 881.59 | 33.8 QP | 46.0 | -12.2 | 2.50 V | 49 | 30.3 | 3.5 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30MHz~1000MHz.
5. The emission levels were very low against the limit of frequency range 9kHz~30MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

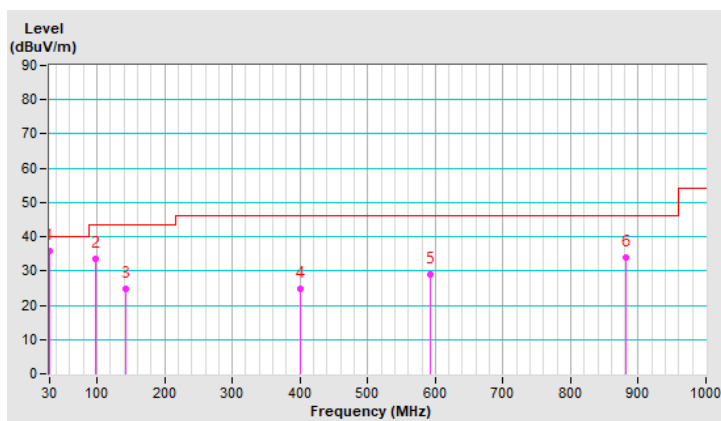


4.2 Conducted Output Power Measurement

4.2.1 Limits of Conducted Output Power Measurement

For systems using digital modulation in the 2400–2483.5 MHz bands: 1 Watt (30dBm)

4.2.2 Test Setup

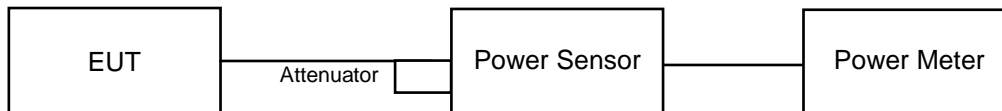

4.2.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.2.4 Test Procedures

A peak power sensor was used on the output port of the EUT. A power meter was used to read the response of the peak power sensor. Record the power level.

Average power sensor was used to perform output power measurement, trigger and gating function of wide band power meter is enabled to measure max output power of TX on burst. Duty factor is not added to measured value.

4.2.5 Deviation from Test Standard

No deviation.

4.2.6 EUT Operating Conditions

Same as Item 4.1.6.

4.2.7 Test Results

FOR PEAK POWER

| Channel | Frequency (MHz) | Peak Power (mW) | Peak Power (dBm) | Limit (dBm) | Pass/Fail |
|---------|-----------------|-----------------|------------------|-------------|-----------|
| 1 | 2405 | 0.7603 | -1.19 | 30 | Pass |
| 5 | 2444 | 0.7621 | -1.18 | 30 | Pass |
| 10 | 2474 | 0.7998 | -0.97 | 30 | Pass |


FOR AVERAGE POWER

| Channel | Frequency (MHz) | Average Power (mW) | Average Power (dBm) |
|---------|-----------------|--------------------|---------------------|
| 1 | 2405 | 0.743 | -1.29 |
| 5 | 2444 | 0.7413 | -1.30 |
| 10 | 2474 | 0.778 | -1.09 |

5 Pictures of Test Arrangements

Please refer to the attached file (Test Setup Photo).

Annex A - Band-Edge Measurement

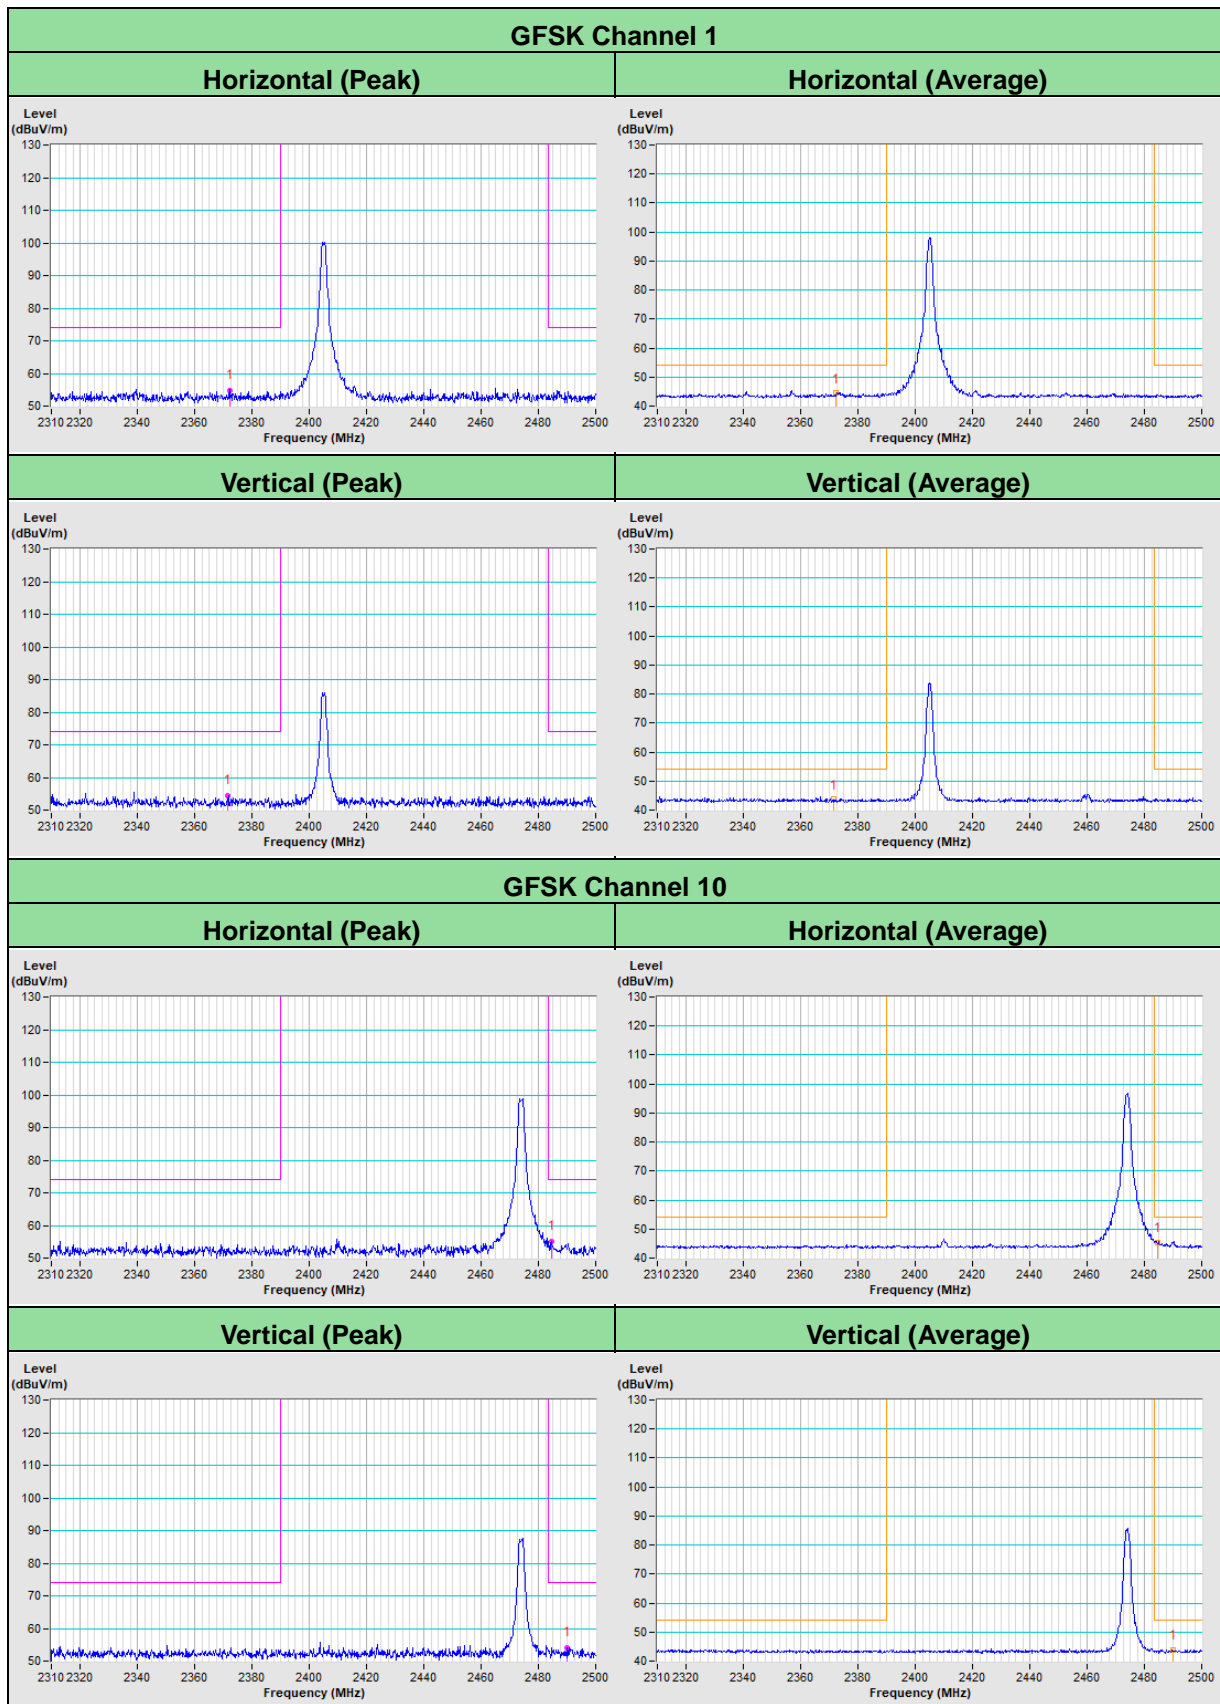

Appendix – Information of the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are FCC recognized accredited test firms and accredited according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Lin Kou EMC/RF Lab

Tel: 886-2-26052180

Fax: 886-2-26051924

Hsin Chu EMC/RF/Telecom Lab

Tel: 886-3-6668565

Fax: 886-3-6668323

Hwa Ya EMC/RF/Safety Lab

Tel: 886-3-3183232

Fax: 886-3-3270892

Email: service.adt@tw.bureauveritas.com

Web Site: www.bureauveritas-adt.com

The address and road map of all our labs can be found in our web site also.

--- END ---