



TEST REPORT

No. I14N00112-EMC

for

Yulong Computer Telecommunication Scientific (Shenzhen) Co., Ltd

GSM/WCDMA mobile phone

Model Name: Vodafone 888

Marketing Name: /

FCC ID: R38YLVODAFONE888

with

Hardware Version: T3

Software Version: 4.4.212.00.T3.140317

Issued Date: 2014-03-21

Test Laboratory:

FCC 2.948 Listed: No.310359

IC O.A.T.S listed: No.6629C-1

Note:

The test results in this test report relate only to the devices specified in this report. This report shall not be reproduced except in full without the written approval of TMC Beijing.

TMC Beijing, Telecommunication Metrology Center of Ministry of Industry and Information Technology

No. 52, Huayuan Bei Road, Haidian District, Beijing, P. R. China 100191

Tel:+86(0)10-62304633-2678 , Fax:+86(0)10-62304633-2504 Email:welcome@emcite.com. www.emcite.com

CONTENTS

| | |
|---|-----------|
| 1. TEST LABORATORY | 3 |
| 1.1. TESTING LOCATION | 3 |
| 1.2. TESTING ENVIRONMENT | 3 |
| 1.3. PROJECT DATA | 3 |
| 1.4. SIGNATURE | 3 |
| 2. CLIENT INFORMATION | 4 |
| 2.1. APPLICANT INFORMATION | 4 |
| 2.2. MANUFACTURER INFORMATION | 4 |
| 3. EQUIPMENT UNDER TEST (EUT) AND ANCILLARY EQUIPMENT (AE) | 5 |
| 3.1. ABOUT EUT | 5 |
| 3.2. INTERNAL IDENTIFICATION OF EUT USED DURING THE TEST | 5 |
| 3.3. INTERNAL IDENTIFICATION OF AE USED DURING THE TEST | 5 |
| 3.4. EUT SET-UPS | 6 |
| 4. REFERENCE DOCUMENTS | 7 |
| 4.1. REFERENCE DOCUMENTS FOR TESTING | 7 |
| 5. LABORATORY ENVIRONMENT | 8 |
| 6. SUMMARY OF TEST RESULTS | 9 |
| 7. TEST EQUIPMENTS UTILIZED | 10 |
| ANNEX A: MEASUREMENT RESULTS..... | 11 |

1. Test Laboratory**1.1. Testing Location**


Company Name: TMC Shenzhen, Telecommunication Metrology Center of MIIT
Address: No. 12 Building, Shangsha Innovation and Technology Park, Futian District
Postal Code: 518048
Telephone: +86(0)755-33322000
Fax: +86(0)755-33322001

1.2. Testing Environment

Normal Temperature: 15-35℃
Relative Humidity: 20-75%


1.3. Project data

Testing Start Date: 2014-01-12
Testing End Date: 2014-03-18

1.4. Signature


Du Zhaoxuan

(Prepared this test report)



Zhang Bojun

(Reviewed this test report)



Lu Minniu

Director of the laboratory
(Approved this test report)

2. Client Information

2.1. Applicant Information

Company Name: Yulong Computer Telecommunication Scientific (Shenzhen) Co., Ltd
Address /Post: Coolpad Information Harbor, 2nd Mengxi Road, Northern Part of
Science&Technology Park, Nanshan, Shenzhen, China
Contact: Gangsheng Yang
Email: yang.yang@yulong.com

2.2. Manufacturer Information

Company Name: Yulong Computer Telecommunication Scientific (Shenzhen) Co., Ltd
Address /Post: Hi-Tech Industry Park(North),Nanshan District,Shenzhen
City,Guangdong Province,P.R.C
Contact: Zou alin
Email: zoualin@yulong.com

3. Equipment Under Test (EUT) and Ancillary Equipment (AE)**3.1. About EUT**

| | |
|----------------|------------------------|
| Description | GSM/WCDMA mobile phone |
| Model Name | Vodafone 888 |
| Marketing Name | / |
| FCC ID | R38YLVODAFONE888 |

3.2. Internal Identification of EUT used during the test

| EUT ID* | SN or IMEI | HW Version | SW Version |
|---------|------------|------------|----------------------|
| EUT1 | / | T3 | 4.4.212.00.T3.140317 |

*EUT ID: is used to identify the test sample in the lab internally.

The hardware of Vodafone 888N and Vodafone 888 are the same. The only difference between these two models is that Vodafone 888N has NFC module but Vodafone 888 removes it. The test bases on the model Vodafone 888N.

3.3. Internal Identification of AE used during the test

| AE ID* | Description | SN |
|--------|----------------|----|
| AE1 | Battery | / |
| AE2 | Travel charger | / |
| AE3 | USB cable | / |

AE1

| | |
|-----------------|----------------------------------|
| Model | CPLD-315 |
| Manufacturer | ZHUHAI Coslight battery CO.,LTD. |
| Capacitance | 1880mAh |
| Nominal Voltage | 3.7V |

AE2-1

| | |
|-------------------|-----------------------------------|
| Model | CYSK05-050100A-CE |
| Manufacturer | JIANGSU CHENYANG ELECTRON CO.,LTD |
| Length of DC line | 117cm |

AE2-2

| | |
|-------------------|-----------------------------------|
| Model | CYSK05-050100A-UK |
| Manufacturer | JIANGSU CHENYANG ELECTRON CO.,LTD |
| Length of DC line | 117cm |

AE3

| | |
|-----------------|-------|
| Model | / |
| Manufacturer | / |
| Length of cable | 117cm |

*AE ID: is used to identify the test sample in the lab internally.

3.4. EUT set-ups

| EUT set-up No. | Combination of EUT and AE | Remarks |
|-----------------------|----------------------------------|----------------|
| Set.1 | EUT1+ AE1 + AE2-1 | Charging mode |
| Set.2 | EUT1+ AE1 + AE2-2 | Charging mode |
| Set.3 | EUT1+ AE1 + AE3 | USB mode |

4. Reference Documents

4.1. Reference Documents for testing

The following documents listed in this section are referred for testing.

| Reference | Title | Version |
|------------------------|--|----------------------|
| FCC Part 15, Subpart B | Radio frequency devices | 10-1-2013 Edition |
| ANSI C63.4 | Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz | 2003 |

5. LABORATORY ENVIRONMENT

Semi-anechoic chamber (11.20 meters×6.10meters×5.60meters) did not exceed following limits along the EMC testing:

| | |
|-----------------------------------|--|
| Temperature | Min. = 15 °C, Max. = 30 °C |
| Relative humidity | Min. = 35 %, Max. = 60 % |
| Shielding effectiveness | > 110 dB |
| Electrical insulation | > 2MΩ |
| Ground system resistance | < 0.5 Ω |
| Normalised site attenuation (NSA) | < ±3.5 dB, 3 m distance, from 30 to 1000 MHz |
| Uniformity of field strength | Between 0 and 6 dB, from 80 to 3000 MHz |

Control room did not exceed following limits along the EMC testing:

| | |
|--------------------------|----------------------------|
| Temperature | Min. = 15 °C, Max. = 35 °C |
| Relative humidity | Min. =20 %, Max. = 80 % |
| Shielding effectiveness | > 110 dB |
| Electrical insulation | > 2MΩ |
| Ground system resistance | < 0.5 Ω |

Conducted chamber did not exceed following limits along the EMC testing:

| | |
|--------------------------|----------------------------|
| Temperature | Min. = 15 °C, Max. = 30 °C |
| Relative humidity | Min. =35 %, Max. = 60 % |
| Shielding effectiveness | > 110 dB |
| Electrical insulation | > 2MΩ |
| Ground system resistance | < 0.5 Ω |

Fully-anechoic chamber (11.20 meters×6.10 meters×6.60 meters) did not exceed following limits along the EMC testing:

| | |
|------------------------------------|---------------------------------------|
| Temperature | Min. = 15 °C, Max. = 30 °C |
| Relative humidity | Min. = 35 %, Max. = 60 % |
| Shielding effectiveness | > 110 dB |
| Electrical insulation | > 2MΩ |
| Ground system resistance | < 0.5 Ω |
| Voltage Standing Wave Ratio (VSWR) | ≤ 6 dB, from 1 to 6 GHz, 3 m distance |

6. SUMMARY OF TEST RESULTS

| | |
|---|----------------|
| Abbreviations used in this clause: | |
| P | Pass |
| NA | Not applicable |
| F | Fail |

| Items | Test Name | Clause in FCC rules | Section in this report | Verdict |
|-------|--------------------|---------------------|------------------------|---------|
| 1 | Radiated Emission | 15.109(a) | A.1 | P |
| 2 | Conducted Emission | 15.107(a) | A.2 | P |

7. Test Equipments Utilized

| NO. | Description | TYPE | SERIES NUMBER | MANUFACTURE | CAL DUE DATE | CAL PERIOD |
|-----|--|----------|------------------|--------------|-----------------|---------------|
| 1 | Test Receiver | ESCI | 100701 | R&S | 2014.07.31 | 1 year |
| 2 | Test Receiver | ESCI | 100702 | R&S | 2014.07.31 | 1 year |
| 3 | Test Receiver | FSP 40 | 100378 | R&S | 2014.12.20 | 1 year |
| 4 | BiLog Antenna | VULB9163 | 9163 329 | Schwarzbeck | 2017.01.20 | 3 years |
| 5 | LISN | ESH2-Z5 | 100196 | R&S | 2015.01.14 | 1 year |
| 6 | Dual-Ridge Waveguide Horn Antenna | 3117 | 00066577 | ETS-Lindgren | 2016.04.01 | 3 years |
| 7 | Universal Radio Communication Tester | E5515C | GB44051324 | Agilent | 2014.05.21 | 1 year |

ANNEX A: MEASUREMENT RESULTS

A.1 Radiated Emission (§15.109(a))

Reference

FCC: CFR Part 15.109(a)

A.1.1 Method of measurement

The field strength of radiated emissions from the unintentional radiator (USB mode of MS and charging mode of MS) at a distance of 3 meters is tested. Tested in accordance with the procedures of ANSI C63.4 - 2003, section 8.3.

The EUT was placed on a non-conductive table. The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and the EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. This maximization process was repeated with the EUT positioned in each of its three orthogonal orientations.

A.1.2 EUT Operating Mode:

The MS is operating in the USB mode and charging mode. During the test MS is connected to a PC via a USB cable in the case of USB mode and is connected to a charger in the case of charging mode. The model of the PC is Lenovo Thinkcentre M4099t, and the serial number of the PC is SA08850737. The software is used to let the PC keep on copying data to MS, reading and erasing the data after copy action was finished.

A.1.3 Measurement Limit

Limit from CFR Part 15.109(a)

| Frequency range (MHz) | Field strength limit ($\mu\text{V}/\text{m}$) | | |
|--------------------------|---|---------|------|
| | Quasi-peak | Average | Peak |
| 30-88 | 100 | | |
| 88-216 | 150 | | |
| 216-960 | 200 | | |
| 960-1000 | 500 | | |
| >1000 | | 500 | 5000 |

*Note: The original limit is defined at 10m test distance. This limit is calculated according to CISPR requirements.

A.1.4 Test Condition

| Frequency of emission (MHz) | RBW/VBW | Sweep Time(s) |
|-----------------------------|-----------------------|---------------|
| 30-1000 | 120kHz (IF bandwidth) | 5 |
| Above 1000 | 1MHz/1MHz | 15 |

A.1.5 Measurement Results

A "reference path loss" is established and the A_{Rpl} is the attenuation of "reference path loss". It includes the antenna factor of receive antenna and the path loss.

The measurement results are obtained as described below:

$$\text{Result} = P_{\text{Mea}} + A_{\text{Rpl}} = P_{\text{Mea}} + G_A + G_{\text{PL}}$$

Where

G_A : Antenna factor of receive antenna

G_{PL} : Path Loss

P_{Mea} : Measurement result on receiver.

Note: the result contains vertical part and Horizontal part

Set.1 Charging mode / Peak detector

| Frequency(MHz) | Result(dBuV/m) | Polarity | A_{Rpl} (dB) | Margin(dB) | Limit (dB μ V/m) |
|----------------|----------------|----------|-----------------------|------------|----------------------|
| 16776.000000 | 59.4 | H | 14.3 | 14.6 | 74.0 |
| 16807.000000 | 59.3 | H | 14.3 | 14.7 | 74.0 |
| 17363.000000 | 59.3 | V | 14.5 | 14.7 | 74.0 |
| 17282.000000 | 59.2 | V | 14.3 | 14.8 | 74.0 |
| 17768.000000 | 59.1 | H | 14.5 | 14.9 | 74.0 |
| 16712.000000 | 59.1 | H | 14.2 | 14.9 | 74.0 |

Set.1 Charging mode / Average detector

| Frequency(MHz) | Result(dBuV/m) | Polarity | A_{Rpl} (dB) | Margin(dB) | Limit (dB μ V/m) |
|----------------|----------------|----------|-----------------------|------------|----------------------|
| 16728.000000 | 47.7 | V | 14.3 | 6.3 | 54.0 |
| 15774.000000 | 47.0 | H | 13.3 | 7.0 | 54.0 |
| 13602.000000 | 43.5 | V | 11.4 | 10.5 | 54.0 |
| 10528.000000 | 39.7 | V | 10.1 | 14.3 | 54.0 |
| 8087.250000 | 37.8 | V | 7.5 | 16.2 | 54.0 |
| 2356.500000 | 36.9 | V | 1.7 | 17.1 | 54.0 |

Set.2 Charging mode / Peak detector

| Frequency(MHz) | Result(dBuV/m) | Polarity | A _{Rpl} (dB) | Margin(dB) | Limit (dBμV/m) |
|----------------|----------------|----------|-----------------------|------------|----------------|
| 16832.000000 | 58.7 | V | 14.3 | 15.3 | 74.0 |
| 16227.000000 | 58.5 | V | 13.7 | 15.5 | 74.0 |
| 16246.000000 | 58.5 | H | 13.7 | 15.5 | 74.0 |
| 16812.000000 | 58.4 | H | 14.3 | 15.6 | 74.0 |
| 16330.000000 | 58.3 | V | 13.9 | 15.7 | 74.0 |
| 15706.000000 | 58.1 | V | 13.2 | 15.9 | 74.0 |

Set.2 Charging mode / Average detector

| Frequency(MHz) | Result(dBuV/m) | Polarity | A _{Rpl} (dB) | Margin(dB) | Limit (dBμV/m) |
|----------------|----------------|----------|-----------------------|------------|----------------|
| 16723.000000 | 46.8 | V | 14.2 | 7.2 | 54.0 |
| 17388.000000 | 46.6 | V | 14.5 | 7.4 | 54.0 |
| 15771.000000 | 46.5 | V | 13.3 | 7.5 | 54.0 |
| 13643.000000 | 43.1 | V | 11.5 | 10.9 | 54.0 |
| 10519.000000 | 39.8 | H | 10.1 | 14.2 | 54.0 |
| 8079.375000 | 37.6 | V | 7.5 | 16.4 | 54.0 |

Set.3 USB mode / Peak detector

| Frequency(MHz) | Result(dBuV/m) | Polarity | A _{Rpl} (dB) | Margin(dB) | Limit (dBμV/m) |
|----------------|----------------|----------|-----------------------|------------|----------------|
| 16657.000000 | 59.9 | H | 14.2 | 14.1 | 74.0 |
| 16731.000000 | 59.6 | V | 14.3 | 14.4 | 74.0 |
| 16723.000000 | 59.4 | V | 14.2 | 14.6 | 74.0 |
| 16715.000000 | 59.4 | H | 14.2 | 14.6 | 74.0 |
| 16760.000000 | 59.2 | V | 14.3 | 14.8 | 74.0 |
| 16241.000000 | 58.9 | H | 13.7 | 15.1 | 74.0 |

Set.3 USB mode / Average detector

| Frequency(MHz) | Result(dBuV/m) | Polarity | A _{Rpl} (dB) | Margin(dB) | Limit (dBμV/m) |
|----------------|----------------|----------|-----------------------|------------|----------------|
| 16742.000000 | 47.6 | H | 14.3 | 6.4 | 54.0 |
| 15687.000000 | 47.0 | H | 13.1 | 7.0 | 54.0 |
| 13666.000000 | 43.4 | H | 11.5 | 10.6 | 54.0 |
| 1500.000000 | 42.5 | V | -3.4 | 11.5 | 54.0 |
| 6000.375000 | 40.8 | V | 7.2 | 13.2 | 54.0 |
| 10521.000000 | 39.7 | V | 10.1 | 14.3 | 54.0 |

FCC-RE1-Part 15-30M-1G

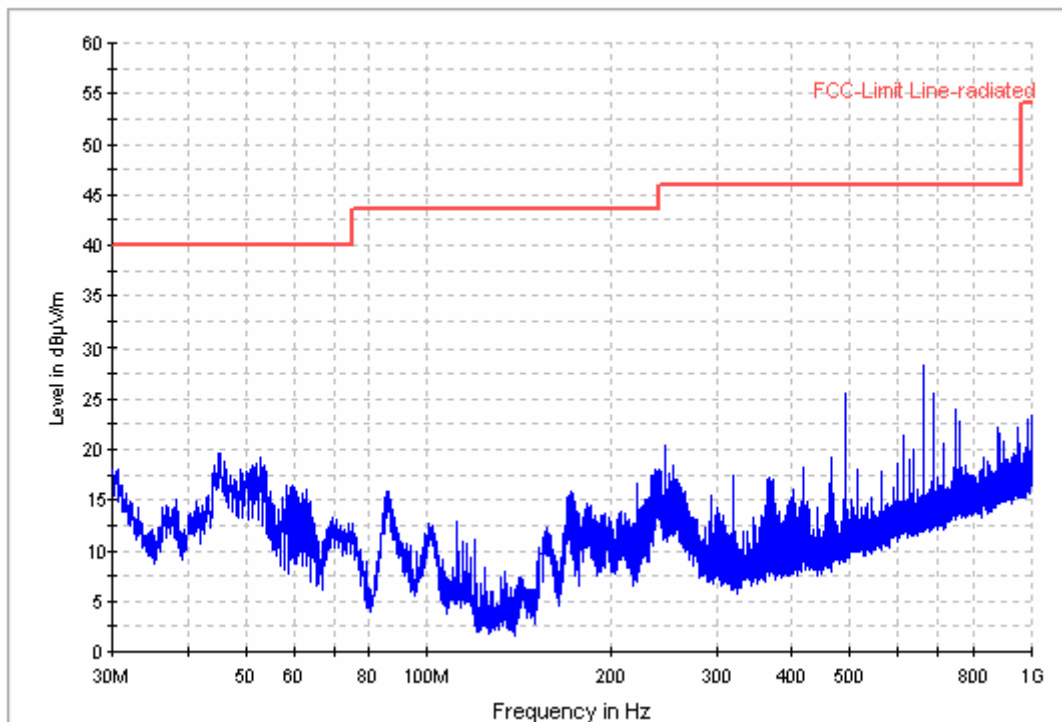


Figure A.1 Radiated Emission from 30MHz to 1GHz (Set.1, Charging mode)

FCC-RE2-1-18G-PEAK+AV

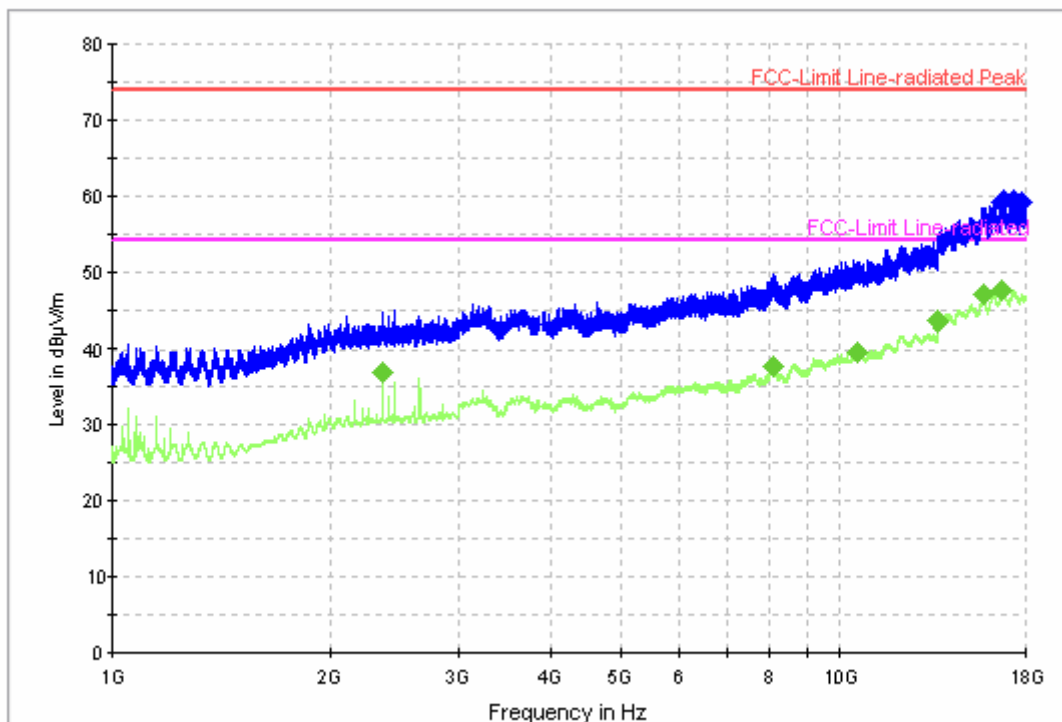


Figure A.2 Radiated Emission from 1GHz to 18GHz (Set.1, Charging mode)

FCC-RE1-Part 15-30M-1G

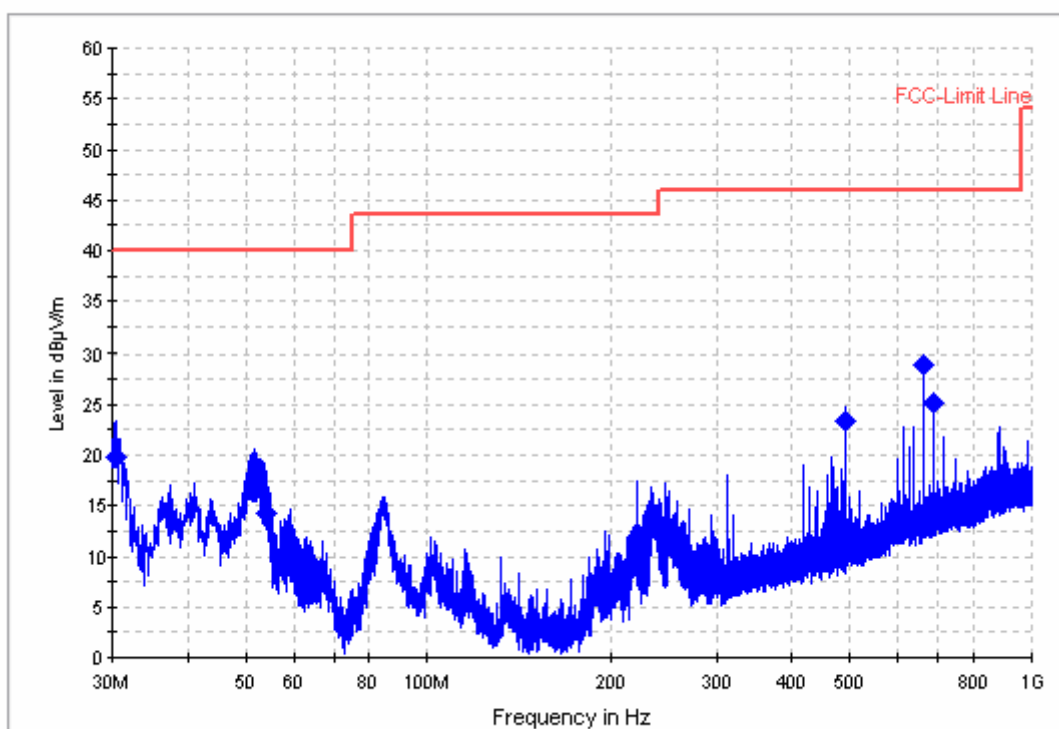


Figure A.3 Radiated Emission from 30MHz to 1GHz (Set.1, Charging mode)

FCC-RE2-1-18G-PEAK+AV

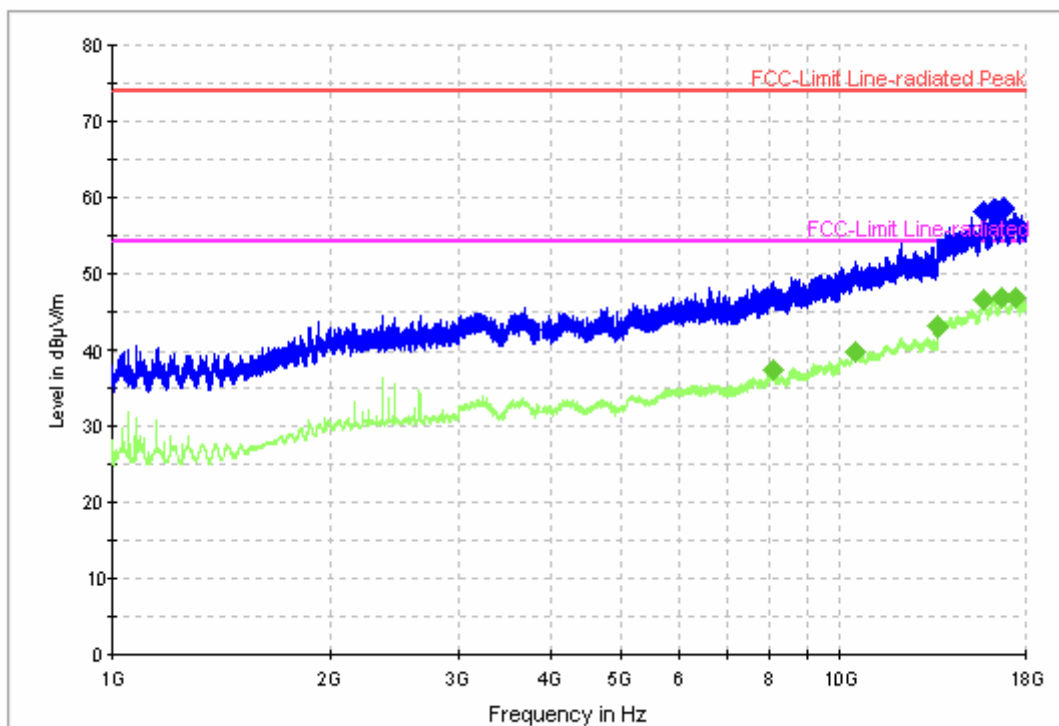


Figure A.4 Radiated Emission from 1GHz to 18GHz (Set.1, Charging mode)

FCC-RE1-Part 15-30M-1G

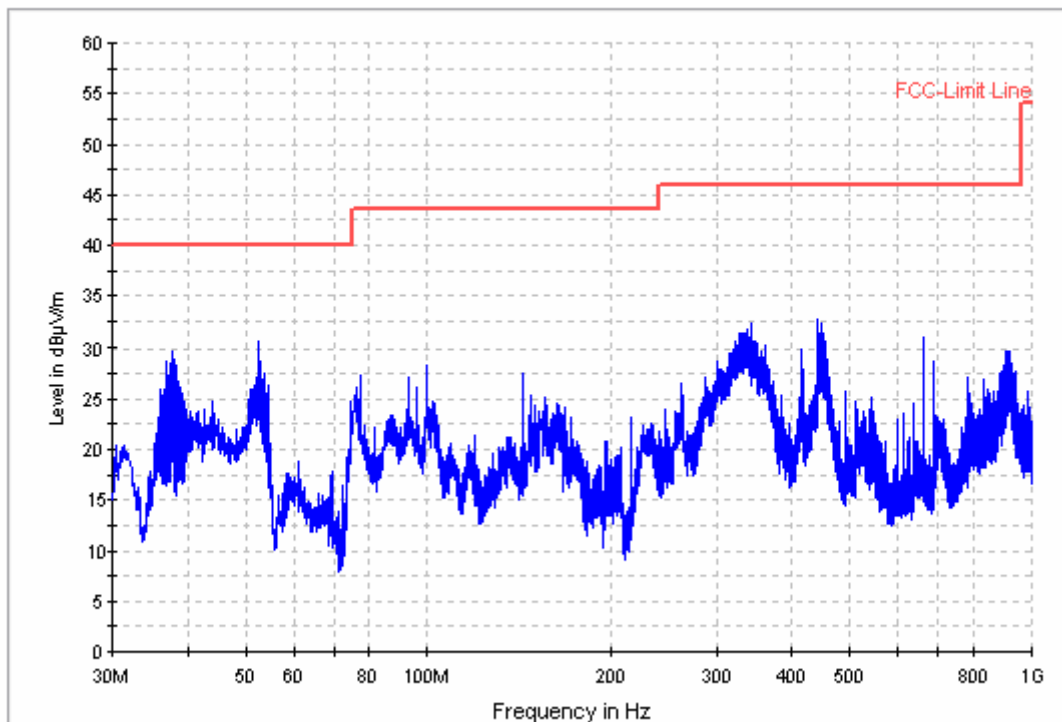


Figure A.5 Radiated Emission from 30MHz to 1GHz (Set.2, USB mode)

FCC-RE2-1-18G-PEAK+AV

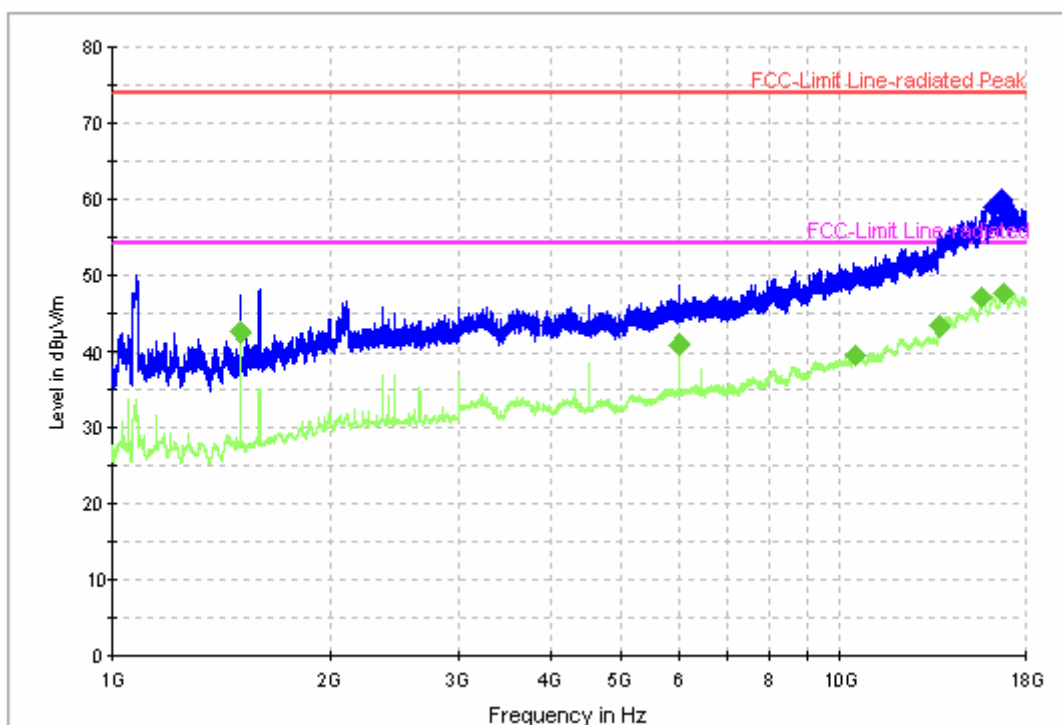


Figure A.6 Radiated Emission from 1GHz to 18GHz (Set.2, USB mode)

A.2 Conducted Emission (§15.107(a))

Reference

FCC: CFR Part 15.107(a)

A.2.1 Method of measurement

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits. Tested in accordance with the procedures of ANSI C63.4 - 2003, section 7.2.

A.2.2 EUT Operating Mode:

The MS is operating in the USB mode and charging mode. During the test MS is connected to a PC via a USB cable in the case of USB mode and is connected to a charger in the case of charging mode. The model of the PC is Lenovo Thinkcentre M4099t, and the serial number of the PC is SA08850737. The software is used to let the PC keep on copying data to MS, reading and erasing the data after copy action was finished.

A.2.3 Measurement Limit

| Frequency of emission (MHz) | Conducted limit (dBμV) | |
|--|------------------------|-----------|
| | Quasi-peak | Average |
| 0.15-0.5 | 66 to 56* | 56 to 46* |
| 0.5-5 | 56 | 46 |
| 5-30 | 60 | 50 |
| *Decreases with the logarithm of the frequency | | |

A.2.4 Test Condition in charging mode

| | |
|-------------|----------------|
| Voltage (V) | Frequency (Hz) |
| 120 | 60 |

| | |
|------|---------------|
| RBW | Sweep Time(s) |
| 9kHz | 1 |

A.2.5 Measurement Results

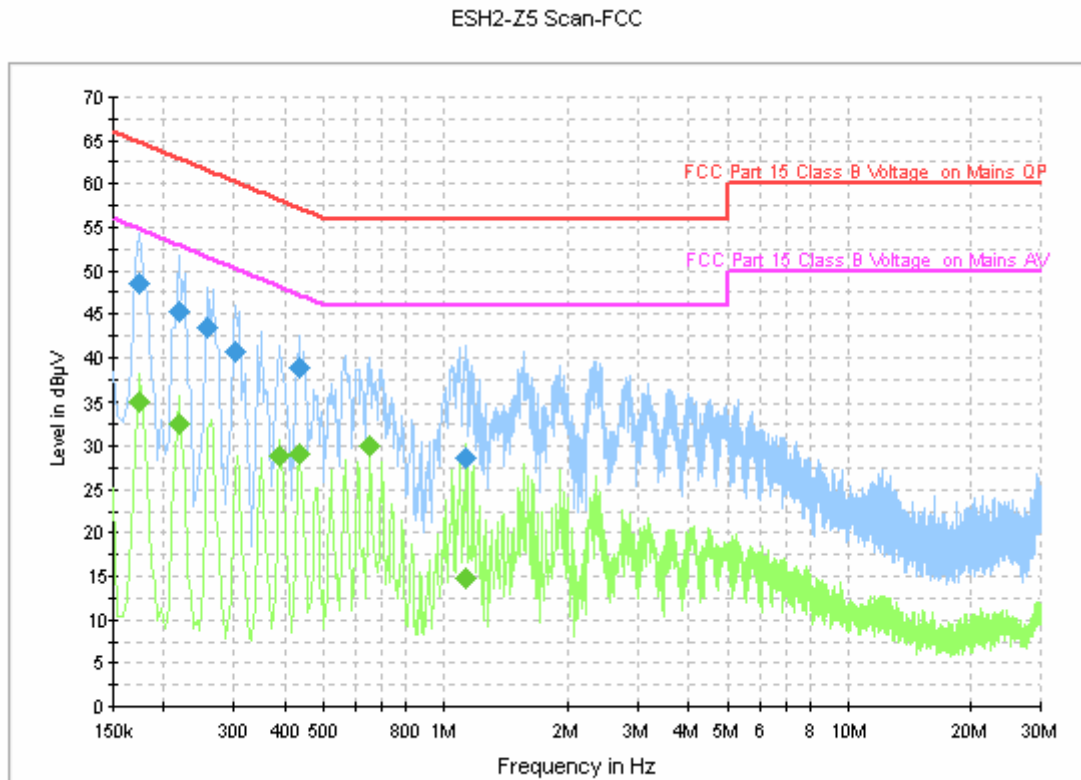


Figure A.7 Conducted Emission (Set.1, Charging mode)


Final Measurement Detector 1

| Frequency (MHz) | QuasiPeak (dBμV) | PE | Line | Corr. (dB) | Margin (dB) | Limit (dBμV) |
|-----------------|------------------|-----|------|------------|-------------|--------------|
| 0.174000 | 48.6 | FLO | L1 | 10.0 | 16.1 | 64.8 |
| 0.218000 | 45.3 | FLO | L1 | 10.0 | 17.6 | 62.9 |
| 0.258000 | 43.5 | FLO | L1 | 10.0 | 18.0 | 61.5 |
| 0.302000 | 40.6 | FLO | L1 | 10.0 | 19.6 | 60.2 |
| 0.434000 | 38.8 | FLO | L1 | 10.0 | 18.4 | 57.2 |
| 1.134000 | 28.7 | FLO | L1 | 10.1 | 27.3 | 56.0 |

Final Measurement Detector 2

| Frequency (MHz) | Average (dBμV) | PE | Line | Corr. (dB) | Margin (dB) | Limit (dBμV) |
|-----------------|----------------|-----|------|------------|-------------|--------------|
| 0.174000 | 35.2 | FLO | L1 | 10.0 | 19.6 | 54.8 |
| 0.218000 | 32.6 | FLO | L1 | 10.0 | 20.3 | 52.9 |
| 0.390000 | 28.8 | FLO | L1 | 10.0 | 19.3 | 48.1 |
| 0.434000 | 29.2 | FLO | L1 | 10.0 | 18.0 | 47.2 |
| 0.654000 | 29.9 | FLO | L1 | 10.0 | 16.1 | 46.0 |
| 1.134000 | 14.8 | FLO | L1 | 10.1 | 31.2 | 46.0 |

ESH2-Z5 Scan-FCC

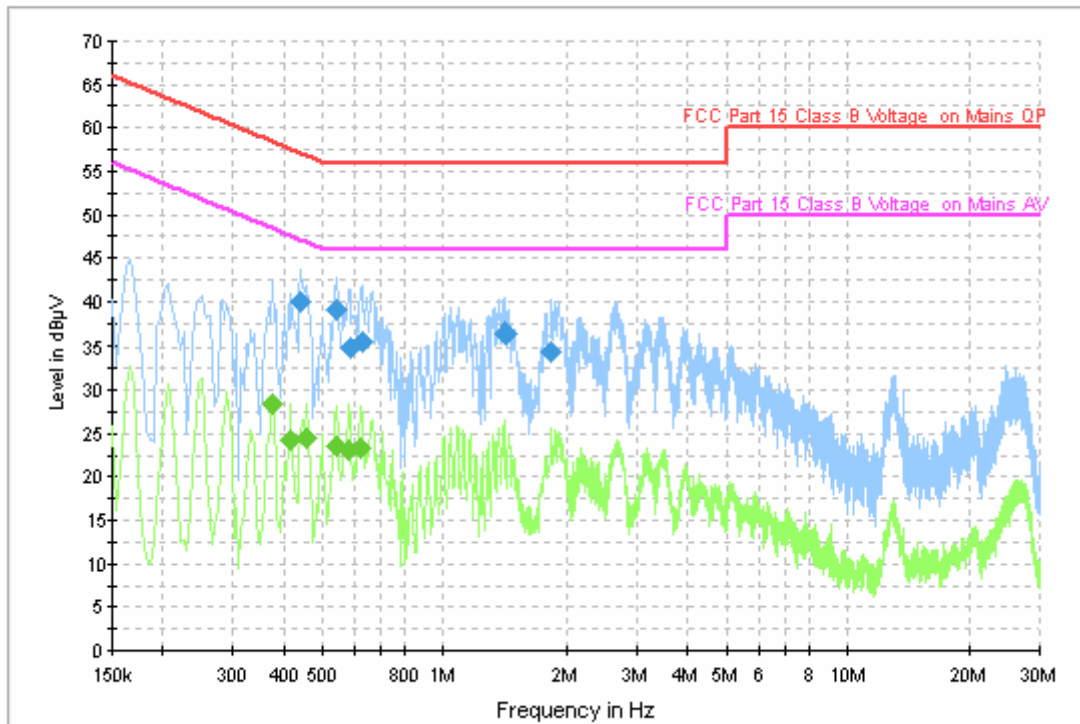
Figure A.8 Conducted Emission (Set.1, Charging mode)
Final Measurement Detector 1

| Frequency (MHz) | QuasiPeak (dBμV) | PE | Line | Corr. (dB) | Margin (dB) | Limit (dBμV) |
|-----------------|------------------|-----|------|------------|-------------|--------------|
| 0.442000 | 39.9 | FLO | L1 | 10.0 | 17.1 | 57.0 |
| 0.542000 | 39.1 | FLO | L1 | 10.1 | 16.9 | 56.0 |
| 0.586000 | 34.8 | FLO | L1 | 10.1 | 21.2 | 56.0 |
| 0.626000 | 35.5 | FLO | L1 | 10.0 | 20.5 | 56.0 |
| 1.418000 | 36.6 | FLO | L1 | 10.1 | 19.4 | 56.0 |
| 1.834000 | 34.4 | FLO | L1 | 10.1 | 21.6 | 56.0 |

Final Measurement Detector 2

| Frequency (MHz) | Average (dBμV) | PE | Line | Corr. (dB) | Margin (dB) | Limit (dBμV) |
|-----------------|----------------|-----|------|------------|-------------|--------------|
| 0.374000 | 28.3 | FLO | L1 | 10.0 | 20.1 | 48.4 |
| 0.418000 | 24.3 | FLO | L1 | 10.0 | 23.2 | 47.5 |
| 0.458000 | 24.4 | FLO | L1 | 10.0 | 22.3 | 46.7 |
| 0.542000 | 23.5 | FLO | L1 | 10.1 | 22.5 | 46.0 |
| 0.582000 | 23.2 | FLO | L1 | 10.1 | 22.8 | 46.0 |
| 0.622000 | 23.3 | FLO | L1 | 10.0 | 22.7 | 46.0 |

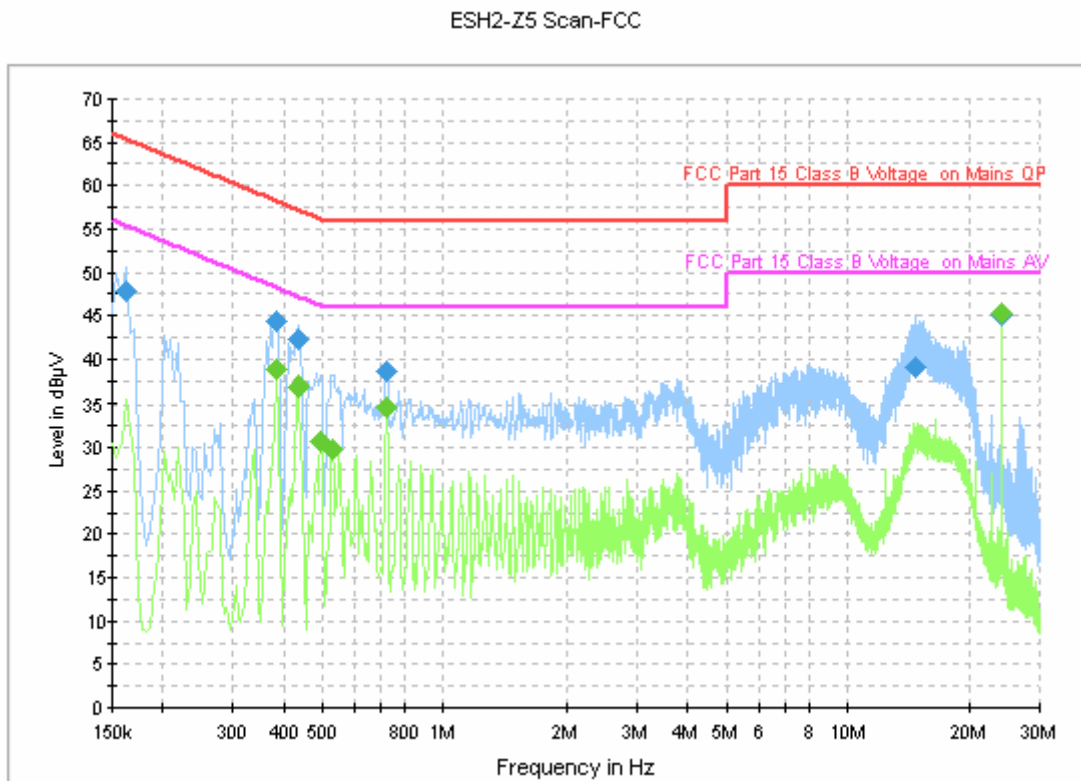


Figure A.9 Conducted Emission (Set.2, USB mode)

Final Measurement Detector 1

| Frequency (MHz) | QuasiPeak (dBµV) | PE | Line | Corr. (dB) | Margin (dB) | Limit (dBµV) |
|-----------------|------------------|-----|------|------------|-------------|--------------|
| 0.162000 | 47.8 | FLO | L1 | 10.0 | 17.6 | 65.4 |
| 0.386000 | 44.4 | FLO | L1 | 10.0 | 13.8 | 58.1 |
| 0.434000 | 42.2 | FLO | L1 | 10.0 | 15.0 | 57.2 |
| 0.718000 | 38.6 | FLO | L1 | 10.0 | 17.4 | 56.0 |
| 14.650000 | 38.9 | FLO | L1 | 10.5 | 21.1 | 60.0 |
| 23.998000 | 45.0 | FLO | L1 | 10.6 | 15.0 | 60.0 |

Final Measurement Detector 2

| Frequency (MHz) | Average (dBµV) | PE | Line | Corr. (dB) | Margin (dB) | Limit (dBµV) |
|-----------------|----------------|-----|------|------------|-------------|--------------|
| 0.386000 | 38.8 | FLO | L1 | 10.0 | 9.4 | 48.1 |
| 0.434000 | 37.1 | FLO | L1 | 10.0 | 10.1 | 47.2 |
| 0.494000 | 30.7 | FLO | L1 | 10.0 | 15.4 | 46.1 |
| 0.530000 | 29.7 | FLO | L1 | 10.0 | 16.3 | 46.0 |
| 0.722000 | 34.6 | FLO | L1 | 10.0 | 11.4 | 46.0 |
| 23.998000 | 45.2 | FLO | L1 | 10.6 | 4.8 | 50.0 |

*****END OF REPORT*****