

Appendix 2 – Highest SAR Test Plots

Test Laboratory: JAPAN QUALITY ASSURANCE ORGANIZATION

661ch / PCS 1900 - GPRS 4slots

DUT: Smart Phone; Type: 402SH; Serial: 004401/11/523950/7

Frequency: 1880 MHz; Duty Cycle: 1:2.08018

Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.411$ S/m; $\epsilon_r = 39.471$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: ET3DV6 - SN1679; ConvF(5.08, 5.08, 5.08); Calibrated: 8/15/2014;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn508; Calibrated: 11/27/2013
- Phantom: SAM v4.0 SN1194; Type: QD000P40CA; Serial: TP 1194
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Head/Left Touched/Area Scan (11x8x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.376 W/kg



Head/Left Touched/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 14.13 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.534 W/kg

SAR(1 g) = 0.353 W/kg; SAR(10 g) = 0.226 W/kg

Maximum value of SAR (measured) = 0.379 W/kg

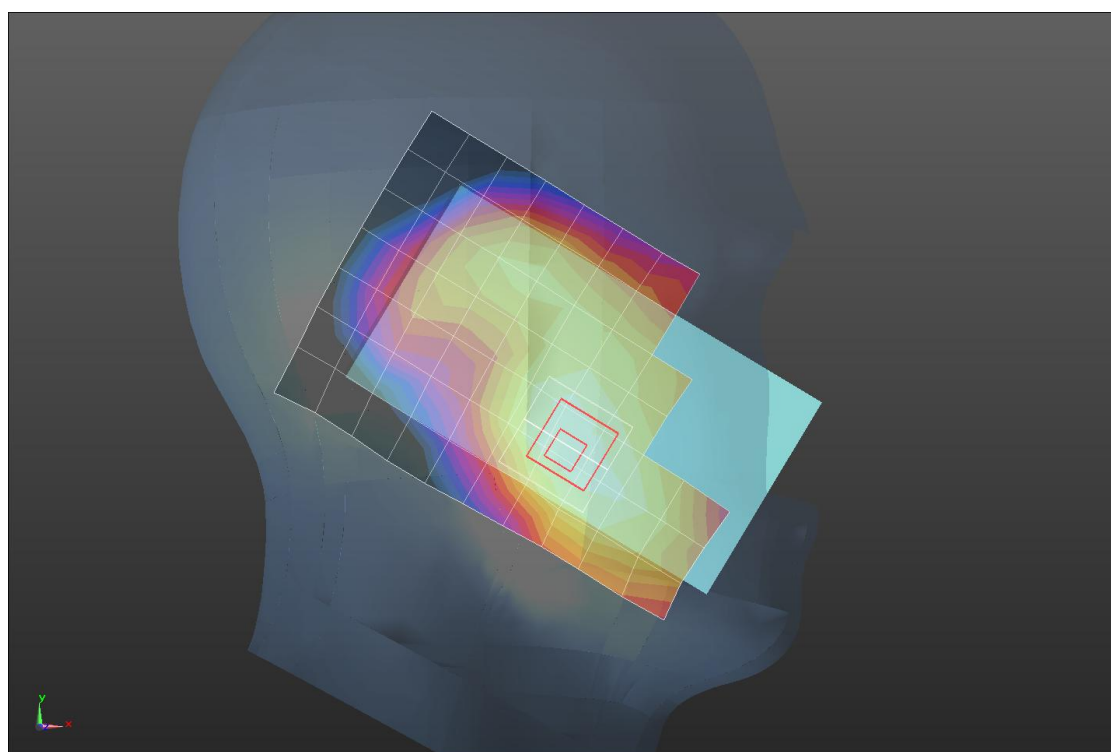

0 dB = 0.379 W/kg = -4.21 dBW/kg

Test Laboratory: JAPAN QUALITY ASSURANCE ORGANIZATION

661ch / PCS 1900 - GPRS 4slots

DUT: Smart Phone; Type: 402SH; Serial: 004401/11/523950/7

Frequency: 1880 MHz; Duty Cycle: 1:2.08018

Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.532$ S/m; $\epsilon_r = 52.333$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: ET3DV6 - SN1679; ConvF(4.53, 4.53, 4.53); Calibrated: 8/15/2014;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn508; Calibrated: 11/27/2013
- Phantom: SAM v4.0 SN1194; Type: QD000P40CA; Serial: TP 1194
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Body/Front/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.354 W/kg



Body/Front/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 13.09 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.469 W/kg

SAR(1 g) = 0.339 W/kg; SAR(10 g) = 0.226 W/kg

Maximum value of SAR (measured) = 0.364 W/kg

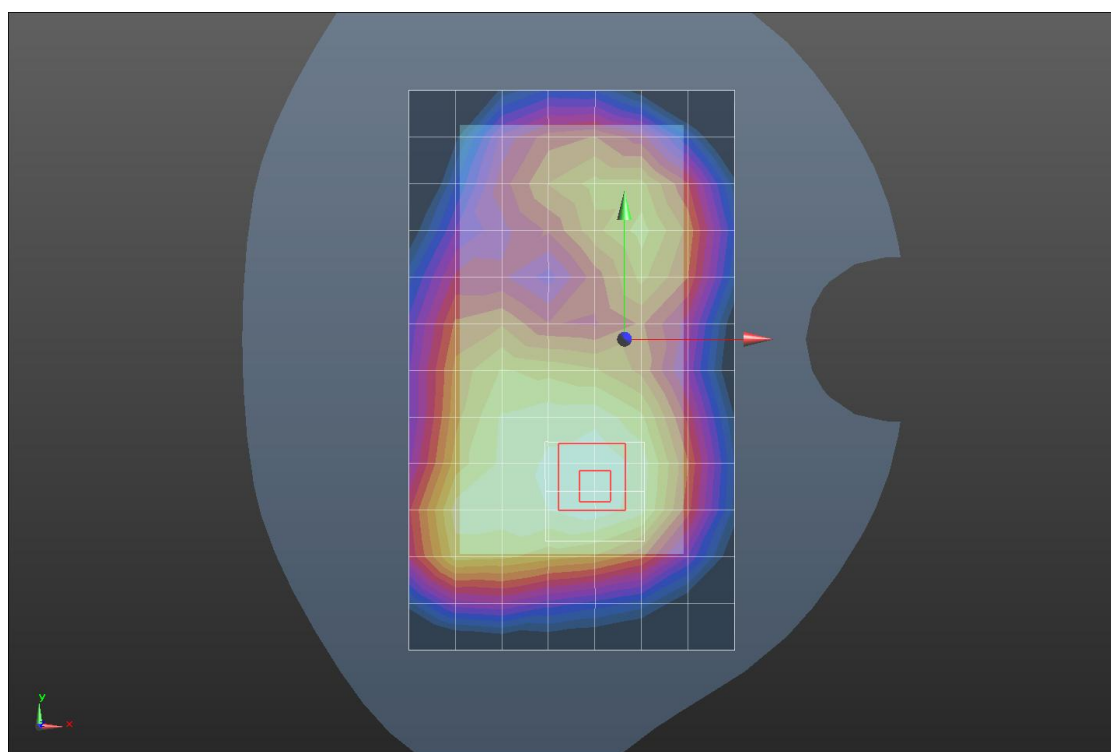

0 dB = 0.364 W/kg = -4.39 dBW/kg

Test Laboratory: JAPAN QUALITY ASSURANCE ORGANIZATION

661ch / PCS 1900 - GPRS 4slots

DUT: Smart Phone; Type: 402SH; Serial: 004401/11/523950/7

Frequency: 1880 MHz; Duty Cycle: 1:2.08018

Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.532$ S/m; $\epsilon_r = 52.333$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: ET3DV6 - SN1679; ConvF(4.53, 4.53, 4.53); Calibrated: 8/15/2014;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn508; Calibrated: 11/27/2013
- Phantom: SAM v4.0 SN1194; Type: QD000P40CA; Serial: TP 1194
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Body/Left Edge/Area Scan (7x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.415 W/kg



Body/Left Edge/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.93 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 0.601 W/kg

SAR(1 g) = 0.377 W/kg; SAR(10 g) = 0.218 W/kg

Maximum value of SAR (measured) = 0.412 W/kg

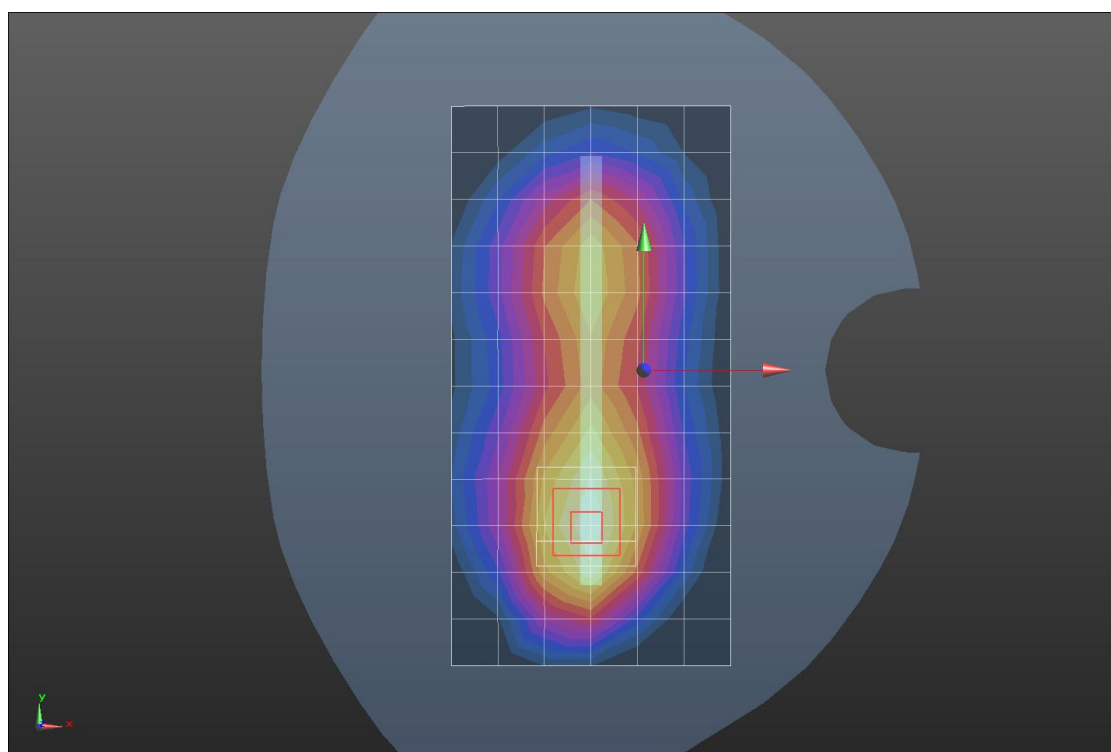

0 dB = 0.412 W/kg = -3.85 dBW/kg

Test Laboratory: JAPAN QUALITY ASSURANCE ORGANIZATION

11ch / 802.11b 1Mbps

DUT: Smart Phone; Type: 402SH; Serial: 004401/11/523950/7

Frequency: 2462 MHz; Duty Cycle: 1:1

Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C

Medium parameters used: $f = 2462$ MHz; $\sigma = 1.866$ S/m; $\epsilon_r = 38.774$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3808; ConvF(6.99, 6.99, 6.99); Calibrated: 9/15/2014;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn508; Calibrated: 11/27/2013
- Phantom: SAM v4.0 SN1194; Type: QD000P40CA; Serial: TP 1194
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Head/Left Touched/Area Scan (13x10x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.0628 W/kg



Head/Left Touched/Zoom Scan (8x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.920 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 0.0970 W/kg

SAR(1 g) = 0.043 W/kg; SAR(10 g) = 0.018 W/kg

Maximum value of SAR (measured) = 0.0679 W/kg

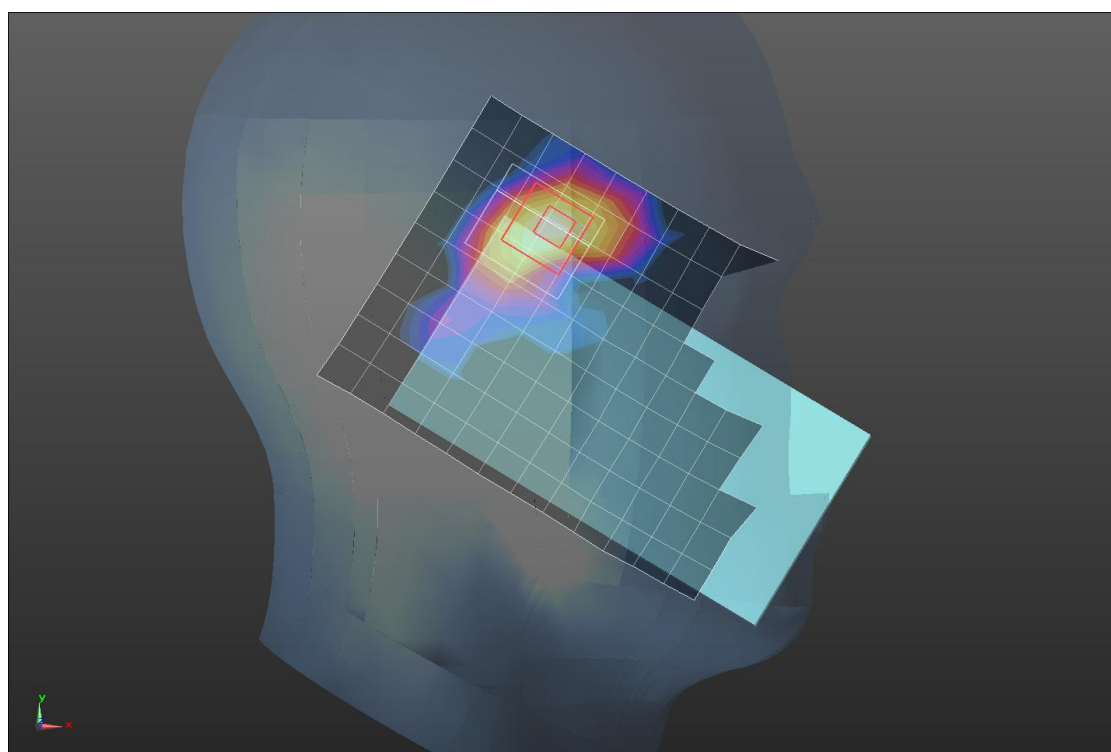

0 dB = 0.0679 W/kg = -11.68 dBW/kg

Test Laboratory: JAPAN QUALITY ASSURANCE ORGANIZATION

11ch / 802.11b 1Mbps

DUT: Smart Phone; Type: 402SH; Serial: 004401/11/523950/7

Frequency: 2462 MHz; Duty Cycle: 1:1

Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C

Medium parameters used: $f = 2462$ MHz; $\sigma = 1.986$ S/m; $\epsilon_r = 52.056$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3808; ConvF(6.92, 6.92, 6.92); Calibrated: 9/15/2014;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn508; Calibrated: 11/27/2013
- Phantom: SAM v4.0 SN1194; Type: QD000P40CA; Serial: TP 1194
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Body/Rear/Area Scan (10x14x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.191 W/kg



Body/Rear/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 6.393 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 0.271 W/kg

SAR(1 g) = 0.133 W/kg; SAR(10 g) = 0.058 W/kg

Maximum value of SAR (measured) = 0.202 W/kg

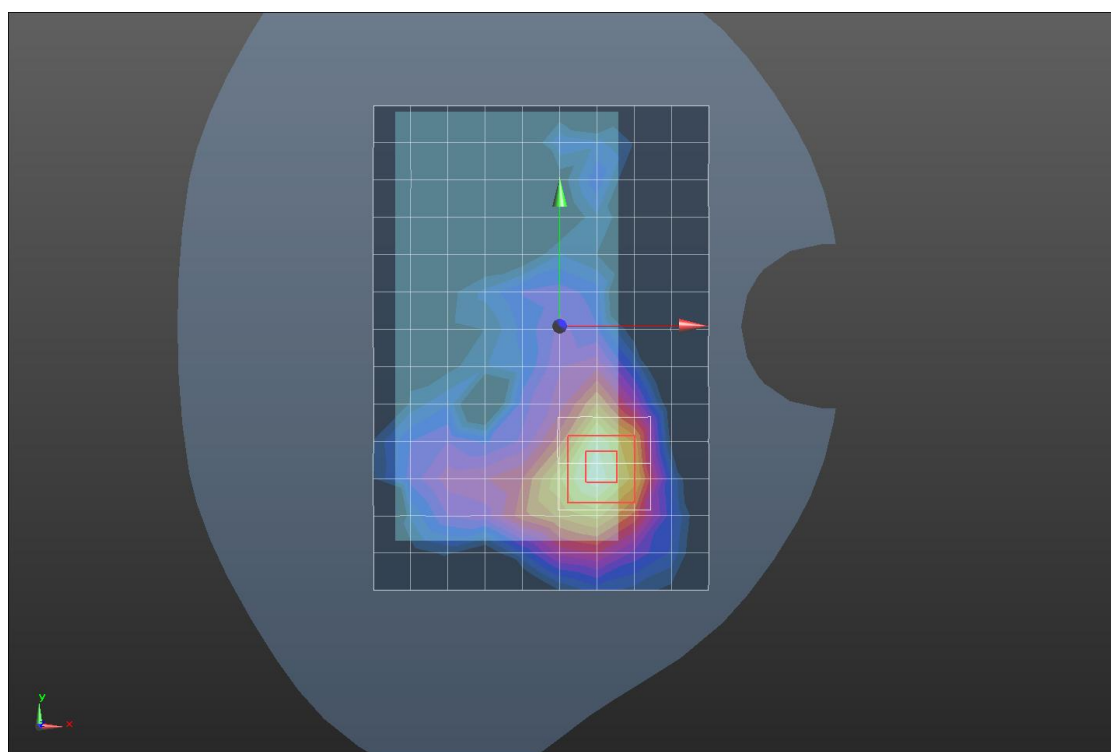

0 dB = 0.202 W/kg = -6.95 dBW/kg

Test Laboratory: JAPAN QUALITY ASSURANCE ORGANIZATION

44ch / 802.11a 6Mbps

DUT: Smart Phone; Type: 402SH; Serial: 004401/11/523950/7

Frequency: 5220 MHz; Duty Cycle: 1:1

Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C

Medium parameters used: $f = 5220 \text{ MHz}$; $\sigma = 4.604 \text{ S/m}$; $\epsilon_r = 35.798$; $\rho = 1000 \text{ kg/m}^3$

DASY5 Configuration:

- Probe: EX3DV4 - SN3808; ConvF(4.89, 4.89, 4.89); Calibrated: 9/15/2014;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn508; Calibrated: 11/27/2013
- Phantom: SAM v4.0 SN1194; Type: QD000P40CA; Serial: TP 1194
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Head/Left Touched/Area Scan (11x12x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

Maximum value of SAR (measured) = 0.0684 W/kg


Head/Left Touched/Zoom Scan (8x9x12)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$

Reference Value = 3.468 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 0.332 W/kg

SAR(1 g) = 0.028 W/kg; SAR(10 g) = 0.00831 W/kg

Maximum value of SAR (measured) = 0.0587 W/kg

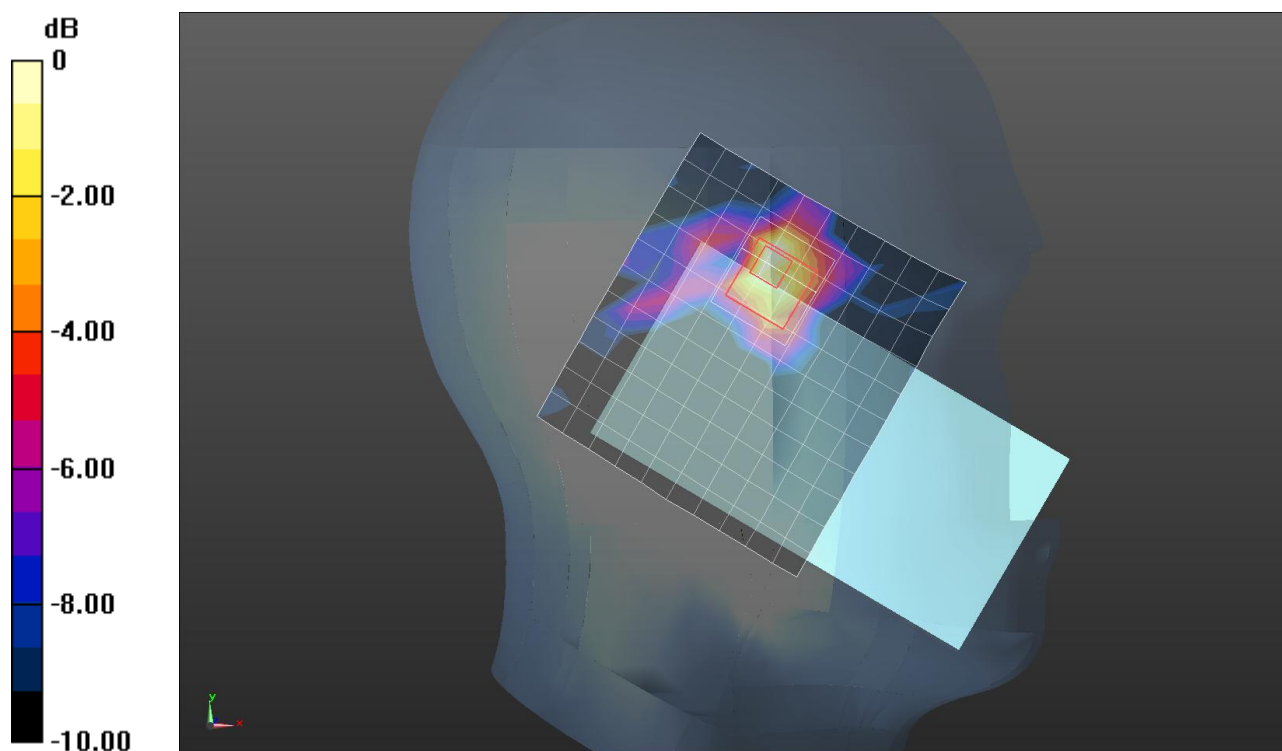

0 dB = 0.0587 W/kg = -12.31 dBW/kg

Test Laboratory: JAPAN QUALITY ASSURANCE ORGANIZATION

44ch / 802.11a 6Mbps

DUT: Smart Phone; Type: 402SH; Serial: 004401/11/523950/7

Frequency: 5220 MHz; Duty Cycle: 1:1

Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C

Medium parameters used: $f = 5220 \text{ MHz}$; $\sigma = 5.405 \text{ S/m}$; $\epsilon_r = 47.542$; $\rho = 1000 \text{ kg/m}^3$

DASY5 Configuration:

- Probe: EX3DV4 - SN3808; ConvF(4.19, 4.19, 4.19); Calibrated: 9/15/2014;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn508; Calibrated: 11/27/2013
- Phantom: SAM v4.0 SN1194; Type: QD000P40CA; Serial: TP 1194
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Body/Rear/Area Scan (13x17x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

Maximum value of SAR (measured) = 0.177 W/kg


Body/Rear/Zoom Scan (8x9x12)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$

Reference Value = 3.922 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 0.501 W/kg

SAR(1 g) = 0.081 W/kg; SAR(10 g) = 0.024 W/kg

Maximum value of SAR (measured) = 0.167 W/kg

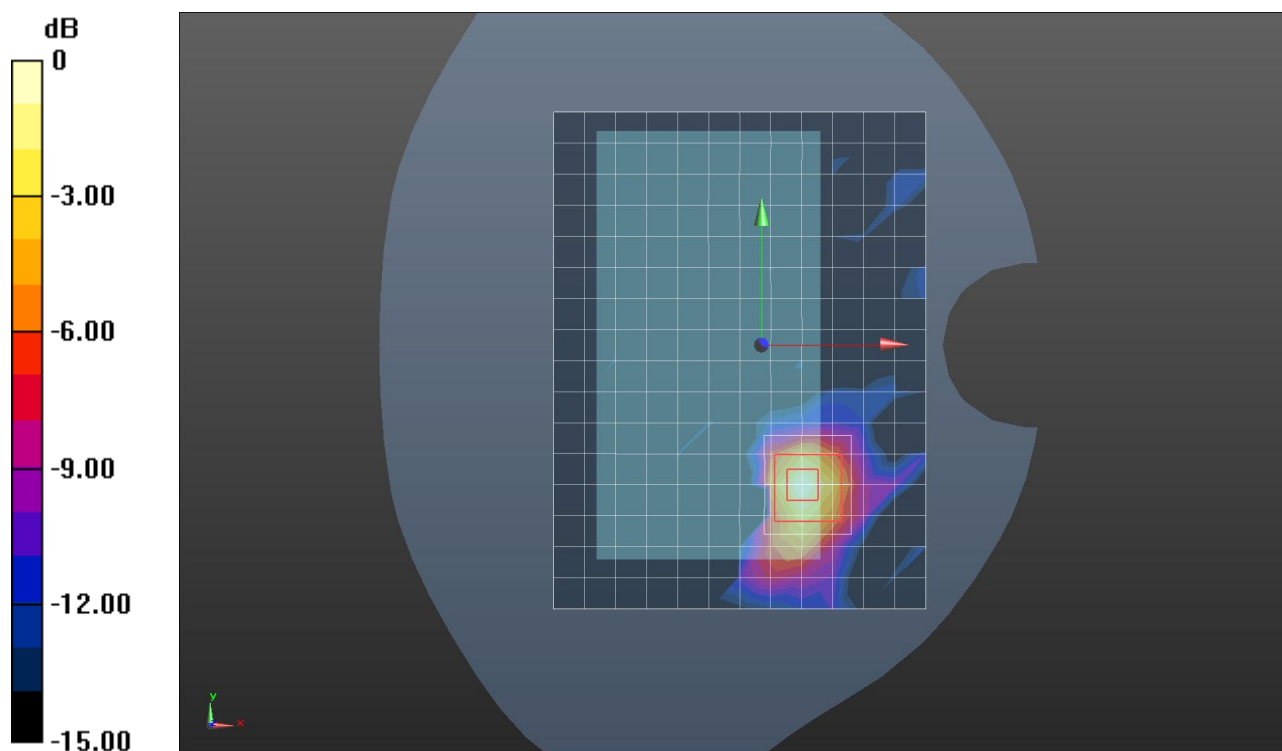

0 dB = 0.167 W/kg = -7.77 dBW/kg

Test Laboratory: JAPAN QUALITY ASSURANCE ORGANIZATION

52ch / 802.11a 6Mbps

DUT: Smart Phone; Type: 402SH; Serial: 004401/11/523950/7

Frequency: 5260 MHz; Duty Cycle: 1:1

Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C

Medium parameters used: $f = 5260$ MHz; $\sigma = 4.644$ S/m; $\epsilon_r = 35.727$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3808; ConvF(4.89, 4.89, 4.89); Calibrated: 9/15/2014;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn508; Calibrated: 11/27/2013
- Phantom: SAM v4.0 SN1194; Type: QD000P40CA; Serial: TP 1194
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Head/Left Touched/Area Scan (11x12x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.0660 W/kg


Head/Left Touched/Zoom Scan (8x8x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 3.137 V/m; Power Drift = -0.18 dB

Peak SAR (extrapolated) = 0.304 W/kg

SAR(1 g) = 0.024 W/kg; SAR(10 g) = 0.00697 W/kg

Maximum value of SAR (measured) = 0.0651 W/kg

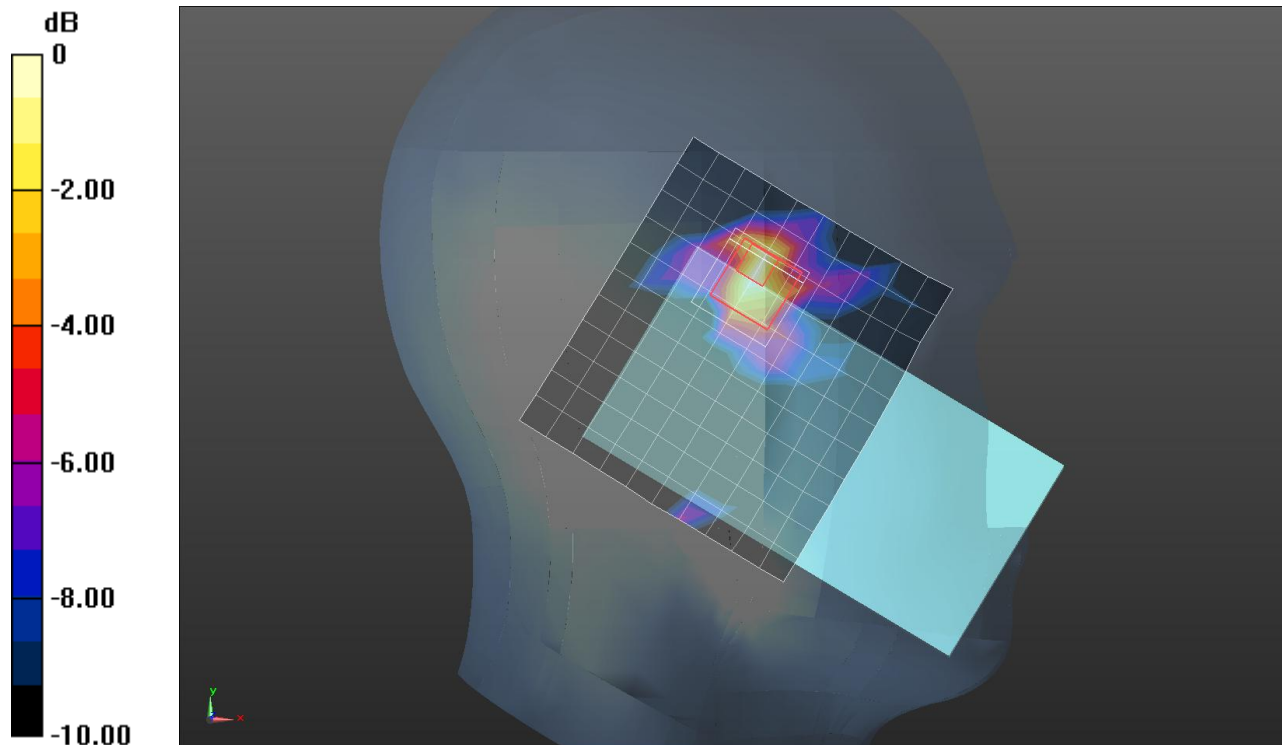

0 dB = 0.0651 W/kg = -11.86 dBW/kg

Test Laboratory: JAPAN QUALITY ASSURANCE ORGANIZATION

52ch / 802.11a 6Mbps

DUT: Smart Phone; Type: 402SH; Serial: 004401/11/523950/7

Frequency: 5260 MHz; Duty Cycle: 1:1

Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C

Medium parameters used: $f = 5260$ MHz; $\sigma = 5.465$ S/m; $\epsilon_r = 47.465$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3808; ConvF(4.19, 4.19, 4.19); Calibrated: 9/15/2014;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn508; Calibrated: 11/27/2013
- Phantom: SAM v4.0 SN1194; Type: QD000P40CA; Serial: TP 1194
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Body/Rear/Area Scan (13x17x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.199 W/kg


Body/Rear/Zoom Scan (9x9x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 4.287 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 0.691 W/kg

SAR(1 g) = 0.103 W/kg; SAR(10 g) = 0.030 W/kg

Maximum value of SAR (measured) = 0.206 W/kg

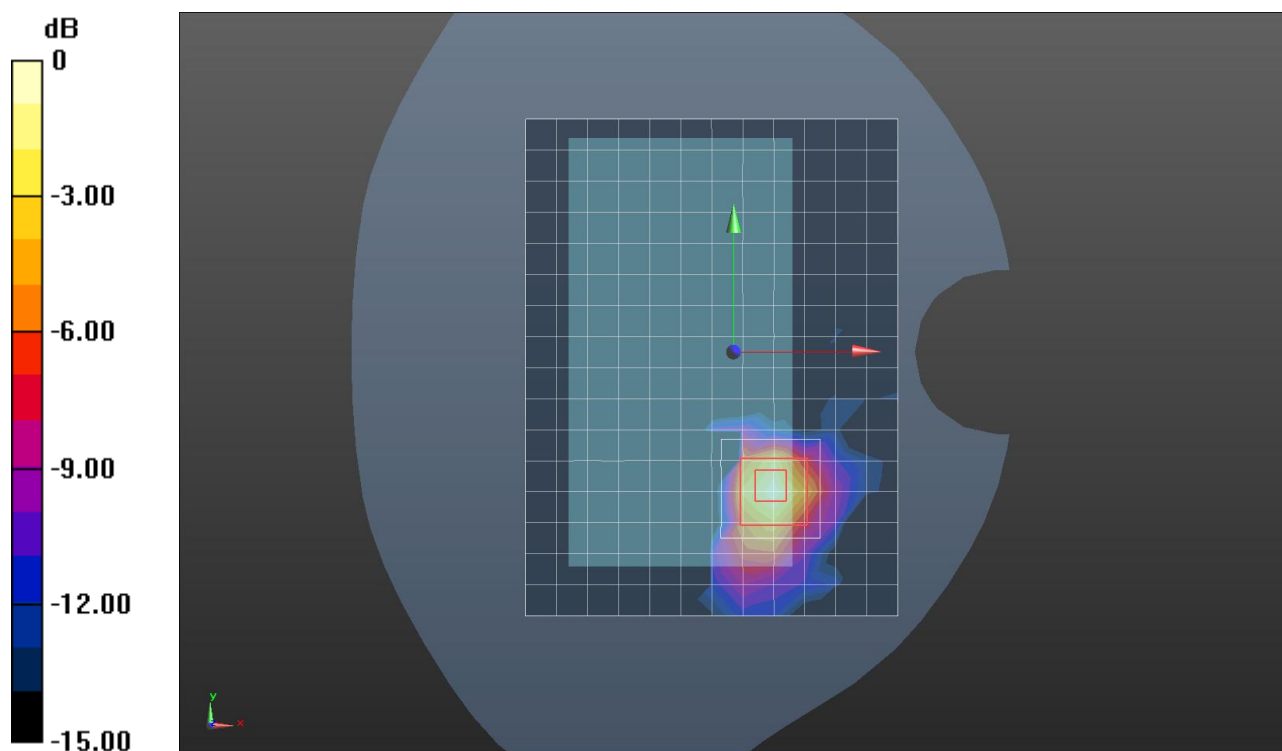

0 dB = 0.206 W/kg = -6.86 dBW/kg

Test Laboratory: JAPAN QUALITY ASSURANCE ORGANIZATION

112ch / 802.11a 6Mbps

DUT: Smart Phone; Type: 402SH; Serial: 004401/11/523950/7

Frequency: 5560 MHz; Duty Cycle: 1:1

Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C

Medium parameters used: $f = 5560$ MHz; $\sigma = 4.972$ S/m; $\epsilon_r = 35.706$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3808; ConvF(4.55, 4.55, 4.55); Calibrated: 9/15/2014;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn508; Calibrated: 11/27/2013
- Phantom: SAM v4.0 SN1194; Type: QD000P40CA; Serial: TP 1194
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Head/Left Touched/Area Scan (11x12x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.0629 W/kg


Head/Left Touched/Zoom Scan (8x9x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 3.014 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.465 W/kg

SAR(1 g) = 0.032 W/kg; SAR(10 g) = 0.00775 W/kg

Maximum value of SAR (measured) = 0.0569 W/kg

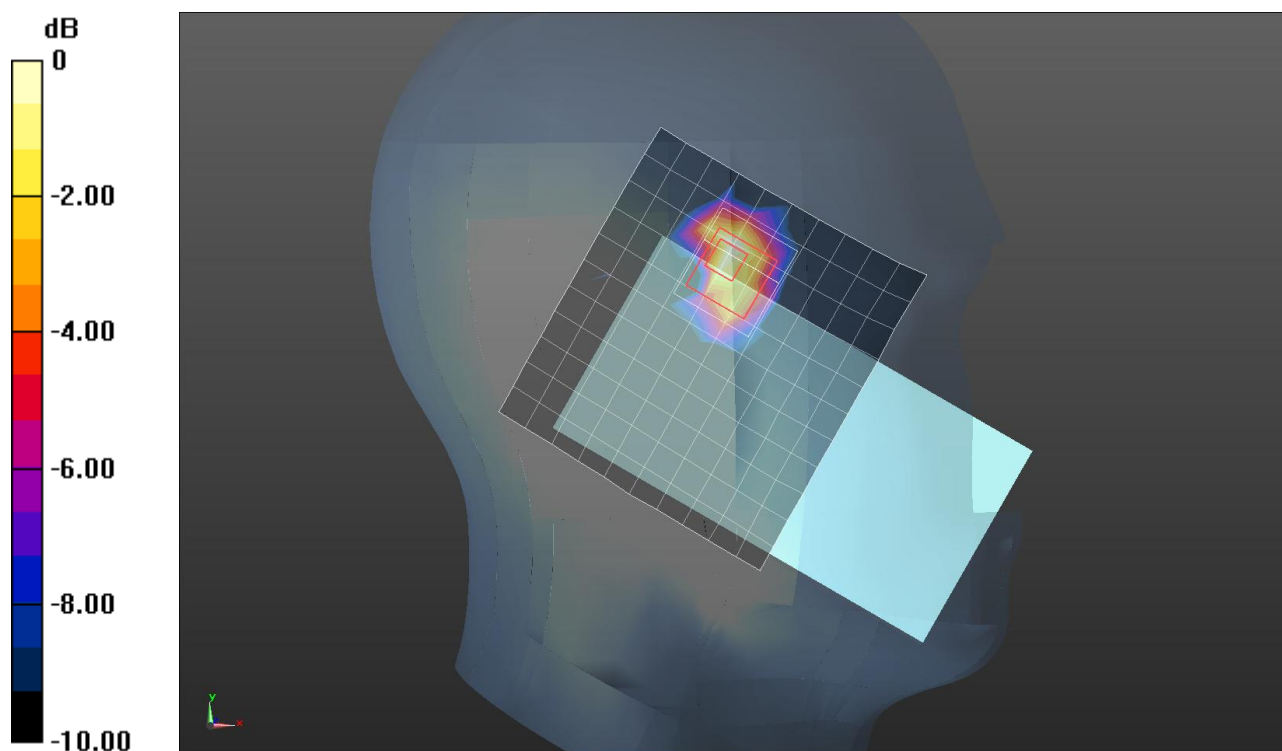

0 dB = 0.0569 W/kg = -12.45 dBW/kg

Test Laboratory: JAPAN QUALITY ASSURANCE ORGANIZATION

112ch / 802.11a 6Mbps

DUT: Smart Phone; Type: 402SH; Serial: 004401/11/523950/7

Frequency: 5560 MHz; Duty Cycle: 1:1

Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C

Medium parameters used: $f = 5560$ MHz; $\sigma = 5.849$ S/m; $\epsilon_r = 47.021$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3808; ConvF(3.96, 3.96, 3.96); Calibrated: 9/15/2014;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn508; Calibrated: 11/27/2013
- Phantom: SAM v4.0 SN1194; Type: QD000P40CA; Serial: TP 1194
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Body/Rear/Area Scan (13x17x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.221 W/kg


Body/Rear/Zoom Scan (10x9x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 4.135 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 0.495 W/kg

SAR(1 g) = 0.121 W/kg; SAR(10 g) = 0.036 W/kg

Maximum value of SAR (measured) = 0.261 W/kg

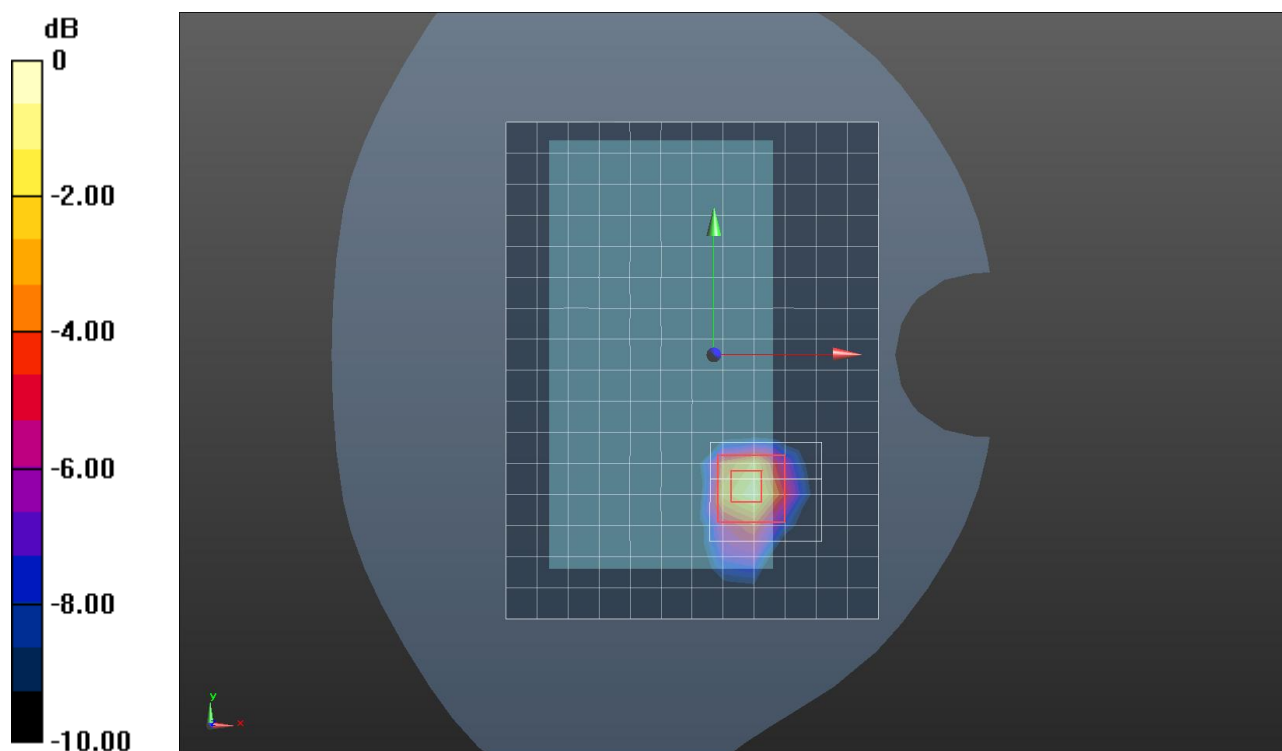

0 dB = 0.261 W/kg = -5.83 dBW/kg