

## SAR Test Report - New Application

Applicant:



**Garmin International Inc.**  
**1200 East 151 St.**  
**Olathe, KS, 66062**  
**USA**

FCC ID:

**IPH-04577**

Product Model Number / HVIN

**A04577**

### Maximum *reported* SAR

Body (1g)	Bluetooth	<b>0.19</b>	W/kg
	WiFi - 2.4GHz	<b>0.45</b>	
	WiFi - 5GHz	<b>0.25</b>	
	Simultaneous	<b>0.44</b>	
General Pop. Limit:		<b>1.60</b>	
Extremity (10g)	Bluetooth	<b>0.02</b>	
	WiFi - 2.4GHz	<b>0.36</b>	
	WiFi - 5GHz	<b>0.15</b>	
	Simultaneous	<b>0.17</b>	
General Pop. Limit:		<b>4.00</b>	

IC Registration Number

Product Name / PMN

**A04577**

In Accordance With:

**FCC 47 CFR §2.1093**

Radiofrequency Radiation Exposure Evaluation: Portable Devices

Approved By:



**Ben Hewson, President**  
Celltech Labs Inc.  
21-364 Lougheed Rd.  
Kelowna, BC, V1X 7R8  
Canada



Test Lab Certificate: 2470.01



**Industry  
Canada**

IC Registration 3874A



FCC Registration: CA3874

This report shall not be reproduced in any form without the expressed written consent of Celltech Labs Inc.

## Table of Contents

1.0 REVISION HISTORY .....	4
2.0 CLIENT AND DEVICE INFORMATION .....	5
3.0 SCOPE OF EVALUATION .....	6
4.0 NORMATIVE REFERENCES .....	7
5.0 STATEMENT OF COMPLIANCE .....	8
6.0 SAR MEASUREMENT SYSTEM .....	9
7.0 RF CONDUCTED POWER MEASUREMENT .....	10
TABLE 7.1 CONDUCTED POWER MEASUREMENTS, 2.4 GHz WiFi .....	10
TABLE 7.2 CONDUCTED POWER MEASUREMENT RESULTS, BLUETOOTH .....	11
TABLE 7.3 CONDUCTED POWER MEASUREMENTS, 5 GHz WiFi UNI-1 .....	11
TABLE 7.4 CONDUCTED POWER MEASUREMENTS, 5 GHz WiFi UNI-3 .....	12
8.0 NUMBER OF TEST CHANNELS ( $N_C$ ) .....	13
TABLE 8.1 NUMBER OF TEST CHANNELS .....	13
TABLE 8.2 ANTENNA DISTANCES .....	14
TABLE 8.3 SAR TEST EXCLUSION BASED ON ANTENNA TEST SEPARATION DISTANCES * BODY .....	15
TABLE 8.3 SAR TEST EXCLUSION BASED ON ANTENNA TEST SEPARATION DISTANCES EXTREMITY .....	16
9.0 ACCESSORIES EVALUATED .....	17
TABLE 9.1 MANUFACTURER'S ACCESSORY LIST .....	17
10.0 SAR MEASUREMENT SUMMARY .....	18
TABLE 10.1: MEASURED RESULTS, BODY (1G) .....	18
TABLE 10.2: MEASURED RESULTS, EXTREMITY (10G) .....	19
11.0 SCALING OF MAXIMUM MEASURE SAR .....	20
TABLE 11.1 SAR SCALING – BODY (1G) .....	20
TABLE 11.2 SAR SCALING – EXTREMITY (10G) .....	21
11.3 SIMULTANEOUS TRANSMISSION SAR ANALYSIS .....	23
12.0 SAR EXPOSURE LIMITS .....	24
TABLE 12.1 EXPOSURE LIMITS .....	24
13.0 DETAILS OF SAR EVALUATION .....	25
13.1 DAY LOG .....	25
13.2 DUT SETUP AND CONFIGURATION .....	26
13.3 DUT POSITIONING .....	26
13.4 GENERAL PROCEDURES AND REPORT .....	27
13.5 FLUID DIELECTRIC AND SYSTEMS PERFORMANCE CHECK .....	28
13.6 SCAN RESOLUTION 100MHZ TO 2GHZ .....	28
13.7 SCAN RESOLUTION 2GHZ TO 3GHZ .....	29
13.8 SCAN RESOLUTION 5GHZ TO 6GHZ .....	29
14.0 MEASUREMENT UNCERTAINTIES .....	29
TABLE 14.1 MEASUREMENT UNCERTAINTY .....	29
TABLE 14.2 CALCULATION OF DEGREES OF FREEDOM .....	30

<b>15.0 FLUID DIELECTRIC PARAMETERS .....</b>	<b>31</b>
TABLE 15.1 FLUID DIELECTRIC PARAMETERS 2450MHz HEAD TSL .....	31
TABLE 15.2 FLUID DIELECTRIC PARAMETERS 2450MHz HEAD TSL .....	32
TABLE 15.3 FLUID DIELECTRIC PARAMETERS 5250MHz HEAD TSL .....	33
TABLE 15.3 FLUID DIELECTRIC PARAMETERS 5750MHz HEAD TSL .....	34
<b>16.0 SYSTEM VERIFICATION TEST RESULTS .....</b>	<b>35</b>
TABLE 16.1 SYSTEM VERIFICATION RESULTS 2450MHz HEAD TSL .....	35
TABLE 16.2 SYSTEM VERIFICATION RESULTS 2450MHz HEAD TSL .....	36
TABLE 16.3 SYSTEM VERIFICATION RESULTS 5250MHz HEAD TSL .....	37
TABLE 16.4 SYSTEM VERIFICATION RESULTS 5750MHz HEAD TSL .....	38
<b>17.0 SYSTEM VALIDATION SUMMARY .....</b>	<b>39</b>
TABLE 17.0 SYSTEM VALIDATION SUMMARY.....	39
<b>18.0 MEASUREMENT SYSTEM SPECIFICATIONS .....</b>	<b>40</b>
TABLE 18.1 MEASUREMENT SYSTEM SPECIFICATIONS .....	40
<b>19.0 TEST EQUIPMENT LIST .....</b>	<b>42</b>
TABLE 19.1 EQUIPMENT LIST AND CALIBRATION .....	42
<b>20.0 FLUID COMPOSITION .....</b>	<b>43</b>
TABLE 20.1 FLUID COMPOSITION 2450MHz HEAD TSL .....	43
TABLE 20.4 FLUID COMPOSITION 5250, 5750MHz HEAD TSL.....	43
<b>END OF REPORT.....</b>	<b>43</b>
<b>APPENDIX A – SYSTEM VERIFICATION PLOTS.....</b>	<b>44</b>
<b>APPENDIX B – MEASUREMENT PLOTS OF MAXIMUM MEASURED SAR .....</b>	<b>52</b>
<b>APPENDIX C - SETUP PHOTOS .....</b>	<b>64</b>
FIGURE C.1 – SETUP PHOTO, BACK SIDE 5MM – MFP PHANTOM – BODY SAR .....	64
FIGURE C.2 – SETUP PHOTO, FRONT SIDE 5MM – MFP PHANTOM – BODY SAR.....	65
FIGURE C.3 – SETUP PHOTO, BACK SIDE -TOUCH – MFP PHANTOM – EXTREMITY SAR.....	66
FIGURE C.4 – SETUP PHOTO, FRONT SIDE -TOUCH – MFP PHANTOM – EXTREMITY SAR.....	67
FIGURE C.5 – SETUP PHOTO, LEFT EDGE 5MM - MFP PHANTOM – BODY SAR .....	68
FIGURE C.6 – SETUP PHOTO, LEFT EDGE - TOUCH – MFP PHANTOM – EXTREMITY SAR.....	69
FIGURE C.7 – SETUP PHOTO, BOTTOM EDGE – 5MM – MFP PHANTOM – BODY SAR.....	70
FIGURE C.8 – SETUP PHOTO, TOP EDGE - TOUCH – MFP PHANTOM – EXTREMITY SAR .....	71
<b>APPENDIX D – PROBE CALIBRATION.....</b>	<b>72</b>
<b>APPENDIX E – DIPOLE CALIBRATION .....</b>	<b>73</b>
<b>APPENDIX F - PHANTOM.....</b>	<b>74</b>

## 1.0 REVISION HISTORY

Revision History				
Samples Tested By:		Ben Hewson		Date(s) of Evaluation: 25, 29-30 December 2022
Report Prepared By:		Ben Hewson		Report Reviewed By: Art Voss
Report Revision	Description of Revision	Revised Section	Revised By	Revision Date
0.1	Draft	n/a	Ben Hewson	12 January 2023
1.0	Initial Release	n/a	Ben Hewson	18 January 2023

## 2.0 CLIENT AND DEVICE INFORMATION

Client Information	
Applicant Name	Garmin International Inc.
Applicant Address	1200 East 151 St
	Olathe, KS, 66062
	USA
DUT Information	
Device Identifier(s):	FCC ID: IPH-04577
	ISED ID:
Device Model(s) / HVIN:	A04577
Device Marketing Name / PMN:	A04577
Test Sample Serial No.:	Production Sample Prototype
Device Type:	Personal Navigation Device
Transmit Frequency Range:	ANT (DXX): 2402-2480MHz
	BT (DTS, DSS): 2402-2480MHz
	WiFi (DTS): 2412-2462MHz
	U-NII-1: 5180 - 5240, U-NII-3: 5745-5825
Manuf. Max. Rated Output Power:	ANT (DXX): 87.6 Average Power (dBμV/m@3m)
	BT BR (DSS): 8mW (9dBm)
	BT 2EDR (DTS): 5mW (7dBm)
	BT 3EDR (DTS): 5mW (7dBm)
	BT LE (DTS): 3mW (5dBm)
	802.11b (DTS): 58Mw (17.63dBm)
	802.11g (DTS): 45Mw (16.53dBm)
	802.11n (DTS): 52Mw (17.16dBm)
	U-NII-1/802.11a (DTS): 42mW (16.23dBm)
	U-NII-1/802.11n (DTS): 40mW (16.02dBm)
	U-NII-1/802.11n40 (DTS): 42mW (16.23dBm)
	U-NII-3/802.11a (DTS): 22mW (13.42dBm)
	U-NII-3/802.11n (DTS): 21mW (13.22dBm)
	U-NII-3/802.11n40 (DTS): 24mW (13.80dBm)
Antenna Type and Gain:	WiFi/BT/BT BLE/: 0 dBi PIFA, U-NII-1 & 3: 5 dBi PIFA
Modulation:	ANT: GFSK:
	BT BR: GFSK
	BT 2EDR: π/4-DQPSK
	Bt 3EDR: 8DPSK
	BLE: GMSK
	WiFi: CCK, DSSS, OFDM, CCK, MCS
DUT Power Source:	5V USB, Internal Li-Ion Battery
DUT Dimensions [LxWxH]	L x W x H: 155mm x 90mm x 25mm
Deviation(s) from standard/procedure:	None
Modification of DUT:	None

### 3.0 SCOPE OF EVALUATION

This Certification Report was prepared on behalf of:

**Garmin International Inc.**

,(the '*Applicant*'), in accordance with the applicable Federal Communications Commission (FCC) CFR 47 and Innovation, Scientific and Economic Development (ISED) Canada rules parts and regulations (the '*Rules*'). The scope of this investigation was limited to only the equipment, devices and accessories (the '*Equipment*') supplied by the *Applicant*. The tests and measurements performed on this *Equipment* were only those set forth in the applicable *Rules* and/or the Test and Measurement Standards they reference. The *Rules* applied and the Test and Measurement Standards used during this evaluation appear in the Normative References section of this report. The limits set forth in the technical requirements of the applicable *Rules* were applied to the measurement results obtained during this evaluation and ,unless otherwise noted, these limits were used as the Pass/Fail criteria. The Pass/Fail statements made in this report apply to only the tests and measurements performed on only the *Equipment* tested during this evaluation. Where applicable and permissible, information including test and measurement data and/or results from previous evaluations of same or similar equipment, devices and/or accessories may be cited in this report.

As per FCC 47 CFR Part §2.1091 and §2.1093, an RF Exposure evaluation report is required for this *Equipment* and the results of the RF Exposure evaluation appear in this report.

The A04577 FCC ID: IPH-04577, IC ID:1792A-04577 is a Low Power Digital Transmitter that offers use as a hand-held, transportation mounted or portable configuration , with a Wi-Fi transceiver that is capable of operating in the 2.4GHz WiFi, 5GHz U-NII-1 & 3 frequency bands as well as 2.4Ghz ANT /BT/BLE frequency bands. The device has two antennas, for the 2.4GHZ and a 5Ghz frequencies and is capable of simultaneous transmisson between the BT and UNII banks. The device is intended for General Population Use. The product operates from an internal proprietary Li-ion rechargeable battery which can be connected to a compliant USB interface port, AC or DC adapter for charging. Test samples provided by the manufacturer were capable of transmitting at select frequencies and modulations preset by the manufacturer. An additional antenna modification was prepared for one sample allowing the ability to connect test equipment for antenna port conducted power analysis. The DUT was evaluated for SAR at the maximum conducted output power level, preset by the manufacturer and in accordance with the procedures described in IEEE 62209-1528, FCC KDB 865646, 447498, 248227. A description of the device, operating configuration, detailed summary of the test results, methodology and procedures used in the evaluation, equipment used and the various provisions of the rules are included within this test report.

## 4.0 NORMATIVE REFERENCES

Normative References*	
ANSI / ISO 17025	General Requirements for competence of testing and calibration laboratories
FCC CFR Title 47 Part 2 Title 47: Part 2.1093:	Code of Federal Regulations Telecommunication Radiofrequency Radiation Exposure Evaluation: Portable Devices
IEC International Standard /IEEE International Committee on Electromagnetic Safety IEC/IEEE 62209-1528	Measurement procedure for the assessment of specific absorption rate of human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices - Part 1528; Human models, instrumentation, and procedures (Frequency range of 4 MHz to 10 GHz)
FCC KDB KDB 865664 D01v01r04	SAR Measurement Requirements for 100MHz to 6GHz
FCC KDB KDB 447498 D01v06	Mobile and Portable Devices RF Exposure Procedures and Equipment Authorization Policies
FCC KDB KDB 248227 D01v02r02	SAR Guidance for IEEE 802.11 (WiFi) Transmitters
* When the issue number or issue date is omitted, the latest version is assumed.	

## 5.0 STATEMENT OF COMPLIANCE

This measurement report demonstrates that samples of the product model(s) were evaluated for Specific Absorption Rate (SAR) on the date(s) shown, in accordance with the Measurement Procedures cited and were found to comply with the Standard(s) Applied based on the Exposure Limits of the Use Group indicated for which the product is intended to be used.

<b>Applicant:</b>	<b>Garmin International Inc.</b>		<b>Model / HVIN:</b>	<b>A04577</b>	
<b>Standard(s) Applied:</b>	<b>FCC 47 CFR §2.1093</b>		<b>Measurement Procedure(s):</b>	<b>FCC KDB 865664, FCC KDB 447498, FCC KDB 248227 IEC/IEEE Standard 62209-1528</b>	
<b>Reason For Issue:</b>	<input checked="" type="checkbox"/> <b>New Certification</b> <input type="checkbox"/> <b>Class I Permissive Change</b> <input type="checkbox"/> <b>Class II Permissive Change</b>		<b>Use Group:</b>	<input checked="" type="checkbox"/> <b>General Population / Uncontrolled</b>  <input type="checkbox"/> <b>Occupational / Controlled</b>	
<b>Reason for Change:</b>			<b>Limits Applied:</b>	<input checked="" type="checkbox"/> <b>1.6W/kg - 1g Volume</b> <input type="checkbox"/> <b>8.0W/kg - 1g Volume</b> <input checked="" type="checkbox"/> <b>4.0W/kg - 10g Volume</b>	
			<b>Date(s) Evaluated:</b>	<b>25, 29-30 December 2022</b>	

The results of this investigation are based solely on the test sample(s) provided by the applicant which was not adjusted, modified or altered in any manner whatsoever except as required to carry out specific tests or measurements. A description of the device, operating configuration, detailed summary of the test results, methodologies and procedures used during this evaluation, the equipment used and the various provisions of the rules are included in this test report.

I attest that the data reported herein is true and accurate within the tolerance of the Measurement Instrument Uncertainty; that all tests and measurements were performed in accordance with accepted practices or procedures; and that all tests and measurements were performed by me or by trained personnel under my direct supervision. The results of this investigation are based solely on the test sample(s) provided by the client which were not adjusted, modified or altered in any manner whatsoever, except as required to carry out specific tests or measurements. This test report has been completed in accordance with ISO/IEC 17025.



Ben Hewson  
Celltech Labs Inc.

12 January 2023  
Date



## 6.0 SAR MEASUREMENT SYSTEM

### SAR Measurement System

Celltech Labs Inc. SAR measurement facility employs a Dosimetric Assessment System (DASY™) manufactured by Schmid & Partner Engineering AG (SPEAG™) of Zurich, Switzerland. The DASY6 measurement system is comprised of the measurement server, a robot controller, a computer, a near-field probe, a probe alignment sensor, an Elliptical Planar Phantom (ELI) phantom and a specific anthropomorphic mannequin (SAM) phantom for Head and/or Body SAR evaluations. The robot is a six-axis industrial robot performing precise movements to position the probe to the location (points) of maximum electromagnetic field (EMF). A cell controller system contains the power supply, robot controller and a teach pendant (Joystick) to control the robot's servo motors. The Staubli robot is connected to the cell controller to allow software manipulation of the robot. A data acquisition electronic (DAE) circuit performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. is connected to the Electro-optical coupler (EOC). The EOC performs the conversion from the optical form the DAE to digital electronic signal and transfers data to the DASY6 measurement server. The DAE4 utilizes a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16-bit AD-converter, a command decoder and a control logic unit. Transmission to the DASY6 measurement server is accomplished through an optical downlink for data and status information and an optical uplink for commands and clock lines. The mechanical probe-mounting device includes two different sensor systems for frontal and sidewise probe contacts. The sensor systems are also used for mechanical surface detection and probe collision detection. The robot utilizes a controller with built in VME-bus computer.



**DASY 6 SAR System**



**DASY 6 Measurement Controller**

## 7.0 RF CONDUCTED POWER MEASUREMENT

Table 7.1 Conducted Power Measurements, 2.4 GHz WiFi

A04577-Conducted Power Measurements-Average									
Channel	Frequency (MHz)	Measured Power (dBm)	Rated Power (dBm)	Rated Power (W)	Delta (dB)	SAR Test Channel (Y/N)	Mode	BW (MHz)	Modulation
6	2437	16.12				-	WLAN 2.4G	20	DSSS-1Mbps
		16.31				-			DSSS-2Mbps
		16.57				-			DSSS-5.5Mbps
		16.45				-			DSSS-11Mbps
1	2412	17.63	17.63	0.06	0.00	Y	WLAN 2.4G	20	DSSS-5.5Mbps
6	2437	16.57	17.63	0.06	-1.06	Y			
11	2462	17.46	17.63	0.06	-0.17	Y			
6	2437	15.65				-	WLAN 2.4G	20	OFDM-6Mbps
		15.55				-			OFDM-9Mbps
		15.59				-			OFDM-12Mbps
		15.44				-			OFDM-36Mbps
1	2412	16.37	16.53	0.05	-0.16	-	WLAN 2.4G	20	OFDM-54Mbps
6	2437	15.65	16.53	0.05	-0.88	-			
11	2462	16.53	16.53	0.05	0.00	-			
6	2437	16.14				-	WLAN 2.4G	20	MCS-0
		16.08				-			MCS-3
		12.88				-			MCS-7
		17.16	17.16	0.05	0.00	-			
1	2412	16.14	17.16	0.05	-1.02	-	WLAN 2.4G	20	MCS-0
6	2437	16.14	17.16	0.05	-1.02	-			
11	2462	17.00	17.16	0.05	-0.16	-			

Table 7.2 Conducted Power Measurement Results, Bluetooth

A04577 - Conducted Power Measurements								
Channel	Frequency (MHz)	Measured Power (dBm)	*Rated Power (dBμ/Vm@3m)	*Rated Power (dBm)	Delta (dB)	SAR test Channel	Mode	Modulation
0-78	2402-2480		87.60			-	ANT	GFSK
2	2402.00	8.00		9.03	-1.03	-	BT BR	GFSK
41	2441.00	9.03		9.03	0.00	Y		
78	2480.00	7.98		9.03	-1.05	-		
2	2402.00	6.94		6.99	-0.05	-	BT 2EDR	π/4 -DQPSK
41	2441.00	6.99		6.99	0.00	-		
78	2480.00	6.86		6.99	-0.13	-		
2	2402.00	6.72		6.99	-0.27	-	BT 3EDR	8DPSK
41	2441.00	6.99		6.99	0.00	-		
78	2480.00	6.52		6.99	-0.47	-		
0-39	2402-2480			4.77		-	BT BLE	GMSK

\* Rated power from test reports of EMC lab ( DXX TstRpt 221013, DSS TstRpt 221013 d1, DTS TstRpt 221013)

Table 7.3 Conducted Power Measurements, 5 GHz WiFi UNI-1

A04577-Conducted Power Measurements										
Channel	Frequency (MHz)	Measured Power (dBm)	Rated Power (dBm)	Rated Power (W)	Delta (dB)	SAR Test Channel	Mode	BW (MHz)	Modulation	
36	5180	15.69				-	UNI-I 5G	20	OFDM6	802.11a
		15.59				-			OFDM9	
		15.56				-			OFDM12	
		13.08				-			OFDM54	
36	5180	15.69	16.23	0.04	-0.54	Y			OFDM6	
40	5200	15.93	16.23	0.04	-0.30	-				
44	5220	16.23	16.23	0.04	0.00	Y				
48	5240	15.92	16.23	0.04	-0.31	Y			802.11n	
36	5180	15.43				-				MCS0
		15.36				-				MCS3
		12.00				-				MCS7
36	5180	15.43	16.02	0.04	-0.59	-				MCS0
40	5200	15.82	16.02	0.04	-0.20	-				
44	5220	16.02	16.02	0.04	0.00	-				
48	5240	15.54	16.02	0.04	-0.48	-			MCS0	
38	5190	16.03	16.23	0.04	-0.20	-		40		
46	5230	16.23	16.23	0.04	0.00	-				802.11n40

Table 7.4 Conducted Power Measurements, 5 GHz WiFi UNI-3

A04577-Conducted Power Measurements									
Channel	Frequency (MHz)	Measured Power (dBm)	Rated Power (dBm)	Rated Power (W)	Delta (dB)	SAR Test Channel	Mode	BW (MHz)	Modulation
149	5745	13.41	13.42	0.022	-0.01	-	UNI-I 5G	20	OFDM6
153	5765	13.30	13.42	0.022	-0.12	-			
157	5785	13.23	13.42	0.022	-0.19	-			
161	5805	13.42	13.42	0.022	0.00	Y			802.11a
165	5825	13.37	13.42	0.022	-0.05	-			
149	5745	13.12	13.22	0.021	-0.10	Y			
153	5765	12.91	13.22	0.021	-0.31	-		40	OFDM6
157	5785	13.10	13.22	0.021	-0.12	-			
161	5805	13.22	13.22	0.021	0.00	-			
165	5825	13.21	13.22	0.021	-0.01	Y			802.11n
151	5190	13.55	13.80	0.024	-0.25	-			
159	5230	13.80	13.80	0.024	0.00	-			
									802.11n40

The rated power and tolerance are stated for typical transmission modes and data rates. Some modes and data rates may produce lower than rated conducted power levels. Power measurements taken across the various channels, modes and data rates did not produce levels in excess of the Rated Power plus Tolerance. SAR was evaluated using the power level setting specified by the manufacture to be the max output power and produce the most conservative SAR. SAR was evaluated at the maximum average tune up tolerance. See section 2.0 Client and Device Information for details. The reported SAR was not scaled down.

## 8.0 NUMBER OF TEST CHANNELS ( $N_c$ )

**Table 8.1 Number of Test Channels**

### Wi-Fi SAR Evaluation:

SAR was evaluated in DSSS mode at the maximum duty cycle. The power level setting selected was specified by the manufacturer to be the max output power and produce the most conservative SAR.

As per FCC KDB 248227, the required 802.11 test channels are Ch1, Ch 6 and Ch 11. The mid-channel conducted power at various bit rates was evaluated to derive the worse case and the conducted output power was investigated on channels 1, 6, 11 with this bit rate. The highest conducted power was found on Channel 1. As a result, this channel was selected for initial SAR evaluation.

SAR test reduction methodology was applied to reduce the total number of required test channels from the SAR test evaluation.

When applicable, SAR test reduction methods may be utilized.

802.11b DSSS SAR test reduction is determined according to the following:

- When the reported SAR of the highest measured maximum output power channel is  $\leq$  to 0.8 W/kg, no further SAR testing is required for 802.11b DSSS in that exposure configuration.
- When the reported SAR is  $>$  0.8 W/kg, SAR is required for that exposure configuration using the next highest output power channel. When any reported SAR is  $>$  1.2 W/Kg, SAR is required for the third channel.

### 2.4 GHz 802.11g/n OFDM SAR Test Exclusion Requirements

- When KDB Publication 447498 SAR test exclusion applies to the OFDM configuration.
- When the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is  $\leq$  1.2 W/kg.

The initial test configuration for 2.4 GHz and 5 GHz OFDM transmission modes is determined by the 802.11 configuration with the highest maximum output power specified for production units, including tune-up tolerance, in each standalone and aggregated frequency band. An initial test position was established for the 2.4 GHz and the UNII1 / UNII 3 bands.

When the reported SAR of the initial test configuration is  $>$  0.8 W/kg, SAR measurement is required for subsequent next highest measured output power channel(s) in the initial test configuration until reported SAR is  $\leq$  1.2 W/kg or all required channels are tested.


NOTE: The Bluetooth transmitter is capable of simultaneous transmission with the 5GHz WiFi Transmitter. The device SAR was evaluated for simultaneous SAR.

As per KDB 447498 D01V06, where appropriate SAR test exclusion based on antenna test separation distances may be applied.

- When the distance is < 50mm exclusion threshold is "Ratio". when the distance is >50 mm exclusion is in "mW"
- Maximum power is the source-based-time-average power and represents the maximum RF output power among production units.
- Per KDB 447498 D01v06, for larger devices, the test separation distance of adjacent edge configuration is determined by the closest separation between the antenna and the user
- Per KDB 447498 D01v06, standalone SAR test exclusion threshold is applied; If the test separation distance is < 5mm, 5mm is used to determine SAR exclusion threshold
- Per KDB 447498 D01v06, the 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at test separation distances ≤ 50mm are determined by; (step a)  

$$[(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm})] * [\sqrt{f(\text{GHz})}] \leq 3.0 \text{ for 1-g SAR and } \leq 7.5 \text{ for 10-g extremity SAR}$$
  - f(GHz) is the f channel transmit frequency in GHz
  - power and distance are rounded to the nearest MW and mm before calculation
  - result is rounded to one decimal place for comparison
  - the values 3.0 and 7.5 are referred to as numeric thresholds in step b
- Per KDB 447498 D01v06, at 100 MHz to 6 GHz and for test separation distance > 50mm, the SAR test exclusion threshold is determined according to the following; (step b)
  - [Power allowed at numeric threshold for 50 mm in step a) + test separation distance - 50mm)\*(f(MHz)/150)] mW, at 100 MHz to 1500 MHz
  - [Power allowed at numeric threshold for 50 mm in step a) + (test separation distance - 50mm)\* 10] mW at > 1500MHz and ≤ 6GHz

**Table 8.2 Antenna Distances**

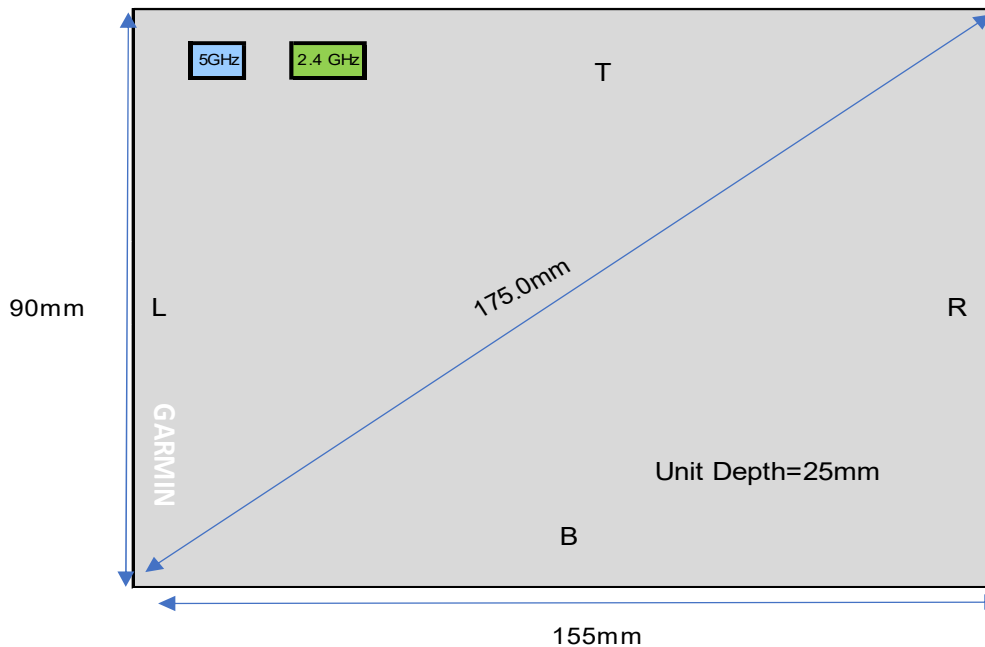

Antenna	Top Edge (mm)	Left Edge (mm)	Bottom Edge (mm)	Right Edge (mm)	Front Depth (mm)	Back Depth (mm)
WLAN/BT	10.0	35.0	72.0	115.0	12.0	11.0
5GHz	11.0	20.0	75.0	130.0	11.0	12.0

Table 8.3 SAR test exclusion based on antenna test separation distances \* Body

SAR Test Exclusion Analysis					
Antenna Separation to DUT Surfaces					
BODY Configuration (1g)		Band			
		BT/BLE ANT	2.4GHz WiFi	5GHz WLAN U-NII-1	5GHz WLAN U-NII-3
DUT Position	DUT Frequency (MHz)	2480	2480	5240	5825
	Power (mW)	8.00	58.00	42.00	24.00
	Antenna Gain (dBi)	0.00	0.00	5.00	5.00
	Total ERP (mW)	8.00	58.00	132.82	75.89
Front Side	Separation Distance (mm)	12.00	12.00	11.00	11.00
	Exclusion Threshold (Pth)(mW)	14.40	14.40	7.62	7.13
	Testing Required	No	Yes	Yes	Yes
Back Side	Separation Distance (mm)	11.00	11.00	12.00	12.00
	Exclusion Threshold (Pth)(mW)	12.20	12.20	9.12	8.55
	Testing Required	No	Yes	Yes	Yes
Bottom Edge	Separation Distance (mm)	72.00	72.00	75.00	75.00
	Exclusion Threshold (Pth)(mW)	437.09	437.09	402.85	393.87
	Testing Required	No	No	No	No
Left Edge	Separation Distance (mm)	35.00	35.00	20.00	20.00
	Exclusion Threshold (Pth)(mW)	110.63	110.63	26.21	24.86
	Testing Required	No	No	Yes	Yes

orientations for view ing - Portrait-left edge/back side only; Landscape-bottom edge/backside only

Table 8.3 SAR test exclusion based on antenna test separation distances Extremity

SAR Test Exclusion Analysis Antenna Separation to DUT Surfaces					
EXTREMITY Configuration (10g)		Band			
		BT/BLE ANT	2.4GHz WiFi	5GHz WLAN U-NII-1	5GHz WLAN U-NII-3
DUT Position	Frequency (MHz)	2480	2480	5240	5825
	Power (mW)	8.00	58.00	42.00	24.00
	Antenna Gain (dBi)	2.15	2.15	7.15	7.15
	Antenna Gain (dBd)	0.00	0.00	5.00	5.00
	Total ERP (mW)	8.00	58.00	132.82	75.89
Front Side	Separation Distance (mm)	12.00	12.00	11.00	11.00
	Exclusion Threshold (Pth)(mW)	36.00	36.00	19.04	17.81
	Testing Required	No	Yes	Yes	Yes
Back Side	Separation Distance (mm)	11.00	11.00	12.00	12.00
	Exclusion Threshold (Pth)(mW)	30.50	30.50	22.79	21.37
	Testing Required	No	Yes	Yes	Yes
Top Edge	Separation Distance (mm)	10.00	10.00	11.00	11.00
	Exclusion Threshold (Pth)(mW)	25.44	25.44	19.04	17.81
	Testing Required	No	Yes	Yes	Yes
Bottom Edge	Separation Distance (mm)	72.00	72.00	75.00	75.00
	Exclusion Threshold (Pth)(mW)	1092.72	1092.72	1007.13	984.68
	Testing Required	No	No	No	No
Left Edge	Separation Distance (mm)	35.00	35.00	20.00	20.00
	Exclusion Threshold (Pth)(mW)	276.57	276.57	65.53	62.15
	Testing Required	No	No	Yes	Yes
Right Edge	Separation Distance (mm)	115.00	115.00	130.00	130.00
	Exclusion Threshold (Pth)(mW)	2666.11	2666.11	3139.85	3108.92
	Testing Required	No	No	No	No



## 9.0 ACCESSORIES EVALUATED

### Table 9.1 Manufacturer's Accessory List

There are no manufacturer's accessories available when used in a portable application.

## 10.0 SAR MEASUREMENT SUMMARY

Table 10.1: Measured Results, Body (1g)

Measured 1g SAR Results - BODY Configuration																
Date	Plot ID	Test Frequency (MHz)	DUT Configuration					Accessories	Spacing		Measured SAR (W/kg)	SAR Drift (dB)	Delta Power (dB)	Crest Factor n	Fluid Sensitivity %	Reported SAR (W/kg)
			Pos	Mode	BW	Mod	BR		DUT (mm)	Antenna (mm)						
25 Dec 2022	B1	2412	Back-5mm	802.11b	20	DSSS	5.5	-	5	16	0.367	0.110	0.000	1.010	1.000	0.371
25 Dec 2022	B2	2412	Front-5mm	802.11b	20	DSSS	5.5	-	5	17	0.090	0.290	0.000	1.010	1.000	0.091
29 Dec 2022	B3	2437	Back-5mm	802.11b	20	DSSS	5.5	-	5	16	0.347	0.100	-1.060	1.010	1.000	0.447
29 Dec 2022	B4	2462	Back-5mm	802.11b	20	DSSS	5.5	-	5	16	0.428	-0.030	-0.170	1.010	1.000	0.453
29 Dec 2022	B5	2472	Back-5mm	802.11b	20	DSSS	5.5	-	5	16	0.278	-0.070	-1.330	1.010	1.000	0.388
29 Dec 2022	B6	2441	Back-5mm	BT BR	20	GFSK	1	-	5	16	0.190	0.660	0.000	1.000	1.000	0.190
29 Dec 2022	B7	2441	Front-5mm	BT BR	20	GFSK	1	-	5	17	0.007	0.290	0.000	1.000	1.000	0.007
30 Dec 2022	B8	5220	Back-5mm	UNI-1 802.11a	20	OFDM	6	-	5	16	0.228	-0.190	0.000	1.030	1.000	0.245
30 Dec 2022	B9	5220	Front-5mm	UNI-1 802.11a	20	OFDM	6	-	5	17	0.044	0.500	0.000	1.030	1.000	0.045
30 Dec 2022	B10	5220	Left-5mm	UNI-1 802.11a	20	OFDM	6	-	5	25	0.189	1.810	0.000	1.030	1.000	0.195
30 Dec 2022	B11	5220	Bottom -5mm	UNI-1 802.11a	20	OFDM	6	-	5	80	0.040	1.390	0.000	1.030	1.000	0.041
30 Dec 2022	B12	5180	Back-5mm	UNI-1 802.11a	20	OFDM	6	-	5	16	0.207	0.160	-0.540	1.030	1.000	0.241
30 Dec 2022	B13	5240	Back-5mm	UNI-1 802.11a	20	OFDM	6	-	5	16	0.219	0.050	-0.310	1.030	1.000	0.242
30 Dec 2022	B14	5805	Back-5mm	UNI-3 802.11a	20	OFDM	6	-	5	16	0.249	0.100	0.000	1.030	1.000	0.256
30 Dec 2022	B15	5745	Back-5mm	UNI-3 802.11a	20	OFDM	6	-	5	16	0.249	0.480	-0.010	1.030	1.000	0.257
30 Dec 2022	B16	5825	Back-5mm	UNI-3 802.11a	20	OFDM	6	-	5	16	0.247	0.360	-0.050	1.030	1.000	0.257
Applicable SAR Limit								Use Group					Limit			
FCC CFR 2.1093								Health Canada Safety Code 6					General Population/User Unaware			
													1.6 W/kg			

**Table 10.2: Measured Results, Extremity (10g)**

Measured 10g SAR Results - EXTREMITY Configuration																
Date	Plot ID	Test Frequency (MHz)	DUT Configuration					Accessories	Spacing		Measured SAR (W/kg)	SAR Drift (dB)	Delta Power dB	Crest Factor n	Fluid Sensitivity n	Reported SAR (W/kg)
			Pos	Mode	BW	Mod	BR		DUT (mm)	Antenna (mm)						
25 Dec 2022	E1	2412	Back-0mm	802.11b	20	DSSS	5.5	-	0	11	0.295	0.180	0.000	1.010	1.000	0.298
25 Dec 2022	E2	2412	Front-0mm	802.11b	20	DSSS	5.5	-	0	12	0.080	0.110	0.000	1.010	1.000	0.080
29 Dec 2022	E3	2412	Top Edge-0mm	802.11b	20	DSSS	5.5	-	0	10	0.356	0.180	0.000	1.010	1.000	0.360
29 Dec 2022	E6	2437	Top Edge-0mm	802.11b	20	DSSS	5.5	-	0	10	0.252	0.140	-1.060	1.010	1.000	0.325
29 Dec 2022	E7	2462	Top Edge-0mm	802.11b	20	DSSS	5.5	-	0	10	0.292	-0.020	-0.170	1.010	1.000	0.308
29 Dec 2022	E9	2441	Top Edge-0mm	BT BR		GFSK	1	-	0	10	0.021	0.190	0.000	1.000	1.000	0.021
30 Dec 2022	E10	5220	Back-0mm	UNI-1 802.11a	20	OFDM	6	-	0	12	0.131	0.170	0.000	1.030	1.000	0.135
30 Dec 2022	E11	5220	Front-0mm	UNI-1 802.11a	20	OFDM	6	-	0	11	0.035	0.050	0.000	1.030	1.000	0.036
30 Dec 2022	E12	5220	Top Edge-0mm	UNI-1 802.11a	20	OFDM	6	-	0	11	0.126	1.020	0.000	1.030	1.000	0.130
30 Dec 2022	E13	5220	left Edge-0mm	UNI-1 802.11a	20	OFDM	6	-	0	20	0.083	0.150	0.000	1.030	1.000	0.085
30 Dec 2022	E14	5180	Back-0mm	UNI-1 802.11a	20	OFDM	6	-	0	12	0.125	0.100	-0.540	1.030	1.000	0.146
30 Dec 2022	E15	5240	Back-0mm	UNI-1 802.11a	20	OFDM	6	-	0	12	0.137	0.000	-0.310	1.030	1.000	0.152
30 Dec 2022	E16	5805	Back-0mm	UNI-3 802.11a	20	OFDM	6	-	0	12	0.102	0.320	0.000	1.030	1.000	0.105
30 Dec 2022	E17	5745	Back-0mm	UNI-3 802.11a	20	OFDM	6	-	0	12	0.112	0.300	-0.010	1.030	1.000	0.116
30 Dec 2022	E18	5825	Back-0mm	UNI-3 802.11a	20	OFDM	6	-	0	12	0.112	0.310	-0.050	1.030	1.000	0.117
Applicable SAR Limit								Use Group				Limit				
ICNIRP			ARPANSA					General Population/User Unaware				4 W/kg				

## 11.0 SCALING OF MAXIMUM MEASURE SAR

Table 11.1 SAR Scaling – Body (1g)

Scaling of Maximum Measured SAR (1g)				
Measured Parameters		Configuration		
		Body	Body	Body
Plot ID		B4	B6	B8
Maximum Measured SAR <sub>M</sub>		0.428	0.190	0.228
Frequency		2462	2441	5220
Drift	Power Drift	-0.030	0.660 (1)	-0.190
Conducted Power		17.460	9.030	15.740
DC	Transmit Duty Cycle	99.010	100.0	97.1
Fluid Deviation from Target				
Δε	Permittivity	-7.32%	-7.28%	-4.09% (2)
Δσ	Conductivity	8.06%	7.87%	2.35% (2)

Note(1): Power Drift is Positive, Drift Adjustment not Required.

Note(2): Fluid Dielectric Parameters are Within 5% of Targets. SAR Adjustment for Fluid Sensitivity is not Required.

Fluid Sensitivity Calculation (1g)		IEC/IEEE 62209-1528 7.8.2		
Delta SAR = Ce * Δε + Cσ * Δσ (8)				
Ce = (-0.0007854*f³) + (0.009402*f²) - (0.02742*f) - 0.2026 (9)				
Cσ = (0.009804*f³) - (0.08661*f²) + (0.02981*f) + 0.7829 (10)				
f	Frequency (GHz)	2.462	2.441	5.22
Ce		-0.159	-0.159	-0.256
Cσ		0.257	0.261	-0.053
Ce * Δε		0.012	0.012	0.010
Cσ * Δσ		0.021	0.021	-0.001
ΔSAR		0.032 (3)	0.032 (3)	0.009 (%)

Note(3): Delta SAR is Positive, SAR Adjustment for Fluid Sensitivity is not Required, in accordance with ISED Notice 2012-DRS0529

Manufacturer's Tuneup Tolerance				
Measured Conducted Power		17.460	9.030	15.740
Rated Conducted Power		17.630	9.030	15.740
ΔP		-0.170	0.000 (4)	0.000 (4)

Note(4): SAR was Evaluated at the Maximum Tuneup Tolerance. SAR Adjustment is not Required.

Crest Factor				
Transmit Duty Cycle (DC)		99.010	100.0	97.1
CF (1/DC)		1.010	1.00	1.03

Note(5): Crest Factor = 1 (100% Duty Cycle), Crest Factor Adjustment not Required.

SAR Adjustment for Fluid Sensitivity				
SAR <sub>1</sub> = SAR <sub>M</sub> X [ΔSAR]		0.428	0.190	0.228
SAR Adjustment for Tuneup Tolerance				
SAR <sub>2</sub> = SAR <sub>1</sub> + [ΔP]		0.445	0.190	0.228
SAR Adjustment for Drift				
SAR <sub>3</sub> = SAR <sub>2</sub> + [Drift]		0.448	0.190	0.238
SAR Adjustment for Crest Factor				
SAR <sub>4</sub> = SAR <sub>3</sub> x [CF]		0.453	0.190	0.245
reported 1g SAR				
SAR <sub>4</sub>		0.45	0.19	0.25

Table 11.2 SAR Scaling – Extremity (10g)

Scaling of Maximum Measured SAR (10g)				
Measured Parameters		Configuration		
		Extremity	Extremity	Extremity
Plot ID		E3	E9	E15
Maximum Measured SAR <sub>M</sub>		0.356	0.021	0.137
Frequency		2412	2441	5240
Drift	Power Drift	0.180 (1)	0.190 (1)	0.000 (1)
Conducted Power		17.630	9.030	15.430
DC	Transmit Duty Cycle	99.010	100.0	97.1
Fluid Deviation from Target				
Δe	Permittivity	-7.39%	-7.28%	-4.62% (2)
Δσ	Conductivity	6.92%	7.87%	3.62% (2)

Note(1): Power Drift is Positive, Drift Adjustment not Required.

Note(2): Fluid Dielectric Parameters are Within 5% of Targets. SAR Adjustment for Fluid Sensitivity is not Required.

Fluid Sensitivity Calculation (10g)		IEC/IEEE 62209-1528 7.8.2		
Delta SAR = Ce * Δe + Cσ * Δσ		(8)		
Ce = (0.003456*f <sup>3</sup> ) - (0.03531*f <sup>2</sup> ) + (0.07675*f) - 0.186		(11)		
Cσ = (0.004479*f <sup>3</sup> ) - (0.01586*f <sup>2</sup> ) - (0.1972*f) + 0.7717		(12)		
f	Frequency (GHz)	2.412	2.441	5.24
	Ce	-0.158	-0.159	-0.256
	Cσ	0.267	0.261	-0.053
	Ce * Δe	0.012	0.012	0.012
	Cσ * Δσ	0.018	0.021	-0.002
	ΔSAR	0.030 (3)	0.032 (3)	0.010 (%)

Note(3): Delta SAR is Positive, SAR Adjustment for Fluid Sensitivity is not Required, in accordance with ISED Notice 2012-DRS0529

Manufacturer's Tuneup Tolerance				
Measured Conducted Power		17.630	9.030	15.430
Rated Conducted Power		17.630	9.030	15.740
ΔP		0.000 (4)	0.000 (4)	-0.310 (4)

Note(4): SAR was Evaluated at the Maximum Tuneup Tolerance. SAR Adjustment is not Required.

Crest Factor				
Transmit Duty Cycle (DC)		99.010	100.0	97.1
CF (1/DC)		1.010	1.00	1.03

Note(5): Crest Factor = 1 (100% Duty Cycle), Crest Factor Adjustment not Required.

SAR Adjustment for Fluid Sensitivity				
SAR <sub>1</sub> = SAR <sub>M</sub> X [ΔSAR]		0.356	0.021	0.137
SAR Adjustment for Tuneup Tolerance				
SAR <sub>2</sub> = SAR <sub>1</sub> + [ΔP]		0.356	0.021	0.147
SAR Adjustment for Drift				
SAR <sub>3</sub> = SAR <sub>2</sub> + [Drift]		0.356	0.021	0.147
SAR Adjustment for Crest Factor				
SAR <sub>4</sub> = SAR <sub>3</sub> x [CF]		0.360	0.021	0.152
reported 10g SAR				
SAR <sub>4</sub>		0.36	0.02	0.15

NOTES to Table	
<p>Scaling of the Maximum Measured SAR is based on the highest Face, Body and/or Head SAR measured of ALL test channels, configurations and accessories used during THIS evaluation. The Measured Fluid Deviation parameters apply only to deviation of the tissue equivalent fluids used at the frequencies which produced the highest measured SAR. The Measured Conducted Power applies to the Conducted Power measured at the frequencies producing the highest Face, Body and/or Head SAR. The Measured Drift is the SAR drift associated with that specific SAR measurement. The Reported SAR is the accumulation of all SAR Adjustments from the applicable Steps 1 through 4. The Plot ID is for identification of the SAR Measurement Plots in the Annexes of this report.</p> <p>NOTE: Some of the scaling factors in Steps 1 through 4 may not apply and are identified by grayed fields.</p>	
<b>Step 1</b>	<p>Per IEC/IEEE 62209-1528, FCC KDB 865664, ISED RSS-102 and ISED Notice 2012-DRS0529. Scaling required only when Measured Fluid Deviation is greater than 5%. If the Measured Fluid Deviation is greater than 5%, Table 10.1 will be shown and will indicate the SAR scaling factor in percent (%). SAR is MULTIPLIED by this scaling factor only when the scaling factor is positive (+).</p>
<b>Step 2</b>	<p>Per IEC/IEEE 62209-1528, FCC KDB 865664 and ISED RSS-102. Scaling required only when the difference (Delta) between the Measured Conducted Power and the Manufacturer's Rated Conducted Power is (-) Negative.</p> <p>The absolute value of Delta is ADDED to the SAR.</p>
<b>Step 3</b>	<p>Per IEC/IEEE 62209-1528, FCC KDB 865664 and ISED RSS-102. Scaling required only when Measured Drift is (-) Negative. The absolute value of Measured Drift is added to Reported.</p>
<b>Step 4</b>	<p>Per IEC/IEEE 62209-1528, FCC KDB 865664 and ISED RSS-102. When the transmit Duty Cycle (DC) is less than 100%, the <u>reported</u> SAR must be scaled to 100% by the Crest Factor (CF). <math>CF = 1/DC</math> where DC is in decimal.</p>
<b>Step 5</b>	<p>The Reported SAR is the Maximum Final Adjusted SAR from the applicable Steps 1 through 4 and are reported on Page 1 of this report.</p>

### 11.3 Simultaneous Transmission SAR Analysis

The WiFi 5Ghz and BT 2.4GHz transmitters are capable of simultaneous transmission. The simultaneous transmission SAR is given by:

$$SAR_{TOTAL} = SAR_{WiFi} + SAR_{BT}$$

For simultaneous Body (1g) SAR, the following applies:

reported  $SAR_{WiFi} = 0.25W/kg$

reported  $SAR_{BT} = 0.19W/kg$

$$SAR_{TOTAL} = SAR_{WiFi} + SAR_{BT}$$

$$SAR_{TOTAL} = 0.25W/kg + 0.19W/kg = 0.44W/kg$$

For simultaneous Extremity (10g) SAR, the following applies:

reported  $SAR_{WiFi} = 0.15W/kg$

reported  $SAR_{BT} = 0.02W/kg$

$$SAR_{TOTAL} = SAR_{WiFi} + SAR_{BT}$$

$$SAR_{TOTAL} = 0.15W/kg + 0.02W/kg = 0.17W/kg$$

## 12.0 SAR EXPOSURE LIMITS

Table 12.1 Exposure Limits

SAR RF EXPOSURE LIMITS			
FCC 47 CFR§2.1093	Health Canada Safety Code 6	General Population / Uncontrolled Exposure <sup>(4)</sup>	Occupational / Controlled Exposure <sup>(5)</sup>
Spatial Average <sup>(1)</sup> (averaged over the whole body)		0.08 W/kg	0.4 W/kg
Spatial Peak <sup>(2)</sup> (Head and Trunk averaged over any 1 g of tissue)		1.6 W/kg	8.0 W/kg
Spatial Peak <sup>(3)</sup> (Hands/Wrists/Feet/Ankles averaged over 10 g)		4.0 W/kg	20.0 W/kg
(1) The Spatial Average value of the SAR averaged over the whole body.			
(2) The Spatial Peak value of the SAR averaged over any 1 gram of tissue, defined as a tissue volume in the shape of a cube and over the appropriate averaging time.			
(3) The Spatial Peak value of the SAR averaged over any 10 grams of tissue, defined as a tissue volume in the shape of a cube and over the appropriate averaging time.			
(4) Uncontrolled environments are defined as locations where there is potential exposure to individuals who have no knowledge or control of their potential exposure.			
(5) Controlled environments are defined as locations where there is potential exposure to individuals who have knowledge of their potential exposure and can exercise control over their exposure.			



## 13.0 DETAILS OF SAR EVALUATION

### 13.1 Day Log

DAY LOG					Fluid Dielectric	SPC	Test	
Date	Ambient Temp (°C)	Fluid Temp (°C)	Relative Humidity (%)	Barometric Pressure (kPa)				
25 Dec 2022	24.0	23.1	15%	103.1	X	X	X	2450H
29 Dec 2022	25.0	23.7	18%	101.7	X	X	X	2450H
30 Dec 2022	23.7	22.5	20%	100.1	X	X	X	5250H
30 Dec 2022	23.7	22.7	20%	100.1	X	X	X	5750H

## 13.2 DUT Setup and Configuration

DUT Setup and Configuration	
Overview	<p>The DUT was evaluated for Body SAR at the maximum conducted output power level, preset by the manufacturer, with a fully charged battery in unmodulated continuous transmit operation ( Maximum duty cycle), as provided by the manufacturer with a unit set up and pre-installed with Compliance Test Mode.</p>

## 13.3 DUT Positioning

DUT Positioning	
Positioning	<p>The DUT Positioner was securely fastened to the Phantom Platform to ensure consistent positioning of the DUT for each test evaluation.</p>
FACE Configuration	<p>This device is not capable of voice communication and was not tested in the FACE configuration.</p>
BODY Configuration	<p>There are no Body-Worn and Audio Accessories for this device however the device could be rested on the torso while transmitting. BODY configuration was evaluted at a separation distance of 5mm.</p>
HEAD Configuration	<p>This device is not intended to be held to the ear and was not tested in the HEAD configuration.</p>
EXTREMITY Configuration	<p>The DUT, was securely clamped into the device holder with the surface of the DUT normally in contact with the body (hand) in direct contact with the bottom of the phantom, or 0mm separation from the DUT to the phantom resembling that for which it was intended to be used.</p>

## 13.4 General Procedures and Report

General Procedures and Reporting	
General Procedures	<p>The fluid dielectric parameters of the Active Tissue Simulating Liquid (TSL) were measured as described in this Section, recorded and entered into the DASY Measurement Server. Active meaning the TSL used during the SAR evaluation of the DUT. The temperature of the Active TSL was measured and recorded prior to performing a System Performance Check (SPC). An SPC was performed with the Active TSL prior to the start of the test series. The temperature of the Active TSL was measured throughout the day and the Active TSL temperature was maintained to <math>\pm 0.5^{\circ}\text{C}</math>. The Active TSL temperature was maintained to within <math>\pm 2.0^{\circ}\text{C}</math> throughout the test series. The liquid parameters shall be measured within 24 hours before the start of a test series and if it takes longer than 48 hours, the liquid parameters shall also be measured at the end of the test series.</p> <p>An Area Scan exceeding the length and width of the DUT projection was performed and the locations of all maximas within 2dB of the Peak SAR recorded. A Zoom Scan centered over the Peak SAR location(s) was performed and the 1g and 10g SAR values recorded. The resolutions of the Area Scan and Zoom Scan are described in the Scan Resolution table(s) in this Section. A Power Reference Measurement was taken at the phantom reference point immediately prior to the Area Scan. A Power Drift measurement was taken at the phantom reference point immediately following the Zoom Scan to determine the power drift. A Z-Scan from the <u>Maximum Distance to Phantom Surface</u> to the fluid surface was performed following the power drift measurement.</p>
Reporting	<p>The 1g SAR, 10g SAR and power drift measurements are recorded in the SAR Measurement Summary tables in the SAR Measurement Summary Section of this report. The SAR values shown in the SAR column are the SAR values reported by the SAR Measurement Server with the DUT operating at maximum transmit duty cycle. These tables also include other information such as transmit channel and frequency, modulation, accessories tested and DUT-phantom separation distance.</p> <p>In the Scaling of Maximum Measured SAR Section of this report, the highest measured SAR in the BODY configuration, within the entire scope of this assessment, are, when applicable, scaled for Fluid Sensitivity, Manufacturer's Tune-Up Tolerance, Simultaneous Transmission and Drift. With the exception of Duty Cycle correction/compensation, SAR values are <u>ONLY</u> scaled up, not down. The final results of this scaling is the <u>reported SAR</u> which appears on the Cover Page of this report.</p>

### 13.5 Fluid Dielectric and Systems Performance Check

Fluid Dielectric and Systems Performance Check	
<b>Fluid Dielectric Measurement Procedure</b>	<p>The fluid dielectric parameters of the Tissue Simulating Liquid (TSL) are measured using the Open-Ended Coax Method connected to an Agilent 8753ET Network Analyzer connected to a measurement server running April Dielectric Property Measurement System. A frequency range of <math>\pm 100\text{MHz}</math> for frequencies <math>&gt; 300\text{MHz}</math> and <math>\pm 50\text{MHz}</math> for frequencies <math>\leq 300\text{MHz}</math> with frequency step size of <math>10\text{MHz}</math> is used. The center frequency is centered around the SAR measurement probe's calibration point for that TSL frequency range. A calibration of the setup is performed using a short-open-deionized water (at <math>23^{\circ}\text{C}</math> in a <math>300\text{ml}</math> beaker) method. A sample of the TSL is placed in a <math>300\text{ml}</math> beaker and the open-ended coax is submerged approximately <math>8\text{mm}</math> below the fluid surface in the approximate center of the beaker. A check of the setup is made to ensure no air is trapped under the open-ended coax. The sample of TSL is measured and compared to the FCC KDB 865664 targets for HEAD or BODY for the entire fluid measurement range. Fluid adjustment are made if the dielectric parameters are <math>&gt; 5\%</math> in range that the DUT is to be tested. If the adjustments fail to bring the parameters to <math>\leq 5\%</math> but are <math>&lt; 10\%</math>, the SAR Fluid Sensitivity as per IEC 62209-1528 and FCC KDB 865664 are applied to the highest measured SAR. A TSL with dielectric parameters <math>&gt; 10\%</math> in the DUT test frequency range are not used.</p>
<b>Systems Performance Check</b>	<p>The fluid dielectric parameters of the Active TSL are entered into the DASY Measurement Server at each of the <math>10\text{MHz}</math> step size intervals. Active meaning the TSL used during the SAR evaluation of the DUT. The DASY Measurement System will automatically interpolate the dielectric parameters for DUT test frequencies that fall between the <math>10\text{MHz}</math> step intervals.</p> <p>A Systems Performance Check (SPC) is performed in accordance with IEC 62209-1528 "System Check" and FCC KDB 865664 "System Verification". A validation source, dipole or Confined Loop Antenna (CLA), is placed under the geometric center of the phantom and separated from the phantom in accordance to the validation source's Calibration Certificate data. A CW signal set to the frequency of the validate source's and SAR measurement probe's calibration frequency with a forward power set to the validation source's Calibration Certificate data power setting is applied to the validation source. An Area Scan is centered over the projection of the validation source's feed point and an Area Scan is taken. A Zoom Scan centered over the Peak SAR measurement of the Area Scan and the <math>1\text{g}</math> and <math>10\text{g}</math> SAR is measured. The measured <math>1\text{g}</math> and <math>10\text{g}</math> SAR is compared to the <math>1\text{g}</math> and <math>10\text{g}</math> SAR measurements from the validation source's Calibration Certificate. When required, the measured SAR is normalized to <math>1.0\text{W}</math> and compared to the normalized SAR indicated on the validation source's Calibration Certificate. The SPC is considered valid when the measured and normalized SAR is <math>\leq 10\%</math> of the measured and normalize SAR of the validation source's Calibration Certificate.</p> <p>The fluid dielectric parameters of the Active TSL and SPC are repeated when the Active TSL has been in use for greater than <math>84</math> hours or if the Active TSL temperature has exceed <math>\pm 1^{\circ}\text{C}</math> of the initial fluid analysis.</p>

### 13.6 Scan Resolution 100MHz to 2GHz

Scan Resolution 100MHz to 2GHz	
Maximum distance from the closest measurement point to phantom surface: (Geometric Center of Probe Center)	$4 \pm 1 \text{ mm}$
Maximum probe angle normal to phantom surface. (Flat Section ELI Phantom)	$5^{\circ} \pm 1^{\circ}$
Area Scan Spatial Resolution $\Delta X, \Delta Y$	$15 \text{ mm}$
Zoom Scan Spatial Resolution $\Delta X, \Delta Y$	$7.5 \text{ mm}$
Zoom Scan Spatial Resolution $\Delta Z$ (Uniform Grid)	$5 \text{ mm}$
Zoom Scan Volume X, Y, Z	$30 \text{ mm}$
Phantom	ELI
Fluid Depth	$150 \pm 5 \text{ mm}$
An Area Scan with an area extending beyond the device was used to locate the candidate maximas within $2\text{dB}$ of the global maxima.	
A Zoom Scan centered over the peak SAR location(s) determined by the Area Scan was used to determine the $1\text{-gram}$ and $10\text{-gram}$ peak spatial-average SAR	

### 13.7 Scan Resolution 2GHz to 3GHz

Scan Resolution 2GHz to 3GHz	
Maximum distance from the closest measurement point to phantom surface: (Geometric Center of Probe Center)	4 ± 1 mm
Maximum probe angle normal to phantom surface. (Flat Section ELI Phantom)	5° ± 1°
Area Scan Spatial Resolution ΔX, ΔY	12 mm
Zoom Scan Spatial Resolution ΔX, ΔY	5 mm
Zoom Scan Spatial Resolution ΔZ (Uniform Grid)	5 mm
Zoom Scan Volume X, Y, Z	30 mm
Phantom	ELI
Fluid Depth	150 ± 5 mm
An Area Scan with an area extending beyond the device was used to locate the candidate maximas within 2dB of the global maxima.	
A Zoom Scan centered over the peak SAR location(s) determined by the Area Scan was used to determine the 1-gram and 10-gram peak spatial-average SAR	

### 13.8 Scan Resolution 5GHz to 6GHz

Scan Resolution 5GHz to 6GHz	
Maximum distance from the closest measurement point to phantom surface: (Geometric Center of Probe Center)	4 ± 1 mm
Maximum probe angle normal to phantom surface. (Flat Section ELI Phantom)	5° ± 1°
Area Scan Spatial Resolution ΔX, ΔY	10 mm
Zoom Scan Spatial Resolution ΔX, ΔY	4 mm
Zoom Scan Spatial Resolution ΔZ (Uniform Grid)	2 mm
Zoom Scan Volume X, Y, Z	22 mm
Phantom	ELI
Fluid Depth	100 ± 5 mm
An Area Scan with an area extending beyond the device was used to locate the candidate maximas within 2dB of the global maxima.	
A Zoom Scan centered over the peak SAR location(s) determined by the Area Scan was used to determine the 1-gram and 10-gram peak spatial-average SAR	

## 14.0 MEASUREMENT UNCERTAINTIES

### Table 14.1 Measurement Uncertainty

Per FCC KDB 865664 D01v01r04, 2.8.2, SAR Measurement Uncertainty is only required when the reported SAR is:

- ≥ 1.5 W/kg (General Population) 1g
- ≥ 3.75 W/kg (General Population) 10g Extremity
- ≥ 7.5 W/kg (Occupational) 1g
- ≥ 18.75 W/kg (Occupational) 10g Extremity

The highest reported SAR for this evaluation is < 1.5 W/kg.

Table 14.2 Calculation of Degrees of Freedom

Calculation of the Degrees and Effective Degrees of Freedom	
$v_i = n - 1$	$v_{\text{eff}} = \frac{u_c^4}{m \sum_{i=1} \frac{c_i^4 u_i^4}{v_i}}$

## 15.0 FLUID DIELECTRIC PARAMETERS

Table 15.1 Fluid Dielectric Parameters 2450MHz HEAD TSL

FLUID DIELECTRIC PARAMETERS							
Date:	25 Dec 2022	Fluid Temp:	23.1	Frequency:	2450MHz	Tissue:	Head
Freq (MHz)		Test_e	Test_s	Target_e	Target_s	Deviation Permittivity	Deviation Conductivity
2400.0000		35.8000	1.7000	39.2900	1.76	-8.88%	-3.41%
2410.0000		35.6900	1.7100	39.2700	1.76	-9.12%	-2.84%
2412.0000	*	35.6720	1.7160	39.2660	1.76	-9.15%	-2.61%
2420.0000		35.6000	1.7400	39.2500	1.77	-9.30%	-1.69%
2430.0000		35.6900	1.7400	39.2400	1.78	-9.05%	-2.25%
2437.0000	*	35.6410	1.7610	39.2260	1.79	-9.14%	-1.45%
2440.0000		35.6200	1.7700	39.2200	1.79	-9.18%	-1.12%
2450.0000		35.6900	1.7600	39.2000	1.80	-8.95%	-2.22%
2460.0000		35.7600	1.7600	39.1900	1.81	-8.75%	-2.76%
2462.0000	*	35.7920	1.7660	39.1860	1.81	-8.66%	-2.54%
2470.0000		35.9200	1.7900	39.1700	1.82	-8.30%	-1.65%
2472.0000	*	35.8440	1.7880	39.1680	1.82	-8.49%	-1.87%
2480.0000		35.5400	1.7800	39.1600	1.83	-9.24%	-2.73%

\*Channel Frequency Tested

Table 15.2 Fluid Dielectric Parameters 2450MHz HEAD TSL

FLUID DIELECTRIC PARAMETERS							
Date:	29 Dec 2022	Fluid Temp:	23.7	Frequency:	2450MHz	Tissue:	Head
Freq (MHz)		Test_e	Test_s	Target_e	Target_s	Deviation Permittivity	Deviation Conductivity
2400.0000		36.4500	1.8700	39.2900	1.76	-7.23%	6.25%
2410.0000		36.3900	1.8800	39.2700	1.76	-7.33%	6.82%
2412.0000	*	36.3640	1.8840	39.2660	1.76	-7.39%	6.92%
2420.0000		36.2600	1.9000	39.2500	1.77	-7.62%	7.34%
2430.0000		36.5400	1.9200	39.2400	1.78	-6.88%	7.87%
2437.0000	*	36.4280	1.9270	39.2260	1.79	-7.13%	7.83%
2440.0000		36.3800	1.9300	39.2200	1.79	-7.24%	7.82%
2441.0000	*	36.3610	1.9320	39.2180	1.79	-7.28%	7.87%
2450.0000		36.1900	1.9500	39.2000	1.80	-7.68%	8.33%
2460.0000		36.2900	1.9600	39.1900	1.81	-7.40%	8.29%
2462.0000	*	36.3180	1.9580	39.1860	1.81	-7.32%	8.06%
2470.0000		36.4300	1.9500	39.1700	1.82	-7.00%	7.14%
2472.0000	*	36.3880	1.9560	39.1680	1.82	-7.10%	7.35%
2480.0000		36.2200	1.9800	39.1600	1.83	-7.51%	8.20%

\*Channel Frequency Tested



Table 15.3 Fluid Dielectric Parameters 5250MHz HEAD TSL

FLUID DIELECTRIC PARAMETERS							
Date:	30 Dec 2022	Fluid Temp:	22.5	Frequency:	5250MHz	Tissue:	Head
Freq (MHz)		Test_e	Test_s	Target_e	Target_s	Deviation Permittivity	Deviation Conductivity
5170.0000		34.5800	4.8700	36.0200	4.62	-4.00%	5.41%
5180.0000	*	34.5600	4.8400	36.0100	4.63	-4.03%	4.54%
5190.0000		34.6100	4.9100	36.0000	4.64	-3.86%	5.82%
5200.0000		34.7600	4.9500	35.9900	4.65	-3.42%	6.45%
5210.0000		34.4100	4.8700	35.9700	4.67	-4.34%	4.28%
5220.0000	*	34.4900	4.7900	35.9600	4.68	-4.09%	2.35%
5230.0000		34.3800	4.9100	35.9500	4.69	-4.37%	4.69%
5240.0000	*	34.2800	4.8700	35.9400	4.70	-4.62%	3.62%
5250.0000		34.3300	4.9500	35.9300	4.71	-4.45%	5.10%

\*Channel Frequency Tested

Table 15.3 Fluid Dielectric Parameters 5750MHz HEAD TSL

FLUID DIELECTRIC PARAMETERS							
Date:	30 Dec 2022	Fluid Temp:	22.7	Frequency:	5750MHz	Tissue:	Head
Freq (MHz)		Test_e	Test_s	Target_e	Target_s	Deviation Permittivity	Deviation Conductivity
5740.0000		32.3700	5.5500	35.3700	5.21	-8.48%	6.53%
5745.0000	*	32.4450	5.5700	35.3650	5.22	-8.26%	6.81%
5750.0000		32.5200	5.5900	35.3600	5.22	-8.03%	7.09%
5760.0000		32.3900	5.5500	35.3500	5.23	-8.37%	6.12%
5770.0000		32.4300	5.5400	35.3300	5.24	-8.21%	5.73%
5780.0000		32.4100	5.5000	35.3200	5.25	-8.24%	4.76%
5785.0000	*	32.4050	5.5300	35.3150	5.26	-8.24%	5.23%
5790.0000		32.4000	5.5600	35.3100	5.26	-8.24%	5.70%
5800.0000		32.5800	5.6000	35.3000	5.27	-7.71%	6.26%
5805.0000	*	32.6000	5.6000	35.2950	5.28	-7.64%	6.16%
5810.0000		32.6200	5.6000	35.2900	5.28	-7.57%	6.06%
5820.0000		32.6200	5.6200	35.2800	5.29	-7.54%	6.24%
5825.0000	*	32.5150	5.6550	35.2750	5.30	-7.82%	6.80%
5830.0000		32.4100	5.6900	35.2700	5.30	-8.11%	7.36%

\*Channel Frequency Tested

## 16.0 SYSTEM VERIFICATION TEST RESULTS

Table 16.1 System Verification Results 2450MHz HEAD TSL

System Verification Test Results					
Date		Frequency (MHz)	Validation Source		
			P/N	S/N	
25 Dec 2022		2450	D2450V2	825	
Fluid Type	Fluid Temp °C	Ambient Temp °C	Ambient Humidity (%)	Forward Power (mW)	Source Spacing (mm)
Head	23.1	24	15%	250	10
Fluid Parameters					
Permittivity			Conductivity		
Measured	Target	Deviation	Measured	Target	Deviation
35.69	39.20	-8.95%	1.76	1.80	-2.22%
Measured SAR					
1 gram			10 gram		
Measured	Target	Deviation	Measured	Target	Deviation
13.20	13.18	0.15%	6.03	6.01	0.42%
Measured SAR Normalized to 1.0W					
1 gram			10 gram		
Normalized	Target	Deviation	Normalized	Target	Deviation
52.80	52.72	0.15%	24.12	24.02	0.44%
<p>Prior to the SAR evaluations, system checks were performed on the planar section of the phantom and a SPEAG validation dipole in accordance with the procedures described in IEC/IEEE 62209-1528 and FCC KDB 846224,</p> <p>The dielectric parameters of the simulated tissue mixture were measured prior to the system performance check using a Dielectric Probe Kit and a Network Analyzer.</p> <p>The forward power was applied to the dipole and the system was verified to a tolerance of +10% from the system manufacturer's dipole calibration target SAR value.</p> <p>The forward power applied was same forward power applied by the calibration lab during the calibration of this validation source.</p>					

Table 16.2 System Verification Results 2450MHz HEAD TSL

System Verification Test Results					
Date		Frequency (MHz)	Validation Source		
			P/N	S/N	
29 Dec 2022		2450	D2450V2	825	
Fluid Type	Fluid Temp °C	Ambient Temp °C	Ambient Humidity (%)	Forward Power (mW)	Source Spacing (mm)
Head	23.7	25	18%	250	10
Fluid Parameters					
Permittivity			Conductivity		
Measured	Target	Deviation	Measured	Target	Deviation
36.19	39.20	-7.68%	1.95	1.80	8.33%
Measured SAR					
1 gram			10 gram		
Measured	Target	Deviation	Measured	Target	Deviation
12.10	13.18	-8.19%	5.57	6.01	-7.24%
Measured SAR Normalized to 1.0W					
1 gram			10 gram		
Normalized	Target	Deviation	Normalized	Target	Deviation
48.40	52.72	-8.19%	22.28	24.02	-7.22%
<p>Prior to the SAR evaluations, system checks were performed on the planar section of the phantom and a SPEAG validation dipole in accordance with the procedures described in IEC/IEEE 62209-1528 and FCC KDB 846224,</p> <p>The dielectric parameters of the simulated tissue mixture were measured prior to the system performance check using a Dielectric Probe Kit and a Network Analyzer.</p> <p>The forward power was applied to the dipole and the system was verified to a tolerance of +10% from the system manufacturer's dipole calibration target SAR value.</p> <p>The forward power applied was same forward power applied by the calibration lab during the calibration of this validation source.</p>					

Table 16.3 System Verification Results 5250MHz HEAD TSL

System Verification Test Results					
Date		Frequency (MHz)	Validation Source		
			P/N		S/N
30 Dec 2022		5250	D5GHzV2		1031
Fluid Type	Fluid Temp °C	Ambient Temp °C	Ambient Humidity (%)	Forward Power (mW)	Source Spacing (mm)
Head	22.5	24	20%	50	10
Fluid Parameters					
Permittivity			Conductivity		
Measured	Target	Deviation	Measured	Target	Deviation
34.33	35.93	-4.45%	4.95	4.71	5.10%
Measured SAR					
1 gram			10 gram		
Measured	Target	Deviation	Measured	Target	Deviation
3.84	3.97	-3.36%	1.13	1.15	-1.35%
Measured SAR Normalized to 1.0W					
1 gram			10 gram		
Normalized	Target	Deviation	Normalized	Target	Deviation
76.80	79.47	-3.36%	22.60	22.91	-1.35%
<p>Prior to the SAR evaluations, system checks were performed on the planar section of the phantom and a SPEAG validation dipole in accordance with the procedures described in IEC/IEEE 62209-1528 and FCC KDB 846224,</p> <p>The dielectric parameters of the simulated tissue mixture were measured prior to the system performance check using a Dielectric Probe Kit and a Network Analyzer.</p> <p>The forward power was applied to the dipole and the system was verified to a tolerance of +10% from the system manufacturer's dipole calibration target SAR value.</p> <p>The forward power applied was same forward power applied by the calibration lab during the calibration of this validation source.</p>					

Table 16.4 System Verification Results 5750MHz HEAD TSL

System Verification Test Results					
Date		Frequency (MHz)	Validation Source		
			P/N	S/N	
30 Dec 2022		5750	D5GHzV2	1031	
Fluid Type	Fluid Temp °C	Ambient Temp °C	Ambient Humidity (%)	Forward Power (mW)	Source Spacing (mm)
Head	22.7	24	20%	50	10
Fluid Parameters					
Permittivity			Conductivity		
Measured	Target	Deviation	Measured	Target	Deviation
32.52	35.36	-8.03%	5.59	5.22	7.09%
Measured SAR					
1 gram			10 gram		
Measured	Target	Deviation	Measured	Target	Deviation
3.64	3.78	-3.63%	1.06	1.10	-3.68%
Measured SAR Normalized to 1.0W					
1 gram			10 gram		
Normalized	Target	Deviation	Normalized	Target	Deviation
72.80	75.54	-3.63%	21.20	22.01	-3.68%
<p>Prior to the SAR evaluations, system checks were performed on the planar section of the phantom and a SPEAG validation dipole in accordance with the procedures described in IEC/IEEE 62209-1528 and FCC KDB 846224,</p> <p>The dielectric parameters of the simulated tissue mixture were measured prior to the system performance check using a Dielectric Probe Kit and a Network Analyzer.</p> <p>The forward power was applied to the dipole and the system was verified to a tolerance of +10% from the system manufacturer's dipole calibration target SAR value.</p> <p>The forward power applied was same forward power applied by the calibration lab during the calibration of this validation source.</p>					

## 17.0 SYSTEM VALIDATION SUMMARY

Table 17.0 System Validation Summary

SAR Validation Summary Chart					
Validation Date	Validation Source	Validation Frequency	Linearity	Isotropy	Extrapolation
✓	= Complete	✓	= Not Required		
3-May-22	D2450V2	2450	✓	✓	✓
13-May-22	D5GHzV2	5250	✓	✓	✓
19-May-22	D5GHzV2	5750	✓	✓	✓

## 18.0 MEASUREMENT SYSTEM SPECIFICATIONS

Table 18.1 Measurement System Specifications

Measurement System Specification	
<b>Specifications</b>	
Positioner	Stäubli Unimation Corp. Robot Model: TX90XL
Repeatability	+/- 0.035 mm
No. of axis	6.0
<b>Data Acquisition Electronic (DAE) System</b>	
<b>Cell Controller</b>	
Processor	Intel(R) Core(TM) i7-7700
Clock Speed	3.60 GHz
Operating System	Windows 10 Professional
<b>Data Converter</b>	
Features	Signal Amplifier, multiplexer, A/D converter, and control logic
Software	Measurement Software: DASY6, V 6.4.0.12171 / DASY52 V52.10.0.1446
	Postprocessing Software: SEMCAD X, V14.6.10( Deployment Build )
Connecting Lines	Optical downlink for data and status info., Optical uplink for commands and clock
<b>DASY Measurement Server</b>	
Function	Real-time data evaluation for field measurements and surface detection
Hardware	Intel ULV Celeron CPU 400 MHz; 128 MB chip disk; 128 MB RAM
Connections	COM1, COM2, DAE, Robot, Ethernet, Service Interface
<b>E-Field Probe</b>	
Model	EX3DV4
Construction	Triangular core fiber optic detection system
Frequency	4 MHz to 10 GHz
Linearity	±0.2 dB (30 MHz to 10 GHz)
<b>Phantom</b>	
Type	ELI Elliptical Planar Phantom
Shell Material	Fiberglass
Thickness	2mm +/- .2mm
Volume	> 30 Liter
<b>Phantom</b>	
Type	SAM Flat Planar Phantom
Shell Material	Fiberglass
Thickness	2mm +/- .2mm
Volume	approx. 25 Liter
<b>Phantom</b>	
Type	MFP Flat Planar Phantom
Shell Material	Fiberglass
Thickness	2mm +/- .2mm
Volume	approx. 8.1 Liter



Measurement System Specification (Continued)		
Probe Specification		
Construction:	Symmetrical design with triangular core; Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents (e.g. DGBE))	
Calibration:	ISO/IEC 17025	
Frequency:	4 MHz - 10 GHz; Linearity: $\pm 0.2$ dB (30 MHz - 10 GHz)	
Directivity:	$\pm 0.1$ dB in TSL (rotation around probe axis) $\pm 0.3$ dB in TSL (rotation normal to probe axis)	
Dynamic Range:	10 $\mu$ W/g to > 100 mW/g; Linearity: $\pm 0.2$ dB (noise: typically <1 mW/g)	
Dimensions:	Overall length: 337 mm; (tip: 20 mm) Tip diameter: 2.5 mm; Tip (body: 12 mm) Typical distance from probe tip to dipole centers: 1 mm	
Application:	High precision dosimetric measurements in any exposure scenario (e.g., very strong gradient fields); the only probe that enables compliance testing for frequencies up to 6 GHz with precision of better than 30%	EX3DV4 E-Field Probe
Phantom Specification		
The ELI V5.0 phantom is an elliptical planar fiberglass shell phantom with a shell thickness of 2.0mm $\pm$ .2mm at the planar area. This phantom conforms to OET Bulletin 65, Supplement C, IEEE 1528-2013, IEC 62209-1 and IEC 62209-2.		
		ELI Phantom
Phantom Specification		
The SAM V4.0 phantom is a flat planar fiberglass shell phantom with a shell thickness of 2.0mm $\pm$ .2mm at the planar area. This phantom conforms to OET Bulletin 65, Supplement C, IEEE 1528-2013, IEC 62209-1 and IEC 62209-2.		
		SAM Phantom
Phantom Specification		
The MFP V5.1C phantom is a flat planar fiberglass shell phantom with a shell thickness of 2.0mm $\pm$ .2mm at the planar area. This phantom conforms to OET Bulletin 65, Supplement C, IEEE 1528-2013, IEC 62209-1 and IEC 62209-2.		
		MFP Phantom
Device Positioner Specification		
The DASY device positioner has two scales for device rotation (with respect to the body axis) and the device inclination (with respect to the line between the ear openings). The plane between the ear openings and the mouth tip has a rotation angle of 65°. The bottom plate contains three pair of bolts for locking the device holder. The device holder positions are adjusted to the standard measurement positions in the three sections.		
		Device Positioner

## 19.0 TEST EQUIPMENT LIST

**Table 19.1 Equipment List and Calibration**

Test Equipment List				
DESCRIPTION	ASSET NO.	SERIAL NO.	DATE CALIBRATED	CALIBRATION DUE
Schmid & Partner DASY 6 System	-	-	-	-
-DASY Measurement Server	00158	1078	CNR	CNR
-Robot	00046	599396-01	CNR	CNR
-DAE4	00019	353	14-Apr-22	14-Apr-23
-EX3DV4 E-Field Probe	00213	3600	20-Apr-22	20-Apr-23
-CLA 30 Validation Dipole	00300	1005	18-Mar-20	18-Mar-23
-CLA150 Validation Dipole	00251	4007	18-Mar-20	18-Mar-23
-D450V3 Validation Dipole	00221	1068	27-Apr-21	27-Apr-24
-D835V2 Validation Dipole	00217	4D075	27-Apr-21	27-Apr-24
-D900V2 Validation Dipole	00020	54	16-Mar-20	16-Mar-23
ALS-D-01640-S-2	00299	207-00102	15-Dec-20	15-Dec-23
-D1800V2 Validation Dipole	00222	247	16-Mar-20	16-Mar-23
-D1900V2 Validation Dipole	00218	5d107	16-Mar-20	16-Mar-23
-D2450V2 Validation Dipole	00219	825	24-Apr-21	24-Apr-24
-D5GHzV2 Validation Dipole	00126	1031	27-Apr-21	27-Apr-24
ELI Phantom	00247	1234	CNR	CNR
SAM Phantom	00154	1033	CNR	CNR
MFP Phantom	00355	1177/2	CNR	CNR
HP 85070C Dielectric Probe Kit	00033	none	CNR	CNR
HP 8753ET Network Analyzer	00134	US39170292	6-Jan-21	6-Jan-24
Rohde & Schwarz SMR20 Signal Generator	00006	100104	11-Aug-20	11-Aug-23
Amplifier Research 10W1000C Power Amplifier	00041	27887	CNR	CNR
Amplifier Research 5S1G4 Power Amplifier	00106	26235	CNR	CNR
Narda Directional Coupler 3020A	00064	-	CNR	CNR
Kangaroo VWR Humidity/Thermometer	00334	192385455	5-Aug-19	5-Jan-23
Digital Multi Meter DMR-1800	00250	TE182	23-Jun-20	23-Jun-23
Bipolar Power Supply 6299A	00086	1144A02155	CNR	CNR
DC-18G 10W 30db Attenuator	00102	-	COU	COU
R&S FSP40 Spectrum Analyzer	00241	100500	9-Aug-21	9-Aug-24
HP 8566B Spectrum Analyzer	00051	2747A055100	29-Jun-20	29-Jun-23
RF Cable-SMA	00311	-	CNR	CNR
HP Calibration Kit	00145	-	CNR	CNR

CNR = Calibration Not Required

COU = Calibrate on Use

## 20.0 FLUID COMPOSITION

Table 20.1 Fluid Composition 2450MHz HEAD TSL

Tissue Simulating Liquid (TSL) Composition				2450MHz Head
Component by Percent Weight				
Water	Glycol	Salt <sup>(1)</sup>	HEC <sup>(2)</sup>	Bacteriacide <sup>(3)</sup>
52.0	48.0	0.0	0.0	0.0

(1) Non-Iodized

(2) HydroxyEthyl-Cellulose: Sigma-Aldrich P/N 54290-500g

(3) Dow Chemical Dowicil 75 Antimicrobial Perservative

Table 20.4 Fluid Composition 5250, 5750MHz HEAD TSL

The 5GHz Head TSL is a SPEAG proprietary broad band fluid:

Type: HBBL3500-5500V2

Batch number: 131210-2

P/N: SL AAH 502 AC

END OF REPORT

## APPENDIX A – SYSTEM VERIFICATION PLOTS

**DUT: Dipole 2450 MHz D2450V2; Type: D2450V2; Serial: D2450V2 - SN:825**  
**Procedure Name: SPC 2450H\_Input=250mw, Target=[11.86]13.18[14.50]W/kg\_ 2**

Communication System: UID 0, CW (0); Frequency: 2450 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 2450$  MHz;  $\sigma = 1.76$  S/m;  $\epsilon_r = 35.69$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: Left Section

Date/Time: 12/25/2022 1:15:35 PM



DASY5 Configuration:

- Probe: EX3DV4 - SN3600; ConvF(6.58, 6.58, 6.58) @ 2450 MHz; Calibrated: 4/20/2022
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 4/14/2022
- Phantom: MFP\_V5.1C (20deg probe tilt); Type: QD 000 P51 Cx; Serial: xxxx
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

**SPC/SPC 2450H\_Input=250mw, Target=[11.86]13.18[14.50]W/kg\_ 2/Area Scan (9x4x1):** Measurement grid: dx=12mm, dy=12mm  
Maximum value of SAR (measured) = 14.3 W/kg

**SPC/SPC 2450H\_Input=250mw, Target=[11.86]13.18[14.50]W/kg\_ 2/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm  
Reference Value = 88.89 V/m; Power Drift = 0.04 dB  
Peak SAR (extrapolated) = 29.0 W/kg  
**SAR(1 g) = 13.2 W/kg; SAR(10 g) = 6.03 W/kg**  
Smallest distance from peaks to all points 3 dB below = 10.8 mm  
Ratio of SAR at M2 to SAR at M1 = 46.7%  
Maximum value of SAR (measured) = 14.9 W/kg

**SPC/SPC 2450H\_Input=250mw, Target=[11.86]13.18[14.50]W/kg\_ 2/Z Scan (1x1x22):** Measurement grid: dx=20mm, dy=20mm, dz=5mm  
Penetration depth = 6.983 (6.775, 7.015) [mm]  
Maximum value of SAR (interpolated) = 23.0 W/kg

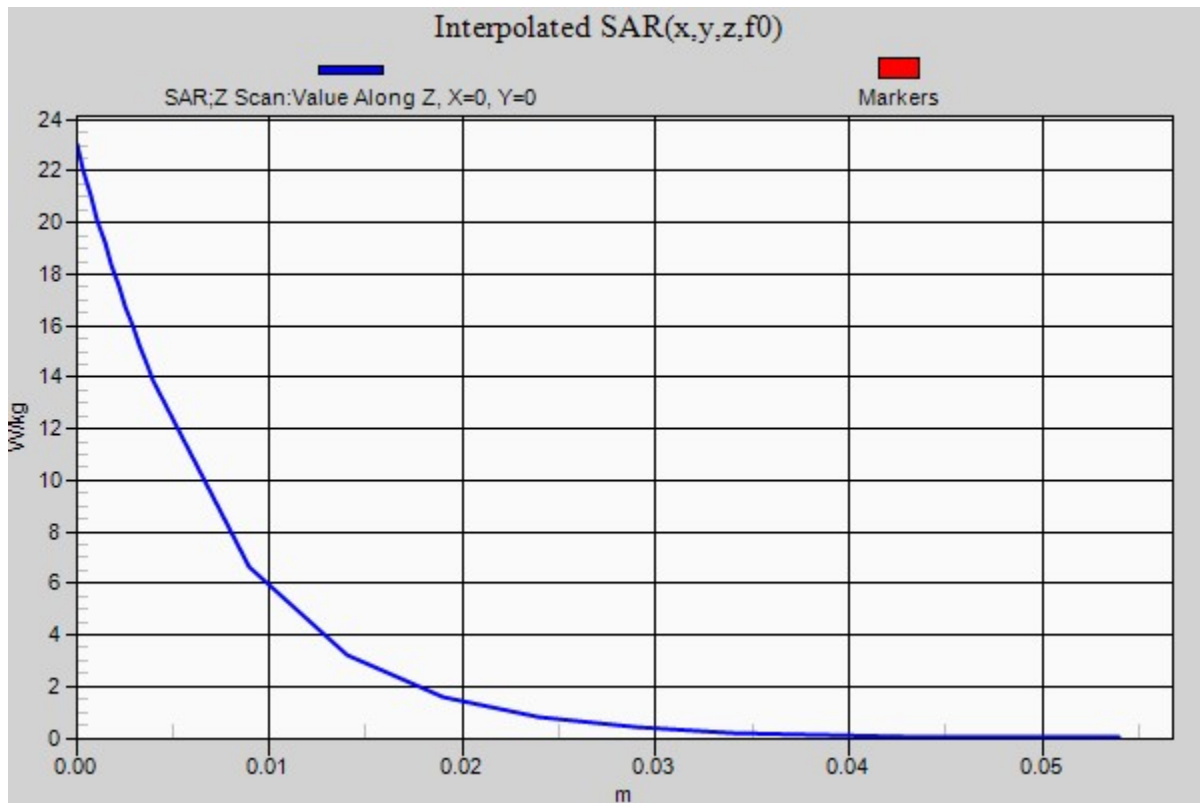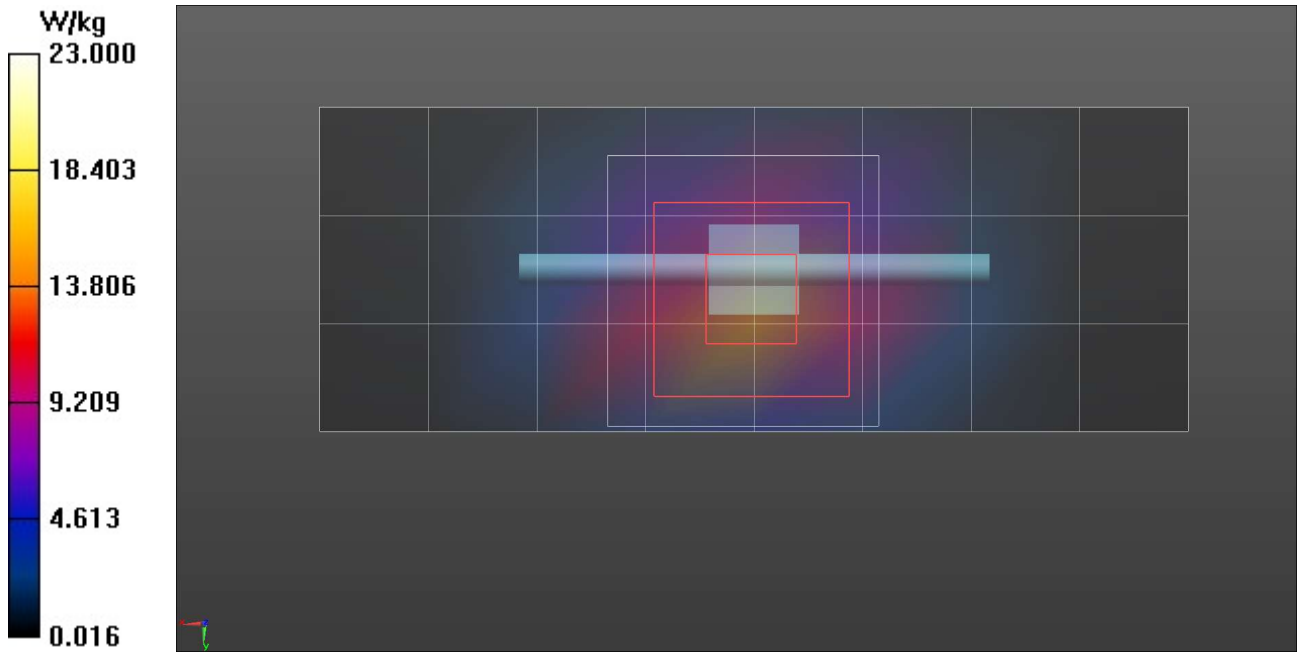

**DUT: Dipole 2450 MHz D2450V2; Type: D2450V2; Serial: D2450V2 - SN:825**  
**Procedure Name: SPC 2450H\_Input=250mw, Target=[11.86]13.18][14.50]W/kg\_ 2 2**

Communication System: UID 0, CW (0); Frequency: 2450 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 2450$  MHz;  $\sigma = 1.95$  S/m;  $\epsilon_r = 36.19$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: Left Section

Date/Time: 12/29/2022 9:38:20 AM



DASY5 Configuration:

- Probe: EX3DV4 - SN3600; ConvF(6.58, 6.58, 6.58) @ 2450 MHz; Calibrated: 4/20/2022
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 4/14/2022
- Phantom: MFP\_V5.1C (20deg probe tilt); Type: QD 000 P51 Cx; Serial: xxxx
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

**SPC/SPC 2450H\_Input=250mw, Target=[11.86]13.18][14.50]W/kg\_ 2 2/Area Scan (9x4x1):** Measurement grid: dx=12mm, dy=12mm  
Maximum value of SAR (measured) = 12.3 W/kg

**SPC/SPC 2450H\_Input=250mw, Target=[11.86]13.18][14.50]W/kg\_ 2 2/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm  
Reference Value = 83.00 V/m; Power Drift = -0.01 dB  
Peak SAR (extrapolated) = 25.9 W/kg  
**SAR(1 g) = 12.1 W/kg; SAR(10 g) = 5.57 W/kg**  
Smallest distance from peaks to all points 3 dB below = 10.8 mm  
Ratio of SAR at M2 to SAR at M1 = 47.6%  
Maximum value of SAR (measured) = 13.6 W/kg

**SPC/SPC 2450H\_Input=250mw, Target=[11.86]13.18][14.50]W/kg\_ 2 2/Z Scan (1x1x22):** Measurement grid: dx=20mm, dy=20mm, dz=5mm  
Penetration depth = 7.049 (6.766, 7.164) [mm]  
Maximum value of SAR (interpolated) = 22.3 W/kg

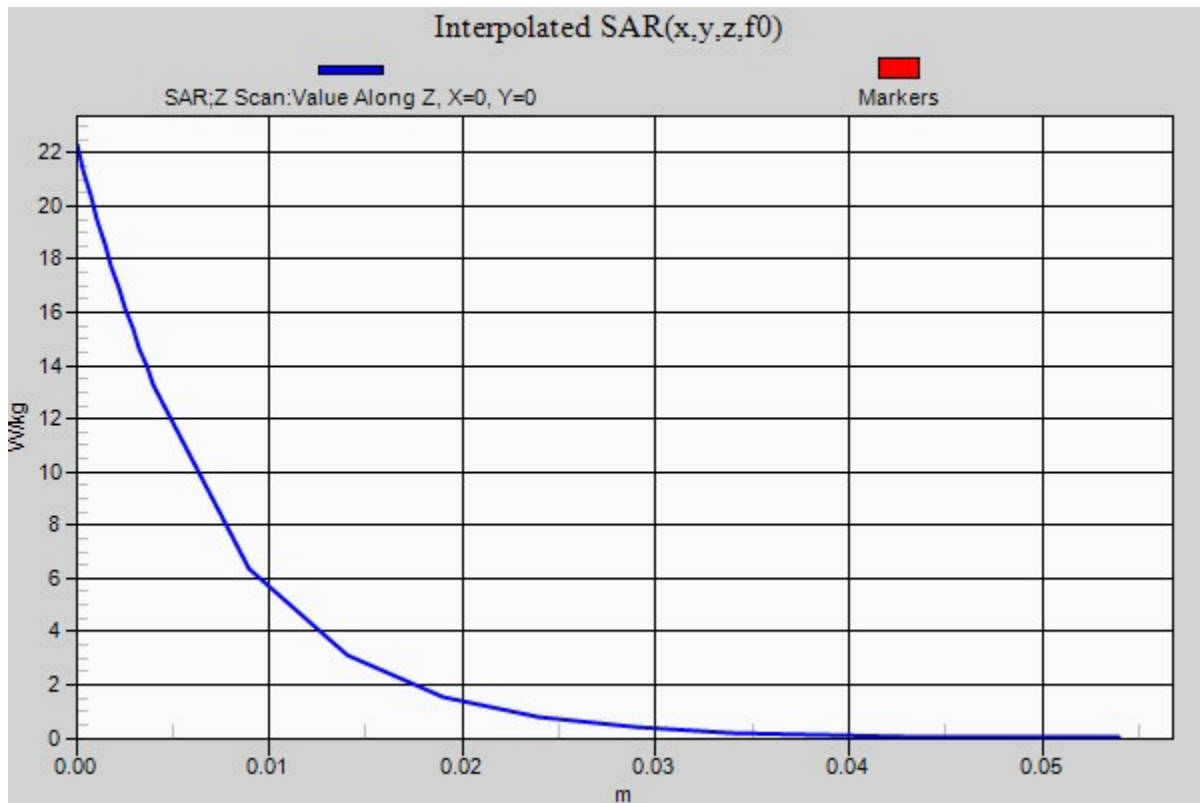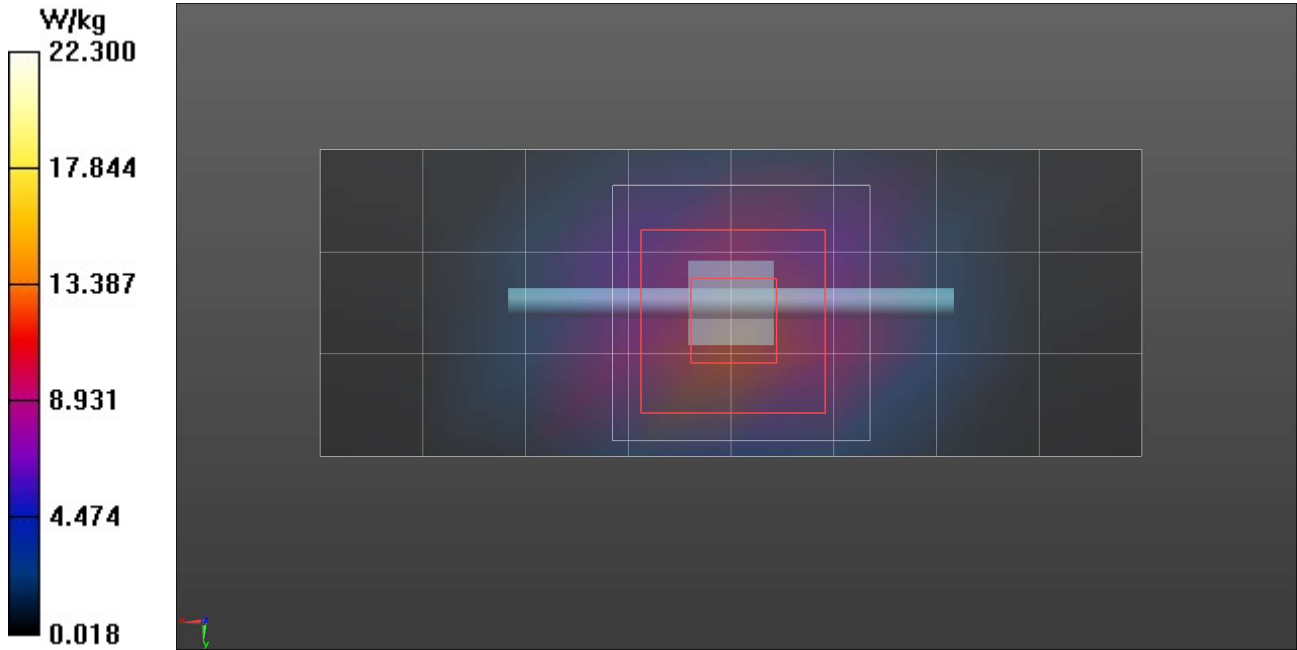

**DUT: Dipole D5GHzV2; Type: D5GHzV2; Serial: D5GHzV2 - SN:1031**

**Procedure Name: SPC 5250H Input=47 mw, Target= [3.36[3.74][4.11] Target=79.47W/kg@1000mw 3**

Communication System: UID 0, CW (0); Frequency: 5250 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 5250$  MHz;  $\sigma = 4.95$  S/m;  $\epsilon_r = 34.33$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: Left Section

Date/Time: 12/30/2022 11:51:44 AM

DASY5 Configuration:



- Probe: EX3DV4 - SN3600; ConvF(4.55, 4.55, 4.55) @ 5250 MHz; Calibrated: 4/20/2022
- Sensor-Surface: 4mm (Mechanical Surface Detection), Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 4/14/2022
- Phantom: MFP\_V5.1C (20deg probe tilt); Type: QD 000 P51 Cx; Serial: xxxx
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

**SPC/SPC 5250H Input=47 mw, Target= [3.36[3.74][4.11] Target=79.47W/kg@1000mw 3/Area Scan (7x4x1):** Measurement grid:  
dx=10mm, dy=10mm  
Maximum value of SAR (measured) = 3.97 W/kg

**SPC/SPC 5250H Input=47 mw, Target= [3.36[3.74][4.11] Target=79.47W/kg@1000mw 3/Zoom Scan (9x9x6)/Cube 0:**  
Measurement grid: dx=4mm, dy=4mm, dz=2mm  
Reference Value = 29.06 V/m; Power Drift = 0.03 dB  
Peak SAR (extrapolated) = 15.2 W/kg  
**SAR(1 g) = 3.84 W/kg; SAR(10 g) = 1.13 W/kg**  
Smallest distance from peaks to all points 3 dB below = 7.5 mm  
Ratio of SAR at M2 to SAR at M1 = 54.6%  
Maximum value of SAR (measured) = 7.87 W/kg

**SPC/SPC 5250H Input=47 mw, Target= [3.36[3.74][4.11] Target=79.47W/kg@1000mw 3/Z Scan (1x1x19):** Measurement grid:  
dx=20mm, dy=20mm, dz=20mm  
Penetration depth = n/a (n/a, 3.384) [mm]  
Maximum value of SAR (interpolated) = 8.75 W/kg



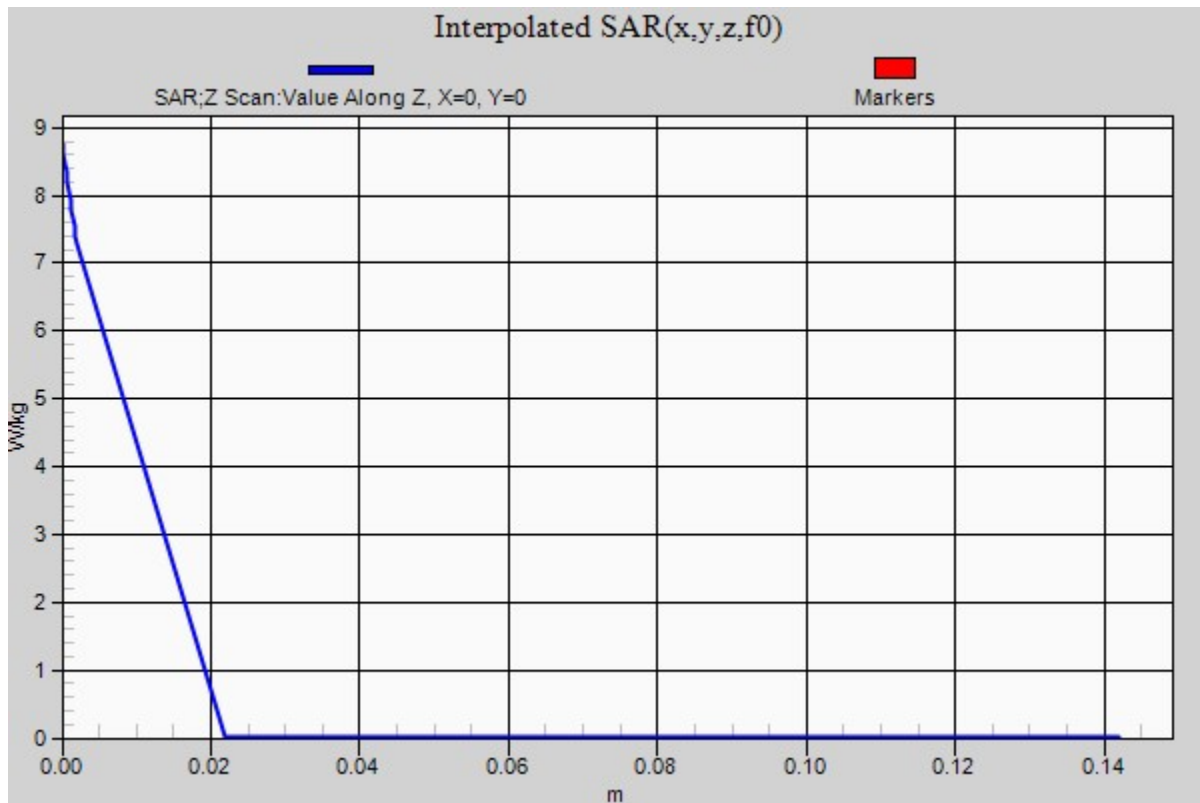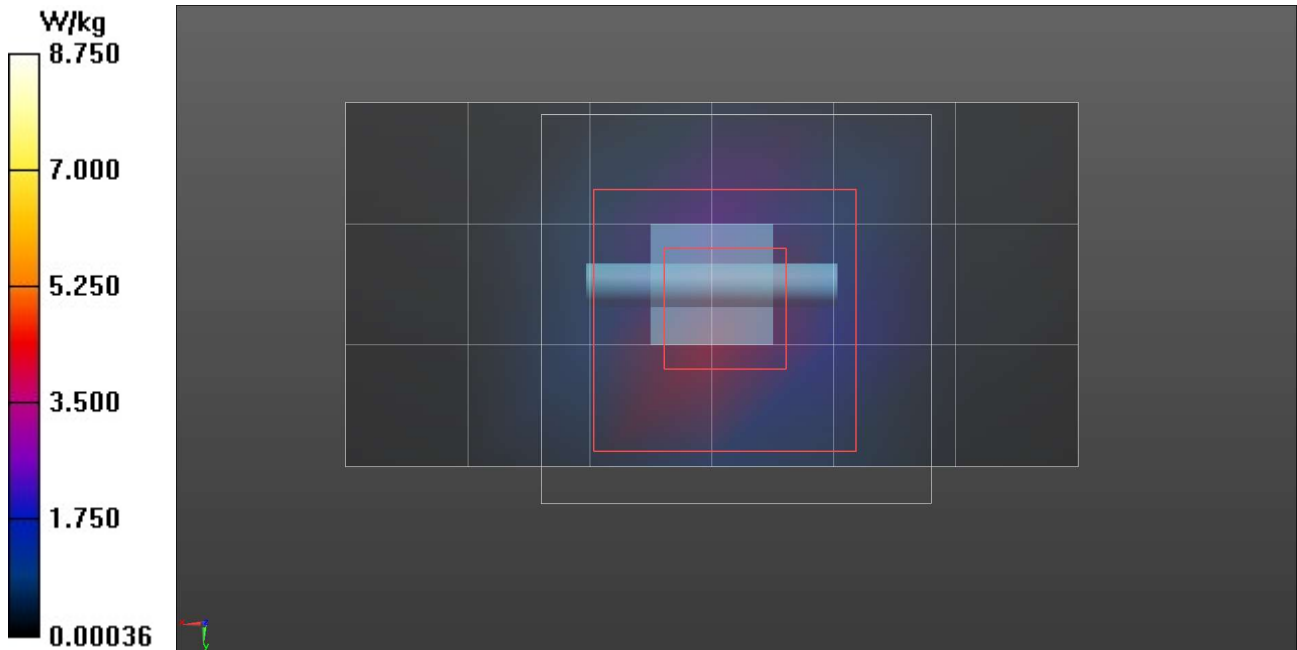

**DUT: Dipole D5GHzV2; Type: D5GHzV2; Serial: D5GHzV2 - SN:1031**

**Procedure Name: SPC 5750H Input=50mw, Target=[3.40][3.78][4.16], Target=75.54W/kg@1000 mw 2**

Communication System: UID 0, CW (0); Frequency: 5750 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 5750$  MHz;  $\sigma = 5.59$  S/m;  $\epsilon_r = 32.52$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: Left Section

Date/Time: 12/30/2022 1:19:57 PM

DASY5 Configuration:

- Probe: EX3DV4 - SN3600; ConvF(4.16, 4.16, 4.16) @ 5750 MHz; Calibrated: 4/20/2022
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 4/14/2022
- Phantom: MFP\_V5.1C (20deg probe tilt); Type: QD 000 P51 Cx; Serial: xxxx
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

**SPC/SPC 5750H Input=50mw, Target=[3.40][3.78][4.16], Target=75.54W/kg@1000 mw 2/Area Scan (7x4x1):** Measurement grid:

dx=10mm, dy=10mm

Maximum value of SAR (measured) = 6.41 W/kg

**SPC/SPC 5750H Input=50mw, Target=[3.40][3.78][4.16], Target=75.54W/kg@1000 mw 2/Zoom Scan (7x7x6)/Cube 0:**

Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 26.13 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 16.4 W/kg

**SAR(1 g) = 3.64 W/kg; SAR(10 g) = 1.06 W/kg**

Smallest distance from peaks to all points 3 dB below = 7.9 mm

Ratio of SAR at M2 to SAR at M1 = 50.8%



Maximum value of SAR (measured) = 7.67 W/kg

**SPC/SPC 5750H Input=50mw, Target=[3.40][3.78][4.16], Target=75.54W/kg@1000 mw 2/Z Scan (1x1x22):** Measurement grid:

dx=20mm, dy=20mm, dz=5mm

Penetration depth = 2.866 (2.988, 2.986) [mm]

Maximum value of SAR (interpolated) = 10.9 W/kg

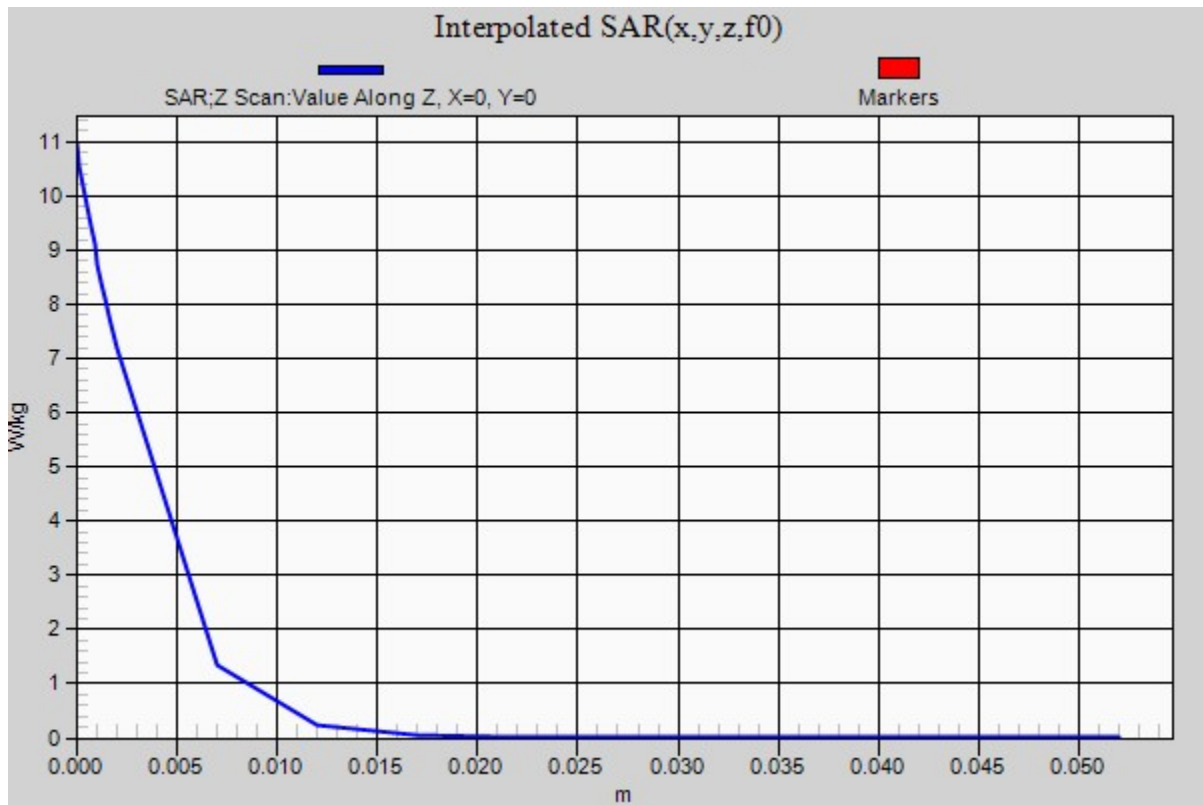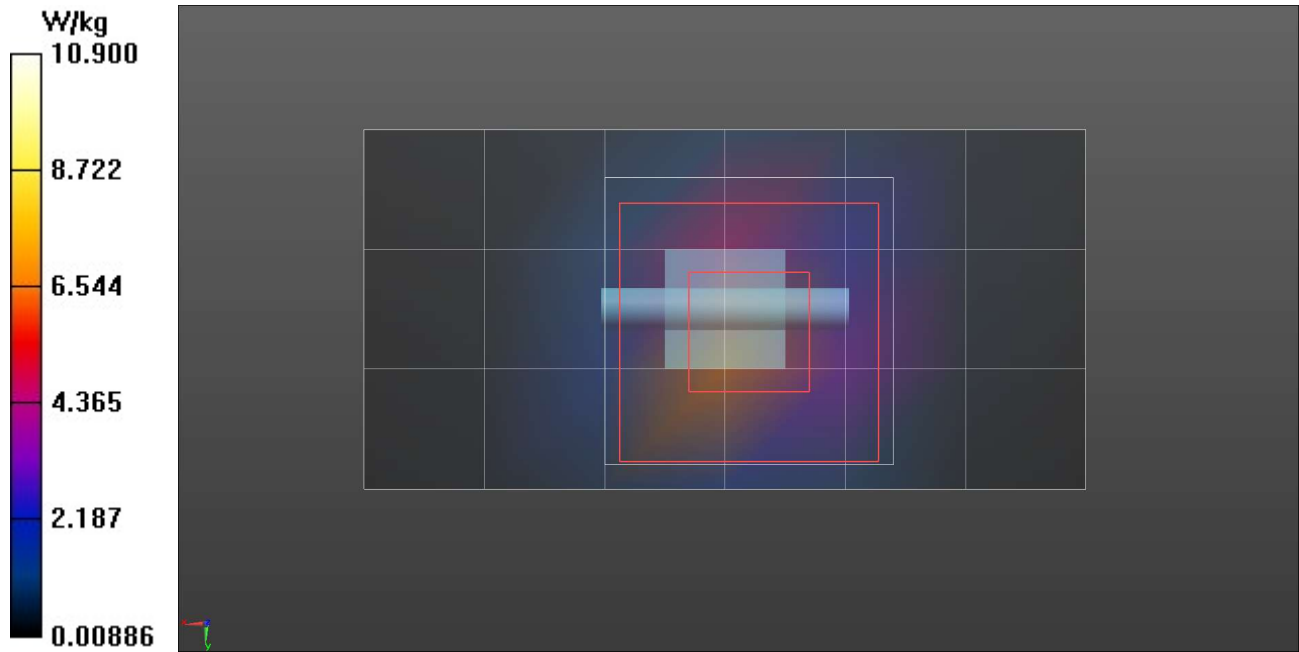

## APPENDIX B – MEASUREMENT PLOTS OF MAXIMUM MEASURED SAR

### Plot B4

**DUT: A04577 ; Type: Production Prototype Sample**  
**Procedure Name: B4-A04577, Back Side, 2462MHz DSSS-5.5 BW 20 MHz,WIFI 5mm**

Communication System: UID 0, CW (0); Frequency: 2462 MHz;Duty Cycle: 1:1  
Medium parameters used (interpolated):  $f = 2462$  MHz;  $\sigma = 1.958$  S/m;  $\epsilon_r = 36.318$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: Left Section

Date/Time: 12/29/2022 1:58:41 PM

DASY5 Configuration:

- Probe: EX3DV4 - SN3600; ConvF(6.58, 6.58, 6.58) @ 2462 MHz; Calibrated: 4/20/2022
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 1.4mm (Mechanical Surface Detection), Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 4/14/2022
- Phantom: MFP\_V5.1C (20deg probe tilt); Type: QD 000 P51 Cx; Serial: xxxx
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

**2450H/B4-A04577, Back Side, 2462MHz DSSS-5.5 BW 20 MHz,WIFI 5mm 2 2/Area Scan (9x6x1):** Measurement grid: dx=12mm, dy=12mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.472 W/kg

**2450H/B4-A04577, Back Side, 2462MHz DSSS-5.5 BW 20 MHz,WIFI 5mm 2 2/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 12.41 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 0.937 W/kg

**SAR(1 g) = 0.428 W/kg; SAR(10 g) = 0.214 W/kg**

Smallest distance from peaks to all points 3 dB below = 11.3 mm

Ratio of SAR at M2 to SAR at M1 = 44.4%

[Info: Interpolated medium parameters used for SAR evaluation.](#)


Maximum value of SAR (measured) = 0.732 W/kg

**2450H/B4-A04577, Back Side, 2462MHz DSSS-5.5 BW 20 MHz,WIFI 5mm 2 2/Z Scan (1x1x19):** Measurement grid: dx=20mm, dy=20mm, dz=20mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Penetration depth = n/a (n/a, 8.812) [mm]

Maximum value of SAR (interpolated) = 0.0579 W/kg

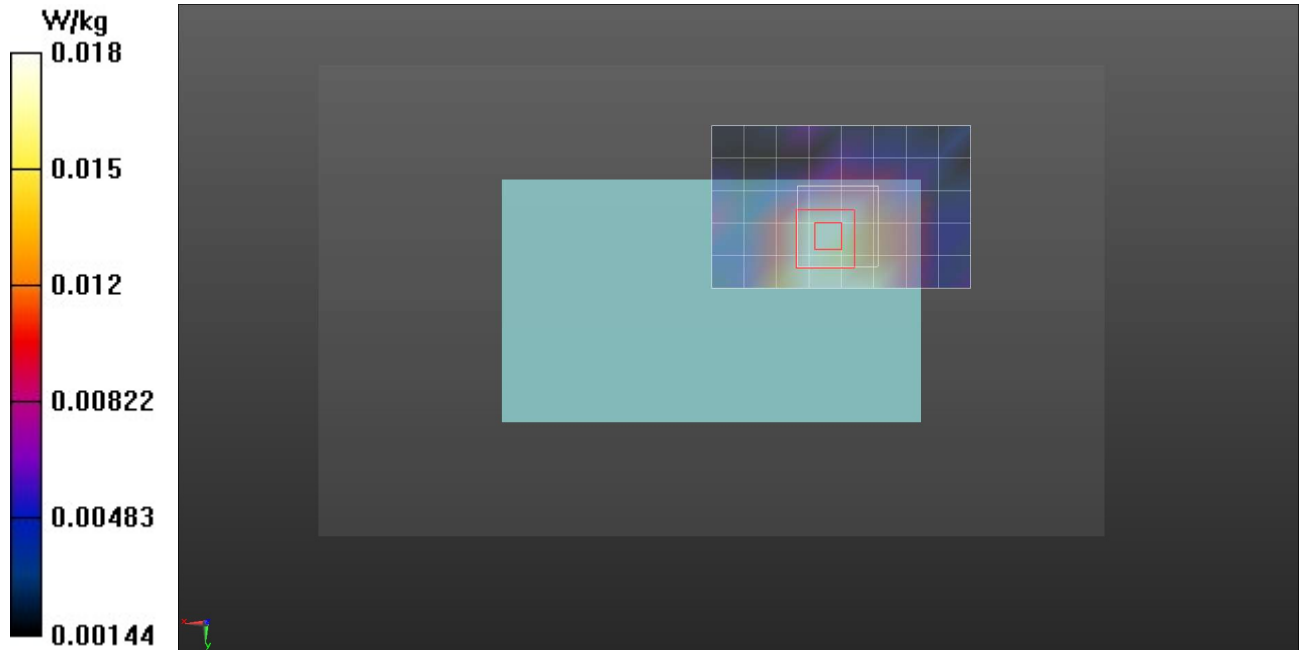

## Plot B6

**DUT: A04577 ; Type: Production Prototype Sample**

**Procedure Name: B6-A04577, Back Side, 2441MHz GFSK-1 , BT 5mm**

Communication System: UID 0, CW (0); Frequency: 2441 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated):  $f = 2441$  MHz;  $\sigma = 1.932$  S/m;  $\epsilon_r = 36.361$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Left Section

Date/Time: 12/29/2022 2:42:34 PM

DASY5 Configuration:

- Probe: EX3DV4 - SN3600; ConvF(6.58, 6.58, 6.58) @ 2441 MHz; Calibrated: 4/20/2022
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 1.4mm (Mechanical Surface Detection), Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 4/14/2022
- Phantom: MFP\_V5.1C (20deg probe tilt); Type: QD 000 P51 Cx; Serial: xxxx
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

**2450H/B6-A04577, Back Side, 2441MHz GFSK-1 , BT 5mm/Area Scan (9x6x1):** Measurement grid: dx=12mm, dy=12mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.0237 W/kg

**2450H/B6-A04577, Back Side, 2441MHz GFSK-1 , BT 5mm/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 3.040 V/m; Power Drift = 0.66 dB

Peak SAR (extrapolated) = 0.0470 W/kg

**SAR(1 g) = 0.019 W/kg; SAR(10 g) = 0.00919 W/kg**

Ratio of SAR at M2 to SAR at M1 = 43.8%

[Info: Interpolated medium parameters used for SAR evaluation.](#)


Maximum value of SAR (measured) = 0.0343 W/kg

**2450H/B6-A04577, Back Side, 2441MHz GFSK-1 , BT 5mm/Z Scan (1x1x19):** Measurement grid: dx=20mm, dy=20mm, dz=20mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Penetration depth = n/a (n/a, 88.24) [mm]

Maximum value of SAR (interpolated) = 0.0184 W/kg

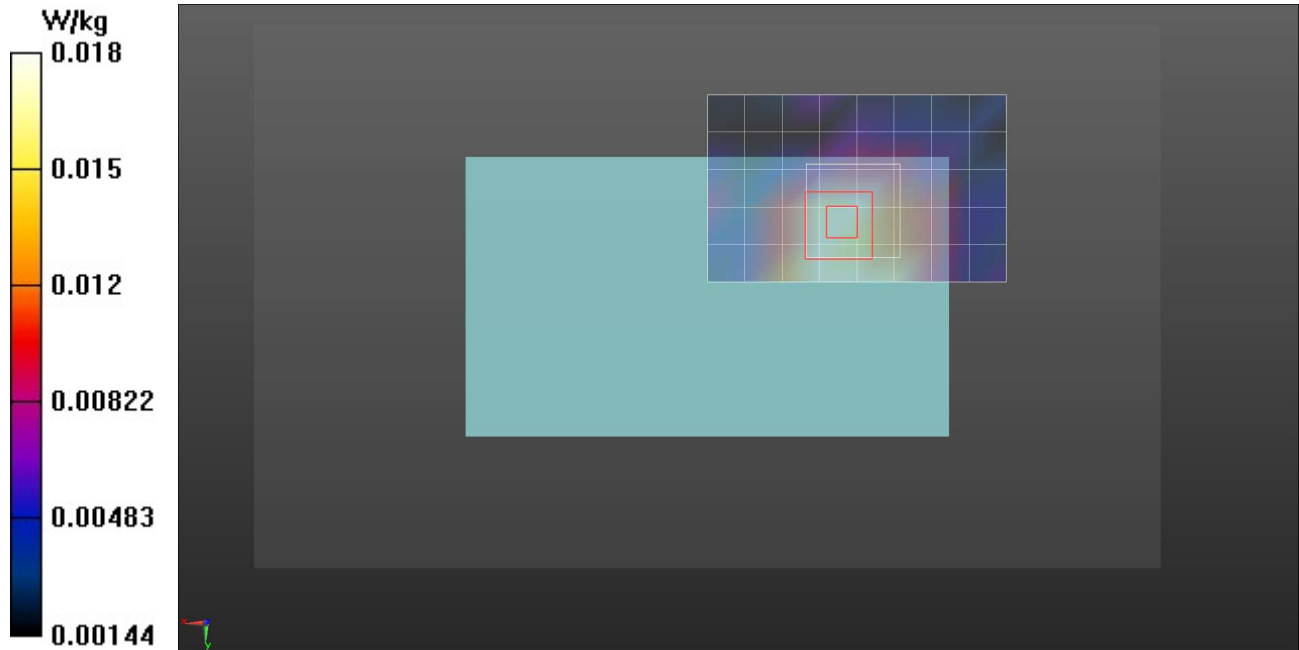

## Plot E3

**DUT: A04577 ; Type: Production Prototype Sample**

**Procedure Name: E3-A04577 , Top Edge 2412MHz DSSS-5.5 BW 20MHz 0mm**

Communication System: UID 0, CW (0); Frequency: 2452 MHz; Duty Cycle: 1:1  
Medium parameters used (interpolated):  $f = 2452$  MHz;  $\sigma = 1.952$  S/m;  $\epsilon_r = 36.21$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: Left Section

Date/Time: 12/29/2022 12:23:11 PM

DASY5 Configuration:

- Probe: EX3DV4 - SN3600; ConvF(6.58, 6.58, 6.58) @ 2452 MHz; Calibrated: 4/20/2022
- Sensor-Surface: 4mm (Mechanical Surface Detection), Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 4/14/2022
- Phantom: MFP\_V5.1C (20deg probe tilt); Type: QD 000 P51 Cx; Serial: xxxx
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

**2450H/E3-A04577 , Top Edge 2412MHz DSSS-5.5 BW 20MHz 0mm/Area Scan (11x5x1):** Measurement grid: dx=12mm, dy=12mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.742 W/kg

**2450H/E3-A04577 , Top Edge 2412MHz DSSS-5.5 BW 20MHz 0mm/Zoom Scan (7x7x4)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 19.23 V/m; Power Drift = 0.34 dB

Peak SAR (extrapolated) = 2.11 W/kg

**SAR(1 g) = 0.839 W/kg; SAR(10 g) = 0.356 W/kg**

Smallest distance from peaks to all points 3 dB below = 6.3 mm

Ratio of SAR at M2 to SAR at M1 = 40.5%

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.53 W/kg


**2450H/E3-A04577 , Top Edge 2412MHz DSSS-5.5 BW 20MHz 0mm/Z Scan (1x1x19):** Measurement grid: dx=20mm, dy=20mm, dz=20mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Penetration depth = n/a (n/a, 8.047) [mm]

Maximum value of SAR (interpolated) = 0.381 W/kg



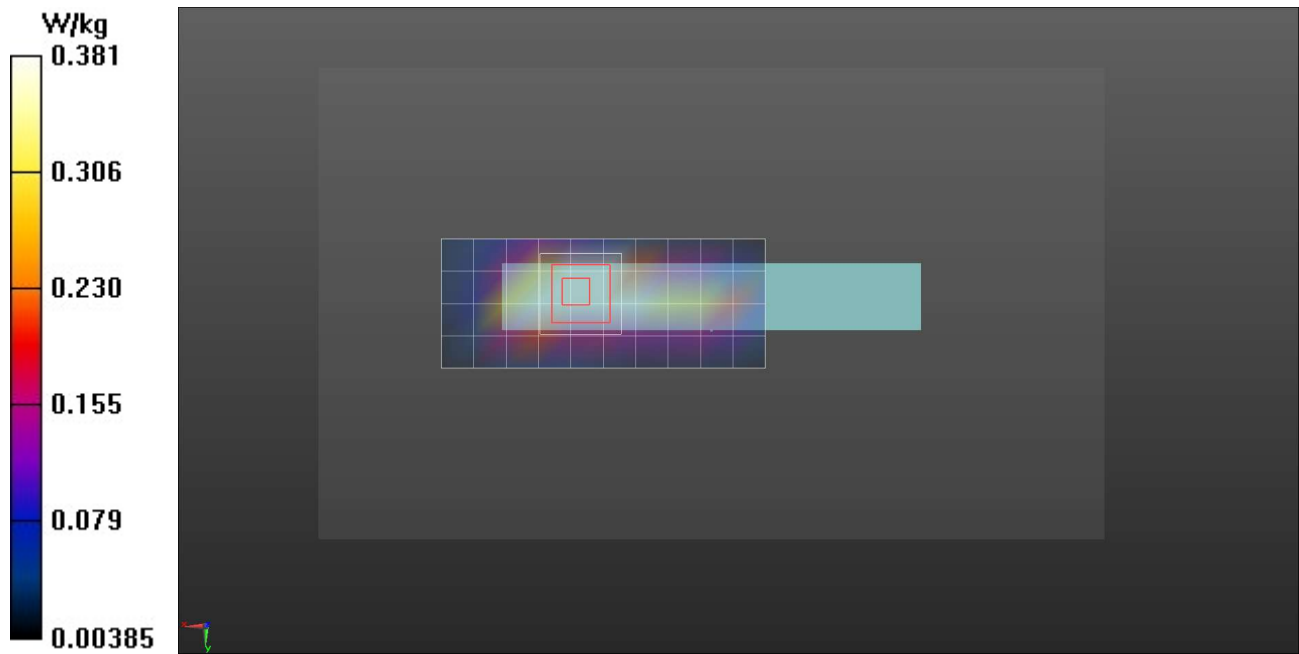

## Plot E9

**DUT: A04577 ; Type: Production Prototype Sample**  
**Procedure Name: E9-A04577 , Top Edge 2441MHz GFSK-1 , BT 0mm**

Communication System: UID 0, CW (0); Frequency: 2452 MHz; Duty Cycle: 1:1  
Medium parameters used (interpolated):  $f = 2452 \text{ MHz}$ ;  $\sigma = 1.952 \text{ S/m}$ ;  $\epsilon_r = 36.21$ ;  $\rho = 1000 \text{ kg/m}^3$   
Phantom section: Left Section

Date/Time: 12/29/2022 3:54:54 PM

DASY5 Configuration:

- Probe: EX3DV4 - SN3600; ConvF(6.58, 6.58, 6.58) @ 2452 MHz; Calibrated: 4/20/2022
- Sensor-Surface: 4mm (Mechanical Surface Detection), Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 4/14/2022
- Phantom: MFP\_V5.1C (20deg probe tilt); Type: QD 000 P51 Cx; Serial: xxxx
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

**2450H/E9-A04577 , Top Edge 2441MHz GFSK-1 , BT 0mm/Area Scan (11x5x1):** Measurement grid: dx=12mm, dy=12mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.0404 W/kg

**2450H/E9-A04577 , Top Edge 2441MHz GFSK-1 , BT 0mm/Zoom Scan (7x7x4)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.585 V/m; Power Drift = 0.19 dB

Peak SAR (extrapolated) = 0.136 W/kg

**SAR(1 g) = 0.049 W/kg; SAR(10 g) = 0.021 W/kg**

Ratio of SAR at M2 to SAR at M1 = 36.2%

[Info: Interpolated medium parameters used for SAR evaluation.](#)


Maximum value of SAR (measured) = 0.0970 W/kg

**2450H/E9-A04577 , Top Edge 2441MHz GFSK-1 , BT 0mm/Z Scan (1x1x19):** Measurement grid: dx=20mm, dy=20mm, dz=20mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Penetration depth = n/a (n/a, 12.73) [mm]

Maximum value of SAR (interpolated) = 0.0206 W/kg

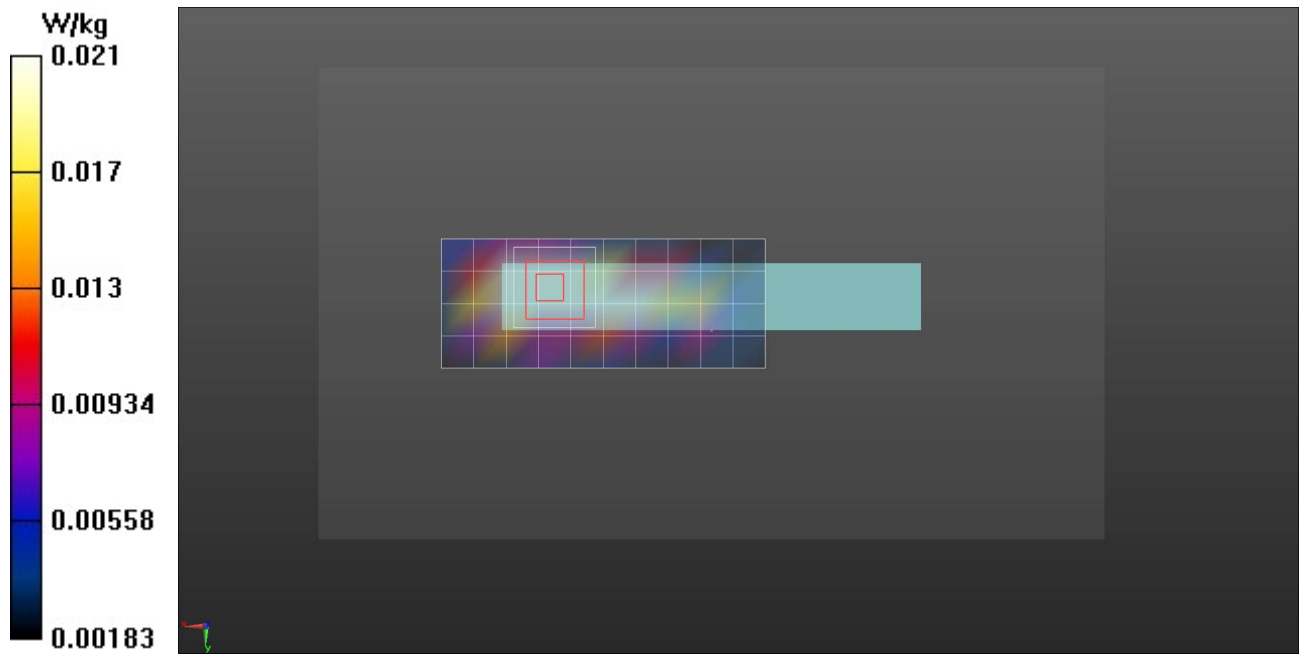

## Plot B8

**DUT: A04577 ; Type: Production Prototype Sample**

**Procedure Name: B8-A04577, Back Side, 5220MHz UNII-1 OFDM6 BW20 , WIFI 5mm**

Communication System: UID 0, CW (0); Frequency: 5220 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 5220$  MHz;  $\sigma = 4.79$  S/m;  $\epsilon_r = 34.49$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: Left Section

Date/Time: 12/30/2022 2:57:24 PM

DASY5 Configuration:

- Probe: EX3DV4 - SN3600; ConvF(4.55, 4.55, 4.55) @ 5220 MHz; Calibrated: 4/20/2022
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 1.4mm (Mechanical Surface Detection), Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 4/14/2022
- Phantom: MFP\_V5.1C (20deg probe tilt); Type: QD 000 P51 Cx; Serial: xxxx
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

**5250H/B8-A04577, Back Side, 5220MHz UNII-1 OFDM6 BW20 , WIFI 5mm/Area Scan (11x7x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.216 W/kg

**5250H/B8-A04577, Back Side, 5220MHz UNII-1 OFDM6 BW20 , WIFI 5mm/Zoom Scan (7x7x6)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 6.892 V/m; Power Drift = -0.19 dB

Peak SAR (extrapolated) = 0.819 W/kg

**SAR(1 g) = 0.228 W/kg; SAR(10 g) = 0.085 W/kg**

Smallest distance from peaks to all points 3 dB below = 9.7 mm


Ratio of SAR at M2 to SAR at M1 = 54.7%

Maximum value of SAR (measured) = 0.506 W/kg

**5250H/B8-A04577, Back Side, 5220MHz UNII-1 OFDM6 BW20 , WIFI 5mm/Z Scan (1x1x19):** Measurement grid: dx=20mm, dy=20mm, dz=20mm

Penetration depth = n/a (n/a, 27.00) [mm]

Maximum value of SAR (interpolated) = 0.0187 W/kg

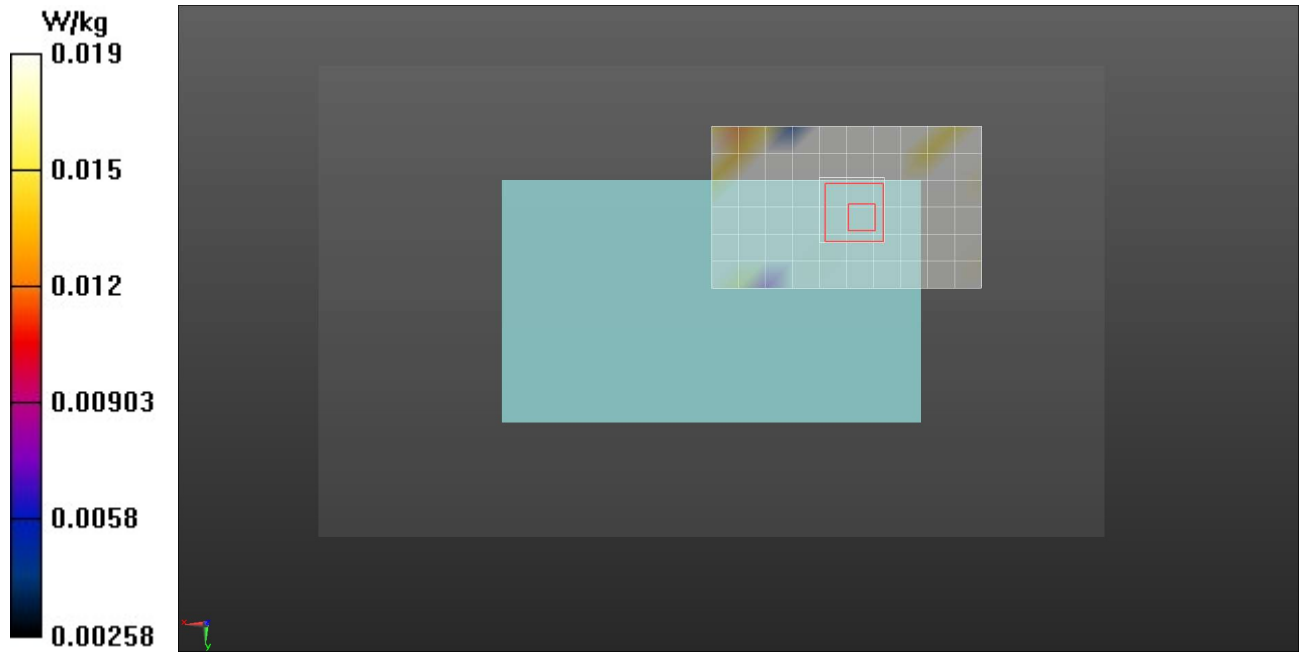

## Plot E15

**DUT: A04577 ; Type: Production Prototype Sample**

**Procedure Name: E15-A04577, Back Side, 5240MHz UNII-1 OFDM6 BW20, WIFI 0mm**

Communication System: UID 0, CW (0); Frequency: 5240 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 5240$  MHz;  $\sigma = 4.87$  S/m;  $\epsilon_r = 34.28$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: Left Section

Date/Time: 12/30/2022 5:08:47 PM

DASY5 Configuration:

- Probe: EX3DV4 - SN3600; ConvF(4.55, 4.55, 4.55) @ 5240 MHz; Calibrated: 4/20/2022
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 1.4mm (Mechanical Surface Detection), Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 4/14/2022
- Phantom: MFP\_V5.1C (20deg probe tilt); Type: QD 000 P51 Cx; Serial: xxxx
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

**5250H/E15-A04577, Back Side, 5240MHz UNII-1 OFDM6 BW20, WIFI 0mm/Area Scan (11x7x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.433 W/kg

**5250H/E15-A04577, Back Side, 5240MHz UNII-1 OFDM6 BW20, WIFI 0mm/Zoom Scan (7x7x6)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 9.523 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 1.56 W/kg

**SAR(1 g) = 0.425 W/kg; SAR(10 g) = 0.137 W/kg**

Smallest distance from peaks to all points 3 dB below = 8.4 mm

Ratio of SAR at M2 to SAR at M1 = 54.1%

Maximum value of SAR (measured) = 0.977 W/kg

**5250H/E15-A04577, Back Side, 5240MHz UNII-1 OFDM6 BW20, WIFI 0mm/Z Scan (1x1x19):** Measurement grid: dx=20mm, dy=20mm, dz=20mm

Penetration depth = n/a (n/a, 29.87) [mm]

Maximum value of SAR (interpolated) = 0.0198 W/kg

