

TEST REPORT

Product Name : Smart Blind Controller
Brand Mark : Globe
Model No. : 50348
Report Number : BLA-EMC-202103-A11001
Date of Sample Receipt : 2021/3/25
Date of Test : 2021/4/22 to 2021/4/25
Date of Issue : 2021/4/25
FCC ID : 2AQUQGE50348
Test Standard : 47 CFR Part 15, Subpart C 15.247
Test Result : Pass

Prepared for:

Globe Electric Company Inc.

150, Oneida, Montreal, Quebec, Canada, H9R 1A8

Prepared by:

BlueAsia of Technical Services(Shenzhen) Co.,Ltd.

**Building C, No. 107, Shihuan Road, Shiyuan Sub-District, Baoan District,
Shenzhen, Guangdong Province, China**

TEL: +86-755-23059481

Compiled by:

Jozu.

Review by:

Sweet. Liang

Approved by:

Tmen li

Date:

2021/4/25



REPORT REVISE RECORD

Version No.	Date	Description
00	2021/4/25	Original

BlueAsia

TABLE OF CONTENTS

1	TEST SUMMARY	6
2	GENERAL INFORMATION	7
3	GENERAL DESCRIPTION OF E.U.T.	7
4	TEST ENVIRONMENT	8
5	TEST MODE	8
6	MEASUREMENT UNCERTAINTY	8
7	DESCRIPTION OF SUPPORT UNIT.....	9
8	LABORATORY LOCATION.....	9
9	TEST INSTRUMENTS LIST	10
	RADIATED EMISSIONS WHICH FALL IN THE RESTRICTED BANDS	13
	LIMITS.....	13
	BLOCK DIAGRAM OF TEST SETUP.....	14
	PROCEDURE	14
	TEST DATA	16
	CONDUCTED EMISSIONS AT AC POWER LINE (150KHZ-30MHZ)	20
	LIMITS.....	20
	BLOCK DIAGRAM OF TEST SETUP.....	20
	PROCEDURE	20
	TEST DATA	22
	CONDUCTED BAND EDGES MEASUREMENT	24
	LIMITS.....	24
	BLOCK DIAGRAM OF TEST SETUP.....	24
	TEST DATA	25
	RADIATED SPURIOUS EMISSIONS	26
	LIMITS.....	26
	BLOCK DIAGRAM OF TEST SETUP.....	27
	PROCEDURE	27
	TEST DATA	29
	CONDUCTED SPURIOUS EMISSIONS.....	37
	LIMITS.....	37

BLOCK DIAGRAM OF TEST SETUP	37
TEST DATA	38
POWER SPECTRUM DENSITY	39
LIMITS.....	39
BLOCK DIAGRAM OF TEST SETUP	39
TEST DATA	39
CONDUCTED PEAK OUTPUT POWER	40
LIMITS.....	40
BLOCK DIAGRAM OF TEST SETUP	40
TEST DATA	41
MINIMUM 6DB BANDWIDTH	42
LIMITS.....	42
BLOCK DIAGRAM OF TEST SETUP	42
TEST DATA	42
ANTENNA REQUIREMENT.....	43
CONCLUSION.....	43
10 APPENDIX.....	44
10.1 APPENDIXA: DTS BANDWIDTH.....	44
<i>Test Result</i>	44
<i>Test Graphs</i>	45
10.2 APPENDIXB: OCCUPIED CHANNEL BANDWIDTH	47
<i>Test Result</i>	47
<i>Test Graphs</i>	48
10.3 APPENDIXC: MAXIMUM CONDUCTED OUTPUT POWER	50
<i>Test Result</i>	50
<i>Test Graphs</i>	51
10.4 APPENDIXD: MAXIMUM POWER SPECTRAL DENSITY.....	53
<i>Test Result</i>	53
<i>Test Graphs</i>	54
10.5 APPENDIXE: BAND EDGE MEASUREMENTS	56
<i>Test Result</i>	56
<i>Test Graphs</i>	57
10.6 APPENDIXF: CONDUCTED SPURIOUS EMISSION	58
<i>Test Result</i>	58

Test Graphs	59
APPENDIX A: PHOTOGRAPHS OF TEST SETUP	63
APPENDIX B: PHOTOGRAPHS OF EUT	65

BlueAsia

1 TEST SUMMARY

Test item	Test Requirement	Test Method	Class/Severity	Result
Radiated Emissions which fall in the restricted bands	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 6.10.5	47 CFR Part 15, Subpart C 15.209 & 15.247(d)	Pass
Conducted Emissions at AC Power Line (150kHz-30MHz)	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 6.2	47 CFR Part 15, Subpart C 15.207	Pass
Conducted Band Edges Measurement	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 7.8.8 & Section 11.13.3.2	47 CFR Part 15, Subpart C 15.247(d)	Pass
Radiated Spurious Emissions	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 6.4,6.5,6.6	47 CFR Part 15, Subpart C 15.209 & 15.247(d)	Pass
Conducted Spurious Emissions	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 7.8.6 & Section 11.11	47 CFR Part 15, Subpart C 15.247(d)	Pass
Power Spectrum Density	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 11.10.2	47 CFR Part 15, Subpart C 15.247(e)	Pass
Conducted Peak Output Power	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 7.8.5	47 CFR Part 15, Subpart C 15.247(b)(3)	Pass
Minimum 6dB Bandwidth	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 11.8.1	47 CFR Part 15, Subpart C 15.247a(2)	Pass
Antenna Requirement	47 CFR Part 15, Subpart C 15.247	N/A	47 CFR Part 15, Subpart C 15.203 & 15.247(c)	Pass

2 GENERAL INFORMATION

Applicant	Globe Electric Company Inc.
Address	150, Oneida, Montreal, Quebec, Canada, H9R 1A8
Manufacturer	Globe Electric Company Inc.
Address	150, Oneida, Montreal, Quebec, Canada, H9R 1A8
Factory	Globe Electric Company Inc.
Address	150, Oneida, Montreal, Quebec, Canada, H9R 1A8
Product Name	Smart Blind Controller
Test Model No.	50348

3 GENERAL DESCRIPTION OF E.U.T.

Hardware Version	V1.0
Software Version	V1.0
Operation Frequency:	2402MHz-2480MHz
Modulation Type:	GFSK
Channel Spacing:	2MHz
Number of Channels:	40
Antenna Type:	PCB Antenna
Antenna Gain:	2.5dBi(Provided by customer)

4 TEST ENVIRONMENT

Environment	Temperature	Voltage
Normal	+25°C	AC120V 60Hz

5 TEST MODE

TEST MODE	TEST MODE DESCRIPTION
TX	Keep the EUT in transmitting mode with modulation
charge+TX	Keep the EUT in transmitting mode and being charged
Remark: Only the data of the worst mode would be recorded in this report.	

6 MEASUREMENT UNCERTAINTY

Parameter	Expanded Uncertainty (Confidence of 95%)
Radiated Emission(9kHz-30MHz)	±4.34dB
Radiated Emission(30Mz-1000MHz)	±4.24dB
Radiated Emission(1GHz-18GHz)	±4.68dB
AC Power Line Conducted Emission(150kHz-30MHz)	±3.45dB

Parameter	Expanded Uncertainty (Confidence of 95%)
Occupied Channel Bandwidth	±5 %
RF output power, conducted	±1.5 dB
Power Spectral Density, conducted	±3.0 dB
Unwanted Emissions, conducted	±3.0 dB
Temperature	±3 °C
Supply voltages	±3 %
Time	±5 %
Radiated Emission (30MHz ~ 1000MHz)	±4.35 dB
Radiated Emission (1GHz ~ 18GHz)	±4.44 dB

7 DESCRIPTION OF SUPPORT UNIT

Device Type	Manufacturer	Model Name	Serial No.	Remark
--	--	--	--	--

Note:

--" means no any support device during testing.

8 LABORATORY LOCATION

All tests were performed at:

BlueAsia of Technical Services(Shenzhen) Co., Ltd.

Building C, No. 107, Shihuan Road, Shiyan Sub-District, Baoan District, Shenzhen, Guangdong Province, China

Telephone: TEL: +86-755-28682673 FAX: +86-755-28682673

No tests were sub-contracted.

9 TEST INSTRUMENTS LIST

Test Equipment Of Radiated Emissions which fall in the restricted bands					
Equipment	Manufacturer	Model	S/N	Cal.Date	Cal.Due
Chamber	SKET	966	N/A	2020/11/10	2023/11/9
Spectrum	R&S	FSP40	100817	2020/10/12	2021/10/11
Receiver	R&S	ESR7	101199	2020/10/12	2021/10/11
broadband Antenna	Schwarzbeck	VULB9168	00836 P:00227	2020/9/26	2022/9/25
Horn Antenna	Schwarzbeck	9120D	01892 P:00331	2020/9/26	2022/9/25
Amplifier	SKET	PA-000318G-45	N/A	2020/10/16	2021/10/15
EMI software	EZ	EZ-EMC	EEMC-3A1	N/A	N/A
Loop antenna	SCHNARZBECK	FMZB1519B	00102	2020/9/26	2022/9/25
Controller	SKET	N/A	N/A	N/A	N/A
Coaxial Cable	BlueAsia	BLA-XC-02	N/A	N/A	N/A
Coaxial Cable	BlueAsia	BLA-XC-03	N/A	N/A	N/A
Coaxial Cable	BlueAsia	BLA-XC-01	N/A	N/A	N/A

Test Equipment Of Conducted Emissions at AC Power Line (150kHz-30MHz)					
Equipment	Manufacturer	Model	S/N	Cal.Date	Cal.Due
Shield room	SKET	833	N/A	2020/11/25	2023/11/24
Receiver	R&S	ESPI3	101082	2020/10/12	2021/10/11
LISN	R&S	ENV216	3560.6550.15	2020/10/12	2021/10/11
LISN	安泰信	AT166-2	AKK1806000003	2020/10/12	2021/10/11
EMI software	EZ	EZ-EMC	EEMC-3A1	N/A	N/A

Test Equipment Of Conducted Band Edges Measurement					
Equipment	Manufacturer	Model	S/N	Cal.Date	Cal.Due
Spectrum	R&S	FSP40	100817	2020/10/12	2021/10/11
Spectrum	Agilent	N9020A	MY49100060	2020/10/12	2021/10/11
Signal Generator	Agilent	N5182A	MY49060650	2020/10/12	2021/10/11
Signal Generator	Agilent	E8257D	MY44320250	2020/10/12	2021/10/11

Test Equipment Of Radiated Spurious Emissions					
Equipment	Manufacturer	Model	S/N	Cal.Date	Cal.Due
Chamber	SKET	966	N/A	2020/11/10	2023/11/9
Spectrum	R&S	FSP40	100817	2020/10/12	2021/10/11
Receiver	R&S	ESR7	101199	2020/10/12	2021/10/11
broadband Antenna	Schwarzbeck	VULB9168	00836 P:00227	2020/9/26	2022/9/25
Horn Antenna	Schwarzbeck	9120D	01892 P:00331	2020/9/26	2022/9/25
Amplifier	SKET	PA-000318G-45	N/A	2020/10/16	2021/10/15
EMI software	EZ	EZ-EMC	EEMC-3A1	N/A	N/A
Loop antenna	SCHNARZBECK	FMZB1519B	00102	2020/9/26	2022/9/25
Controller	SKET	N/A	N/A	N/A	N/A
Coaxial Cable	BlueAsia	BLA-XC-02	N/A	N/A	N/A
Coaxial Cable	BlueAsia	BLA-XC-03	N/A	N/A	N/A
Coaxial Cable	BlueAsia	BLA-XC-01	N/A	N/A	N/A

Test Equipment Of Conducted Spurious Emissions					
Equipment	Manufacturer	Model	S/N	Cal.Date	Cal.Due
Spectrum	R&S	FSP40	100817	2020/10/12	2021/10/11
Spectrum	Agilent	N9020A	MY49100060	2020/10/12	2021/10/11
Signal Generator	Agilent	N5182A	MY49060650	2020/10/12	2021/10/11
Signal Generator	Agilent	E8257D	MY44320250	2020/10/12	2021/10/11

Test Equipment Of Power Spectrum Density					
Equipment	Manufacturer	Model	S/N	Cal.Date	Cal.Due
Spectrum	R&S	FSP40	100817	2020/10/12	2021/10/11
Spectrum	Agilent	N9020A	MY49100060	2020/10/12	2021/10/11
Signal Generator	Agilent	N5182A	MY49060650	2020/10/12	2021/10/11
Signal Generator	Agilent	E8257D	MY44320250	2020/10/12	2021/10/11

Test Equipment Of Conducted Peak Output Power					
Equipment	Manufacturer	Model	S/N	Cal.Date	Cal.Due
Spectrum	R&S	FSP40	100817	2020/10/12	2021/10/11
Spectrum	Agilent	N9020A	MY49100060	2020/10/12	2021/10/11
Signal Generator	Agilent	N5182A	MY49060650	2020/10/12	2021/10/11
Signal Generator	Agilent	E8257D	MY44320250	2020/10/12	2021/10/11

Test Equipment Of Minimum 6dB Bandwidth

Equipment	Manufacturer	Model	S/N	Cal.Date	Cal.Due
Spectrum	R&S	FSP40	100817	2020/10/12	2021/10/11
Spectrum	Agilent	N9020A	MY49100060	2020/10/12	2021/10/11
Signal Generator	Agilent	N5182A	MY49060650	2020/10/12	2021/10/11
Signal Generator	Agilent	E8257D	MY44320250	2020/10/12	2021/10/11

RADIATED EMISSIONS WHICH FALL IN THE RESTRICTED BANDS


Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	ANSI C63.10 (2013) Section 6.10.5
Test Mode (Pre-Scan)	TX Low channel;TX high channel
Test Mode (Final Test)	TX Low channel;TX high channel
Tester	Jozu
Temperature	25℃
Humidity	60%

LIMITS

Frequency(MHz)	Field strength(microvolts/meter)	Measurement distance(meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Remark: The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90kHz, 110-490kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.

BLOCK DIAGRAM OF TEST SETUP

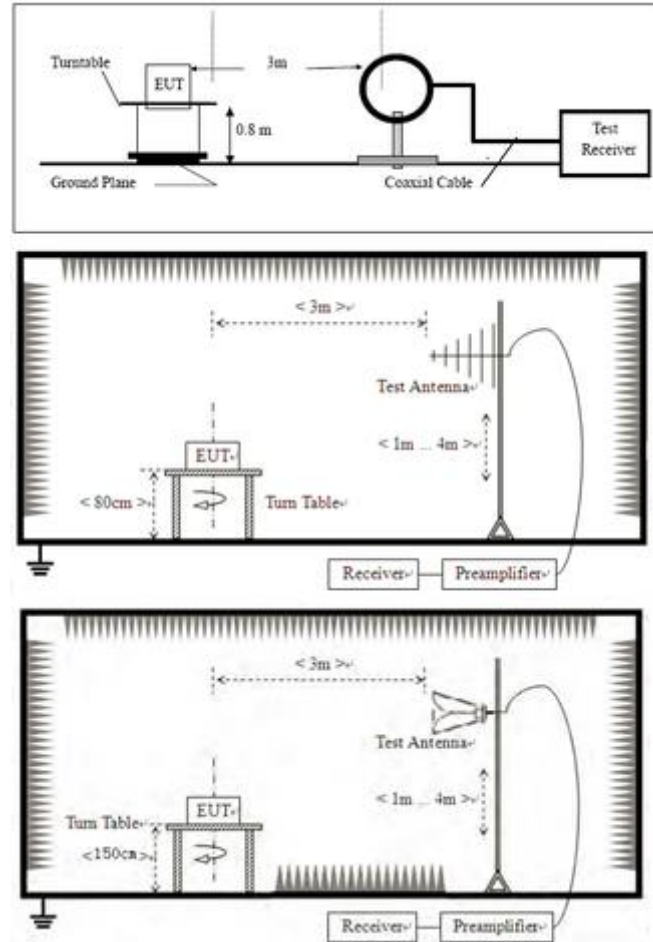

PROCEDURE

- For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing

could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

h. Test the EUT in the lowest channel, the middle channel, the Highest channel.

i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.

j. Repeat above procedures until all frequencies measured was complete.


Remark 1: $\text{Level} = \text{Read Level} + \text{Cable Loss} + \text{Antenna Factor} - \text{Preamplifier Factor}$

Remark 2: For frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For the emissions whose peak level is lower than the average limit, only the peak measurement is shown in the report.

TEST DATA

[Polarity: Horizontal]

Radiated Emission Measurement

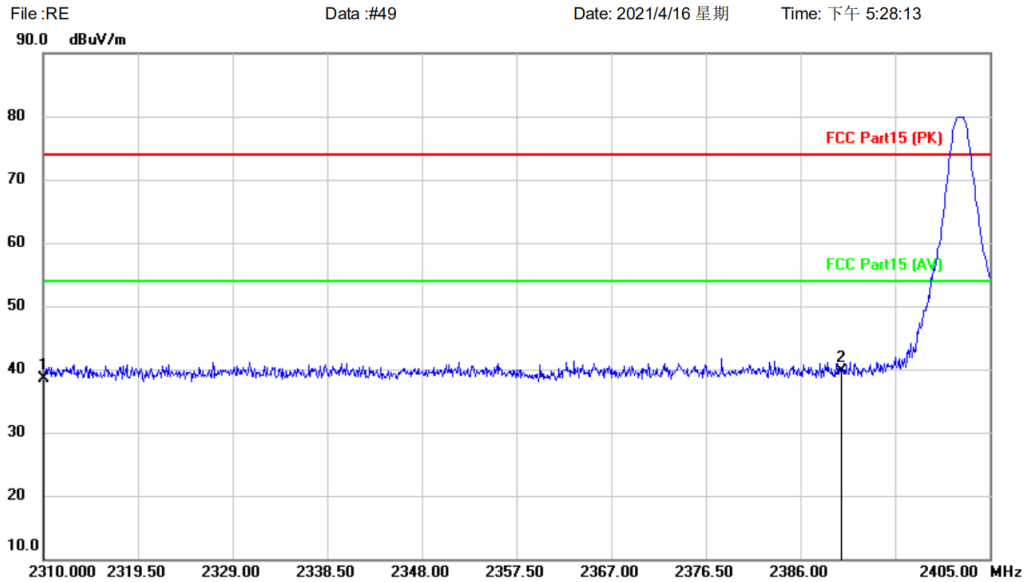

Site Polarization: **Horizontal** Temperature:

Limit: FCC Part15 (PK) Power: Humidity: %

EUT: Smart Blind Controller Distance: 3m

M/N: 50348

Mode: BLE-TX-L

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		2310.000	43.20	-4.61	38.59	74.00	-35.41	peak		Comment
2	*	2390.000	44.01	-4.27	39.74	74.00	-34.26	peak		


*:Maximum data x:Over limit !:over margin

<Reference Only

Test Result: Pass

[Polarity: Horizontal]

Radiated Emission Measurement

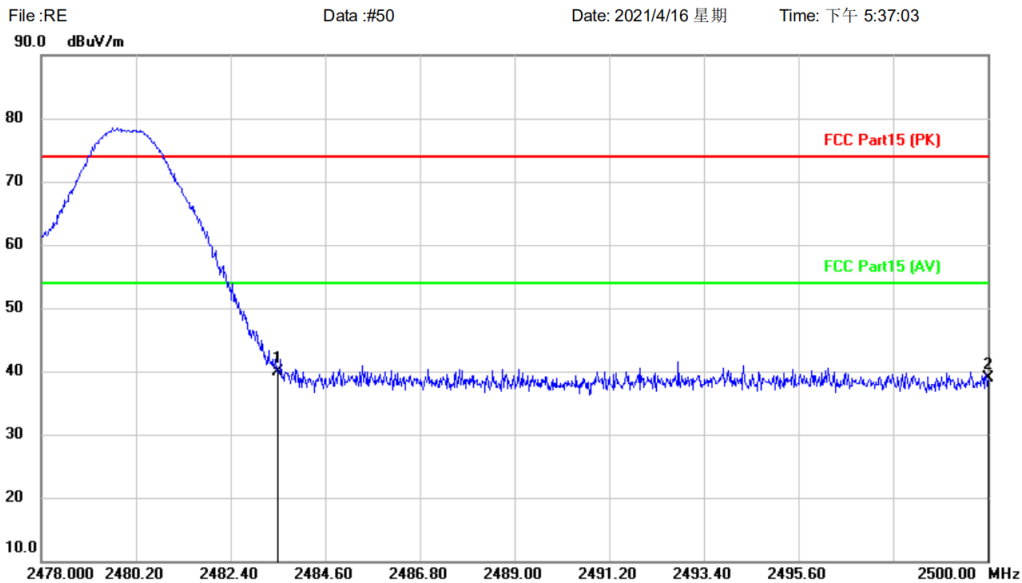

Site
Limit: FCC Part15 (PK)
EUT: Smart Blind Controller
M/N: 50348
Mode: BLE-TX-H
Note:

Polarization: **Horizontal**
Power:
Distance: 3m

Temperature:
Humidity: %

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree	Comment
1	*	2483.500	43.74	-3.84	39.90	74.00	-34.10	peak		
2		2500.000	42.69	-3.78	38.91	74.00	-35.09	peak		


*:Maximum data x:Over limit !:over margin

〈Reference Only

Test Result: Pass

[Polarity: Vertical]

Radiated Emission Measurement

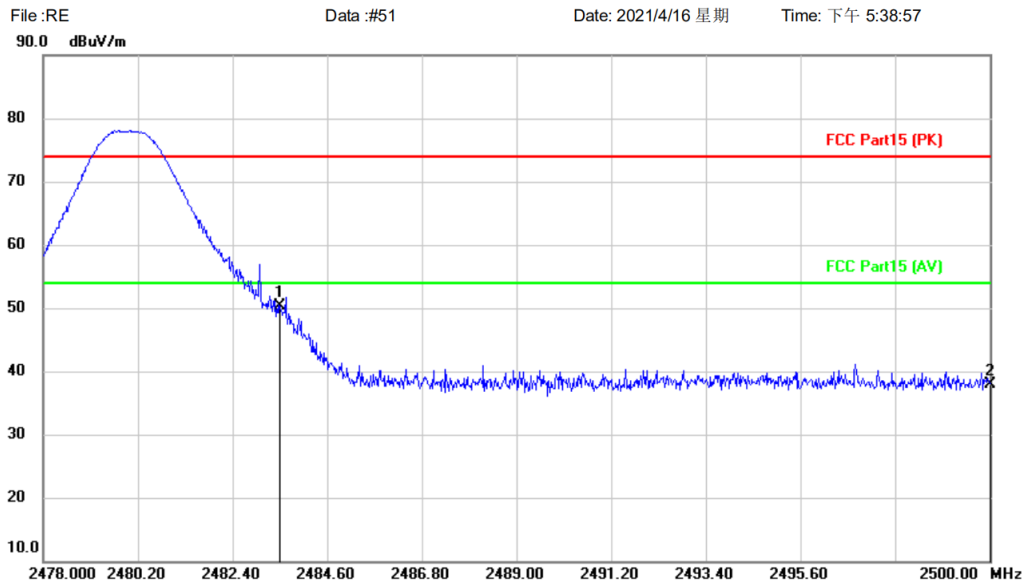

Site
Limit: FCC Part15 (PK)
EUT: Smart Blind Controller
M/N: 50348
Mode: BLE-TX-H
Note:

Polarization: **Vertical**
Power:
Distance: 3m

Temperature:
Humidity: %

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree	Comment
1	*	2483.500	54.10	-3.84	50.26	74.00	-23.74	peak		
2		2500.000	41.70	-3.78	37.92	74.00	-36.08	peak		


*:Maximum data x:Over limit !:over margin

〈Reference Only

Test Result: Pass

[Polarity: Vertical]

Radiated Emission Measurement

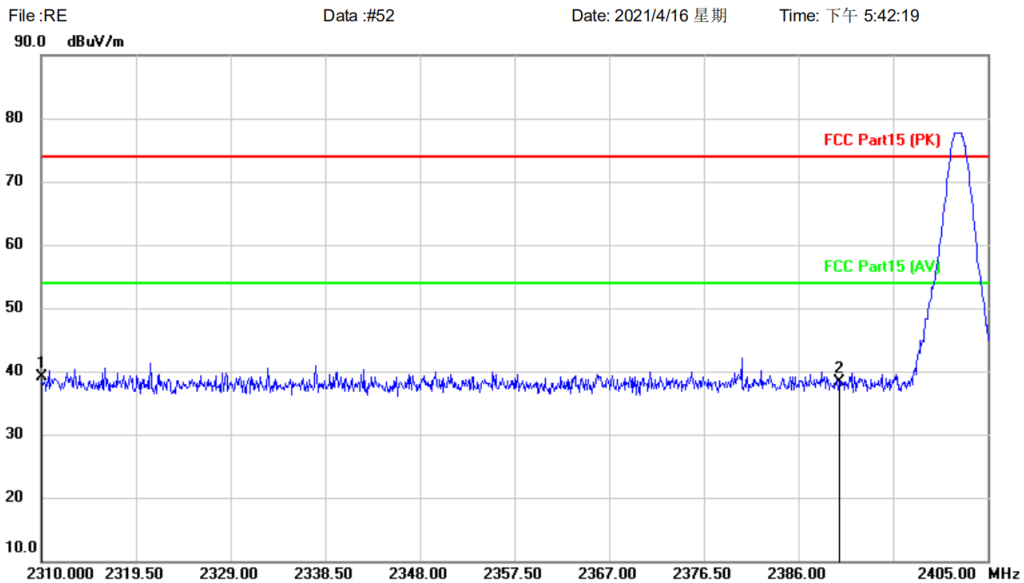

Site Polarization: **Vertical** Temperature:
Limit: FCC Part15 (PK) Power: Humidity: %
EUT: Smart Blind Controller Distance: 3m
M/N: 50348
Mode: BLE-TX-L
Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1	*	2310.000	43.70	-4.61	39.09	74.00	-34.91	peak		
2		2390.000	42.65	-4.27	38.38	74.00	-35.62	peak		

*:Maximum data x:Over limit !:over margin

〈Reference Only

Test Result: Pass

CONDUCTED EMISSIONS AT AC POWER LINE (150KHZ-30MHZ)


Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	ANSI C63.10 (2013) Section 6.2
Test Mode (Pre-Scan)	charge+TX
Test Mode (Final Test)	charge+TX
Tester	Jozu
Temperature	25℃
Humidity	60%

LIMITS

Frequency of emission(MHz)	Conducted limit(dBμV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.

BLOCK DIAGRAM OF TEST SETUP

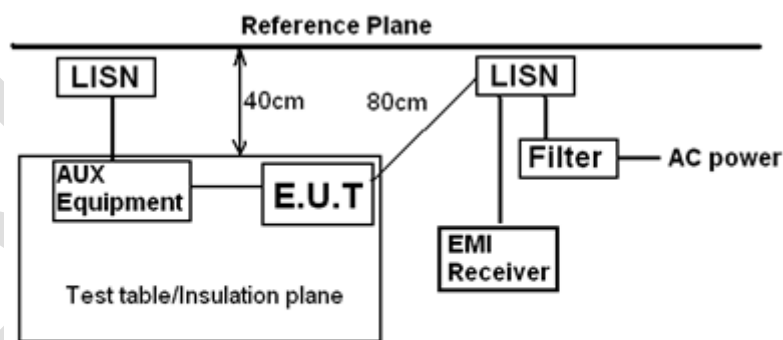

Remark
E.U.T: Equipment Under Test
LISN: Line Impedance Stabilization Network
Test table height=0.8m

PROCEDURE


- 1) The mains terminal disturbance voltage test was conducted in a shielded room.
- 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a 50ohm/50H + 5ohm linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.

- 3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane,
- 4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2.
- 5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10 on conducted measurement.

Remark: $LISN = Read\ Level + Cable\ Loss + LISN\ Factor$

TEST DATA

[Line: Line]

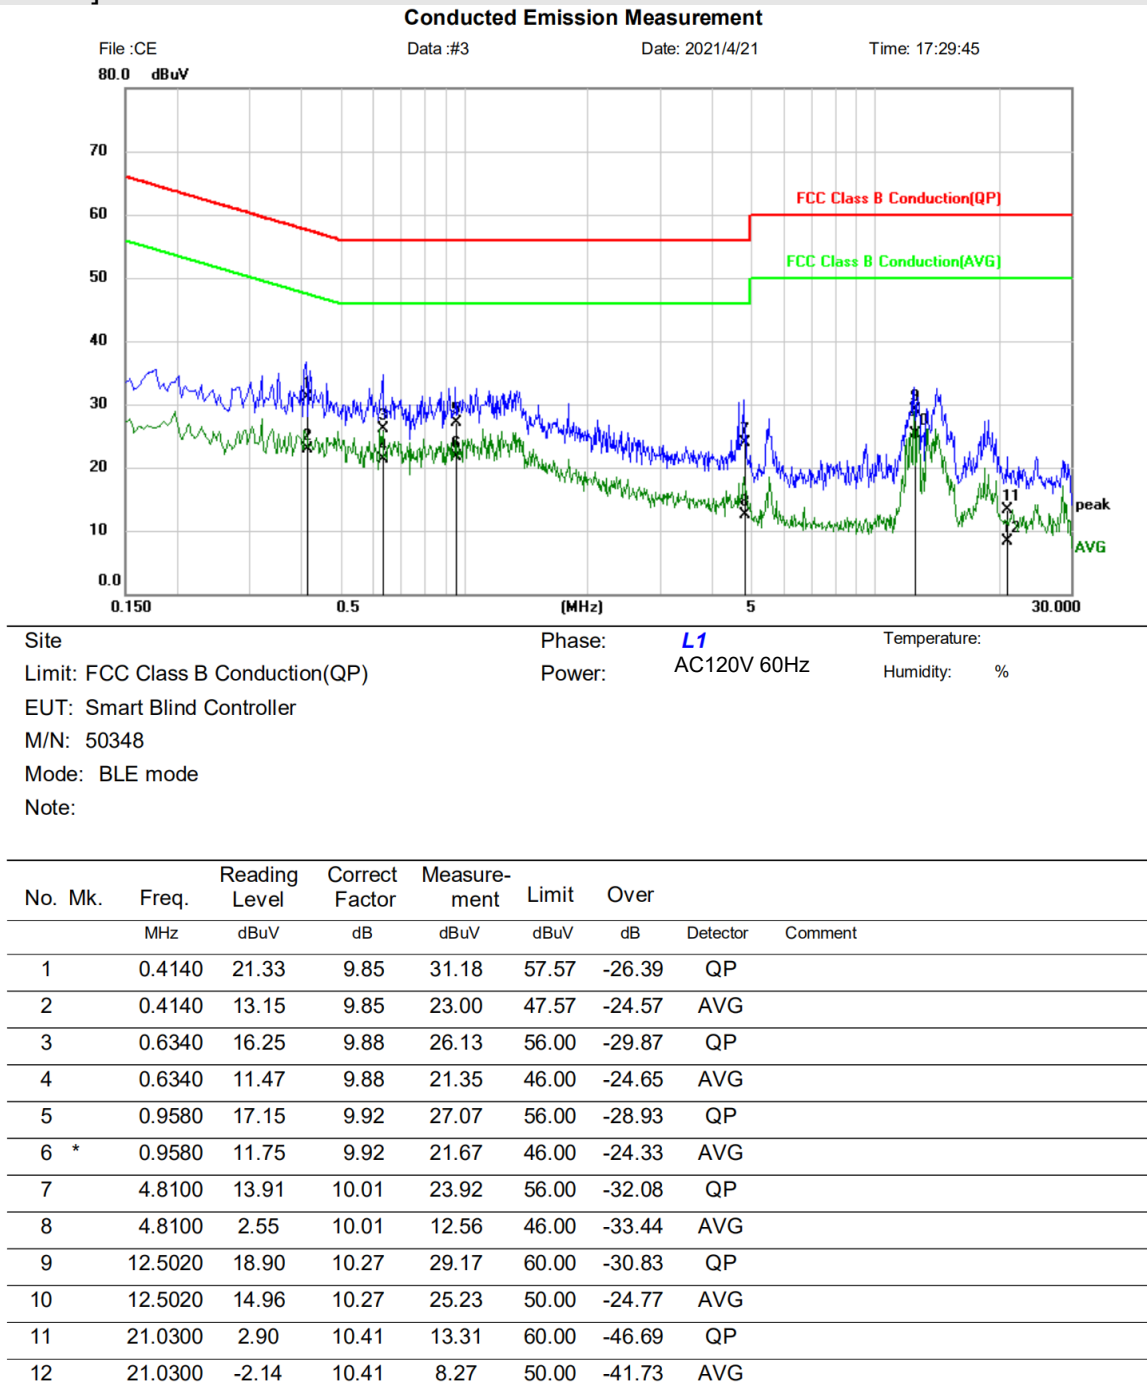


*:Maximum data x:Over limit !:over margin

<Reference Only

Test Result: Pass

[Line: Nutral]

Conducted Emission Measurement

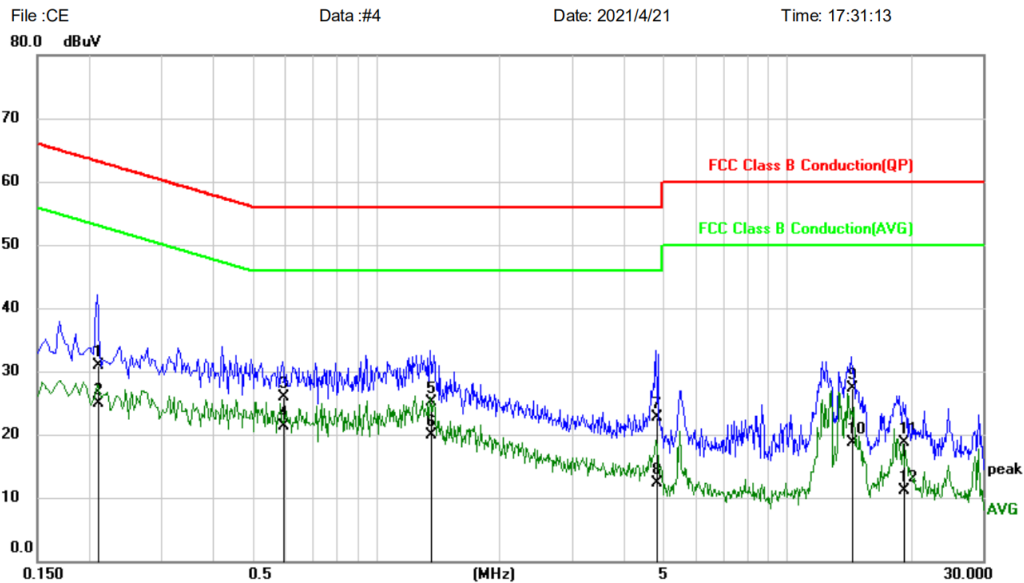

Site
Limit: FCC Class B Conduction(QP)
EUT: Smart Blind Controller
M/N: 50348
Mode: BLE mode
Note:

Phase: **N** Temperature:
Power: AC120V 60Hz Humidity: %

No. Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
	MHz	dBuV	dB	dBuV	dBuV	dB	Detector	Comment
1	0.2100	21.08	9.75	30.83	63.21	-32.38	QP	
2	0.2100	15.22	9.75	24.97	53.21	-28.24	AVG	
3	0.5940	16.10	9.80	25.90	56.00	-30.10	QP	
4 *	0.5940	11.45	9.80	21.25	46.00	-24.75	AVG	
5	1.3540	15.33	9.85	25.18	56.00	-30.82	QP	
6	1.3540	10.00	9.85	19.85	46.00	-26.15	AVG	
7	4.8220	12.69	9.94	22.63	56.00	-33.37	QP	
8	4.8220	2.32	9.94	12.26	46.00	-33.74	AVG	
9	14.3940	16.94	10.29	27.23	60.00	-32.77	QP	
10	14.3940	8.39	10.29	18.68	50.00	-31.32	AVG	
11	19.1500	8.35	10.41	18.76	60.00	-41.24	QP	
12	19.1500	0.74	10.41	11.15	50.00	-38.85	AVG	

*:Maximum data x:Over limit !:over margin

<Reference Only

Test Result: Pass


CONDUCTED BAND EDGES MEASUREMENT

Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	ANSI C63.10 (2013) Section 7.8.8 & Section 11.13.3.2
Test Mode (Pre-Scan)	TX Low channel;TX high channel
Test Mode (Final Test)	TX Low channel;TX high channel
Tester	Emen
Temperature	25℃
Humidity	60%

LIMITS

Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).
---------------	--

BLOCK DIAGRAM OF TEST SETUP

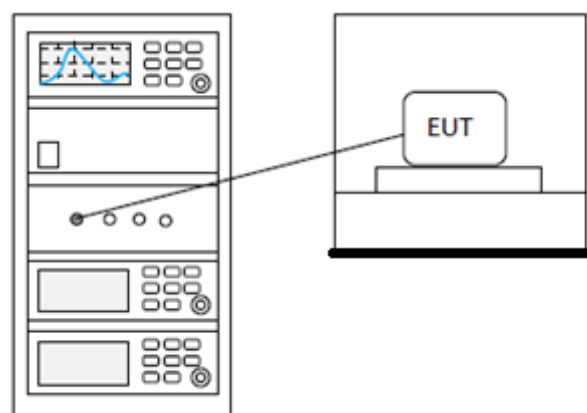

TEST DATA**Pass: Please Refer To Appendix: Appendix1 For Details**

BlueAsia

RADIATED SPURIOUS EMISSIONS


Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	ANSI C63.10 (2013) Section 6.4,6.5,6.6
Test Mode (Pre-Scan)	TX Low channel;TX middle channel;TX high channel;TX
Test Mode (Final Test)	TX Low channel;TX middle channel;TX high channel;TX
Tester	Jozu
Temperature	25℃
Humidity	60%

LIMITS

Frequency(MHz)	Field strength(microvolts/meter)	Measurement distance(meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Remark: The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90kHz, 110-490kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.

BLOCK DIAGRAM OF TEST SETUP

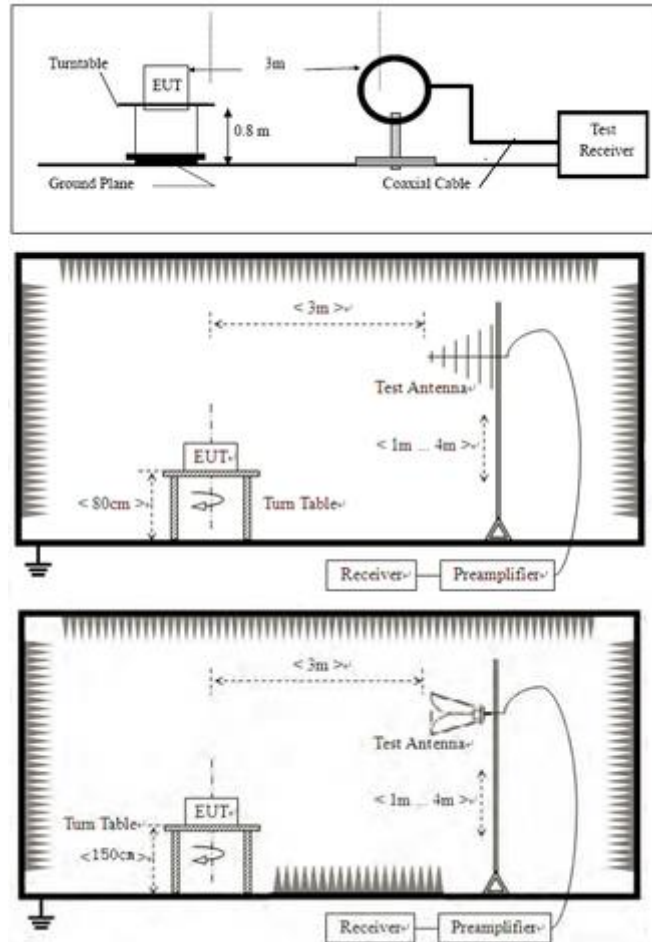

PROCEDURE

- For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

- h. Test the EUT in the lowest channel, the middle channel, the Highest channel.
- i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- j. Repeat above procedures until all frequencies measured was complete.


Remark:

- 1) For emission below 1GHz, through pre-scan found the worst case is the lowest channel. Only the worst case is recorded in the report.
- 2) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:
Final Test Level = Receiver Reading + Antenna Factor + Cable Factor - Preamplifier Factor
- 3) Scan from 9kHz to 25GHz, the disturbance above 12.75GHz and below 30MHz was very low. The points marked on above plots are the highest emissions could be found when testing, so only above points had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported. fundamental frequency is blocked by filter, and only spurious emission is shown.
- 4) For frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For the emissions whose peak level is lower than the average limit, only the peak measurement is shown in the report.

TEST DATA

[Polarity: Horizontal]

Radiated Emission Measurement

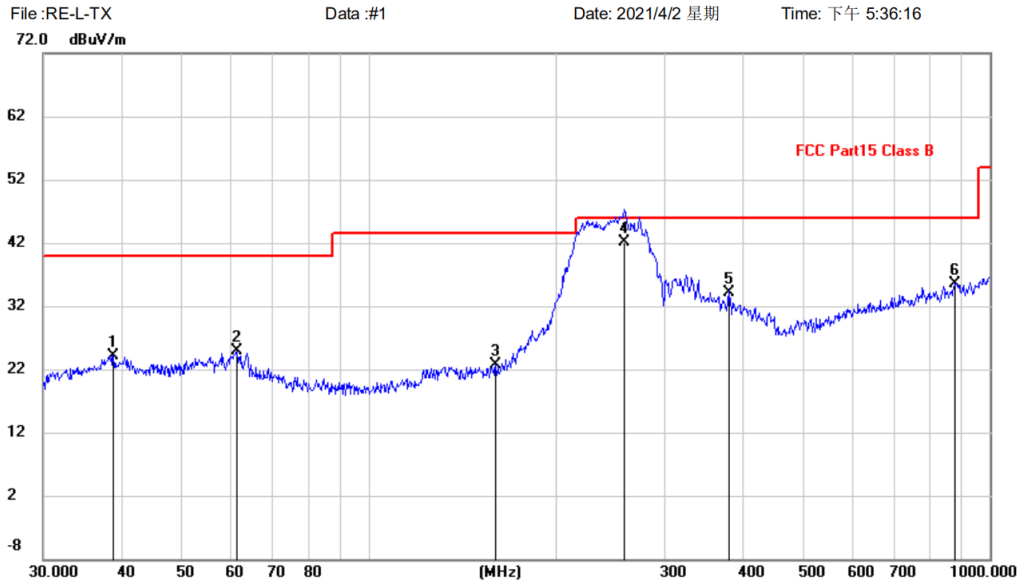

Site

Limit: FCC Part15 Class B

EUT: Smart Blind Controller

M/N: 50348

Mode: BT mode

Note:

Polarization: **Horizontal**

Temperature:

Power:

Humidity: %

Distance: 3m

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Antenna	Table	
		MHz	Level	Factor	ment			Height	Degree	
			dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		38.7518	0.32	23.86	24.18	40.00	-15.82	QP		
2		61.5617	1.78	23.12	24.90	40.00	-15.10	QP		
3		160.3454	-0.50	23.15	22.65	43.50	-20.85	QP		
4	*	258.3263	19.29	22.78	42.07	46.00	-3.93	QP		
5		379.9141	7.25	26.95	34.20	46.00	-11.80	QP		
6		878.3214	0.08	35.42	35.50	46.00	-10.50	QP		

*:Maximum data x:Over limit !:over margin

<Reference Only

Test Result: Pass

[Polarity: Vertical]


Radiated Emission Measurement

File :RE-L-TX
72.0 dBuV/m

Data :#2

Date: 2021/4/2 星期

Time: 下午 5:34:04

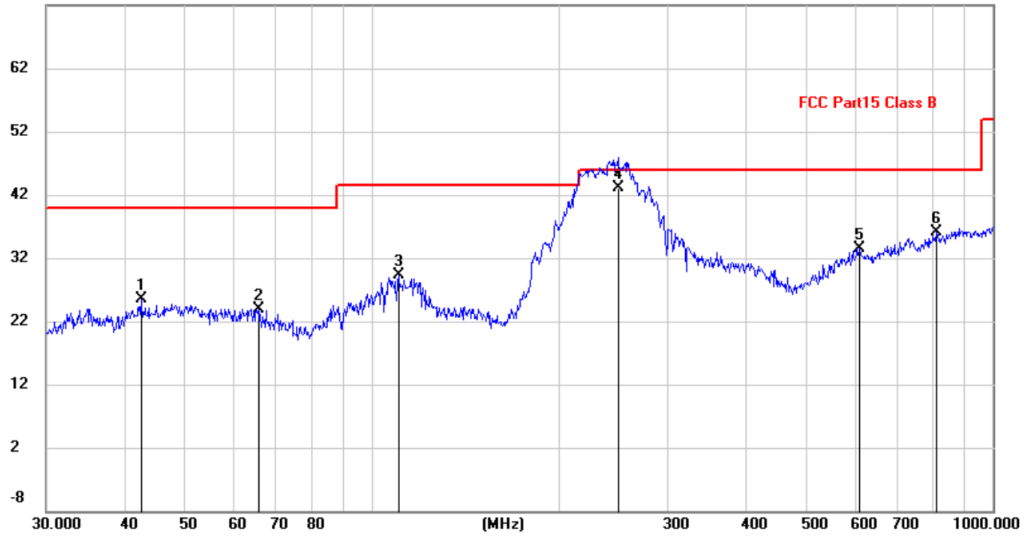

Site

Limit: FCC Part15 Class B

EUT: Smart Blind Controller

M/N: 50348

Mode: BT mode

Note:

Polarization: **Vertical**

Temperature:

Power:

Humidity: %

Distance: 3m

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		42.6000	1.60	23.97	25.57	40.00	-14.43	QP		
2		65.8031	1.76	22.22	23.98	40.00	-16.02	QP		
3		110.5687	7.83	21.56	29.39	43.50	-14.11	QP		
4	*	249.4250	20.29	22.85	43.14	46.00	-2.86	QP		
5		609.9215	1.76	31.74	33.50	46.00	-12.50	QP		
6		813.1114	1.28	34.83	36.11	46.00	-9.89	QP		

*:Maximum data x:Over limit !:over margin

〈Reference Only

Test Result: Pass

[Polarity: Vertical]

Radiated Emission Measurement


File :RE

Data :#43

Date: 2021/4/16 星期

Time: 下午 5:13:45

80.0 dBuV/m

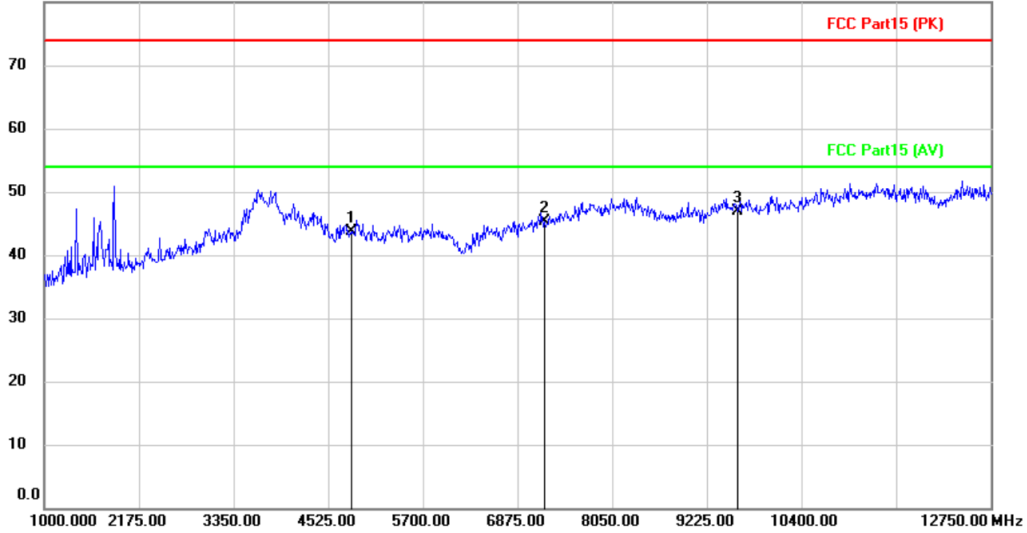

Site

Polarization: **Vertical**

Temperature:

Limit: FCC Part15 (PK)

Power:

Humidity: %

EUT: Smart Blind Controller

Distance: 3m

M/N: 50348

Mode: BLE-TX-L

Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree	Comment
1		4804.000	40.01	3.71	43.72	74.00	-30.28	peak		
2		7206.000	39.33	5.96	45.29	74.00	-28.71	peak		
3	*	9608.000	37.61	9.29	46.90	74.00	-27.10	peak		

*:Maximum data x:Over limit !:over margin

(Reference Only)

Test Result: Pass

[Polarity: Horizontal]

Radiated Emission Measurement


File :RE

Data :#44

Date: 2021/4/16 星期

Time: 下午 5:18:29

80.0 dBuV/m

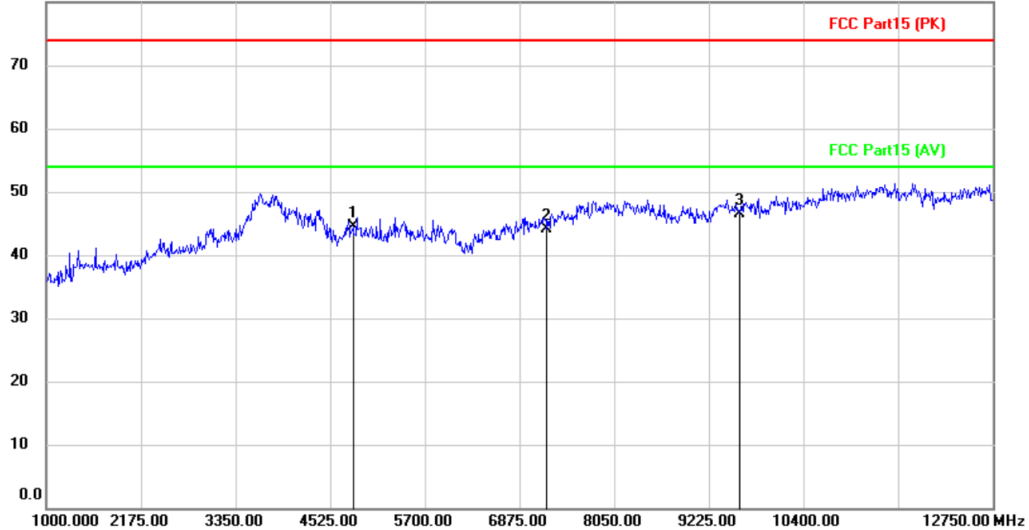

Site

Limit: FCC Part15 (PK)

EUT: Smart Blind Controller

M/N: 50348

Mode: BLE-TX-L

Note:

Polarization: **Horizontal**

Temperature:

Power:

Humidity: %

Distance: 3m

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree	Comment
1		4804.000	40.75	3.71	44.46	74.00	-29.54	peak		
2		7206.000	38.10	5.96	44.06	74.00	-29.94	peak		
3	*	9608.000	37.30	9.29	46.59	74.00	-27.41	peak		

*:Maximum data x:Over limit !:over margin

〈Reference Only

Test Result: Pass

[Polarity: Horizontal]

Radiated Emission Measurement


File :RE

Data :#45

Date: 2021/4/16 星期

Time: 下午 5:19:40

80.0 dBuV/m

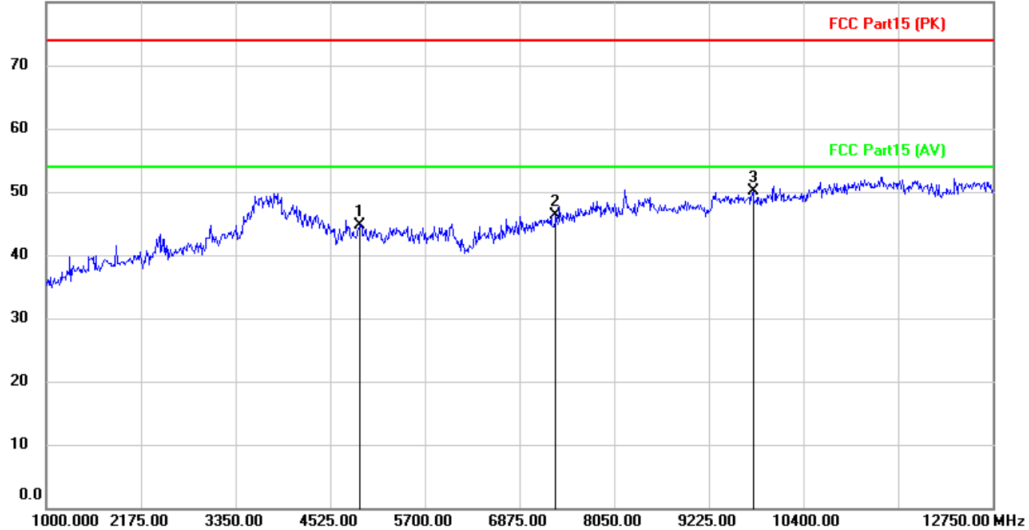

Site

Limit: FCC Part15 (PK)

EUT: Smart Blind Controller

M/N: 50348

Mode: BLE-TX-M

Note:

Polarization: **Horizontal**

Temperature:

Power:

Humidity: %

Distance: 3m

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree	Comment
1		4882.000	41.37	3.36	44.73	74.00	-29.27	peak		
2		7323.000	39.87	6.43	46.30	74.00	-27.70	peak		
3	*	9764.000	40.50	9.63	50.13	74.00	-23.87	peak		

*:Maximum data x:Over limit !:over margin

<Reference Only

Test Result: Pass

[Polarity: Vertical]

Radiated Emission Measurement


File :RE

Data :#46

Date: 2021/4/16 星期

Time: 下午 5:20:50

80.0 dBuV/m

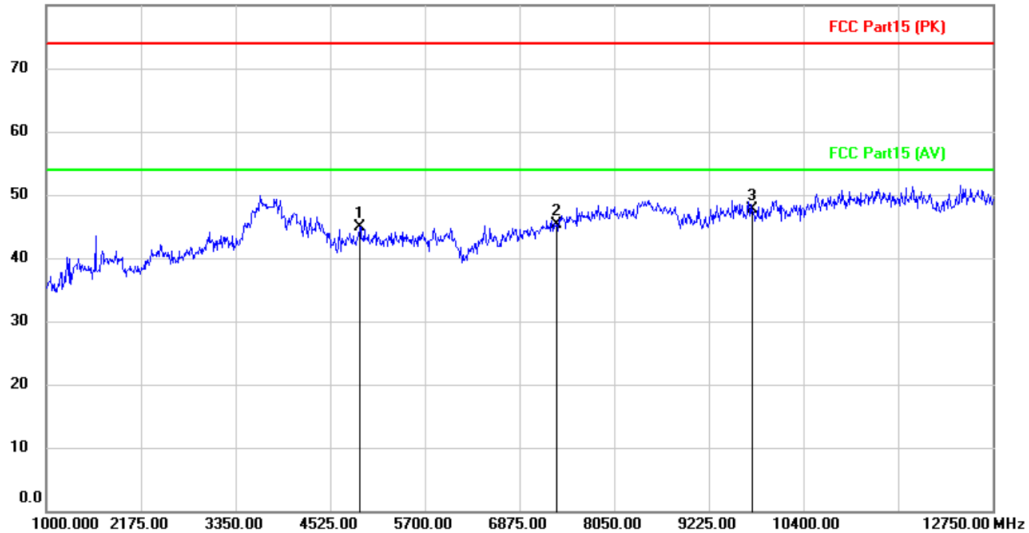

Site

Polarization: **Vertical**

Temperature:

Limit: FCC Part15 (PK)

Power:

Humidity: %

EUT: Smart Blind Controller

Distance: 3m

M/N: 50348

Mode: BLE-TX-M

Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree	Comment
1		4882.000	41.51	3.36	44.87	74.00	-29.13	peak		
2		7323.000	38.94	6.43	45.37	74.00	-28.63	peak		
3	*	9764.000	38.06	9.63	47.69	74.00	-26.31	peak		

*:Maximum data x:Over limit !:over margin

(Reference Only)

Test Result: Pass

[Polarity: Vertical]

Radiated Emission Measurement


File :RE

Data :#47

Date: 2021/4/16 星期

Time: 下午 5:22:56

80.0 dBuV/m

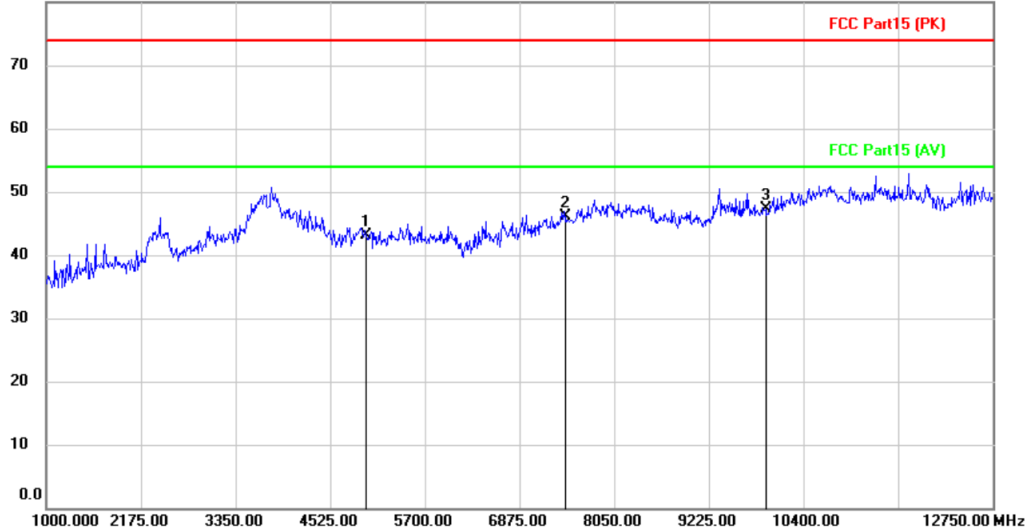

Site

Polarization: **Vertical**

Temperature:

Limit: FCC Part15 (PK)

Power:

Humidity: %

EUT: Smart Blind Controller

Distance: 3m

M/N: 50348

Mode: BLE-TX-H

Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree	Comment
1		4960.000	39.37	3.75	43.12	74.00	-30.88	peak		
2		7440.000	39.25	6.86	46.11	74.00	-27.89	peak		
3	*	9920.000	37.10	10.16	47.26	74.00	-26.74	peak		

*:Maximum data x:Over limit !:over margin

<Reference Only

Test Result: Pass

[Polarity: Horizontal]

Radiated Emission Measurement


File :RE

Data :#48

Date: 2021/4/16 星期

Time: 下午 5:24:02

80.0 dBuV/m

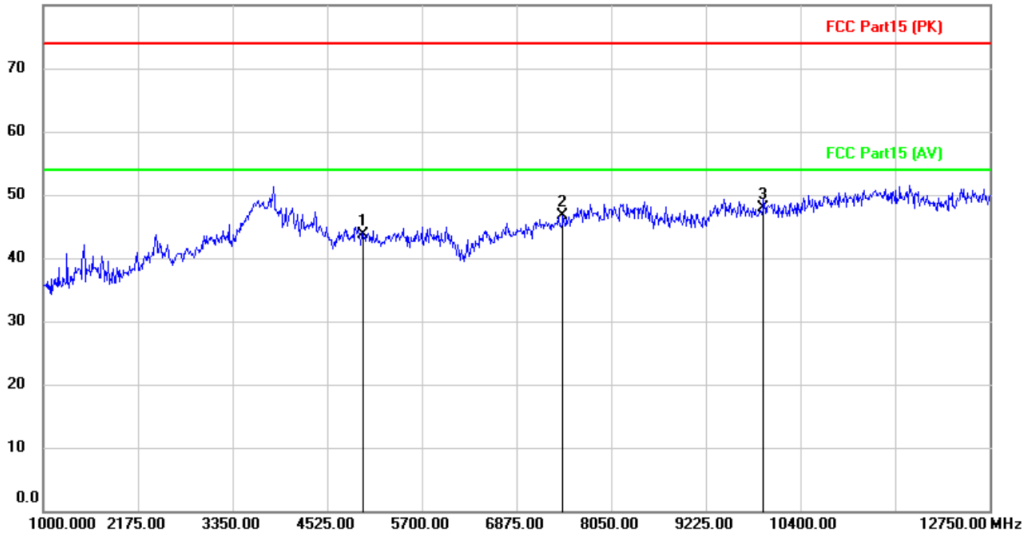

Site

Polarization: **Horizontal**

Temperature:

Limit: FCC Part15 (PK)

Power:

Humidity: %

EUT: Smart Blind Controller

Distance: 3m

M/N: 50348

Mode: BLE-TX-H

Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree	Comment
1		4960.000	39.89	3.75	43.64	74.00	-30.36	peak		
2		7440.000	39.80	6.86	46.66	74.00	-27.34	peak		
3	*	9920.000	37.79	10.16	47.95	74.00	-26.05	peak		

*:Maximum data x:Over limit !:over margin

<Reference Only

Test Result: Pass


CONDUCTED SPURIOUS EMISSIONS

Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	ANSI C63.10 (2013) Section 7.8.6 & Section 11.11
Test Mode (Pre-Scan)	TX Low channel;TX middle channel;TX high channel;TX
Test Mode (Final Test)	TX Low channel;TX middle channel;TX high channel;TX
Tester	Jozu
Temperature	25℃
Humidity	60%

LIMITS

Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).
---------------	--

BLOCK DIAGRAM OF TEST SETUP

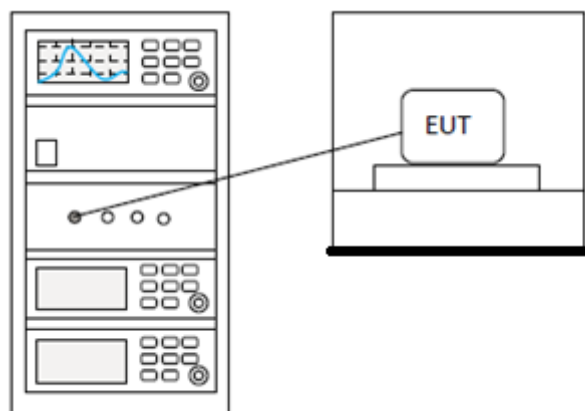

TEST DATA**Pass: Please Refer To Appendix: Appendix1 For Details**

BlueAsia


POWER SPECTRUM DENSITY

Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	ANSI C63.10 (2013) Section 11.10.2
Test Mode (Pre-Scan)	TX Low channel;TX middle channel;TX high channel;TX
Test Mode (Final Test)	TX Low channel;TX middle channel;TX high channel;TX
Tester	Jozu
Temperature	25℃
Humidity	60%

LIMITS

Limit:	≤8dBm in any 3 kHz band during any time interval of continuous transmission
---------------	---

BLOCK DIAGRAM OF TEST SETUP

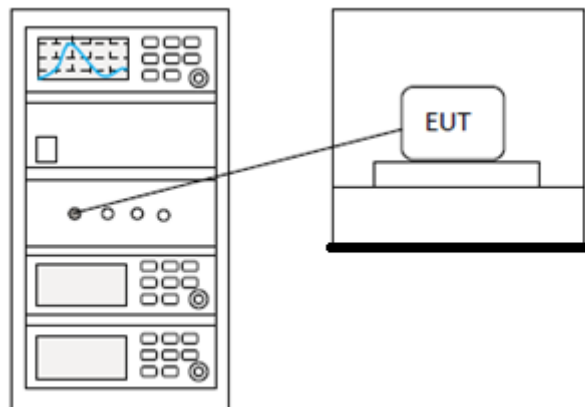

TEST DATA

Pass: Please Refer To Appendix: Appendix1 For Details


CONDUCTED PEAK OUTPUT POWER

Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	ANSI C63.10 (2013) Section 7.8.5
Test Mode (Pre-Scan)	TX Low channel;TX middle channel;TX high channel;TX
Test Mode (Final Test)	TX Low channel;TX middle channel;TX high channel;TX
Tester	Jozu
Temperature	25℃
Humidity	60%

LIMITS

Frequency range(MHz)	Output power of the intentional radiator(watt)
902-928	1 for ≥ 50 hopping channels
	0.25 for $25 \leq \text{hopping channels} < 50$
	1 for digital modulation
2400-2483.5	1 for ≥ 75 non-overlapping hopping channels
	0.125 for all other frequency hopping systems
	1 for digital modulation
5725-5850	1 for frequency hopping systems and digital modulation

BLOCK DIAGRAM OF TEST SETUP

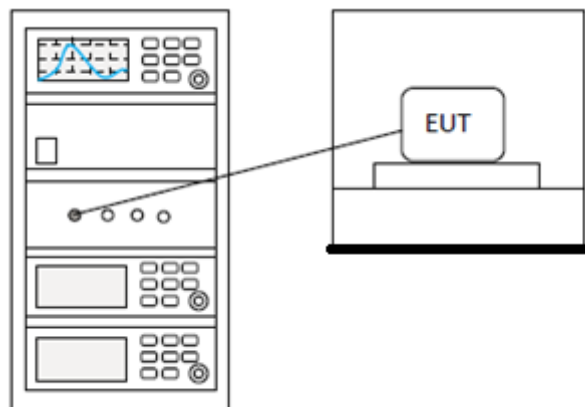

TEST DATA**Pass: Please Refer To Appendix: Appendix1 For Details**

BlueAsia


MINIMUM 6DB BANDWIDTH

Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	ANSI C63.10 (2013) Section 11.8.1
Test Mode (Pre-Scan)	TX Low channel;TX middle channel;TX high channel;TX
Test Mode (Final Test)	TX Low channel;TX middle channel;TX high channel;TX
Tester	Jozu
Temperature	25℃
Humidity	60%

LIMITS

Limit:	≥ 500 kHz
--------	----------------

BLOCK DIAGRAM OF TEST SETUP

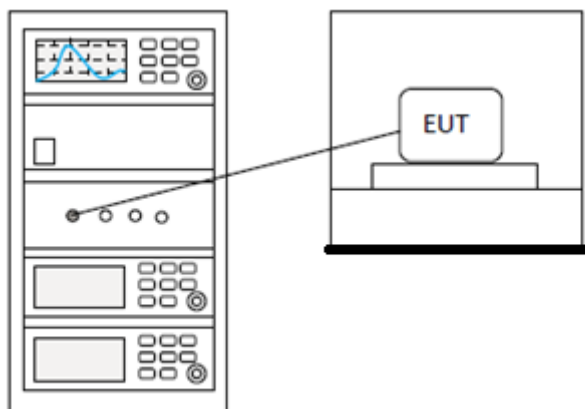

TEST DATA

Pass: Please Refer To Appendix: Appendix1 For Details

ANTENNA REQUIREMENT

Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	N/A


CONCLUSION

Standard Requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit permanently attached antenna or of an so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

EUT Antenna:

The antenna is integrated on the main PCB and no consideration of replacement. The best case gain of the antenna is 2.5dBi.

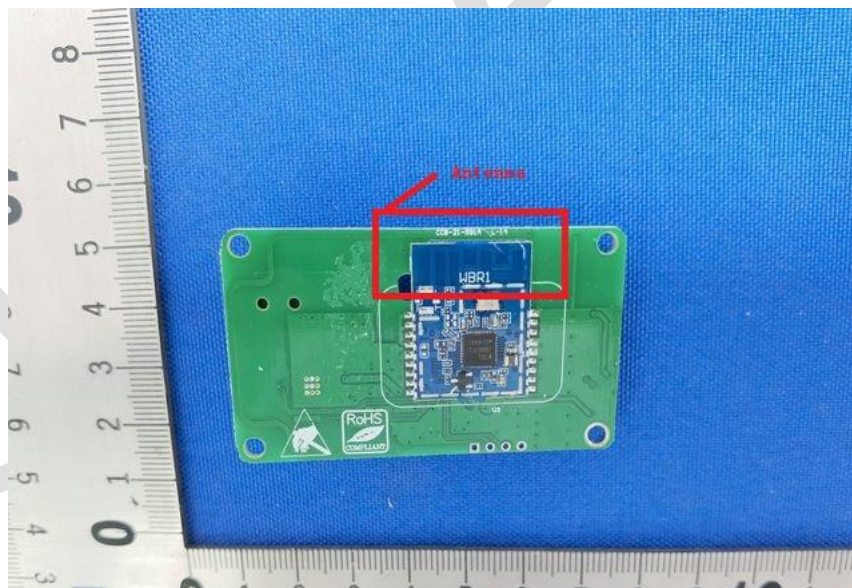

10 APPENDIX


Appendix1

10.1 APPENDIX A: DTS BANDWIDTH

Test Result

TestMode	Antenna	Channel	DTS BW [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
BLE_BT4.0	Ant1	2402	0.660	2401.640	2402.300	≥ 0.5	PASS
		2442	0.672	2441.632	2442.304	≥ 0.5	PASS
		2480	0.680	2479.628	2480.308	≥ 0.5	PASS

Test Graphs

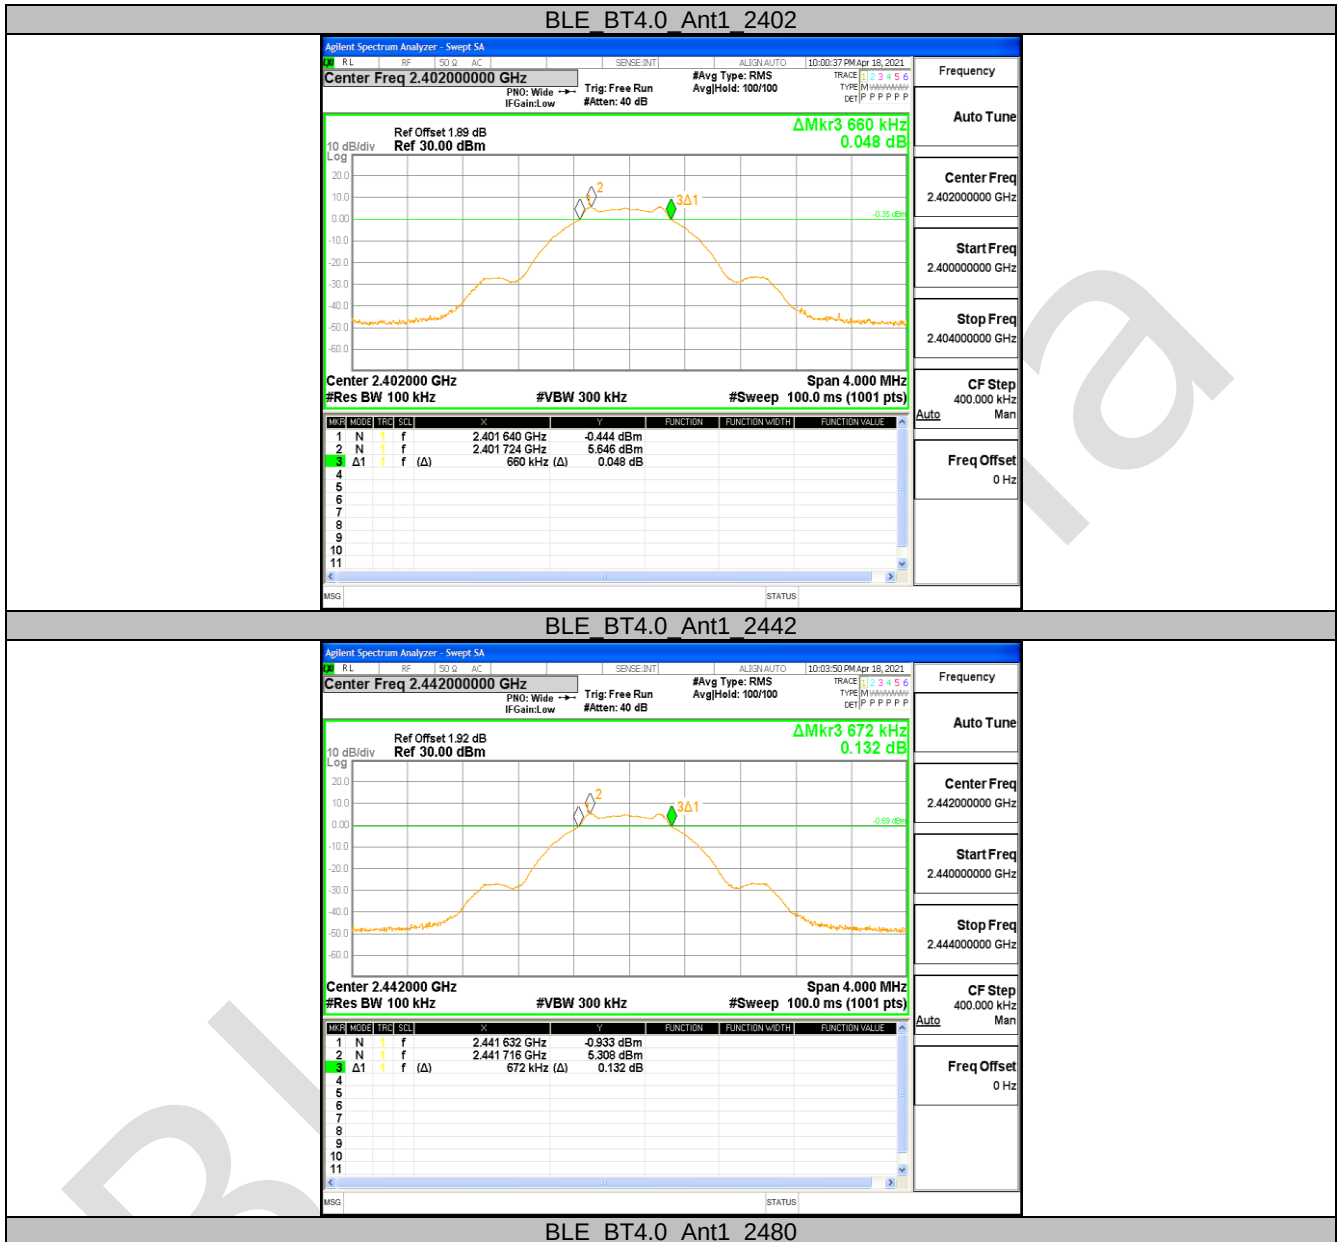




10.2 APPENDIX B: OCCUPIED CHANNEL BANDWIDTH**Test Result**

TestMode	Antenna	Channel	OCB [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
BLE_BT4.0	Ant1	2402	1.0073	2401.465	2402.472	---	PASS
		2442	1.0194	2441.460	2442.479	---	PASS
		2480	1.0260	2479.457	2480.483	---	PASS

Test Graphs




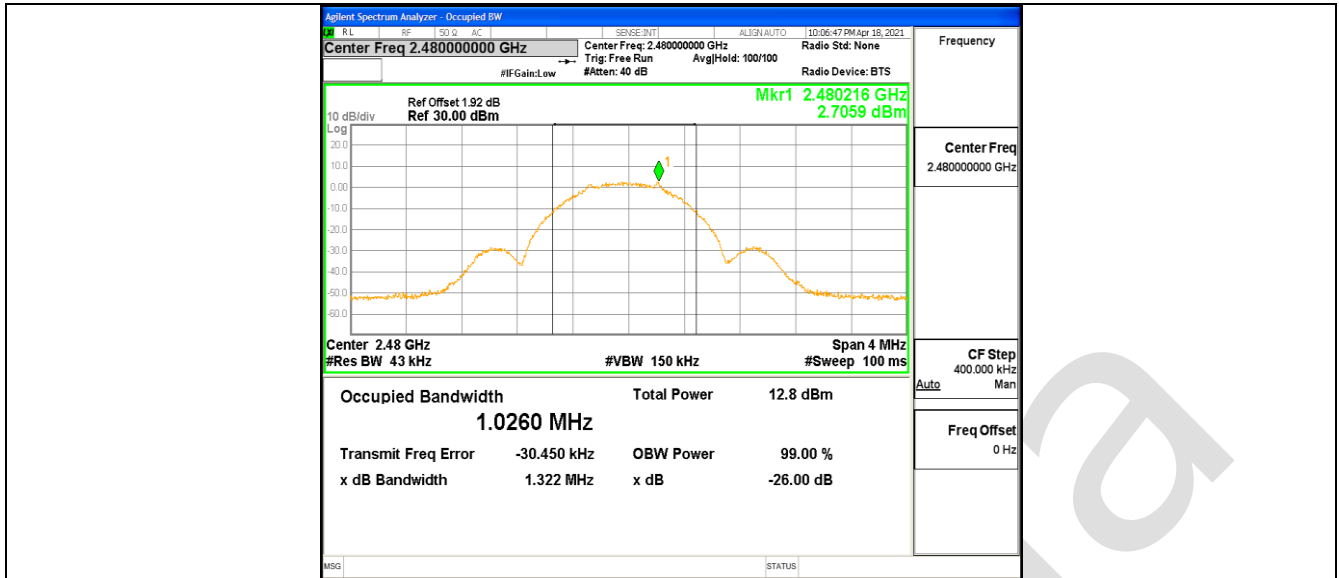


10.3 APPENDIX C: MAXIMUM CONDUCTED OUTPUT POWER**Test Result**

TestMode	Antenna	Channel	Result[dBm]	Limit[dBm]	Verdict
BLE_BT4.0	Ant1	2402	5.74	<=30	PASS
		2442	5.47	<=30	PASS
		2480	4.68	<=30	PASS

Test Graphs

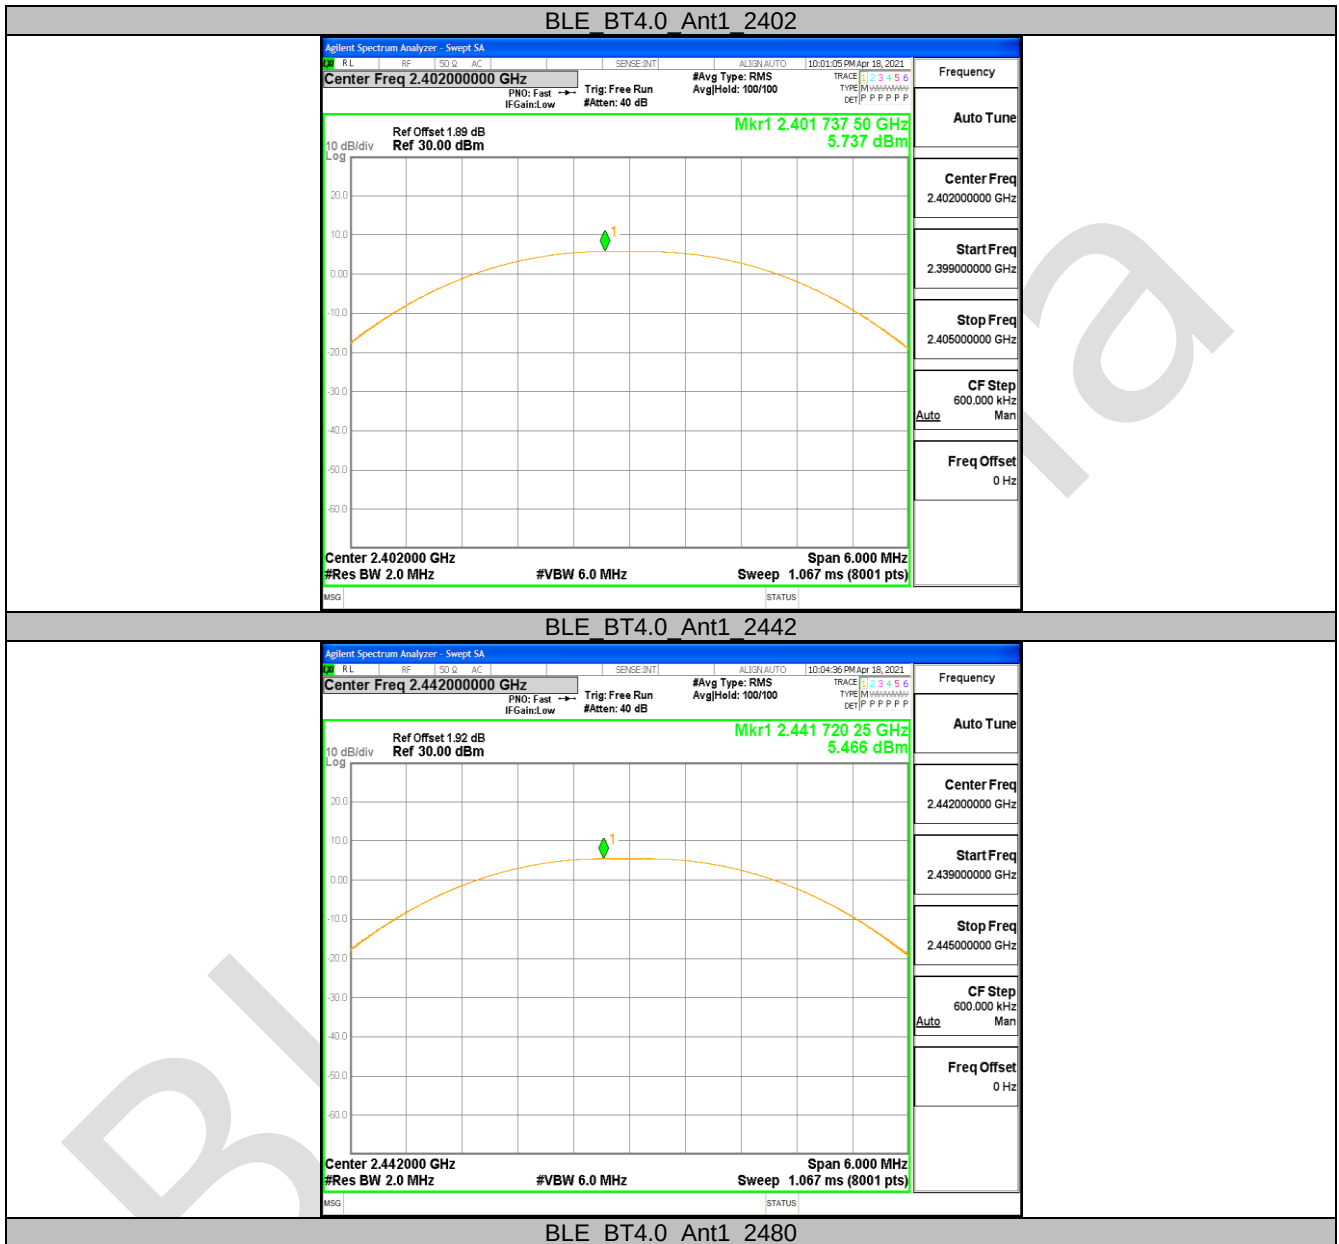


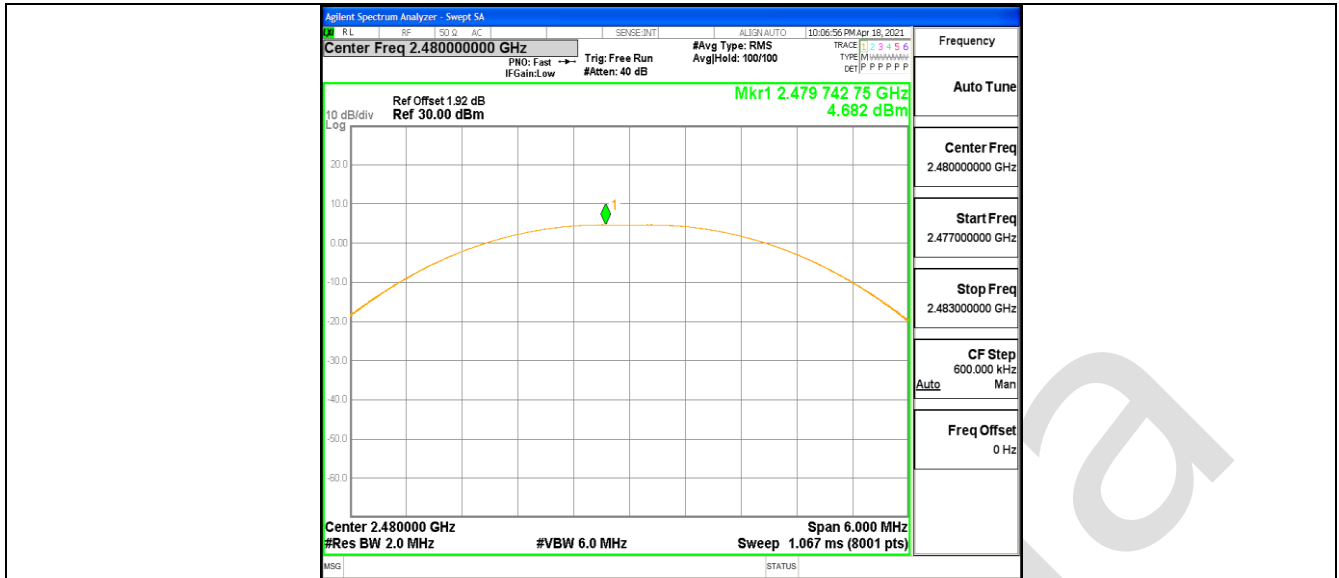


10.4 APPENDIX D: MAXIMUM POWER SPECTRAL DENSITY**Test Result**

TestMode	Antenna	Channel	Result[dBm/3-100kHz]	Limit[dBm/3kHz]	Verdict
BLE_BT4.0	Ant1	2402	0.29	<=8	PASS
		2442	-0.33	<=8	PASS
		2480	-1.13	<=8	PASS

Test Graphs

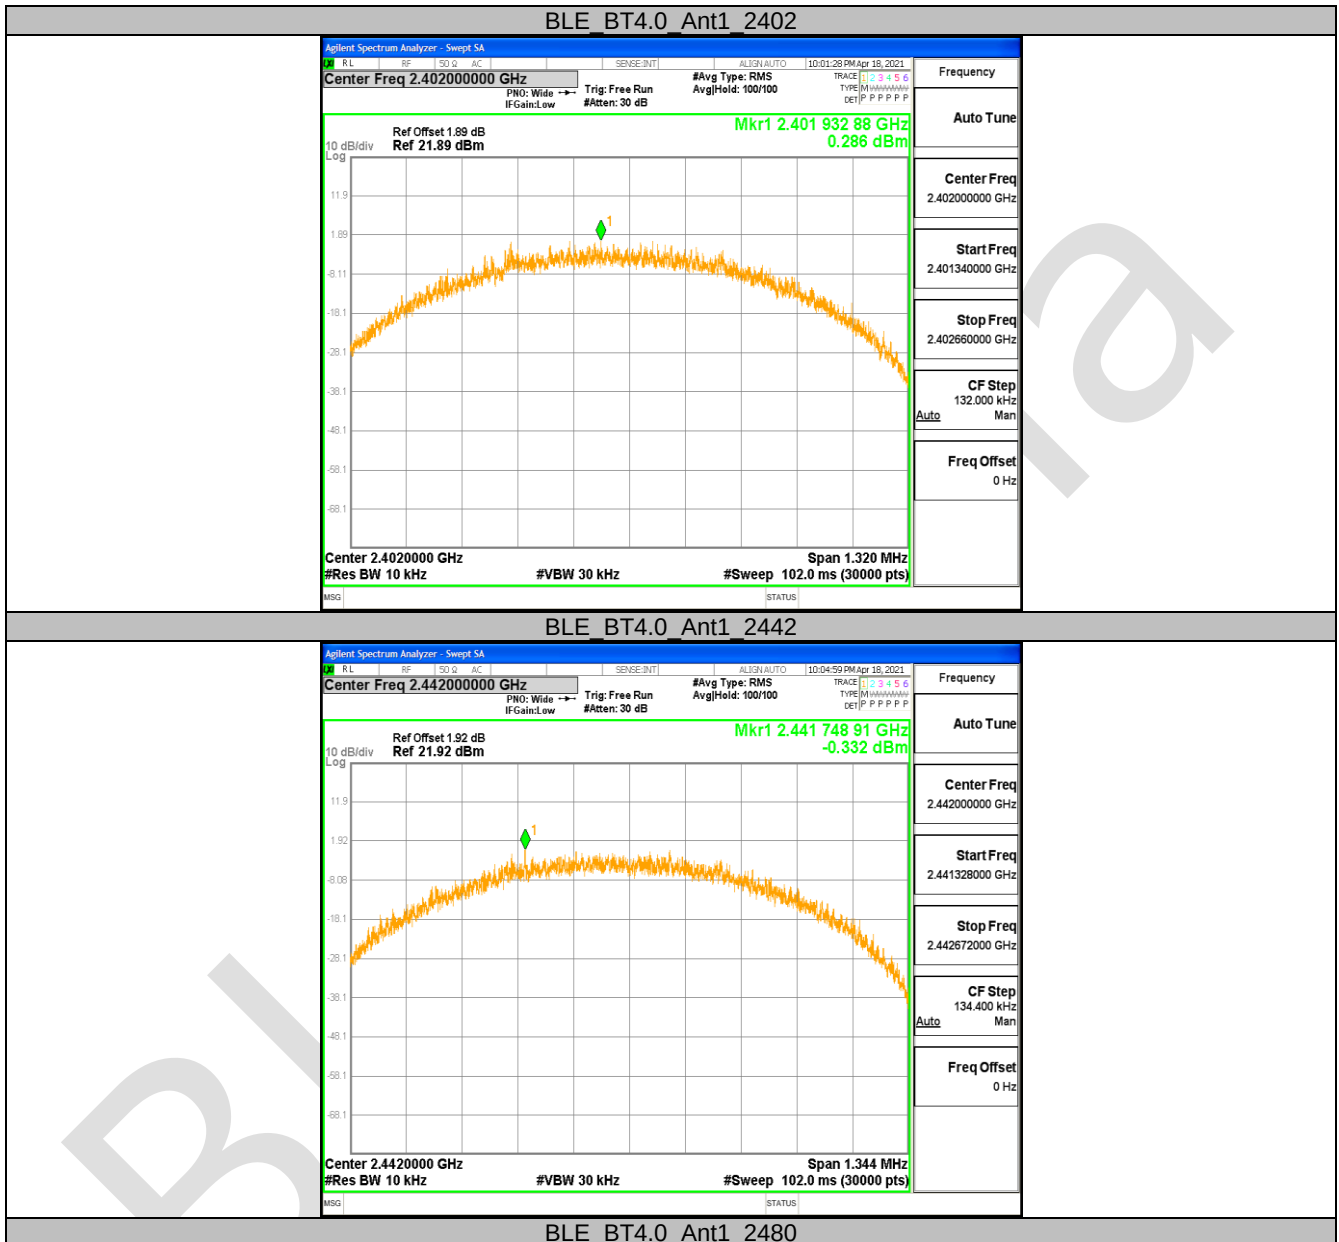

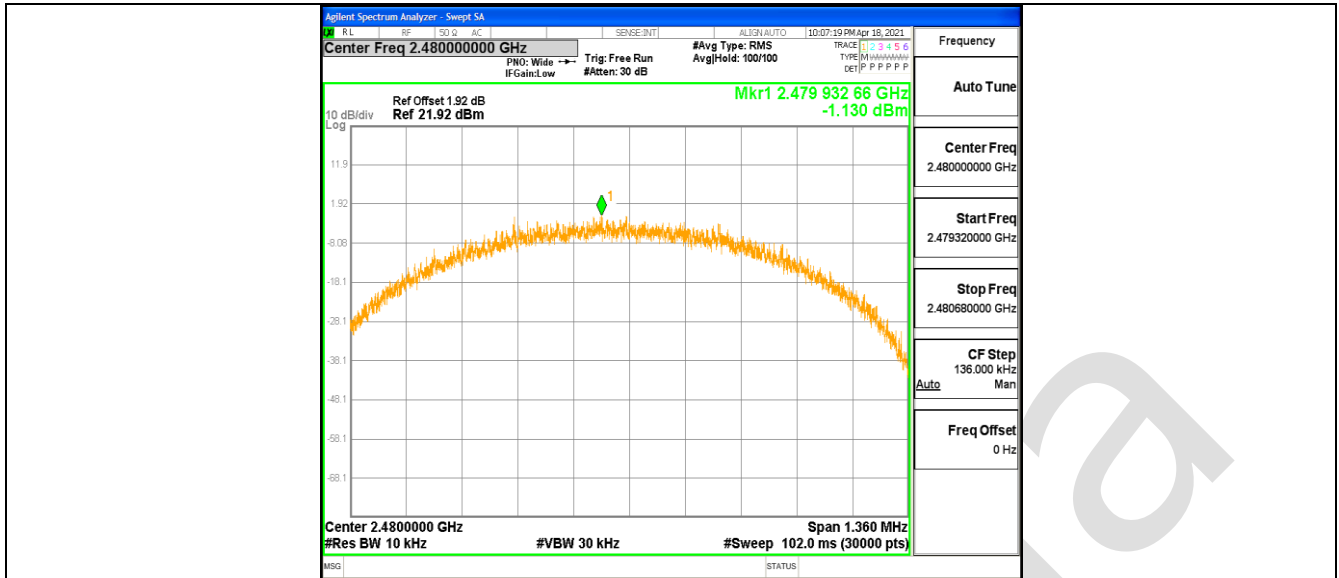

10.5 APPENDIX E: BAND EDGE MEASUREMENTS**Test Result**

TestMode	Antenna	ChName	Channel	RefLevel[dBm]	Result[dBm]	Limit[dBm]	Verdict
BLE_BT4.0	Ant1	Low	2402	5.22	-50.92	<=-14.78	PASS
		High	2480	4.42	-54.19	<=-15.59	PASS

Test Graphs





10.6 APPENDIX F: CONDUCTED SPURIOUS EMISSION

Test Result


TestMode	Antenna	Channel	FreqRange [MHz]	RefLevel [dBm]	Result[dBm]	Limit[dBm]	Verdict
BLE_BT4.0	Ant1	2402	Reference	5.31	5.31	---	PASS
			30~1000	5.31	-64.5	<=-24.69	PASS
			1000~26500	5.31	-34.99	<=-24.69	PASS
		2442	Reference	4.59	4.59	---	PASS
			30~1000	4.59	-68.19	<=-25.41	PASS
			1000~26500	4.59	-37.52	<=-25.41	PASS
		2480	Reference	3.93	3.93	---	PASS
			30~1000	3.93	-68.47	<=-26.07	PASS
			1000~26500	3.93	-38.47	<=-26.07	PASS

Test Graphs

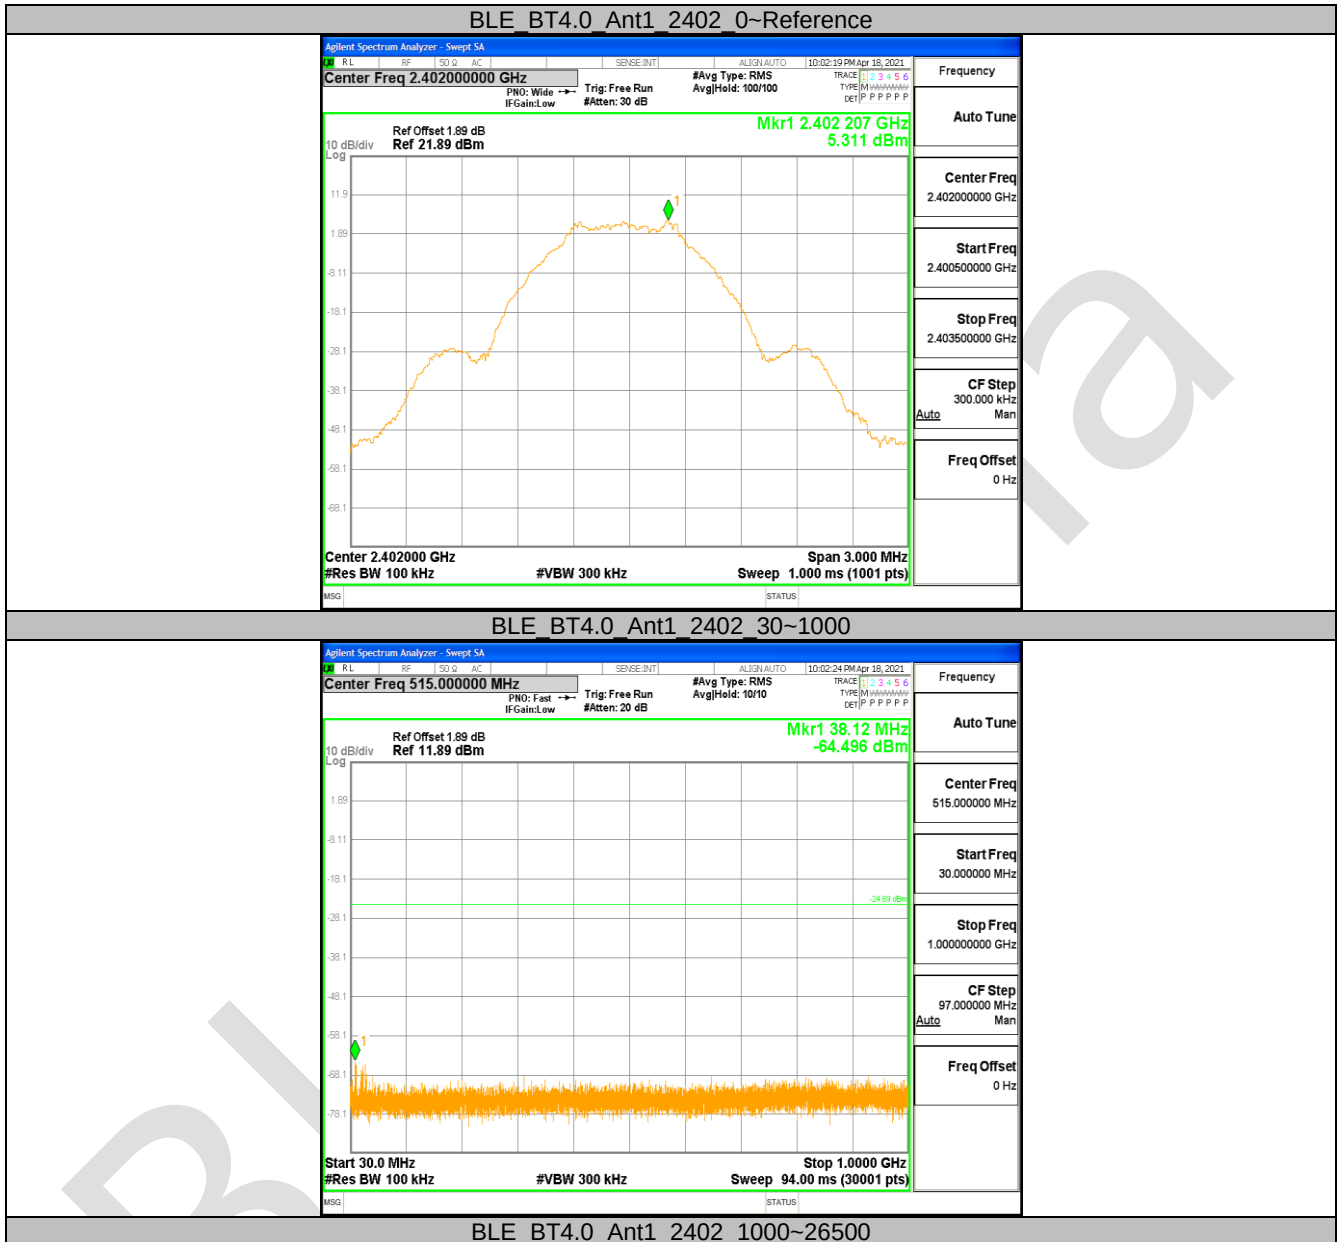


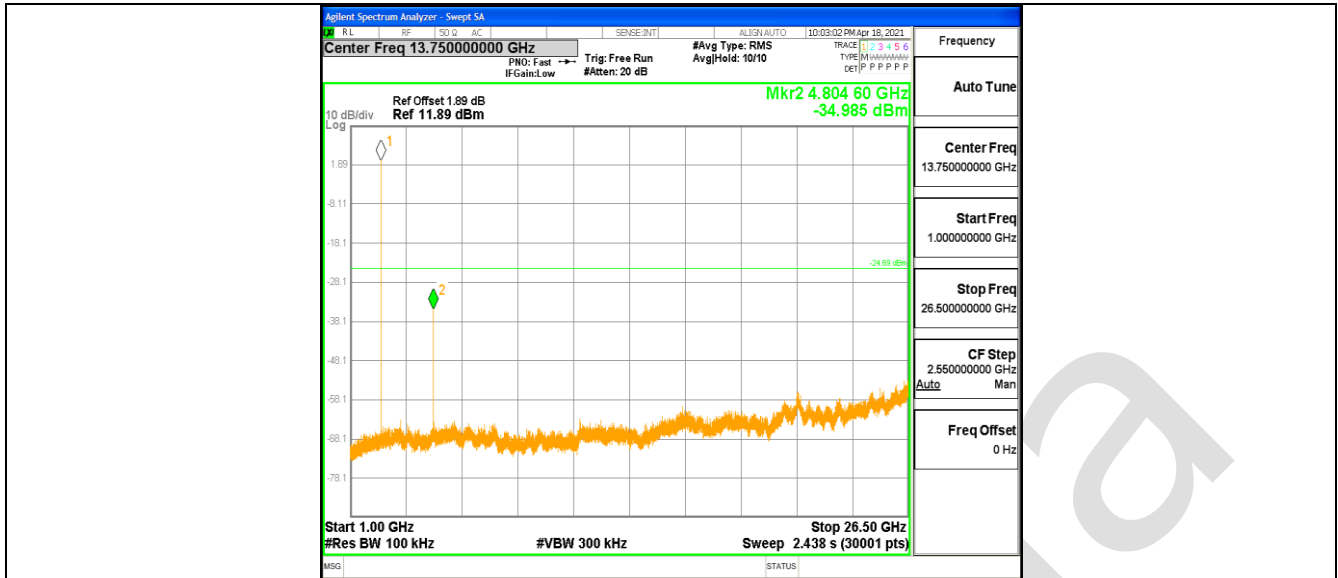


BLE BT4.0 Ant1 2442 0~Reference

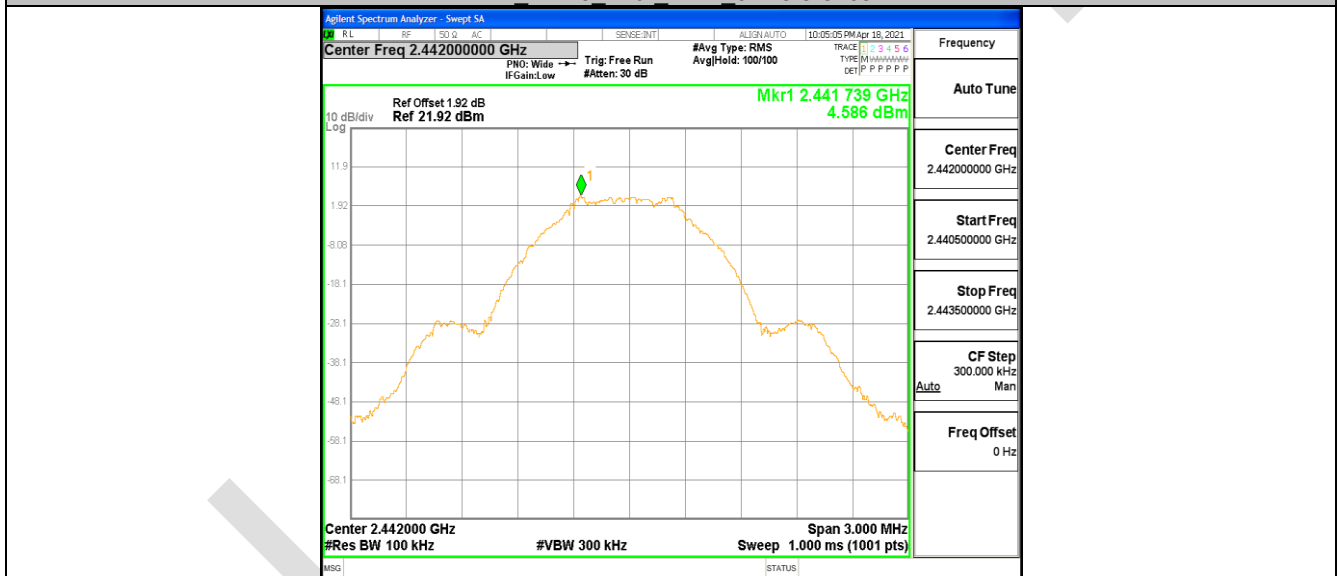


BLE BT4.0 Ant1 2442 30~1000

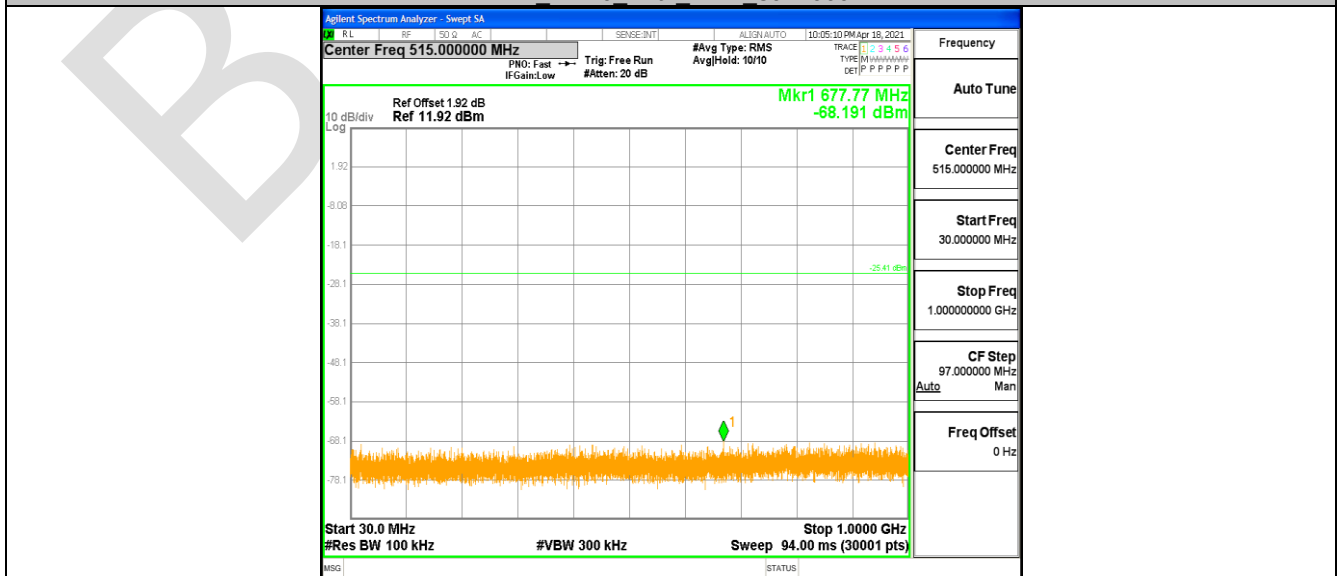

BLE BT4.0 Ant1 2442 1000~26500

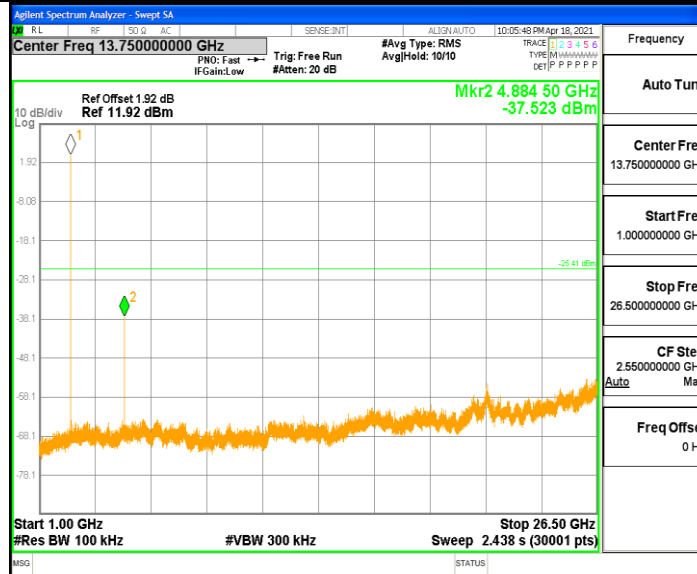

BLE BT4.0 Ant1 2480 0~Reference

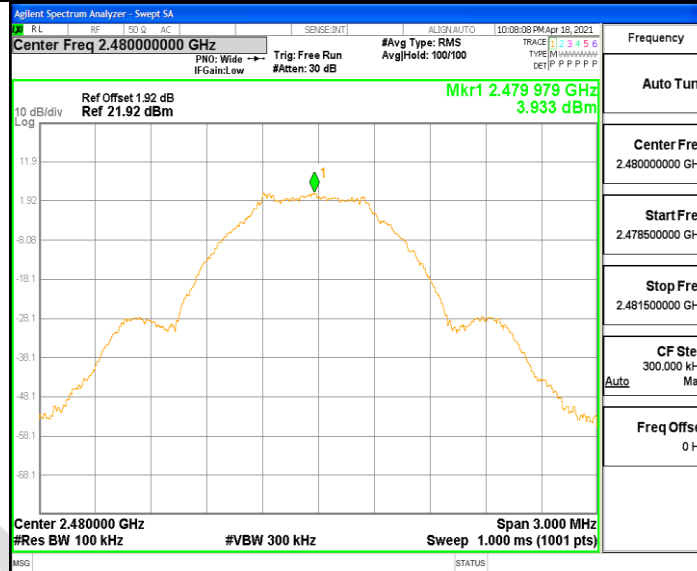

BLE BT4.0 Ant1 2480 30~1000

