


11. Duty cycle

11.1. Block diagram of test setup

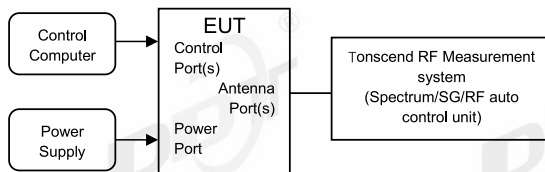

11.2. Limit

Just for Report.

11.3. Test procedure


- (1) Connected the EUT's antenna port to the Spectrum Analyzer by suitable attenuator, The cable loss and attenuator loss have been put into spectrum analyzer as amplitude offset.
set the Spectrum Analyzer as below:
Centre Frequency: The centre frequency of the middle hopping channel.
Resolution BW: 10 MHz.
Video BW: 10 MHz.
Span: Zero span.
Detector: Peak.
Trace Mode: Clear Write.
Sweep: Video Trigger
- (2) When the trace is complete, measure the sending time of 1 burst and the duty cycle of 1 burst cycle.
- (3) Calculate dwell time follow below formula:
Duty cycle= Pulse's on time / Burst cycle


11.4. Test result

Test Engineer:	Haofeng	Test Site:	RF Measurement System 4#
Ambient Condition:	26.2℃,44.8%RH	Test Date:	2024.07.23~2024.07.24
Test Power Supply:	Battery	Sample Number:	S24050708-005


Test Mode	Antenna	Frequency [MHz]	ON Time [ms]	Period [ms]	Duty Cycle [%]	Duty Cycle Factor[dB]
DH5	Ant1	2402	2.92	3.75	77.87	1.09
	Ant2	2402	2.92	3.75	77.87	1.09
	Ant1	2441	2.92	3.75	77.87	1.09
	Ant2	2441	2.92	3.75	77.87	1.09
	Ant1	2480	2.92	3.75	77.87	1.09
	Ant2	2480	2.92	3.75	77.87	1.09
2DH5	Ant1	2402	2.91	3.75	77.60	1.10
	Ant2	2402	2.91	3.75	77.60	1.10
	Ant1	2441	2.91	3.75	77.60	1.10
	Ant2	2441	2.92	3.76	77.66	1.10
	Ant1	2480	2.92	3.76	77.66	1.10
	Ant2	2480	2.92	3.76	77.66	1.10
3DH5	Ant1	2402	2.91	3.75	77.60	1.10
	Ant2	2402	2.91	3.75	77.60	1.10
	Ant1	2441	2.92	3.76	77.66	1.10
	Ant2	2441	2.92	3.76	77.66	1.10
	Ant1	2480	2.91	3.75	77.60	1.10
	Ant2	2480	2.91	3.75	77.60	1.10

11.5. Test graphs

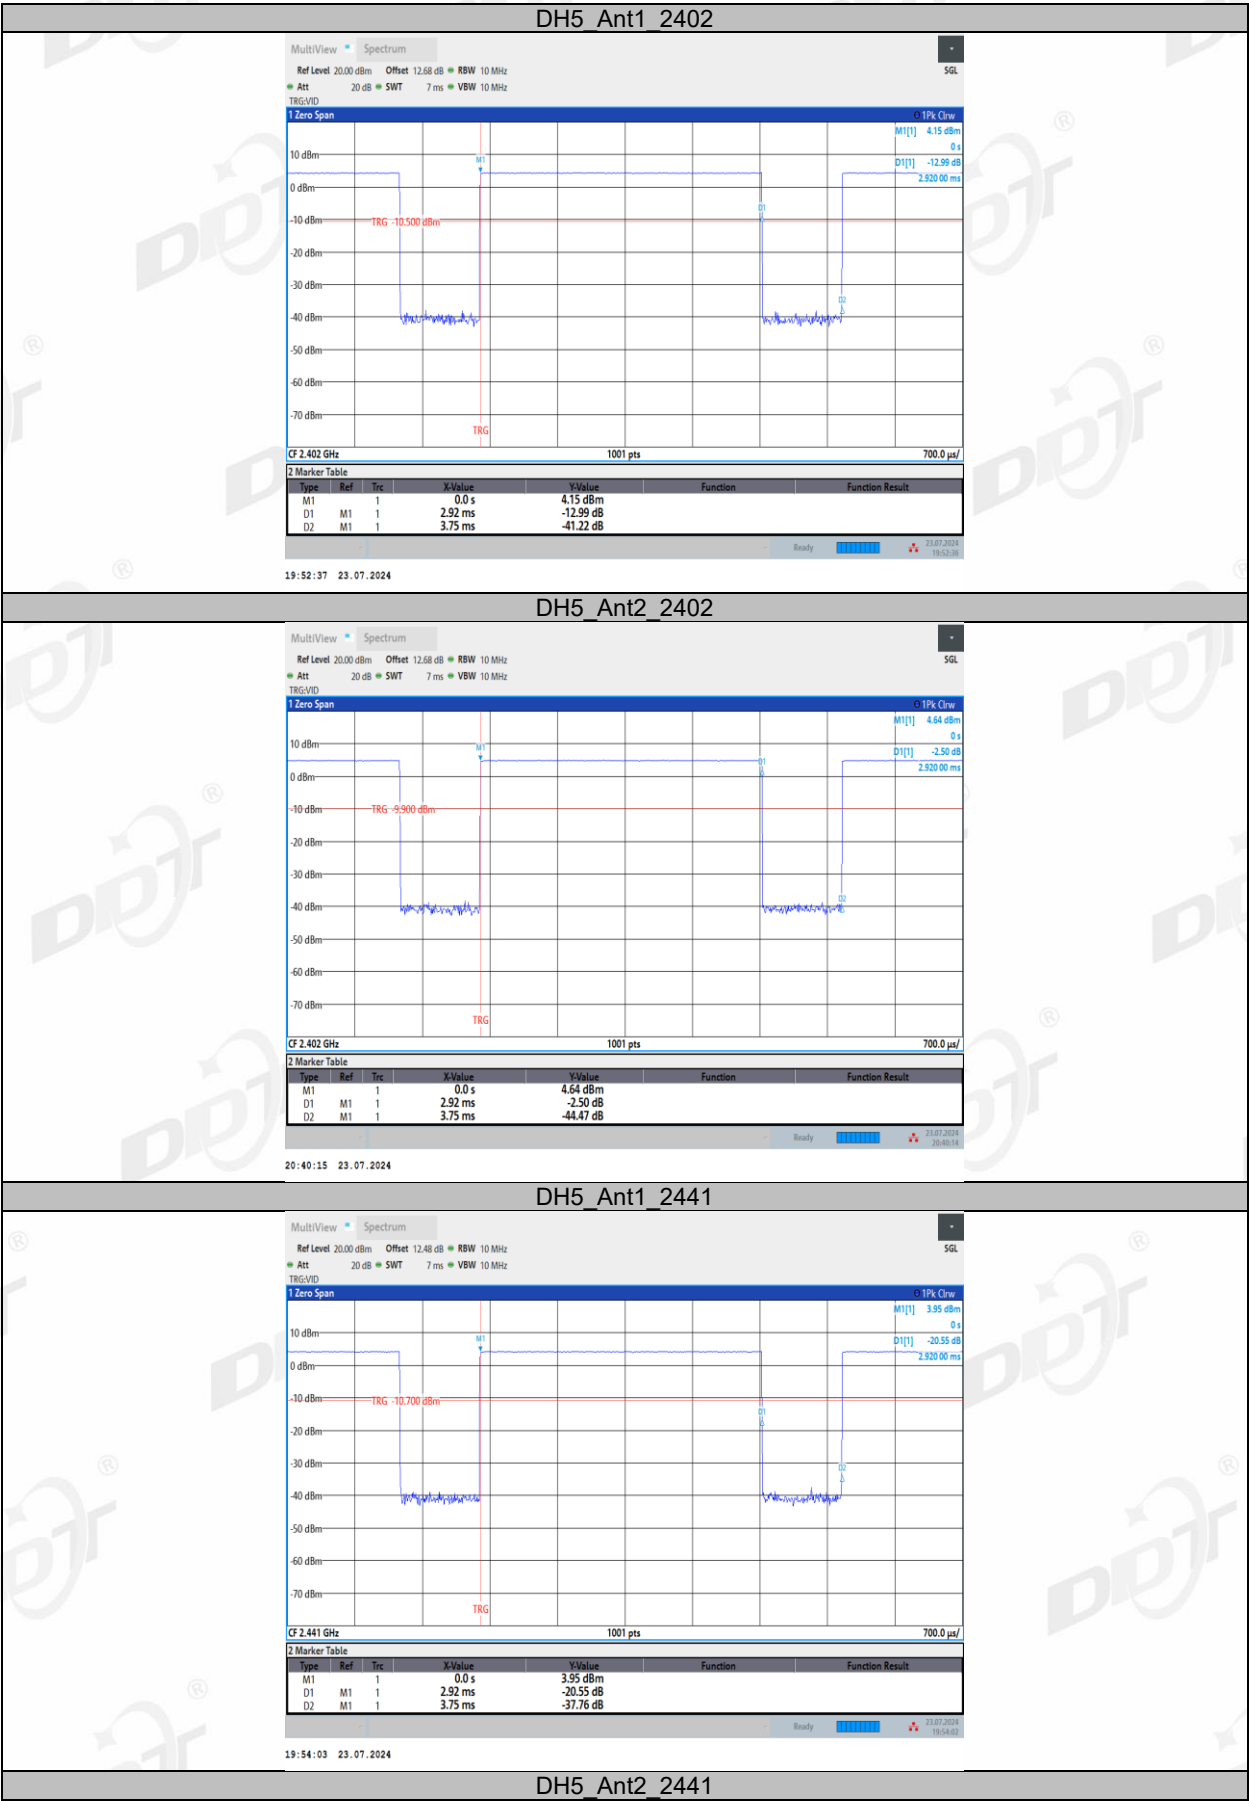


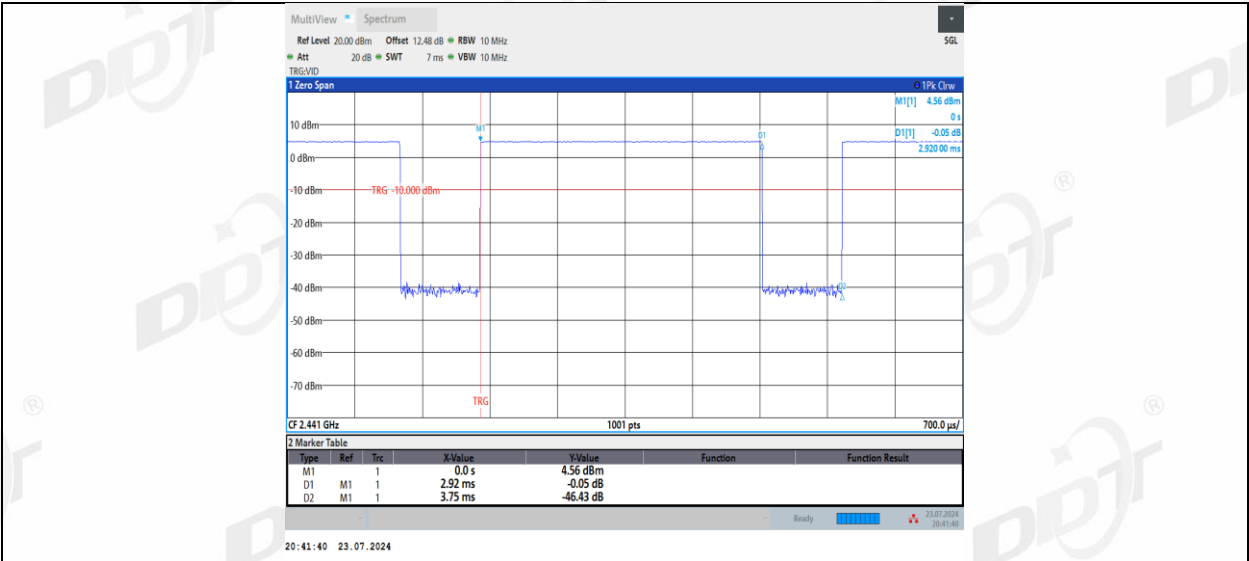


DH5_Ant1_2480

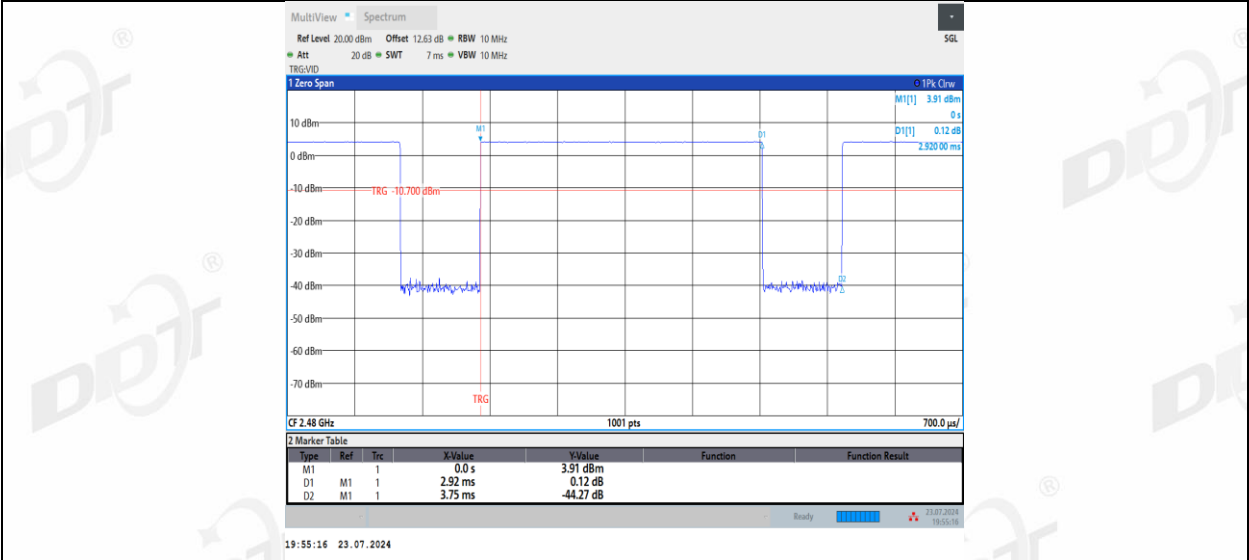


DH5_Ant2_2480

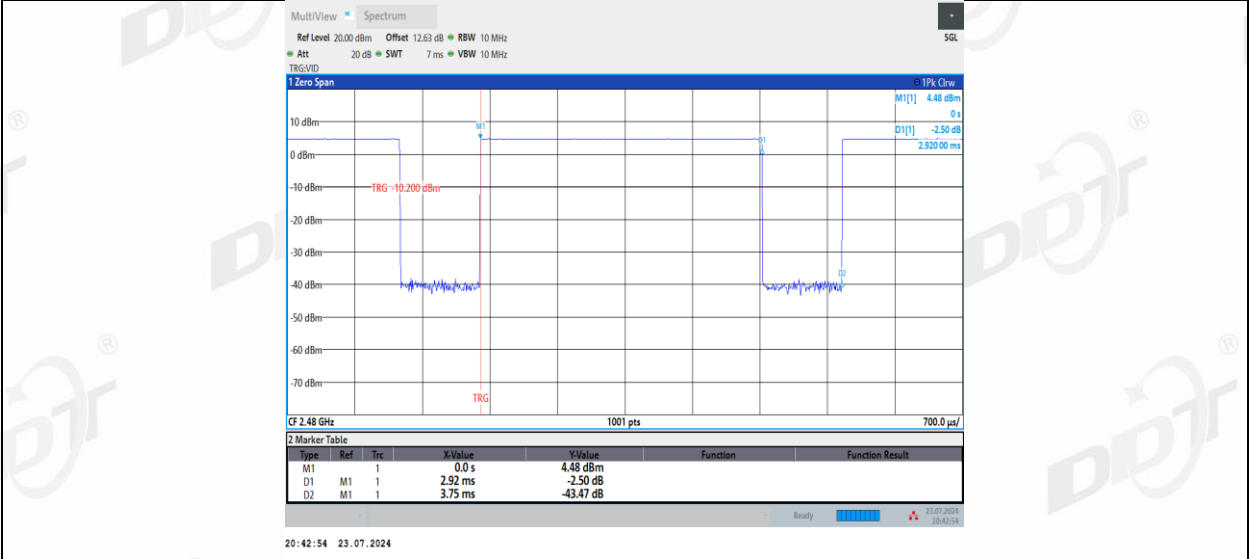


2DH5_Ant1_2402

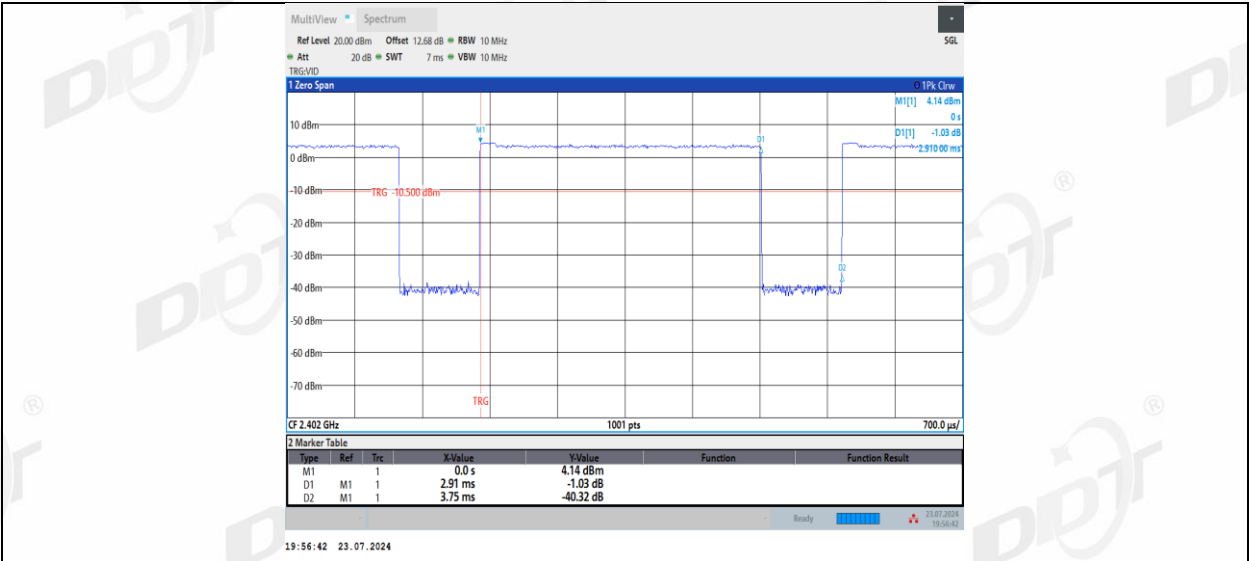


2DH5_Ant2_2402

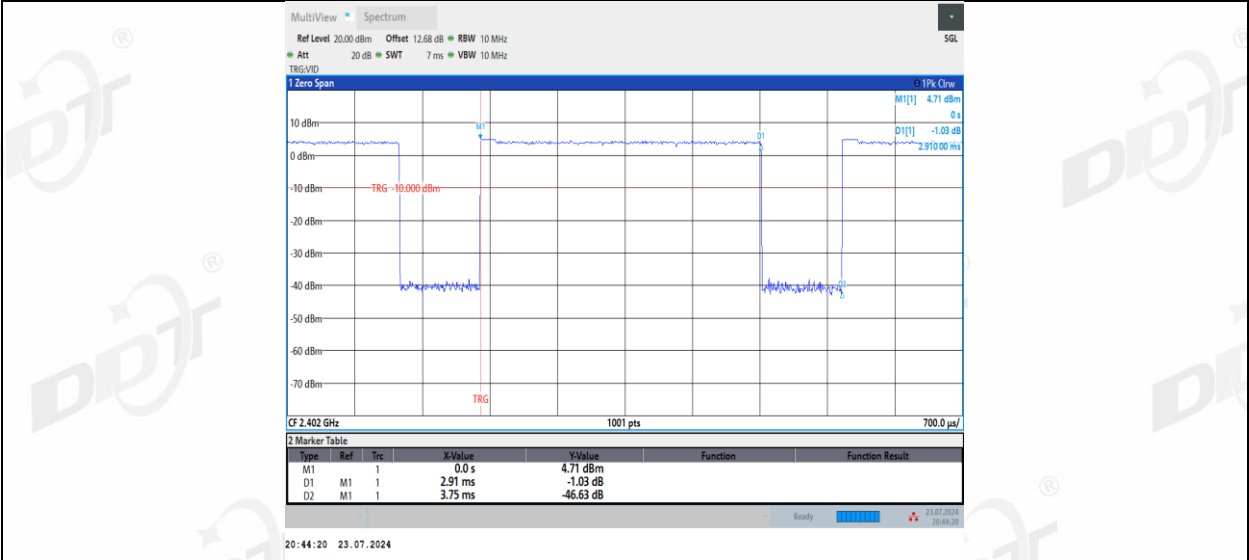


2DH5_Ant1_2441

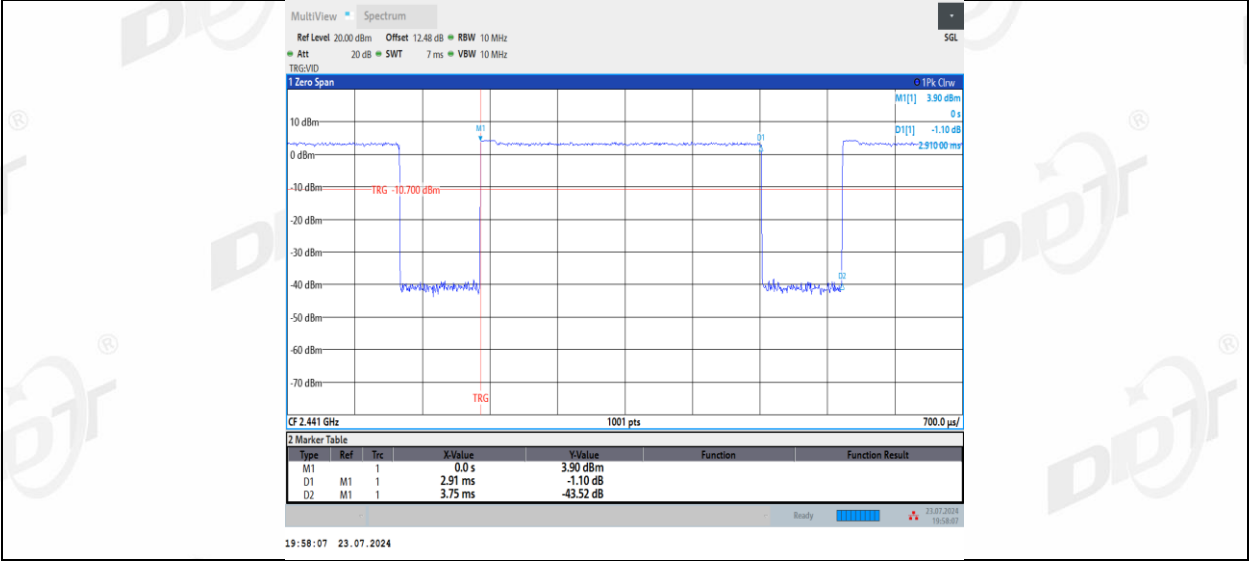


2DH5_Ant2_2441

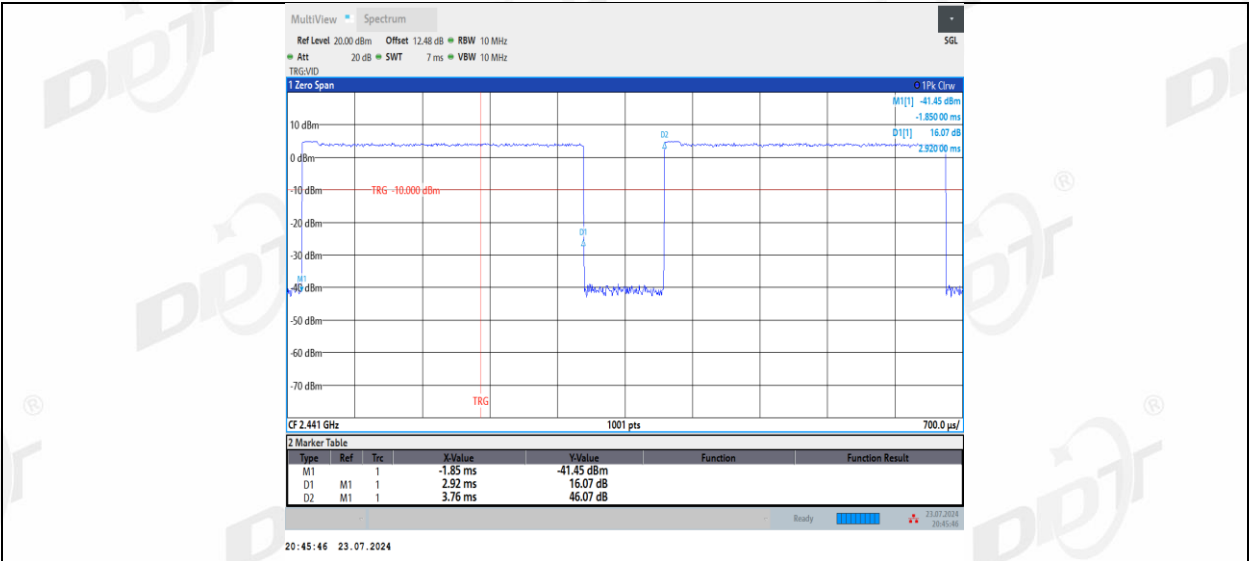


2DH5_Ant1_2480

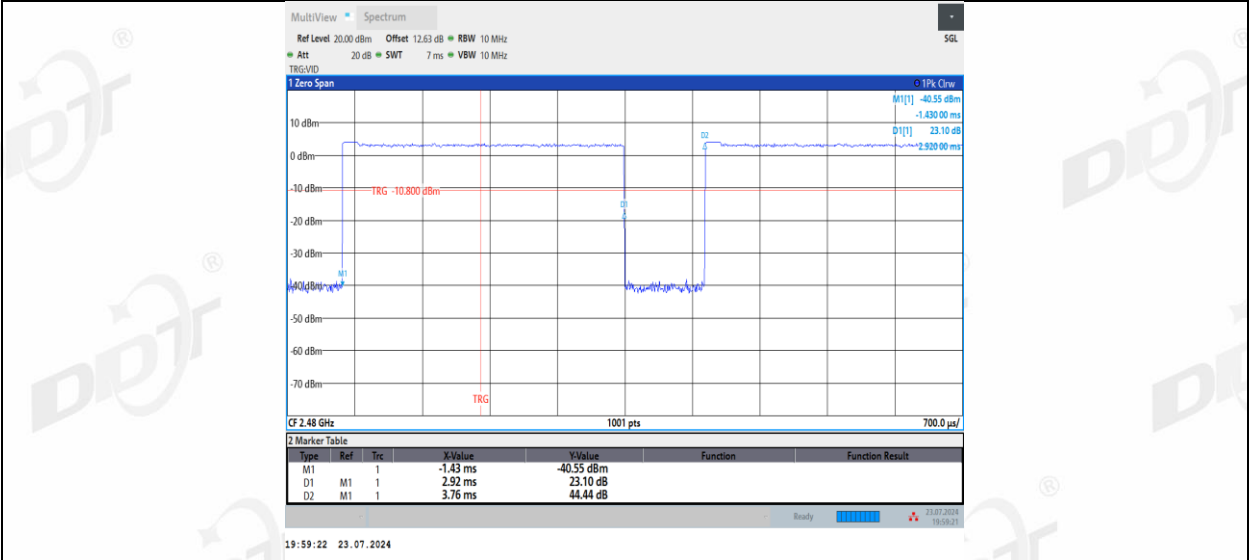


2DH5_Ant2_2480

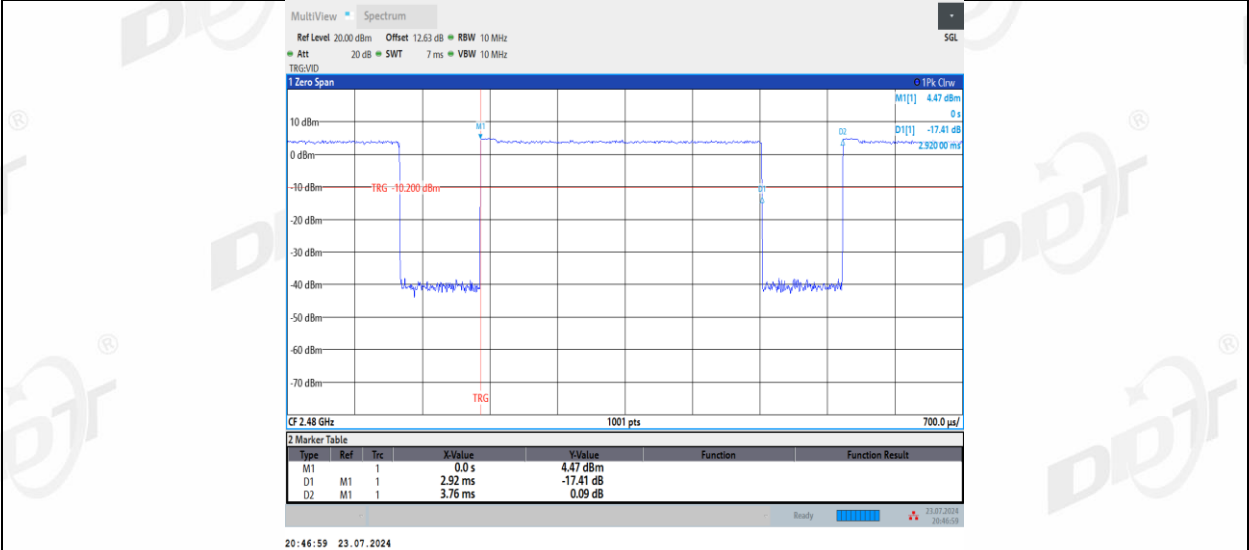


3DH5_Ant1_2402

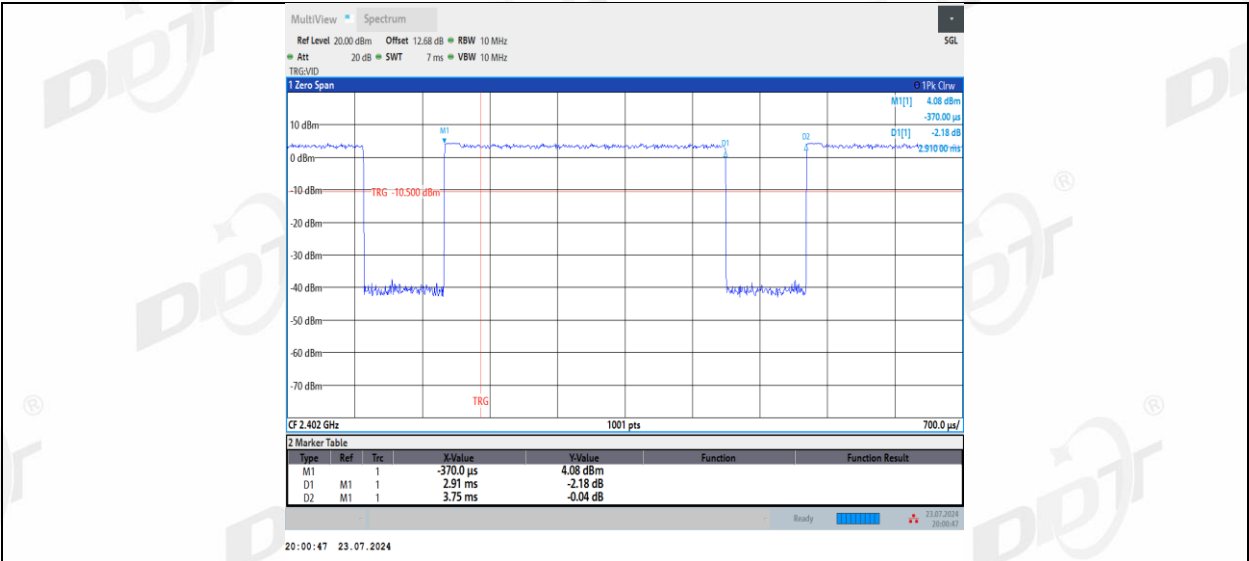


3DH5_Ant2_2402

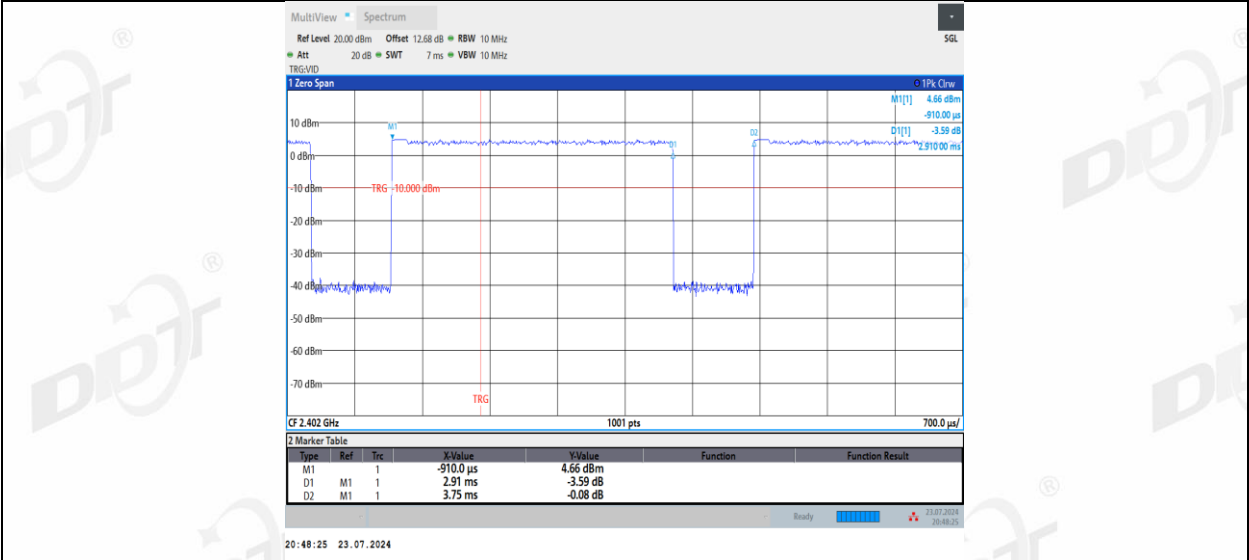


3DH5_Ant1_2441

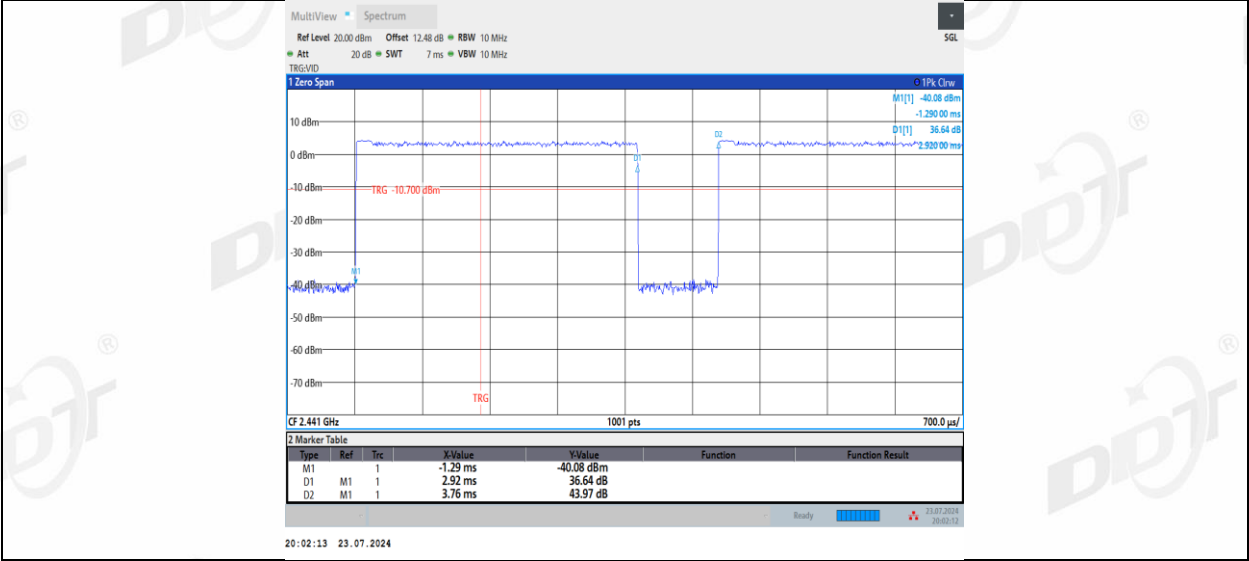


3DH5_Ant2_2441

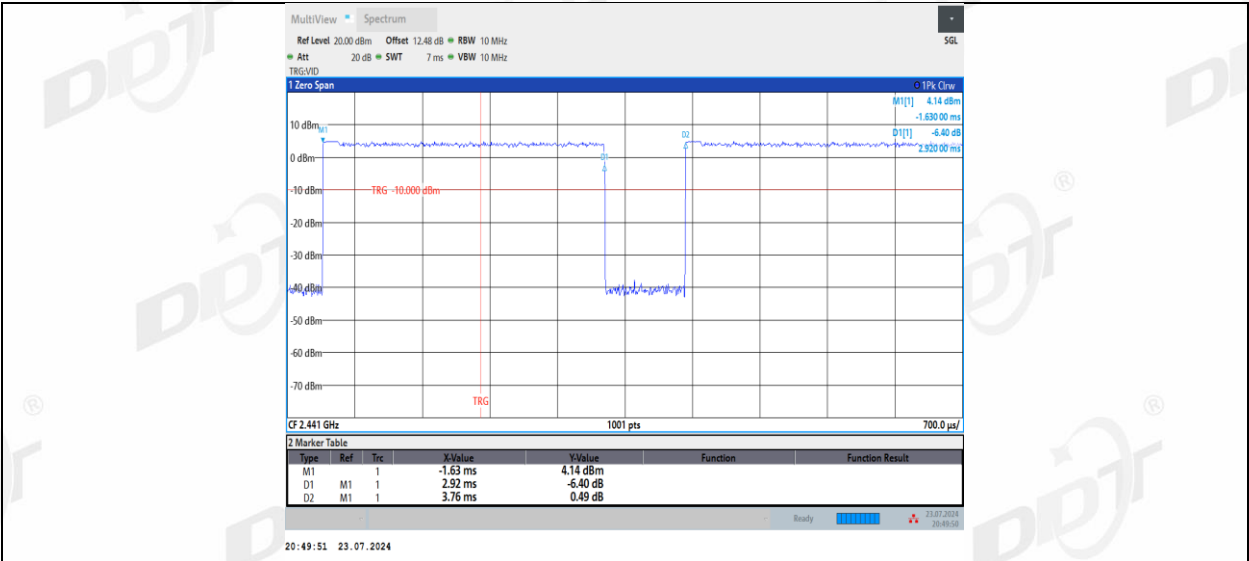

3DH5_Ant1_2480

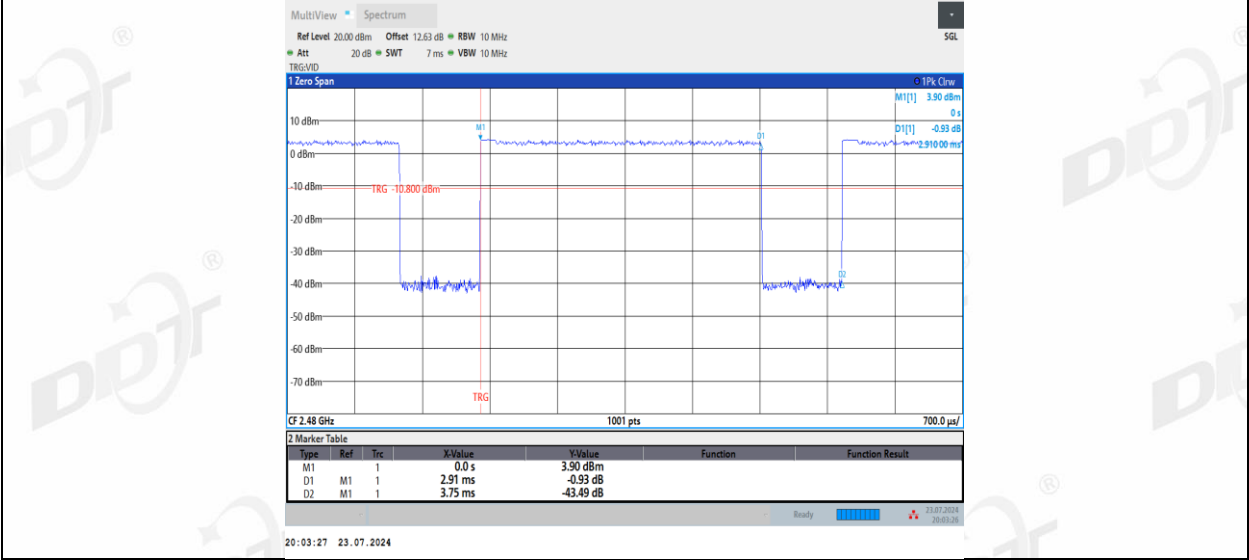

3DH5_Ant2_2480

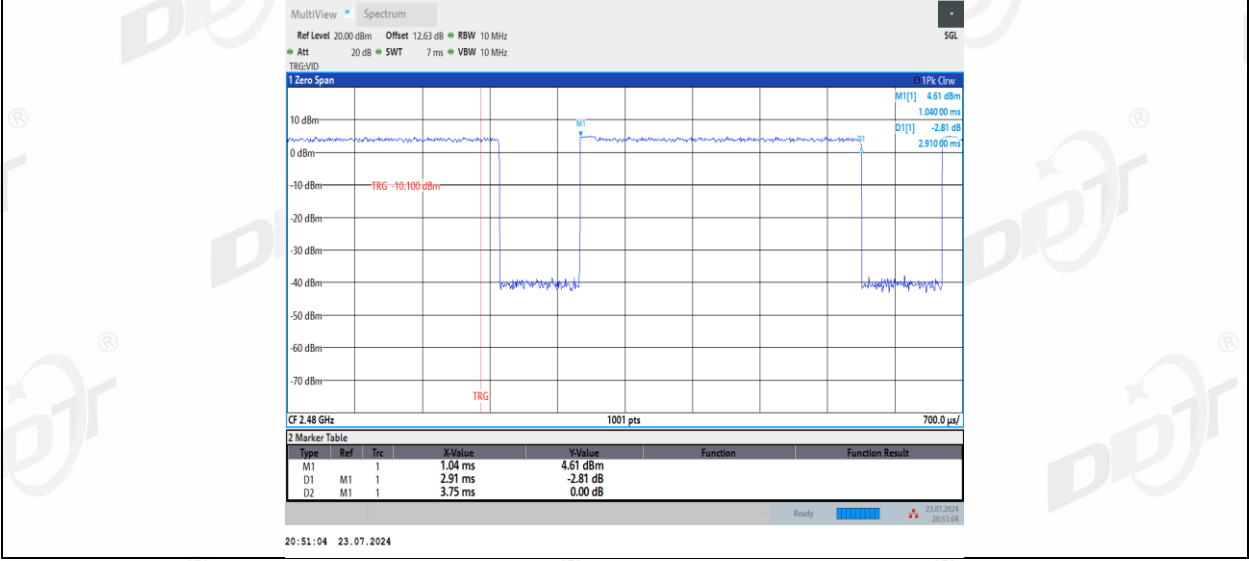

12. Antenna Requirements

12.1. Limit

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6 dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

For intentional device, according to RSS-Gen issue 5 section 6.8.

The applicant for equipment certification shall provide a list of all antenna types that may be used with the transmitter, where applicable (i.e. for transmitters with detachable antenna), indicating the maximum permissible antenna gain (in dBi) and the required impedance for each antenna. The test report shall demonstrate the compliance of the transmitter with the limit for maximum equivalent isotropically radiated power (e.i.r.p.) specified in the applicable RSS, when the transmitter is equipped with any antenna type, selected from this list.

12.2. Result


The antenna used for this product as Antenna information described in section 2.1 of the report, and there is no other antenna than that furnished by the responsible party shall be used with the device.


13.Radiated Emission

13.1. Test equipment

Equipment	Manufacturer	Model No.	Serial No.	Cal Due To
RF Cable	N/A	W13.02 AP1-X2	DDT-ZC04023	2025/03/31
RF Cable	N/A	W24.02 HL-562	DDT-ZC04022	2025/03/31
Hochgewinn-Hornantenne	SCHWARZBEC K	BBHA 9120 D	DDT-ZC02129	2025/09/18
PSA Series Spectrum Analyzer	Agilent	E4447A	DDT-ZC00517	2025/03/31
Pre-amplifier	COM-POWER	PAM-840A	DDT-ZC01693	2025/03/31
Micro-Tronics filters	REBES	BRM50702	DDT-ZC03242	/
High Pass filter	Xi'an Xingbo	XBLBQ-GTA67	DDT-ZC02179	2025/04/22
Trilog Broadband Antenna	Schwarzbeck	VULB 9163	DDT-ZC02050	2025/07/11
High pass filter	Micro-Tronics	HPM50108	DDT-ZC00560	2025/04/22
ELECTRIC AND MAGNETIC FIELD ANALYZER	Narda	EHP-200A	DDT-ZC01401	2024/09/20
Broad-Band Horn Antenna	Schwarzbeck	BBHA 9170	DDT-ZC00506	2025/04/26
Active Loop Antenna	Schwarzbeck	FMZB1519	DDT-ZC00524	2025/09/11
RF cable	Zhongke Junchuang	JCT26S-NJ-NJ-1.5M	DDT-ZC02762	2025/03/31
EMI TEST RECEIVER	R&S	ESU26	DDT-ZC01909	2025/03/31
High pass filter	Micro-Tronics	HPM50102	DDT-ZC00561	2025/04/22
RF cable	Yuhu Technology	ZT26S-SMAJ-SMAJ-1M	DDT-ZC02037	2025/03/31
Micro-Tronics filters	REBES	BRM50716	DDT-ZC03240	/
RF cable	Yuhu Technology	JCTB810-NJ-NJ-9M	DDT-ZC02538	2025/03/31
Pre-amplifier	COM-POWER	PAM-118A	DDT-ZC01293	2025/07/08

13.2. Block diagram of test setup

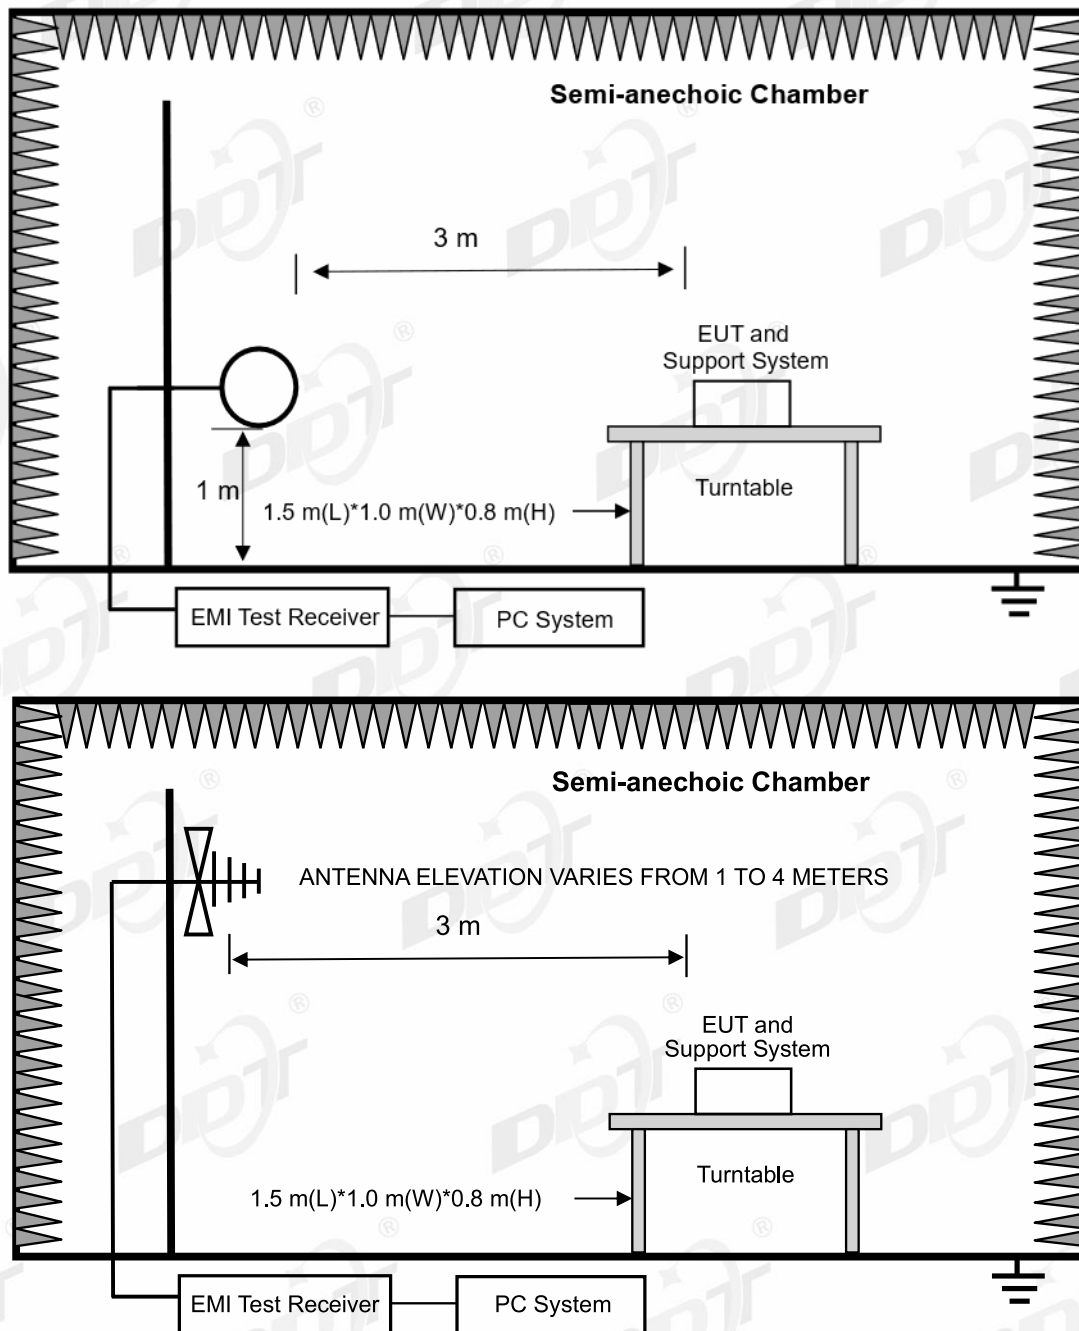

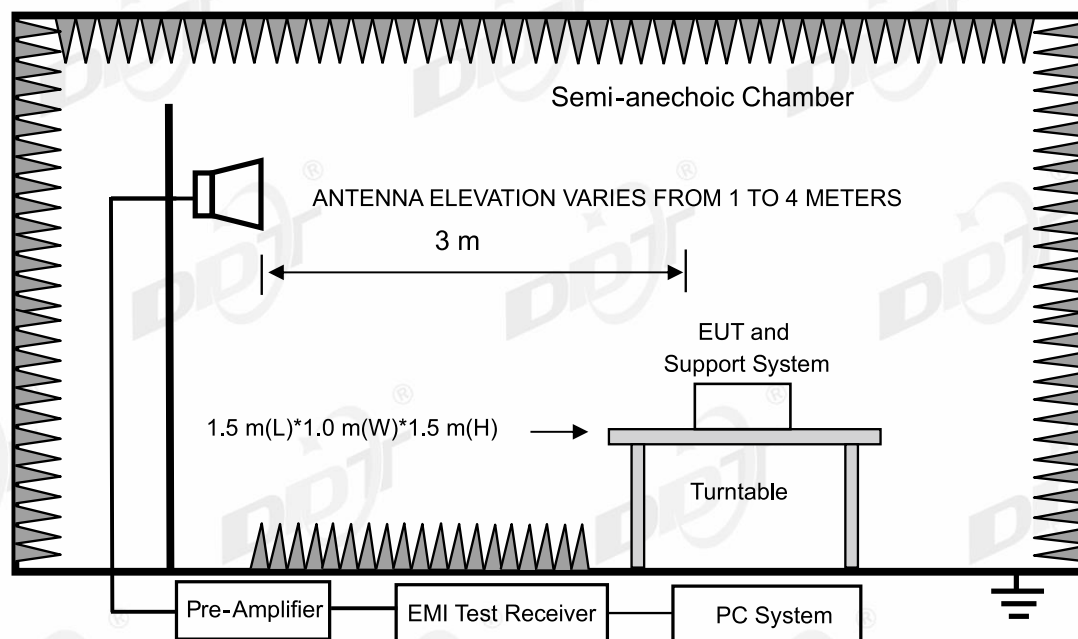

13.3. Limits

(1) FCC 15.205 Restricted frequency band

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
¹ 0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.1772&4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.2072&4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	(²)
13.36-13.41			

¹Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz

²Above 38.6

RSS-Gen section 8.10 Restricted frequency bands*

MHz	MHz	MHz	GHz
0.090-0.110	12.51975-12.52025	240-285	3.5-4.4
0.495-0.505	12.57675-12.57725	322-335.4	4.5-5.15
2.1735-2.1905	13.36-13.41	399.9-410	5.35-5.46
3.020-3.026	16.42-16.423	608-614	7.25-7.75
4.125-4.128	16.69475-16.69525	960-1427	8.025-8.5
4.1772&4.17775	16.80425-16.80475	1435-1626.5	9.0-9.2
4.2072&4.20775	25.5-25.67	1645.5-1646.5	9.3-9.5
5.677-5.683	37.5-38.25	1660-1710	10.6-12.7
6.215-6.218	73-74.6	1718.8-1722.2	13.25-13.4
6.26775-6.26825	74.8-75.2	2200-2300	14.47-14.5
6.31175-6.31225	108-138	2310-2390	15.35-16.2
8.291-8.294	149.9-150.05	2483.5-2500	17.7-21.4
8.362-8.366	156.52475-156.52525	2655-2900	22.01-23.12
8.37625-8.38675	156.7-156.9	3260-3267	23.6-24.0
8.41425-8.41475	162.0125-167.17	3332-3339	31.2-31.8
12.29-12.293	167.72-173.2	3345.8-3358	36.43-36.5
			Above 38.6

* Certain frequency bands listed in table and in bands above 38.6 GHz are designated for licence-exempt applications. These frequency bands and the requirements that apply to related devices are set out in the 200 and 300 series of RSSs.

(2) FCC 15.209 Limit & RSS-Gen section 8.9 Limit

FREQUENCY MHz	DISTANCE Meters	FIELD STRENGTHS LIMIT	
		mV/m	dB(mV)/m
0.009 ~ 0.490	300	2400/F(kHz)	67.6-20log(F)
0.490 ~ 1.705	30	24000/F(kHz)	87.6-20log(F)
1.705 ~ 30.0	30	30	29.54
30 ~ 88	3	100	40.0
88 ~ 216	3	150	43.5
216 ~ 960	3	200	46.0
960 ~ 1000	3	500	54.0
Above 1000	3	74.0 dB(mV)/m (Peak) 54.0 dB(mV)/m (Average)	

Note:

(1) The emission limits shown in the above table are based on measurements employing a CISPR QP detector except for the frequency bands 9 - 90 kHz, 110 - 490 kHz and above 1000 MHz, radiated emissions limits in these three bands are based on measurements employing an average detector.

(2) At frequencies below 30 MHz, measurement may be performed at a distance closer than that specified, and the limit at closer measurement distance can be extrapolated by below formula:

$$\text{Limit}_{3\text{m}}(\text{dBuV/m}) = \text{Limit}_{30\text{m}}(\text{dBuV/m}) + 40\text{Log}(30\text{m}/3\text{m})$$

(3) Limit for this EUT

The emissions appearing within 15.205 restricted frequency bands shall not exceed the limits shown in 15.209, and the emissions appearing within RSS-Gen section 8.10 Restricted frequency bands shall not exceed the limits shown in RSS-Gen section 8.9, all the other emissions shall be at least 20 dB below the fundamental emissions or comply with 15.209 limits and RSS-Gen section 8.9 limits.

13.4. Assistant equipment used for test

Assistant equipment	Manufacturer	Model number	Description	other
/	/	/	/	/

13.5. Test procedure

- (1) EUT was placed on a non-metallic table, 80 cm above the ground plane inside a semi-anechoic chamber for below 1G and 150 cm above the ground plane inside a fully-anechoic chamber for above 1G.
- (2) Test antenna was located 3 m from the EUT on an adjustable mast, and the antenna used as below table.

Test frequency range	Test antenna used	Test antenna distance
9 kHz - 30 MHz	Active Loop antenna	3 m
30 MHz - 1 GHz	Trilog Broadband Antenna	3 m
1 GHz - 18 GHz	Double Ridged Horn Antenna(1 GHz-18 GHz)	3 m
18 GHz - 40 GHz	Horn Antenna(18 GHz-40 GHz)	1 m

According ANSI C63.10:2013 clause 6.4.6 and 6.5.3, for measurements below 30 MHz, Antenna was located 3 m from EUT, the loop antenna was positioned in three antenna orientations (parallel, perpendicular, and round-parallel), for each measurement antenna alignment, the EUT shall be rotated through 0° to 360° on a turntable, and the lowest height of the magnetic antenna shall be 1 m above the ground. For measurement above 30MHz, the trilog Broadband Antenna or Horn Antenna was located 3m from EUT, Measurements were made with the antenna positioned in both the horizontal and vertical planes of Polarization, and the measurement antenna was varied from 1 m to 4 m. in height above the reference ground plane to obtain the maximum signal strength.

(3) Below pre-scan procedure was first performed in order to find prominent frequency spectrum radiated emissions from 9 kHz to 25 GHz:

(a) Scanning the peak frequency spectrum with the antenna specified in step (3), and the EUT was rotated 360 degree, the antenna height was varied from 1 m to 4 m (Except loop antenna, it's fixed 1 m above ground.)

(b) Change work frequency or channel of device if practicable.

(c) Change modulation type of device if practicable.

(d) Change power supply range from 85% to 115% of the rated supply voltage

(e) Rotated EUT through three orthogonal axes to determine the attitude of EUT arrangement produces highest emissions.

Spectrum frequency from 9 kHz to 25 GHz (tenth harmonic of fundamental frequency) was investigated, and no any obvious emission were detected from 18 GHz to 25 GHz, so below final test was performed with frequency range from 9 kHz to 18 GHz.

(4) For final emissions measurements at each frequency of interest, the EUT was rotated and the antenna height was varied between 1 m and 4 m in order to maximize the emission. Measurements in both horizontal and vertical polarities were made and the data was recorded. In order to find the maximum emission, the relative positions of equipment and all of the interface cables were changed according to ANSI C63.10:2013 on Radiated Emission test.

(5) The emissions from 9 kHz to 1 GHz were measured based on CISPR QP detector except for the frequency bands 9 - 90 kHz, 110 - 490 kHz, for emissions from 9 kHz - 90 kHz, 110 kHz - 490 kHz and above 1 GHz were measured based on average detector, for emissions above 1 GHz, peak emissions also be measured and need comply with Peak limit.

(6) The emissions from 9 kHz to 1 GHz, QP or average values were measured with EMI receiver with below RBW.

Frequency band	RBW
9 kHz - 150 kHz	200 Hz
150 kHz - 30 MHz	9 kHz
30 MHz - 1 GHz	120 kHz

(7) For emissions above 1GHz, both Peak and Average level were measured with Spectrum Analyzer, and the RBW is set at 1 MHz, VBW is set at 3 MHz for Peak measure; According ANSI C63.10:2013 clause 4.1.4.2.2 procedure for average measure.

(8) For portable device, X axis, Y axis, Z axis are tested, and worse setup is reported.

(9) According exploratory test, the emission levels are 20 dB below the limit detected from 9 kHz to 30 MHz and 18 GHz to 25 GHz, so the final test was performed with frequency range from 30 MHz to 18 GHz and recorded in below.

(10) For 30 MHz ~ 25 GHz: (Scan with GFSK, $\pi/4$ -DQPSK and 8DPSK, the worst case is record and reported)

(11) For emissions below 1 GHz, according exploratory explorer test, when change Tx mode and channel, have no distinct influence on emissions level, so for emissions below 1 GHz, the final test was only performed with EUT working in worst mode.

13.6. Test result

PASS. (See below detailed test result)

13.7. Test data

TR-4-E-009 Radiated Emission Test Result

Test Date:

2024-08-06

Tested By:

Genliu

EUT:

Gaming Headset

Model Number:

CH351

Test Mode:

DH5 ANT1 TX

Power Supply:

Battery

Condition:

Temp:23.2°C;Humi:62.7%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2024 report data\Q24050708-2E\FCC BELOW1G\20240806-234717_H

Memo:

Sample Number: S24050708-001

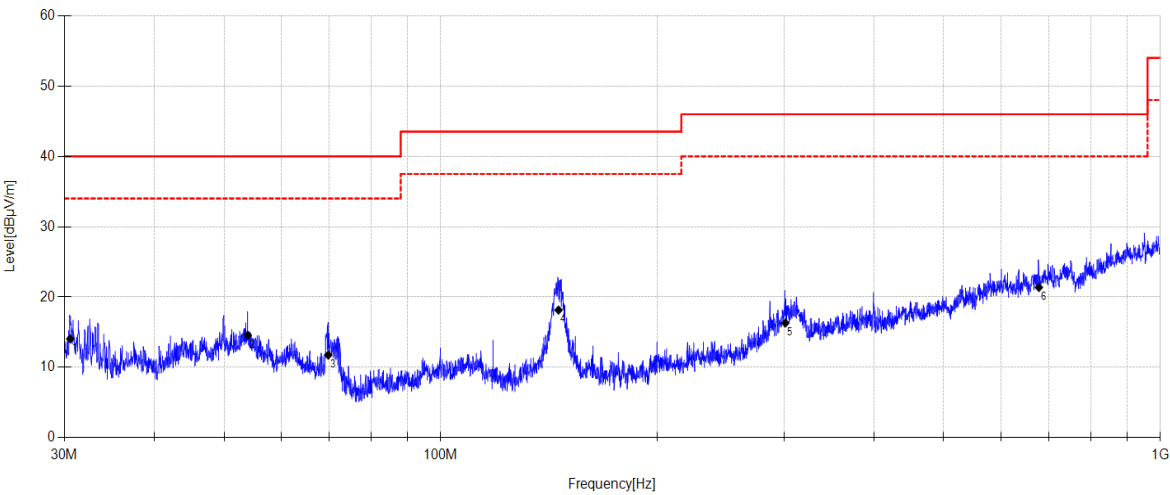

Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable Loss [dB]	AMP [dB]	Result [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	30.573	30.92	10.36	3.76	-30.99	14.05	40.00	25.95	QP	Horizontal
2	53.951	28.98	12.36	3.91	-30.67	14.58	40.00	25.42	QP	Horizontal
3	69.784	28.36	9.95	4.02	-30.57	11.76	40.00	28.24	QP	Horizontal
4	145.815	36.1	8.34	4.47	-30.76	18.15	43.50	25.35	QP	Horizontal
5	301.283	27.68	13.70	5.23	-30.30	16.31	46.00	29.69	QP	Horizontal
6	678.108	25.43	19.22	6.62	-29.90	21.37	46.00	24.63	QP	Horizontal

Note:

1. Result Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.
3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2024-08-06

Tested By:

Genliu

EUT:

Gaming Headset

Model Number:

CH351

Test Mode:

DH5 ANT1 TX

Power Supply:

Battery

Condition:

Temp:23.2°C;Humi:62.7%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2024 report data\Q24050708-2E\FCC BELOW1G\20240806-234759_V

Memo:

Sample Number: S24050708-001

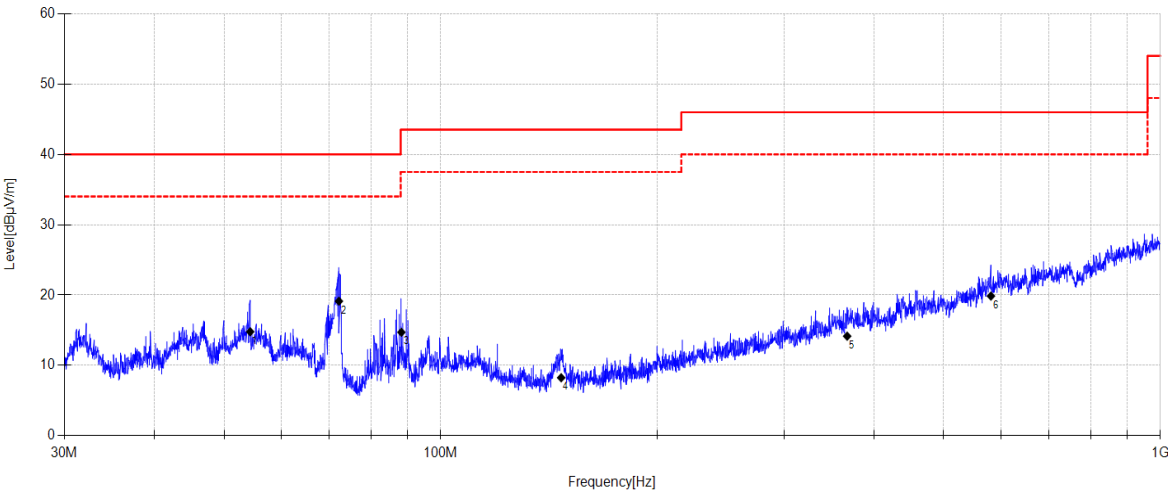

Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable Loss [dB]	AMP [dB]	Result [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	54.369	29.1	12.45	3.91	-30.67	14.79	40.00	25.21	QP	Vertical
2	72.223	36.13	9.51	4.04	-30.55	19.13	40.00	20.87	QP	Vertical
3	88.199	32.25	8.98	4.14	-30.66	14.71	43.50	28.79	QP	Vertical
4	147.047	25.64	8.90	4.47	-30.76	8.25	43.50	35.25	QP	Vertical
5	367.154	23.55	15.29	5.49	-30.17	14.16	46.00	31.84	QP	Vertical
6	581.581	24.68	18.78	6.30	-29.90	19.86	46.00	26.14	QP	Vertical

Note:

1. Result Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.

3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2024-08-06

Tested By:

Genliu

EUT:

Gaming Headset

Model Number:

CH351

Test Mode:

DH5 ANT2 TX

Power Supply:

Battery

Condition:

Temp:23.2°C;Humi:62.7%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2024 report data\Q24050708-2E\FCC BELOW1G\20240806-234537_H

Memo:

Sample Number: S24050708-001

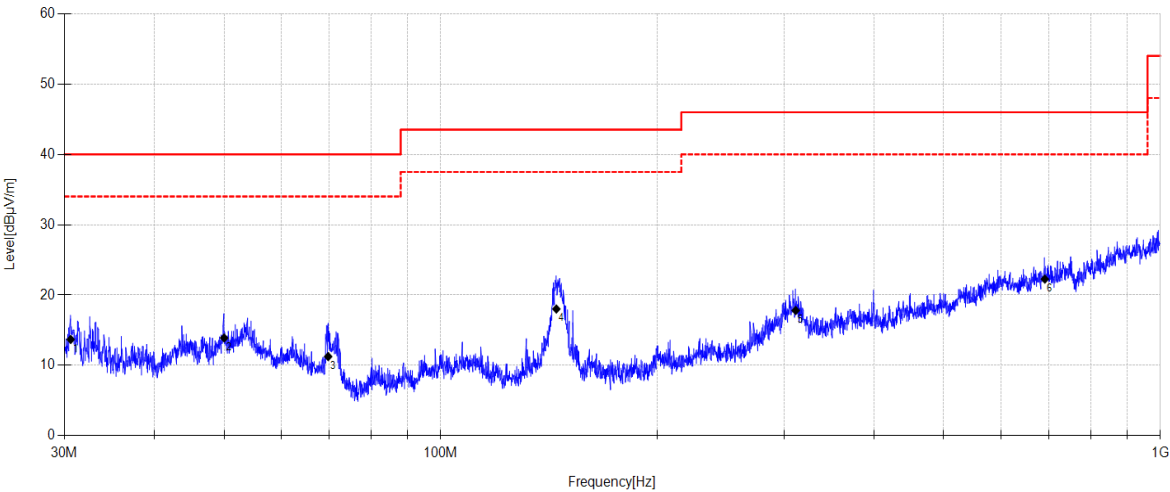

Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable Loss [dB]	AMP [dB]	Result [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	30.616	30.56	10.36	3.76	-30.99	13.69	40.00	26.31	QP	Horizontal
2	50.016	27.74	12.99	3.88	-30.70	13.91	40.00	26.09	QP	Horizontal
3	69.784	27.86	9.95	4.02	-30.57	11.26	40.00	28.74	QP	Horizontal
4	144.796	35.67	8.66	4.46	-30.77	18.02	43.50	25.48	QP	Horizontal
5	311.378	29.46	13.36	5.27	-30.28	17.81	46.00	28.19	QP	Horizontal
6	691.068	25.97	19.54	6.66	-29.90	22.27	46.00	23.73	QP	Horizontal

Note:

1. Result Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.

3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2024-08-06

Tested By:

Genliu

EUT:

Gaming Headset

Model Number:

CH351

Test Mode:

DH5 ANT2 TX

Power Supply:

Battery

Condition:

Temp:23.2°C;Humi:62.7%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2024 report data\Q24050708-2E\FCC BELOW1G\20240806-234620_V

Memo:

Sample Number: S24050708-001

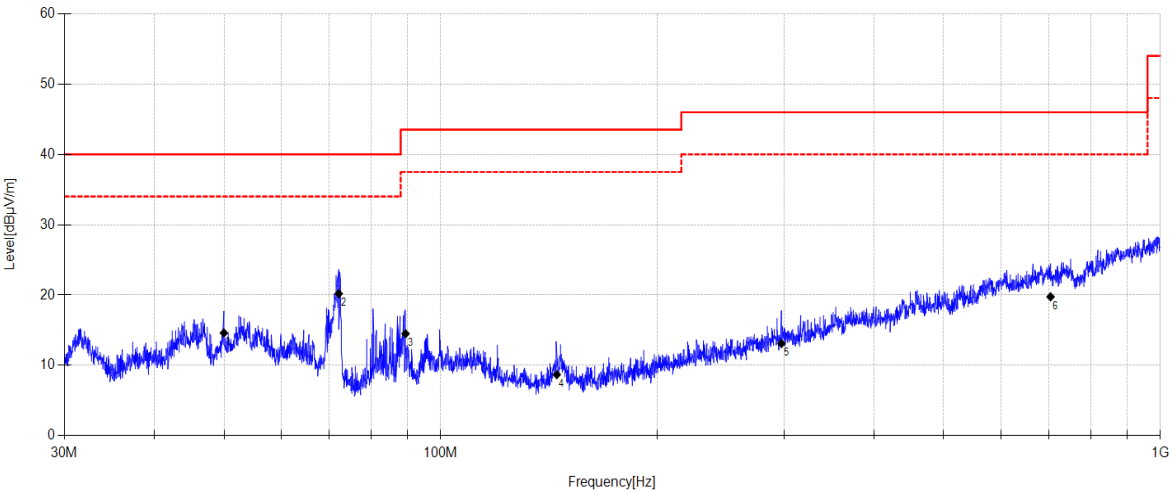

Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable Loss [dB]	AMP [dB]	Result [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	49.981	28.45	12.99	3.88	-30.70	14.62	40.00	25.38	QP	Vertical
2	72.173	37.18	9.53	4.04	-30.55	20.20	40.00	19.80	QP	Vertical
3	89.382	31.67	9.38	4.15	-30.69	14.51	43.50	28.99	QP	Vertical
4	144.999	26.5	8.50	4.46	-30.77	8.69	43.50	34.81	QP	Vertical
5	297.505	25.01	13.20	5.21	-30.31	13.11	46.00	32.89	QP	Vertical
6	703.782	23.28	19.68	6.70	-29.90	19.76	46.00	26.24	QP	Vertical

Note:

1. Result Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.

3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2024-08-05

Tested By:

Genliu

EUT:

Gaming Headset

Model Number:

CH351

Test Mode:

DH5 ANT1 2402MHz TX

Power Supply:

Battery

Condition:

Temp:23.2°C;Humi:62.7%

Test Site:

DDT 3# Chamber


File Path:

d:\ts\2024 report data\Q24050708-2E\FCC ABOVE1G-BT\153

Memo:

Sample Number: S24050708-007

Test Graph

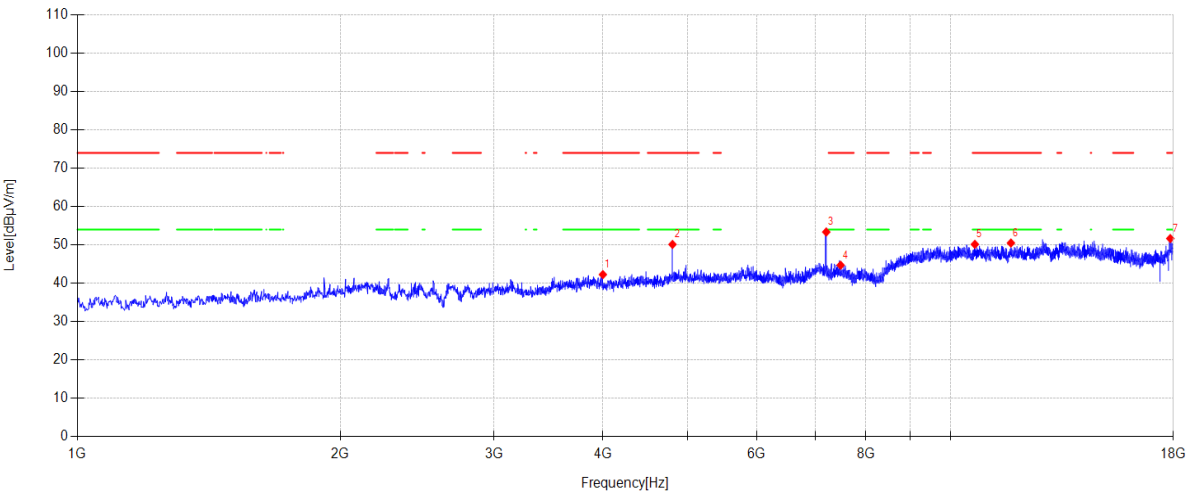

Data List										
N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	3998.800	46.78	30.90	5.05	-40.45	42.28	74.00	31.72	PK	Horizontal
2	4804.600	52.13	32.62	5.53	-40.15	50.13	74.00	23.87	PK	Horizontal
3	7206.700	51.24	36.80	6.55	-41.22	53.37	-	-	PK	Horizontal
4	7485.500	43.39	36.53	6.70	-41.91	44.71	74.00	29.29	PK	Horizontal
5	10664.500	41.83	39.33	7.96	-38.97	50.15	74.00	23.85	PK	Horizontal
6	11728.700	42.37	38.97	8.59	-39.43	50.50	74.00	23.50	PK	Horizontal
7	17855.500	39.55	41.41	12.78	-42.08	51.66	74.00	22.34	PK	Horizontal

Note:

- Level = Reading + Cable loss + Antenna Factor + AMP
- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2024-08-05

Tested By:

Genliu

EUT:

Gaming Headset

Model Number:

CH351

Test Mode:

DH5 ANT1 2402MHz TX

Power Supply:

Battery

Condition:

Temp:23.2°C;Humi:62.7%

Test Site:

DDT 3# Chamber


File Path:

d:\ts\2024 report data\Q24050708-2E\FCC ABOVE1G-BT\154

Memo:

Sample Number: S24050708-007

Test Graph

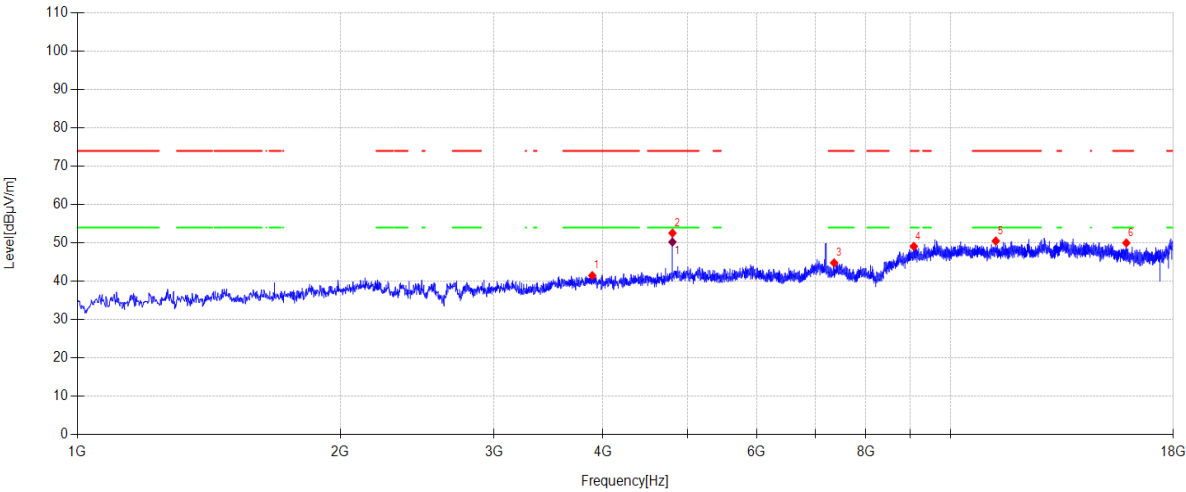

Data List										
N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	3888.300	45.67	31.13	5.07	-40.38	41.49	74.00	32.51	PK	Vertical
2	4804.600	54.56	32.62	5.53	-40.15	52.56	74.00	21.44	PK	Vertical
3	7358.000	43.00	36.78	6.63	-41.60	44.81	74.00	29.19	PK	Vertical
4	9078.400	42.07	38.46	7.33	-38.78	49.08	74.00	24.92	PK	Vertical
5	11269.700	42.22	39.20	8.30	-39.22	50.50	74.00	23.50	PK	Vertical
6	15900.500	41.12	38.10	10.08	-39.30	50.00	74.00	24.00	PK	Vertical

Data List										
N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	4804.000	52.23	32.62	5.53	-40.15	50.23	54.0	3.77	AV	Vertical

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2024-08-07

Tested By:

Genliu

EUT:

Gaming Headset

Model Number:

CH351

Test Mode:

DH5 ANT2 2402MHz TX

Power Supply:

Battery

Condition:

Temp:23.2°C;Humi:62.7%

Test Site:

DDT 3# Chamber


File Path:

d:\ts\2024 report data\Q24050708-2E\FCC ABOVE1G-BT\229

Memo:

Sample Number: S24050708-007

Test Graph

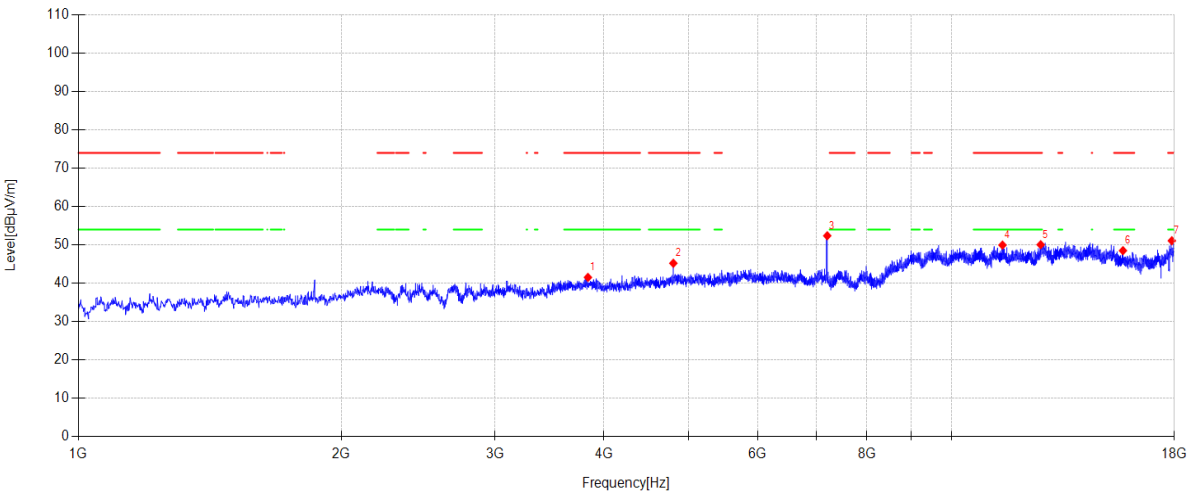

Data List										
N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	3833.900	45.97	30.84	5.08	-40.35	41.54	74.00	32.46	PK	Horizontal
2	4802.900	47.26	32.58	5.53	-40.15	45.22	74.00	28.78	PK	Horizontal
3	7206.700	50.26	36.80	6.55	-41.22	52.39	-	-	PK	Horizontal
4	11441.400	41.59	39.26	8.41	-39.30	49.96	74.00	24.04	PK	Horizontal
5	12653.500	41.26	39.51	9.09	-39.81	50.05	74.00	23.95	PK	Horizontal
6	15718.600	39.28	38.46	9.96	-39.19	48.51	74.00	25.49	PK	Horizontal
7	17881.000	38.68	41.69	12.85	-42.13	51.09	74.00	22.91	PK	Horizontal

Note:

- Level = Reading + Cable loss + Antenna Factor + AMP
- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2024-08-07

Tested By:

Genliu

EUT:

Gaming Headset

Model Number:

CH351

Test Mode:

DH5 ANT2 2402MHz TX

Power Supply:

Battery

Condition:

Temp:23.2°C;Humi:62.7%

Test Site:

DDT 3# Chamber


File Path:

d:\ts\2024 report data\Q24050708-2E\FCC ABOVE1G-BT\230

Memo:

Sample Number: S24050708-007

Test Graph

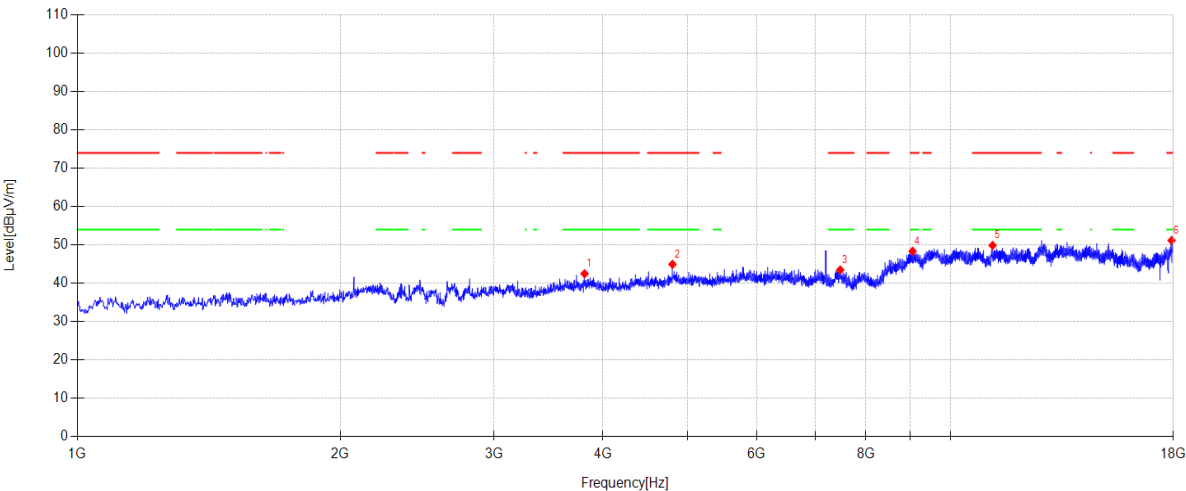

Data List										
N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	3810.100	47.01	30.74	5.08	-40.33	42.50	74.00	31.50	PK	Vertical
2	4804.600	46.95	32.62	5.53	-40.15	44.95	74.00	29.05	PK	Vertical
3	7477.000	42.13	36.55	6.69	-41.89	43.48	74.00	30.52	PK	Vertical
4	9049.500	41.43	38.40	7.32	-38.79	48.36	74.00	25.64	PK	Vertical
5	11176.200	41.58	39.22	8.24	-39.17	49.87	74.00	24.13	PK	Vertical
6	17918.400	38.45	41.99	12.96	-42.22	51.18	74.00	22.82	PK	Vertical

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2024-08-05

Tested By:

Genliu

EUT:

Gaming Headset

Model Number:

CH351

Test Mode:

DH5 ANT1 2441MHz TX

Power Supply:

Battery

Condition:

Temp:23.2°C;Humi:62.7%

Test Site:

DDT 3# Chamber


File Path:

d:\ts\2024 report data\Q24050708-2E\FCC ABOVE1G-BT\155

Memo:

Sample Number: S24050708-007

Test Graph

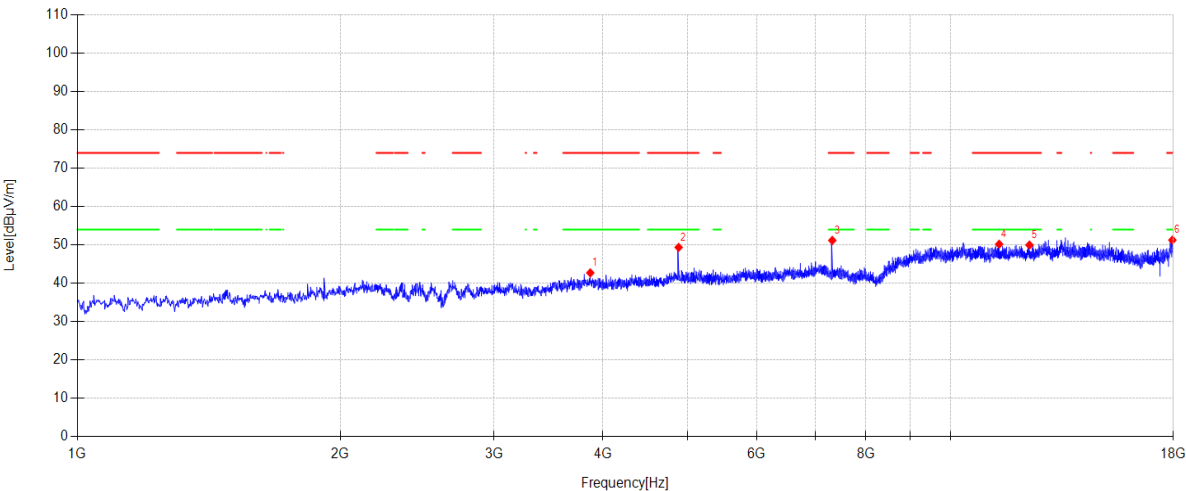

Data List										
N O.	Freq. [MHz]	Reading [dBµV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Detector	Polarity
1	3867.900	47.01	31.01	5.07	-40.37	42.72	74.00	31.28	PK	Horizontal
2	4882.800	50.62	33.28	5.58	-40.12	49.36	74.00	24.64	PK	Horizontal
3	7322.300	49.21	36.86	6.61	-41.51	51.17	74.00	22.83	PK	Horizontal
4	11371.700	41.82	39.27	8.36	-39.26	50.19	74.00	23.81	PK	Horizontal
5	12318.600	41.43	39.30	8.92	-39.68	49.97	74.00	24.03	PK	Horizontal
6	17954.100	38.33	42.17	13.06	-42.30	51.26	74.00	22.74	PK	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2024-08-05

Tested By:

Genliu

EUT:

Gaming Headset

Model Number:

CH351

Test Mode:

DH5 ANT1 2441MHz TX

Power Supply:

Battery

Condition:

Temp:23.2°C;Humi:62.7%

Test Site:

DDT 3# Chamber


File Path:

d:\ts\2024 report data\Q24050708-2E\FCC ABOVE1G-BT\156

Memo:

Sample Number: S24050708-007

Test Graph

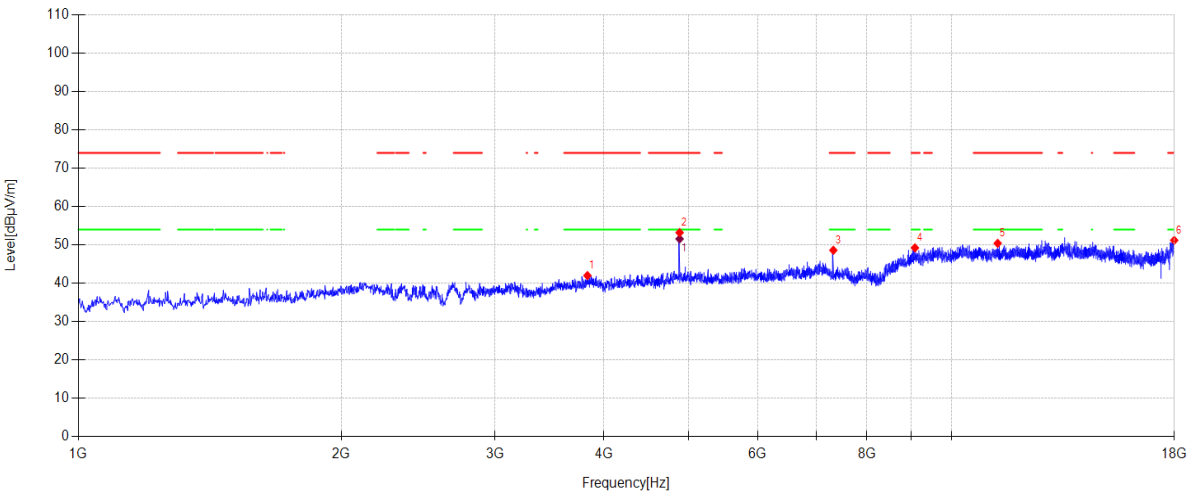

Data List										
N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	3828.800	46.46	30.82	5.08	-40.35	42.01	74.00	31.99	PK	Vertical
2	4882.800	54.47	33.28	5.58	-40.12	53.21	74.00	20.79	PK	Vertical
3	7324.000	46.66	36.85	6.61	-41.51	48.61	74.00	25.39	PK	Vertical
4	9081.800	42.23	38.46	7.33	-38.78	49.24	74.00	24.76	PK	Vertical
5	11296.900	42.12	39.20	8.32	-39.23	50.41	74.00	23.59	PK	Vertical
6	17994.900	38.05	42.37	13.18	-42.39	51.21	74.00	22.79	PK	Vertical

Data List										
N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	4882.015	52.83	33.28	5.58	-40.12	51.57	54.0	2.43	AV	Vertical

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2024-08-07

Tested By:

Genliu

EUT:

Gaming Headset

Model Number:

CH351

Test Mode:

DH5 ANT2 2441MHz TX

Power Supply:

Battery

Condition:

Temp:23.2°C;Humi:62.7%

Test Site:

DDT 3# Chamber


File Path:

d:\ts\2024 report data\Q24050708-2E\FCC ABOVE1G-BT\227

Memo:

Sample Number: S24050708-007

Test Graph

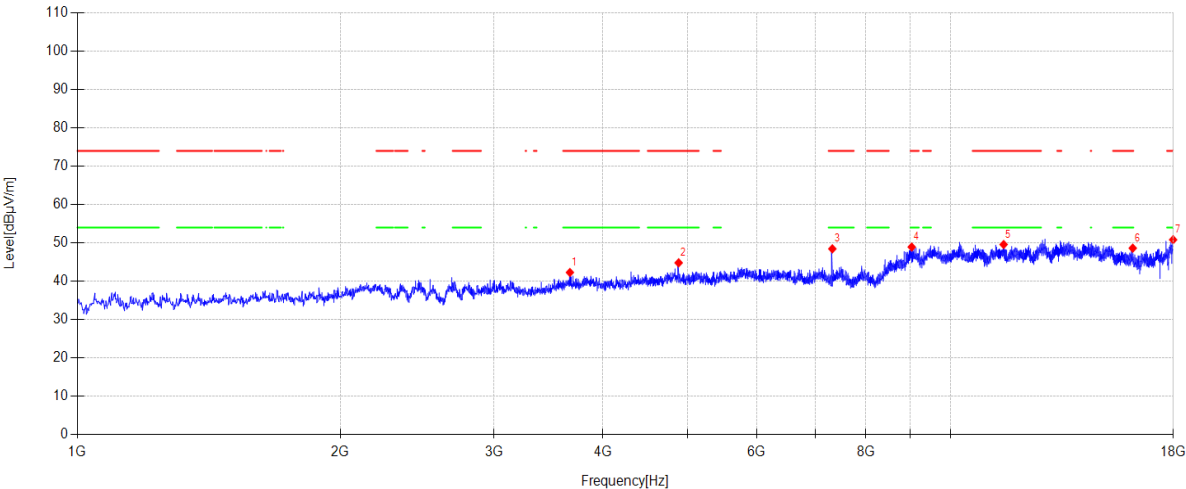

Data List										
N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	3665.600	47.18	30.26	5.11	-40.25	42.30	74.00	31.70	PK	Horizontal
2	4882.800	46.07	33.28	5.58	-40.12	44.81	74.00	29.19	PK	Horizontal
3	7324.000	46.51	36.85	6.61	-41.51	48.46	74.00	25.54	PK	Horizontal
4	9029.100	42.05	38.36	7.31	-38.79	48.93	74.00	25.07	PK	Horizontal
5	11506.000	41.27	39.19	8.45	-39.33	49.58	74.00	24.42	PK	Horizontal
6	16172.500	40.11	37.83	10.19	-39.50	48.63	74.00	25.37	PK	Horizontal
7	17989.800	37.70	42.35	13.16	-42.38	50.83	74.00	23.17	PK	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2024-08-07

Tested By:

Genliu

EUT:

Gaming Headset

Model Number:

CH351

Test Mode:

DH5 ANT2 2441MHz TX

Power Supply:

Battery

Condition:

Temp:23.2°C;Humi:62.7%

Test Site:

DDT 3# Chamber


File Path:

d:\ts\2024 report data\Q24050708-2E\FCC ABOVE1G-BT\228

Memo:

Sample Number: S24050708-007

Test Graph

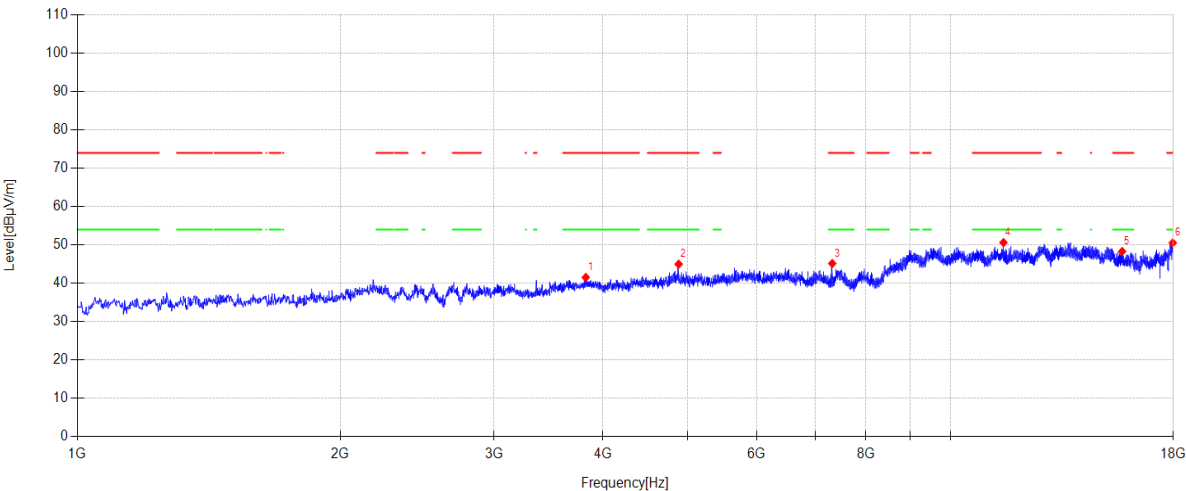

Data List										
N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	3822.000	46.01	30.79	5.08	-40.34	41.54	74.00	32.46	PK	Vertical
2	4882.800	46.25	33.28	5.58	-40.12	44.99	74.00	29.01	PK	Vertical
3	7322.300	43.20	36.86	6.61	-41.51	45.16	74.00	28.84	PK	Vertical
4	11500.900	42.29	39.20	8.45	-39.33	50.61	74.00	23.39	PK	Vertical
5	15725.400	39.07	38.45	9.97	-39.20	48.29	74.00	25.71	PK	Vertical
6	17974.500	37.49	42.27	13.12	-42.34	50.54	74.00	23.46	PK	Vertical

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2024-08-05

Tested By:

Genliu

EUT:

Gaming Headset

Model Number:

CH351

Test Mode:

DH5 ANT1 2480MHz TX

Power Supply:

Battery

Condition:

Temp:23.2°C;Humi:62.7%

Test Site:

DDT 3# Chamber


File Path:

d:\ts\2024 report data\Q24050708-2E\FCC ABOVE1G-BT\157

Memo:

Sample Number: S24050708-007

Test Graph

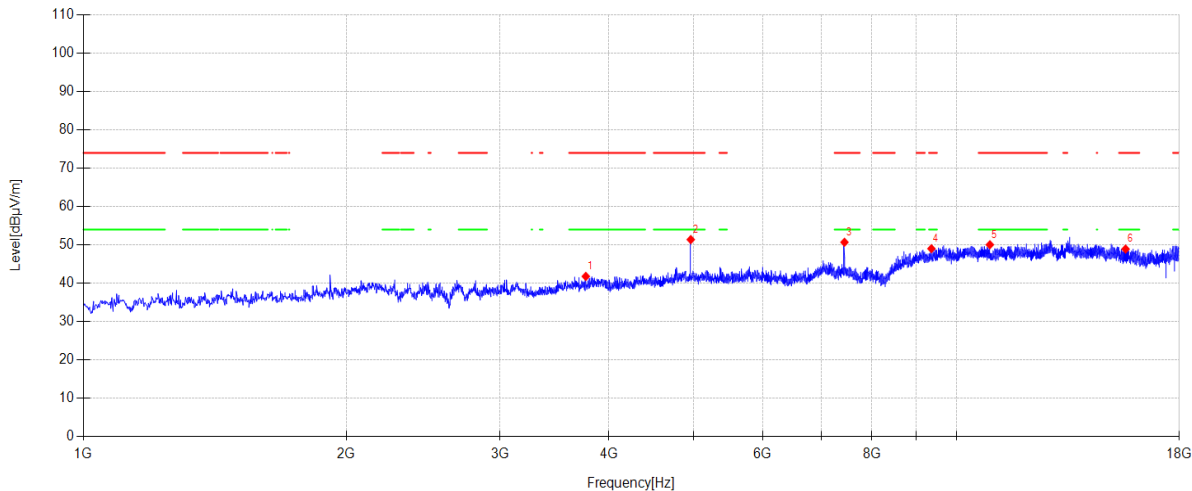

Data List										
N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	3762.500	46.47	30.55	5.09	-40.31	41.80	74.00	32.20	PK	Horizontal
2	4962.700	52.72	33.13	5.63	-40.09	51.39	74.00	22.61	PK	Horizontal
3	7443.000	49.23	36.61	6.67	-41.81	50.70	74.00	23.30	PK	Horizontal
4	9360.600	41.67	38.70	7.42	-38.76	49.03	74.00	24.97	PK	Horizontal
5	10921.200	41.72	39.30	8.09	-39.06	50.05	74.00	23.95	PK	Horizontal
6	15620.000	39.57	38.58	9.90	-39.13	48.92	74.00	25.08	PK	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2024-08-05

Tested By:

Genliu

EUT:

Gaming Headset

Model Number:

CH351

Test Mode:

DH5 ANT1 2480MHz TX

Power Supply:

Battery

Condition:

Temp:23.2°C;Humi:62.7%

Test Site:

DDT 3# Chamber


File Path:

d:\ts\2024 report data\Q24050708-2E\FCC ABOVE1G-BT\158

Memo:

Sample Number: S24050708-007

Test Graph

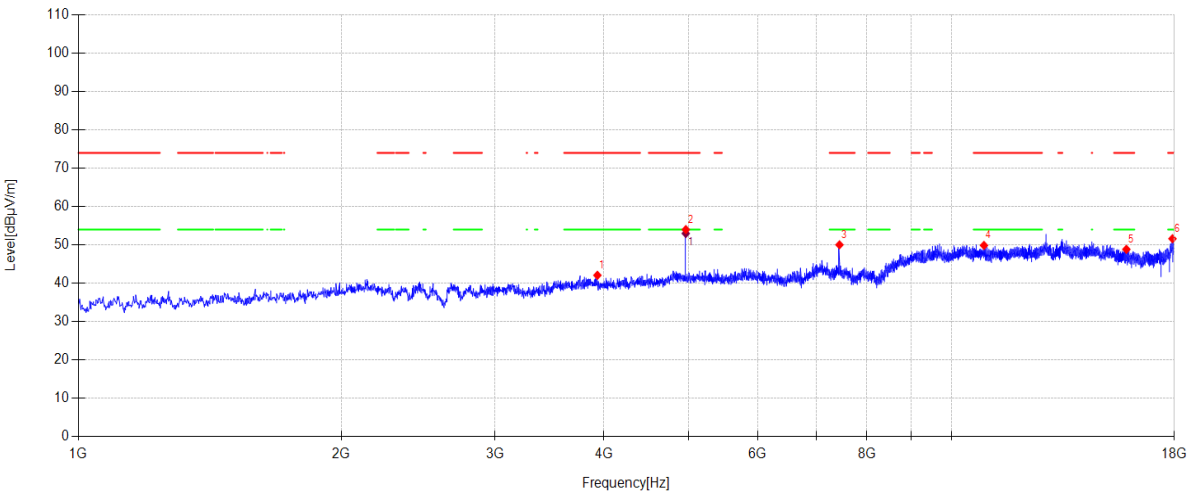

Data List										
N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	3930.800	46.30	31.14	5.06	-40.41	42.09	74.00	31.91	PK	Vertical
2	4962.700	55.32	33.13	5.63	-40.09	53.99	74.00	20.01	PK	Vertical
3	7443.000	48.56	36.61	6.67	-41.81	50.03	74.00	23.97	PK	Vertical
4	10895.700	41.54	39.30	8.08	-39.05	49.87	74.00	24.13	PK	Vertical
5	15861.400	39.89	38.18	10.06	-39.28	48.85	74.00	25.15	PK	Vertical
6	17911.600	38.92	41.96	12.94	-42.20	51.62	74.00	22.38	PK	Vertical

Data List										
N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	4961.975	54.31	33.13	5.63	-40.09	52.98	54.0	1.02	AV	Vertical

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2024-08-07

Tested By:

Genliu

EUT:

Gaming Headset

Model Number:

CH351

Test Mode:

DH5 ANT2 2480MHz TX

Power Supply:

Battery

Condition:

Temp:23.2°C;Humi:62.7%

Test Site:

DDT 3# Chamber


File Path:

d:\ts\2024 report data\Q24050708-2E\FCC ABOVE1G-BT\225

Memo:

Sample Number: S24050708-007

Test Graph

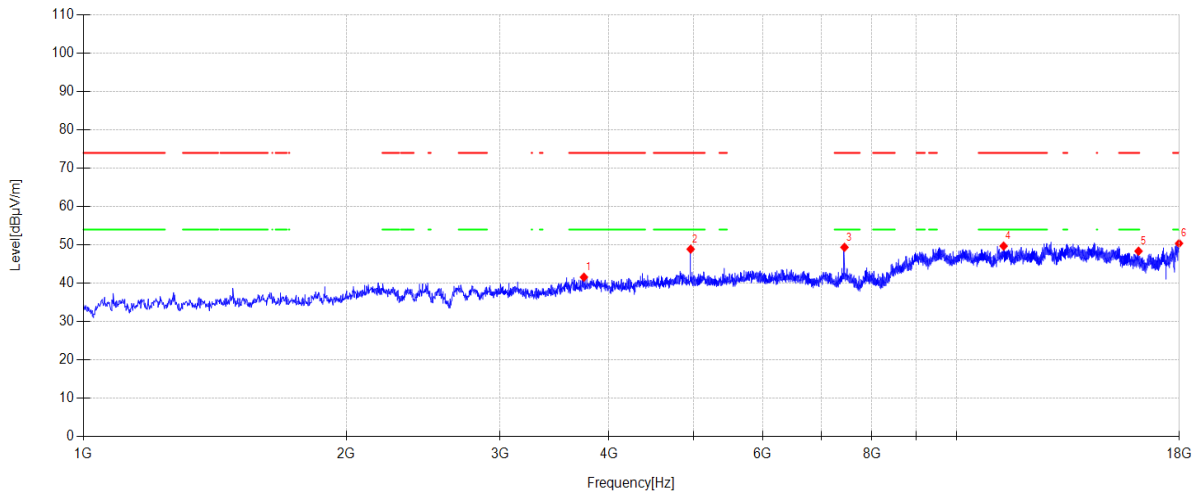

Data List										
N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	3743.800	46.31	30.49	5.09	-40.29	41.60	74.00	32.40	PK	Horizontal
2	4961.000	50.24	33.12	5.63	-40.09	48.90	74.00	25.10	PK	Horizontal
3	7443.000	47.90	36.61	6.67	-41.81	49.37	74.00	24.63	PK	Horizontal
4	11324.100	41.39	39.22	8.33	-39.24	49.70	74.00	24.30	PK	Horizontal
5	16165.700	39.85	37.83	10.18	-39.49	48.37	74.00	25.63	PK	Horizontal
6	17988.100	37.27	42.34	13.16	-42.37	50.40	74.00	23.60	PK	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2024-08-07

Tested By:

Genliu

EUT:

Gaming Headset

Model Number:

CH351

Test Mode:

DH5 ANT2 2480MHz TX

Power Supply:

Battery

Condition:

Temp:23.2°C;Humi:62.7%

Test Site:

DDT 3# Chamber


File Path:

d:\ts\2024 report data\Q24050708-2E\FCC ABOVE1G-BT\226

Memo:

Sample Number: S24050708-007

Test Graph

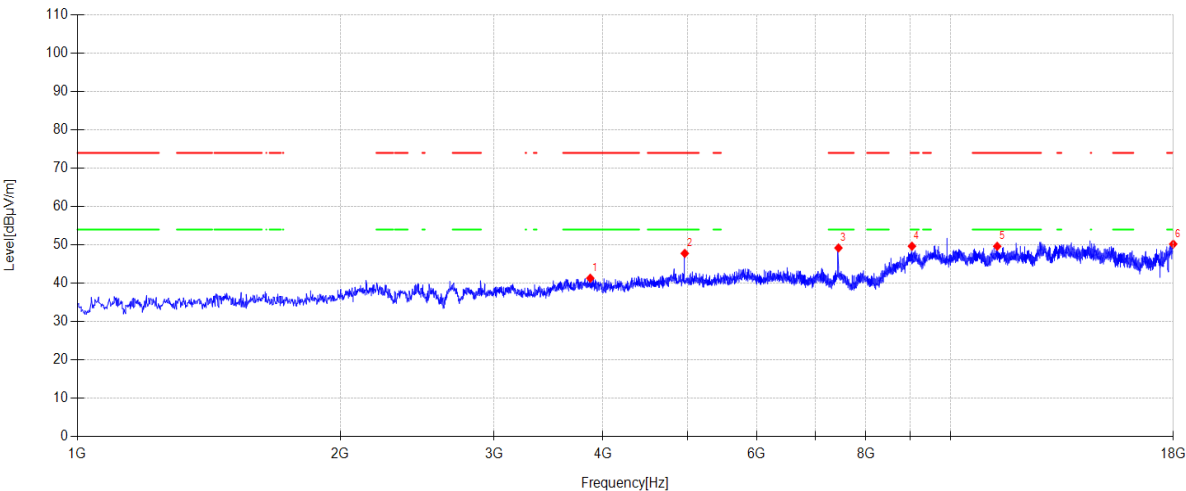

Data List										
N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	3867.900	45.61	31.01	5.07	-40.37	41.32	74.00	32.68	PK	Vertical
2	4962.700	49.12	33.13	5.63	-40.09	47.79	74.00	26.21	PK	Vertical
3	7443.000	47.75	36.61	6.67	-41.81	49.22	74.00	24.78	PK	Vertical
4	9034.200	42.78	38.37	7.31	-38.79	49.67	74.00	24.33	PK	Vertical
5	11312.200	41.34	39.21	8.33	-39.24	49.64	74.00	24.36	PK	Vertical
6	17996.600	37.06	42.38	13.18	-42.39	50.23	74.00	23.77	PK	Vertical

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.


3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

14. Band Edge Compliance

14.1. Test equipment

Equipment	Manufacturer	Model No.	Serial No.	Cal Due To
Broad-Band Horn Antenna	Schwarzbeck	BBHA 9170	DDT-ZC00506	2025/04/26
RF cable	Zhongke Junchuang	JCT26S-NJ-NJ-1.5M	DDT-ZC02762	2025/03/31
Active Loop Antenna	Schwarzbeck	FMZB1519	DDT-ZC00524	2025/09/11
High pass filter	Micro-Tronics	HPM50108	DDT-ZC00560	2025/04/22
RF cable	Yuhu Technology	JCTB810-NJ-NJ-9M	DDT-ZC02538	2025/03/31
High Pass filter	Xi'an Xingbo	XBLBQ-GTA67	DDT-ZC02179	2025/04/22
Trilog Broadband Antenna	Schwarzbeck	VULB 9163	DDT-ZC02050	2025/07/11
Micro-Tronics filters	REBES	BRM50702	DDT-ZC03242	/
ELECTRIC AND MAGNETIC FIELD ANALYZER	Narda	EHP-200A	DDT-ZC01401	2024/09/20
Hochgewinn-Hornantenne	SCHWARZBECK	BBHA 9120 D	DDT-ZC02129	2025/09/18
High pass filter	Micro-Tronics	HPM50102	DDT-ZC00561	2025/04/22
PSA Series Spectrum Analyzer	Agilent	E4447A	DDT-ZC00517	2025/03/31
RF Cable	N/A	W13.02 AP1-X2	DDT-ZC04023	2025/03/31
EMI TEST RECEIVER	R&S	ESU26	DDT-ZC01909	2025/03/31
Pre-amplifier	COM-POWER	PAM-118A	DDT-ZC01293	2025/07/08
Pre-amplifier	COM-POWER	PAM-840A	DDT-ZC01693	2025/03/31
Micro-Tronics filters	REBES	BRM50716	DDT-ZC03240	/
RF Cable	N/A	W24.02 HL-562	DDT-ZC04022	2025/03/31
RF cable	Yuhu Technology	ZT26S-SMAJ-SMAJ-1M	DDT-ZC02037	2025/03/31

14.2. Block diagram of test setup

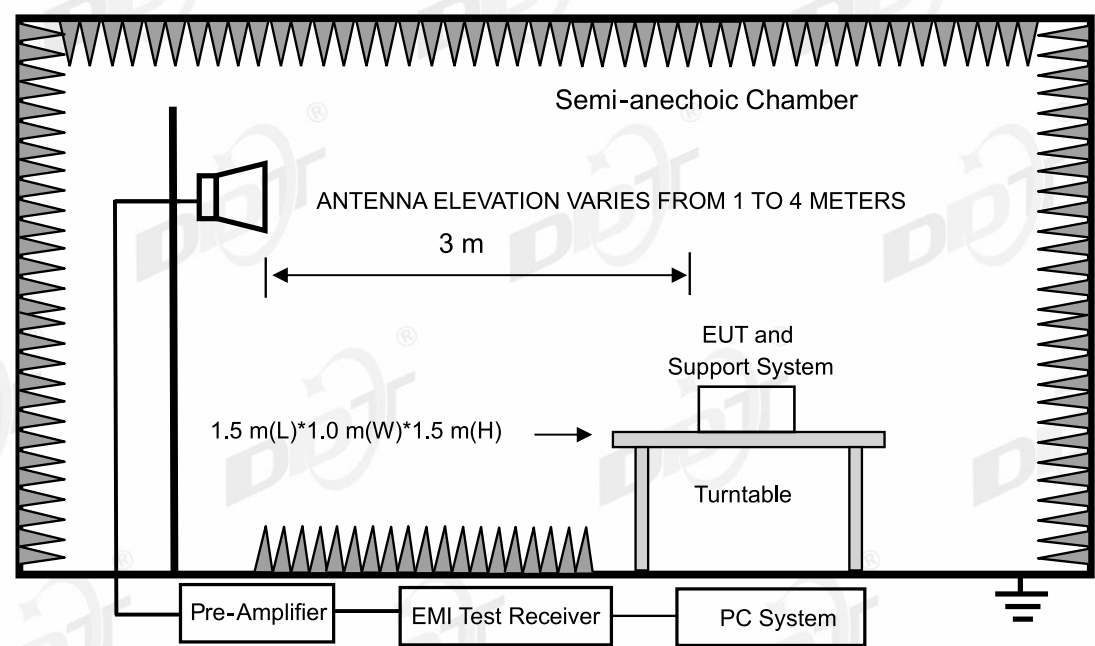

14.3. Limits

All restriction band should comply with 15.209 and RSS-Gen section 8.9 limits, other emission should be at least 20 dB below the fundamental.

14.4. Assistant equipment used for test

Assistant equipment	Manufacturer	Model number	Description	other
/	/	/	/	/

14.5. Test procedure

Same with Radiated Emission except change investigated frequency range.
Remark: All restriction band have been tested, and only the worst case is shown in report.

14.6. Test result

PASS. (See below detailed test result)

14.7. Test data

TR-4-E-009 Radiated Emission Test Result

Test Date:

2024-08-05

Tested By:

Genliu

EUT:

Gaming Headset

Model Number:

CH351

Test Mode:

DH5 ANT1 2402MHz TX

Power Supply:

Battery

Condition:

Temp:23.2°C;Humi:62.7%

Test Site:

DDT 3# Chamber


File Path:

d:\ts\2024 report data\Q24050708-2E\FCC ABOVE1G-BT\161

Memo:

Sample Number: S24050708-007

Test Graph

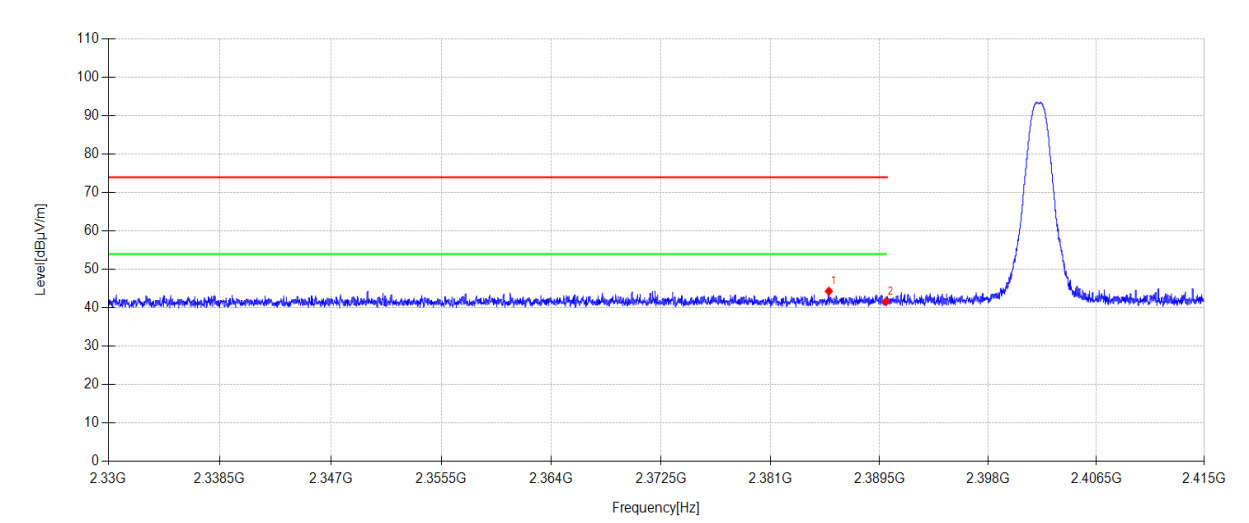

Data List										
N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2385.539	13.52	27.24	3.57	0.00	44.33	74.00	29.67	PK	Horizontal
2	2390.000	10.80	27.26	3.57	0.00	41.63	74.00	32.37	PK	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2024-08-05

Tested By:

Genliu

EUT:

Gaming Headset

Model Number:

CH351

Test Mode:

DH5 ANT1 2402MHz TX

Power Supply:

Battery

Condition:

Temp:23.2°C;Humi:62.7%

Test Site:

DDT 3# Chamber


File Path:

d:\ts\2024 report data\Q24050708-2E\FCC ABOVE1G-BT\162

Memo:

Sample Number: S24050708-007

Test Graph

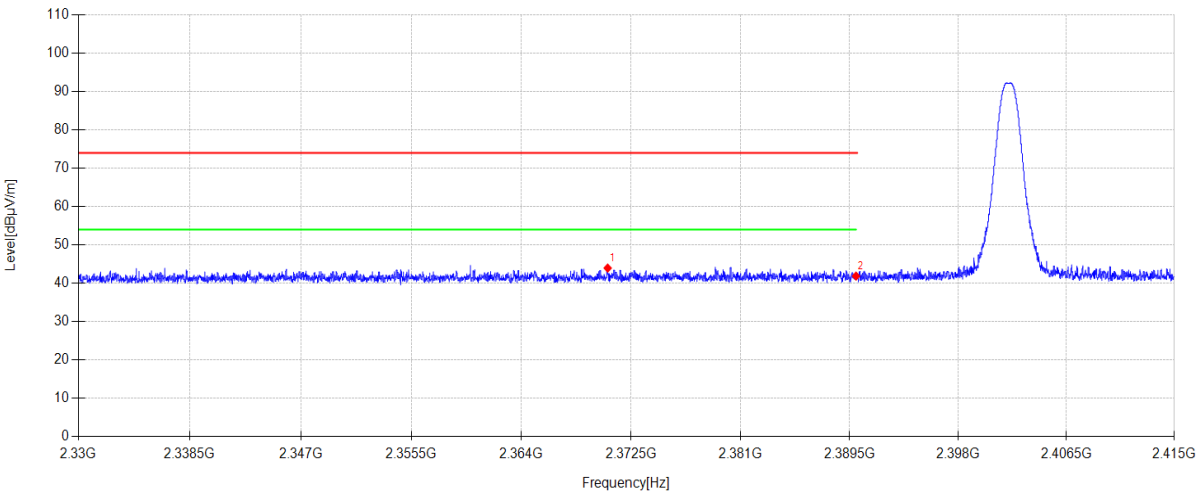

Data List										
N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2370.673	13.23	27.18	3.56	0.00	43.97	74.00	30.03	PK	Vertical
2	2390.000	11.04	27.26	3.57	0.00	41.87	74.00	32.13	PK	Vertical

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2024-08-05

Tested By:

Genliu

EUT:

Gaming Headset

Model Number:

CH351

Test Mode:

2DH5 ANT1 2402MHz TX

Power Supply:

Battery

Condition:

Temp:23.2°C;Humi:62.7%

Test Site:

DDT 3# Chamber


File Path:

d:\ts\2024 report data\Q24050708-2E\FCC ABOVE1G-BT\163

Memo:

Sample Number: S24050708-007

Test Graph

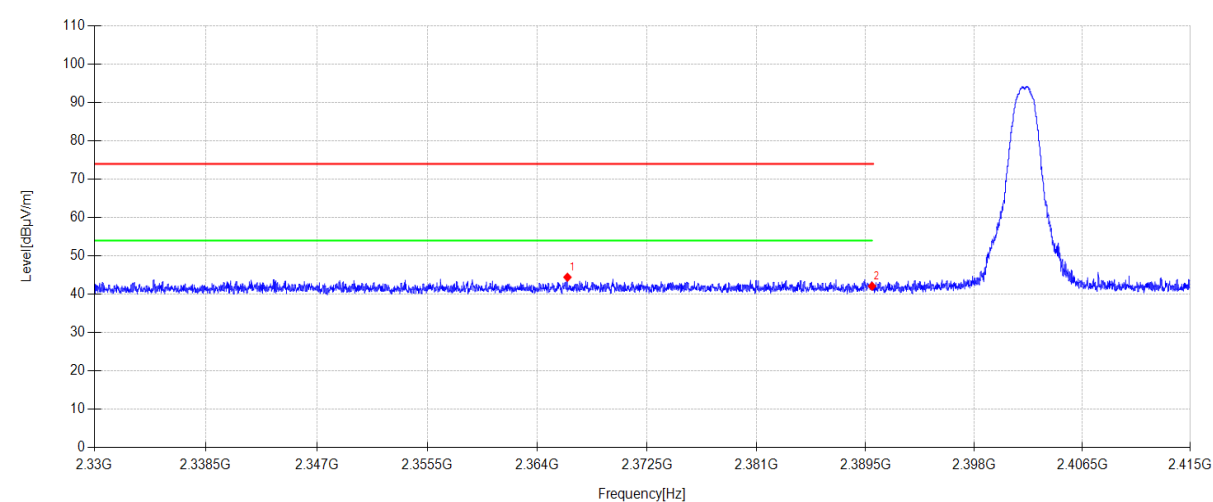

Data List										
N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2366.321	13.71	27.17	3.56	0.00	44.44	74.00	29.56	PK	Horizontal
2	2390.000	11.28	27.26	3.57	0.00	42.11	74.00	31.89	PK	Horizontal

- Note:
1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2024-08-05

Tested By:

Genliu

EUT:

Gaming Headset

Model Number:

CH351

Test Mode:

2DH5 ANT1 2402MHz TX

Power Supply:

Battery

Condition:

Temp:23.2°C;Humi:62.7%

Test Site:

DDT 3# Chamber


File Path:

d:\ts\2024 report data\Q24050708-2E\FCC ABOVE1G-BT\164

Memo:

Sample Number: S24050708-007

Test Graph

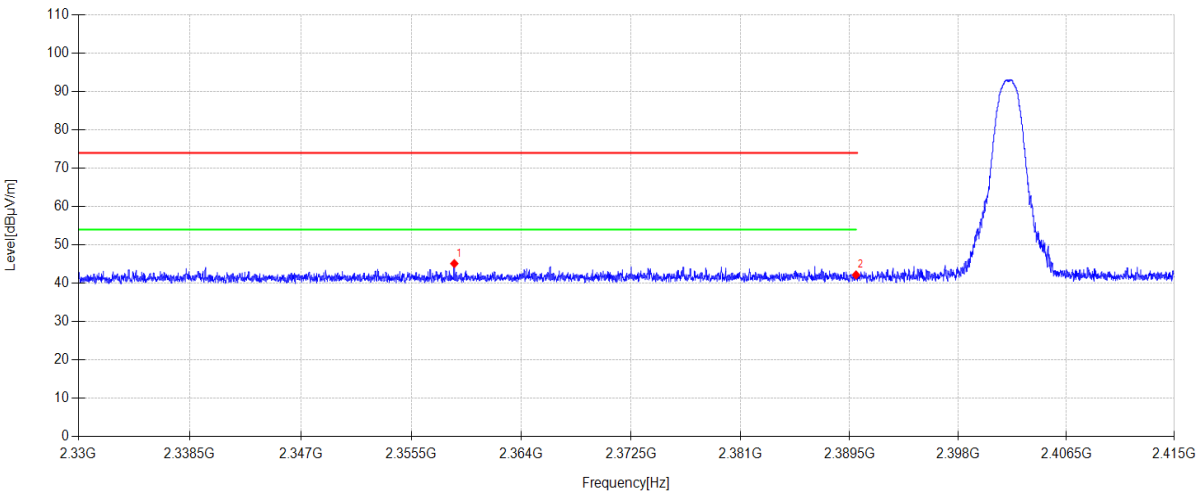

Data List										
N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2358.815	14.44	27.14	3.55	0.00	45.13	74.00	28.87	PK	Vertical
2	2390.000	11.35	27.26	3.57	0.00	42.18	74.00	31.82	PK	Vertical

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2024-08-05

Tested By:

Genliu

EUT:

Gaming Headset

Model Number:

CH351

Test Mode:

3DH5 ANT1 2402MHz TX

Power Supply:

Battery

Condition:

Temp:23.2°C;Humi:62.7%

Test Site:

DDT 3# Chamber


File Path:

d:\ts\2024 report data\Q24050708-2E\FCC ABOVE1G-BT\165

Memo:

Sample Number: S24050708-007

Test Graph

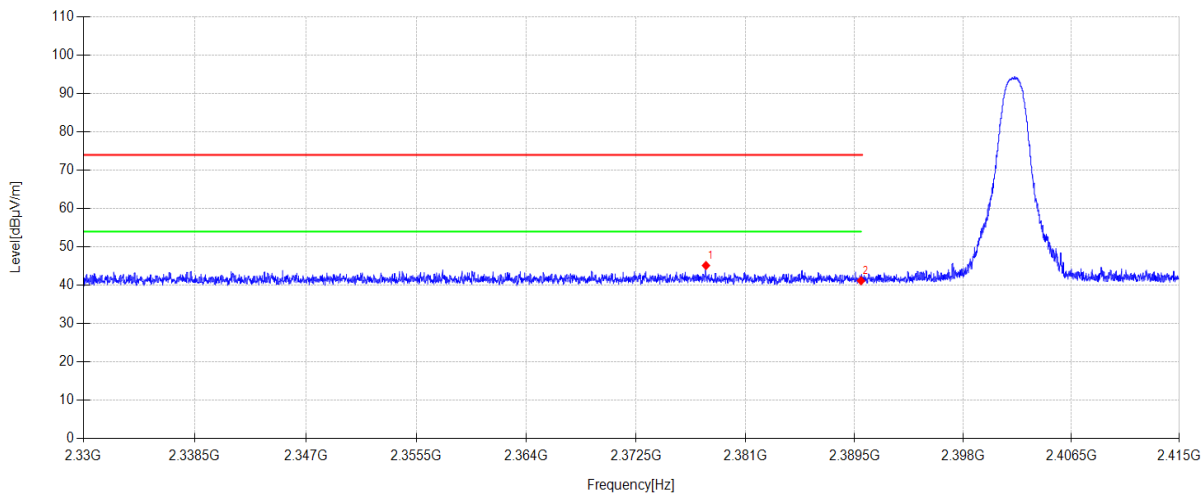

Data List										
N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2377.915	14.38	27.21	3.56	0.00	45.15	74.00	28.85	PK	Horizontal
2	2390.000	10.35	27.26	3.57	0.00	41.18	74.00	32.82	PK	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2024-08-05

Tested By:

Genliu

EUT:

Gaming Headset

Model Number:

CH351

Test Mode:

3DH5 ANT1 2402MHz TX

Power Supply:

Battery

Condition:

Temp:23.2°C;Humi:62.7%

Test Site:

DDT 3# Chamber


File Path:

d:\ts\2024 report data\Q24050708-2E\FCC ABOVE1G-BT\166

Memo:

Sample Number: S24050708-007

Test Graph

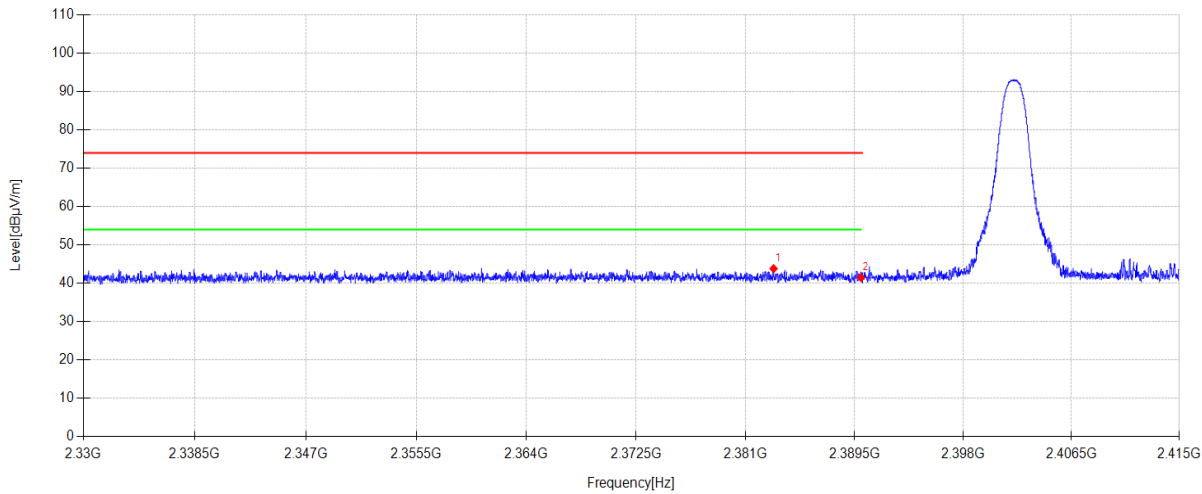

Data List										
N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2383.176	13.02	27.23	3.56	0.00	43.81	74.00	30.19	PK	Vertical
2	2390.000	10.67	27.26	3.57	0.00	41.50	74.00	32.50	PK	Vertical

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2024-08-05

Tested By:

Genliu

EUT:

Gaming Headset

Model Number:

CH351

Test Mode:

DH5 ANT1 2480MHz TX

Power Supply:

Battery

Condition:

Temp:23.2°C;Humi:62.7%

Test Site:

DDT 3# Chamber


File Path:

d:\ts\2024 report data\Q24050708-2E\FCC ABOVE1G-BT\159

Memo:

Sample Number: S24050708-007

Test Graph

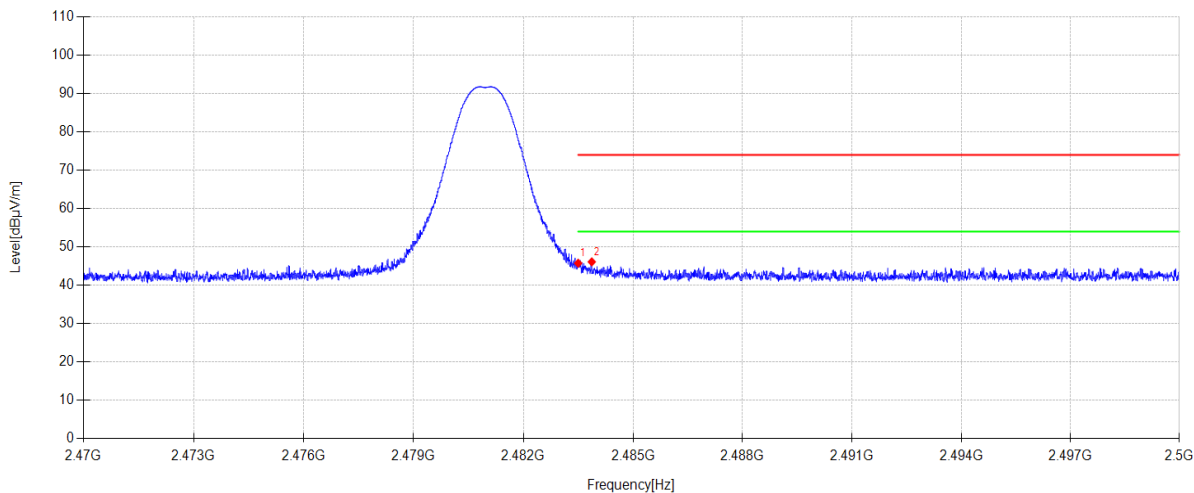

Data List										
N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2483.500	14.61	27.53	3.62	0.00	45.76	74.00	28.24	PK	Horizontal
2	2483.872	14.94	27.54	3.62	0.00	46.10	74.00	27.90	PK	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2024-08-05

Tested By:

Genliu

EUT:

Gaming Headset

Model Number:

CH351

Test Mode:

DH5 ANT1 2480MHz TX

Power Supply:

Battery

Condition:

Temp:23.2°C;Humi:62.7%

Test Site:

DDT 3# Chamber


File Path:

d:\ts\2024 report data\Q24050708-2E\FCC ABOVE1G-BT\160

Memo:

Sample Number: S24050708-007

Test Graph

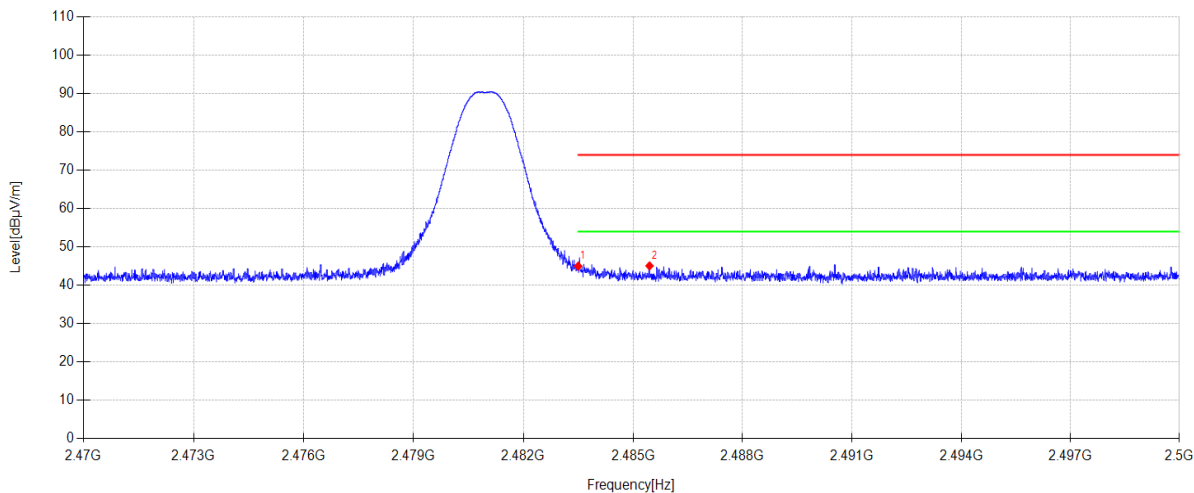

Data List										
N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2483.500	13.84	27.53	3.62	0.00	44.99	74.00	29.01	PK	Vertical
2	2485.453	13.90	27.54	3.62	0.00	45.06	74.00	28.94	PK	Vertical

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2024-08-05

Tested By:

Genliu

EUT:

Gaming Headset

Model Number:

CH351

Test Mode:

2DH5 ANT1 2480MHz TX

Power Supply:

Battery

Condition:

Temp:23.2°C;Humi:62.7%

Test Site:

DDT 3# Chamber


File Path:

d:\ts\2024 report data\Q24050708-2E\FCC ABOVE1G-BT\169

Memo:

Sample Number: S24050708-007

Test Graph

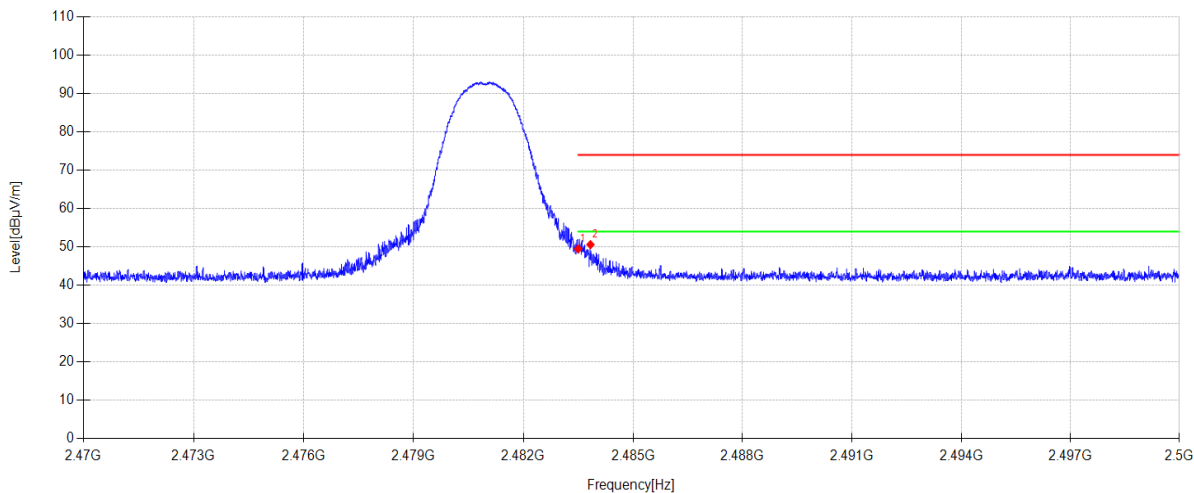

Data List										
N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2483.500	18.34	27.53	3.62	0.00	49.49	74.00	24.51	PK	Horizontal
2	2483.836	19.44	27.54	3.62	0.00	50.60	74.00	23.40	PK	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2024-08-05

Tested By:

Genliu

EUT:

Gaming Headset

Model Number:

CH351

Test Mode:

2DH5 ANT1 2480MHz TX

Power Supply:

Battery

Condition:

Temp:23.2°C;Humi:62.7%

Test Site:

DDT 3# Chamber


File Path:

d:\ts\2024 report data\Q24050708-2E\FCC ABOVE1G-BT\170

Memo:

Sample Number: S24050708-007

Test Graph

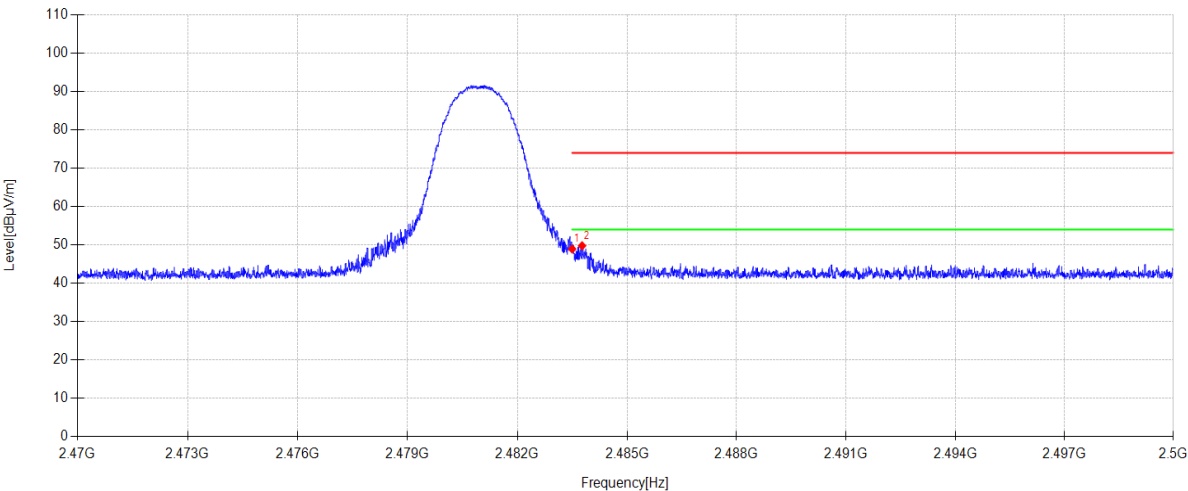

Data List										
N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2483.500	17.79	27.53	3.62	0.00	48.94	74.00	25.06	PK	Vertical
2	2483.770	18.62	27.54	3.62	0.00	49.78	74.00	24.22	PK	Vertical

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2024-08-05

Tested By:

Genliu

EUT:

Gaming Headset

Model Number:

CH351

Test Mode:

3DH5 ANT1 2480MHz TX

Power Supply:

Battery

Condition:

Temp:23.2°C;Humi:62.7%

Test Site:

DDT 3# Chamber


File Path:

d:\ts\2024 report data\Q24050708-2E\FCC ABOVE1G-BT\167

Memo:

Sample Number: S24050708-007

Test Graph

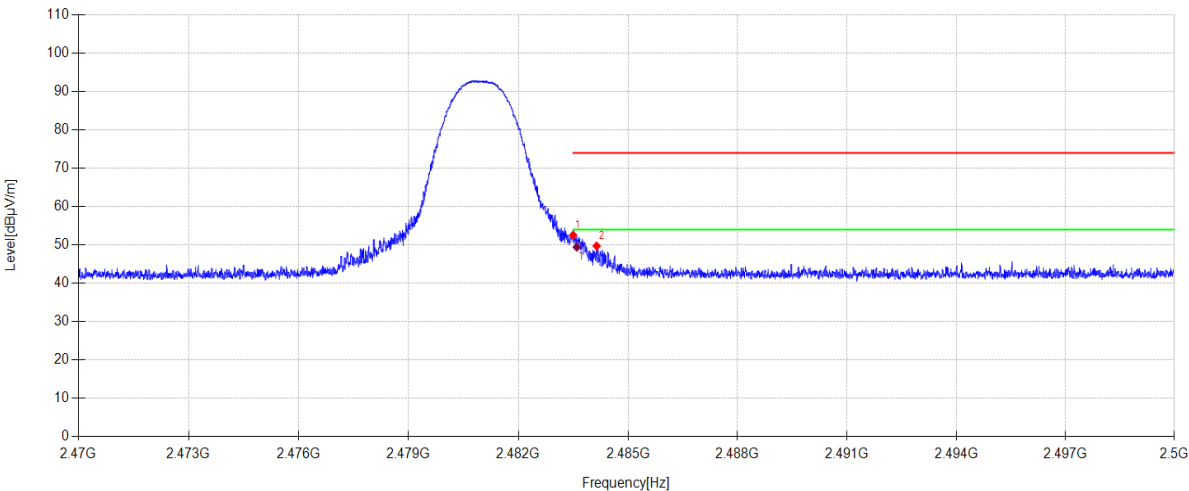

Data List										
N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2483.500	21.38	27.53	3.62	0.00	52.53	74.00	21.47	PK	Horizontal
2	2484.142	18.55	27.54	3.62	0.00	49.71	74.00	24.29	PK	Horizontal

Data List										
N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2483.599	17.01	27.53	3.62	0.00	49.43	54.0	4.57	AV	Horizontal

- Note:
1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2024-08-05

Tested By:

Genliu

EUT:

Gaming Headset

Model Number:

CH351

Test Mode:

3DH5 ANT1 2480MHz TX

Power Supply:

Battery

Condition:

Temp:23.2°C;Humi:62.7%

Test Site:

DDT 3# Chamber


File Path:

d:\ts\2024 report data\Q24050708-2E\FCC ABOVE1G-BT\168

Memo:

Sample Number: S24050708-007

Test Graph

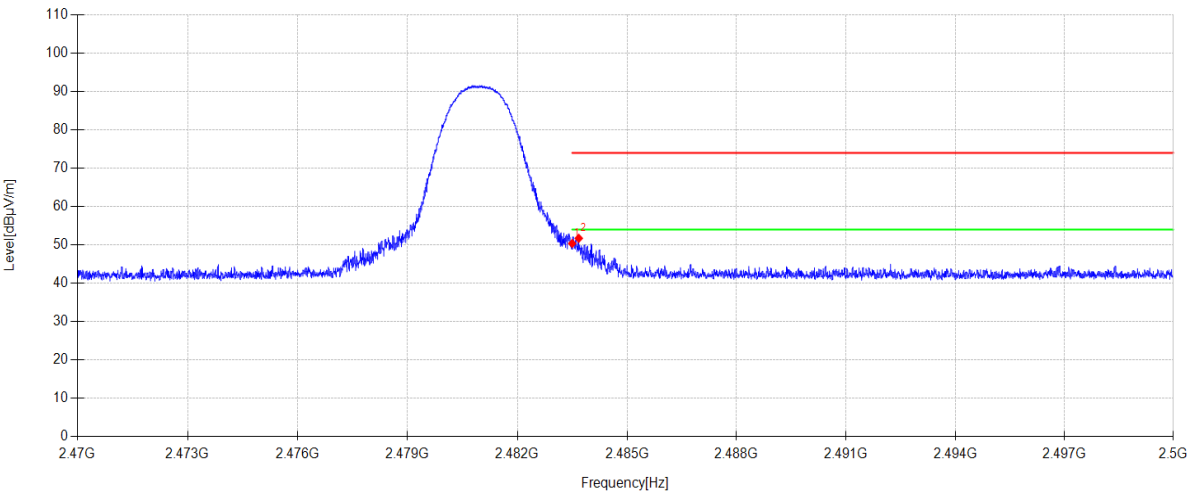

Data List										
N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2483.500	19.22	27.53	3.62	0.00	50.37	74.00	23.63	PK	Vertical
2	2483.680	20.58	27.53	3.62	0.00	51.73	74.00	22.27	PK	Vertical

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2024-08-07

Tested By:

Genliu

EUT:

Gaming Headset

Model Number:

CH351

Test Mode:

DH5 ANT2 2402MHz TX

Power Supply:

Battery

Condition:

Temp:23.2°C;Humi:62.7%

Test Site:

DDT 3# Chamber


File Path:

d:\ts\2024 report data\Q24050708-2E\FCC ABOVE1G-BT\231

Memo:

Sample Number: S24050708-007

Test Graph

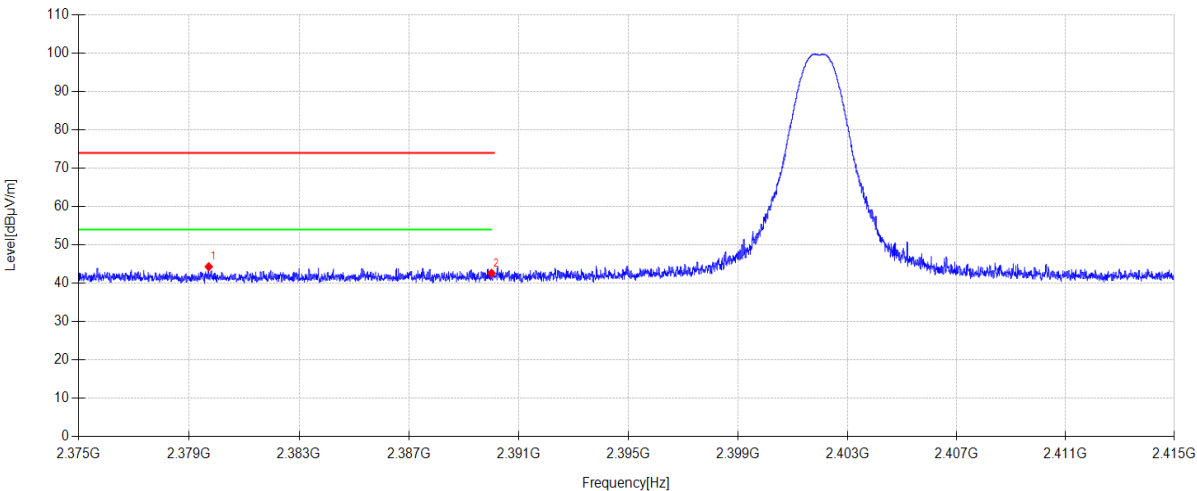

Data List										
N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2379.724	13.54	27.22	3.56	0.00	44.32	74.00	29.68	PK	Horizontal
2	2390.000	11.80	27.26	3.57	0.00	42.63	74.00	31.37	PK	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2024-08-07

Tested By:

Genliu

EUT:

Gaming Headset

Model Number:

CH351

Test Mode:

DH5 ANT2 2402MHz TX

Power Supply:

Battery

Condition:

Temp:23.2°C;Humi:62.7%

Test Site:

DDT 3# Chamber


File Path:

d:\ts\2024 report data\Q24050708-2E\FCC ABOVE1G-BT\232

Memo:

Sample Number: S24050708-007

Test Graph

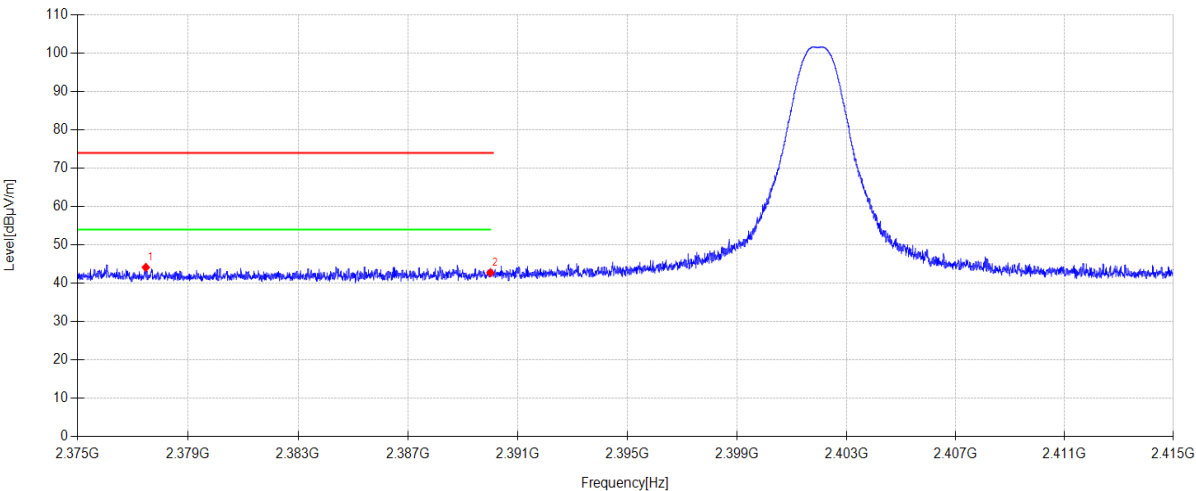

Data List										
N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2377.480	13.37	27.21	3.56	0.00	44.14	74.00	29.86	PK	Vertical
2	2390.000	11.93	27.26	3.57	0.00	42.76	74.00	31.24	PK	Vertical

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2024-08-07

Tested By:

Genliu

EUT:

Gaming Headset

Model Number:

CH351

Test Mode:

2DH5 ANT2 2402MHz TX

Power Supply:

Battery

Condition:

Temp:23.2°C;Humi:62.7%

Test Site:

DDT 3# Chamber


File Path:

d:\ts\2024 report data\Q24050708-2E\FCC ABOVE1G-BT\233

Memo:

Sample Number: S24050708-007

Test Graph

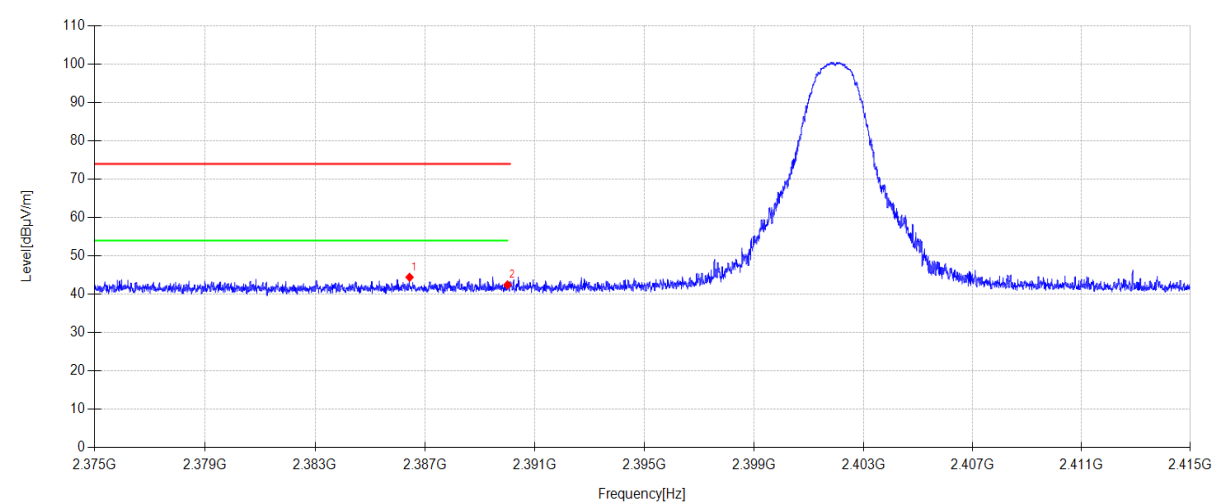

Data List										
N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2386.436	13.62	27.25	3.57	0.00	44.44	74.00	29.56	PK	Horizontal
2	2390.000	11.63	27.26	3.57	0.00	42.46	74.00	31.54	PK	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2024-08-07

Tested By:

Genliu

EUT:

Gaming Headset

Model Number:

CH351

Test Mode:

2DH5 ANT2 2402MHz TX

Power Supply:

Battery

Condition:

Temp:23.2°C;Humi:62.7%

Test Site:

DDT 3# Chamber


File Path:

d:\ts\2024 report data\Q24050708-2E\FCC ABOVE1G-BT\234

Memo:

Sample Number: S24050708-007

Test Graph

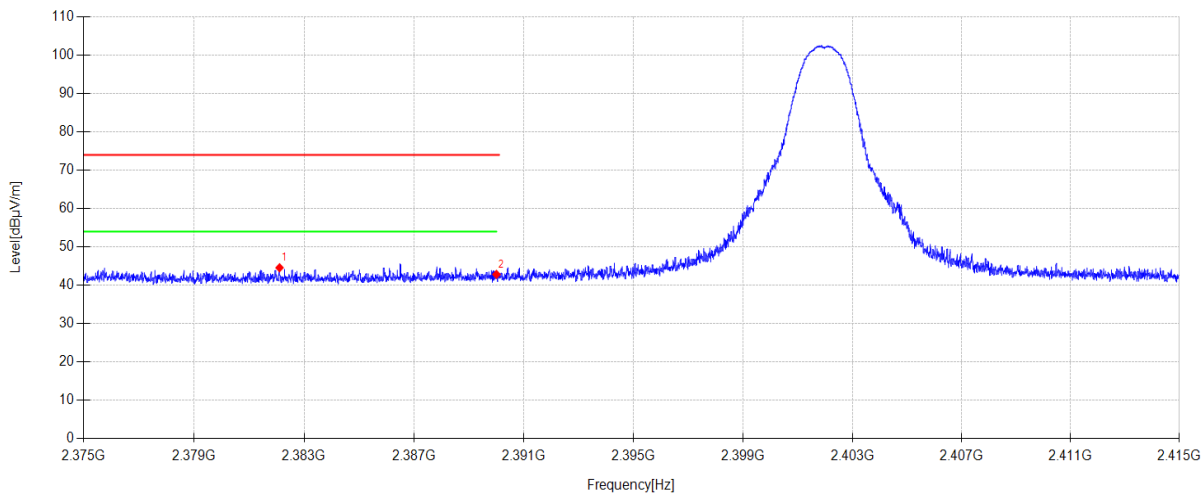

Data List										
N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2382.112	13.79	27.23	3.56	0.00	44.58	74.00	29.42	PK	Vertical
2	2390.000	12.01	27.26	3.57	0.00	42.84	74.00	31.16	PK	Vertical

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2024-08-07

Tested By:

Genliu

EUT:

Gaming Headset

Model Number:

CH351

Test Mode:

3DH5 ANT2 2402MHz TX

Power Supply:

Battery

Condition:

Temp:23.2°C;Humi:62.7%

Test Site:

DDT 3# Chamber


File Path:

d:\ts\2024 report data\Q24050708-2E\FCC ABOVE1G-BT\235

Memo:

Sample Number: S24050708-007

Test Graph

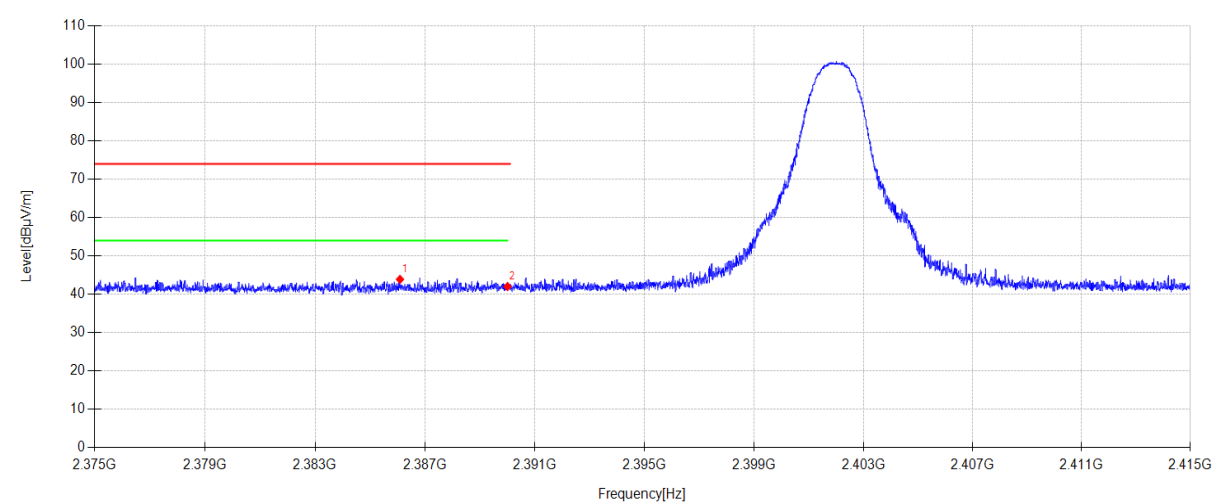

Data List										
N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2386.088	13.08	27.24	3.57	0.00	43.89	74.00	30.11	PK	Horizontal
2	2390.000	11.18	27.26	3.57	0.00	42.01	74.00	31.99	PK	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2024-08-07

Tested By:

Genliu

EUT:

Gaming Headset

Model Number:

CH351

Test Mode:

3DH5 ANT2 2402MHz TX

Power Supply:

Battery

Condition:

Temp:23.2°C;Humi:62.7%

Test Site:

DDT 3# Chamber


File Path:

d:\ts\2024 report data\Q24050708-2E\FCC ABOVE1G-BT\236

Memo:

Sample Number: S24050708-007

Test Graph

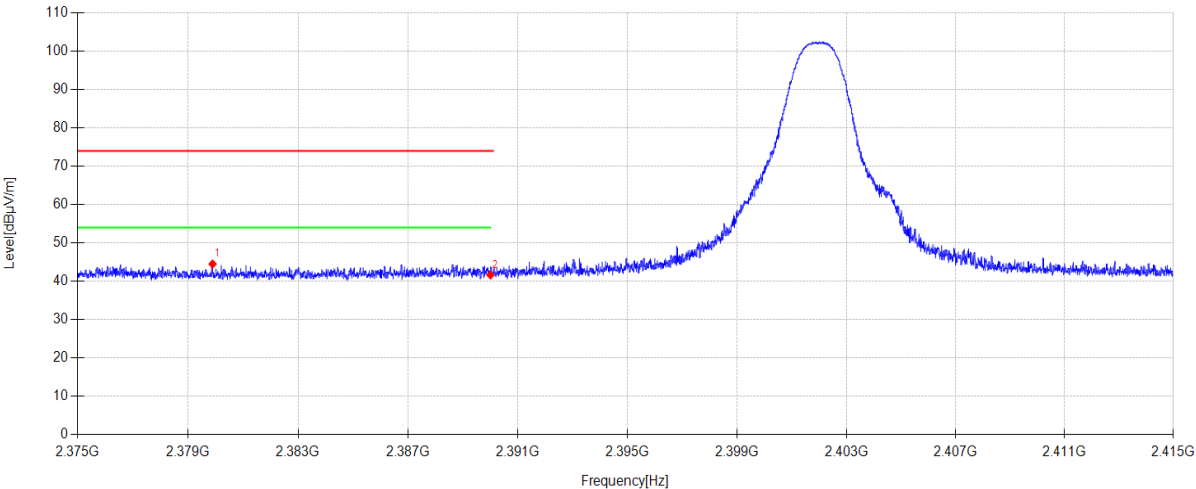

Data List										
N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2379.900	13.72	27.22	3.56	0.00	44.50	74.00	29.50	PK	Vertical
2	2390.000	10.82	27.26	3.57	0.00	41.65	74.00	32.35	PK	Vertical

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2024-08-07

Tested By:

Genliu

EUT:

Gaming Headset

Model Number:

CH351

Test Mode:

DH5 ANT2 2480MHz TX

Power Supply:

Battery

Condition:

Temp:23.2°C;Humi:62.7%

Test Site:

DDT 3# Chamber


File Path:

d:\ts\2024 report data\Q24050708-2E\FCC ABOVE1G-BT\241

Memo:

Sample Number: S24050708-007

Test Graph

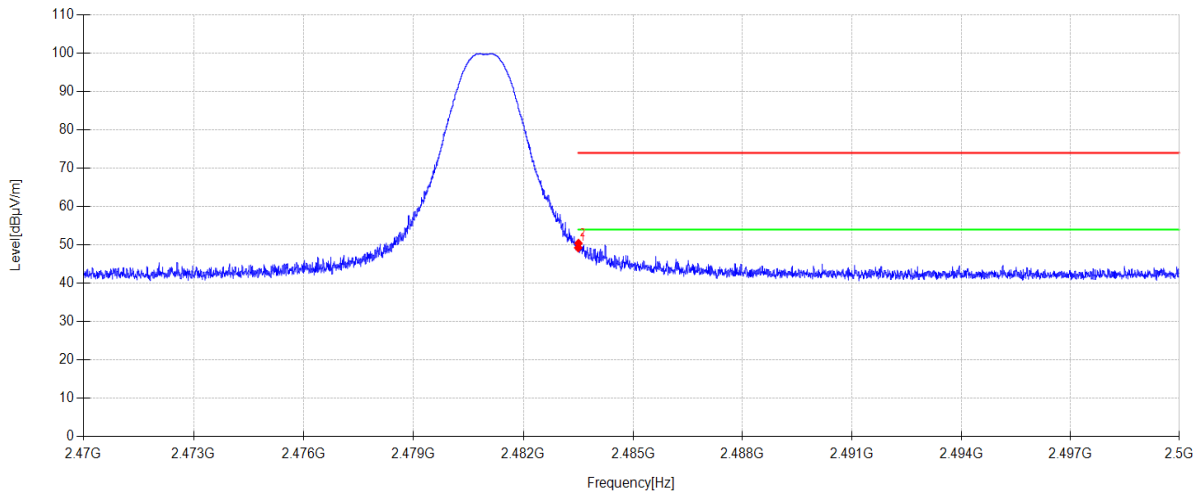

Data List										
N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2483.500	18.11	27.53	3.62	0.00	49.26	74.00	24.74	PK	Horizontal
2	2483.509	19.28	27.53	3.62	0.00	50.43	74.00	23.57	PK	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2024-08-07

Tested By:

Genliu

EUT:

Gaming Headset

Model Number:

CH351

Test Mode:

DH5 ANT2 2480MHz TX

Power Supply:

Battery

Condition:

Temp:23.2°C;Humi:62.7%

Test Site:

DDT 3# Chamber


File Path:

d:\ts\2024 report data\Q24050708-2E\FCC ABOVE1G-BT\242

Memo:

Sample Number: S24050708-007

Test Graph

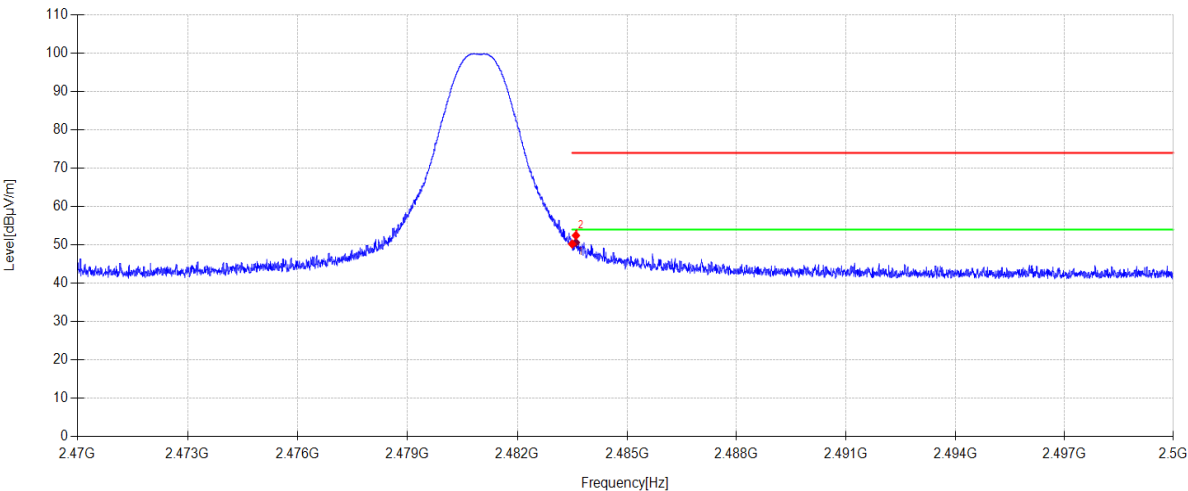

Data List										
N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2483.500	19.10	27.53	3.62	0.00	50.25	74.00	23.75	PK	Vertical
2	2483.602	21.31	27.53	3.62	0.00	52.46	74.00	21.54	PK	Vertical

Data List										
N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2483.602	19.46	27.53	3.62	0.00	50.61	54.0	3.39	AV	Vertical

- Note:
1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2024-08-07

Tested By:

Genliu

EUT:

Gaming Headset

Model Number:

CH351

Test Mode:

2DH5 ANT2 2480MHz TX

Power Supply:

Battery

Condition:

Temp:23.2°C;Humi:62.7%

Test Site:

DDT 3# Chamber


File Path:

d:\ts\2024 report data\Q24050708-2E\FCC ABOVE1G-BT\239

Memo:

Sample Number: S24050708-007

Test Graph

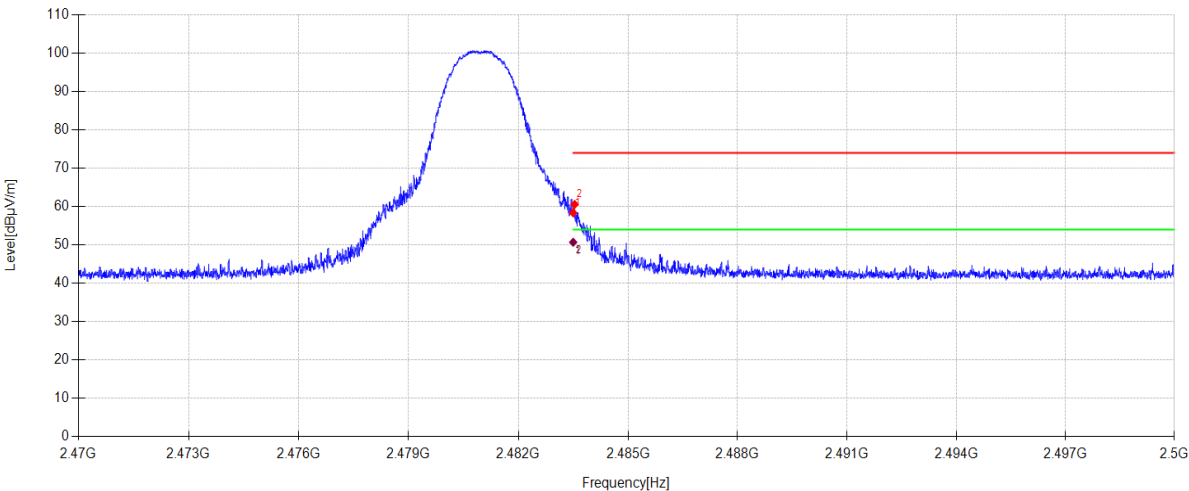

Data List										
N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2483.500	27.22	27.53	3.62	0.00	58.37	74.00	15.63	PK	Horizontal
2	2483.539	29.41	27.53	3.62	0.00	60.56	74.00	13.44	PK	Horizontal

Data List										
N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2483.500	19.54	27.53	3.62	0.00	50.69	54.0	3.31	AV	Horizontal
2	2483.521	18.48	27.53	3.62	0.00	50.90	54.0	3.10	AV	Horizontal

- Note:
1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2024-08-07

Tested By:

Genliu

EUT:

Gaming Headset

Model Number:

CH351

Test Mode:

2DH5 ANT2 2480MHz TX

Power Supply:

Battery

Condition:

Temp:23.2°C;Humi:62.7%

Test Site:

DDT 3# Chamber


File Path:

d:\ts\2024 report data\Q24050708-2E\FCC ABOVE1G-BT\240

Memo:

Sample Number: S24050708-007

Test Graph

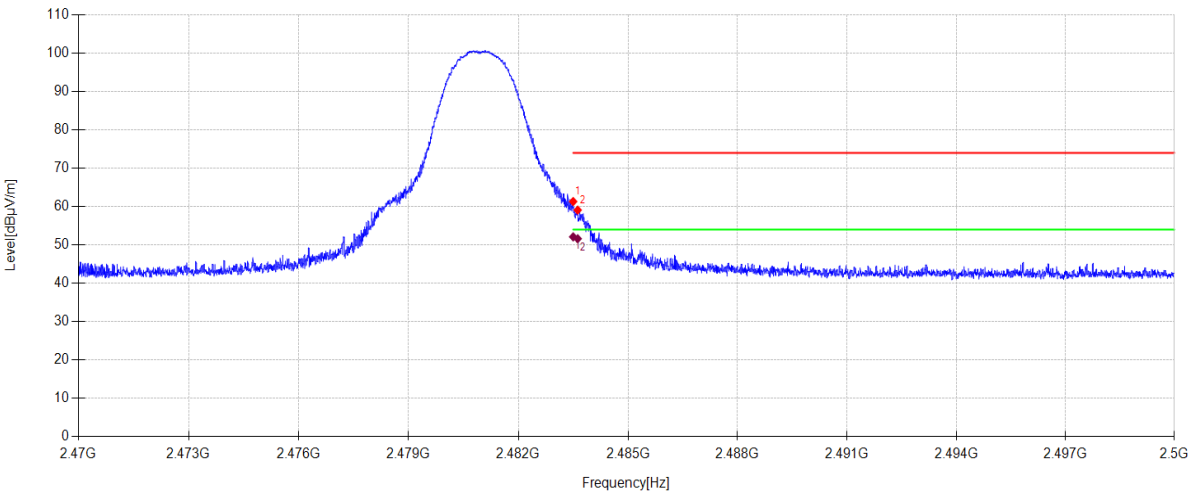

Data List										
N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2483.500	30.16	27.53	3.62	0.00	61.31	74.00	12.69	PK	Vertical
2	2483.623	27.93	27.53	3.62	0.00	59.08	74.00	14.92	PK	Vertical

Data List										
N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2483.500	20.95	27.53	3.62	0.00	52.10	54.0	1.90	AV	Vertical
2	2483.623	19.20	27.53	3.62	0.00	51.62	54.0	2.38	AV	Vertical

- Note:
1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2024-08-07

Tested By:

Genliu

EUT:

Gaming Headset

Model Number:

CH351

Test Mode:

3DH5 ANT2 2480MHz TX

Power Supply:

Battery

Condition:

Temp:23.2°C;Humi:62.7%

Test Site:

DDT 3# Chamber


File Path:

d:\ts\2024 report data\Q24050708-2E\FCC ABOVE1G-BT\237

Memo:

Sample Number: S24050708-007

Test Graph

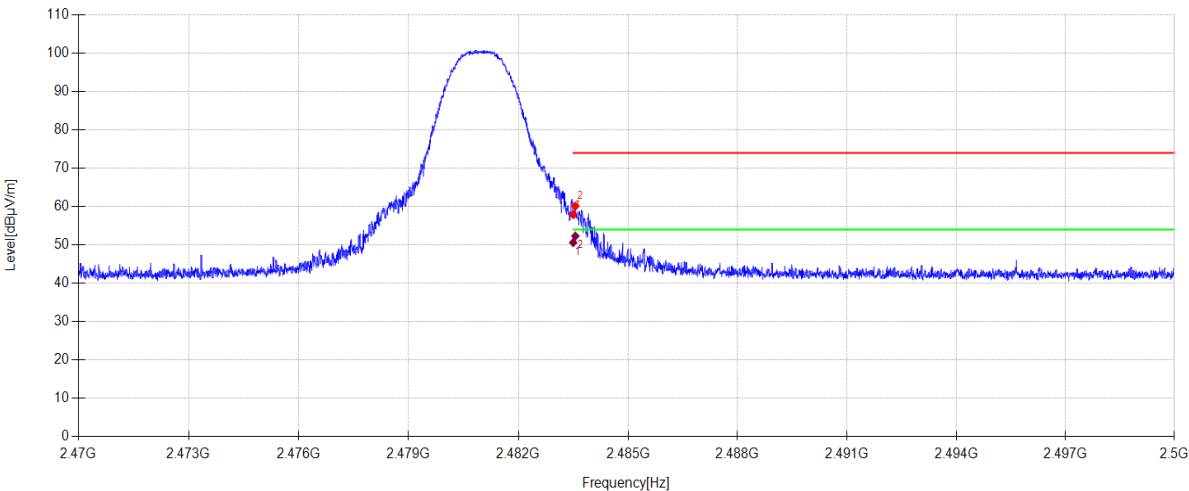

Data List										
N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2483.500	26.74	27.53	3.62	0.00	57.89	74.00	16.11	PK	Horizontal
2	2483.560	28.95	27.53	3.62	0.00	60.10	74.00	13.90	PK	Horizontal

Data List										
N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2483.500	19.45	27.53	3.62	0.00	50.60	54.0	3.40	AV	Horizontal
2	2483.560	19.89	27.53	3.62	0.00	52.31	54.0	1.69	AV	Horizontal

- Note:
1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2024-08-07

Tested By:

Genliu

EUT:

Gaming Headset

Model Number:

CH351

Test Mode:

3DH5 ANT2 2480MHz TX

Power Supply:

Battery

Condition:

Temp:23.2°C;Humi:62.7%

Test Site:

DDT 3# Chamber


File Path:

d:\ts\2024 report data\Q24050708-2E\FCC ABOVE1G-BT\238

Memo:

Sample Number: S24050708-007

Test Graph

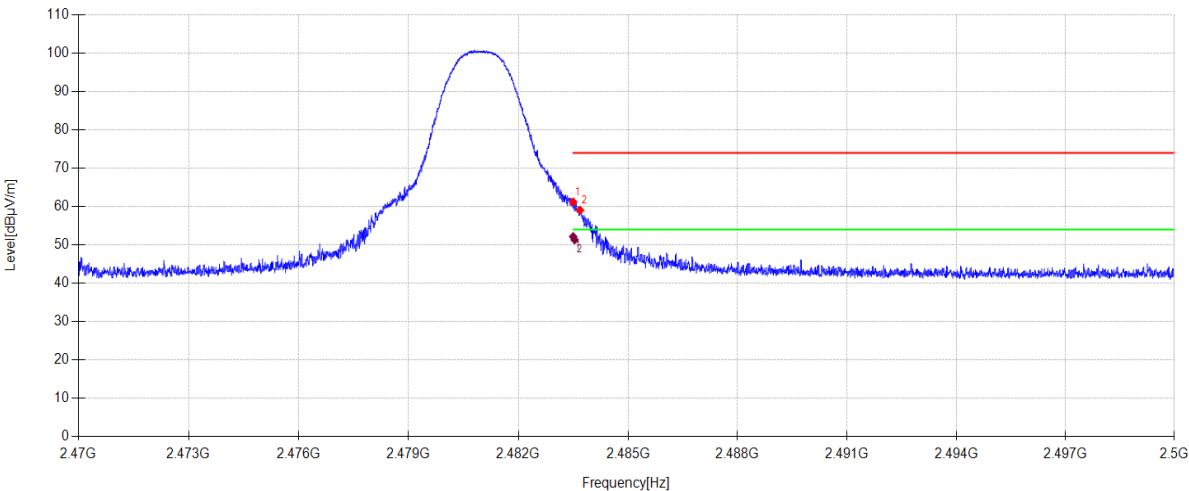

Data List										
N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2483.500	30.06	27.53	3.62	0.00	61.21	74.00	12.79	PK	Vertical
2	2483.689	27.90	27.53	3.62	0.00	59.05	74.00	14.95	PK	Vertical

Data List										
N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2483.500	21.01	27.53	3.62	0.00	52.16	54.0	1.84	AV	Vertical
2	2483.539	18.91	27.53	4.89	0.00	51.33	54.0	2.67	AV	Vertical

- Note:
1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.


3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

15. Power Line Conducted Emissions

15.1. Test equipment

Equipment	Manufacturer	Model No.	Serial No.	Cal Due To
Two Line V-Network	R&S	ENV216	DDT-ZC00535	2025/07/08
EMI Test Receiver	R&S	ESCI	DDT-ZC00235	2025/07/08
Pulse Limiter	SCHWARZBEC K	ESH3-Z2	DDT-ZC00539	2025/07/08
Artificial mains	R&S	ESH2-Z5	DDT-ZC00538	2025/07/08
EMI Test Software	Audix/TW	e3	DDT-ZC01252	/
CE Cable 1	R&S	ESU8/RF2	DDT-ZC00566	2025/07/08

15.2. Block diagram of test setup

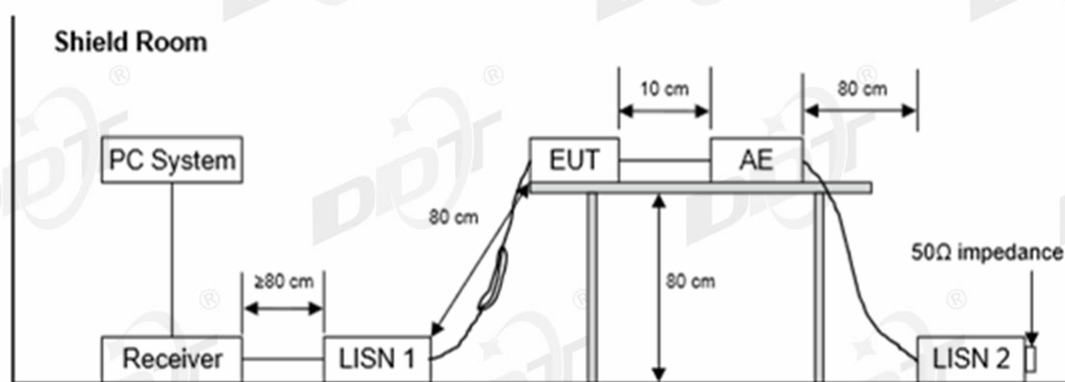

15.3. Limits

Frequency	Quasi-Peak Level dB(mV)	Average Level dB(mV)
150 kHz~500 kHz	66 ~ 56*	56 ~ 46*
500 kHz~5 MHz	56	46
5 MHz~30 MHz	60	50

Note 1: * Decreasing linearly with logarithm of frequency.

Note 2: The lower limit shall apply at the transition frequencies.

15.4. Assistant equipment used for test

Assistant equipment	Manufacturer	Model number	Description	other
Adapter	HUAWEI	HW-100400C01	Huawei Fast Charge 2 #	Input: 100-240V~ 50/60Hz, Output: 5V/2A or 9V/2A or 10V/4A MAX

15.5. Test procedure

The EUT and Support equipment, if needed, were put placed on a non-metallic table, 80cm above the ground plane.

All support equipment power received from a second LISN.

Emissions were measured on each current carrying line of the EUT using an EMI Test Receiver connected to the LISN powering the EUT.

The Receiver scanned from 150 kHz to 30 MHz for emissions in each of the test modes.

During the above scans, the emissions were maximized by cable manipulation.

The test mode(s) described in clause 2.4 were scanned during the preliminary test.

After the preliminary scan, we found the test mode producing the highest emission level.

The EUT configuration and worse cable configuration of the above highest emission levels were recorded for reference of the final test.

EUT and support equipment were set up on the test bench as per the configuration with highest emission level in the preliminary test.

A scan was taken on both power lines, Neutral and Line, recording at least the six highest emissions.

Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit.

The test data of the worst-case condition(s) was recorded.

The bandwidth of test receiver is set at 9 kHz.

15.6. Test result

PASS. (See below detailed test result)

Note1: All emissions not reported below are too low against the prescribed limits.

Note2: “---” means Peak detection; “---” means Average detection.


Note3: Pre-test AC conducted emission at both voltage AC 120V/60Hz and AC 240V/50Hz, recorded the worst case.

15.7. Test data

TR-4-E-010 Conducted Emission Test Result

Test Site : DDT 1# Shield Room **D:\2024 CE report data\Q24050708-2E\FCC-CE.EM6**
Test Date : 2024-08-07 **Tested By** : Gen Liu
EUT : Gaming Headset **Model Number** : CH351
Power Supply : AC 120V/60Hz **Test Mode** : Tx mode
Condition : Temp:22.1°C,Humi:66.0% **LISN** : 2023 1# ENV216/LINE
Memo : Sample Number: S24050708-007

Data: 18

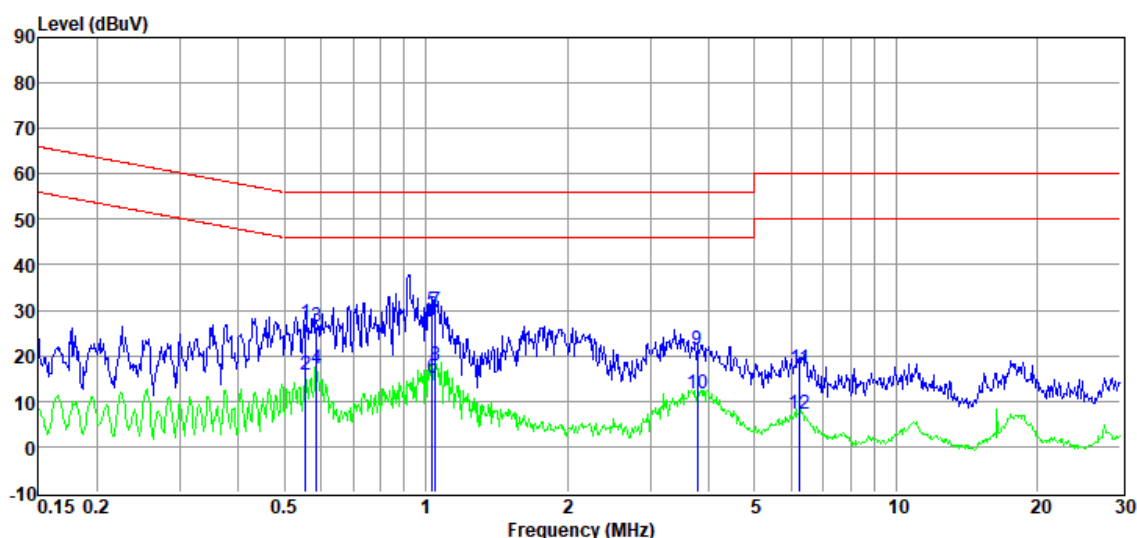

Item	Freq.	Read Level	LISN Factor	Cable Loss	Pulse Limiter Factor	Result Level	Limit Line	Over Limit	Detector	Phase
(Mark)	(MHz)	(dBμV)	(dB)	(dB)	(dB)	(dBμV)	(dBμV)	(dB)		
1	0.56	6.92	9.80	0.84	9.71	27.27	56.00	-28.73	QP	LINE
2	0.56	-4.49	9.80	0.84	9.71	15.86	46.00	-30.14	Average	LINE
3	0.59	6.21	9.79	0.83	9.72	26.55	56.00	-29.45	QP	LINE
4	0.59	-3.10	9.79	0.83	9.72	17.24	46.00	-28.76	Average	LINE
5	1.03	9.77	9.64	0.67	9.73	29.81	56.00	-26.19	QP	LINE
6	1.03	-4.99	9.64	0.67	9.73	15.05	46.00	-30.95	Average	LINE
7	1.05	9.82	9.65	0.67	9.73	29.87	56.00	-26.13	QP	LINE
8	1.05	-2.17	9.65	0.67	9.73	17.88	46.00	-28.12	Average	LINE
9	3.78	1.37	9.65	0.57	9.78	21.37	56.00	-34.63	QP	LINE
10	3.78	-8.27	9.65	0.57	9.78	11.73	46.00	-34.27	Average	LINE
11	6.25	-2.86	9.69	0.47	9.80	17.10	60.00	-42.90	QP	LINE
12	6.25	-12.82	9.69	0.47	9.80	7.14	50.00	-42.86	Average	LINE


Note:

1. Result Level = Read Level + LISN Factor + Pulse Limiter Factor + Cable loss.
2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 200 Hz (9 kHz—150 kHz), 9 kHz (150 kHz—30 MHz).
4. Step size: 80Hz (0.009MHz-0.15MHz), 4 kHz (0.15MHz-30MHz), Scan time: auto.

TR-4-E-010 Conducted Emission Test Result

Test Site : DDT 1# Shield Room **D:\2024 CE report data\Q24050708-2E\FCC-CE.EM6**
Test Date : 2024-08-07 **Tested By** : Gen Liu
EUT : Gaming Headset **Model Number** : CH351
Power Supply : AC 120V/60Hz **Test Mode** : Tx mode
Condition : Temp:22.1°C,Humi:66.0% **LISN** : 2023 1# ENV216/NEUTRAL
Memo : Sample Number: S24050708-007

Data: 20

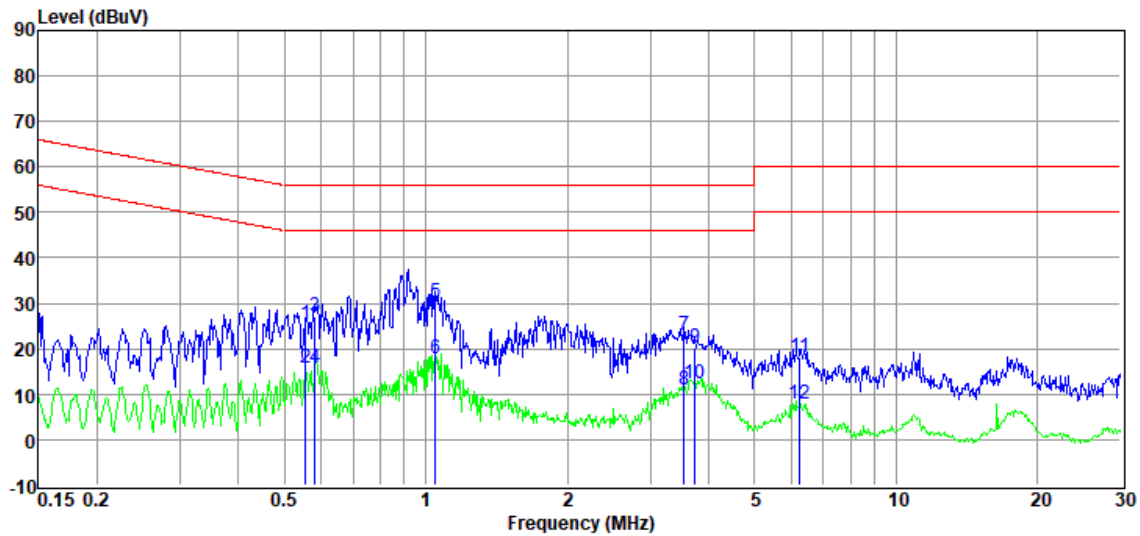

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	LISN Factor (dB)	Cable Loss (dB)	Pulse Limiter Factor (dB)	Result Level (dBμV)	Limit Line (dBμV)	Over Limit (dB)	Detector	Phase
1	0.56	4.87	9.81	0.84	9.71	25.23	56.00	-30.77	QP	NEUTRAL
2	0.56	-4.57	9.81	0.84	9.71	15.79	46.00	-30.21	Average	NEUTRAL
3	0.58	6.84	9.82	0.83	9.72	27.21	56.00	-28.79	QP	NEUTRAL
4	0.58	-4.68	9.82	0.83	9.72	15.69	46.00	-30.31	Average	NEUTRAL
5	1.05	10.01	9.75	0.67	9.73	30.16	56.00	-25.84	QP	NEUTRAL
6	1.05	-2.20	9.75	0.67	9.73	17.95	46.00	-28.05	Average	NEUTRAL
7	3.55	2.89	9.73	0.57	9.78	22.97	56.00	-33.03	QP	NEUTRAL
8	3.55	-9.29	9.73	0.57	9.78	10.79	46.00	-35.21	Average	NEUTRAL
9	3.74	0.02	9.74	0.57	9.78	20.11	56.00	-35.89	QP	NEUTRAL
10	3.74	-7.87	9.74	0.57	9.78	12.22	46.00	-33.78	Average	NEUTRAL
11	6.25	-1.88	9.79	0.47	9.80	18.18	60.00	-41.82	QP	NEUTRAL
12	6.25	-12.36	9.79	0.47	9.80	7.70	50.00	-42.30	Average	NEUTRAL

Note:

1. Result Level = Read Level + LISN Factor + Pulse Limiter Factor + Cable loss.
2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 200 Hz (9 kHz—150 kHz), 9 kHz (150 kHz—30 MHz).
4. Step size: 80Hz (0.009MHz-0.15MHz), 4 kHz (0.15MHz-30MHz), Scan time: auto.

17. Photos of the EUT

Please refer to DDT-Q24050708-1E appendix I

-----End Report-----