

#01_WLAN2.4GHz_802.11b 1Mbps_Bottom of Laptop_0mm_Ch6;Ant 1

Communication System: 802.11b; Frequency: 2437 MHz; Duty Cycle: 1:1

Medium: HSL_2450_210126 Medium parameters used : $f = 2437$ MHz; $\sigma = 1.796$ S/m; $\epsilon_r = 38.85$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7346; ConvF(7.66, 7.66, 7.66) @ 2437 MHz; Calibrated: 2020/5/20
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn853; Calibrated: 2020/7/23
- Phantom: ELI v4.0_Mid; Type: QDOVA001AA; Serial: TP:1131
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Area Scan (61x61x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 1.20 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 21.24 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 1.79 W/kg

SAR(1 g) = 0.629 W/kg; SAR(10 g) = 0.258 W/kg

Maximum value of SAR (measured) = 1.25 W/kg

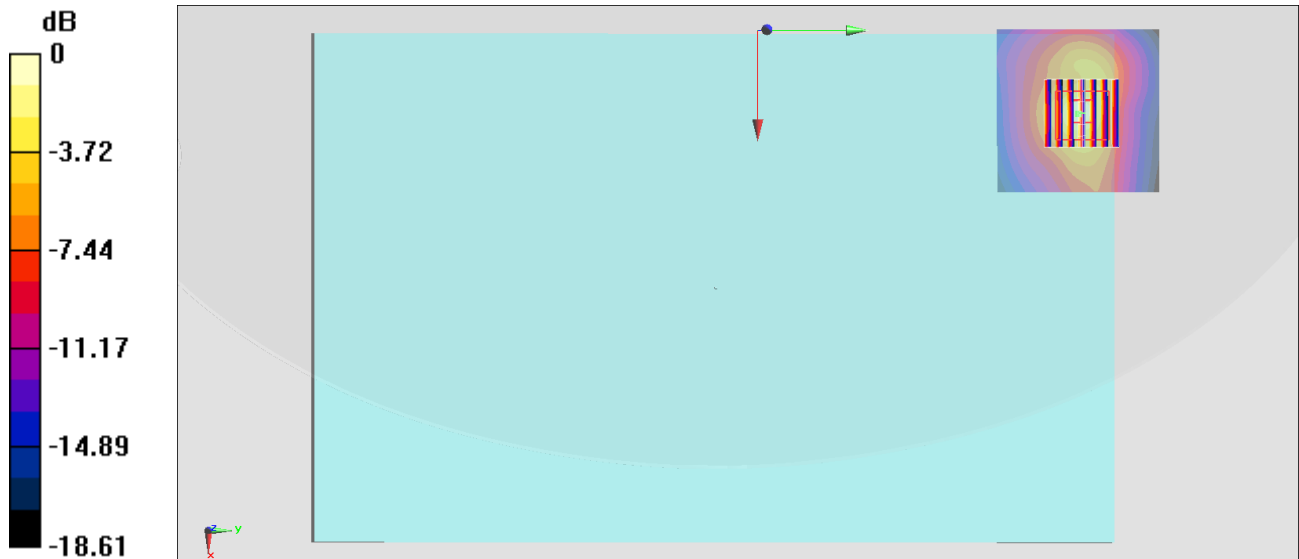

0 dB = 1.20 W/kg = 0.79 dBW/kg

#02_WLAN5GHz_802.11ac-VHT160 MCS0_Bottom of Laptop_0mm_Ch50;Ant 1

Communication System: 802.11ac; Frequency: 5250 MHz; Duty Cycle: 1:1.013

Medium: HSL_5G_210126 Medium parameters used : $f = 5250$ MHz; $\sigma = 4.721$ S/m; $\epsilon_r = 35.714$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7346; ConvF(5.38, 5.38, 5.38) @ 5250 MHz; Calibrated: 2020/5/20
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn853; Calibrated: 2020/7/23
- Phantom: ELI v5.0_Left; Type: QDOVA002AA; Serial: TP:1238
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Area Scan (81x81x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 1.59 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 15.29 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 2.51 W/kg

SAR(1 g) = 0.574 W/kg; SAR(10 g) = 0.157 W/kg

Maximum value of SAR (measured) = 1.46 W/kg

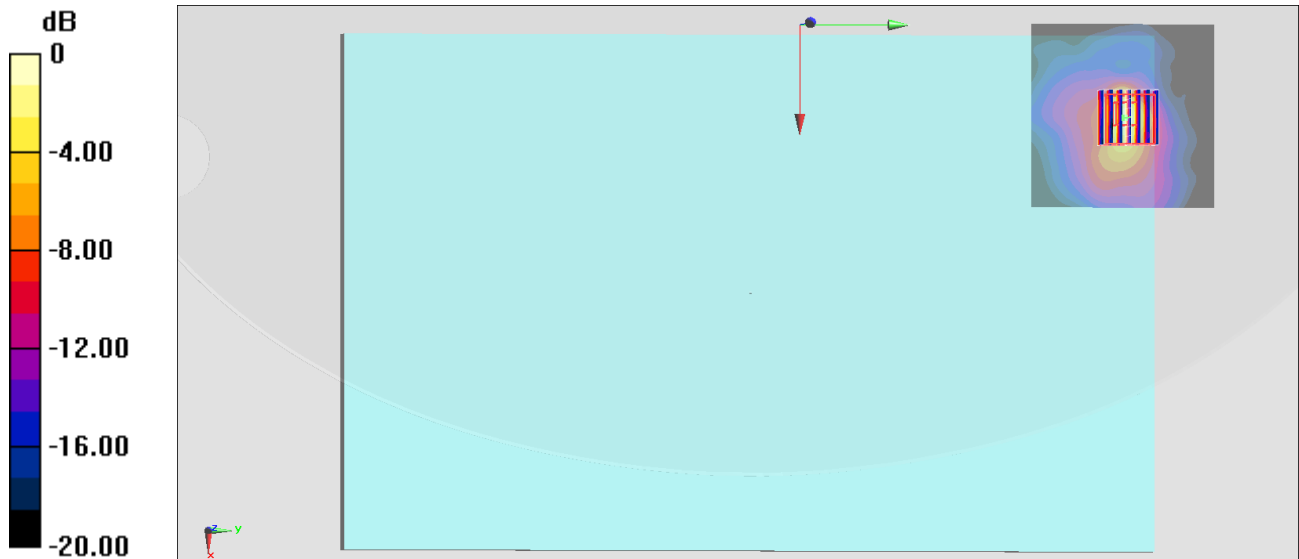

0 dB = 1.59 W/kg = 2.01 dBW/kg

#03_WLAN5GHz_802.11ac-VHT160 MCS0_Bottom of Laptop_0mm_Ch114;Ant 1

Communication System: 802.11ac; Frequency: 5570 MHz; Duty Cycle: 1:1.013

Medium: HSL_5G_210126 Medium parameters used : $f = 5570$ MHz; $\sigma = 5.031$ S/m; $\epsilon_r = 35.313$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7346; ConvF(4.79, 4.79, 4.79) @ 5570 MHz; Calibrated: 2020/5/20
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn853; Calibrated: 2020/7/23
- Phantom: ELI v5.0_Left; Type: QDOVA002AA; Serial: TP:1238
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Area Scan (81x81x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 1.66 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 14.40 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 2.75 W/kg

SAR(1 g) = 0.624 W/kg; SAR(10 g) = 0.179 W/kg

Maximum value of SAR (measured) = 1.60 W/kg

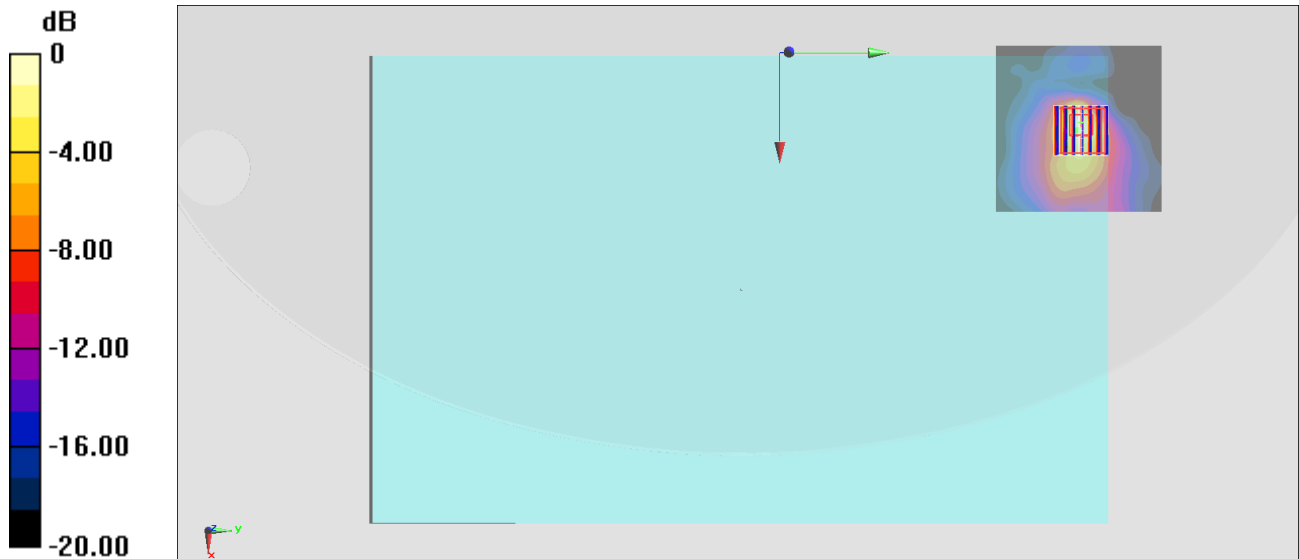

#04_WLAN5GHz_802.11ac-VHT80 MCS0_Bottom of Laptop_0mm_Ch155;Ant 1

Communication System: 802.11ac; Frequency: 5775 MHz; Duty Cycle: 1:1.013

Medium: HSL_5G_210126 Medium parameters used: $f = 5775$ MHz; $\sigma = 5.241$ S/m; $\epsilon_r = 35.048$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7346; ConvF(4.84, 4.84, 4.84) @ 5775 MHz; Calibrated: 2020/5/20
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn853; Calibrated: 2020/7/23
- Phantom: ELI v5.0_Left; Type: QDOVA002AA; Serial: TP:1238
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Area Scan (81x81x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 1.28 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 13.24 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 2.34 W/kg

SAR(1 g) = 0.474 W/kg; SAR(10 g) = 0.150 W/kg

Maximum value of SAR (measured) = 1.21 W/kg

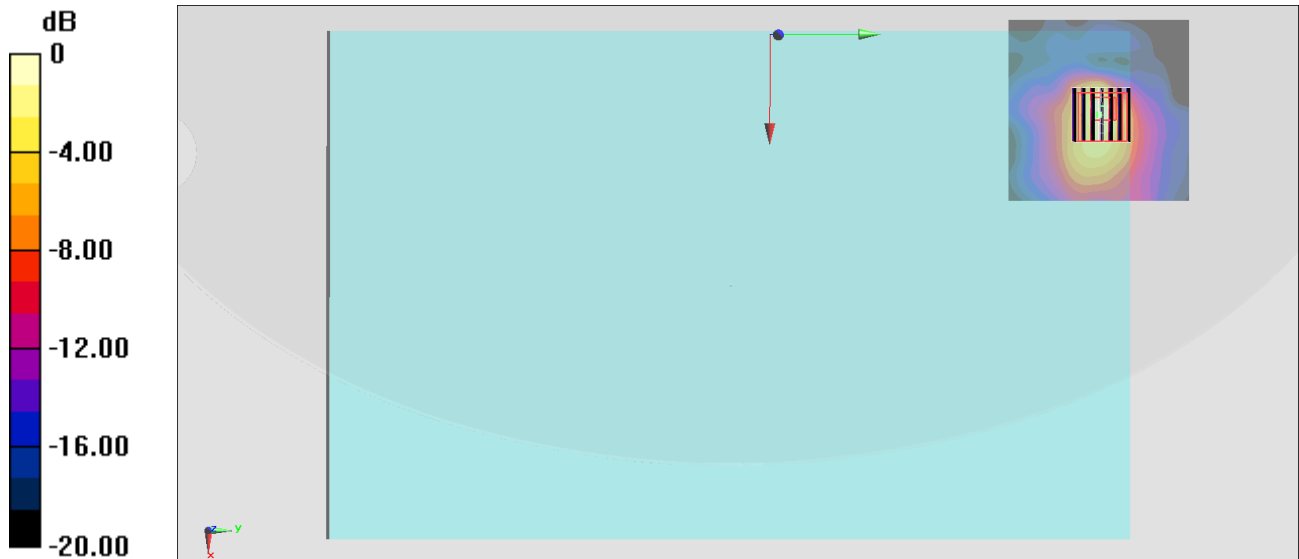

0 dB = 1.28 W/kg = 1.07 dBW/kg

#05_Bluetooth_1Mbps_Bottom of Laptop_0mm_Ch39;Ant 2

Communication System: Bluetooth; Frequency: 2441 MHz; Duty Cycle: 1:1.302

Medium: HSL_2450_210126 Medium parameters used : $f = 2441$ MHz; $\sigma = 1.8$ S/m; $\epsilon_r = 38.833$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7346; ConvF(7.66, 7.66, 7.66) @ 2441 MHz; Calibrated: 2020/5/20
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn853; Calibrated: 2020/7/23
- Phantom: ELI v4.0_Mid; Type: QDOVA001AA; Serial: TP:1131
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Area Scan (61x61x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.187 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 11.87 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 0.362 W/kg

SAR(1 g) = 0.126 W/kg; SAR(10 g) = 0.051 W/kg

Maximum value of SAR (measured) = 0.248 W/kg

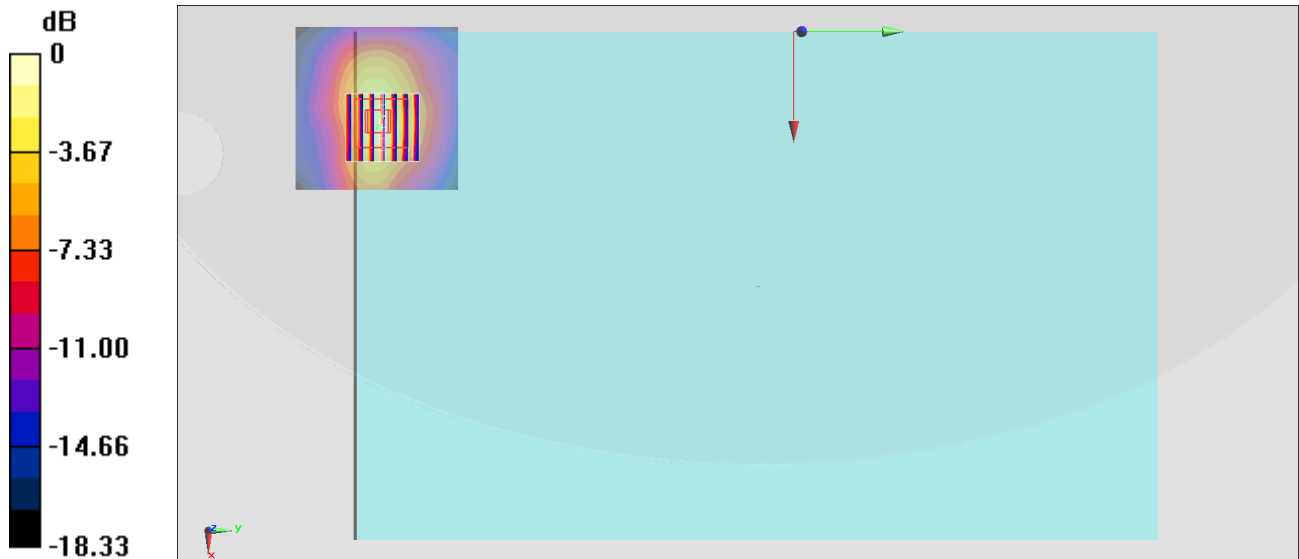

0 dB = 0.187 W/kg = -7.28 dBW/kg