



849 NW State Road 45  
Newberry, FL 32669 USA  
Ph: 888.472.2424 or  
352.472.5500  
Fax: 352.472.2030  
Email: [info@timcoengr.com](mailto:info@timcoengr.com)  
Website: [www.timcoengr.com](http://www.timcoengr.com)

## FCC PART 15.249 TEST REPORT UNLICENSED INTENTIONAL RADIATOR

<b>Applicant</b>	COBRA ELECTRONICS CORPORATION
<b>Address</b>	6500 WEST CORTLAND STREET
	CHICAGO IL 60707 USA
<b>FCC ID</b>	BBODSP9200
<b>Model Number</b>	DSP 9200BT
<b>Product Description</b>	RADAR DETECTOR WITH BLUETOOTH
<b>Date Sample Received</b>	4/6/2015
<b>Date Tested</b>	4/23/2015
<b>Tested By</b>	Sid Sanders
<b>Approved By</b>	Cory Leverett
<b>Test Results</b>	<input checked="" type="checkbox"/> PASS <input type="checkbox"/> FAIL

Report Number	Version Number	Description	Issue Date
644AUT15TestReport.docx	Rev.1	Initial Issue	4/23/2015
644AUT15TestReport.docx	Rev.2	Corrected FCC ID	5/13/2015

**THE ATTACHED REPORT SHALL NOT BE REPRODUCED EXCEPT IN FULL  
WITHOUT THE WRITTEN APPROVAL OF TIMCO ENGINEERING, INC.**

## TABLE OF CONTENTS

GENERAL REMARKS .....	2
GENERAL INFORMATION.....	3
TEST RESULTS SUMMARY .....	3
RADIATION INTERFERENCE.....	4
OCCUPIED BANDWIDTH & Bandedge: .....	6
EMC EQUIPMENT LIST .....	7

## GENERAL REMARKS

The attached report shall not be reproduced except in full without the written permission of Timco Engineering Inc.

## Summary

The device under test does:

- ☒ fulfill the general approval requirements as identified in this test report  
☐ not fulfill the general approval requirements as identified in this test report

## Attestations

This equipment has been tested in accordance with the standards identified in this test report. To the best of my knowledge and belief, these tests were performed using the measurement procedures described in this report.

All instrumentation and accessories used to test products for compliance to the indicated standards are calibrated regularly in accordance with ISO 17025: 2005 requirements.

I attest that the necessary measurements were made, under my supervision, at:

Timco Engineering Inc.  
849 NW State Road 45  
Newberry, FL 32669

## Authorized Signatory Name:



**Sid Sanders**  
**Project Manager**

**Date: 4/27/2015**

[Table of Contents](#)

APPLICANT: COBRA ELECTRONICS CORPORATION  
FCC ID: BBODSP9200  
REPORT: C:\COBRA\644AUT15\644AUT15TestReport.docx

## GENERAL INFORMATION

### EUT Specification

The test results relate only to the items tested.			
<b>EUT Description</b>	Bluetooth in radar detector		
<b>FCC ID</b>	BBODSP9200		
<b>Model Number</b>	DSP 9200BT		
<b>Operating Frequency</b>	TX: 2400-2483.2MHz	RX: Same	
<b>No. of Channels</b>		<b>Modulations</b>	
<b>EUT Power Source</b>	<input type="checkbox"/> 110–120Vac/50– 60Hz		
	<input checked="" type="checkbox"/> DC Power		
	<input type="checkbox"/> Battery Operated Exclusively		
<b>Test Item</b>	<input checked="" type="checkbox"/> Prototype	<input type="checkbox"/> Pre-Production	<input type="checkbox"/> Production
<b>Type of Equipment</b>	<input type="checkbox"/> Fixed	<input checked="" type="checkbox"/> Mobile	<input type="checkbox"/> Portable
<b>Antenna Connector</b>	NA		
<b>Test Facility</b>	Timco Engineering Inc. located at 849 NW State Road 45 Newberry, FL 32669 USA.		
<b>Conditions in the Test laboratory</b>	Temperature: 26°C Relative humidity: 50%		
<b>Test Exercise</b>	The EUT was placed in continuous transmit mode of operation at 3 places in the band.		
<b>Applicable Standard</b>	Part 15.249		
<b>Method of Measurement</b>	ANSI C63.4 2003		

### Test Supporting Equipment

Supporting Device	Manufacturer	Model / FCC ID	Serial Number
N/A			

### TEST RESULTS SUMMARY

Specification – Rules Part No.	RESULTS – Pass/Fail/NA
FCC Rule 15.249 Fundamental	PASS
FCC Rule 15.249 Harmonics & Spurious	PASS
Bandedge	PASS
Power Line Emissions 15.207	NA

[Table of Contents](#)

## RADIATION INTERFERENCE

**Rules Part No.:** 15.249, 15.209

### Requirements:

Frequency	Limits
Part 15.209	
9 to 490 kHz	2400/F (kHz) $\mu$ V/m @ 300 meters
490 to 1705 kHz	24000/F (kHz) $\mu$ V/m @ 30 meters
1705 kHz to 30 MHz	29.54 dB $\mu$ V/m @ 30 meters
30 – 88	40.0 dB $\mu$ V/m @ 3 meters
80 – 216	43.5 dB $\mu$ V/m @ 3 meters
216 – 960	46.0 dB $\mu$ V/m @ 3 meters
Above 960	54.0 dB $\mu$ V/m @ 3 meters
Part 15.249	
Fundamental 902 – 928 MHz	94.0 dB $\mu$ V/m @ 3 meters
Fundamental 2.4 – 2.4835 GHz	94.0 dB $\mu$ V/m @ 3 meters
Harmonics	54.0 dB $\mu$ V/m @ 3 meters

**Method of Measurement: ANSI C63.4** using a spectrum analyzer, a preselector, a quasi-peak adapter, and an appropriate antenna. The analyzer was calibrated in dB above a microvolt at the output of the antenna. The resolution bandwidth was 100 kHz with an appropriate sweep speed and the video bandwidth was 300 kHz up to 1 GHz and 1 MHz with a video BW of 3 MHz above 1 GHz. When an emission was found, the table was rotated to produce the maximum signal strength. The antenna was placed in both the horizontal and vertical planes and the worst case emissions were reported. The spectrum was searched to at least the tenth (10) harmonic of the fundamental.

**Formula Of Conversion Factors:** The field strength at 3m was established by adding the meter reading of the spectrum analyzer (which is set to read in units of dBuV) to the antenna correction factor supplied by the antenna manufacturer. The antenna correction factors are stated in terms of dB. The gain of the preselector was accounted for in the spectrum analyzer meter reading.

Example:

Freq (MHz)	Meter Reading	+ ACF	+ CL	= FS
33	20 dBuV	+ 10.36 dB	+ 0.5	= 30.86 dBuV/m @ 3m

[Table of Contents](#)

APPLICANT: COBRA ELECTRONICS CORPORATION

FCC ID: BBODSP9200

REPORT: C:\COBRA\644AUT15\644AUT15TestReport.docx

## RESTRICTED BANDS OF OPERATION

### RULE PART: 15.205

**REQUIREMENT:** Above 1000 MHz, compliance with the emission limits in §15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in §15.35 apply to these measurements.

**Method of Measurement: ANSI C63.4**

**The Restricted Bands are shown next:**

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
<sup>1</sup> 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 -	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.52525	2655 - 2900	22.01 - 23.12
8.41425 - 8.41475	156.7 - 156.9	3260 - 3267	23.6 - 24.0
12.29 - 12.293	162.0125 - 167.17	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	167.72 - 173.2	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	240 - 285	3600 - 4400	( <sup>2</sup> )
13.36 - 13.41	322 - 335.4		

<sup>1</sup> Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

<sup>2</sup> Above 38.6

Tuned Frequency MHz	Emission Frequency MHz	Meter Reading dBuV	Ant. Polarity	Coax Loss dB	Correction Factor dB/m	Field Strength dBuV/m	Margin dB
2,402.0	2,402.00	40.7	V	3.18	32.15	75.98	18.02
2,402.0	2,402.00	57.2	H	3.18	32.15	92.53	1.47
2,440.0	2,440.00	53.0	V	3.21	32.22	88.43	5.57
2,440.0	2,440.00	54.8	H	3.21	32.22	90.25	3.75
2,480.0	2,480.00	57.1	H	3.24	32.30	92.64	1.36

**Test Data:** All values are peak unless noted.  
All other emissions were more than 20dB below the limit

### TEST RESULTS: Meets Requirements

APPLICANT: COBRA ELECTRONICS CORPORATION

FCC ID: BBODSP9200


REPORT: C:\COBRA\644AUT15\644AUT15TestReport.docx

## OCCUPIED BANDWIDTH & Bandedge:

Rules Part No.: 15.249 (d)

**Requirements:** The field strength of any emissions appearing outside the bandedges and up to 10 kHz above and below the band edges shall be attenuated at least 50 dB below the level of the carrier or to the general limits of 15.249.

### Test data:

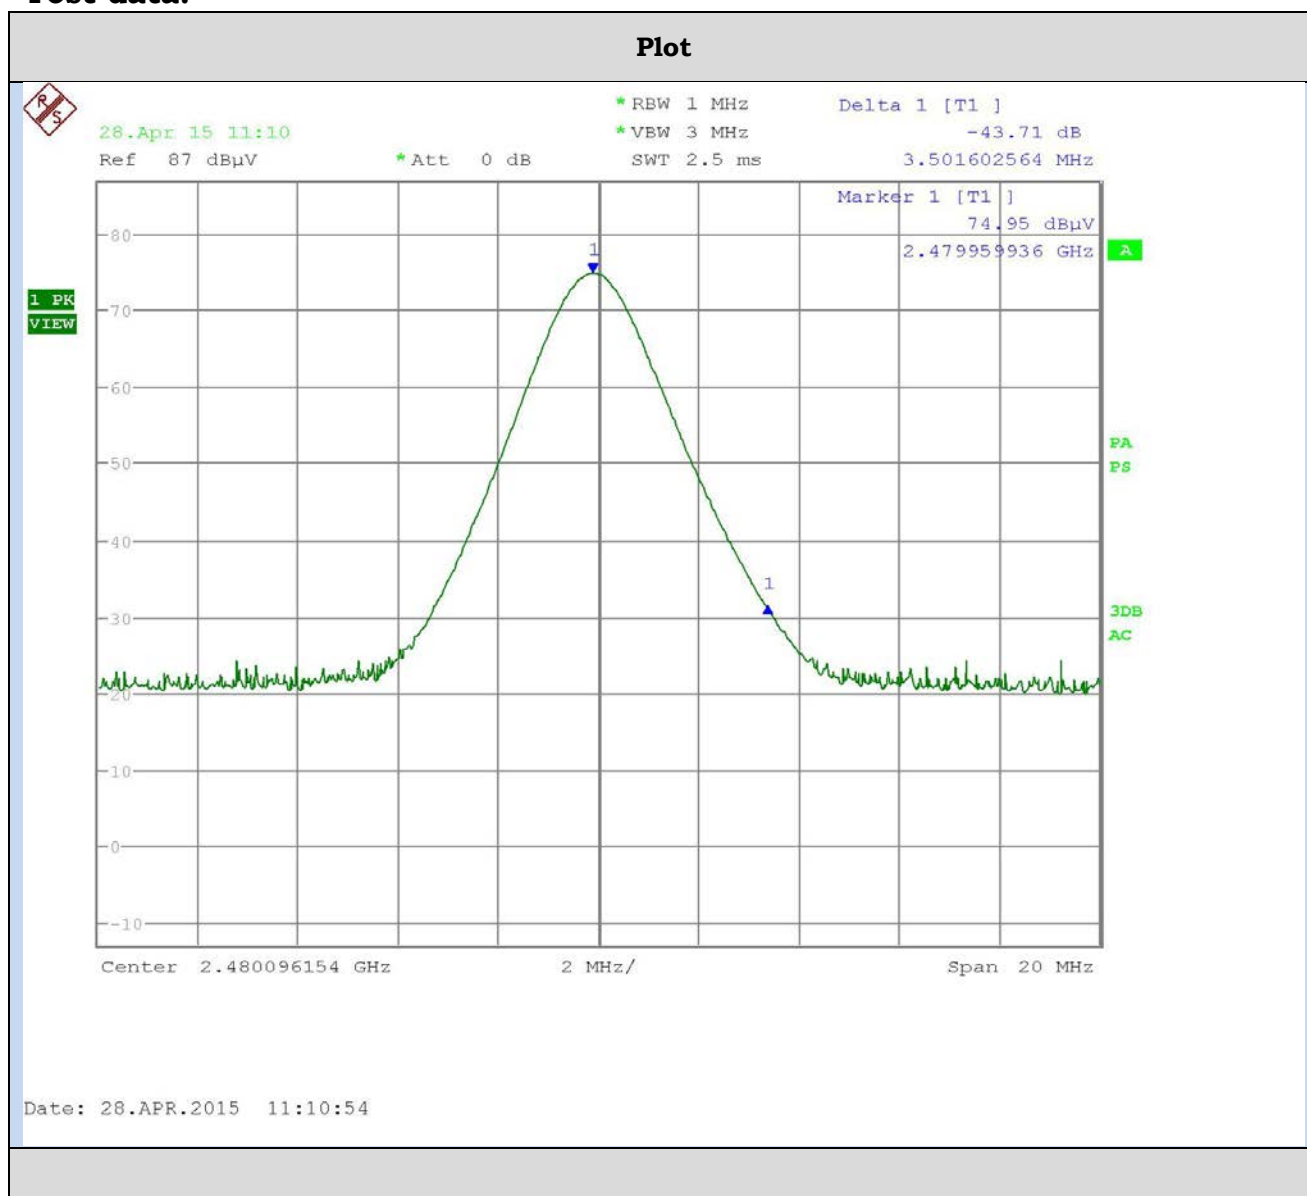

$$FS = 92.64\text{dBuV/m} \quad \text{Bandedge} = 92.64 - 43.71 = 48.93\text{dBuV/m}$$

Result Meets The Requirement

APPLICANT: COBRA ELECTRONICS CORPORATION  
FCC ID: BBODSP9200  
REPORT: C:\COBRA\644AUT15\644AUT15TestReport.docx

## EMC EQUIPMENT LIST

Device	Manufacturer	Model	Serial Number	Cal/Char Date	Due Date
Antenna: Biconnical Chamber	Eaton Chamber	94455-1	1057	06/14/13	06/14/15
Antenna: Log-Periodic Chamber	Eaton	96005	1243	05/31/13	05/31/15
Antenna: Passive Loop	EMC Test Systems	EMCO 6512	9706-1211	06/14/12	06/14/15
3-Meter Semi-Anechoic Chamber	Panashield	N/A	N/A	12/31/13	12/31/15
Ant: Double-Ridged Horn/ETS Horn 1 Ch	ETS-Lindgren Chamber	3117	00035923	06/13/14	06/13/16
EMI Test Receiver R & S ESIB 40 Screen Room	Rohde & Schwarz	ESIB 40	100274	08/12/14	08/12/16
EMI Test Receiver R & S ESU 40 Chamber	Rohde & Schwarz	ESU 40	100320	03/11/14	03/11/16

### \*EMI RECEIVER SOFTWARE VERSION

The receiver firmware used was version 4.43 Service Pack 3