


Technical Description

Model SCAN2D

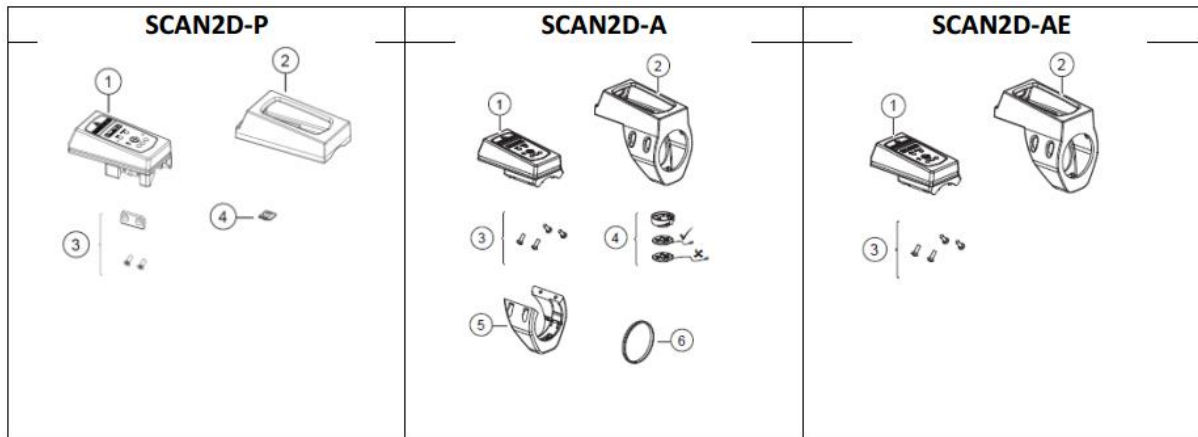

Technical data

Voltage

5 V

Power consumption

Max. 15 W

Weight

SCAN2D-P 0.1Kg / 0.22 lb

SCAN2D-A 0.1Kg / 0.22 lb

SCAN2D-AE 0.1Kg / 0.22 lb

Storage and use conditions

Storage temperature -40 to +70 °C (-40 to +158 F)

Operating temperature 0 to 45 °C (32 to 140 F)

Storage humidity 0-95 % RH (non-condensing at 60°C)

Operating humidity 0-95 % RH (non-condensing)

Altitude up to 2000 m (6562 feet)

Usable in Pollution degree 2 environment

Indoor use only



Information about installation manuals

Detailed operating instructions, installation and upgrade manuals are available at <https://www.desouttertools.com/resource-centre>.

Information about spare parts

Exploded views and spare parts lists are available in Service Link at www.desouttertools.com

INSTALLATION

for EPB* / BLRTC025-2350-* / BLRTC045-3990-10S Tools

