

FCC

SAR EVALUATION REPORT

For

FCC ID : 2AH25TF701

Model : TF701

Report Type : C2PC Report	Product Name : WIRELESS DATA TERMINAL
Report Number: <u>RXZ211221004SA01</u>	
Report Date: <u>2022-01-25</u>	
Prepared By: Bay Area Compliance Laboratories Corp. (New Taipei Laboratory) 70, Lane 169, Sec. 2, Datong Road, Xizhi Dist., New Taipei City 22183, Taiwan, R.O.C. Tel: +886 (2)2647 6898 Fax: +886 (2)2647 6895 <u>www.bacl.com.tw</u>	
Facilities: The test site used by Bay Area Compliance Laboratories Corp. (New Taipei Laboratory) to collect test data is located on 70, Lane 169, Sec. 2, Datong Road, Xizhi Dist., New Taipei City 22183, Taiwan, R.O.C.	

Statement of Compliance

Applicant (Certification Holder)	Shanghai Sunmi Technology Co.,Ltd.
	Room 505, KIC Plaza, No.388 Song Hu Road, Yang Pu District, Shanghai, China
Brand (Trade) Name	SUNMI
Product (Equipment) Name	WIRELESS DATA TERMINAL
Model Name	TF701
Serial Model Name	N/A
Serial Number	RXZ211221004-01
Test Date	2022/01/05 ~ 2022/01/21

Measurement Procedures and Standards Used:

- ☒ IEEE1528:2013
- ☐ FCC 47 CFR part 2.1091
- ☒ FCC 47 CFR part 2.1093
- ☒ IEC 62209-1:2016
- ☐ EN 62209-2:2010+A1:2019
- ☒ KDB 447498 D01 General RF Exposure Guidance v06
- ☒ KDB 648474 D04 Handset SAR v01r03
- ☒ KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz v01r04
- ☒ KDB 865664 D02 RF Exposure Reporting v01r02
- ☒ KDB 941225 D01 3G SAR Procedures v03r01
- ☒ KDB 941225 D05 SAR for LTE Devices v02r05
- ☒ KDB 248227 D01 802.11 Wi-Fi SAR v02r02

The measurement results in this report were performed at Bay Area Compliance Laboratories Corp. (New Taipei Laboratory)

Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested.

The determination of the test results does not require consideration of the uncertainty of the measurement, unless the assessment is required by customer agreement, regulation or standard document specification.

Report Issued Date: 2022-01-25

Project Engineer: Anson Lu 

Reviewed By: Gimmy Tsai 

Revision History

Revision Number	Report Number	Description of Revision	Date of Revision
1	RKSA200706001-20A	Original Report	2021.04.26
2	RXZ211221004SA01	C2PC Report	2022.01.25

Notes:

This is to request a Class II permission change to our product name: WIRELESS DATA TERMINAL, Model TF701 (FCC ID: 2AH25TF701), the device is identical to the previously certified except for the changes as below for details:

Additional code scanner (Model: N4603 and NG002), please refer to page 130, two different scanner products not affecting RF characteristics.

TABLE OF CONTENTS

EUT RESULTS.....	5
EUT DESCRIPTION	6
Technical Specification	6
REFERENCE, STANDARDS, AND GUIDELINES	8
SAR Limits.....	8
DESCRIPTION OF TEST SYSTEM	9
Area Scans	13
Zoom Scan (Cube Scan Averaging)	13
Recommended Tissue Dielectric Parameters for Head and Body	14
Tissue Dielectric Parameters for Head and Body Phantoms	14
EQUIPMENT LIST AND CALIBRATION	15
Equipment's List & Calibration Information	15
SAR MEASUREMENT SYSTEM VERIFICATION.....	16
Liquid Verification	16
System Accuracy Verification.....	18
System Verification Setup Block Diagram	18
SAR SYSTEM VALIDATION DATA.....	20
EUT TEST STRATEGY AND METHODOLOGY	28
Test Positions for Device Operating Next to a Person's Ear.....	28
Cheek/Touch Position	28
Test positions for body-worn and other configurations.....	30
Test Distance for SAR Evaluation.....	30
SAR Evaluation Procedure.....	31
CONDUCTED OUTPUT POWER MEASUREMENT.....	32
STANDALONE SAR TEST EXCLUSION CONSIDERATIONS	116
SAR MEASUREMENT RESULTS.....	119
SAR Test Data.....	119
SAR SIMULTANEOUS TRANSMISSION DESCRIPTION	124
APPENDIX A MEASUREMENT UNCERTAINTY	126
APPENDIX B EUT TEST POSITION PHOTOS	127
APPENDIX C SAR PLOTS OF SAR MEASUREMENT	131
APPENDIX D PROBE & DAE CALIBRATION CERTIFICATES.....	132
APPENDIX E DIPOLE CALIBRATION CERTIFICATES	133

EUT RESULTS

Attestation of Test Results			
Frequency Band	Max. SAR Level(s) Reported(W/kg)		Limit(W/kg)
WCDMA Band II	1g Body SAR	0.51	1.6
WCDMA Band IV	1g Body SAR	0.74	
WCDMA Band V	1g Body SAR	0.39	
LTE Band 12 & 17	1g Body SAR	0.49	
LTE Band 13	1g Body SAR	0.42	
LTE Band 14	1g Body SAR	0.39	
LTE Band 26	1g Body SAR	0.47	
LTE Band 7	1g Body SAR	0.79	
LTE Band 2 & 25	1g Body SAR	0.29	
LTE Band 4 & 66	1g Body SAR	0.39	
LTE Band 71	1g Body SAR	0.36	
LTE Band 41	1g Body SAR	0.58	
Bluetooth	1g Body SAR	0.02	
WLAN 2.4GHz_Chain 0	1g Body SAR	0.76	
WLAN 2.4GHz_Chain 1	1g Body SAR	0.12	
WLAN 5GHz_Chain 0	1g Body SAR	0.69	
WLAN 5GHz_Chain 1	1g Body SAR	0.31	
Simultaneous	1g Body SAR	1.34(Hotspot)	
	1g Body SAR	1.34	

Note: This wireless device has been shown to be capable of compliance for localized specific absorption rate (SAR) for General Population/Uncontrolled Exposure limits specified in FCC 47 CFR part 2.1093 and has been tested in accordance with the measurement procedures specified in IEEE 1528-2013 and RF exposure KDB procedures.

The results and statements contained in this report pertain only to the device(s) evaluated.

EUT DESCRIPTION

Technical Specification

Applicant	WIRELESS DATA TERMINAL
Exposure Category	Population / Uncontrolled
Antenna Type(s)	FPC Antenna for WCDMA and LTE FPC Antenna for WLAN and Bluetooth
Modulation Type	WCDMA: BPSK,QPSK,16QAM; LTE: QPSK,16QAM 2.4G Wi-Fi: DSSS,OFDM; 5G Wi-Fi: OFDM BT3.0: GFSK, $\pi/4$ -DQPSK,8DPSK; BLE: GFSK
Frequency Band	WCDMA Band II: 1850 ~ 1910 MHz(TX) WCDMA Band IV: 1710 ~ 1755 MHz(TX) WCDMA Band V: 824 ~ 849 MHz(TX) LTE Band 2: 1850 ~ 1910 MHz(TX) LTE Band 4: 1710 ~ 1755 MHz(TX) LTE Band 7: 2500 ~ 2570 MHz(TX) LTE Band 12: 699 ~ 716 MHz(TX) LTE Band 13: 777 ~ 787 MHz(TX) LTE Band 14: 788 ~ 798 MHz(TX) LTE Band 17: 704 ~ 716 MHz(TX) LTE Band 25: 1850 ~ 1915 MHz(TX) LTE Band 26: 814 ~ 849 MHz(TX) LTE Band 41: 2555 ~ 2655 MHz(TX) LTE Band 66: 1710 ~ 1780 MHz(TX) LTE Band 71: 663 ~ 698 MHz(TX) 2.4G Wi-Fi: 2412 ~ 2462 MHz(b/g/n20) ; 2422 ~ 2452 MHz(n40) BT/BLE: 2402 ~ 2480 MHz 5G UNII-1: 5150 ~ 5250 MHz, 5G UNII-3: 5725 ~ 5850 MHz
Conducted RF Power (Avg/Tune Up)	WCDMA Band 2: 23.0 dBm WCDMA Band 4: 23.0 dBm WCDMA Band 5: 23.0 dBm LTE Band 2 & 25: 22.8 dBm LTE Band 66 & 4: 22.8 dBm LTE Band 12 & 17: 22.8 dBm LTE Band 7: 22.5 dBm LTE Band 13: 22.8 dBm LTE Band 14: 22.8 dBm

	LTE Band 26: 22.8 dBm LTE Band 41: 22.5 dBm LTE Band 66: 22.8 dBm LTE Band 71: 22.8 dBm Wi-Fi 2.4GHz_Chain 0: 13.6 dBm ; Wi-Fi 2.4GHz_Chain 1: 13.3 dBm Wi-Fi 5GHz UNII-1_Chain 0: 9.0 dBm ; Wi-Fi 5GHz UNII-1_Chain 1: 10.0 dBm Wi-Fi 5GHz UNII-3_Chain 0: 8.0 dBm ; Wi-Fi 5GHz UNII-3_Chain 1: 8.1 dBm
Conducted RF Power (Peak/Tune Up)	Bluetooth: 11.0 dBm Bluetooth LE: 0.5 dBm
Power Source	DC 3.85V from Battery DC 5.0 / 9.0 / 12.0 / 3.6 ~ 6.0 / 6.0 ~ 9.0 / 9.0 ~ 12.0 V from adapter

Note:

*All measurement and test data in this report was gathered from production sample serial number :
RXZ211221004-01(Assigned by BACL(New Taipei Laboratory)).The EUT supplied by the applicant was received on
2021/12/14.*

REFERENCE, STANDARDS, AND GUIDELINES

FCC :

The Report and Order requires routine SAR evaluation prior to equipment authorization of portable transmitter devices, including portable telephones. For consumer products, the applicable limit is 1.6 mW/g as recommended by the ANSI/IEEE standard C95.1 [6] for an uncontrolled environment (Paragraph 65). According to the Supplement C of OET Bulletin 65 "Evaluating Compliance with FCC Guide-lines for Human Exposure to Radio frequency Electromagnetic Fields", released on Jun 29, 2001 by the FCC, the device should be evaluated at maximum output power (radiated from the antenna) under "worst-case" conditions for normal or intended use, incorporating normal antenna operating positions, device peak performance frequencies and positions for maximum RF energy coupling.

This report describes the methodology and results of experiments performed on wireless data terminal. The objective was to determine if there is RF radiation and if radiation is found, what is the extent of radiation with respect to safety limits. SAR (Specific Absorption Rate) is the measure of RF exposure determined by the amount of RF energy absorbed by human body (or its parts) – to determine how the RF energy couples to the body or head which is a primary health concern for body worn devices. The limit below which the exposure to RF is considered safe by regulatory bodies in North America is 1.6 mW/g average over 1 gram of tissue mass.

SAR Limits

FCC Limit

EXPOSURE LIMITS	SAR (W/kg)	
	(General Population / Uncontrolled Exposure Environment)	(Occupational / Controlled Exposure Environment)
Spatial Average (averaged over the whole body)	0.08	0.4
Spatial Peak (averaged over any 1 g of tissue)	1.60	8.0
Spatial Peak (hands/wrists/feet/ankles averaged over 10 g)	4.0	20.0


Population/Uncontrolled Environments are defined as locations where there is the exposure of individual who have no knowledge or control of their exposure.

Occupational/Controlled Environments are defined as locations where there is exposure that maybe incurred by people who are aware of the potential for exposure (i.e. as a result of employment or occupation).

General Population/Uncontrolled environments Spatial Peak limit 1.6W/kg (FCC) & 2.0 W/kg (CE) applied to the EUT.


DESCRIPTION OF TEST SYSTEM

These measurements were performed with the automated near-field scanning system DASY6 from Schmid& Partner Engineering AG (SPEAG) which is the Fifth generation of the system shown in the figure hereinafter:

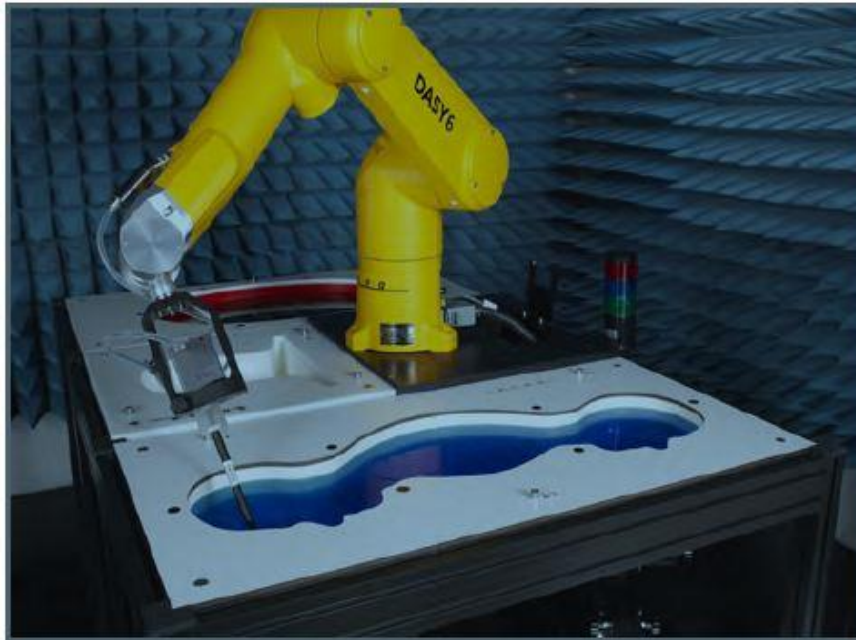

DASY6 System Description

The DASY6 system for performing compliance tests consists of the following items:

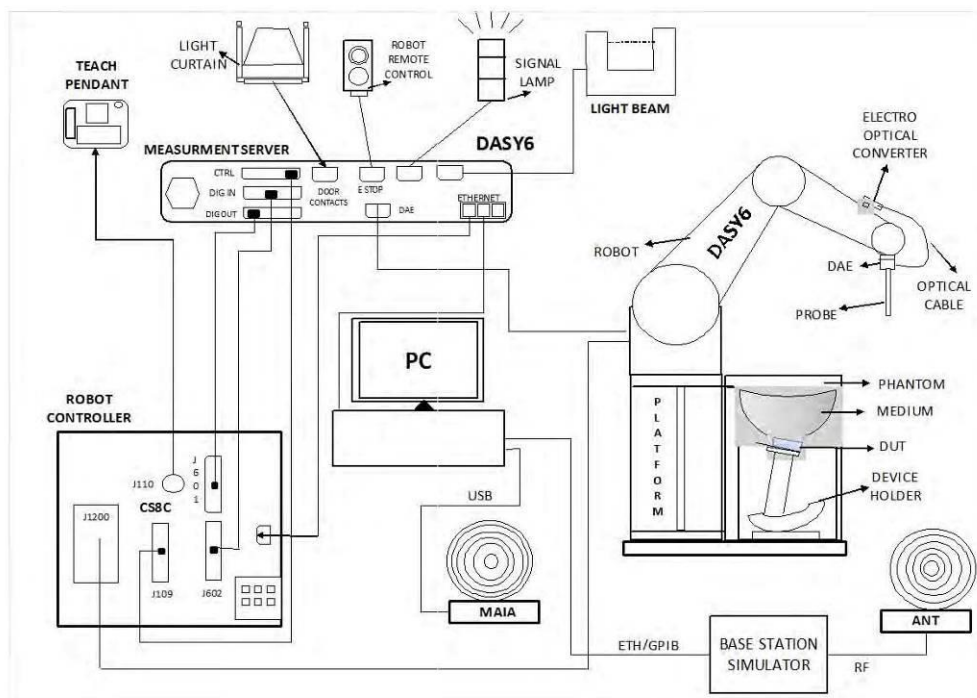

- A standard high precision 6-axis robot (Staubli TX=RX family) with controller, teach pendant and software. An arm extension for accommodating the data acquisition electronics (DAE).
- An isotropic field probe optimized and calibrated for the targeted measurement.
- A data acquisition electronics (DAE) which performs the signal application, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- The Electro-optical converter (EOC) performs the conversion from optical to electrical signals for the digital communication to the DAE. To use optical surface detection, a special version of the EOC is required. The EOC signal is transmitted to the measurement server.
- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- The Light Beam used is for probe alignment. This improves the (absolute) accuracy of the probe positioning.
- A computer running Win7 professional operating system and the DASY52 software.
- Remote control and teach pendant as well as additional circuitry for robot safety such as warning lamps, etc.
- The phantom, the device holder and other accessories according to the targeted measurement.

DASY6 Measurement Server

The DASY6 measurement server is based on a PC/104 CPU board with a 400 MHz Intel ULV Celeron, 128 MB chip-disk and 128 MB RAM. The necessary circuits for communication with the DAE4 (or DAE3) electronics box, as well as the 16-bit AD converter system for optical detection and digital I/O interface are contained on the DASY6 I/O board, which is directly connected to the PC/104 bus of the CPU board.



The measurement server performs all real-time data evaluations of field measurements and surface detection, controls robot movements, and handles safety operations. The PC operating system cannot interfere with these time-critical processes. All connections are supervised by a watchdog, and disconnection of any of the cables to the measurement server will automatically disarm the robot and disable all program-controlled robot movements. Furthermore, the measurement server is equipped with an expansion port, which is reserved for future applications. Please note that this expansion port does not have a standardized pinout, and therefore only devices provided by SPEAG can be connected. Connection of devices from any other supplier could seriously damage the measurement server.

Data Acquisition Electronics

The data acquisition electronics (DAE4) consist of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD-converter and a command decoder with a control logic unit. Transmission to the measurement server is accomplished through an optical downlink for data and status information, as well as an optical uplink for commands and the clock.

The mechanical probe mounting device includes two different sensor systems for frontal and sideways probe contacts. They are used for mechanical surface detection and probe collision detection.

The input impedance of both the DAE4 as well as of the DAE3 box is 200M Ω ; the inputs are symmetrical and floating. Common mode rejection is above 80 dB.


EX3DV4 E-Field Probes

Frequency	10 MHz to > 6 GHz Linearity: ± 0.2 dB (30 MHz to 6 GHz)
Directivity	± 0.3 dB in TSL (rotation around probe axis) ± 0.5 dB in TSL (rotation normal to probe axis)
Dynamic Range	10 μ W/g to > 100 mW/g Linearity: ± 0.2 dB (noise: typically < 1 μ W/g)
Dimensions	Overall length: 337 mm (Tip: 20 mm) Tip diameter: 2.5 mm (Body: 12 mm) Typical distance from probe tip to dipole centers: 1 mm
Application	High precision dosimetric measurements in any exposure scenario (e.g., very strong gradient fields); the only probe that enables compliance testing for frequencies up to 6 GHz with precision of better 30%.
Compatibility	DASY3, DASY4, DASY52 SAR and higher, EASY4/MRI

SAM Twin Phantom

The SAM Twin Phantom (shown in front of DASY6) is a fiberglass shell phantom with shell thickness 2 mm, except in the ear region where the thickness is increased to 6 mm. The phantom has three measurement areas: 1) Left Head, 2) Right Head, and 3) Flat Section. For larger devices, the use of the ELI-Phantom (shown behind DASY6) is required. For devices such as glasses with a wireless link, the Face Down Phantom is the most suitable (between the SAM Twin and ELI phantoms).

When the phantom is mounted inside allocated slot of the DASY6 platform, phantom reference points can be taught directly in the DASY5 V5.2 software. When the DASY6 platform is used to mount the

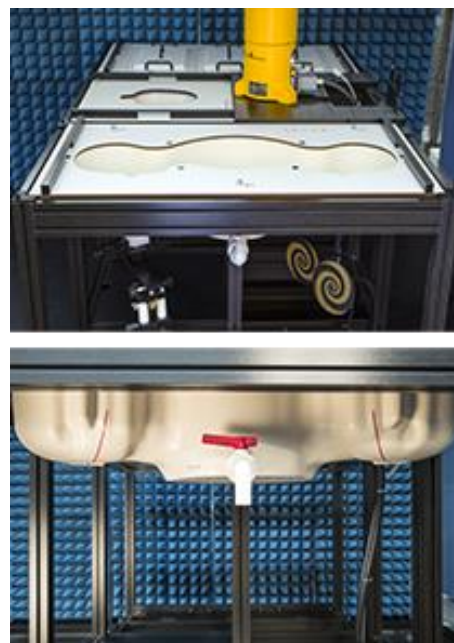

Phantom, some of the phantom teaching points cannot be reached by the robot in DASY5 V5.2. A special tool called P1a-P2aX-Former is provided to transform two of the three points, P1 and P2, to reachable locations. To use these new teaching points, a revised phantom configuration file is required.

In addition to our standard broadband liquids, the phantom can be used with the following tissue simulating liquids:

Sugar-water-based liquids can be left permanently in the phantom. Always cover the liquid when the system is not in use to prevent changes in liquid parameters due to water evaporation. DGBE-based liquids should be used with care. As DGBE is a softener for most plastics, the liquid should be taken out of the phantom, and the phantom should be dried when the system is not in use (desirable at least once a week).

Do not use other organic solvents without previously testing the solvent resistivity of the phantom. Approximately 25 liters of liquid is required to fill the SAM Twin phantom.


ELI Phantom

The ELI phantom is intended for compliance testing of handheld and body-mounted wireless devices in the frequency range of 30MHz to 6 GHz. ELI is fully compatible with the latest draft of the standard IEC 62209-2 and the use of all known tissue simulating liquids. ELI has been optimized for performance and can be integrated into a SPEAG standard phantom table. A cover is provided to prevent evaporation of water and changes in liquid parameters. Reference markings on the phantom allow installation of the complete setup, including all predefined phantom positions and measurement grids, by teaching three points.

The phantom can be used with the following tissue simulating liquids:

- Sugar-water-based liquids can be left permanently in the phantom. Always cover the liquid when the system is not in use to prevent changes in liquid parameters due to water evaporation.
- DGBE-based liquids should be used with care. As DGBE is a softener for most plastics, the liquid should be taken out of the phantom, and the phantom should be dried when the system is not in use (desirable at least once a week).
- Do not use other organic solvents without previously testing the solvent resistivity of the phantom.

Approximately 25 liters of liquid is required to fill the ELI phantom

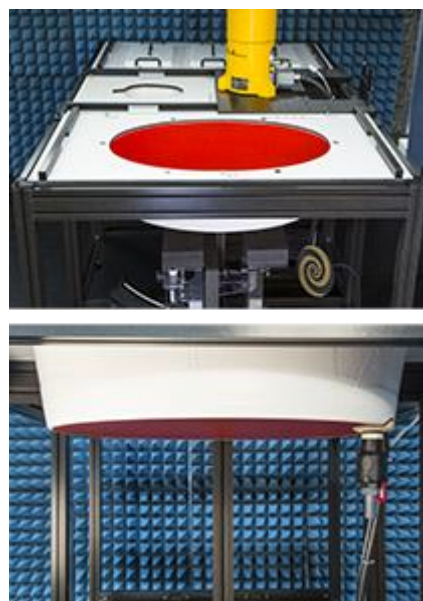

Robots

The DASY6 system uses the high-precision industrial robots TX60L, TX90XL, and RX160L from StaubliSA (France). The TX robot family - the successor of the well-known RX robot family - continues to offer the features important for DASY6 applications:

- High precision (repeatability 0.02mm)
- High reliability (industrial design)
- Low maintenance costs (virtually maintenance free due to direct drive gears; no belt drives)
- Jerk-free straight movements (brushless synchrony motors; no stepper motors)
- Low ELF interference (motor control fields shielded via the closed metallic construction shields)

The robots are controlled by the Staubli CS8c robot controllers. All information regarding the use and maintenance of the robot arm and the robot controller is provided

Area Scans

Area scans are defined prior to the measurement process being executed with a user defined variable spacing between each measurement point (integral) allowing low uncertainty measurements to be conducted. Scans defined for FCC applications utilize a 15mm² step integral, with 1.5mm interpolation used to locate the peak SAR area used for zoom scan assessments.

Where the system identifies multiple SAR peaks (which are within 25% of peak value) the system will provide the user with the option of assessing each peak location individually for zoom scan averaging.

Zoom Scan (Cube Scan Averaging)

The averaging zoom scan volume utilized in the DASY6 software is in the shape of a cube and the side dimension of a 1 g or 10 g mass is dependent on the density of the liquid representing the simulated tissue. A density of 1000 kg/m³ is used to represent the head and body tissue density and not the phantom liquid density, in order to be consistent with the definition of the liquid dielectric properties, i.e. the side length of the 1g cube is 10mm, with the side length of the 10g cube is 21.5mm.

When the cube intersects with the surface of the phantom, it is oriented so that 3 vertices touch the surface of the shell or the center of a face is tangent to the surface. The face of the cube closest to the surface is modified in order to conform to the tangent surface.

The zoom scan integer steps can be user defined so as to reduce uncertainty, but normal practice for typical test applications (including FCC) utilize a physical step of 7 x 7 x 7 (5mmx5mmx5mm) providing a volume of 30 mm in the X & Y & Z axis.

Recommended Tissue Dielectric Parameters for Head and Body

Tissue Dielectric Parameters for Head and Body Phantoms

The head tissue dielectric parameters recommended by the IEC 62209-1:2016

Recommended Tissue Dielectric Parameters for Head liquid

Table A.3 – Dielectric properties of the head tissue-equivalent liquid

Frequency MHz	Relative permittivity ϵ_r	Conductivity (σ) S/m
300	45,3	0,87
450	43,5	0,87
750	41,9	0,89
835	41,5	0,90
900	41,5	0,97
1 450	40,5	1,20
1 500	40,4	1,23
1 640	40,2	1,31
1 750	40,1	1,37
1 800	40,0	1,40
1 900	40,0	1,40
2 000	40,0	1,40
2 100	39,8	1,49
2 300	39,5	1,67
2 450	39,2	1,80
2 600	39,0	1,96
3 000	38,5	2,40
3 500	37,9	2,91
4 000	37,4	3,43
4 500	36,8	3,94
5 000	36,2	4,45
5 200	36,0	4,66
5 400	35,8	4,86
5 600	35,5	5,07
5 800	35,3	5,27
6 000	35,1	5,48

NOTE For convenience, permittivity and conductivity values at those frequencies which are not part of the original data provided by Drossos et al. [33] or the extension to 5 800 MHz are provided (i.e. the values shown *in italics*). These values were linearly interpolated between the values in this table that are immediately above and below these values, except the values at 6 000 MHz that were linearly extrapolated from the values at 3 000 MHz and 5 800 MHz.


EQUIPMENT LIST AND CALIBRATION

Equipment's List & Calibration Information

Equipment	Model	S/N	Calibration Date	Calibration Due Date
Robot	TX90	5N26A1	N.C.R	N.C.R
DASY5 Test Software	DASY5.2	N/A	N.C.R	N.C.R
DASY6 Measurement Server	DASY 6.0	1588	N/A	N/A
Data Acquisition Electronics	DAE3	393	2021/04/09	2022/04/08
E-Field Probe	EX3DV4	3887	2021/10/22	2022/10/21
Dipole, 750 MHz	D750V3	1079	2020/11/06	2023/11/05
Dipole, 835 MHz	D835V2	454	2020/11/18	2023/11/17
Dipole, 1800 MHz	D1800V2	2d207	2020/11/09	2023/11/08
Dipole, 1900 MHz	D1900V2	5d207	2020/11/11	2023/11/10
Dipole, 2450 MHz	D2450V2	1068	2021/10/11	2024/10/10
Dipole, 2600 MHz	D2600V2	1174	2020/11/18	2023/11/17
Dipole, 5GHz	D5GHzV2	1336	2021/10/12	2024/10/11
Twin SAM	Twin SAM V5.0	1368	N/A	N/A
Twin ELI	Twin ELI V8.0	2088	N/A	N/A
Simulated Tissue 0.6G~6GHz Head	TS-6GHz-H	/	Each Time	/
Wideband Radio Communication Tester	CMU-200	106868	2021/04/07	2022/04/06
Functional radio communication tester	CMW 290	101741	2021/08/07	2022/08/06
Mounting Device	N/A	SD 000 H01 KA	N/A	N/A
Network Analyzer	E5063A	MY54402093	2021/12/15	2022/12/14
Dielectric probe kit	83570B	50207	/	/
MXG Signal Generator	N5183A	MY50140330	2021/12/15	2022/12/14
USB Wideband Power Sensor	U2021XA	MY58140006	2021/11/2	2022/11/1
Power Amplifier	ZVE-8G+	365701647	2021/1/8	2022/1/7
Power Amplifier	ZHL-42W+	329401642	2021/1/8	2022/1/7
Power Amplifier	ZVE-8G+	365701647	2022/1/13	2023/1/12
Power Amplifier	ZHL-42W+	329401642	2022/1/13	2023/1/12
Temperature and Humidity Recoder	HTC-1	005	2021/10/27	2022/10/26
Directional Coupler	488Z	810	N.C.R	N.C.R
Attenuator	20dB, 100W	1453	N.C.R	N.C.R

SAR MEASUREMENT SYSTEM VERIFICATION

Liquid Verification

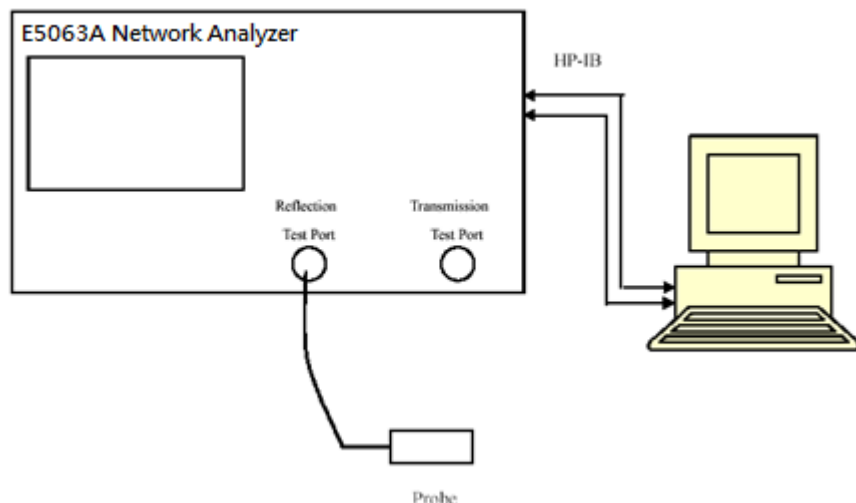

Liquid Verification Setup Block Diagram

Liquid Verification Results

Test Date	Frequency (MHz)	Liquid Type	Liquid parameter		Target Value		Delta (%)		Tolerance (%)
			σ (S/m)	ϵ_r	σ (S/m)	ϵ_r	σ (S/m)	ϵ_r	
2022/01/05	835	HSL	0.931	41.924	0.9	41.50	3.44	1.02	± 5
	836.6	HSL	0.932	41.912	0.9	41.50	3.56	0.99	± 5
	831.5	HSL	0.930	41.956	0.9	41.52	3.33	1.05	± 5

Test Date	Frequency (MHz)	Liquid Type	Liquid parameter		Target Value		Delta (%)		Tolerance (%)
			σ (S/m)	ϵ_r	σ (S/m)	ϵ_r	σ (S/m)	ϵ_r	
2022/01/06	750	HSL	0.907	42.146	0.89	41.9	1.91	0.59	± 5
	707.5	HSL	0.895	42.439	0.89	42.13	0.56	0.73	± 5
	782	HSL	0.925	42.147	0.89	41.75	3.93	0.95	± 5
	793	HSL	0.928	42.141	0.90	41.70	3.11	1.06	± 5
	680.5	HSL	0.891	42.446	0.89	42.27	0.11	0.42	± 5

Test Date	Frequency (MHz)	Liquid Type	Liquid parameter		Target Value		Delta (%)		Tolerance (%)
			σ (S/m)	ϵ_r	σ (S/m)	ϵ_r	σ (S/m)	ϵ_r	
2022/01/07	2600	HSL	1.901	39.147	1.96	39.00	-3.01	0.38	± 5
	2560	HSL	1.871	39.225	1.92	39.05	-2.55	0.45	± 5
	2605	HSL	1.904	39.144	1.97	38.99	-3.35	0.39	± 5

Note: It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. (New Taipei Laboratory)

Test Date	Frequency (MHz)	Liquid Type	Liquid parameter		Target Value		Delta (%)		Tolerance (%)
			σ (S/m)	ϵ_r	σ (S/m)	ϵ_r	σ (S/m)	ϵ_r	
2022/01/18	1800	HSL	1.336	38.877	1.40	40.00	-4.57	-2.81	± 5
	1752.6	HSL	1.307	38.997	1.37	40.07	-4.60	-2.68	± 5
	1745	HSL	1.303	39.018	1.37	40.08	-4.89	-2.65	± 5

Test Date	Frequency (MHz)	Liquid Type	Liquid parameter		Target Value		Delta (%)		Tolerance (%)
			σ (S/m)	ϵ_r	σ (S/m)	ϵ_r	σ (S/m)	ϵ_r	
2022/01/19	1900	HSL	1.399	39.138	1.4	40	-0.07	-2.16	± 5
	1880	HSL	1.388	39.185	1.4	40	-0.86	-2.04	± 5

Test Date	Frequency (MHz)	Liquid Type	Liquid parameter		Target Value		Delta (%)		Tolerance (%)
			σ (S/m)	ϵ_r	σ (S/m)	ϵ_r	σ (S/m)	ϵ_r	
2022/01/20	2450	HSL	1.791	39.448	1.80	39.20	-0.50	0.63	± 5
	2412	HSL	1.755	39.473	1.77	39.27	-0.85	0.52	± 5
	2480	HSL	1.809	39.389	1.83	39.16	-1.15	0.58	± 5

Test Date	Frequency (MHz)	Liquid Type	Liquid parameter		Target Value		Delta (%)		Tolerance (%)
			σ (S/m)	ϵ_r	σ (S/m)	ϵ_r	σ (S/m)	ϵ_r	
2022/01/21	5250	HSL	4.70	35.092	4.71	35.95	-0.21	-2.39	± 5
	5240	HSL	4.683	35.090	4.70	35.96	-0.36	-2.42	± 5

Test Date	Frequency (MHz)	Liquid Type	Liquid parameter		Target Value		Delta (%)		Tolerance (%)
			σ (S/m)	ϵ_r	σ (S/m)	ϵ_r	σ (S/m)	ϵ_r	
2022/01/21	5800	HSL	5.378	33.978	5.27	35.30	2.05	-3.75	± 5
	5755	HSL	5.333	34.020	5.23	35.35	1.97	-3.76	± 5


System Accuracy Verification

Prior to the assessment, the system validation kit was used to test whether the system was operating within its specifications of $\pm 10\%$. The validation results are tabulated below. And also the corresponding SAR plot is attached as well in the SAR plots files.

The spacing distances in the **System Verification Setup Block Diagram** is given by the following:

- $s = 15 \text{ mm} \pm 0,2 \text{ mm}$ for $300 \text{ MHz} \leq f \leq 1\,000 \text{ MHz}$;
- $s = 10 \text{ mm} \pm 0,2 \text{ mm}$ for $1\,000 \text{ MHz} < f \leq 3\,000 \text{ MHz}$;
- $s = 10 \text{ mm} \pm 0,2 \text{ mm}$ for $3\,000 \text{ MHz} < f \leq 6\,000 \text{ MHz}$.

System Verification Setup Block Diagram

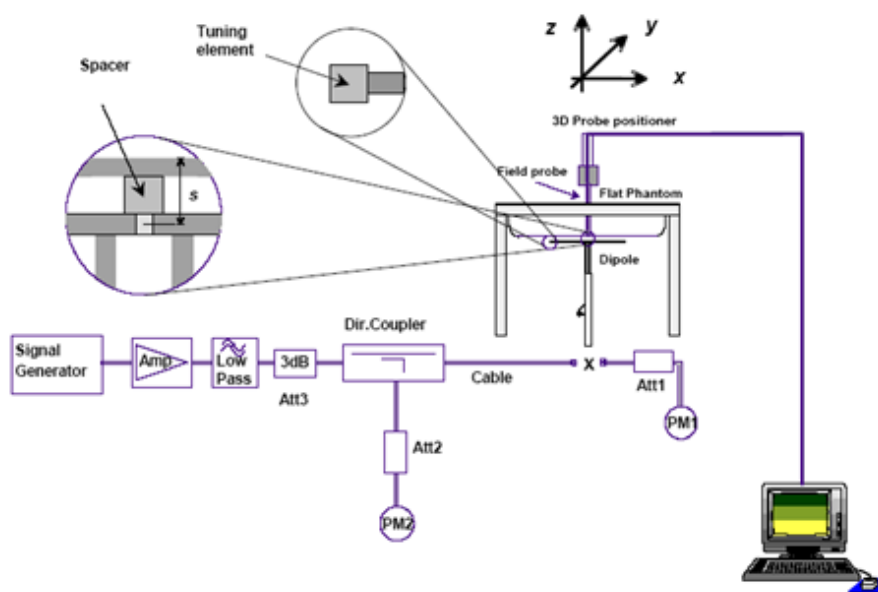

System Accuracy Check Results

Test Date	Frequency Band (MHz)	Liquid Type	Input Power (mW)	Measured SAR (W/kg)		Target Value (W/kg)		Normalized to 1W (W/kg)		Delta (%)	Tolerance (%)
2022/01/05	835	HSL	250	1g	2.23	1g	9.38	1g	8.92	-4.90	±10
2022/01/06	750	HSL	250	1g	2.02	1g	8.25	1g	8.08	-2.06	±10
2022/01/07	2600	HSL	250	1g	13.0	1g	55.3	1g	52.0	-5.97	±10
2022/01/18	1800	HSL	250	1g	9.42	1g	38.9	1g	37.68	-3.14	±10
2022/01/19	1900	HSL	250	1g	9.87	1g	-40.1	1g	39.48	-1.55	±10
2022/01/20	2450	HSL	250	1g	13.9	1g	54.2	1g	55.6	2.58	±10
2022/01/21	5250	HSL	100	1g	8.14	1g	81.9	1g	81.4	-0.61	±10
2022/01/21	5800	HSL	100	1g	8.31	1g	83.3	1g	83.1	-0.24	±10

Note:

- 1) Below 5GHz, The power inputted to dipole is 0.25Watt; the SAR values are normalized to 1 Watt forward power by multiplying 4 times.
- 2) Above 5GHz, The power inputted to dipole is 0.10Watt; the SAR values are normalized to 1 Watt forward power by multiplying 10 times.

SAR SYSTEM VALIDATION DATA

Test Laboratory: BACL SAR Testing Lab

System Check_Head_835MHz

DUT: D835V2-454

Communication System: UID 0, CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium: HSL835 Medium parameters used: $f = 835$ MHz; $\sigma = 0.931$ S/m; $\epsilon_r = 41.924$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(9.38, 9.38, 9.38) @ 835 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: ELI-Righr-ELI V8.0 (20deg probe tilt); Type: QD OVA 004 Ax; Serial: xxxx
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Pin=250mW/Area Scan (41x121x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm
Maximum value of SAR (interpolated) = 2.84 W/kg

Pin=250mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 53.10 V/m; Power Drift = -0.05 dB


Peak SAR (extrapolated) = 3.35 W/kg

SAR(1 g) = 2.23 W/kg; SAR(10 g) = 1.46 W/kg

Smallest distance from peaks to all points 3 dB below = 17.6 mm

Ratio of SAR at M2 to SAR at M1 = 66.6%

Maximum value of SAR (measured) = 2.83 W/kg

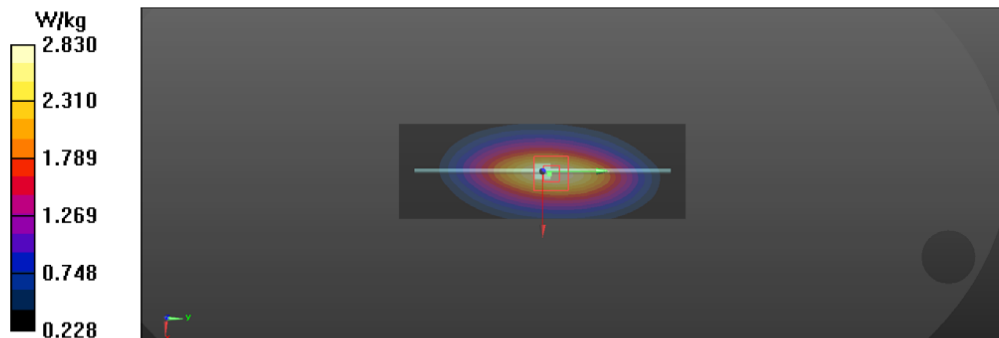

Test Laboratory: BACL SAR Testing Lab

System Check_Head_750MHz

DUT: D750V3-1079

Communication System: UID 0, CW (0); Frequency: 750 MHz; Duty Cycle: 1:1


Medium: HSL_750 Medium parameters used: $f = 750 \text{ MHz}$; $\sigma = 0.907 \text{ S/m}$; $\epsilon_r = 42.146$; $\rho = 1000 \text{ kg/m}^3$

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(9.58, 9.58, 9.58) @ 750 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: ELI-Righr-ELI V8.0 (20deg probe tilt); Type: QD OVA 004 Ax; Serial: xxxx
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Pin=250mW/Area Scan (41x121x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$
Maximum value of SAR (interpolated) = 2.52 W/kg

Pin=250mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
Reference Value = 50.38 V/m; Power Drift = 0.00 dB
Peak SAR (extrapolated) = 2.96 W/kg
SAR(1 g) = 2.02 W/kg; SAR(10 g) = 1.34 W/kg
Smallest distance from peaks to all points 3 dB below = 17.6 mm
Ratio of SAR at M2 to SAR at M1 = 68%
Maximum value of SAR (measured) = 2.52 W/kg

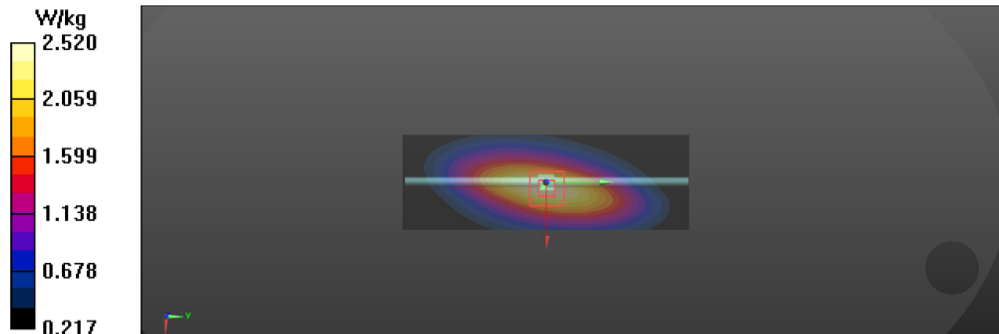

Test Laboratory: BACL SAR Testing Lab

System Check_Head_2600MHz


DUT: D2600V2-1174

Communication System: UID 0, CW (0); Frequency: 2600 MHz; Duty Cycle: 1:1
Medium: HSL_2600 Medium parameters used: $f = 2600\text{ MHz}$; $\sigma = 1.901\text{ S/m}$; $\epsilon_r = 39.147$; $\rho = 1000\text{ kg/m}^3$

- DASY5 Configuration:
- Probe: EX3DV4 - SN3887; ConvF(7.24, 7.24, 7.24) @ 2600 MHz; Calibrated: 10/22/2021
 - Sensor-Surface: 1.4mm (Mechanical Surface Detection)
 - Electronics: DAE3 Sn393; Calibrated: 4/9/2021
 - Phantom: ELI-Righr-ELI V8.0 (20deg probe tilt); Type: QD OVA 004 Ax; Serial: xxxxx
 - Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Pin=250mW/Area Scan (61x61x1): Interpolated grid: $dx=1.200\text{ mm}$, $dy=1.200\text{ mm}$
Maximum value of SAR (interpolated) = 22.3 W/kg

Pin=250mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{ mm}$, $dy=5\text{ mm}$, $dz=5\text{ mm}$
Reference Value = 105.0 V/m; Power Drift = -0.06 dB
Peak SAR (extrapolated) = 27.6 W/kg
SAR(1 g) = 13 W/kg; SAR(10 g) = 5.88 W/kg
Smallest distance from peaks to all points 3 dB below = 9 mm
Ratio of SAR at M2 to SAR at M1 = 47.7%
Maximum value of SAR (measured) = 22.1 W/kg

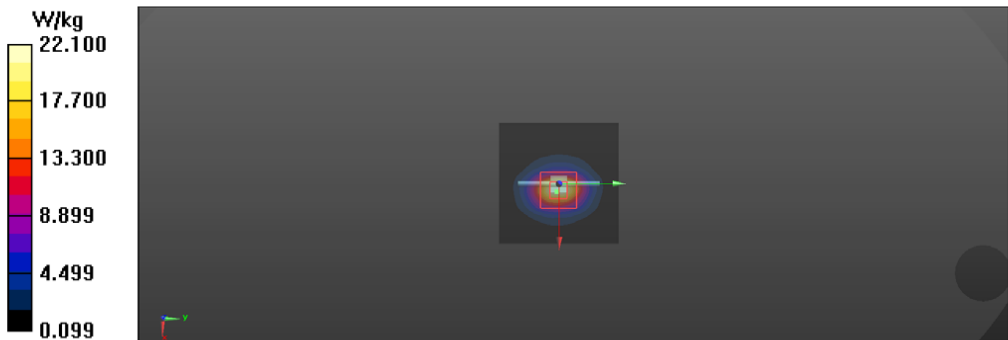

Test Laboratory: BACL SAR Testing Lab

System Check_Head_1800MHz


DUT: D1800V2-2d207

Communication System: UID 0, CW (0); Frequency: 1800 MHz; Duty Cycle: 1:1
Medium: HSL1800 Medium parameters used: $f = 1800 \text{ MHz}$; $\sigma = 1.336 \text{ S/m}$; $\epsilon_r = 38.877$; $\rho = 1000 \text{ kg/m}^3$

- DASY5 Configuration:
- Probe: EX3DV4 - SN3887; ConvF(8.42, 8.42, 8.42) @ 1800 MHz; Calibrated: 10/22/2021
 - Sensor-Surface: 1.4mm (Mechanical Surface Detection)
 - Electronics: DAE3 Sn393; Calibrated: 4/9/2021
 - Phantom: ELI-Righr-ELI V8.0 (20deg probe tilt); Type: QD OVA 004 Ax; Serial: xxxx
 - Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Pin=250mW/Area Scan (61x61x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$
Maximum value of SAR (interpolated) = 14.6 W/kg

Pin=250mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
Reference Value = 106.7 V/m; Power Drift = -0.02 dB
Peak SAR (extrapolated) = 17.5 W/kg
SAR(1 g) = 9.42 W/kg; SAR(10 g) = 4.94 W/kg
Smallest distance from peaks to all points 3 dB below = 9.6 mm
Ratio of SAR at M2 to SAR at M1 = 53.9%
Maximum value of SAR (measured) = 14.6 W/kg

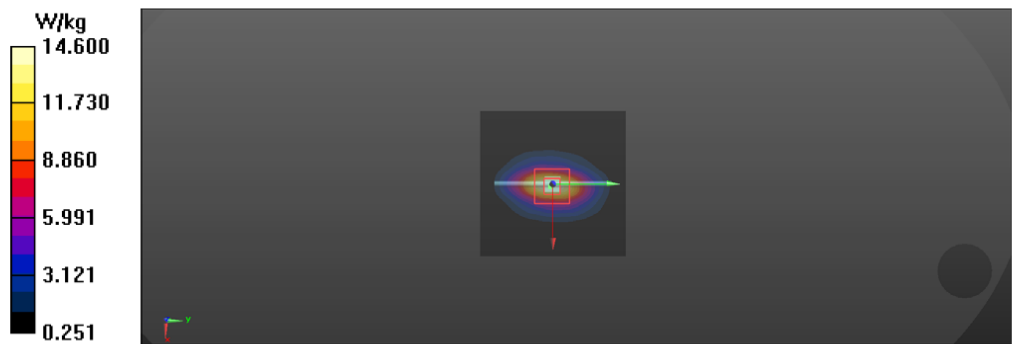

Test Laboratory: BACL SAR Testing Lab

System Check_Head_1900MHz

DUT: Dipole 1900 MHz D1900V2


Communication System: UID 0, CW (0); Frequency: 1900 MHz; Duty Cycle: 1:1
Medium: HSL 1900 Medium parameters used: $f = 1900 \text{ MHz}$; $\sigma = 1.399 \text{ S/m}$; $\epsilon_r = 39.138$; $\rho = 1000 \text{ kg/m}^3$

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(8.2, 8.2, 8.2) @ 1900 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: ELI-Righr-ELI V8.0 (20deg probe tilt); Type: QD OVA 004 Ax; Serial: xxxxx
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Pin=250mW/Area Scan (61x61x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$
Maximum value of SAR (interpolated) = 14.0 W/kg

Pin=250mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
Reference Value = 87.46 V/m; Power Drift = 0.05 dB
Peak SAR (extrapolated) = 18.2 W/kg
SAR(1 g) = 9.87 W/kg; SAR(10 g) = 5.15 W/kg
Smallest distance from peaks to all points 3 dB below = 10.1 mm
Ratio of SAR at M2 to SAR at M1 = 54.8%
Maximum value of SAR (measured) = 13.9 W/kg

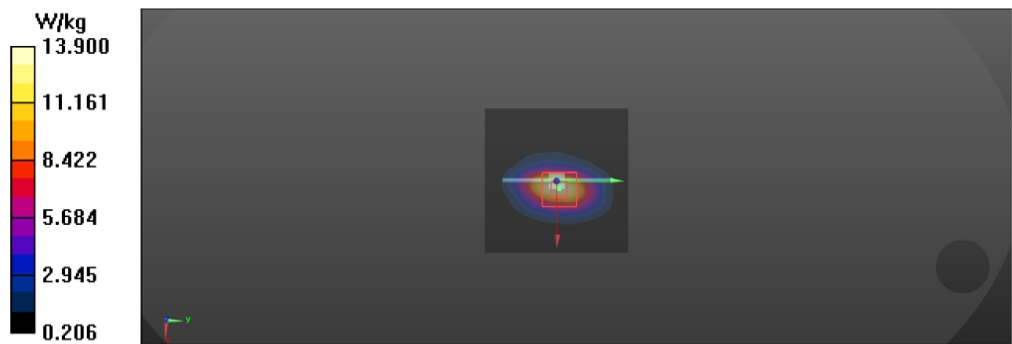

Test Laboratory: BACL SAR Testing Lab

System Check_Body_2450MHz


DUT: D2450V2-1068

Communication System: UID 0, CW (0); Frequency: 2450 MHz; Duty Cycle: 1:1
Medium: HSL2450 Medium parameters used: $f = 2450 \text{ MHz}$; $\sigma = 1.791 \text{ S/m}$; $\epsilon_r = 39.448$; $\rho = 1000 \text{ kg/m}^3$

- DASY5 Configuration:
- Probe: EX3DV4 - SN3887; ConvF(7.48, 7.48, 7.48) @ 2450 MHz; Calibrated: 10/22/2021
 - Sensor-Surface: 3mm (Mechanical Surface Detection)
 - Electronics: DAE3 Sn393; Calibrated: 4/9/2021
 - Phantom: ELI-Righr-ELI V8.0 (20deg probe tilt); Type: QD OVA 004 Ax; Serial: xxxxx
 - Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Pin=250mW/Area Scan (61x61x1): Interpolated grid: $dx=1.200 \text{ mm}$, $dy=1.200 \text{ mm}$
Maximum value of SAR (interpolated) = 18.6 W/kg

Pin=250mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$
Reference Value = 98.42 V/m; Power Drift = -0.03 dB
Peak SAR (extrapolated) = 28.7 W/kg
SAR(1 g) = 13.9 W/kg; SAR(10 g) = 6.54 W/kg
Smallest distance from peaks to all points 3 dB below = 9.8 mm
Ratio of SAR at M2 to SAR at M1 = 49.8%
Maximum value of SAR (measured) = 18.3 W/kg

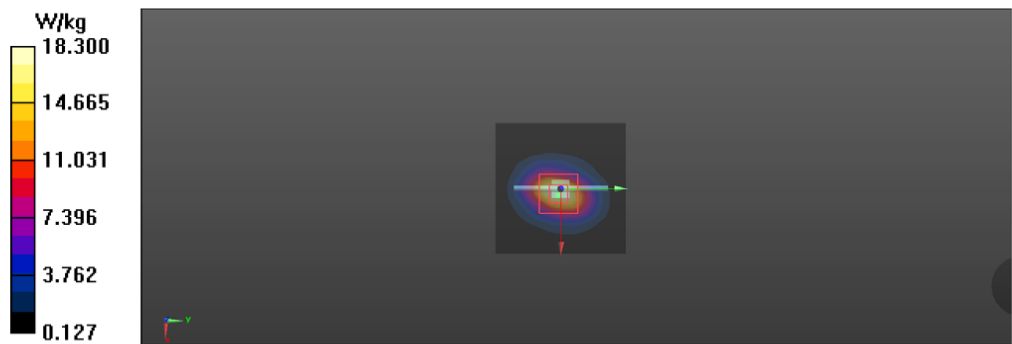

Test Laboratory: BACL SAR Testing Lab

System Check_Head_5250MHz

DUT: D5GHzV2-1336-5250

Communication System: UID 0, CW (0); Frequency: 5250 MHz; Duty Cycle: 1:1


Medium: HSL_5G Medium parameters used: $f = 5250$ MHz; $\sigma = 4.7$ S/m; $\epsilon_r = 35.092$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(4.8, 4.8, 4.8) @ 5250 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: ELI-Righr-ELI V8.0 (20deg probe tilt); Type: QD OVA 004 Ax; Serial: xxxx
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Pin=100mW/Area Scan (71x71x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm
Maximum value of SAR (interpolated) = 19.7 W/kg

Pin=100mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=1.4$ mm
Reference Value = 69.27 V/m; Power Drift = -0.10 dB
Peak SAR (extrapolated) = 31.9 W/kg
SAR(1 g) = 8.14 W/kg; SAR(10 g) = 2.26 W/kg
Smallest distance from peaks to all points 3 dB below = 7.4 mm
Ratio of SAR at M2 to SAR at M1 = 65.3%
Maximum value of SAR (measured) = 20.2 W/kg

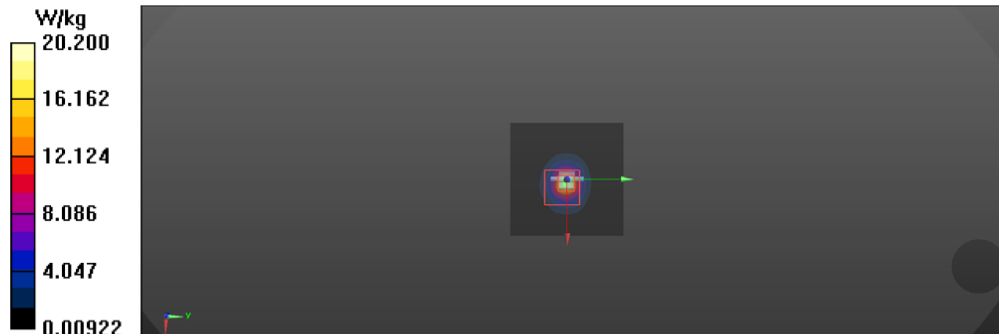

Test Laboratory: BACL SAR Testing Lab

System Check_Head_5800MHz

DUT: D5GHzV2-1336-5800

Communication System: UID 0, CW (0); Frequency: 5800 MHz; Duty Cycle: 1:1

Medium: HSL_5G Medium parameters used: $f = 5800$ MHz; $\sigma = 5.378$ S/m; $\epsilon_r = 33.978$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3887; ConvF(4.39, 4.39, 4.39) @ 5800 MHz; Calibrated: 10/22/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn393; Calibrated: 4/9/2021
- Phantom: ELI-Righr-ELI V8.0 (20deg probe tilt); Type: QD OVA 004 Ax; Serial: xxxx
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Pin=100mW/Area Scan (71x71x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 21.4 W/kg

Pin=100mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 66.97 V/m; Power Drift = -0.04 dB


Peak SAR (extrapolated) = 37.3 W/kg

SAR(1 g) = 8.31 W/kg; SAR(10 g) = 2.29 W/kg

Smallest distance from peaks to all points 3 dB below = 7.5 mm

Ratio of SAR at M2 to SAR at M1 = 61.3%

Maximum value of SAR (measured) = 21.6 W/kg

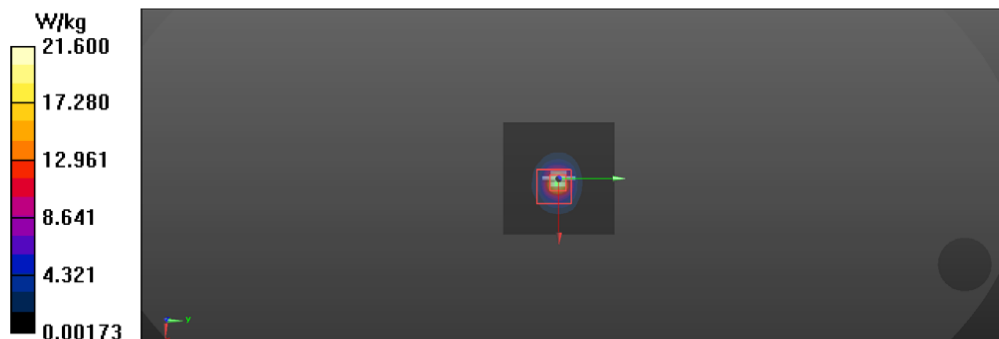


EUT TEST STRATEGY AND METHODOLOGY

Test Positions for Device Operating Next to a Person's Ear

This category includes most wireless handsets with fixed, retractable or internal antennas located toward the top half of the device, with or without a foldout, sliding or similar keypad cover. The handset should have its earpiece located within the upper $\frac{1}{4}$ of the device, either along the centerline or off-centered, as perceived by its users. This type of handset should be positioned in a normal operating position with the "test device reference point" located along the "vertical centerline" on the front of the device aligned to the "ear reference point". The "test device reference point" should be located at the same level as the center of the earpiece region. The "vertical centerline" should bisect the front surface of the handset at its top and bottom edges. A "ear reference point" is located on the outer surface of the head phantom on each ear spacer. It is located 1.5 cm above the center of the ear canal entrance in the "phantom reference plane" defined by the three lines joining the center of each "ear reference point" (left and right) and the tip of the mouth.

A handset should be initially positioned with the earpiece region pressed against the ear spacer of a head phantom. For the SCC-34/SC-2 head phantom, the device should be positioned parallel to the "N-F" line defined along the base of the ear spacer that contains the "ear reference point". For interim head phantoms, the device should be positioned parallel to the cheek for maximum RF energy coupling. The "test device reference point" is aligned to the "ear reference point" on the head phantom and the "vertical centerline" is aligned to the "phantom reference plane". This is called the "initial ear position". While maintaining these three alignments, the body of the handset is gradually adjusted to each of the following positions for evaluating SAR:

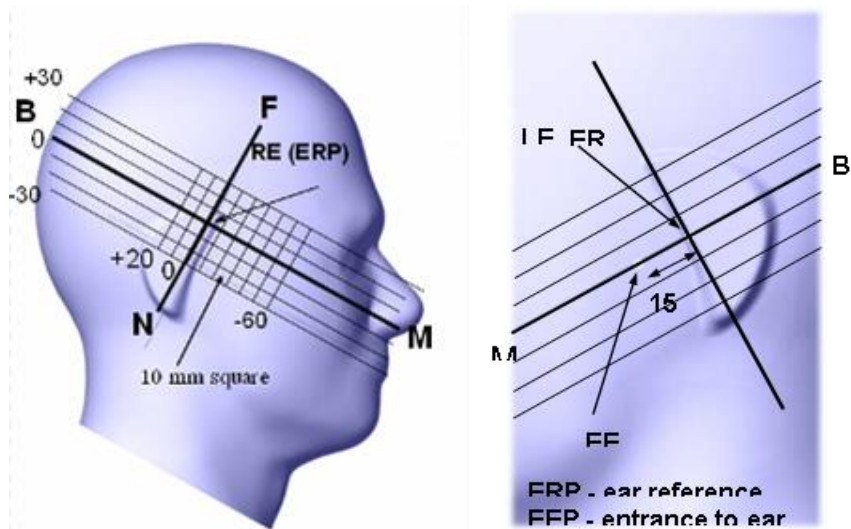

Cheek/Touch Position

The device is brought toward the mouth of the head phantom by pivoting against the "ear reference point" or along the "N-F" line for the SCC-34/SC-2 head phantom.


This test position is established:

When any point on the display, keypad or mouthpiece portions of the handset is in contact with the phantom.

(or) When any portion of a foldout, sliding or similar keypad cover opened to its intended self-adjusting normal use position is in contact with the cheek or mouth of the phantom.

For existing head phantoms – when the handset loses contact with the phantom at the pivoting point, rotation should continue until the device touches the cheek of the phantom or breaks its last contact from the ear spacer.

Cheek /Touch Position

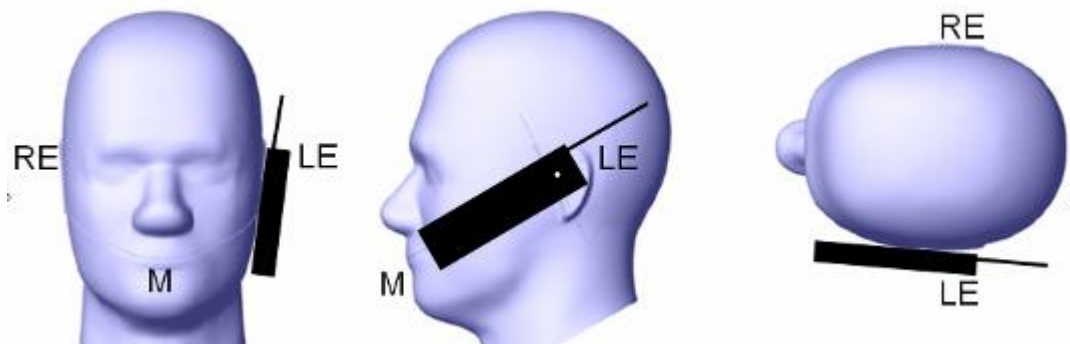

Ear/Tilt Position


With the handset aligned in the “Cheek/Touch Position”:

1) If the earpiece of the handset is not in full contact with the phantom’s ear spacer (in the “Cheek/Touch position”) and the peak SAR location for the “Cheek/Touch” position is located at the ear spacer region or corresponds to the earpiece region of the handset, the device should be returned to the “initial ear position” by rotating it away from the mouth until the earpiece is in full contact with the ear spacer.

2) (otherwise) The handset should be moved (translated) away from the cheek perpendicular to the line passes through both “ear reference points” (note: one of these ear reference points may not physically exist on a split head model) for approximate 2-3 cm. While it is in this position, the device handset is tilted away from the mouth with respect to the “test device reference point” until the inside angle between the vertical centerline on the front surface of the phone and the horizontal line passing through the ear reference point is by 15 80°. After the tilt, it is then moved (translated) back toward the head perpendicular to the line passes through both “ear reference points” until the device touches the phantom or the ear spacer. If the antenna touches the head first, the positioning process should be repeated with a tilt angle less than 15° so that the device and its antenna would touch the phantom simultaneously. This test position may require a device holder or positioner to achieve the translation and tilting with acceptable positioning repeatability.

If a device is also designed to transmit with its keypad cover closed for operating in the head position, such positions should also be considered in the SAR evaluation. The device should be tested on the left and right side of the head phantom in the “Cheek/Touch” and “Ear/Tilt” positions. When applicable, each configuration should be tested with the antenna in its fully extended and fully retracted positions. These test configurations should be tested at the high, middle and low frequency channels of each operating mode; for example, AMPS, CDMA, and TDMA. If the SAR measured at the middle channel for each test configuration (left, right, Cheek/Touch, Tilt/Ear, extended and retracted) is at least 2.0 dB lower than the SAR limit, testing at the high and low channels is optional for such test configuration(s). If the transmission band of the test device is less than 10 MHz, testing at the high and low frequency channels is optional.

Ear /Tilt 15o Position

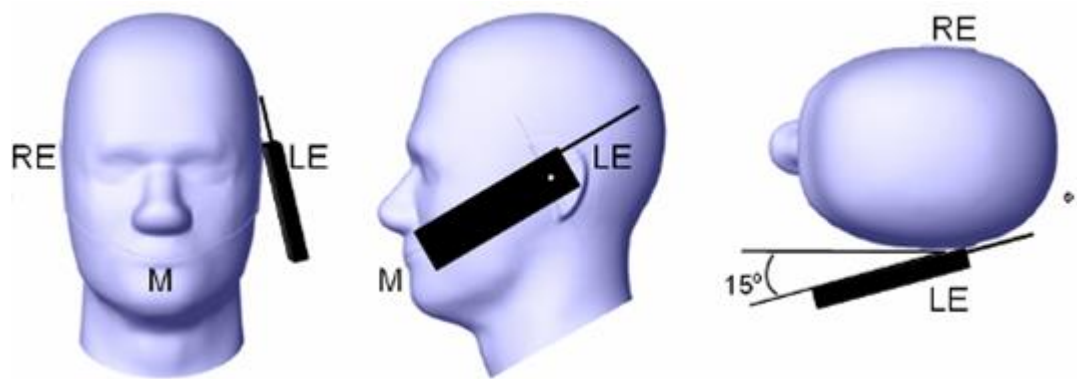

Test positions for body-worn and other configurations

Body-worn operating configurations should be tested with the belt-clips and holsters attached to the device and positioned against a flat phantom in normal use configurations. Devices with a headset output should be tested with a headset connected to the device. When multiple accessories that do not contain metallic components are supplied with the device, the device may be tested with only the accessory that dictates the closest spacing to the body. When multiple accessories that contain metallic components are supplied with the device, the device must be tested with each accessory that contains a unique metallic component. If multiple accessories share an identical metallic component (e.g., the same metallic belt-clip used with different holsters with no other metallic components), only the accessory that dictates the closest spacing to the body must be tested.

Body-worn accessories may not always be supplied or available as options for some devices that are intended to be authorized for body-worn use. A separation distance of 1.5 cm between the back of the device and a flat phantom is recommended for testing body-worn SAR compliance under such circumstances. Other separation distances may be used, but they should not exceed 2.5 cm. In these cases, the device may use body-worn accessories that provide a separation distance greater than that tested for the device provided however that the accessory contains no metallic components.

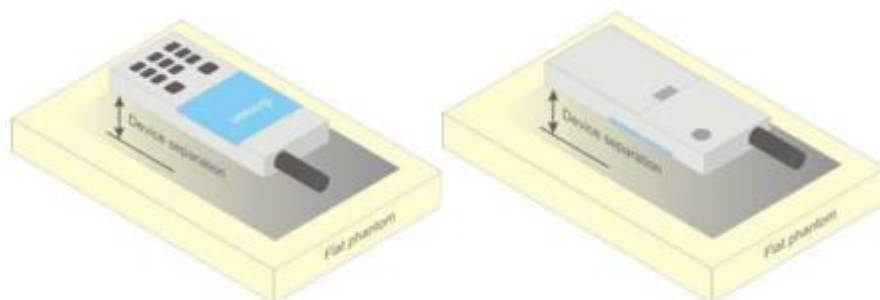


Figure 5 – Test positions for body-worn devices

Test Distance for SAR Evaluation

For this case the EUT(Equipment Under Test) is set 10mm away from the phantom, the test distance is 10mm.

SAR Evaluation Procedure

The evaluation was performed with the following procedure:

Step 1: Measurement of the SAR value at a fixed location above the ear point or central position was used as a reference value for assessing the power drop. The SAR at this point is measured at the start of the test and then again at the end of the testing.

Step 2: The SAR distribution at the exposed side of the head was measured at a distance of 4 mm from the inner surface of the shell. The area covered the entire dimension of the head or radiating structures of the EUT, the horizontal grid spacing was 15 mm x 15 mm, and the SAR distribution was determined by integrated grid of 1.5mm x 1.5mm. Based on these data, the area of the maximum absorption was determined by spline interpolation. The first Area Scan covers the entire dimension of the EUT to ensure that the hotspot was correctly identified.

Step 3: Around this point, a volume of 30 mm x 30 mm x 30 mm was assessed by measuring 7x 7 x 7 points. On the basis of this data set, the spatial peak SAR value was evaluated under the following procedure:

- 1) The data at the surface were extrapolated, since the center of the dipoles is 1.2 mm away from the tip of the probe and the distance between the surface and the lowest measuring point is 1.3 mm. The extrapolation was based on a least square algorithm. A polynomial of the fourth order was calculated through the points in z-axes. This polynomial was then used to evaluate the points between the surface and the probe tip.

- 2) The maximum interpolated value was searched with a straightforward algorithm. Around this maximum the SAR values averaged over the spatial volumes (1 g or 10 g) were computed by the 3D-Spline interpolation algorithm. The 3D-Spline is composed of three one dimensional splines with the "Not a knot"-condition (in x, y and z-directions). The volume was integrated with the trapezoidal-algorithm. One thousand points (10 x 10 x 10) were interpolated to calculate the averages.

All neighboring volumes were evaluated until no neighboring volume with a higher average value was found.

Step 4: Re-measurement of the SAR value at the same location as in Step 1. If the value changed by more than 5%, the evaluation was repeated.


CONDUCTED OUTPUT POWER MEASUREMENT

Provision Applicable

The measured peak output power should be greater and within 5% than EMI measurement.

Test Procedure

The RF output of the transmitter was connected to the input of the EMI Test Receiver through sufficient attenuation.

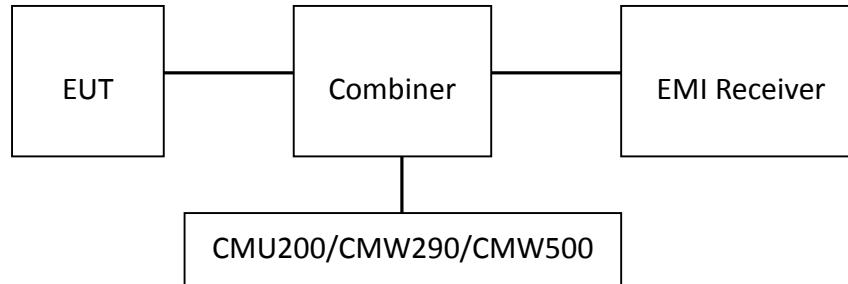

GSM & 3G & LTE

WCDMA Release 99

The following tests were conducted according to the test requirements outlines in section 5.2 of the 3GPP TS34.121-1 specification. The EUT has a nominal maximum output power of 24dBm (+1.7/-3.7).

WCDMA General Settings	Loopback Mode	Test Mode 1
	Rel99 RMC	12.2kbps RMC
	Power Control Algorithm	Algorithm2
	β_c / β_d	8/15

HSDPA

The following tests were conducted according to the test requirements outlines in section 5.2 of the 3GPP TS34.121-1 specification.

	Mode Subset	HSDPA 1	HSDPA 2	HSDPA 3	HSDPA 4
WCDMA General Settings	Loopback Mode	Test Mode 1			
	Rel99 RMC	12.2kbps RMC			
	HSDPA FRC	H-Set1			
	Power Control Algorithm	Algorithm2			
	β_c	2/15	12/15	15/15	15/15
	β_d	15/15	15/15	8/15	4/15
	β_d (SF)	64			
	β_c/β_d	2/15	12/15	15/8	15/4
	β_{hs}	4/15	24/15	30/15	30/15
	MPR(dB)	0	0	0.5	0.5
HSDPA Specific Settings	DACK	8			
	DNAK	8			
	DCQI	8			
	Ack-Nack repetition factor	3			
	CQI Feedback	4ms			
	CQI Repetition Factor	2			
	$A_{hs} = \beta_{hs} / \beta_c$	30/15			

HSUPA

The following tests were conducted according to the test requirements outlines in section 5.2 of the 3GPP TS34.121-1 specification.

	Mode	HSUPA	HSUPA	HSUPA	HSUPA	HSUPA
	Subset	1	2	3	4	5
WCDMA General Settings	Loopback Mode	Test Mode 1				
	Rel99 RMC	12.2kbps RMC				
	HSDPA FRC	H-Set1				
	HSUPA Test	HSUPA Loopback				
	Power Control Algorithm	Algorithm2				
	β_c	11/15	6/15	15/15	2/15	15/15
	β_d	15/15	15/15	9/15	15/15	0
	β_{ec}	209/225	12/15	30/15	2/15	5/15
	β_c/β_d	11/15	6/15	15/9	2/15	-
	β_{hs}	22/15	12/15	30/15	4/15	5/15
	CM(dB)	1.0	3.0	2.0	3.0	1.0
	MPR(dB)	0	2	1	2	0
HSDPA Specific Settings	DACK	8				
	DNAK	8				
	DCQI	8				
	Ack-Nack repetition factor	3				
	CQI Feedback	4ms				
	CQI Repetition Factor	2				
	$A_{hs}=\beta_{hs}/\beta_c$	30/15				
HSUPA Specific Settings	DE-DPCCH	6	8	8	5	7
	DHARQ	0	0	0	0	0
	AG Index	20	12	15	17	21
	ETFCI	75	67	92	71	81
	Associated Max UL Data Rate kbps	242.1	174.9	482.8	205.8	308.9
	Reference E_FCI	E-TFCI 11 E E-TFCI PO 4 E-TFCI 67 E-TFCI PO 18 E-TFCI 71 E-TFCI PO23 E-TFCI 75 E-TFCI PO26 E-TFCI 81 E-TFCI PO 27	E-TFCI 11 E-TFCI PO4 E-TFCI 92 E-TFCI PO 18	E-TFCI 11 E E-TFCI PO 4 E-TFCI 67 E-TFCI PO 18 E-TFCI 71 E-TFCI PO23 E-TFCI 75 E-TFCI PO26 E-TFCI 81 E-TFCI PO 27	E-TFCI 11 E E-TFCI PO 4 E-TFCI 67 E-TFCI PO 18 E-TFCI 71 E-TFCI PO23 E-TFCI 75 E-TFCI PO26 E-TFCI 81 E-TFCI PO 27	E-TFCI 11 E E-TFCI PO 4 E-TFCI 67 E-TFCI PO 18 E-TFCI 71 E-TFCI PO23 E-TFCI 75 E-TFCI PO26 E-TFCI 81 E-TFCI PO 27

DC-HSDPA

The following tests were conducted according to the test requirements in Table C.8.1.12 of 3GPP TS 34.121-1

Table C.8.1.12: Fixed Reference Channel H-Set 12

Parameter	Unit	Value
Nominal Avg. Inf. Bit Rate	kbps	60
Inter-TTI Distance	TTI's	1
Number of HARQ Processes	Processes	6
Information Bit Payload (N_{BF})	Bits	120
Number Code Blocks	Blocks	1
Binary Channel Bits Per TTI	Bits	960
Total Available SML's in UE	SML's	19200
Number of SML's per HARQ Proc.	SML's	3200
Coding Rate		0.15
Number of Physical Channel Codes	Codes	1
Modulation		QPSK
Note 1: The RMC is intended to be used for DC-HSDPA mode and both cells shall transmit with identical parameters as listed in the table.		
Note 2: Maximum number of transmission is limited to 1, i.e., retransmission is not allowed. The redundancy and constellation version 0 shall be used.		

HSPA+

Sub-test	β_c (Note 3)	β_d	β_{HS} (Note 1)	β_{ec}	β_{ed} (2xSF2) (Note 4)	β_{ed} (2xSF4) (Note 4)	CM (dB) (Note 2)	MPR (dB) (Note 2)	AG Index (Note 4)	E-TFCI (Note 5)	E-TFCI (boost)
1	1	0	30/15	30/15	β_{ed1} : 30/15 β_{ed2} : 30/15	β_{ed3} : 24/15 β_{ed4} : 24/15	3.5	2.5	14	105	105
Note 1: Δ_{ACK} , Δ_{NACK} and $\Delta_{CQI} = 30/15$ with $\beta_{hs} = 30/15 * \beta_c$. Note 2: CM = 3.5 and the MPR is based on the relative CM difference, MPR = MAX(CM-1,0). Note 3: DPDCH is not configured, therefore the β_c is set to 1 and $\beta_d = 0$ by default. Note 4: β_{ed} can not be set directly; it is set by Absolute Grant Value. Note 5: All the sub-tests require the UE to transmit 2SF2+2SF4 16QAM EDCH and they apply for UE using E-DPDCH category 7. E-DCH TTI is set to 2ms TTI and E-DCH table index = 2. To support these E-DCH configurations DPDCH is not allocated. The UE is signalled to use the extrapolation algorithm.											

The following tests were conducted according to the test requirements in Table C.11.1.4 of 3GPP TS 34.121-1

LTE

For UE Power Class 1 and 3, the allowed Maximum Power Reduction (MPR) for the maximum output power in Table 6.2.2-1 due to higher order modulation and transmit bandwidth configuration (resource blocks) is specified in Table 6.2.3-1.

Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 1 and 3

Modulation	Channel bandwidth / Transmission bandwidth (N_{RB})						MPR (dB)
	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz	
QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1
16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1
16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2

For UE Power Class 1 and 3 the specific requirements and identified subclauses are specified in Table 6.2.4-1 along with the allowed A-MPR values that may be used to meet these requirements. The allowed A-MPR values specified below in Table 6.2.4-1 to 6.2.4-15 are in addition to the allowed MPR requirements specified in subclause

Table 6.2.4-1: Additional Maximum Power Reduction (A-MPR)

Network Signalling value	Requirements (subclause)	E-UTRA Band	Channel bandwidth (MHz)	Resources Blocks (N_{RB})	A-MPR (dB)
NS_01	6.6.2.1.1	Table 5.5-1	1.4, 3, 5, 10, 15, 20	Table 5.6-1	N/A
NS_03	6.6.2.2.1	2, 4, 10, 23, 25, 35, 36	3	>5	≤ 1
			5	>6	≤ 1
			10	>6	≤ 1
			15	>8	≤ 1
NS_04	6.6.2.2.2	41	20	>10	≤ 1
			5	>6	≤ 1
NS_05	6.6.3.3.1	1	10, 15, 20	≥ 50	≤ 1
NS_06	6.6.2.2.3	12, 13, 14, 17	1.4, 3, 5, 10	Table 5.6-1	N/A
NS_07	6.6.2.2.3	13	10	Table 6.2.4-2	
NS_08	6.6.3.3.3	19	10, 15	> 44	≤ 3
				> 40	≤ 1
NS_09	6.6.3.3.4	21	10, 15	> 55	≤ 2
				Table 6.2.4-3	
NS_10		20	15, 20	Table 6.2.4-3	
NS_11	6.6.2.2.1	23	1.4, 3, 5, 10, 15, 20	Table 6.2.4-5	
NS_12	6.6.3.3.5	26	1.4, 3, 5	Table 6.2.4-6	
NS_13	6.6.3.3.6	26	5	Table 6.2.4-7	
NS_14	6.6.3.3.7	26	10, 15	Table 6.2.4-8	
NS_15	6.6.3.3.8	26	1.4, 3, 5, 10, 15	Table 6.2.4-9	
				Table 6.2.4-10	
NS_16	6.6.3.3.9	27	3, 5, 10	Table 6.2.4-11, Table 6.2.4-12, Table 6.2.4-13	
NS_17	6.6.3.3.10	28	5, 10	Table 5.6-1	N/A
NS_18	6.6.3.3.11	28	5	≥ 2	≤ 1
			10, 15, 20	≥ 1	≤ 4
NS_19	6.6.3.3.12	44	10, 15, 20	Table 6.2.4-14	
NS_20	6.2.2	23	5, 10, 15, 20	Table 6.2.4-15	
	6.6.2.2.1				
...	6.6.3.2				
NS_32	-	-	-	-	-

Uplink-Downlink Configuration	Downlink-to-Uplink Switch-Point Periodicity	Subframe Number									
		0	1	2	3	4	5	6	7	8	9
0	5 ms	D	S	U	U	U	D	S	U	U	U
1	5 ms	D	S	U	U	D	D	S	U	U	D
2	5 ms	D	S	U	D	D	D	S	U	D	D
3	10 ms	D	S	U	U	U	D	D	D	D	D
4	10 ms	D	S	U	U	D	D	D	D	D	D
5	10 ms	D	S	U	D	D	D	D	D	D	D
6	5 ms	D	S	U	U	U	D	S	U	U	D

3GPP TS 36.211 Uplink-Downlink Configurations

The variety of different TD-LTE uplink-downlink configurations allows a network operator to allocate the network's capacity between uplink and downlink traffic to meet the needs of the network. The uplink duty cycle of these seven configurations can readily be computed and shown in below.


UL-DL Configuration	0	1	2	3	4	5	6
Highest Duty-Cycle	63.33%	43.33%	23.33%	31.67%	21.67%	11.67%	53.33%

Considering the highest transmission duty cycle, TDD-LTE was tested using Uplink-Downlink Configuration 0 with 6 uplink subframe and 2 special subframe. The special subframe was set to special subframe configuration 7 using extended cyclic prefix uplink. Therefore, SAR testing for TDD-LTE was performed at the maximum output power with highest transmission duty cycle of 63.33%.

Proximity Sensor Operation

Triggering distances (Per KDB 616717)

1. Proximity sensor triggering distance testing was performed according to the procedures outlined in KDB 616217 D04 section 6.2, and EUT moving further away from the flat phantom and EUT moving toward the flat phantom were both assessed and the tissue-equivalent medium for highest frequency (6000MHz) and lowest (600MHz) frequency was used for proximity sensor triggering testing. It should be applied to determine proximity sensor triggering distances for the back surface and individual edges of a tablet.
2. Capacitive proximity sensor placed coincident with antenna elements at the left end of the pad are utilized to determine when the device comes in proximity of the user's body at the front or back or left side surface of the device. There is no need to do sensor coverage testing for the proximity sensor is designed to support. sufficient detection range and sensitivity to cover regions of the sensors in all applicable directions since the proximity sensor entirely covers the antenna.
3. The device employs proximity sensors that detect the presence of the user's body or handhold at the the front or back or left side of the device. When back surface or edge of body worn condition is detected, WCDMA II /WCDMA IV/ LTE Band 7 / LTE Band 12<E Band 17 / LTE Band 25<E Band 2 / LTE Band 66<E Band 4 reduced power will be active. Other mode or frequency band can't be active. (P-sensor can't work at detecting presence of the user's body at the bottom, top, right edges of the device.)

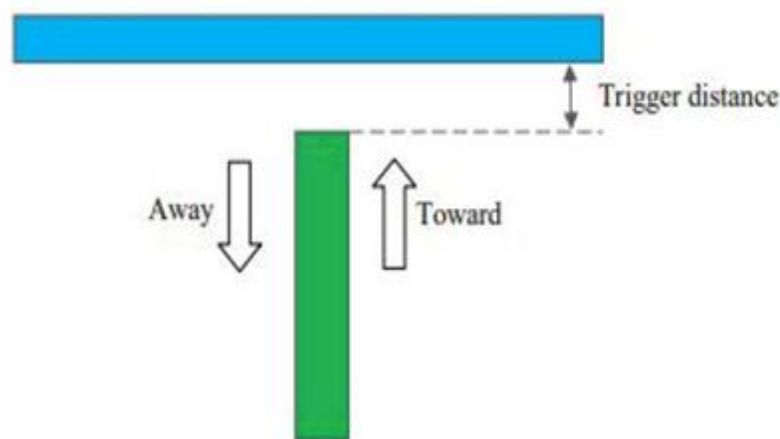

Proximity Sensor Triggering Distance(mm) and Triggering Power(dBm)

WCDMA Band II :

Distance		0	5	8	10	11	12	13	14	15	16	21	22	23	24	25	26	30
Front edge	Toward	13	13	13	13	13	13	13	23	23	23	23	23	23	23	23	23	23
	Away	13	13	13	13	13	13	13	13	13	23	23	23	23	23	23	23	23
Back edge	Toward	13	13	13	13	13	13	13	13	23	23	23	23	23	23	23	23	23
	Away	13	13	13	13	13	13	13	13	13	13	23	23	23	23	23	23	23
Left edge	Toward	13	13	13	13	13	13	13	13	13	13	13	13	13	13	23	23	23
	Away	13	13	13	13	13	13	13	13	13	13	13	13	13	13	13	13	23

WCDMA Band IV

Distance		0	5	8	10	11	12	13	14	15	16	21	22	23	24	25	26	30
Front edge	Toward	15.7	15.7	15.7	15.7	15.7	15.7	15.7	23	23	23	23	23	23	23	23	23	23
	Away	15.7	15.7	15.7	15.7	15.7	15.7	15.7	15.7	15.7	23	23	23	23	23	23	23	23
Back edge	Toward	15.7	15.7	15.7	15.7	15.7	15.7	15.7	15.7	23	23	23	23	23	23	23	23	23
	Away	15.7	15.7	15.7	15.7	15.7	15.7	15.7	15.7	15.7	15.7	23	23	23	23	23	23	23
Left edge	Toward	15.7	15.7	15.7	15.7	15.7	15.7	15.7	15.7	15.7	15.7	15.7	15.7	15.7	15.7	23	23	23
	Away	15.7	15.7	15.7	15.7	15.7	15.7	15.7	15.7	15.7	15.7	15.7	15.7	15.7	15.7	15.7	23	23

LTE Band 2 & 25 :

Distance		0	5	8	10	11	12	13	14	15	16	21	22	23	24	25	26	30
Front edge	Toward	12.7	12.7	12.7	12.7	12.7	12.7	12.7	22.8	22.8	22.8	22.8	22.8	22.8	22.8	22.8	22.8	22.8
	Away	12.7	12.7	12.7	12.7	12.7	12.7	12.7	12.7	12.7	22.8	22.8	22.8	22.8	22.8	22.8	22.8	22.8
Back edge	Toward	12.7	12.7	12.7	12.7	12.7	12.7	12.7	12.7	22.8	22.8	22.8	22.8	22.8	22.8	22.8	22.8	22.8
	Away	12.7	12.7	12.7	12.7	12.7	12.7	12.7	12.7	12.7	12.7	22.8	22.8	22.8	22.8	22.8	22.8	22.8
Left edge	Toward	12.7	12.7	12.7	12.7	12.7	12.7	12.7	12.7	12.7	12.7	12.7	12.7	12.7	12.7	22.8	22.8	22.8
	Away	12.7	12.7	12.7	12.7	12.7	12.7	12.7	12.7	12.7	12.7	12.7	12.7	12.7	12.7	12.7	22.8	22.8

LTE Band 4 & 66 :

Distance		0	5	8	10	11	12	13	14	15	16	21	22	23	24	25	26	30
Front edge	Toward	15.8	15.8	15.8	15.8	15.8	15.8	15.8	22.8	22.8	22.8	22.8	22.8	22.8	22.8	22.8	22.8	22.8
	Away	15.8	15.8	15.8	15.8	15.8	15.8	15.8	15.8	15.8	22.8	22.8	22.8	22.8	22.8	22.8	22.8	22.8
Back edge	Toward	15.8	15.8	15.8	15.8	15.8	15.8	15.8	15.8	22.8	22.8	22.8	22.8	22.8	22.8	22.8	22.8	22.8
	Away	15.8	15.8	15.8	15.8	15.8	15.8	15.8	15.8	15.8	15.8	22.8	22.8	22.8	22.8	22.8	22.8	22.8
Left edge	Toward	15.8	15.8	15.8	15.8	15.8	15.8	15.8	15.8	15.8	15.8	15.8	15.8	15.8	15.8	22.8	22.8	22.8
	Away	15.8	15.8	15.8	15.8	15.8	15.8	15.8	15.8	15.8	15.8	15.8	15.8	15.8	15.8	15.8	22.8	22.8

LTE Band 12 & 17 :

Distance		0	5	8	10	11	12	13	14	15	16	21	22	23	24	25	26	30
Front edge	Toward	19.7	19.7	19.7	19.7	19.7	19.7	19.7	22.8	22.8	22.8	22.8	22.8	22.8	22.8	22.8	22.8	22.8
	Away	19.7	19.7	19.7	19.7	19.7	19.7	19.7	19.7	19.7	22.8	22.8	22.8	22.8	22.8	22.8	22.8	22.8
Back edge	Toward	19.7	19.7	19.7	19.7	19.7	19.7	19.7	19.7	22.8	22.8	22.8	22.8	22.8	22.8	22.8	22.8	22.8
	Away	19.7	19.7	19.7	19.7	19.7	19.7	19.7	19.7	19.7	19.7	22.8	22.8	22.8	22.8	22.8	22.8	22.8
Left edge	Toward	19.7	19.7	19.7	19.7	19.7	19.7	19.7	19.7	19.7	19.7	19.7	19.7	19.7	19.7	22.8	22.8	22.8
	Away	19.7	19.7	19.7	19.7	19.7	19.7	19.7	19.7	19.7	19.7	19.7	19.7	19.7	19.7	19.7	22.8	22.8

LTE Band 7 :

Distance		0	5	8	10	11	12	13	14	15	16	21	22	23	24	25	26	30
Front edge	Toward	20.5	20.5	20.5	20.5	20.5	20.5	20.5	22.5	22.5	22.5	22.5	22.5	22.5	22.5	22.5	22.5	22.5
	Away	20.5	20.5	20.5	20.5	20.5	20.5	20.5	20.5	20.5	22.5	22.5	22.5	22.5	22.5	22.5	22.5	22.5
Back edge	Toward	20.5	20.5	20.5	20.5	20.5	20.5	20.5	20.5	22.5	22.5	22.5	22.5	22.5	22.5	22.5	22.5	22.5
	Away	20.5	20.5	20.5	20.5	20.5	20.5	20.5	20.5	20.5	20.5	22.5	22.5	22.5	22.5	22.5	22.5	22.5
Left edge	Toward	20.5	20.5	20.5	20.5	20.5	20.5	20.5	20.5	20.5	20.5	20.5	20.5	20.5	20.5	22.5	22.5	22.5
	Away	20.5	20.5	20.5	20.5	20.5	20.5	20.5	20.5	20.5	20.5	20.5	20.5	20.5	20.5	20.5	22.5	22.5

Note: each side minimum detection distance was performed with below:

Toward: moving toward the phantom

Away: Moving away from the phantom

Summary of Trigger distances :


Band	Back edge (mm)		Front edge (mm)		Left edge (mm)	
	Toward	Away	Toward	Away	Toward	Away
LTE Band	14	16	13	15	24	25

Note: The SAR sensor located in WCDMA II / WCDMA IV/ LTE Band 7 / LTE Band 12 & LTE Band 17/ LTE Band 25& LTE Band 2 / LTE Band 66& LTE Band 4 antenna.

Tilt Angle:

The influence of device tilt angles to proximity sensor triggering was determined by positioning each device edge that contains a transmitting antenna, perpendicular to the flat phantom, at 12 mm separation.

Rotating the device around the edge next to the phantom in $\leq 10^\circ$ increments until the device is $\pm 45^\circ$ from the vertical position at 0° . And the maximum output power remains in the reduced mode.

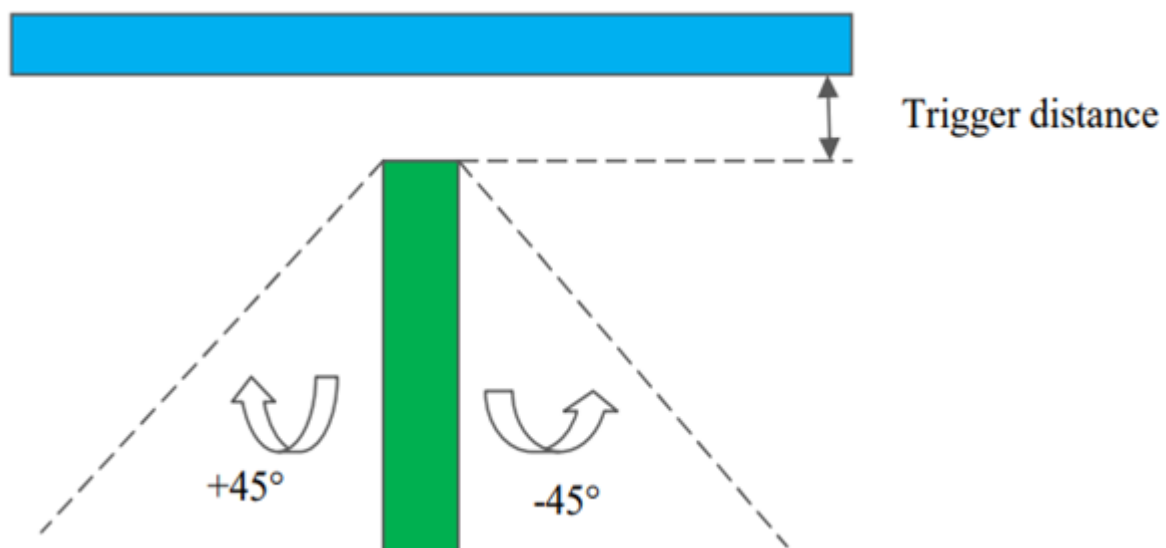

Proximity Sensor Status Table :

Minimum Distance(mm)	-45	-40	-30	-20	-10	0	10	20	30	40	45
13	on	on	on	on	on	on	on	on	on	on	on

Wireless Technologies	Position	Triggering Distance(mm)	Worst case distance For SAR(mm)
WWAN	Front	13	12
	Back	14	13
	Left	24	23

Maximum Target Output Power

Max Target Power(dBm)			
Mode / Band	Low Channel	Middle Channel	High Channel
WCDMA Band 2	23.0	23.0	23.0
WCDMA Band 4	23.0	23.0	23.0
WCDMA Band 5	23.0	23.0	23.0
LTE Band 2 & 25	22.8	22.8	22.8
LTE Band 66 & 4	22.8	22.8	22.8
LTE Band 7	22.5	22.5	22.5
LTE Band 12 & 17	22.8	22.8	22.8
LTE Band 13	22.8	22.8	22.8
LTE Band 14	22.8	22.8	22.8
LTE Band 26	22.8	22.8	22.8
LTE Band 41	22.5	22.5	22.5
LTE Band 71	22.8	22.8	22.8
WiFi 2.4GHz_Chain 0	13.6	13.3	12.7
WiFi 2.4GHz_Chain 1	13.3	13.3	13.3
Bluetooth	11.0	11.0	11.0
Bluetooth LE	0.5	0.5	0.5
WiFi 5.2GHz_Chain 0	9.	8.8	9
WiFi 5.2GHz_Chain 1	10	10	10
WiFi 5.8GHz_Chain 0	8	8	8
WiFi 5.8GHz_Chain 1	8.1	8.1	8.1

Reduction Target Power

Max Target Power(dBm)			
Mode / Band	Low Channel	Middle Channel	High Channel
WCDMA Band 2	13	13	13
WCDMA Band 4	15.7	15.7	15.7
LTE Band 2	12.7	12.7	12.7
LTE Band 4	15.8	15.8	15.8
LTE Band 7	20.5	20.5	20.5
LTE Band 12	19.7	19.7	19.7
LTE Band 17	19.7	19.7	19.7
LTE Band 25	12.7	12.7	12.7
LTE Band 66	15.8	15.8	15.8

Test Results**Channel List****WCDMA**

WCDMA Band	Lowest Frequency (MHz)	Middle Frequency (MHz)	Highest Frequency (MHz)
II	1852.4	1880	1907.6
IV	1712.4	1732.6	1752.6
V	826.4	836.6	846.6

LTE

LTE Band	Operation Bandwidth(MHz)	Lowest Frequency(MHz)	Middle Frequency(MHz)	Highest Frequency(MHz)
2	1.4	1850.7	1880	1909.3
	3	1851.5	1880	1908.5
	5	1852.5	1880	1907.5
	10	1855	1880	1905
	15	1857.5	1880	1902.5
	20	1860	1880	1900
4	1.4	1710.7	1732.5	1754.3
	3	1711.5	1732.5	1753.5
	5	1712.5	1732.5	1752.5
	10	1715	1732.5	1750
	15	1717.5	1732.5	1747.5
	20	1720	1732.5	1745
7	5	2502.5	2535	2567.5
	10	2505	2535	2565
	15	2507.5	2535	2562.5
	20	2510	2535	2560
12	1.4	699.7	707.5	715.3
	3	700.5	707.5	714.5
	5	701.5	707.5	713.5
	10	704	707.5	711

LTE Band		Operation Bandwidth(MHz)		Lowest Frequency(MHz)		Middle Frequency(MHz)		Highest Frequency(MHz)		
13		5		779.5		782		784.5		
		10		---		782		---		
14		5		790.5		793		795.5		
		10		---		793		---		
17		5		706.5		710		713.5		
		10		709		710		711		
25		1.4		1850.7		1882.5		1914.3		
		3		1851.5		1882.5		1913.5		
		5		1852.5		1882.5		1912.5		
		10		1855		1882.5		1910		
		15		1857.5		1882.5		1907.5		
		20		1860		1882.5		1905		
26		1.4		814.7		831.5		848.3		
		3		815.5		831.5		847.5		
		5		816.5		831.5		846.5		
		10		819		831.5		844		
		15		821.5		831.5		841.5		
66		1.4		1710.7		1745		1779.3		
		3		1711.5		1745		1778.5		
		5		1712.5		1745		1777.5		
		10		1715		1745		1775		
		15		1717.5		1745		1775.5		
		20		1720		1745		1770		
71		5		665.5		680.5		695.5		
		10		668		680.5		693		
		15		670.5		680.5		690.5		
		20		673		680.5		688		
LTE Band	Operation Bandwidth (MHz)		Lowest Frequency (MHz)		Low Frequency (MHz)		Middle Frequency (MHz)		Highest Frequency (MHz)	
41	5		2498.5		2545.8		2595		2687.5	
	10		2501		2547		2595		2685	
	15		2595		2548.3		2595		2682.5	
	20		2580		2593		2605		2645	

Note: It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. (New Taipei Laboratory)

WCDMA WWAN Antenna Full Power**WCDMA Band II**

Test Condition	Test Mode	3GPP Sub Test	Averaged Mean Power (dBm)		
			Low Channel	Mid Channel	High Channel
Normal	Rel 99 RMC	1	22.33	22.84	22.52
	HSDPA	1	22.25	21.99	22.01
		2	22.24	21.91	22.05
		3	22.01	21.89	22.07
		4	21.99	21.95	22.11
	HSUPA	1	22.11	21.92	22.02
		2	22.14	21.99	21.98
		3	22.13	21.85	22.15
		4	22.22	21.91	22.12
		5	22.14	22.03	22.02
	HSPA+	1	22.03	21.98	22.05

Note:

1. The default test configuration is to measure SAR with an established radio link between the EUT and a communication test set using a 12.2 kbps RMC (reference measurement Channel) Configured in Test Loop Model 1.
2. KDB 941225 D01-Body SAR is not required for HSDPA/HSUPA/HSPA+ when the maximum average output of each RF channel is less than $\frac{1}{4}$ dB higher than measured 12.2kbps RMC or the maximum SAR for 12.2kbps RMC is < 75% of SAR limit.

WCDMA Band IV

Test Condition	Test Mode	3GPP Sub Test	Averaged Mean Power (dBm)		
			Low Channel	Mid Channel	High Channel
Normal	Rel 99 RMC	1	22.24	22.68	22.53
	HSDPA	1	22.22	21.98	22.09
		2	22.20	21.99	21.98
		3	22.17	21.98	22.09
		4	22.12	22.11	22.03
	HSUPA	1	22.09	22.01	22.13
		2	22.16	21.90	22.15
		3	22.15	21.99	22.02
		4	22.31	21.91	22.05
		5	22.08	21.90	21.98
	HSPA+	1	22.11	21.94	22.14

Note:

1. The default test configuration is to measure SAR with an established radio link between the EUT and a communication test set using a 12.2 kbps RMC (reference measurement Channel) Configured in Test Loop Model 1.
2. KDB 941225 D01-Body SAR is not required for HSDPA/HSUPA/HSPA+ when the maximum average output of each RF channel is less than $\frac{1}{4}$ dB higher than measured 12.2kbps RMC or the maximum SAR for 12.2kbps RMC is < 75% of SAR limit.

WCDMA Band V

Test Condition	Test Mode	3GPP Sub Test	Averaged Mean Power (dBm)		
			Low Channel	Mid Channel	High Channel
Normal	Rel 99 RMC	1	22.56	22.75	22.36
	HSDPA	1	21.85	21.94	22.06
		2	21.95	21.97	21.98
		3	21.91	21.92	21.99
		4	22.03	22.00	21.89
	HSUPA	1	22.02	22.02	21.99
		2	21.79	22.06	21.97
		3	21.88	21.88	21.89
		4	21.87	21.85	21.91
		5	21.78	22.04	22.03
	HSPA+	1	21.89	21.88	22.05

Note:

1. The default test configuration is to measure SAR with an established radio link between the EUT and a communication test set using a 12.2 kbps RMC (reference measurement Channel) Configured in Test Loop Model 1.
2. KDB 941225 D01-Body SAR is not required for HSDPA/HSUPA/HSPA+ when the maximum average output of each RF channel is less than $\frac{1}{4}$ dB higher than measured 12.2kbps RMC or the maximum SAR for 12.2kbps RMC is < 75% of SAR limit.

LTE:**Full Power****LTE Band 2 part1:**

Test Bandwidth	Test Modulation	Resource Block & RB offset	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
1.4M	QPSK	RB1#0	21.62	21.88	21.79
		RB1#3	21.56	21.87	21.88
		RB1#5	21.61	21.79	21.96
		RB3#0	21.57	21.76	22.05
		RB3#1	21.64	21.64	22.04
		RB3#3	21.59	21.69	22.03
		RB6#0	21.56	21.62	22.10
	16-QAM	RB1#0	21.60	21.66	21.92
		RB1#3	21.65	21.64	22.08
		RB1#5	21.52	21.66	21.92
		RB3#0	21.63	21.58	22.08
		RB3#1	21.65	21.60	22.16
		RB3#3	21.60	21.50	22.11
		RB6#0	21.52	21.37	22.04
3M	QPSK	RB1#0	21.54	21.46	21.96
		RB1#7	21.47	21.51	21.93
		RB1#14	21.41	21.62	22.07
		RB8#0	21.33	21.53	21.99
		RB8#4	21.20	21.57	22.17
		RB8#7	21.10	21.39	22.13
		RB15#0	21.09	21.34	22.13
	16-QAM	RB1#0	21.16	21.43	22.19
		RB1#7	21.15	21.38	22.26
		RB1#14	21.12	21.44	22.24
		RB8#0	21.16	21.47	22.31
		RB8#4	21.21	21.52	22.22
		RB8#7	21.10	21.51	22.23
		RB15#0	21.23	21.57	22.20

LTE Band 2 part2:

Test Bandwidth	Test Modulation	Resource Block & RB offset	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
5M	QPSK	RB1#0	21.19	21.58	22.21
		RB1#12	21.18	21.61	22.38
		RB1#24	21.21	21.71	22.33
		RB12#0	21.24	21.74	22.32
		RB12#6	21.23	21.78	22.39
		RB12#11	21.23	21.84	22.24
		RB25#0	21.32	21.75	22.30
	16-QAM	RB1#0	21.33	21.79	22.37
		RB1#12	21.44	21.70	21.17
		RB1#24	21.39	21.74	22.34
		RB12#0	21.43	21.71	22.27
		RB12#6	21.28	21.73	22.30
		RB12#11	21.23	21.77	22.32
		RB25#0	21.21	21.64	22.29
10M	QPSK	RB1#0	21.25	21.72	22.37
		RB1#24	21.28	21.70	22.23
		RB1#49	21.27	21.66	22.28
		RB25#0	21.15	21.71	22.25
		RB25#12	21.15	21.73	22.12
		RB25#24	21.13	21.76	22.15
		RB50#0	21.13	21.80	22.30
	16-QAM	RB1#0	21.07	21.84	22.20
		RB1#24	21.03	21.88	22.14
		RB1#49	21.04	21.88	22.11
		RB25#0	20.98	21.89	22.07
		RB25#12	20.91	21.91	21.94
		RB25#24	20.93	21.89	21.92
		RB50#0	20.87	21.89	21.88

LTE Band 2 part3:

Test Bandwidth	Test Modulation	Resource Block & RB offset	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
15M	QPSK	RB1#0	20.82	21.97	21.90
		RB1#37	20.85	21.84	21.88
		RB1#74	20.94	21.70	21.91
		RB36#0	20.86	21.77	21.84
		RB36#17	20.73	21.78	21.81
		RB36#35	20.70	21.79	21.75
		RB75#0	20.71	21.84	21.70
	16-QAM	RB1#0	20.70	21.79	21.69
		RB1#37	20.85	21.66	21.50
		RB1#74	20.86	21.74	21.54
		RB36#0	20.95	21.60	21.56
		RB36#17	20.92	21.70	21.70
		RB36#35	20.94	21.76	21.73
		RB75#0	20.86	21.85	21.76
20M	QPSK	RB1#0	22.28	22.42	22.40
		RB1#49	21.12	21.96	21.82
		RB1#99	21.01	21.92	21.87
		RB50#0	22.13	22.23	22.08
		RB50#24	20.93	21.98	21.93
		RB50#49	20.93	21.92	21.96
		RB100#0	20.93	22.05	21.94
	16-QAM	RB1#0	20.92	22.09	21.85
		RB1#49	20.76	22.26	21.88
		RB1#99	20.88	22.05	21.83
		RB50#0	20.85	22.02	21.76
		RB50#24	20.84	22.09	21.90
		RB50#49	20.86	22.07	21.89
		RB100#0	20.85	22.14	21.92

LTE Band 4 part1:

Test Bandwidth	Test Modulation	Resource Block & RB offset	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
1.4M	QPSK	RB1#0	21.58	21.90	21.75
		RB1#3	21.70	21.88	21.71
		RB1#5	21.70	21.87	21.65
		RB3#0	21.64	21.94	21.68
		RB3#1	21.64	21.91	21.58
		RB3#3	21.61	21.98	21.49
		RB6#0	21.63	21.90	21.54
	16-QAM	RB1#0	21.53	22.02	21.41
		RB1#3	21.44	22.05	21.35
		RB1#5	21.42	22.03	21.42
		RB3#0	21.52	22.06	21.40
		RB3#1	21.48	21.94	21.25
		RB3#3	21.33	21.96	21.15
		RB6#0	21.32	22.01	21.21
3M	QPSK	RB1#0	21.38	22.09	21.37
		RB1#7	21.31	22.16	21.29
		RB1#14	21.43	22.18	21.25
		RB8#0	21.33	22.26	21.29
		RB8#4	21.26	22.15	21.19
		RB8#7	21.20	22.19	21.10
		RB15#0	21.24	22.21	21.17
	16-QAM	RB1#0	21.19	22.13	21.22
		RB1#7	21.20	22.03	21.21
		RB1#14	21.25	22.02	21.16
		RB8#0	21.27	22.07	21.22
		RB8#4	21.18	22.16	21.19
		RB8#7	21.14	22.10	21.25
		RB15#0	21.16	22.10	21.28

LTE Band 4 part2:

Test Bandwidth	Test Modulation	Resource Block & RB offset	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
5M	QPSK	RB1#0	21.27	22.11	21.33
		RB1#12	21.28	21.99	21.44
		RB1#24	21.34	21.88	21.33
		RB12#0	21.38	21.86	21.40
		RB12#6	21.31	21.91	21.52
		RB12#11	21.36	21.99	21.47
		RB25#0	21.47	21.99	21.49
	16-QAM	RB1#0	21.47	21.84	21.37
		RB1#12	21.50	21.87	21.46
		RB1#24	21.38	21.95	21.41
		RB12#0	21.45	21.88	21.31
		RB12#6	21.57	21.91	21.42
		RB12#11	21.53	22.06	21.28
		RB25#0	21.48	22.05	21.44
10M	QPSK	RB1#0	21.56	21.99	21.29
		RB1#24	21.44	21.94	21.25
		RB1#49	21.38	22.13	21.17
		RB25#0	21.45	21.99	21.34
		RB25#12	21.48	22.00	21.28
		RB25#24	21.49	21.97	21.17
		RB50#0	21.59	22.05	21.21
	16-QAM	RB1#0	21.72	22.05	21.14
		RB1#24	21.68	21.98	21.12
		RB1#49	21.79	22.02	21.11
		RB25#0	21.80	21.97	21.16
		RB25#12	21.85	22.00	21.09
		RB25#24	21.76	21.99	21.19
		RB50#0	21.85	22.10	21.28

LTE Band 4 part3:

Test Bandwidth	Test Modulation	Resource Block & RB offset	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
15M	QPSK	RB1#0	21.80	22.09	21.33
		RB1#37	21.80	22.27	21.40
		RB1#74	21.77	22.18	21.44
		RB36#0	21.82	22.28	21.32
		RB36#17	21.87	22.30	21.34
		RB36#35	21.85	22.30	21.15
		RB75#0	21.76	22.18	21.15
	16-QAM	RB1#0	21.82	22.15	21.27
		RB1#37	21.92	22.20	21.22
		RB1#74	21.98	22.30	21.27
		RB36#0	21.99	22.35	21.26
		RB36#17	22.08	22.33	21.23
		RB36#35	22.02	22.31	21.37
		RB75#0	22.03	22.23	21.24
20M	QPSK	RB1#0	22.16	22.38	22.22
		RB1#49	22.02	22.18	21.24
		RB1#99	22.08	22.15	21.30
		RB50#0	22.01	22.18	21.28
		RB50#24	22.00	22.18	21.28
		RB50#49	21.92	22.25	21.23
		RB100#0	21.87	22.16	21.40
	16-QAM	RB1#0	21.99	22.09	21.43
		RB1#49	22.00	22.10	21.49
		RB1#99	22.00	22.14	21.50
		RB50#0	21.90	22.20	21.64
		RB50#24	21.97	22.17	21.56
		RB50#49	21.95	22.20	21.49
		RB100#0	21.94	22.26	21.53

LTE Band 7 part1:

Test Bandwidth	Test Modulation	Resource Block & RB offset	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
5M	QPSK	RB1#0	21.67	21.88	20.98
		RB1#12	21.61	21.45	21.48
		RB1#24	21.60	21.28	21.46
		RB12#0	21.60	21.66	21.77
		RB12#6	22.15	21.53	20.95
		RB12#11	21.20	21.83	21.65
		RB25#0	22.04	21.15	21.46
	16-QAM	RB1#0	21.85	21.97	21.94
		RB1#12	21.90	21.56	21.50
		RB1#24	21.87	21.84	21.83
		RB12#0	21.69	21.14	21.01
		RB12#6	21.60	21.70	21.76
		RB12#11	21.36	21.25	21.61
		RB25#0	21.35	21.69	21.34
10M	QPSK	RB1#0	21.36	21.18	22.02
		RB1#24	21.44	21.78	22.03
		RB1#49	21.59	21.76	22.15
		RB25#0	21.44	21.44	21.96
		RB25#12	21.41	21.35	21.52
		RB25#24	21.76	21.55	21.63
		RB50#0	21.12	21.76	22.01
	16-QAM	RB1#0	21.52	21.25	21.58
		RB1#24	21.35	21.11	21.59
		RB1#49	21.49	21.56	21.92
		RB25#0	20.99	21.66	22.08
		RB25#12	20.98	21.27	22.13
		RB25#24	21.59	21.92	21.64
		RB50#0	21.09	21.72	21.29

LTE Band 7 part2:

Test Bandwidth	Test Modulation	Resource Block & RB offset	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
15M	QPSK	RB1#0	21.46	20.96	21.41
		RB1#37	21.46	21.49	21.24
		RB1#74	21.51	21.46	21.11
		RB36#0	21.34	21.66	21.89
		RB36#17	21.58	21.51	21.23
		RB36#35	21.18	21.67	21.04
		RB75#0	21.17	21.63	21.47
	16-QAM	RB1#0	20.79	21.75	21.26
		RB1#37	21.61	21.12	21.96
		RB1#74	21.47	21.90	21.45
		RB36#0	21.35	21.29	21.29
		RB36#17	21.63	21.14	21.08
		RB36#35	21.61	21.79	21.75
		RB75#0	21.06	21.84	21.52
20M	QPSK	RB1#0	22.16	22.28	22.19
		RB1#49	21.41	21.56	21.52
		RB1#99	21.24	21.43	21.66
		RB50#0	20.91	22.15	21.04
		RB50#24	21.44	21.65	20.81
		RB50#49	21.53	21.63	21.49
		RB100#0	21.68	20.97	21.37
	16-QAM	RB1#0	21.26	21.41	21.02
		RB1#49	20.97	21.02	21.29
		RB1#99	20.75	21.13	21.01
		RB50#0	21.03	21.59	20.84
		RB50#24	21.52	21.18	21.54
		RB50#49	21.21	21.58	21.15
		RB100#0	20.89	20.82	21.19

LTE Band 12 part1:

Test Bandwidth	Test Modulation	Resource Block & RB offset	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
1.4M	QPSK	RB1#0	21.63	21.89	21.76
		RB1#3	21.69	21.90	21.70
		RB1#5	21.52	21.76	21.78
		RB3#0	21.59	21.79	21.72
		RB3#1	21.51	21.87	21.64
		RB3#3	21.46	21.93	21.66
		RB6#0	21.47	21.93	21.49
	16-QAM	RB1#0	21.58	22.01	21.66
		RB1#3	21.57	21.90	21.59
		RB1#5	21.58	22.01	21.62
		RB3#0	21.57	21.91	21.56
		RB3#1	21.60	21.95	21.47
		RB3#3	21.69	21.99	21.44
		RB6#0	21.55	21.98	21.40
3M	QPSK	RB1#0	21.53	22.01	21.42
		RB1#7	21.58	22.03	21.46
		RB1#14	21.57	22.02	21.53
		RB8#0	21.58	22.08	21.51
		RB8#4	21.76	22.03	21.51
		RB8#7	21.70	22.00	21.60
		RB15#0	21.68	22.02	21.77
	16-QAM	RB1#0	21.68	22.01	21.62
		RB1#7	21.63	22.05	21.65
		RB1#14	21.61	22.09	21.73
		RB8#0	21.63	22.03	21.60
		RB8#4	21.60	22.16	21.58
		RB8#7	21.53	22.19	21.48
		RB15#0	21.53	22.30	21.52

LTE Band 12 part2:

Test Bandwidth	Test Modulation	Resource Block & RB offset	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
5M	QPSK	RB1#0	21.42	22.34	21.61
		RB1#12	21.49	22.33	21.75
		RB1#24	21.42	22.40	21.72
		RB12#0	21.38	22.32	21.65
		RB12#6	21.30	22.15	21.78
		RB12#11	21.32	22.16	21.79
		RB25#0	21.29	22.15	21.87
	16-QAM	RB1#0	21.48	22.00	21.89
		RB1#12	21.41	21.97	21.91
		RB1#24	21.38	21.94	22.04
		RB12#0	21.31	21.96	22.03
		RB12#6	21.41	22.04	22.01
		RB12#11	21.47	22.01	22.11
		RB25#0	21.61	22.07	22.08
10M	QPSK	RB1#0	22.38	22.41	22.32
		RB1#24	21.55	21.97	22.07
		RB1#49	21.66	22.01	22.07
		RB25#0	21.64	22.09	22.00
		RB25#12	21.64	21.97	22.08
		RB25#24	21.67	21.87	22.14
		RB50#0	21.82	21.84	22.04
	16-QAM	RB1#0	21.71	21.76	22.06
		RB1#24	21.73	21.83	22.15
		RB1#49	21.79	21.73	22.13
		RB25#0	21.84	21.82	22.24
		RB25#12	21.90	21.87	22.19
		RB25#24	21.98	21.97	22.15
		RB50#0	21.99	21.94	22.29

LTE Band 13 part1:

Test Bandwidth	Test Modulation	Resource Block & RB offset	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
5M	QPSK	RB1#0	21.20	21.85	21.34
		RB1#12	22.14	21.42	21.12
		RB1#24	21.50	21.29	20.93
		RB12#0	21.87	21.77	21.06
		RB12#6	21.44	21.62	21.39
		RB12#11	21.51	21.24	21.25
		RB25#0	21.86	21.49	21.83
	16-QAM	RB1#0	21.21	21.76	21.22
		RB1#12	21.74	21.78	21.43
		RB1#24	21.37	21.09	21.55
		RB12#0	21.97	21.82	21.60
		RB12#6	21.73	21.35	21.46
		RB12#11	21.87	21.86	21.06
		RB25#0	21.72	21.67	21.75
10M	QPSK	RB1#0	/	22.32	/
		RB1#24	/	21.87	/
		RB1#49	/	21.75	/
		RB25#0	/	22.02	/
		RB25#12	/	21.78	/
		RB25#24	/	21.08	/
		RB50#0	/	21.35	/
	16-QAM	RB1#0	/	21.28	/
		RB1#24	/	21.59	/
		RB1#49	/	21.52	/
		RB25#0	/	21.52	/
		RB25#12	/	22.00	/
		RB25#24	/	21.21	/
		RB50#0	/	21.39	/

LTE Band 14 part1:

Test Bandwidth	Test Modulation	Resource Block & RB offset	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
5M	QPSK	RB1#0	21.42	21.14	21.56
		RB1#12	22.09	21.98	21.64
		RB1#24	21.54	21.25	21.66
		RB12#0	21.17	21.87	21.11
		RB12#6	22.16	21.38	21.18
		RB12#11	22.13	21.62	21.69
		RB25#0	21.39	21.90	21.46
	16-QAM	RB1#0	21.71	21.68	21.28
		RB1#12	21.40	21.69	21.50
		RB1#24	21.73	21.79	21.65
		RB12#0	21.71	21.34	21.12
		RB12#6	21.66	21.54	21.01
		RB12#11	21.27	21.73	21.64
		RB25#0	22.08	21.11	21.38
10M	QPSK	RB1#0	/	22.30	/
		RB1#24	/	21.12	/
		RB1#49	/	21.62	/
		RB25#0	/	22.20	/
		RB25#12	/	21.37	/
		RB25#24	/	21.67	/
		RB50#0	/	21.04	/
	16-QAM	RB1#0	/	21.20	/
		RB1#24	/	21.10	/
		RB1#49	/	21.32	/
		RB25#0	/	21.27	/
		RB25#12	/	21.86	/
		RB25#24	/	21.78	/
		RB50#0	/	21.75	/

LTE Band 17 part1:

Test Bandwidth	Test Modulation	Resource Block & RB offset	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
5M	QPSK	RB1#0	21.62	21.07	21.77
		RB1#12	21.66	21.17	21.07
		RB1#24	21.63	21.31	21.12
		RB12#0	21.15	21.91	21.57
		RB12#6	21.32	22.01	21.12
		RB12#11	21.27	21.57	21.09
		RB25#0	21.89	21.79	21.38
	16-QAM	RB1#0	21.23	21.94	21.29
		RB1#12	21.64	21.42	21.76
		RB1#24	22.02	21.65	21.60
		RB12#0	21.98	21.63	21.66
		RB12#6	21.84	21.41	21.82
		RB12#11	22.03	21.38	21.10
		RB25#0	21.57	21.26	21.16
10M	QPSK	RB1#0	22.10	22.02	22.09
		RB1#24	21.28	21.69	22.03
		RB1#49	21.25	22.01	21.98
		RB25#0	21.23	21.17	21.92
		RB25#12	21.37	21.16	21.98
		RB25#24	21.43	21.82	22.01
		RB50#0	21.40	21.81	22.01
	16-QAM	RB1#0	21.51	21.09	22.03
		RB1#24	21.46	21.85	21.88
		RB1#49	21.43	21.12	21.77
		RB25#0	21.45	21.09	21.78
		RB25#12	21.26	21.50	21.73
		RB25#24	21.23	21.39	21.74
		RB50#0	21.09	21.09	21.66

LTE Band 25 part1:

Test Bandwidth	Test Modulation	Resource Block & RB offset	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
1.4M	QPSK	RB1#0	21.54	21.88	21.76
		RB1#3	21.57	21.87	21.80
		RB1#5	21.60	21.83	21.62
		RB3#0	21.56	21.89	21.62
		RB3#1	21.63	21.79	21.70
		RB3#3	21.63	21.66	21.62
		RB6#0	21.51	21.80	21.62
	16-QAM	RB1#0	21.55	21.76	21.70
		RB1#3	21.46	21.83	21.73
		RB1#5	21.46	21.73	21.84
		RB3#0	21.41	21.72	21.79
		RB3#1	21.38	21.78	21.84
		RB3#3	21.36	21.83	21.84
		RB6#0	21.34	21.76	21.74
3M	QPSK	RB1#0	21.25	21.82	21.83
		RB1#7	21.26	21.86	21.93
		RB1#14	21.12	21.79	21.81
		RB8#0	21.15	21.80	21.87
		RB8#4	21.13	21.67	21.98
		RB8#7	21.13	21.69	21.95
		RB15#0	21.14	21.69	21.96
	16-QAM	RB1#0	21.23	21.64	22.02
		RB1#7	21.12	21.51	21.94
		RB1#14	21.07	21.50	21.94
		RB8#0	21.09	21.55	21.84
		RB8#4	21.03	21.69	21.86
		RB8#7	20.98	21.67	21.97
		RB15#0	21.11	21.79	21.95

LTE Band 25 part2:

Test Bandwidth	Test Modulation	Resource Block & RB offset	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
5M	QPSK	RB1#0	21.04	21.85	21.80
		RB1#12	21.09	21.81	21.80
		RB1#24	21.20	21.81	21.86
		RB12#0	21.13	21.76	21.78
		RB12#6	21.22	21.77	21.66
		RB12#11	21.20	21.83	21.49
		RB25#0	21.23	21.76	21.59
	16-QAM	RB1#0	21.27	21.74	21.46
		RB1#12	21.21	21.72	21.54
		RB1#24	21.30	21.75	21.50
		RB12#0	21.29	21.74	21.49
		RB12#6	21.44	21.75	21.50
		RB12#11	21.34	21.76	21.49
		RB25#0	21.46	21.81	21.42
10M	QPSK	RB1#0	21.44	21.83	21.34
		RB1#24	21.45	21.85	21.15
		RB1#49	21.48	21.88	21.21
		RB25#0	21.48	21.94	21.09
		RB25#12	21.45	21.91	21.10
		RB25#24	21.53	21.92	21.11
		RB50#0	21.49	21.98	21.14
	16-QAM	RB1#0	21.44	21.91	21.20
		RB1#24	21.43	21.94	21.30
		RB1#49	21.50	21.97	21.23
		RB25#0	21.46	21.96	21.26
		RB25#12	21.33	21.94	21.27
		RB25#24	21.21	21.93	21.36
		RB50#0	21.20	21.78	21.32

LTE Band 25 part3:

Test Bandwidth	Test Modulation	Resource Block & RB offset	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
15M	QPSK	RB1#0	21.45	21.43	21.59
		RB1#37	21.39	21.43	21.46
		RB1#74	20.96	21.49	21.22
		RB36#0	21.29	20.96	21.56
		RB36#17	21.64	21.41	22.01
		RB36#35	20.72	21.35	21.08
		RB75#0	21.56	21.75	21.23
	16-QAM	RB1#0	21.30	21.38	21.21
		RB1#37	21.50	21.43	21.62
		RB1#74	20.83	21.49	21.70
		RB36#0	20.72	21.38	21.86
		RB36#17	21.49	21.91	21.53
		RB36#35	21.01	21.18	21.86
		RB75#0	20.72	21.20	21.03
20M	QPSK	RB1#0	21.92	22.13	22.10
		RB1#49	21.71	21.30	20.74
		RB1#99	21.75	21.18	21.11
		RB50#0	21.03	22.03	22.03
		RB50#24	21.23	21.63	20.73
		RB50#49	21.56	21.30	20.87
		RB100#0	21.66	21.30	21.21
	16-QAM	RB1#0	21.35	21.31	20.76
		RB1#49	21.66	21.59	21.57
		RB1#99	20.83	21.35	21.00
		RB50#0	21.51	21.07	20.85
		RB50#24	20.85	21.60	21.53
		RB50#49	20.78	21.57	21.52
		RB100#0	21.70	21.11	21.26

LTE Band 26 part1:

Test Bandwidth	Test Modulation	Resource Block & RB offset	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
1.4M	QPSK	RB1#0	21.54	21.87	21.76
		RB1#3	21.52	21.97	21.75
		RB1#5	21.59	21.99	21.65
		RB3#0	21.49	22.06	21.68
		RB3#1	21.52	22.02	21.71
		RB3#3	21.47	22.03	21.60
		RB6#0	21.32	21.88	21.58
	16-QAM	RB1#0	21.32	21.98	21.59
		RB1#3	21.40	21.90	21.47
		RB1#5	21.33	21.92	21.45
		RB3#0	21.46	21.84	21.51
		RB3#1	21.44	21.92	21.53
		RB3#3	21.43	21.86	21.49
		RB6#0	21.39	21.93	21.39
3M	QPSK	RB1#0	21.44	22.01	21.37
		RB1#7	21.44	21.99	21.29
		RB1#14	21.45	21.91	21.13
		RB8#0	21.47	22.01	21.10
		RB8#4	21.61	22.07	20.98
		RB8#7	21.54	22.11	20.91
		RB15#0	21.57	22.16	20.78
	16-QAM	RB1#0	21.58	22.07	20.76
		RB1#7	21.63	22.09	20.73
		RB1#14	21.54	22.07	20.74
		RB8#0	21.54	22.14	20.62
		RB8#4	21.48	22.12	20.63
		RB8#7	21.47	22.09	20.69
		RB15#0	21.61	22.02	20.53

LTE Band 26 part2:

Test Bandwidth	Test Modulation	Resource Block & RB offset	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
5M	QPSK	RB1#0	21.68	22.00	20.60
		RB1#12	21.58	21.95	20.59
		RB1#24	21.64	21.99	20.66
		RB12#0	21.57	21.98	20.71
		RB12#6	21.54	21.97	20.71
		RB12#11	21.53	21.88	20.81
		RB25#0	21.59	21.86	20.73
	16-QAM	RB1#0	21.65	21.96	20.77
		RB1#12	21.69	21.92	20.77
		RB1#24	21.58	21.96	20.85
		RB12#0	21.50	22.04	20.80
		RB12#6	21.55	22.14	20.81
		RB12#11	21.58	22.09	20.80
		RB25#0	21.67	22.13	20.84
10M	QPSK	RB1#0	21.75	22.18	20.85
		RB1#24	21.84	22.03	20.95
		RB1#49	21.87	22.14	21.04
		RB25#0	21.73	21.98	21.11
		RB25#12	21.65	22.02	21.06
		RB25#24	21.61	21.93	20.91
		RB50#0	21.56	21.93	20.97
	16-QAM	RB1#0	21.55	21.98	20.92
		RB1#24	21.48	22.05	20.89
		RB1#49	21.34	22.15	20.80
		RB25#0	21.40	22.23	20.72
		RB25#12	21.24	22.25	20.73
		RB25#24	21.26	22.23	20.75
		RB50#0	21.28	22.22	20.78

LTE Band 26 part3:

Test Bandwidth	Test Modulation	Resource Block & RB offset	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
15M	QPSK	RB1#0	22.19	22.29	22.21
		RB1#37	20.84	21.34	21.23
		RB1#74	21.46	21.05	21.24
		RB36#0	20.83	21.79	21.36
		RB36#17	21.02	21.76	21.23
		RB36#35	21.17	21.17	21.88
		RB75#0	21.55	21.89	21.77
	16-QAM	RB1#0	21.59	21.34	21.68
		RB1#37	21.39	21.70	21.77
		RB1#74	21.61	21.60	21.02
		RB36#0	21.02	21.41	21.66
		RB36#17	21.29	21.17	21.47
		RB36#35	20.70	21.36	21.11
		RB75#0	20.89	21.12	21.25

LTE Band 41 part1:

Test Bandwidth	Test Modulation	Resource Block & RB offset	Lowest Channel (dBm)	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
5M	QPSK	RB1#0	21.41	20.99	21.43	21.37
		RB1#12	21.50	21.20	21.76	21.06
		RB1#24	21.23	20.83	21.29	21.89
		RB12#0	21.35	20.99	21.48	21.75
		RB12#6	21.26	21.06	21.72	21.13
		RB12#11	22.13	21.34	21.42	21.38
		RB25#0	22.09	21.57	21.93	21.23
	16-QAM	RB1#0	21.98	21.25	21.39	21.73
		RB1#12	21.70	21.20	21.57	21.74
		RB1#24	22.13	21.28	21.30	21.37
		RB12#0	21.66	21.03	21.26	21.05
		RB12#6	22.14	21.28	21.29	21.60
		RB12#11	21.16	20.88	21.45	21.50
		RB25#0	21.54	21.05	21.41	20.92
Test Bandwidth	Test Modulation	Resource Block & RB offset	Lowest Channel (dBm)	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
10M	QPSK	RB1#0	21.18	20.81	21.29	21.86
		RB1#24	21.74	21.37	21.87	22.15
		RB1#49	20.97	20.75	21.38	21.62
		RB25#0	21.48	21.12	21.63	22.09
		RB25#12	21.86	21.46	21.93	21.77
		RB25#24	21.02	20.73	21.28	21.91
		RB50#0	21.92	21.38	21.72	21.66
	16-QAM	RB1#0	20.96	20.60	21.09	21.71
		RB1#24	21.16	20.90	21.50	22.02
		RB1#49	21.17	20.83	21.33	22.15
		RB25#0	21.71	21.15	21.46	21.55
		RB25#12	21.91	21.28	21.51	21.99
		RB25#24	21.81	21.01	21.06	21.83
		RB50#0	21.47	21.20	21.80	21.34

Note: The lowest channel frequency, middle channel frequency and high channel frequency is low, middle and high test frequencies corresponding to different bandwidths within the frequency range 2555MHz~2655MHz, and the low channel frequency is 2580MHz.

LTE Band 41 part2:

Test Bandwidth	Test Modulation	Resource Block & RB offset	Lowest Channel (dBm)	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
15M	QPSK	RB1#0	20.68	20.41	20.97	21.85
		RB1#37	21.43	20.95	21.33	21.10
		RB1#74	21.15	20.85	21.41	21.10
		RB36#0	21.46	21.05	21.49	21.19
		RB36#17	20.75	20.88	21.87	21.62
		RB36#35	21.57	21.28	21.86	22.03
		RB75#0	21.47	20.84	21.07	21.81
	16-QAM	RB1#0	21.26	20.94	21.47	21.48
		RB1#37	21.34	20.75	21.00	21.43
		RB1#74	21.59	21.15	21.58	21.58
		RB36#0	20.87	20.79	21.55	21.62
		RB36#17	20.96	20.74	21.37	21.10
		RB36#35	21.15	21.01	21.72	21.75
		RB75#0	20.68	20.84	21.85	21.21
Test Bandwidth	Test Modulation	Resource Block & RB offset	Lowest Channel (dBm)	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
20M	QPSK	RB1#0	22.23	21.81	22.28	22.16
		RB1#49	20.93	20.51	20.92	20.70
		RB1#99	21.52	21.20	21.75	21.62
		RB50#0	22.05	21.59	22.01	22.11
		RB50#24	21.33	21.05	21.62	21.57
		RB50#49	21.62	21.07	21.37	21.63
		RB100#0	21.60	21.09	21.45	21.59
	16-QAM	RB1#0	21.71	21.01	21.16	20.78
		RB1#49	20.78	20.39	20.83	21.42
		RB1#99	20.94	20.53	20.96	20.84
		RB50#0	21.12	20.61	20.94	20.87
		RB50#24	21.50	20.94	21.23	21.35
		RB50#49	21.04	20.53	20.85	21.47
		RB100#0	20.82	20.64	21.31	20.86

Note: The lowest channel frequency, middle channel frequency and high channel frequency is low, middle and high test frequencies corresponding to different bandwidths within the frequency range 2555MHz~2655MHz, and the low channel frequency is 2580MHz.

LTE Band 66 part1:

Test Bandwidth	Test Modulation	Resource Block & RB offset	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
1.4M	QPSK	RB1#0	21.53	21.86	21.71
		RB1#3	21.56	21.79	21.81
		RB1#5	21.54	21.85	21.82
		RB3#0	21.49	21.89	21.83
		RB3#1	21.53	21.97	21.82
		RB3#3	21.41	22.11	21.73
		RB6#0	21.44	22.19	21.78
	16-QAM	RB1#0	21.55	22.21	21.93
		RB1#3	21.57	22.20	21.94
		RB1#5	21.49	22.17	22.06
		RB3#0	21.51	22.20	21.97
		RB3#1	21.54	22.21	21.98
		RB3#3	21.47	22.19	21.95
		RB6#0	21.40	22.31	21.92
3M	QPSK	RB1#0	21.54	22.33	21.82
		RB1#7	21.53	22.21	21.73
		RB1#14	21.55	22.30	21.74
		RB8#0	21.58	22.26	21.76
		RB8#4	21.68	22.27	21.76
		RB8#7	21.66	22.34	21.86
		RB15#0	21.73	22.31	21.87
	16-QAM	RB1#0	21.72	22.31	21.83
		RB1#7	21.60	22.33	21.88
		RB1#14	21.75	22.24	21.97
		RB8#0	21.78	22.23	21.86
		RB8#4	21.67	22.36	21.84
		RB8#7	21.67	22.36	21.87
		RB15#0	21.65	22.33	21.81

LTE Band 66 part2:

Test Bandwidth	Test Modulation	Resource Block & RB offset	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
5M	QPSK	RB1#0	21.63	22.22	21.82
		RB1#12	21.49	22.29	21.80
		RB1#24	21.55	22.22	21.79
		RB12#0	21.57	22.31	21.85
		RB12#6	21.55	22.36	21.83
		RB12#11	21.65	22.34	21.84
		RB25#0	21.53	22.29	21.79
	16-QAM	RB1#0	21.53	22.24	21.75
		RB1#12	21.64	22.23	21.71
		RB1#24	21.63	22.23	21.75
		RB12#0	21.52	22.25	21.87
		RB12#6	21.46	22.25	21.94
		RB12#11	21.53	22.21	22.06
		RB25#0	21.42	22.20	22.14
10M	QPSK	RB1#0	21.46	22.31	22.20
		RB1#24	21.43	22.29	22.19
		RB1#49	21.37	22.37	22.23
		RB25#0	21.34	22.35	22.29
		RB25#12	21.34	22.30	22.33
		RB25#24	21.37	22.21	22.37
		RB50#0	21.31	22.33	22.44
	16-QAM	RB1#0	21.28	22.25	22.41
		RB1#24	21.29	22.23	22.41
		RB1#49	21.27	22.15	22.33
		RB25#0	21.15	22.17	22.32
		RB25#12	21.26	22.15	22.26
		RB25#24	21.17	22.14	22.36
		RB50#0	21.09	22.05	22.44

LTE Band 66 part3:

Test Bandwidth	Test Modulation	Resource Block & RB offset	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
15M	QPSK	RB1#0	21.04	21.96	22.33
		RB1#37	21.14	21.90	22.32
		RB1#74	21.10	21.85	22.31
		RB36#0	21.15	21.92	22.26
		RB36#17	21.14	21.92	22.20
		RB36#35	21.21	21.99	22.28
		RB75#0	21.06	21.94	22.20
	16-QAM	RB1#0	21.04	21.90	22.22
		RB1#37	20.97	21.86	22.28
		RB1#74	20.95	21.83	22.24
		RB36#0	21.01	21.81	22.24
		RB36#17	20.97	21.69	22.30
		RB36#35	20.85	21.73	22.38
		RB75#0	20.85	21.91	22.41
20M	QPSK	RB1#0	22.02	22.49	22.50
		RB1#49	20.82	21.76	22.38
		RB1#99	20.79	21.86	22.41
		RB50#0	21.16	22.29	22.23
		RB50#24	20.66	21.97	22.36
		RB50#49	20.67	22.07	22.44
		RB100#0	20.61	22.02	22.33
	16-QAM	RB1#0	20.57	22.07	22.35
		RB1#49	20.61	22.08	22.43
		RB1#99	20.64	22.08	22.45
		RB50#0	20.62	22.02	22.41
		RB50#24	20.67	22.06	22.41
		RB50#49	20.60	22.07	22.37
		RB100#0	20.70	22.05	22.28

LTE Band 71 part1:

Test Bandwidth	Test Modulation	Resource Block & RB offset	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
5M	QPSK	RB1#0	21.33	21.23	21.59
		RB1#12	21.75	21.30	21.10
		RB1#24	21.51	21.57	21.31
		RB12#0	21.44	21.79	21.60
		RB12#6	22.03	21.55	21.24
		RB12#11	21.19	21.43	20.97
		RB25#0	21.68	21.88	21.62
	16-QAM	RB1#0	21.45	21.71	21.06
		RB1#12	21.57	21.64	21.17
		RB1#24	22.10	21.87	21.07
		RB12#0	21.91	21.99	21.67
		RB12#6	21.35	21.45	21.54
		RB12#11	21.75	21.78	21.26
		RB25#0	22.06	21.39	21.65
10M	QPSK	RB1#0	21.49	21.82	21.55
		RB1#24	21.85	21.09	21.80
		RB1#49	21.64	21.61	22.09
		RB25#0	21.02	21.24	21.28
		RB25#12	21.09	21.23	22.22
		RB25#24	21.68	21.91	21.60
		RB50#0	21.22	21.50	22.18
	16-QAM	RB1#0	21.36	21.68	21.51
		RB1#24	21.27	21.88	21.67
		RB1#49	21.79	21.95	21.24
		RB25#0	21.54	21.64	22.04
		RB25#12	21.45	21.83	22.02
		RB25#24	21.23	21.24	21.49
		RB50#0	21.19	21.69	21.75

LTE Band 71 part2:

Test Bandwidth	Test Modulation	Resource Block & RB offset	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
15M	QPSK	RB1#0	20.86	21.89	21.64
		RB1#37	21.52	21.83	21.54
		RB1#74	20.92	21.89	21.60
		RB36#0	20.74	21.02	21.15
		RB36#17	21.35	21.50	21.11
		RB36#35	20.78	21.92	21.67
		RB75#0	20.88	21.72	21.35
	16-QAM	RB1#0	21.26	21.35	21.84
		RB1#37	20.75	21.91	21.64
		RB1#74	20.75	21.79	21.55
		RB36#0	21.29	21.02	21.10
		RB36#17	21.66	21.14	21.87
		RB36#35	20.78	21.08	21.35
		RB75#0	20.83	21.43	21.11
20M	QPSK	RB1#0	22.14	22.28	22.25
		RB1#49	21.12	21.67	21.55
		RB1#99	21.00	21.78	20.84
		RB50#0	22.09	22.26	22.20
		RB50#24	21.35	21.66	21.56
		RB50#49	21.69	21.78	21.65
		RB100#0	20.85	21.36	21.21
	16-QAM	RB1#0	21.26	21.06	21.53
		RB1#49	21.05	21.14	20.92
		RB1#99	20.98	21.49	20.86
		RB50#0	21.20	21.30	20.83
		RB50#24	21.26	20.87	20.99
		RB50#49	20.85	21.30	21.25
		RB100#0	21.53	21.54	21.26

Bluetooth Power:

Mode	Channel	Freq.(MHz)	Conducted Power(Peak/dBm)
GFSK	Low	2402	10.07
	Middle	2441	10.18
	High	2480	10.53
$\pi/4$ DQPSK	Low	2402	9.62
	Middle	2441	9.53
	High	2480	10.11
8DPSK	Low	2402	9.78
	Middle	2441	9.74
	High	2480	10.28
LE 1M	Low	2402	-0.35
	Middle	2440	-0.97
	High	2480	-0.38
LE 2M	Low	2402	-0.38
	Middle	2440	-0.99
	High	2480	-0.42

WiFi 2.4G Power:

Mode	Channel	Frequency (MHz)	Data Rate	Chain 0 Conducted Power (Avg/dBm)	Chain 1 Conducted Power (Avg/dBm)	Total Conducted Power (Avg/dBm)
802.11b	Low	2412	1Mbps	13.45	13.14	---
	Middle	2437		13.15	13.15	---
	High	2462		12.35	13.01	---
802.11g	Low	2412	6Mbps	9.47	9.27	---
	Middle	2437		9.27	9.13	---
	High	2462		8.48	9.11	---
802.11n20	Low	2412	MCS0	9.38	9.09	12.25
	Middle	2437		8.79	8.89	11.85
	High	2462		8.41	9.25	11.86
802.11n40	Low	2422	MCS0	9.64	9.29	12.48
	Middle	2437		9.29	9.29	12.30
	High	2452		9.17	9.21	12.20


WiFi 5GHz Power:

Band	Mode	Channel	Frequency (MHz)	Chain 0 Conducted Power (Avg/dBm)	Chain 1 Conducted Power (Avg/dBm)	Total Conducted Power (Avg/dBm)
5.2GHz	802.11a	Low	5180	8.45	7.58	---
		Middle	5200	8.37	8.11	---
		High	5240	8.70	9.45	---
	802.11nHT20	Low	5180	7.49	7.25	10.38
		Middle	5200	7.39	8.19	10.82
		High	5240	7.93	8.82	11.41
	802.11nHT40	Low	5190	7.43	7.31	10.38
		High	5230	7.99	8.23	11.12
	802.11ac20	Low	5180	7.30	7.31	10.32
		Middle	5200	7.48	7.94	10.73
		High	5240	7.95	8.71	11.36
	802.11ac40	Low	5190	7.59	7.19	10.40
		High	5230	8.10	8.24	11.18
	802.11ac80	Low	5210	7.52	7.63	10.59
5.8GHz	802.11a	Low	5745	7.41	7.44	---
		Middle	5785	7.27	7.15	---
		High	5825	7.17	7.78	---
	802.11nHT20	Low	5745	7.27	7.35	10.32
		Middle	5785	7.12	7.49	10.32
		High	5825	7.11	7.74	10.45
	802.11nHT40	Low	5755	7.81	7.94	10.89
		High	5795	7.16	7.59	10.39
	802.11ac20	Low	5745	7.29	7.14	10.23
		Middle	5785	7.00	7.40	10.21
		High	5825	7.12	7.77	10.47
	802.11ac40	Low	5755	7.52	7.70	10.62
		High	5795	7.18	7.78	10.50
	802.11ac80	Low	5775	7.43	7.48	10.47


Duty Cycle:

Chain0:


802.11b Mode Middle Channel

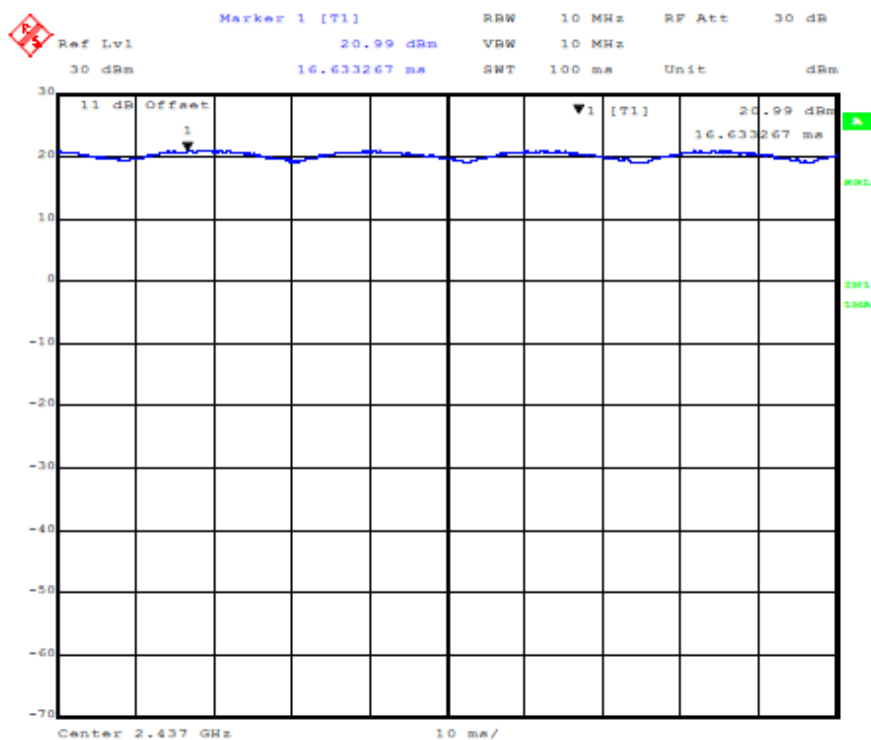


802.11g Mode Middle Channel

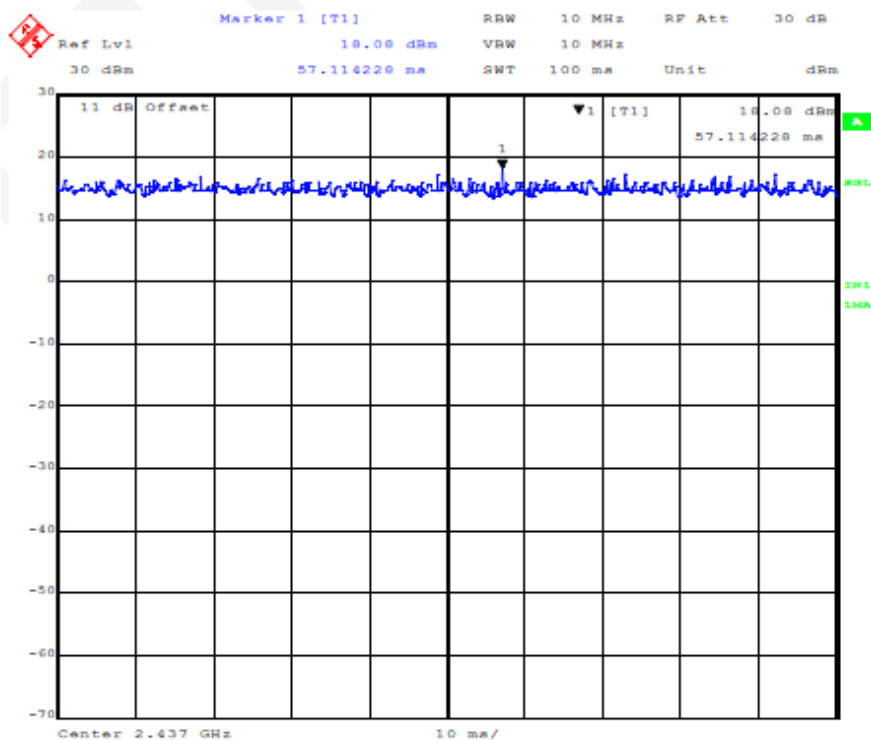

802.11n-HT20 Mode Middle Channel

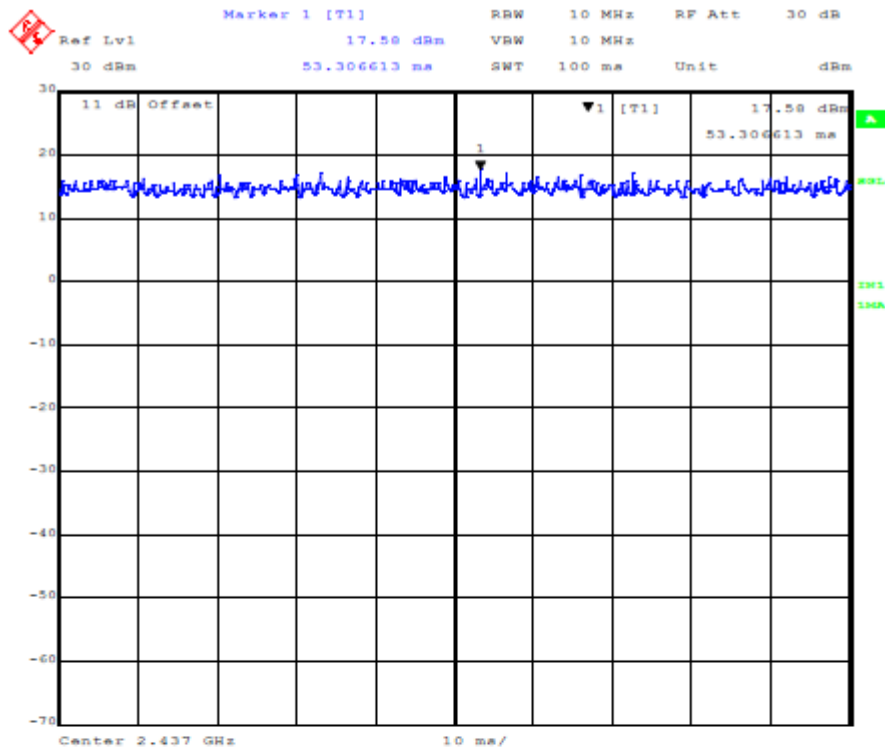


802.11n-HT40 Mode Middle Channel

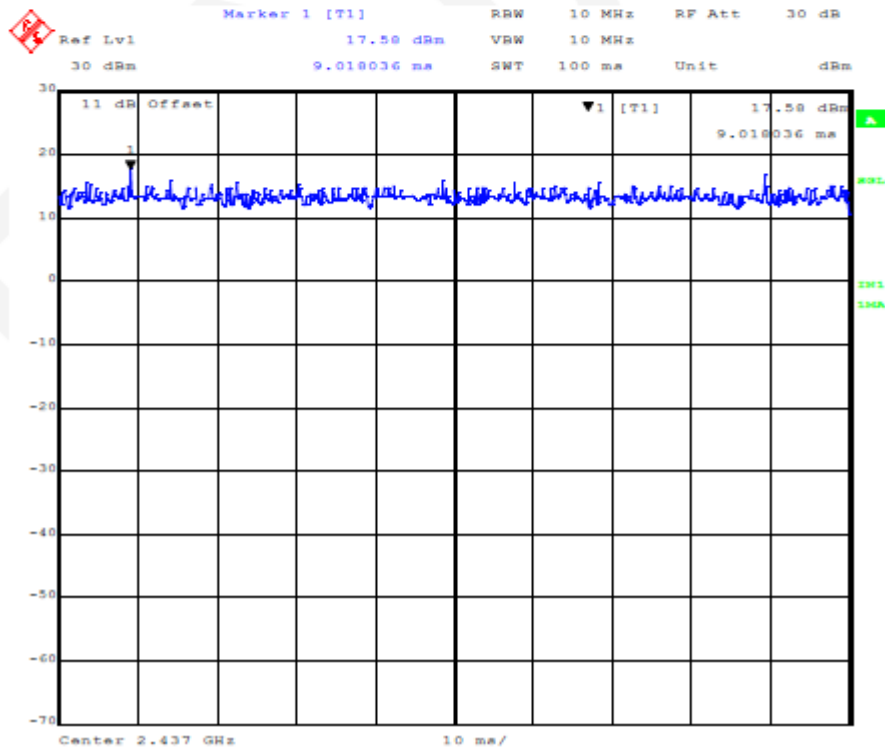


Chain1:


802.11b Mode Middle Channel

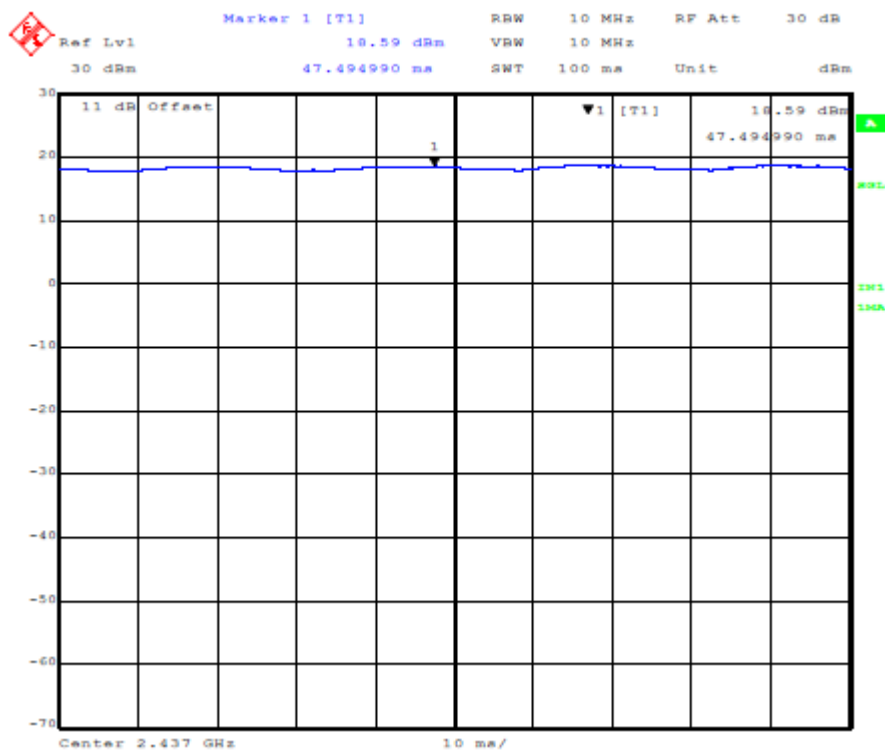


802.11g Mode Middle Channel

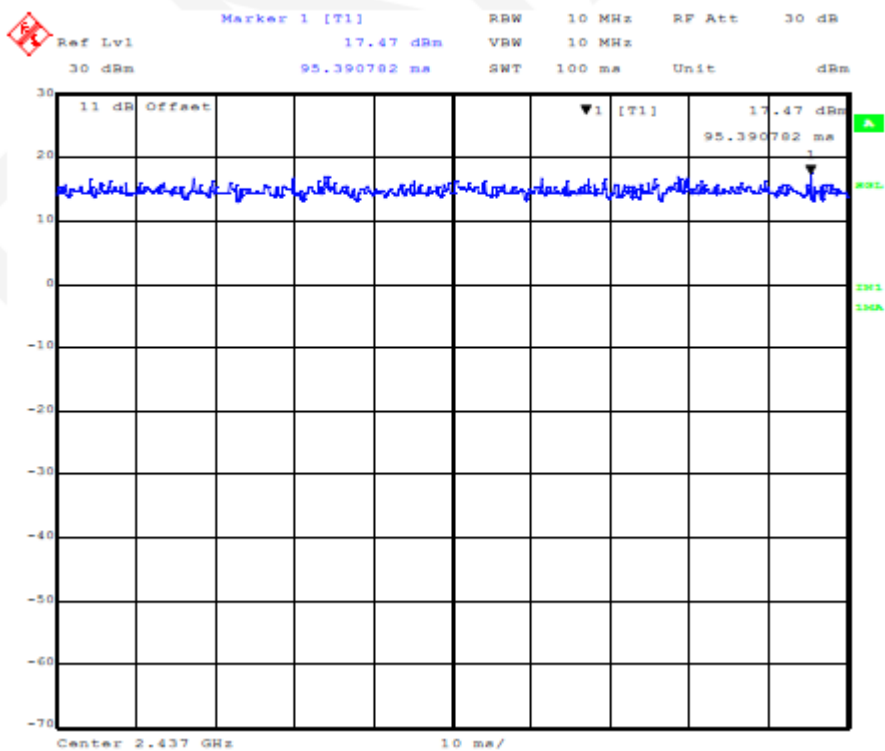


802.11n-HT20 Mode Middle Channel

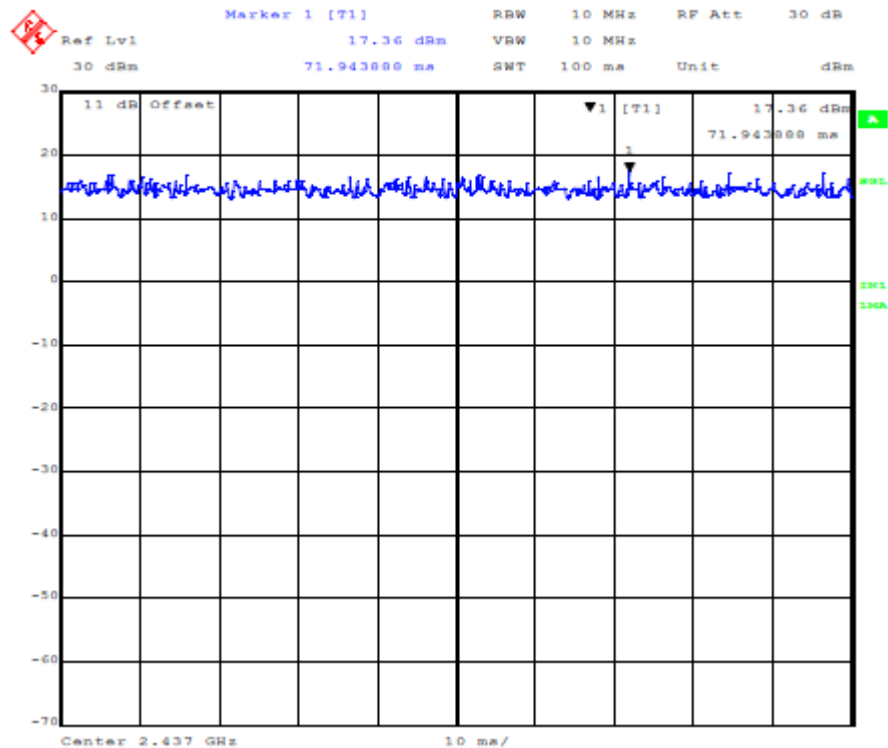


802.11n-HT40 Mode Middle Channel

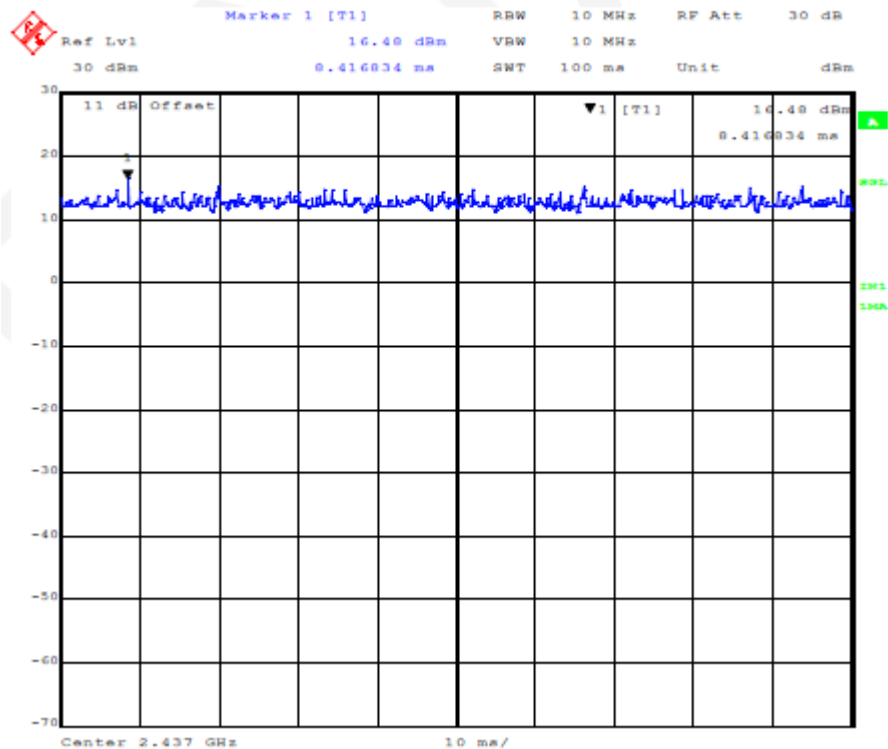

BLE(1Mbps) Mode Middle Channel

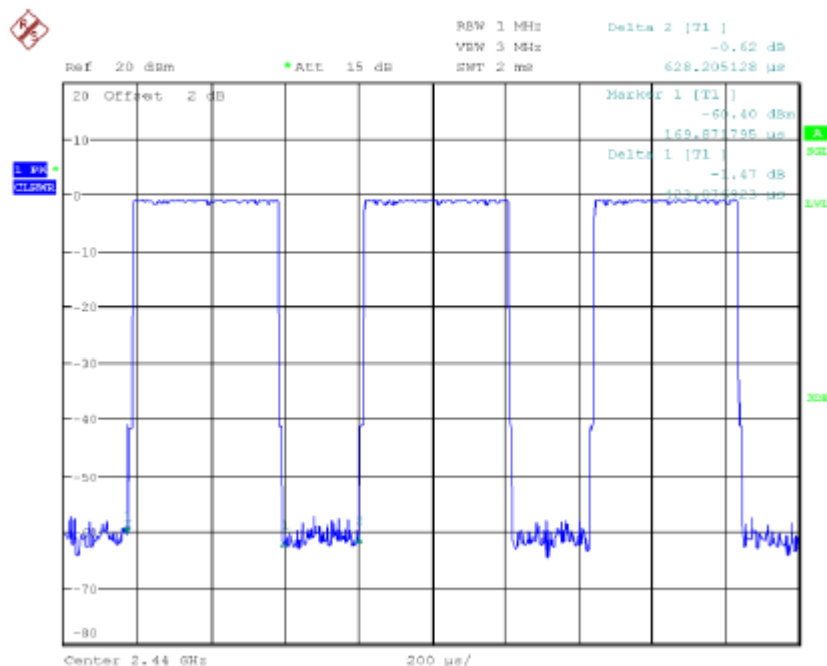

BLE(2Mbps) Mode Middle Channel

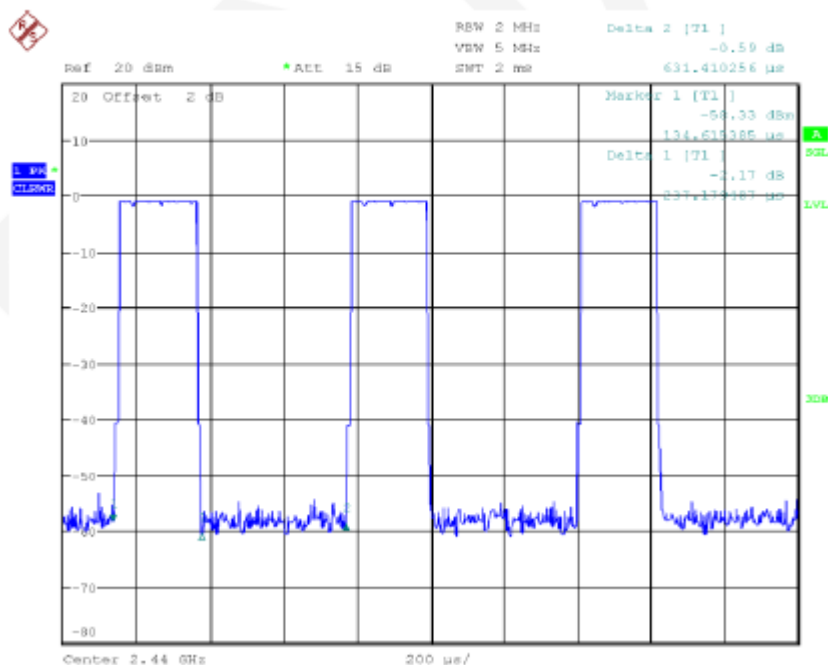


Chain	Mode	Duty Cycle (%)	T(ms)	1/T(kHz)	10log(1/x)
Chain0	802.11b	100	/	/	0
	802.11g	100	/	/	0
	802.11n-HT20	100	/	/	0
	802.11n-HT40	100	/	/	0
Chain1	802.11b	100	/	/	0
	802.11g	100	/	/	0
	802.11n-HT20	100	/	/	0
	802.11n-HT40	100	/	/	0
/	BLE(1Mbps)	67.35	0.423	2.364	1.717
/	BLE(2Mbps)	37.56	0.237	4.219	4.253

Note: "x" means the Duty Cycle.




Duty Cycle (Chain0) 5150~5250MHz Band:


802.11a mode

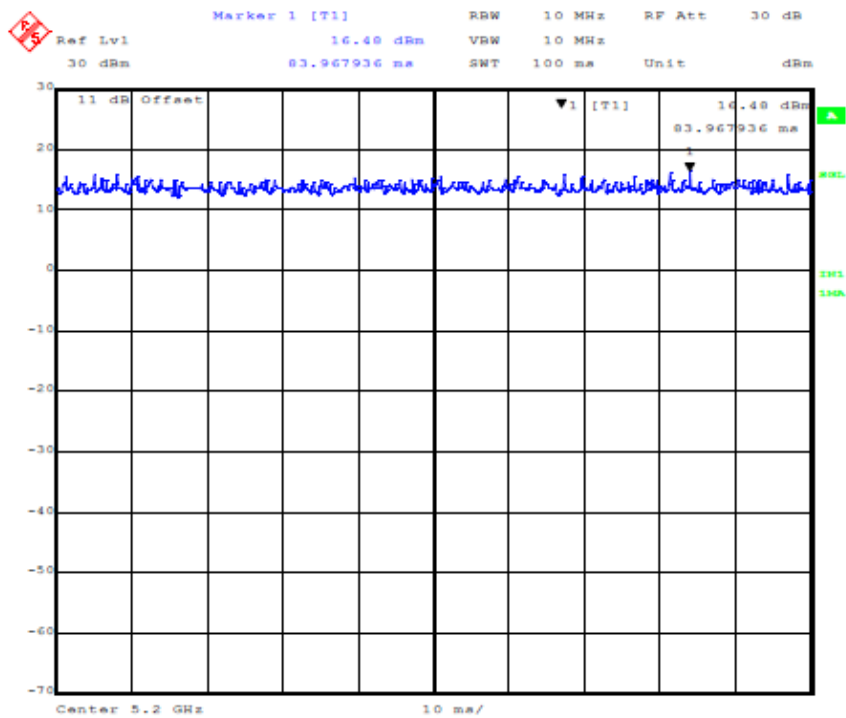


802.11ac20 mode

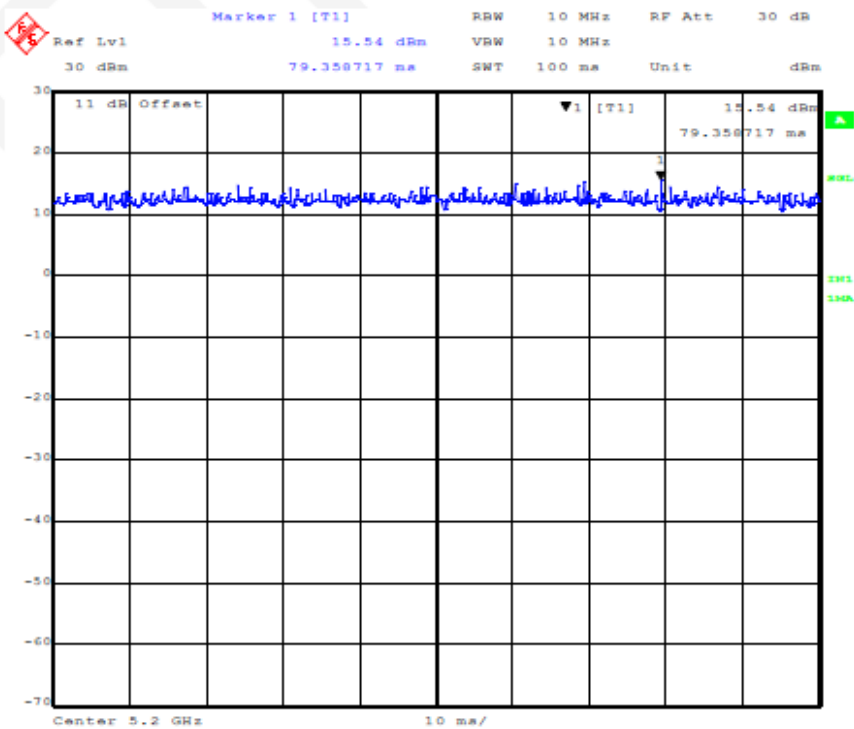


802.11n-HT20 mode

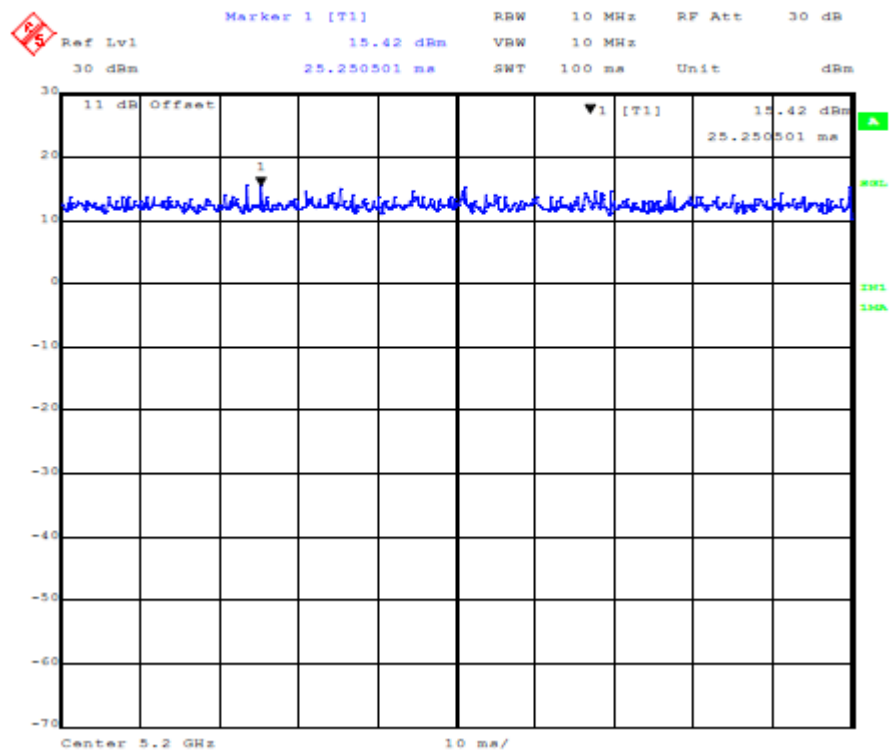


802.11 ac40 mode

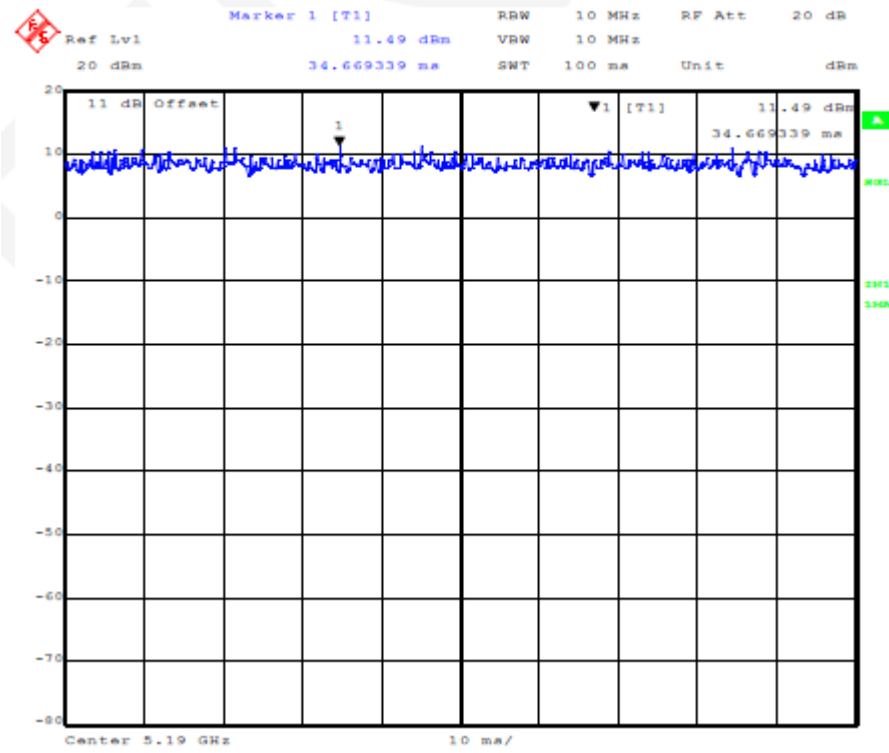



802.11n-HT40 mode

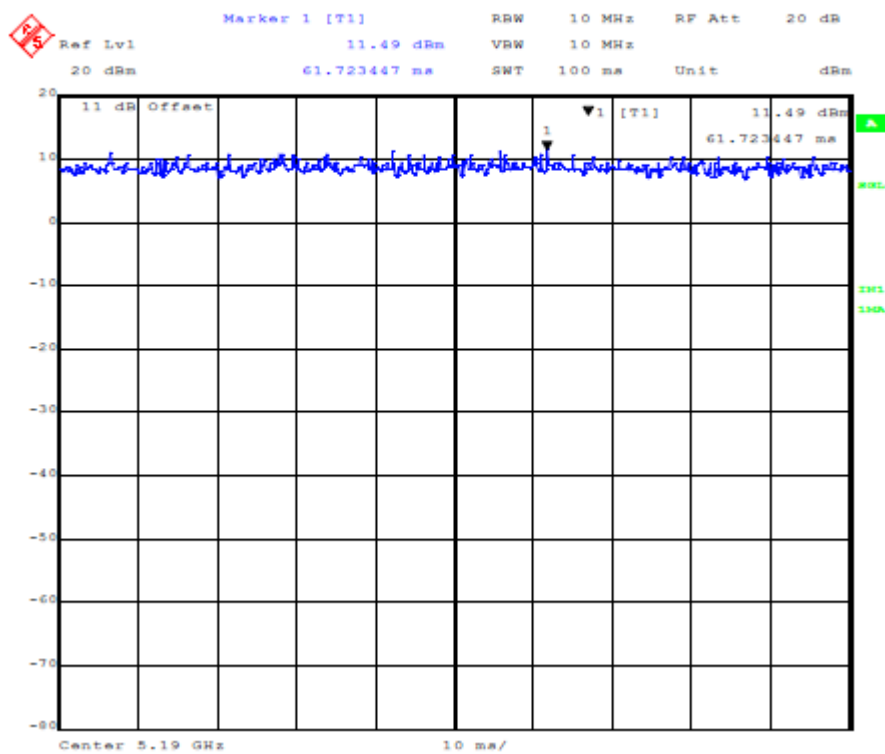


802.11 ac80 mode

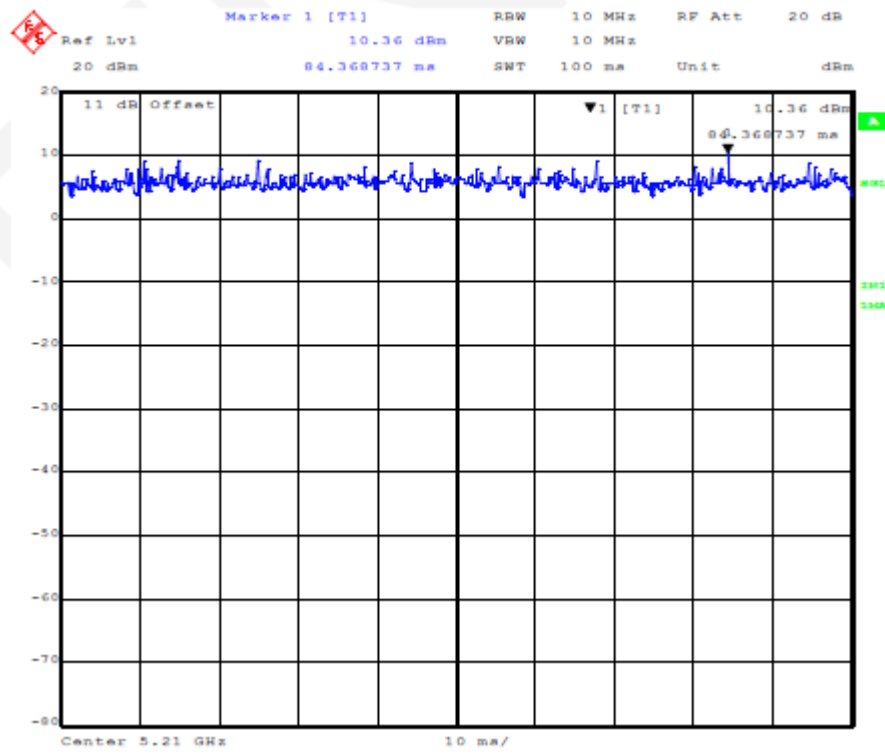


802.11a mode

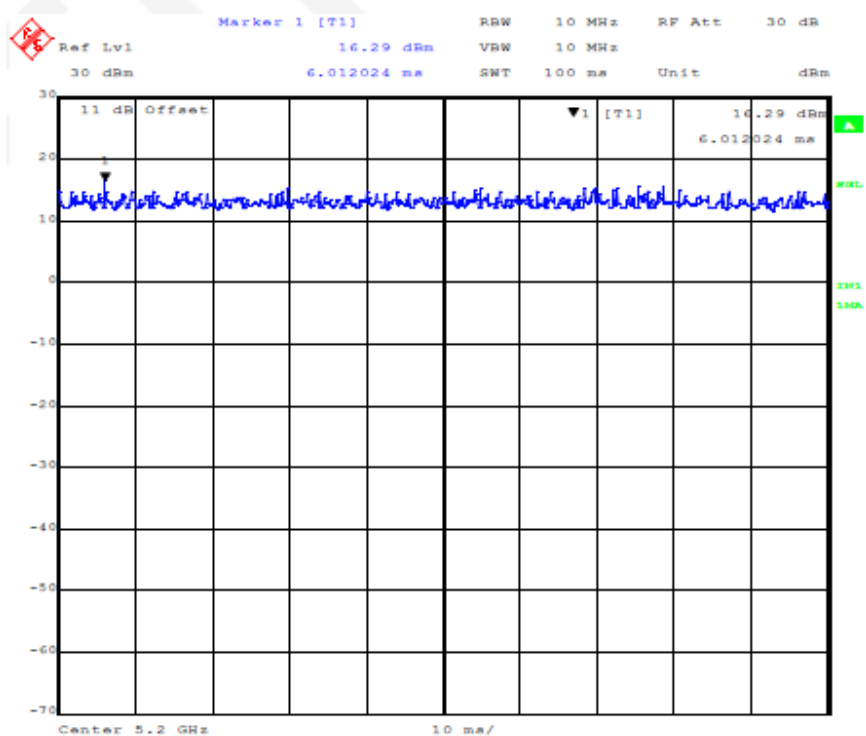


802.11n-HT20 mode

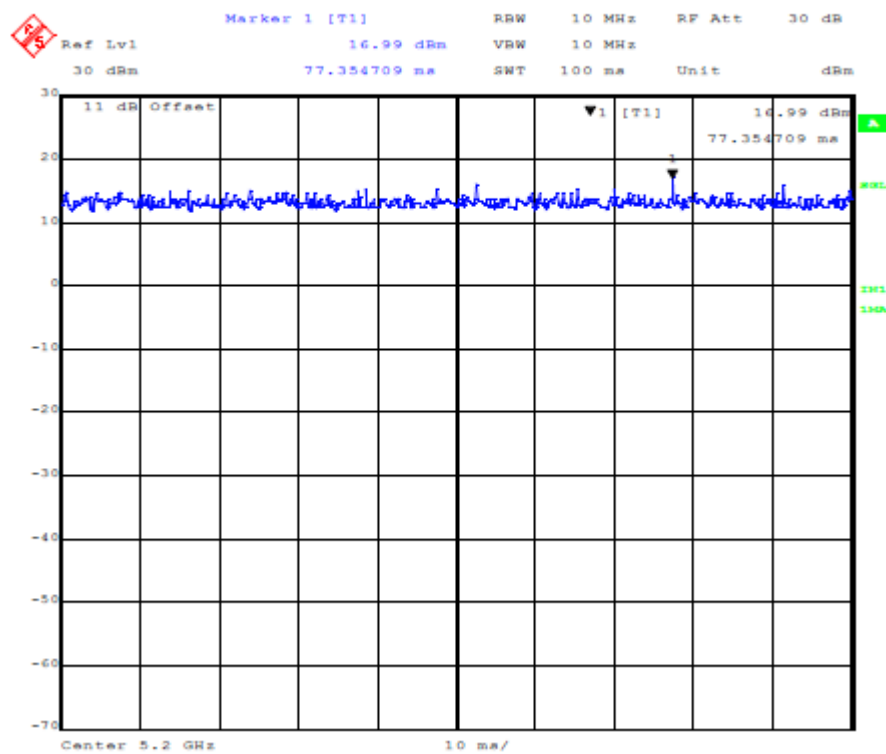


802.11 ac40 mode

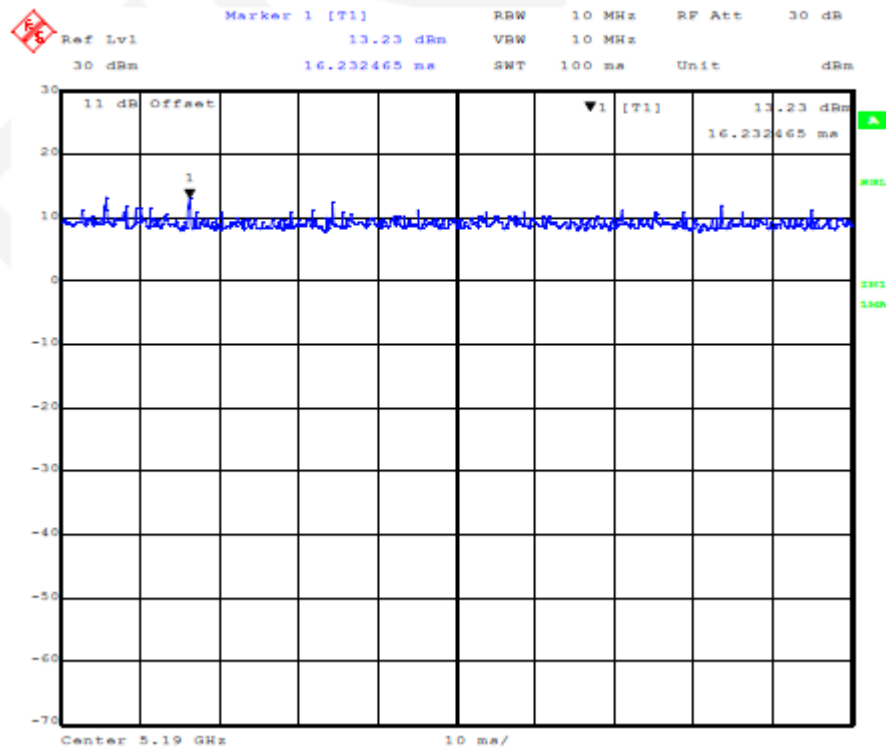


802.11n-HT40 mode

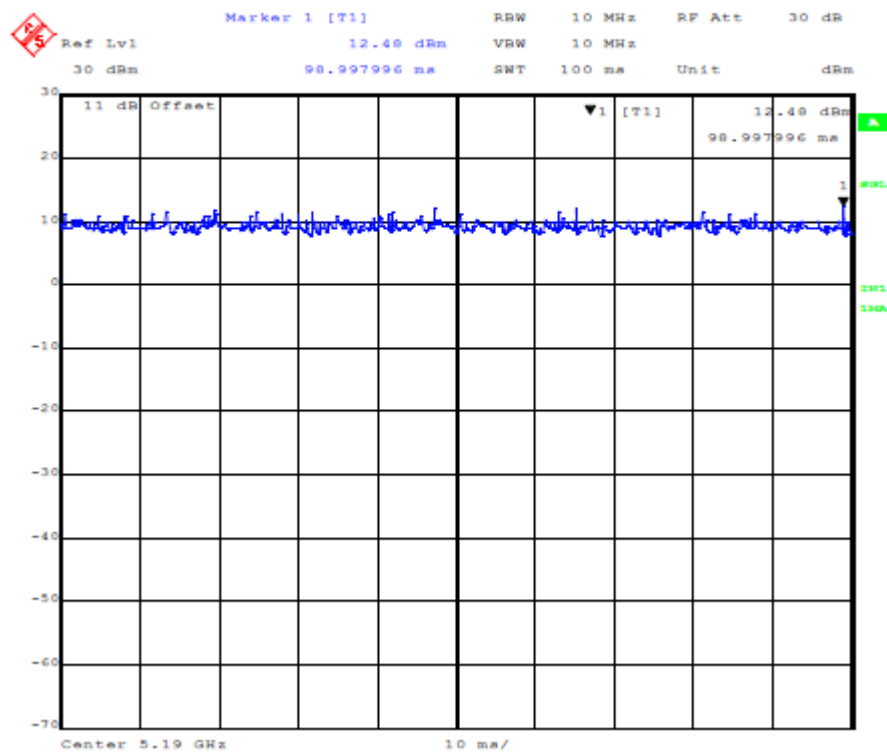


802.11 ac80 mode

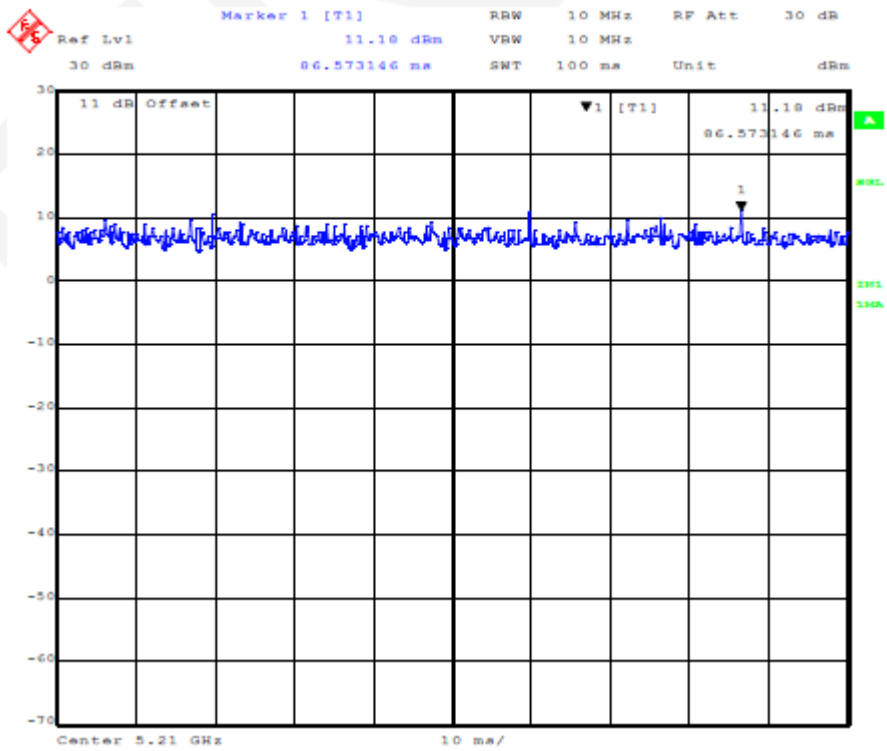


Duty Cycle (Chain0) 5725~5850MHz Band:
802.11a mode

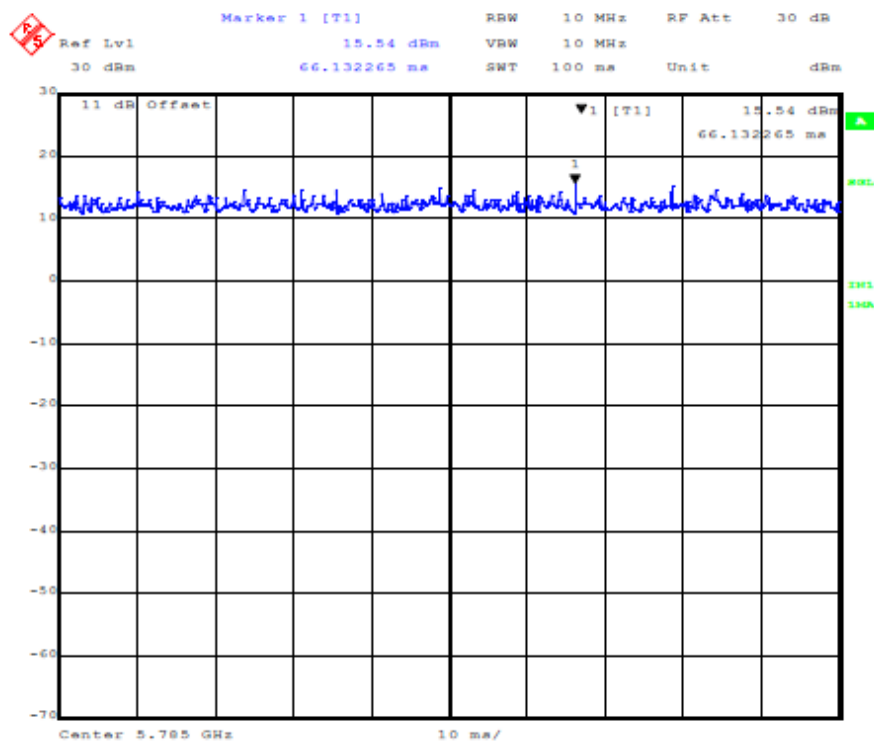


802.11ac20 mode

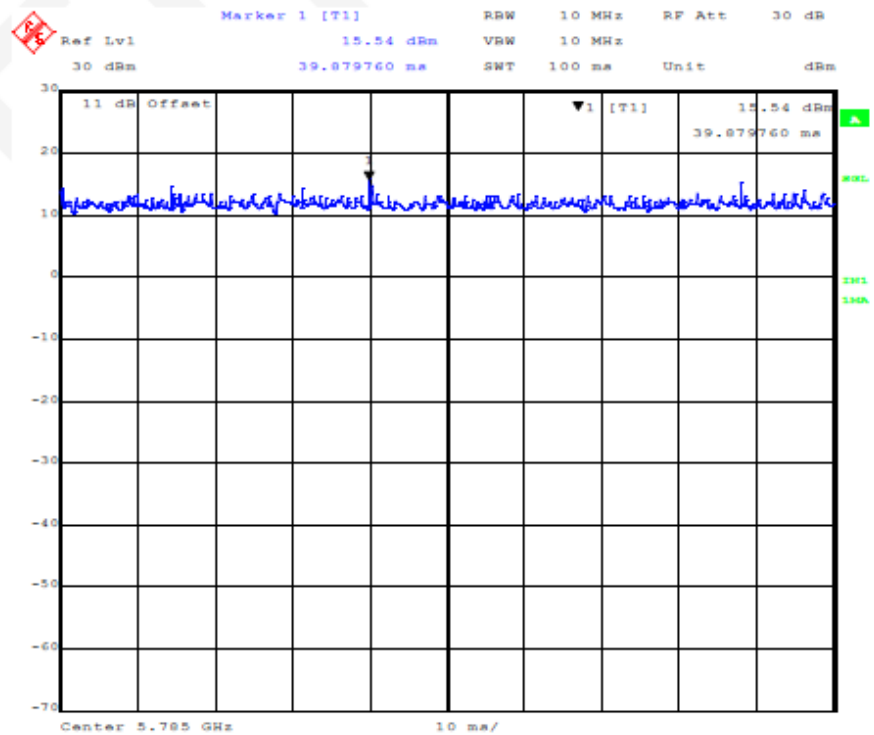


802.11n-HT20 mode

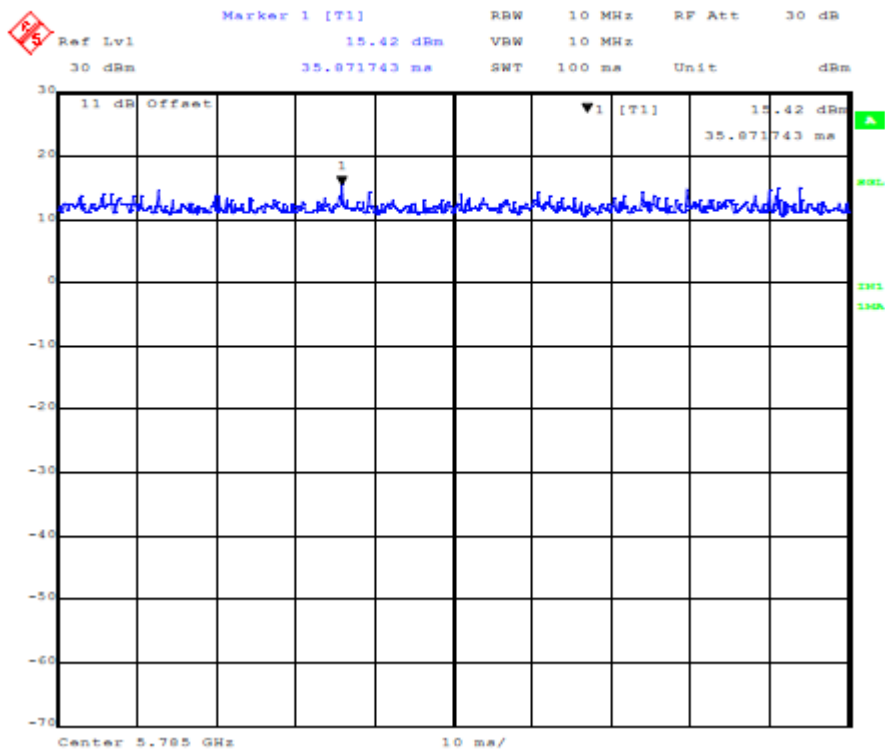


802.11 ac40 mode

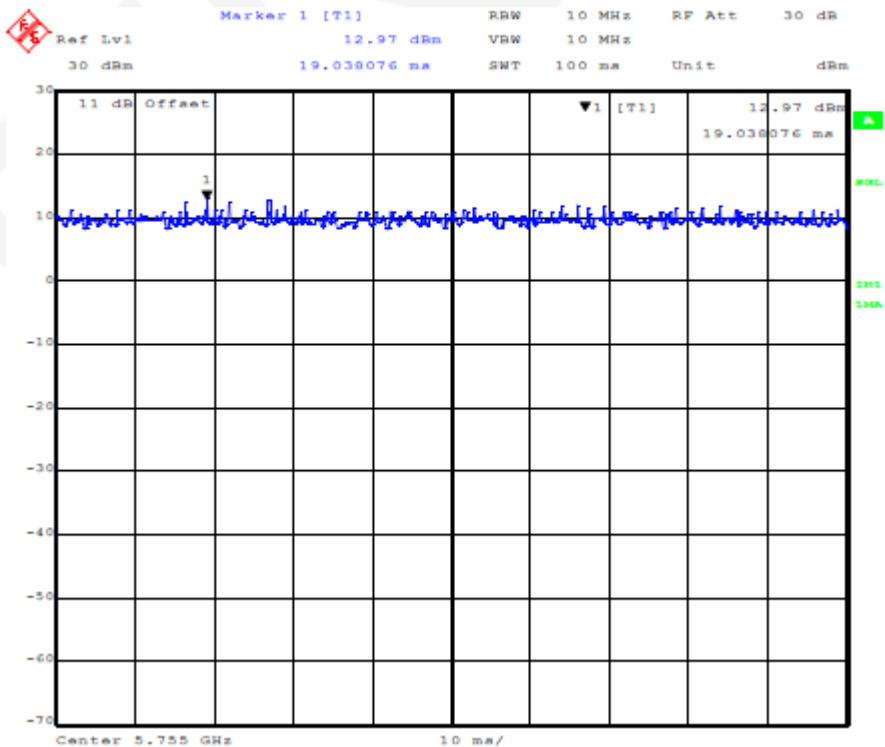


802.11n-HT40 mode

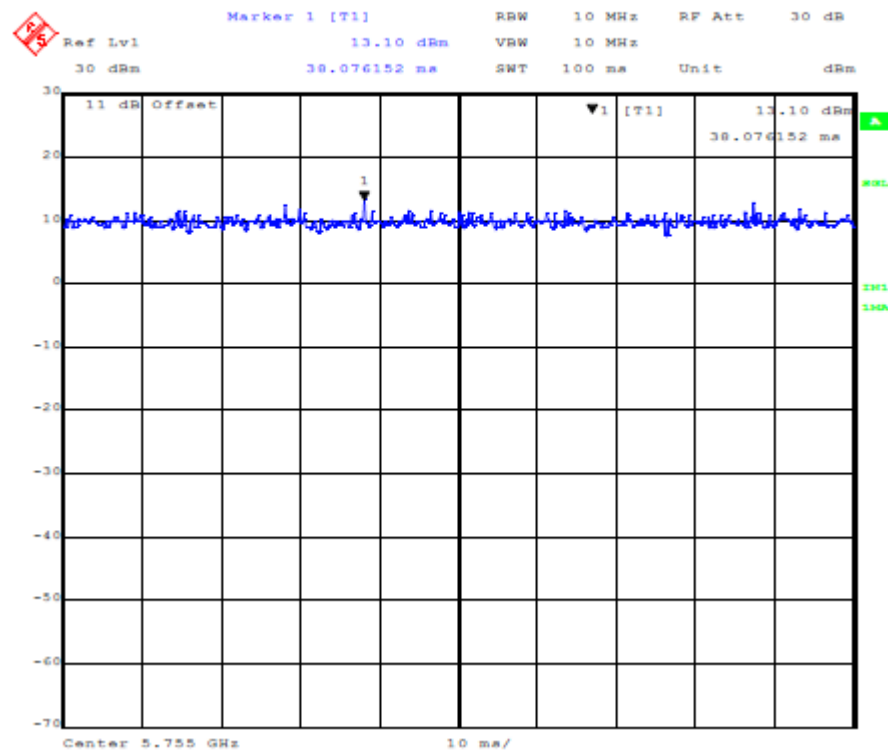


802.11n- ac80 mode

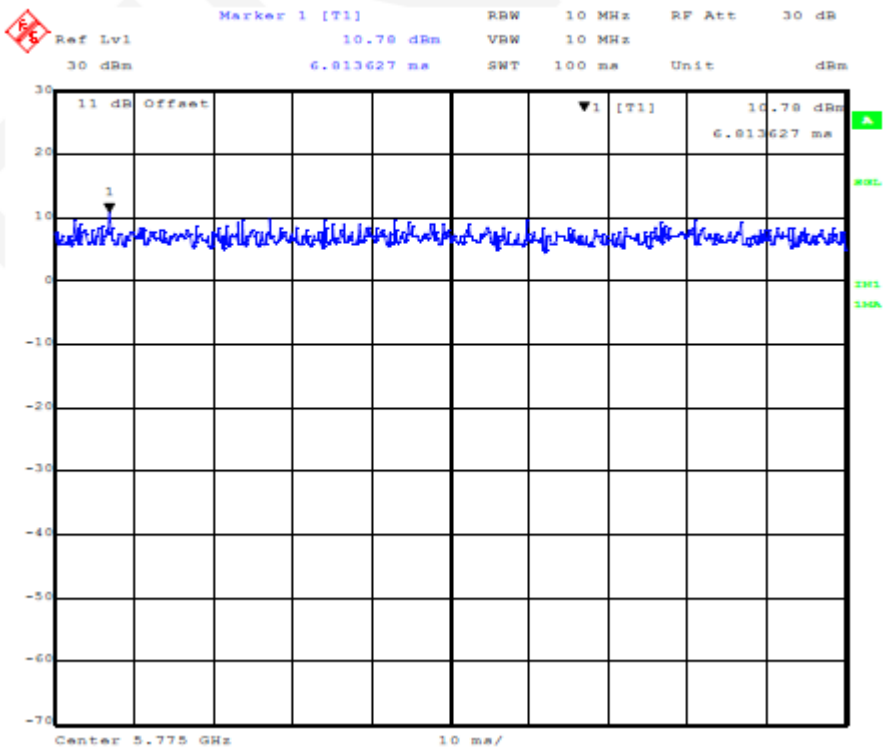


Duty Cycle (Chain1) 5725~5850MHz Band:
802.11a mode

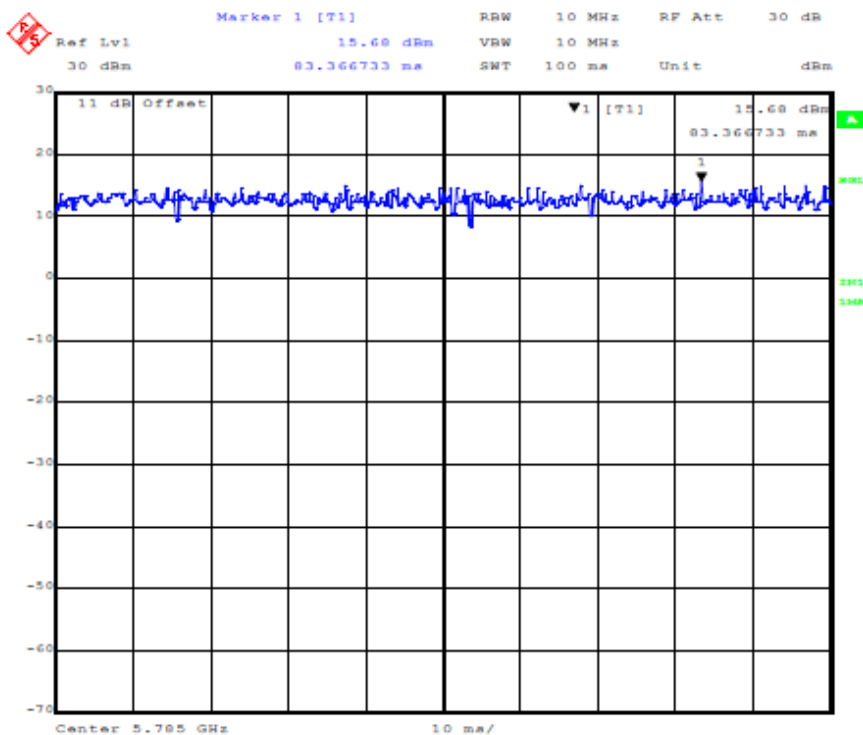


802.11ac20 mode

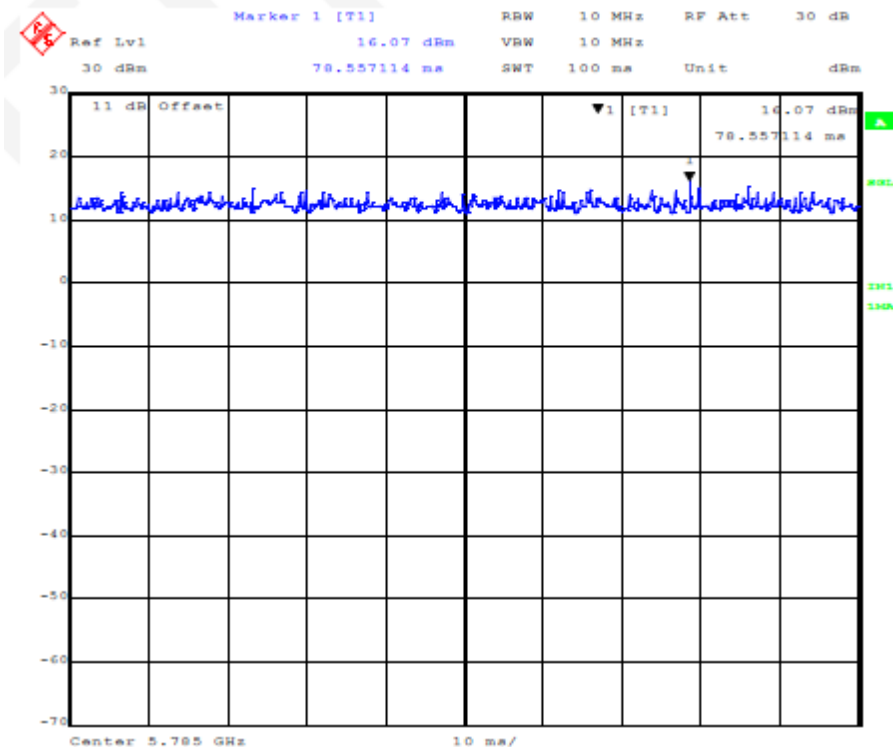


802.11n-HT20 mode

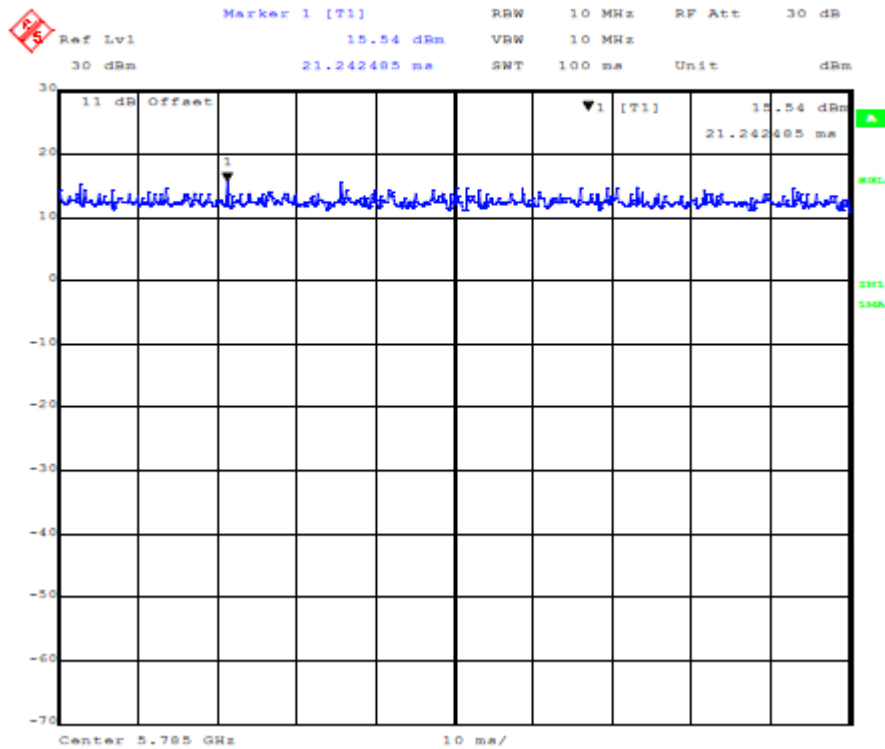


802.11 ac40 mode

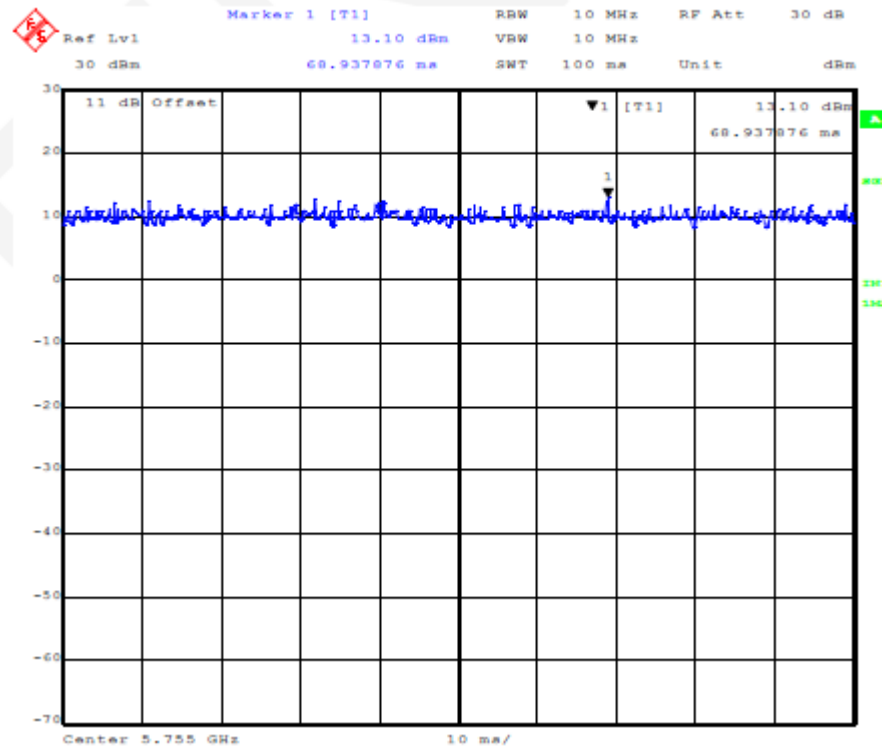

802.11n-HT40 mode

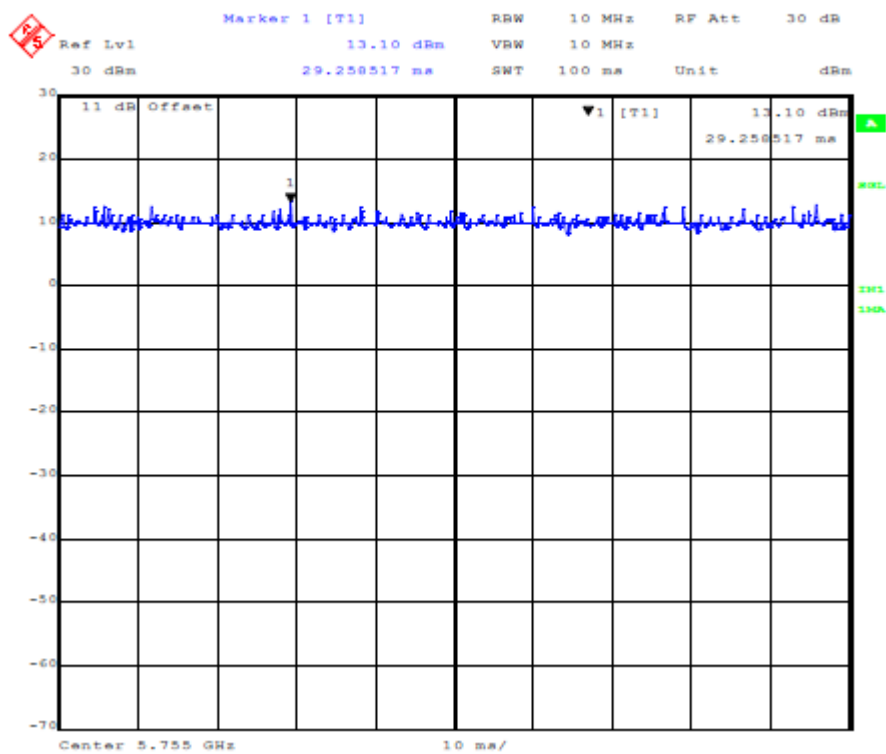

802.11n- ac80 mode

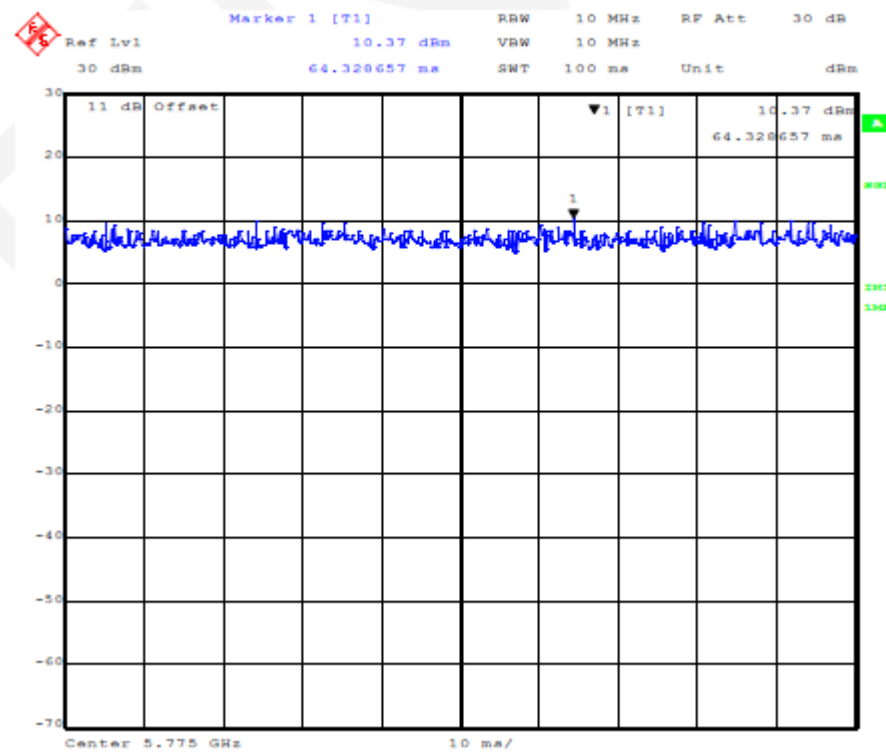

Chain 0:

Mode	Frequency Range (MHz)	Duty Cycle (%)	T (ms)	1/T (kHz)	10log(1/x)
802.11a	5150-5250	100	/	/	0
802.11ac20		100	/	/	0
802.11n-HT20		100	/	/	0
802.11ac40		100	/	/	0
802.11n-HT40		100	/	/	0
802.11ac80		100	/	/	0
802.11a	5725-5850	100	/	/	0
802.11ac20		100	/	/	0
802.11n-HT20		100	/	/	0
802.11ac40		100	/	/	0
802.11n-HT40		100	/	/	0
802.11ac80		100	/	/	0

Chain 1:

Mode	Frequency Range (MHz)	Duty Cycle (%)	T (ms)	1/T (kHz)	10log(1/x)
802.11a	5150-5250	100	/	/	0
802.11ac20		100	/	/	0
802.11n-HT20		100	/	/	0
802.11ac40		100	/	/	0
802.11n-HT40		100	/	/	0
802.11ac80		100	/	/	0
802.11a	5725-5850	100	/	/	0
802.11ac20		100	/	/	0
802.11n-HT20		100	/	/	0
802.11ac40		100	/	/	0
802.11n-HT40		100	/	/	0
802.11ac80		100	/	/	0

Note: "x" means duty cycle.

WWAN Antenna Reduction Power**WCDMA Band II**

Test Condition	Test Mode	3GPP Sub Test	Averaged Mean Power (dBm)		
			Low Channel	Mid Channel	High Channel
Normal	Rel 99 RMC	1	12.26	12.66	12.41
	HSDPA	1	11.86	11.86	11.95
		2	11.93	11.74	11.93
		3	11.79	11.67	12.06
		4	11.77	11.84	11.95
	HSUPA	1	11.74	11.67	11.97
		2	11.78	11.73	11.96
		3	11.81	11.63	12.02
		4	11.90	11.72	11.97
		5	11.90	11.71	11.99
	HSPA+	1	11.84	11.81	12.01

WCDMA Band IV

Test Condition	Test Mode	3GPP Sub Test	Averaged Mean Power (dBm)		
			Low Channel	Mid Channel	High Channel
Normal	Rel 99 RMC	1	14.67	14.44	14.23
	HSDPA	1	14.61	13.78	13.71
		2	14.61	13.79	13.64
		3	14.56	13.76	13.75
		4	14.50	13.84	13.70
	HSUPA	1	14.44	13.76	13.75
		2	14.51	13.72	13.78
		3	14.47	13.84	13.73
		4	14.62	13.72	13.77
		5	14.40	13.70	13.73
	HSPA+	1	14.50	13.89	13.77

LTE Band 7 part1:

Test Bandwidth	Test Modulation	Resource Block & RB offset	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
5M	QPSK	RB1#0	19.17	18.64	18.39
		RB1#12	19.05	18.38	17.98
		RB1#24	19.09	18.21	17.92
		RB12#0	19.11	18.14	17.81
		RB12#6	18.97	18.22	17.75
		RB12#11	18.91	18.25	17.56
		RB25#0	18.83	17.96	17.36
	16-QAM	RB1#0	18.82	17.73	17.64
		RB1#12	18.75	17.56	17.55
		RB1#24	18.68	17.53	17.46
		RB12#0	18.63	17.49	17.42
		RB12#6	18.47	17.51	17.28
		RB12#11	18.21	17.23	17.16
		RB25#0	18.02	17.17	17.15
10M	QPSK	RB1#0	19.13	18.67	18.48
		RB1#24	19.03	18.56	18.27
		RB1#49	19.06	18.55	18.24
		RB25#0	19.12	18.21	18.16
		RB25#12	19.03	18.14	18.07
		RB25#24	18.95	18.3	17.95
		RB50#0	18.76	18.43	17.96
	16-QAM	RB1#0	18.74	17.96	17.85
		RB1#24	19.01	17.87	17.45
		RB1#49	19.05	18.44	17.27
		RB25#0	18.84	18.21	17.16
		RB25#12	18.88	17.94	17.06
		RB25#24	18.79	17.77	16.98
		RB50#0	18.68	17.62	16.92

LTE Band 7 part2:

Test Bandwidth	Test Modulation	Resource Block & RB offset	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
15M	QPSK	RB1#0	19.15	18.42	18.43
		RB1#37	19.06	17.94	18.28
		RB1#74	18.94	17.78	18.11
		RB36#0	18.76	17.68	17.92
		RB36#17	18.66	17.59	17.84
		RB36#35	18.43	17.45	17.74
		RB75#0	18.41	17.35	18.06
	16-QAM	RB1#0	18.27	17.39	17.88
		RB1#37	18.17	17.52	17.67
		RB1#74	18.15	17.59	17.63
		RB36#0	18.31	17.27	17.76
		RB36#17	18.19	17.18	17.52
		RB36#35	18.12	17.11	17.38
		RB75#0	17.82	17.05	17.19
20M	QPSK	RB1#0	19.27	18.88	18.62
		RB1#49	19.25	18.06	18.58
		RB1#99	18.98	17.92	17.93
		RB50#0	18.38	18.81	18.33
		RB50#24	19.15	18.08	17.02
		RB50#49	19.08	18.1	17.56
		RB100#0	19.06	17.51	17.42
	16-QAM	RB1#0	19.12	18.03	16.96
		RB1#49	18.88	17.63	17.15
		RB1#99	18.62	17.73	16.86
		RB50#0	18.83	18.18	16.54
		RB50#24	19.05	17.76	17.37
		RB50#49	18.78	18.15	16.88
		RB100#0	18.46	17.73	17.52

LTE Band 12 part1:

Test Bandwidth	Test Modulation	Resource Block & RB offset	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
1.4M	QPSK	RB1#0	19.16	19.23	19.27
		RB1#3	19.05	19.21	19.19
		RB1#5	19.15	19.26	19.19
		RB3#0	19.20	19.23	19.00
		RB3#1	19.13	19.17	19.10
		RB3#3	19.26	19.26	19.12
		RB6#0	19.20	19.17	19.09
	16-QAM	RB1#0	19.19	19.27	19.21
		RB1#3	19.26	19.25	19.11
		RB1#5	19.11	19.21	19.25
		RB3#0	19.12	19.16	19.15
		RB3#1	19.06	19.23	19.18
		RB3#3	18.96	19.18	19.28
		RB6#0	18.92	19.21	19.35
3M	QPSK	RB1#0	19.19	19.32	19.34
		RB1#7	19.16	19.27	19.39
		RB1#14	19.03	19.28	19.32
		RB8#0	19.02	19.28	19.29
		RB8#4	19.06	19.25	19.22
		RB8#7	18.95	19.20	19.25
		RB15#0	18.89	19.20	19.29
	16-QAM	RB1#0	18.97	19.15	19.21
		RB1#7	18.99	19.08	19.17
		RB1#14	19.05	19.11	19.29
		RB8#0	18.99	19.09	19.33
		RB8#4	18.98	19.15	19.28
		RB8#7	18.97	19.16	19.33
		RB15#0	18.98	19.25	19.14

LTE Band 12 part2:

Test Bandwidth	Test Modulation	Resource Block & RB offset	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
5M	QPSK	RB1#0	19.21	19.39	19.33
		RB1#12	19.15	19.22	19.26
		RB1#24	19.15	19.18	19.13
		RB12#0	19.08	19.02	19.04
		RB12#6	18.98	18.93	18.93
		RB12#11	18.88	18.86	18.82
		RB25#0	18.86	18.75	18.72
	16-QAM	RB1#0	18.70	18.65	18.64
		RB1#12	18.66	18.58	18.53
		RB1#24	18.39	18.33	18.41
		RB12#0	18.29	18.26	18.35
		RB12#6	18.21	18.14	18.35
		RB12#11	18.18	18.04	18.41
		RB25#0	18.27	18.15	18.45
10M	QPSK	RB1#0	19.31	19.50	19.50
		RB1#24	19.20	19.32	19.35
		RB1#49	19.18	19.25	19.28
		RB25#0	19.32	19.41	19.41
		RB25#12	19.26	19.34	19.29
		RB25#24	19.16	19.14	19.13
		RB50#0	19.12	19.06	19.05
	16-QAM	RB1#0	19.22	19.42	19.43
		RB1#24	19.11	19.28	19.29
		RB1#49	19.06	19.19	19.23
		RB25#0	18.97	19.01	19.03
		RB25#12	18.91	18.92	18.96
		RB25#24	18.84	18.81	18.86
		RB50#0	18.72	18.75	18.81

LTE Band 25 part1:

Test Bandwidth	Test Modulation	Resource Block & RB offset	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
1.4M	QPSK	RB1#0	11.71	11.80	11.74
		RB1#3	11.69	11.80	11.77
		RB1#5	11.59	11.80	11.73
		RB3#0	11.62	11.85	11.73
		RB3#1	11.62	11.69	11.81
		RB3#3	11.67	11.70	11.69
		RB6#0	11.65	11.77	11.76
	16-QAM	RB1#0	11.69	11.75	11.81
		RB1#3	11.63	11.83	11.71
		RB1#5	11.65	11.70	11.79
		RB3#0	11.78	11.77	11.76
		RB3#1	11.83	11.75	11.77
		RB3#3	11.84	11.71	11.58
		RB6#0	11.85	11.75	11.50
3M	QPSK	RB1#0	11.87	11.71	11.43
		RB1#7	11.81	11.64	11.55
		RB1#14	11.65	11.73	11.54
		RB8#0	11.56	11.73	11.74
		RB8#4	11.51	11.78	11.72
		RB8#7	11.55	11.84	11.66
		RB15#0	11.51	11.77	11.67
	16-QAM	RB1#0	11.57	11.76	11.79
		RB1#7	11.53	11.71	11.82
		RB1#14	11.42	11.69	11.80
		RB8#0	11.47	11.64	11.85
		RB8#4	11.49	11.67	11.75
		RB8#7	11.41	11.62	11.86
		RB15#0	11.46	11.70	11.90

LTE Band 25 part2:

Test Bandwidth	Test Modulation	Resource Block & RB offset	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
5M	QPSK	RB1#0	11.41	12.03	11.24
		RB1#12	11.39	12.03	11.40
		RB1#24	11.44	11.96	11.42
		RB12#0	11.47	12.04	11.43
		RB12#6	11.38	12.06	11.31
		RB12#11	11.40	12.12	11.30
		RB25#0	11.39	12.09	11.37
	16-QAM	RB1#0	11.39	12.05	11.42
		RB1#12	11.33	12.02	11.50
		RB1#24	11.45	12.04	11.56
		RB12#0	11.42	12.07	11.42
		RB12#6	11.49	12.03	11.38
		RB12#11	11.46	12.06	11.35
		RB25#0	11.55	12.06	11.40
10M	QPSK	RB1#0	11.63	12.01	11.35
		RB1#24	11.59	12.06	11.33
		RB1#49	11.62	12.10	11.38
		RB25#0	11.62	12.10	11.48
		RB25#12	11.62	12.02	11.41
		RB25#24	11.64	12.00	11.28
		RB50#0	11.68	11.95	11.35
	16-QAM	RB1#0	11.80	11.95	11.31
		RB1#24	11.68	12.05	11.38
		RB1#49	11.53	12.00	11.33
		RB25#0	11.59	11.99	11.40
		RB25#12	11.62	12.09	11.37
		RB25#24	11.64	12.20	11.47
		RB50#0	11.68	12.11	11.48

LTE Band 25 part3:

Test Bandwidth	Test Modulation	Resource Block & RB offset	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
15M	QPSK	RB1#0	12.02	11.84	11.90
		RB1#37	11.85	11.92	11.82
		RB1#74	11.69	11.46	11.75
		RB36#0	11.70	11.56	11.63
		RB36#17	11.57	11.64	11.53
		RB36#35	11.44	11.57	11.36
		RB75#0	11.47	11.61	11.25
	16-QAM	RB1#0	11.15	11.45	11.36
		RB1#37	11.97	11.31	11.41
		RB1#74	11.77	11.20	11.54
		RB36#0	11.66	11.27	11.57
		RB36#17	11.54	11.35	11.47
		RB36#35	11.57	11.46	11.40
		RB75#0	11.62	11.66	11.53
20M	QPSK	RB1#0	12.12	12.37	12.42
		RB1#49	12.09	12.14	12.33
		RB1#99	11.88	12.09	12.29
		RB50#0	11.79	11.85	12.22
		RB50#24	11.81	11.86	12.14
		RB50#49	11.72	11.82	12.13
		RB100#0	11.66	11.72	12.07
	16-QAM	RB1#0	11.45	11.67	12.12
		RB1#49	11.36	11.61	11.75
		RB1#99	11.41	11.43	11.66
		RB50#0	11.32	11.21	11.73
		RB50#24	11.28	11.17	11.51
		RB50#49	11.12	11.13	11.56
		RB100#0	11.16	11.23	11.37

LTE Band 66 part1:

Test Bandwidth	Test Modulation	Resource Block & RB offset	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
1.4M	QPSK	RB1#0	14.65	14.79	14.72
		RB1#3	14.77	14.64	14.79
		RB1#5	14.78	14.74	14.83
		RB3#0	14.86	14.82	14.78
		RB3#1	14.75	14.77	14.86
		RB3#3	14.84	14.86	14.85
		RB6#0	14.8	14.81	14.78
	16-QAM	RB1#0	14.74	14.67	14.8
		RB1#3	14.69	14.6	14.7
		RB1#5	14.82	14.68	14.69
		RB3#0	14.71	14.74	14.7
		RB3#1	14.85	14.8	14.71
		RB3#3	14.8	14.82	14.68
		RB6#0	14.8	14.86	14.65
3M	QPSK	RB1#0	14.87	14.82	14.56
		RB1#7	14.76	14.66	14.62
		RB1#14	14.7	14.57	14.71
		RB8#0	14.71	14.62	14.68
		RB8#4	14.63	14.71	14.65
		RB8#7	14.45	14.75	14.71
		RB15#0	14.4	14.66	14.79
	16-QAM	RB1#0	14.45	14.6	14.8
		RB1#7	14.35	14.65	14.65
		RB1#14	14.46	14.66	14.72
		RB8#0	14.52	14.69	14.62
		RB8#4	14.44	14.76	14.54
		RB8#7	14.46	14.78	14.59
		RB15#0	14.38	14.7	14.52

LTE Band 66 part2:

Test Bandwidth	Test Modulation	Resource Block & RB offset	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
5M	QPSK	RB1#0	14.43	14.50	15.11
		RB1#12	14.38	14.64	15.06
		RB1#24	14.49	14.67	14.95
		RB12#0	14.51	14.77	14.97
		RB12#6	14.52	14.79	14.96
		RB12#11	14.46	14.68	14.99
		RB25#0	14.39	14.73	14.86
	16-QAM	RB1#0	14.47	14.82	14.92
		RB1#12	14.55	14.75	14.95
		RB1#24	14.53	14.75	14.96
		RB12#0	14.61	14.84	14.99
		RB12#6	14.62	14.95	15.03
		RB12#11	14.67	14.98	15.12
		RB25#0	14.71	14.98	15.18
10M	QPSK	RB1#0	14.60	14.96	15.16
		RB1#24	14.53	14.82	15.11
		RB1#49	14.65	14.82	15.19
		RB25#0	14.63	14.74	15.18
		RB25#12	14.68	14.72	15.07
		RB25#24	14.67	14.60	15.03
		RB50#0	14.67	14.54	14.96
	16-QAM	RB1#0	14.64	14.55	14.92
		RB1#24	14.64	14.65	14.85
		RB1#49	14.66	14.53	14.70
		RB25#0	14.59	14.65	14.66
		RB25#12	14.68	14.61	14.69
		RB25#24	14.71	14.69	14.63
		RB50#0	14.68	14.82	14.59

LTE Band 66 part3:

Test Bandwidth	Test Modulation	Resource Block & RB offset	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
15M	QPSK	RB1#0	14.88	14.87	15.01
		RB1#37	14.82	14.92	15.00
		RB1#74	14.73	14.87	15.03
		RB36#0	14.72	14.85	14.94
		RB36#17	14.68	14.97	15.03
		RB36#35	14.58	15.10	14.99
		RB75#0	14.52	15.09	14.78
	16-QAM	RB1#0	14.46	15.07	14.68
		RB1#37	14.38	15.21	14.63
		RB1#74	14.32	15.22	14.52
		RB36#0	14.22	15.21	14.52
		RB36#17	14.25	15.25	14.67
		RB36#35	14.31	15.31	14.78
		RB75#0	14.26	15.36	14.89
20M	QPSK	RB1#0	15.37	15.53	15.47
		RB1#49	15.35	15.46	15.24
		RB1#99	15.27	15.44	15.14
		RB50#0	15.19	15.38	15.11
		RB50#24	15.08	15.33	15.03
		RB50#49	15.06	15.28	14.96
		RB100#0	14.96	15.23	14.86
	16-QAM	RB1#0	14.85	15.19	14.73
		RB1#49	14.72	15.12	14.72
		RB1#99	14.68	15.04	14.52
		RB50#0	14.55	14.96	14.37
		RB50#24	14.49	14.91	14.31
		RB50#49	14.36	14.81	14.21
		RB100#0	14.29	14.86	14.26

LTE Band 2 part1:

Test Bandwidth	Test Modulation	Resource Block & RB offset	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
1.4M	QPSK	RB1#0	11.54	11.81	11.66
		RB1#3	11.48	11.83	11.69
		RB1#5	11.36	11.91	11.66
		RB3#0	11.36	11.9	11.63
		RB3#1	11.25	11.91	11.74
		RB3#3	11.31	11.89	11.7
		RB6#0	11.32	11.9	11.84
	16-QAM	RB1#0	11.41	11.81	11.76
		RB1#3	11.38	11.84	11.71
		RB1#5	11.3	11.93	11.57
		RB3#0	11.37	11.89	11.72
		RB3#1	11.3	11.94	11.8
		RB3#3	11.33	11.86	11.73
		RB6#0	11.31	11.91	11.81
3M	QPSK	RB1#0	11.34	11.93	11.72
		RB1#7	11.47	11.98	11.83
		RB1#14	11.46	11.93	11.99
		RB8#0	11.43	11.79	11.85
		RB8#4	11.42	11.73	11.95
		RB8#7	11.47	11.62	11.87
		RB15#0	11.43	11.57	11.79
	16-QAM	RB1#0	11.46	11.66	11.81
		RB1#7	11.45	11.69	11.84
		RB1#14	11.42	11.65	11.79
		RB8#0	11.45	11.69	11.84
		RB8#4	11.51	11.72	11.79
		RB8#7	11.42	11.73	11.63
		RB15#0	11.54	11.78	11.53

LTE Band 2 part2:

Test Bandwidth	Test Modulation	Resource Block & RB offset	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
5M	QPSK	RB1#0	11.63	12.05	11.56
		RB1#12	11.59	12.02	11.6
		RB1#24	11.68	11.97	11.61
		RB12#0	11.76	11.98	11.67
		RB12#6	11.69	12.05	11.58
		RB12#11	11.58	12.01	11.59
		RB25#0	11.57	11.91	11.68
	16-QAM	RB1#0	11.49	11.83	11.66
		RB1#12	11.41	11.73	11.71
		RB1#24	11.36	11.66	11.78
		RB12#0	11.42	11.68	11.85
		RB12#6	11.46	11.78	11.8
		RB12#11	11.51	11.76	11.76
		RB25#0	11.56	12.07	12.14
10M	QPSK	RB1#0	11.6	11.94	11.97
		RB1#24	11.75	11.86	11.83
		RB1#49	11.68	11.58	11.77
		RB25#0	11.61	11.52	11.71
		RB25#12	11.57	11.54	11.71
		RB25#24	11.57	11.51	11.85
		RB50#0	11.61	11.41	11.79
	16-QAM	RB1#0	11.58	11.43	11.82
		RB1#24	11.47	11.38	11.81
		RB1#49	11.38	11.27	11.69
		RB25#0	11.36	11.19	11.67
		RB25#12	11.29	11.11	11.65
		RB25#24	11.38	11.14	11.66
		RB50#0	11.63	12.05	11.56

LTE Band 2 part3:

Test Bandwidth	Test Modulation	Resource Block & RB offset	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
15M	QPSK	RB1#0	11.67	12.01	12.09
		RB1#37	11.65	11.98	11.99
		RB1#74	11.67	12.02	12.02
		RB36#0	11.7	11.98	12.05
		RB36#17	11.62	11.95	11.92
		RB36#35	11.72	12.04	11.98
		RB75#0	11.7	11.99	11.88
	16-QAM	RB1#0	11.62	11.91	11.81
		RB1#37	11.61	11.81	11.72
		RB1#74	11.63	11.82	11.65
		RB36#0	11.55	11.77	11.58
		RB36#17	11.47	11.73	11.52
		RB36#35	11.39	11.83	11.45
		RB75#0	11.53	11.81	11.47
20M	QPSK	RB1#0	11.78	12.08	12.18
		RB1#49	11.78	12.01	12.14
		RB1#99	11.68	11.94	12.12
		RB50#0	11.69	11.99	12.14
		RB50#24	11.66	11.92	12.04
		RB50#49	11.64	11.91	11.98
		RB100#0	11.59	11.92	11.99
	16-QAM	RB1#0	11.72	11.82	11.93
		RB1#49	11.61	11.72	11.82
		RB1#99	11.52	11.62	11.73
		RB50#0	11.58	11.67	11.69
		RB50#24	11.53	11.72	11.74
		RB50#49	11.49	11.62	11.75
		RB100#0	11.57	11.57	11.66

LTE Band 4 part1:

Test Bandwidth	Test Modulation	Resource Block & RB offset	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
1.4M	QPSK	RB1#0	14.50	14.73	14.63
		RB1#3	14.60	14.72	14.56
		RB1#5	14.65	14.70	14.60
		RB3#0	14.51	14.72	14.53
		RB3#3	14.43	14.67	14.57
		RB6#0	14.36	14.67	14.49
	16-QAM	RB1#0	14.35	14.57	14.60
		RB1#3	14.34	14.61	14.71
		RB1#5	14.24	14.67	14.69
		RB3#0	14.15	14.59	14.71
		RB3#3	14.22	14.65	14.79
		RB6#0	14.20	14.64	14.74
3M	QPSK	RB1#0	14.12	14.55	14.68
		RB1#8	14.17	14.65	14.58
		RB1#14	14.28	14.68	14.62
		RB6#0	14.13	14.58	14.65
		RB6#9	14.19	14.55	14.61
		RB15#0	14.14	14.62	14.70
	16-QAM	RB1#0	14.05	14.53	14.73
		RB1#8	14.02	14.62	14.76
		RB1#14	14.04	14.69	14.64
		RB6#0	13.93	14.65	14.67
		RB6#9	13.89	14.66	14.66
		RB15#0	13.82	14.56	14.69

LTE Band 4 part2:

Test Bandwidth	Test Modulation	Resource Block & RB offset	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
5M	QPSK	RB1#0	14.30	14.82	14.64
		RB1#12	14.39	14.85	14.74
		RB1#24	14.35	14.85	14.63
		RB12#0	14.42	14.91	14.62
		RB12#6	14.49	14.97	14.73
		RB12#11	14.42	14.90	14.60
		RB25#0	14.50	14.79	14.68
	16-QAM	RB1#0	14.54	14.70	14.62
		RB1#12	14.56	14.81	14.75
		RB1#24	14.64	14.86	14.78
		RB12#0	14.66	14.81	14.68
		RB12#6	14.89	14.72	14.72
		RB12#11	14.77	14.67	14.53
		RB25#0	14.66	14.70	14.61
10M	QPSK	RB1#0	14.68	15.03	14.54
		RB1#24	14.63	14.86	14.62
		RB1#49	14.76	14.93	14.65
		RB25#0	14.66	14.92	14.73
		RB25#12	14.71	14.89	14.66
		RB25#24	14.75	15.05	14.62
		RB50#0	14.70	15.18	14.65
	16-QAM	RB1#0	14.79	14.86	14.47
		RB1#24	14.71	14.89	14.61
		RB1#49	14.80	14.79	14.71
		RB25#0	14.77	14.72	14.66
		RB25#12	14.82	14.67	14.75
		RB25#24	14.70	14.61	14.66
		RB50#0	14.67	14.57	14.56

LTE Band 4 part3:


Test Bandwidth	Test Modulation	Resource Block & RB offset	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
15M	QPSK	RB1#0	15.45	15.07	14.71
		RB1#37	15.51	15.02	14.57
		RB1#74	15.48	14.96	14.57
		RB36#0	15.48	14.92	14.57
		RB36#17	15.53	14.81	14.64
		RB36#35	15.41	14.73	14.45
		RB75#0	15.35	14.71	14.47
	16-QAM	RB1#0	15.33	15.11	14.54
		RB1#37	15.36	15.02	14.54
		RB1#74	15.25	15.07	14.53
		RB36#0	15.26	14.98	14.49
		RB36#17	15.21	14.92	14.42
		RB36#35	15.11	14.91	14.49
		RB75#0	15.06	14.96	14.43
20M	QPSK	RB1#0	15.62	15.15	15.36
		RB1#49	15.52	15.02	15.26
		RB1#99	15.71	14.99	15.17
		RB50#0	15.69	14.95	15.11
		RB50#24	15.68	14.87	15.03
		RB50#49	15.62	14.87	14.93
		RB100#0	15.19	14.97	14.89
	16-QAM	RB1#0	15.19	14.98	14.15
		RB1#49	15.14	15.04	14.18
		RB1#99	15.15	14.89	14.05
		RB50#0	15.05	14.98	14.24
		RB50#24	14.97	14.88	14.23
		RB50#49	14.88	14.83	14.22
		RB100#0	14.79	14.72	14.27

LTE Band 17 part1:

Test Bandwidth	Test Modulation	Resource Block & RB offset	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
5M	QPSK	RB1#0	18.69	18.73	18.70
		RB1#12	18.66	18.79	18.83
		RB1#24	18.61	18.69	18.83
		RB12#0	18.61	18.77	18.97
		RB12#6	17.85	18.81	19.03
		RB12#11	18.73	18.76	19.07
		RB25#0	18.54	18.70	19.10
	16-QAM	RB1#0	18.52	18.64	18.99
		RB1#12	18.58	18.62	18.86
		RB1#24	18.52	18.57	18.76
		RB12#0	18.53	18.61	18.73
		RB12#6	18.47	18.52	18.61
		RB12#11	18.60	18.62	18.67
		RB25#0	18.61	18.67	18.58
10M	QPSK	RB1#0	19.41	19.50	18.75
		RB1#24	19.27	19.26	18.65
		RB1#49	19.08	19.15	18.48
		RB25#0	18.97	19.09	18.41
		RB25#12	18.76	18.99	18.31
		RB25#24	18.69	18.72	18.21
		RB50#0	18.59	18.53	18.12
	16-QAM	RB1#0	18.62	18.49	18.65
		RB1#24	18.62	18.58	18.55
		RB1#49	18.72	18.53	18.60
		RB25#0	18.77	18.70	18.70
		RB25#12	18.75	18.53	18.60
		RB25#24	18.82	18.50	18.61
		RB50#0	18.85	17.58	18.55

STANDALONE SAR TEST EXCLUSION CONSIDERATIONS

Antennas Location:

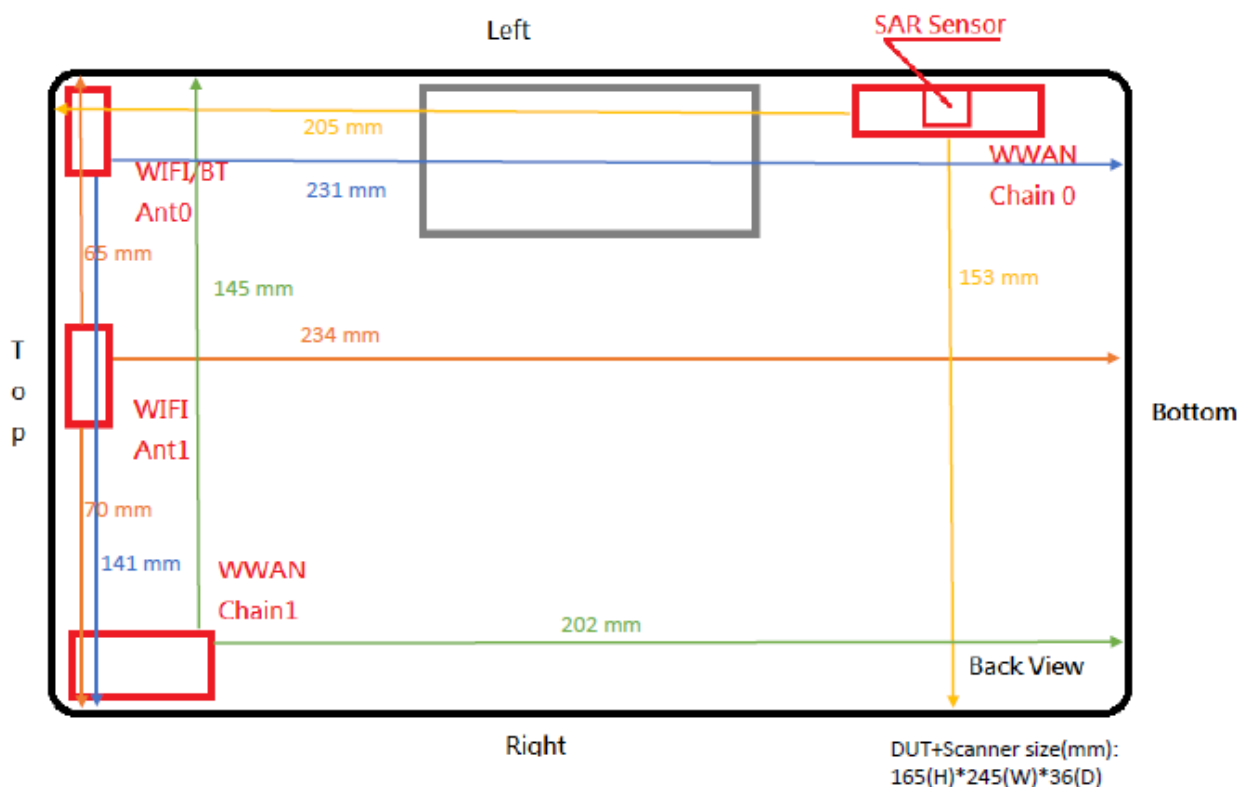

Antenna Distance To Edge

Antenna	Antenna Distance to Edge(mm)					
	Back	Front	Left	Right	Top	Bottom
WWAN Chain 1	<5	<5	145	<5	<5	202
WWAN Chain 0	<5	<5	<5	153	205	<5
WiFi/BT Ant 0	<5	<5	<5	141	<5	231
WiFi/BT Ant 1	<5	<5	65	70	<5	234

Each antenna supports the following frequency bands:

WWAN Chain 0 : WCDMA II / WCDMA IV / LTE Band 2 / LTE Band 4 / LTE Band 7 / LTE Band 12 / LTE Band 17 /
LTE Band 25 / LTE Band 66

WWAN Chain 1 : WCDMA V / LTE Band 13 / LTE Band 14 / LTE Band 26 / LTE Band 71 LTE Band 41

WiFi/BT Ant 0 : WIFI 2.4G/WIFI 5G / BT

WiFi/BT Ant 1 : WIFI 2.4G/WIFI 5G

Standalone SAR test exclusion considerations (for Ant. to Top Distance > 50mm)

Mode	Frequency (MHz)	P_{avg} (dBm)	P_{avg} (mW)	Test Exclusion Distance (mm)
WCDMA Band 2	1907.6	23	200	60
WCDMA Band 4	1752.6	23	200	60
WCDMA Band 5	846.6	23	200	57
LTE Band 7	2560	22.5	178	59
LTE Band 12	711	22.8	191	53
LTE Band 13	782	22.8	191	54
LTE Band 14	793	22.8	191	54
LTE Band 25	1905	22.8	191	56
LTE Band 26	841.5	22.8	191	55
LTE Band 41	2645	22.5	178	59
LTE Band 66	1770	22.5	178	57
LTE Band 71	688	22.8	191	56
WiFi 2.4GHz_Ant 0	2412	13.6	23	13
WiFi 2.4GHz_Ant 1	2462	13.3	21	11
Bluetooth	2480	11	13	7
WiFi 5.2GHz_Ant 0	5240	9	8	7
WiFi 5.2GHz_Ant 1	5240	10	10	8
WiFi 5.8GHz_Ant 0	5825	8	6	6
WiFi 5.8GHz_Ant 1	5825	8.1	6	6

SAR test exclusion for the EUT edge considerations Result (Required: O / Exclusion: X)

Mode	Front Face	Back Face	Left Side	Right Side	Top Side	Bottom Side
WCDMA Band 2	O	O	O	X	X	O
WCDMA Band 4	O	O	O	X	X	O
WCDMA Band 5	O	O	X	O	O	X
LTE Band 7	O	O	O	X	X	O
LTE Band 12	O	O	O	X	X	O
LTE Band 13	O	O	X	O	O	X
LTE Band 14	O	O	X	O	O	X
LTE Band 25	O	O	O	X	X	O
LTE Band 26	O	O	X	O	O	X
LTE Band 41	O	O	X	O	O	X
LTE Band 66	O	O	O	X	X	O
LTE Band 71	O	O	X	O	O	X
WiFi 2.4GHz_Ant 0	O	O	O	X	O	X
WiFi 2.4GHz_Ant 1	O	O	X	X	O	X
Bluetooth	O	O	O	X	O	X
WiFi 5.2GHz_Ant 0	O	O	O	X	O	X
WiFi 5.2GHz_Ant 1	O	O	X	X	O	X
WiFi 5.8GHz_Ant 0	O	O	O	X	O	X
WiFi 5.8GHz_Ant 1	O	O	X	X	O	X

Note:

Required: The distance is less than Test Exclusion Distance, testing is required.

Exclusion*: SAR test exclusion evaluation has been done above.

Exclusion: The distance is larger than Test Exclusion Distance, testing is not required.

SAR test exclusion for the EUT edge considerations detail :

- 1) The 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at *test separation distances* ≤ 50 mm are determined by:

$$[(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm})] \cdot [\sqrt{f_{\text{GHz}}}] \leq 3.0 \text{ for 1-g SAR and } \leq 7.5 \text{ for 10-g extremity SAR,}^{16} \text{ where}$$

- f_{GHz} is the RF channel transmit frequency in GHz
- Power and distance are rounded to the nearest mW and mm before calculation¹⁷
- The result is rounded to one decimal place for comparison

The test exclusions are applicable only when the minimum *test separation distance* is ≤ 50 mm and for transmission frequencies between 100 MHz and 6 GHz. When the minimum *test separation distance* is < 5 mm, a distance of 5 mm is applied to determine SAR test exclusion.

- 2) At 100 MHz to 6 GHz and for *test separation distances* > 50 mm, the SAR test exclusion threshold is determined according to the following, and as illustrated in Appendix B:¹⁸
- [Threshold at 50 mm in step 1) + (test separation distance - 50 mm) $\cdot (f_{\text{MHz}}/150)$] mW, at 100 MHz to 1500 MHz
 - [Threshold at 50 mm in step 1) + (test separation distance - 50 mm) $\cdot 10$] mW at > 1500 MHz and ≤ 6 GHz

SAR MEASUREMENT RESULTS

This page summarizes the results of the performed diametric evaluation.

SAR Test Data

Environmental Conditions

Test Date	2022/01/05	2022/01/06	2022/01/07	2022/01/18
Freq. Band(MHz)	835	750	2600	1800
Temperature	23.8°C	22.5°C	20.5°C	20.7°C
Relative Humidity	67 %	65 %	65 %	65 %
Test Engineer	Nike Wu	Nike Wu / Rory Cheng	Nike Wu	Nike Wu

Test Date	2022/01/19	2022/01/20	2022/01/21	2022/01/21
Freq. Band(MHz)	1900	2450	5250	5800
Temperature	20.2°C	20.3°C	20.7°C	20.7°C
Relative Humidity	63 %	67 %	65 %	65 %
Test Engineer	Nike Wu / Rory Cheng	Nike Wu	Nike Wu / Rory Cheng	Nike Wu

Note:

EUT adds scanner head, but this does not affect the RF characteristics, Including transmit frequency, transmit power, etc; During SAR testing, according to the original report of the worst channel for each frequency band, for this evaluation.

WCDMA Band 2 :

EUT Position	Frequency (MHz)	Test Mode	SENSOR	Max. Meas. Power (dBm)	Max. Rated Power (dBm)	1g SAR (W/Kg)				
						Scaled Factor	Meas. SAR	Scaled SAR	Limit	Plot
Body Left(0mm)	1880	RMC	ON	12.66	13.00	1.081	0.469	0.507	1.6	2

WCDMA Band 4 :

EUT Position	Frequency (MHz)	Test Mode	SENSOR	Max. Meas. Power (dBm)	Max. Rated Power (dBm)	1g SAR (W/Kg)				
						Scaled Factor	Meas. SAR	Scaled SAR	Limit	Plot
Body Left(0mm)	1732.6	RMC	ON	14.23	15.70	1.403	0.529	0.742	1.6	4

WCDMA Band 5 :

EUT Position	Frequency (MHz)	Test Mode	SENSOR	Max. Meas. Power (dBm)	Max. Rated Power (dBm)	1g SAR (W/Kg)				
						Scaled Factor	Meas. SAR	Scaled SAR	Limit	Plot
Body Front(0mm)	836.6	RMC	OFF	22.75	23.00	1.059	0.365	0.387	1.6	5

LTE FDD Band 12 & Band 17 :

EUT Position	Frequency (MHz)	Bandwidth (MHz)	Test Mode	SENSOR	Max. Meas. Power (dBm)	Max. Rated Power (dBm)	1g SAR (W/Kg)				
							Scaled Factor	Meas. SAR	Scaled SAR	Limit	Plot
Body Front(0mm)	707.5	10	1 RB	ON	19.50	19.70	1.047	0.469	0.491	1.6	7

LTE FDD Band 13 :

EUT Position	Frequency (MHz)	Bandwidth (MHz)	Test Mode	SENSOR	Max. Meas. Power (dBm)	Max. Rated Power (dBm)	1g SAR (W/Kg)				
							Scaled Factor	Meas. SAR	Scaled SAR	Limit	Plot
Body Front(0mm)	782	10	1 RB	OFF	22.32	22.80	1.117	0.379	0.423	1.6	11

LTE FDD Band 14 :

EUT Position	Frequency (MHz)	Bandwidth (MHz)	Test Mode	SENSOR	Max. Meas. Power (dBm)	Max. Rated Power (dBm)	1g SAR (W/Kg)				
							Scaled Factor	Meas. SAR	Scaled SAR	Limit	Plot
Body Top(0mm)	793	10	1 RB	OFF	22.30	22.80	1.122	0.351	0.394	1.6	16

LTE FDD Band 26 :

EUT Position	Frequency (MHz)	Bandwidth (MHz)	Test Mode	SENSOR	Max. Meas. Power (dBm)	Max. Rated Power (dBm)	1g SAR (W/Kg)				
							Scaled Factor	Meas. SAR	Scaled SAR	Limit	Plot
Body Front(0mm)	831.5	15	1 RB	OFF	22.29	22.80	1.125	0.419	0.471	1.6	19

LTE FDD Band 7 :

EUT Position	Frequency (MHz)	Bandwidth (MHz)	Test Mode	SENSOR	Max. Meas. Power (dBm)	Max. Rated Power (dBm)	1g SAR (W/Kg)				
							Scaled Factor	Meas. SAR	Scaled SAR	Limit	Plot
Body Left(0mm)	2560	20	1 RB	ON	18.62	20.50	1.542	0.510	0.786	1.6	24

LTE FDD Band 2 & Band 25 :

EUT Position	Frequency (MHz)	Bandwidth (MHz)	Test Mode	SENSOR	Max. Meas. Power (dBm)	Max. Rated Power (dBm)	1g SAR (W/Kg)				
							Scaled Factor	Meas. SAR	Scaled SAR	Limit	Plot
Body Left(0mm)	1880	20	1 RB	ON	12.08	12.70	1.153	0.247	0.285	1.6	28

LTE FDD Band 4 & Band 66 :

EUT Position	Frequency (MHz)	Bandwidth (MHz)	Test Mode	SENSOR	Max. Meas. Power (dBm)	Max. Rated Power (dBm)	1g SAR (W/Kg)				
							Scaled Factor	Meas. SAR	Scaled SAR	Limit	Plot
Body Left(0mm)	1745	20	1 RB	ON	15.15	15.80	1.161	0.339	0.394	1.6	32

LTE FDD Band 71 :

EUT Position	Frequency (MHz)	Bandwidth (MHz)	Test Mode	SENSOR	Max. Meas. Power (dBm)	Max. Rated Power (dBm)	1g SAR (W/Kg)				
							Scaled Factor	Meas. SAR	Scaled SAR	Limit	Plot
Body Front(0mm)	680.5	20	1 RB	OFF	22.28	22.80	1.127	0.319	0.360	1.6	35

LTE TDD Band 41 :

EUT Position	Frequency (MHz)	Bandwidth (MHz)	Test Mode	SENSOR	Max. Meas. Power (dBm)	Max. Rated Power (dBm)	1g SAR (W/Kg)				
							Scaled Factor	Meas. SAR	Scaled SAR	Limit	Plot
Body Right(0mm)	2605	20	1 RB	OFF	22.28	22.50	1.052	0.547	0.575	1.6	40

WiFi 2.4GHz Chain 0 :

EUT Position	Frequency (MHz)	Modulation Type	Max. Meas. Power (dBm)	Max. Rated Power (dBm)	1g SAR (W/Kg)				
					Scaled Factor	Meas. SAR	Scaled SAR	Limit	Plot
Body Top(0mm)	2412	802.11b	13.45	13.60	1.035	0.737	0.763	1.6	44

WiFi 2.4GHz Chain 1 :

EUT Position	Frequency (MHz)	Modulation Type	Max. Meas. Power (dBm)	Max. Rated Power (dBm)	1g SAR (W/Kg)				
					Scaled Factor	Meas. SAR	Scaled SAR	Limit	Plot
Body Front(0mm)	2412	802.11b	13.14	13.30	1.038	0.114	0.118	1.6	45

Bluetooth :

EUT Position	Frequency (MHz)	Modulation Type	Max. Meas. Power (dBm)	Max. Rated Power (dBm)	1g SAR (W/Kg)				
					Scaled Factor	Meas. SAR	Scaled SAR	Limit	Plot
Body Left(0mm)	2480	DH5 1Mbps	10.53	11.00	1.114	0.014	0.015	1.6	48

WiFi 5.2GHz Chain 0 :

EUT Position	Frequency (MHz)	Modulation Type	Max. Meas. Power (dBm)	Max. Rated Power (dBm)	1g SAR (W/Kg)				
					Scaled Factor	Meas. SAR	Scaled SAR	Limit	Plot
Body Front(0mm)	5240	802.11a	8.70	9.00	1.072	0.646	0.693	1.6	49

WiFi 5.2GHz Chain 1 :

EUT Position	Frequency (MHz)	Modulation Type	Max. Meas. Power (dBm)	Max. Rated Power (dBm)	1g SAR (W/Kg)				
					Scaled Factor	Meas. SAR	Scaled SAR	Limit	Plot
Body Top(0mm)	5240	802.11a	9.45	10.00	1.135	0.262	0.297	1.6	52

WiFi 5.8GHz Chain 0 :

EUT Position	Frequency (MHz)	Modulation Type	Max. Meas. Power (dBm)	Max. Rated Power (dBm)	1g SAR (W/Kg)				
					Scaled Factor	Meas. SAR	Scaled SAR	Limit	Plot
Body Top(0mm)	5755	802.11n HT40	7.81	8.00	1.045	0.421	0.440	1.6	54

WiFi 5.8GHz Chain 1 :

EUT Position	Frequency (MHz)	Modulation Type	Max. Meas. Power (dBm)	Max. Rated Power (dBm)	1g SAR (W/Kg)				
					Scaled Factor	Meas. SAR	Scaled SAR	Limit	Plot
Body Top(0mm)	5755	802.11n HT40	7.94	8.10	1.038	0.299	0.310	1.6	56

Note:

1. When the 1-g SAR is $\leq 0.8 \text{ W/Kg}$, testing for other channels are optional.
2. SAR for LTE band exposure configurations is measured according to the procedures of KDB 941225 D05 SAR for LTE Devices v02.
3. KDB941225D05-SAR for higher order modulation is required only when the highest maximum output power for the configuration in the higher order modulation is $> 0.5 \text{ dB}$ higher than the same configuration in QPSK or when the reported SAR for the QPSK configuration is $> 1.45 \text{ W/kg}$
4. KDB941225D05-For QPSK with 100% RB allocation, when the reported SAR measured for the Highest output power channel is $< 1.45 \text{ W/kg}$, tests for the remaining required test channels are optional.
5. KDB941225D05- For QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation are $\leq 0.8 \text{ W/kg}$.
6. KDB941225D05- Start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power among RB offset the upper edge, middle and lower edge of each required test channel.
7. KDB941225D05- other channel bandwidths SAR test is required when the highest maximum output power of a configuration requiring testing in the smaller channel bandwidth is $> 0.5 \text{ dB}$ higher than the equivalent channel configurations in the largest channel bandwidth configuration or the reported SAR of a configuration for the largest channel bandwidth is $> 1.45 \text{ W/kg}$.
8. Worst case SAR for 50% RB allocation is selected to be tested.
9. According KDB865664 D01 Repeated measurements are required only when the measured SAR is $\geq 0.80 \text{ W/kg}$.
If the measured SAR value of the initial repeated measurement is $< 1.45 \text{ W/kg}$ with $\leq 20\%$ variation, only one repeated measurement is required to reaffirm that the results are not expected to have substantial variations.
A second repeated measurement is required only if the measured result for the initial repeated measurement is within 10% of the SAR limit and vary by more than 20%..

SAR SIMULTANEOUS TRANSMISSION DESCRIPTION

Simultaneous Transmission:

Description of Simultaneous Transmit Capabilities		
Transmitter Combination	Simultaneous?	Hotspot
WWAN(WCDMA/LTE) + WLAN 2.4G Chain0+WLAN2.4G Chain1	√	√
WWAN(WCDMA/LTE) + WLAN 5G Chain0+WLAN5G Chain1	√	√
WWAN + Bluetooth	√	×

Simultaneous Transmission Consideration Detail

Transmitter Combination	Position	Max SAR(W/kg)			Σ SAR<1.6W/kg
		WWAN	WLAN Chain0	WLAN Chain1	
WWAN + WLAN 2.4G Chain0 + WLAN 2.4G Chain1	Body Front(0mm)	0.491	0.410 *	0.118	1.019
	Body Back(0mm)	0.504 *	0.264 *	0.032 *	0.800
	Body Left(0mm)	0.786	0.091 *	N/A *	0.877
	Body Right(0mm)	0.575	N/A *	N/A *	0.575
	Body Top10mm)	0.394	0.763	0.108 *	1.265
	Body Bottom(10mm)	0.159 *	N/A *	N/A *	0.159

Transmitter Combination	Position	Max SAR(W/kg)		Σ SAR<1.6W/kg
		WWAN	Bluetooth	
WWAN + Bluetooth	Body Front(0mm)	0.491	0.050 *	0.541
	Body Back(0mm)	0.504 *	0.035 *	0.539
	Body Left(0mm)	0.786	0.015	0.621
	Body Right(0mm)	0.575	N/A *	0.575
	Body Top10mm)	0.394	0.104 *	0.498
	Body Bottom(10mm)	0.159 *	N/A *	0.159

Transmitter Combination	Position	Max SAR(W/kg)			Σ SAR<1.6W/kg
		WWAN	WLAN Chain0	WLAN Chain1	
WWAN + WLAN 5.2G Chain0 + WLAN 5.2G Chain1	Body Front(0mm)	0.491	0.693	0.047 *	1.231
	Body Back(0mm)	0.504 *	0.112 *	0.048 *	0.664
	Body Left(0mm)	0.786	0.155 *	N/A *	0.941
	Body Right(0mm)	0.575	N/A *	N/A *	0.575
	Body Top10mm)	0.394	0.645 *	0.297	1.336
	Body Bottom(10mm)	0.159 *	N/A *	N/A *	0.159

Transmitter Combination	Position	Max SAR(W/kg)			Σ SAR<1.6W/kg
		WWAN	WLAN Chain0	WLAN Chain1	
WWAN + WLAN 5.8G Chain0 + WLAN 5.8G Chain1	Body Front(0mm)	0.491	0.480 *	0.185 *	1.156
	Body Back(0mm)	0.504 *	0.061 *	0.099 *	0.664
	Body Left(0mm)	0.786	0.100 *	N/A *	0.886
	Body Right(0mm)	0.575	N/A *	N/A *	0.575
	Body Top10mm)	0.394	0.440	0.310	1.144
	Body Bottom(10mm)	0.159 *	N/A *	N/A *	0.159

Note: * Because this SAR testing only evaluates the worst channel and does not evaluate all positions per Band, some data quoted from SAR original test report.

Conclusion:

Sum of SAR: Σ SAR $\leq$ 1.6 W/kg for 1g Body SAR, therefore simultaneous transmission SAR with Volume Scans is **not required**.

APPENDIX A MEASUREMENT UNCERTAINTY


The uncertainty budget has been determined for the measurement system and is given in the following Table.

Measurement uncertainty evaluation for IEEE1528 SAR test




Source of uncertainty	Tolerance/ uncertainty ± %	Probability distribution	Divisor	ci (1 g)	ci (10 g)	Standard uncertainty ± %, (1 g)	Standard uncertainty ± %, (10 g)
Measurement system							
Probe calibration	6.55	N	1	1	1	6.6	6.6
Axial Isotropy	4.7	R	$\sqrt{3}$	1	1	2.7	2.7
Hemispherical Isotropy	9.6	R	$\sqrt{3}$	0	0	0.0	0.0
Boundary effect	1.0	R	$\sqrt{3}$	1	1	0.6	0.6
Linearity	4.7	R	$\sqrt{3}$	1	1	2.7	2.7
Detection limits	1.0	R	$\sqrt{3}$	1	1	0.6	0.6
Readout electronics	0.3	N	1	1	1	0.3	0.3
Response time	0.0	R	$\sqrt{3}$	1	1	0.0	0.0
Integration time	0.0	R	$\sqrt{3}$	1	1	0.0	0.0
RF ambient conditions – noise	1.0	R	$\sqrt{3}$	1	1	0.6	0.6
RF ambient conditions– reflections	1.0	R	$\sqrt{3}$	1	1	0.6	0.6
Probe positioner mech. Restrictions	0.8	R	$\sqrt{3}$	1	1	0.5	0.5
Probe positioning with respect to phantom shell	6.7	R	$\sqrt{3}$	1	1	3.9	3.9
Post-processing	2.0	R	$\sqrt{3}$	1	1	1.2	1.2
Test sample related							
Test sample positioning	2.8	N	1	1	1	2.8	2.8
Device holder uncertainty	6.3	N	1	1	1	6.3	6.3
Drift of output power	5.0	R	$\sqrt{3}$	1	1	2.9	2.9
Phantom and set-up							
Phantom uncertainty (shape and thickness tolerances)	4.0	R	$\sqrt{3}$	1	1	2.3	2.3
Liquid conductivity target)	5.0	R	$\sqrt{3}$	0.64	0.43	1.8	1.2
Liquid conductivity meas.)	2.5	N	1	0.64	0.43	1.6	1.1
Liquid permittivity target)	5.0	R	$\sqrt{3}$	0.6	0.49	1.7	1.4
Liquid permittivity meas.)	2.5	N	1	0.6	0.49	1.5	1.2
Combined standard uncertainty		RSS				12.2	12.0
Expanded uncertainty 95 % confidence interval)						24.3	23.9

APPENDIX B EUT TEST POSITION PHOTOS



Liquid depth $\geq 15\text{cm}$

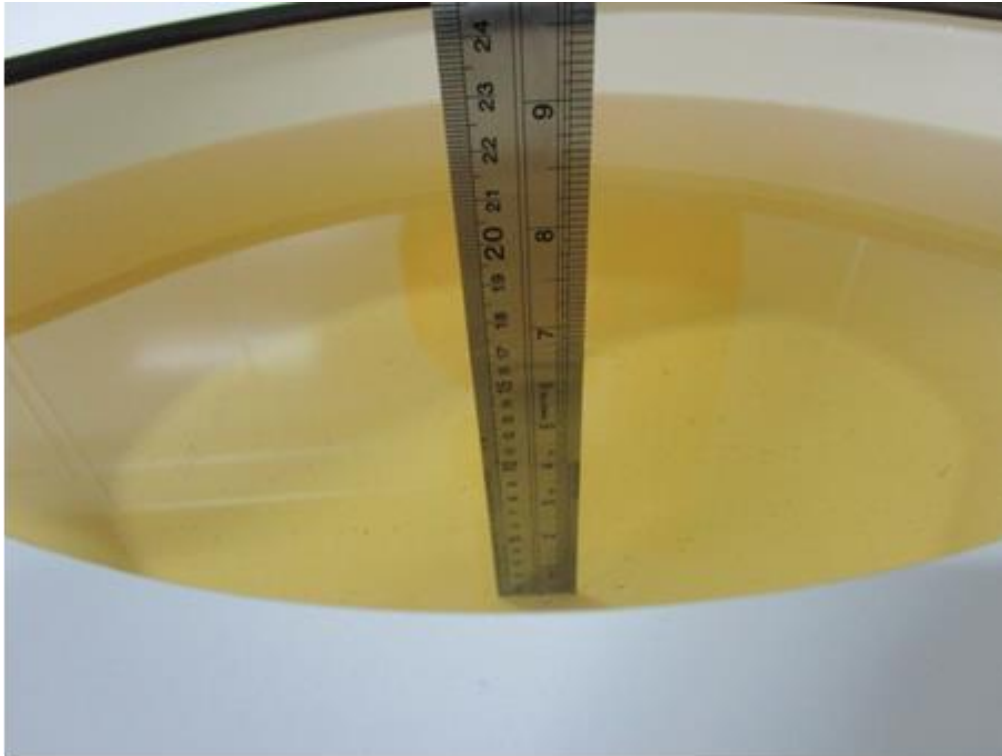


SAR Setup Photo for WWAN

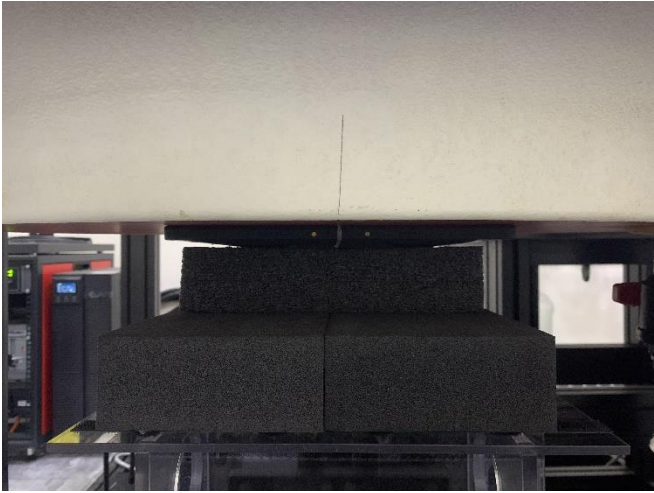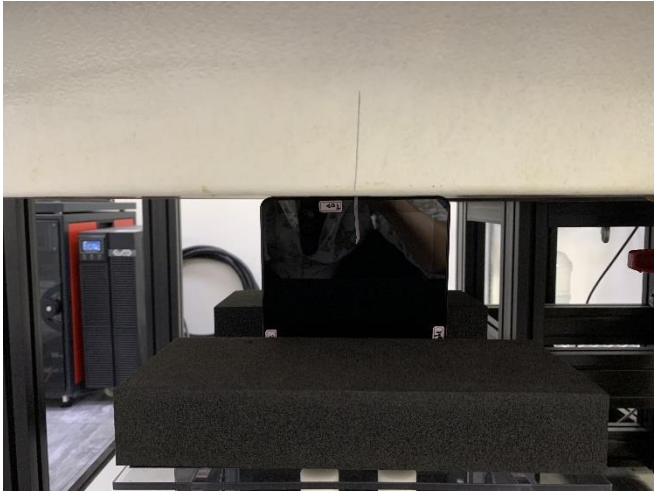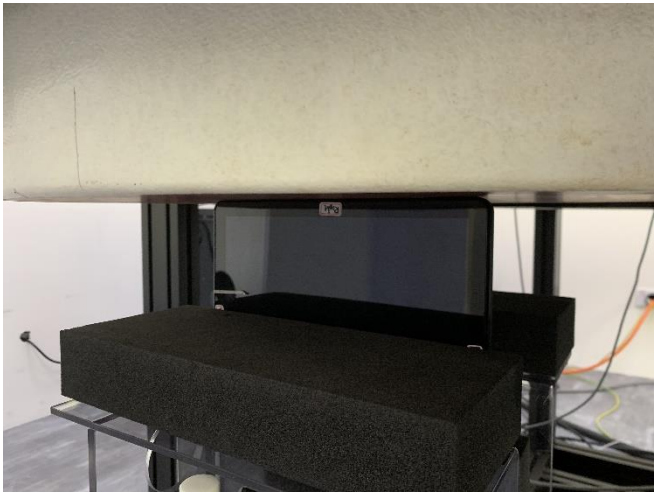Body Front (0mm)	Body Top (0mm)
	
Body Left (0mm)	Body Right (0mm)
	

SAR Setup Photo for WLAN

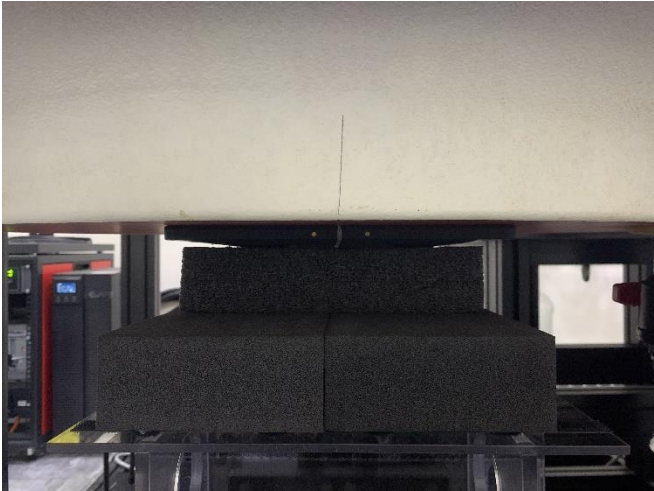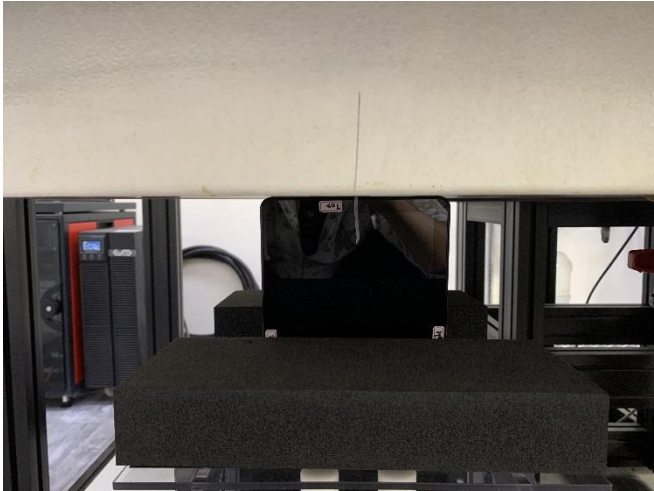Body Front (0mm)	Body Top (0mm)
	
Body Left (0mm)	
	


SAR EUT Photo

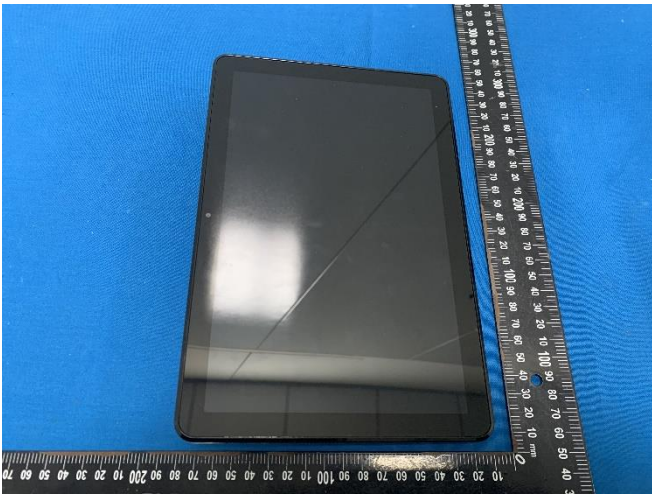

Scanner Model: NG002



Scanner Model: N4603

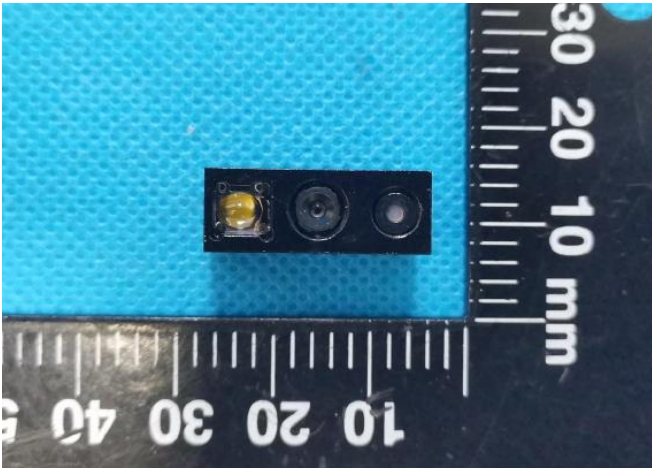

APPENDIX C SAR PLOTS OF SAR MEASUREMENT

Please Refer to the Attachment APPENDIX C SAR PLOTS OF SAR MEASUREMENT

APPENDIX D PROBE & DAE CALIBRATION CERTIFICATES

Please refer to the file document PROBE & DAE CALIBRATION CERTIFICATES

APPENDIX E DIPOLE CALIBRATION CERTIFICATES

Please refer to the file document DIPOLE CALIBRATION CERTIFICATES

******* END OF REPORT *******