

ELECTROMAGNETIC EMISSIONS COMPLIANCE REPORT

INTENTIONAL RADIATOR CERTIFICATION TO FCC PART 15 SUBPART C AND INDUSTRY CANADA RSS 247 REQUIREMENT

	OF
Product Name:	Tablet Computer
Brand Name:	FUJITSU
Model No.:	R726
Model Difference:	N/A
FCC ID:	EJE-WB0098
IC:	337J-WB0098
Report No.:	E2/2016/10025
Issue Date:	Jan. 28, 2016
FCC Rule Part:	§15.247, Cat: DTS
IC Rule:	RSS-247 issue 1 May 2015
Prepared for:	FUJITSU LIMITED 4-1-1, Kamikodanaka, Nakahara-ku, Ka- wasaki-shi, Kanagawa, 211-8588, Japan
Prepared by:	SGS Taiwan Ltd. Electronics & Communication Laboratory No.2, Keji 1st Rd., Guishan District, Taoyuan City, Taiwan 333



Note: This report shall not be reproduced except in full, without the written approval of SGS Taiwan Ltd. This document may be altered or revised by SGS Taiwan Ltd. personnel only, and shall be noted in the revision section of the document.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測试之樣品負責,同時此樣品僅保留的反。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_edocument.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of

jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. SGS Taiwan Ltd. No.134, WuKungRoad, NewTaipeiIndustrialPark, WukuDistrict, NewTaipeiCity, Taiwan24803/新北市五股區新北產業園區五工路 134 號



VERIFICATION OF COMPLIANCE

Applicant:	FUJITSU LIMITED 4-1-1, Kamikodanaka, Nakahara-ku, Kawasaki-shi, Kanagawa, 211-8588, Japan
Product Name:	Tablet Computer
Brand Name:	FUJITSU
Model No.:	R726
Model Difference:	N/A
FCC ID:	EJE-WB0098
IC :	337J-WB0098
Report Number:	E2/2016/10025
Date of test:	Jan. 11, 2016 ~ Jan. 25, 2016
Date of EUT Received:	Jan. 11, 2016

We hereby certify that:

The above equipment was tested by SGS Taiwan Ltd. Electronics & Communication Laboratory The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.10:2013 and the energy emitted by the sample EUT tested as described in this report is in compliance with conducted and radiated emission limits.

The test results of this report relate only to the tested sample identified in this report.

Test By:	Jerry	Lu	Date	Jan. 28, 2016	
	Jerry Lu / Sr. El	ngineer			
Prepared By:	Allen T	isai	Date	Jan. 28, 2016	
Approved By:	Allen Tsai / En	gineer h ang	Date	Jan. 28, 2016	
	Jim Chang / Asst.	-			

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對测試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions of Electronic Documents at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions of Electronic Documents at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions of Electronic Documents at <u>www.sgs.com/terms and conditions</u>. At the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document is under denders may be prosecuted to the fulles at test of the Law pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號



Revision History

Report Number	Revision	Description	Issue Date
E2/2016/10025	Rev.00	Initial creation of document	Jan. 28, 2016

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有说明,此報告结果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u></u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction form exercising all their rights and obligations under the transaction documents unlawful and offenders may be prosecuted to the fullest extent of the law. SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeindustict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號



Table of Contents

1	GEN	ERAL INFORMATION	6
	1.1	Product Description	6
	1.2	Product Feature of Equipment Under Test	7
	1.3	Test Methodology of Applied Standards	8
	1.4	Test Facility	8
	1.5	Special Accessories	8
	1.6	Equipment Modifications	8
2	SYST	EM TEST CONFIGURATION	9
	2.1	EUT Configuration	9
	2.2	EUT Exercise	9
	2.3	Test Procedure	9
	2.4	Measurement Results Explanation Example	9
	2.5	Configuration of Tested System 1	10
3	SUM	MARY OF TEST RESULTS1	1
4	DESC	CRIPTION OF TEST MODES1	
	4.1	Operated in 2400 ~ 2483.5MHz Band1	11
	4.2	The Worst Test Modes and Channel Details 1	12
5	MEA	SUREMENT UNCERTAINTY1	3
5 6		SUREMENT UNCERTAINTY1 DUCTED EMISSION TEST1	
-			4
-	CON 6.1 6.2	DUCTED EMISSION TEST	1 4 14
-	CON 6.1	DUCTED EMISSION TEST1 Standard Applicable:	1 4 14
-	CON 6.1 6.2	DUCTED EMISSION TEST. 1 Standard Applicable: 1 Measurement Equipment Used: 1 EUT Setup: 1 Test SET-UP (Block Diagram of Configuration) 1	14 14 14 14
-	 CONI 6.1 6.2 6.3 6.4 6.5 	DUCTED EMISSION TEST. 1 Standard Applicable: 1 Measurement Equipment Used: 1 EUT Setup: 1 Test SET-UP (Block Diagram of Configuration) 1 Measurement Procedure: 1	14 14 14 15 15
-	CON 6.1 6.2 6.3 6.4	DUCTED EMISSION TEST. 1 Standard Applicable: 1 Measurement Equipment Used: 1 EUT Setup: 1 Test SET-UP (Block Diagram of Configuration) 1	14 14 14 15 15
-	CON 6.1 6.2 6.3 6.4 6.5 6.6	DUCTED EMISSION TEST. 1 Standard Applicable: 1 Measurement Equipment Used: 1 EUT Setup: 1 Test SET-UP (Block Diagram of Configuration) 1 Measurement Procedure: 1	14 14 14 15 15
6	CON 6.1 6.2 6.3 6.4 6.5 6.6	DUCTED EMISSION TEST. 1 Standard Applicable: 1 Measurement Equipment Used: 1 EUT Setup: 1 Test SET-UP (Block Diagram of Configuration) 1 Measurement Procedure: 1 Measurement Result: 1	14 14 14 15 15 15
6	CON 6.1 6.2 6.3 6.4 6.5 6.6 PEAP	DUCTED EMISSION TEST. 1 Standard Applicable: 1 Measurement Equipment Used: 1 EUT Setup: 1 Test SET-UP (Block Diagram of Configuration) 1 Measurement Procedure: 1 Measurement Result: 1 COUTPUT POWER MEASUREMENT 1	14 14 14 15 15 15 18
6	CON 6.1 6.2 6.3 6.4 6.5 6.6 PEAP 7.1	DUCTED EMISSION TEST. 1 Standard Applicable: 1 Measurement Equipment Used: 1 EUT Setup: 1 Test SET-UP (Block Diagram of Configuration) 1 Measurement Procedure: 1 Measurement Result: 1 Standard Applicable: 1	14 14 14 15 15 15 18 18
6	CON 6.1 6.2 6.3 6.4 6.5 6.6 PEAP 7.1 7.2	DUCTED EMISSION TEST. 1 Standard Applicable: 1 Measurement Equipment Used: 1 EUT Setup: 1 Test SET-UP (Block Diagram of Configuration) 1 Measurement Procedure: 1 Measurement Result: 1 Standard Applicable: 1 Measurement Result: 1 Measurement Equipment Used: 1 Measurement Equipment Used: 1	14 14 14 15 15 15 18 18 18
6	CON 6.1 6.2 6.3 6.4 6.5 6.6 PEAP 7.1 7.2 7.3	DUCTED EMISSION TEST. 1 Standard Applicable: 1 Measurement Equipment Used: 1 EUT Setup: 1 Test SET-UP (Block Diagram of Configuration) 1 Measurement Procedure: 1 Measurement Result: 1 K OUTPUT POWER MEASUREMENT 1 Standard Applicable: 1 Measurement Equipment Used: 1 Test Set-up: 1	14 14 14 15 15 15 18 18 18 18 18
6	CON 6.1 6.2 6.3 6.4 6.5 6.6 PEAP 7.1 7.2 7.3 7.4 7.5 6dB 8	DUCTED EMISSION TEST. 1 Standard Applicable: 1 Measurement Equipment Used: 1 EUT Setup: 1 Test SET-UP (Block Diagram of Configuration) 1 Measurement Procedure: 1 Measurement Result: 1 Measurement Result: 1 Standard Applicable: 1 Measurement Result: 1 Measurement Equipment Used: 1 Measurement Equipment Used: 1 Measurement Procedure: 1 Measurement Procedure: 1	14 14 14 15 15 15 18 18 18 18 18 18 19 20
7	CON 6.1 6.2 6.3 6.4 6.5 6.6 PEAP 7.1 7.2 7.3 7.4 7.5	DUCTED EMISSION TEST	14 14 14 15 15 15 18 18 18 18 18 18 18 18 18 18 18 19 20 21 21

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有说明,此報告结果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u></u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction form exercising all their rights and obligations under the transaction documents unlawful and offenders may be prosecuted to the fullest extent of the law. SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeindustict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號



	8.3	Test Set-up:	21
	8.4	Measurement Procedure:	22
	8.5	Measurement Result:	22
9	CONE	DUCTED BAND EDGES AND SPURIOUS EMISSION MEASUREMENT	27
	9.1	Standard Applicable	27
	9.2	Measurement Equipment Used:	27
	9.3	Test SET-UP:	27
	9.4	Measurement Procedure	28
	9.5	Measurement Result	28
10	RADI	ATED BANDEDGE AND SPURIOUS EMISSION MEASUREMENT	33
	10.1	Standard Applicable	33
	10.2	Measurement Equipment Used	34
	10.3	Test SET-UP	35
	10.4	Measurement Procedure	36
	10.5	Field Strength Calculation	37
	10.6	Test Results of Radiated Spurious Emissions form 9 kHz to 30 MHz	37
	10.7	Measurement Result:	37
11	PEAK	POWER SPECTRAL DENSITY	51
	11.1	Standard Applicable:	51
	11.2	Measurement Equipment Used:	51
	11.3	Test Set-up:	51
	11.4	Measurement Procedure:	51
	11.5	Measurement Result:	52
12	ANTE	NNA REQUIREMENT	55
	12.1	Standard Applicable:	55
	12.2	Antenna Connected Construction:	55

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to Electronic Documents are approval of the Company. Any unauthorized alteration, forgery or falsification of the content or ap-pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipei/IQXAF,Wukubistrict,NewTaipei/City,Taiwan24803/新北市五股區新北產業園區五工路 134 號



GENERAL INFORMATION 1

1.1 **Product Description**

General:

Product Name:	Tablet Computer		
Brand Name:	FUJITSU		
Model No.:	R726		
Model Difference:	N/A		
NFC Module:	Model No.: RC-S650/IA, Supplier: Sony Corporation		
BT / WLAN Module:	Model No.: 8260D2W, Supplier: Intel Mobile Communications France S.A.S		
Product SW/HW version:	10.0.10240 Build 10240/ AX1		
Radio SW/HW version:	N/A / N/A		
Test SW Version:	N/A		
RF power setting in TEST SW:	N/A		
	7.6Vdc from Rechargeable Li-ion Battery or 19V by AC/DC Power Adapter		
Power Supply:	Battery: Model No.: FPB0328; Supplier: Getac		
	Adapter: Model No.: ADP-65MD B, Supplier: Delta		

Bluetooth Low Energy:

Frequency Range:	2402 – 2480MHz	
Bluetooth Version:	V4.1 dual mode	
Channel number:	40 channels	
Modulation type:	GFSK	
Transmit Power:	8.54 dBm (Peak)	
Antenna Designation:	PIFA Antenna, Antenna Gain: -0.74dBi Model No.: WA-P-LB-02-301	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測试之樣品負責,同時此樣品僅保留卽天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. In is document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or ap-pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. SCET Channel 14 Mu/KunePord NuwToinel/NursiPark Mu/ku/District NuwToinel/City Taiwan2/4803/% th TE RUG % the # TRUE % 134 % SGS Taiwan Ltd.



1.2 Product Feature of Equipment Under Test

The equipment under Test (Hereafter Called: EUT) is supporting Wi-Fi 802.11a/b/g/n/ac and Bluetooth features, and below are details of information.

Product Feature			
Product Name:	Tablet Computer		
Brand Name:	FUJITSU		
Model No.:	R726		
Model Difference:	N/A		
FCC ID:	EJE-WB0098		
IC:	337J-WB0098		
Wi-Fi Specification	802.11a/b/g/n/ac		
Bluetooth Version	V4.1 (dual mode)		
NFC Specification	NFC		

Note: The above EUT information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Unless otherwise stated the results shown in this test report reter only to the sample(s) tested and such sample(s) are retained tor 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or ap-programe of this document is unlawful and offanders may be prosecuted to the fullest extent of the law pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Test Methodology of Applied Standards 1.3

FCC Part 15, Subpart C §15.247

FCC KDB 558074 D01 DTS Meas. Guidance V03r04

Canada RSS-247 issue 1: 2015

Canada RSS-Gen issue 4: 2014

ANSI C63.10:2013

Note:

- 1. All test items have been performed and record as per the above standards.
- 2. The composite system is compliance with FCC Subpart B is authorized under a DoC procedure.

Test Facility 1.4

SGS Taiwan Ltd. Electronics & Communication Laboratory No.2, Keji 1st Rd., Guishan District, Taoyuan City, Taiwan 333 (TAF code 0513)

FCC Registration Numbers are: 628985

IC Registration Numbers are: 4620A-5

1.5 Special Accessories

There are no special accessories used while test was conducted.

1.6 Equipment Modifications

There was no modification incorporated into the EUT.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained to so days only. 除非另有說明,此報告結果僅對測试之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



SYSTEM TEST CONFIGURATION 2

EUT Configuration 2.1

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

EUT Exercise 2.2

An engineering test mode (software/firmware) that applicant provided was utilized to manipulate the EUT into transmit, selection of the test channel, and modulation scheme.

Test Procedure 2.3

2.3.1 Conducted Emissions

The EUT is a placed on as turn table which is 0.8 m above ground plan. Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz.. The CISPR Quasi-Peak and Average detector mode is employed according to §15.207. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.

2.3.2 Radiated Emissions

The EUT is a placed on as turn table. For emissions testing at or below 1 GHz, the table height shall be 0.8 m above the reference ground plan. For emission measurements above 1 GHz, the table height shall be 1.5 m. The turn table shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max. emission, the relative positions of this hand-held transmitter (EUT) was rotated through three orthogonal axes and measurement procedures for electric field radiated emissions above 1 GHz the EUT measurement is to be made "while keeping the antenna in the 'cone of radiation' from that area and pointed at the area both in azimuth and elevation, with polarization oriented for maximum response." is still within the 3dB illumination BW of the measurement antenna.

2.4 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuation factor between EUT conducted port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly EUT RF output level.

Note:

The spectrum analyzer offset is derived from RF cable loss 1dB.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

biness otherwise stated the results stated the results state provide the state of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



2.5 Configuration of Tested System

Fig. 2-1 Conducted Emission configuration

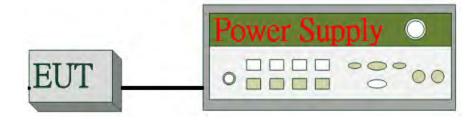


Fig. 2-2 Conduction & Radiated Emission configuration



Table 2-1 Equipment Used in Tested System

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Data Cable	Power Cord
1	Bluetooth Test Soft- ware	N/A	N/A	N/A	N/A	N/A
2.	DC Power Supply	Agilent	E3640A	MY53140006	N/A	Un-shield

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document is unlawful and offenders may be prosecuted to the fullest extent of the law pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



SUMMARY OF TEST RESULTS 3

FCC Rules IC Rules		Description Of Test	Result
§15.207(a)	RSS-Gen §8.8	AC Power Line Conducted Emission	Compliant
§15.247(b) (3)	RSS-247 §5.4(4)	Peak Output Power	Compliant
§15.247(a)(2)	RSS-247 §5.2 (1) RSS-Gen §6.6	6dB and 99% Bandwidth	Compliant
§15.247(d) RSS-247 §5.5		Conducted Band Edge and Spurious Emission	Compliant
§15.247(d)	RSS-247 §5.5	Radiated Band Edge and Spurious Emission	Compliant
§15.247(e)	RSS-247 §5.2(2)	Peak Power Density	Compliant
§15.203 §15.247(b)	RSS- Gen §8.3	Antenna Requirement	Compliant

DESCRIPTION OF TEST MODES 4

Operated in 2400 ~ 2483.5MHz Band 4.1

40 channels are provided for Bluetooth LE

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
0	2402 MHz	14	2430 MHz	28	2458 MHz
1	2404 MHz	15	2432 MHz	29	2460 MHz
2	2406 MHz	16	2434 MHz	30	2462 MHz
3	2408 MHz	17	2436 MHz	31	2464 MHz
4	2410 MHz	18	2438 MHz	32	2466 MHz
5	2412 MHz	19	2440 MHz		

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測试之樣品負責,同時此樣品僅保留卽天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. In is document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or ap-pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. SCET Channel 14 Mu/KunePord NuwToinel/NursiPark Mu/ku/District NuwToinel/City Taiwan2/4803/% th TE RUG % the # TRUE % 134 %



4.2 The Worst Test Modes and Channel Details

- 1. The EUT has been tested under operating condition.
- 2. Test program used to control the EUT for staying in continuous transmitting and receiving mode is programmed.

RADIATED EMISSION TEST:

RADIATED EMISSION TEST (BELOW 1 GHz)						
MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION	DATA RATE (Mbps)		
Bluetooth LE	0 to 39	0,19,39	GFSK	1		
	RADI	ATED EMISSIC	N TEST (ABOVE 1	GHz)		
MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION	DATA RATE (Mbps)		
Bluetooth LE	0 to 39	0,19,39	GFSK	1		

Note:

The field strength of radiation emission was measured as EUT stand-up position (H mode) and lie down position (E1, E2 mode) for Bluetooth LE Transmitter for channel Low, Mid and High, the worst case E2 position was reported.

ANTENNA PORT CONDUCTED MEASUREMENT:

CONDUCTED TEST					
MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION	DATA RATE (Mbps)	
Bluetooth LE	0 to 39	0,19,39	GFSK	1	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained to so days only. 除非另有說明,此報告結果僅對測试之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



MEASUREMENT UNCERTAINTY 5

Test Items	Uncertainty
AC Power Line Conducted Emission	+/- 2.586 dB
Peak Output Power	+/- 0.84 dB
6dB Bandwidth	+/- 51.33 Hz
100 KHz Bandwidth Of Frequency Band Edges	+/- 0.84 dB
Peak Power Density	+/- 1.3 dB
Temperature	+/- 0.65 °C
Humidity	+/- 4.6 %
DC / AC Power Source	DC= +/- 0.13%, AC= +/- 0.2%

Radiated Spurious Emission:

	9kHz-30MHz: +/-2.87dB
	30MHz - 180MHz: +/- 3.37dB
Measurement uncertainty	180MHz -417MHz: +/- 3.19dB
(Polarization : Vertical)	0.417GHz-1GHz: +/- 3.19dB
	1GHz - 18GHz: +/- 4.04dB
	18GHz - 40GHz: +/- 4.04dB

	9kHz-30MHz: +/-2.87dB
	30MHz - 167MHz: +/- 4.22dB
Measurement uncertainty	167MHz -500MHz: +/- 3.44dB
(Polarization : Horizontal)	0.5GHz-1GHz: +/- 3.39dB
	1GHz - 18GHz: +/- 4.08dB
	18GHz - 40GHz: +/- 4.08dB

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測试之樣品負責,同時此樣品僅保留別天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. Inis document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or ap-pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. SCET taken I do Numer State at the fullest extent of the law.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



CONDUCTED EMISSION TEST 6

6.1 **Standard Applicable:**

Frequency range within 150kHz to 30MHz shall not exceed the Limit table as below.

Frequency range	Limits dB(uV)					
MHz	Quasi-peak	Average				
0.15 to 0.50	66 to 56	56 to 46				
0.50 to 5	56	46				
5 to 30	60	50				
Note						
1. The lower limit shall apply at the transition frequencies						

2. The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz.

6.2 Measurement Equipment Used:

Conducted Emission Test Site						
EQUIPMENT	MFR	MODEL	SERIAL	LAST	CAL DUE.	
TYPE		NUMBER	NUMBER	CAL.		
EMI Test Receiver	R&S	ESCI 7	100950	12/12/2015	12/11/2016	
Coaxial Cables	N/A	N30N30-1042-150 cm	N/A	02/07/2015	02/06/2016	
LISN	Schwarzbeck	NSLK 8127	8127-648	06/09/2015	06/08/2016	
LISN	Rolf-Heine	NNB-2/16Z	99012	03/04/2015	03/03/2016	
Test Software	Farad	EZ-EMC	Ver. SGS-03A2	N.C.R.	N.C.R.	

6.3 EUT Setup:


- 1. The conducted emission tests were performed in the test site, using the setup in accordance with the ANSI C63.10:2013.
- 2. The AC/DC Power adaptor of EUT was plug-in LISN. The EUT was placed flushed with the rear of the table.
- 3. The LISN was connected with 120Vac/60Hz power source.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

biness otherwise stated the results stated the results state provide the state of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號



6.4 Test SET-UP (Block Diagram of Configuration)

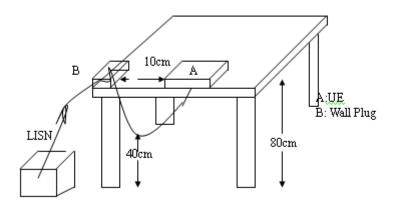

6.5 Measurement Procedure:

- 1. The EUT was placed on a table which is 0.8m above ground plan.
- 2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
- 3. Repeat above procedures until all phases of power being supplied by given UE are completed

6.6 Measurement Result:

Note: Refer to next page for measurement data and plots. Note2: The * reveals the worst-case results that closet to the limit.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

biness otherwise stated the results stated the results state provide the state of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law



AC POWER LINE CONDUCTED EMISSION TEST DATA


Operation Mode: Operation mode Temperature: 21

Test Date: Jan. 20, 2016

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測试之樣品負責,同時此樣品僅保留卽天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. In is document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or ap-pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. SCET Channel 14 Mu/KunePord NuwToinel/NursiPark Mu/ku/District NuwToinel/City Taiwan2/4803/% th TE RUG % the # TRUE % 134 %



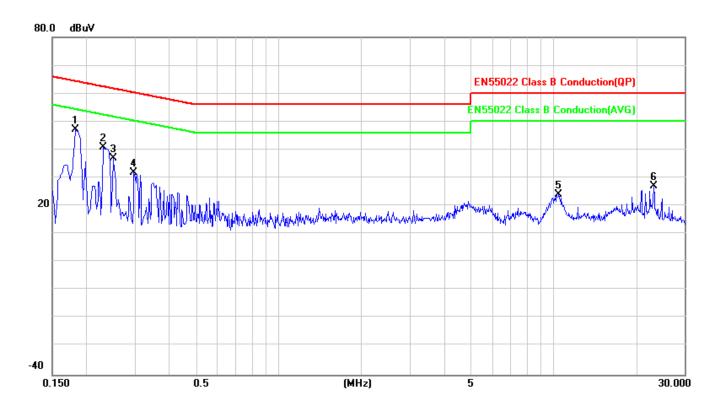

No.	Mk.	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Comment
		(MHz)	dBuV	(dB)	(dBuV)	(dBuV)	(dB)		
1	*	0.1820	37.38	9.65	47.03	64.39	-17.36	peak	
2		0.2300	31.06	9.66	40.72	62.45	-21.73	peak	
3		0.2500	27.33	9.68	37.01	61.76	-24.75	peak	
4		0.2980	22.24	9.72	31.96	60.30	-28.34	peak	
5		10.4980	14.38	9.73	24.11	60.00	-35.89	peak	
6		23.2500	17.55	9.46	27.01	60.00	-32.99	peak	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測试之樣品負責,同時此樣品僅保留卽天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. In is document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or ap-pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. SCET Channel 14 Mu/KunePord NuwToinel/NursiPark Mu/ku/District NuwToinel/City Taiwan2/4803/% th TE RUG % the # TRUE % 134 %



PEAK OUTPUT POWER MEASUREMENT 7

7.1 Standard Applicable:

For systems using digital modulation in the 2400-2483.5 MHz bands, the limit for peak output power is 1Watt.


If the transmitting antenna of directional gain greater than 6dBi are used the peak output power form the intentional radiator shall be reduced below the above stated value by the amount in dB that the directional gain of the Antenna exceeds 6dBi.

In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of Antenna exceeds 6dBi.

Measurement Equipment Used: 7.2

Conducted Emission Test Site							
EQUIPMENT	MFR	MODEL	SERIAL	LAST	CAL DUE.		
ТҮРЕ		NUMBER	NUMBER	CAL.			
Spectrum Analyzer	KEYSIGHT	N9010A	MY54510568	04/14/2015	04/13/2016		
Power Meter	Anritsu	ML2496A	1326001	06/23/2015	06/22/2016		
Power Sensor	Anritsu	MA2411B	1315048	06/23/2015	06/22/2016		
Power Sensor	Anritsu	MA2411B	1315049	06/23/2015	06/22/2016		
Coaxial Cable 30cm	WOKEN	00100A1F1A195C	RF01	12/12/2015	12/11/2016		
DC Block	PASTERNACK	PE8210	RF29	12/12/2015	12/11/2016		
DC Power Supply	Agilent	E3640A	MY53140006	05/04/2015	05/03/2016		

Test Set-up: 7.3



biness otherwise stated the results stated the results state provide the state of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law SGS Taiwan Ltd.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



7.4 Measurement Procedure:

- 1. Place the EUT on the table and set it in transmitting mode.
- 2. The testing follows the Measurement Procedure of FCC KDB 558074 D01 DTS Meas. Guidance V03r04.
- 3. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the power meter.

Power Meter:

It is used as the auxiliary test equipment to conduct the output power measurement.

- 4. Record the max. Reading as observed from Power Meter.
- 5. Repeat above procedures until all test default channel measured was complete.

Duty Factor:

	Duty Cycle (%)	Duty Factor (dB)
BLE	63.55	1.97



Duty Cycle Factor:10*log(1/63.55/100)=1.97

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

biness otherwise stated the results stated the results state provide the state of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



7.5 Measurement Result:


BT4.1 mode:

BLE mode:

СН	Frequency (MHz)	Peak Power Output(dBm)	Required Limit
0	2402	8.45	1 Watt = 30 dBm
20	2442	8.54	1 Watt = 30 dBm
39	2480	8.45	1 Watt = 30 dBm

СН	Frequency (MHz)	Average Power Output(dBm)	Required Limit
0	2402	6.40	1 Watt = 30 dBm
20	2442	6.48	1 Watt = 30 dBm
39	2480	6.35	1 Watt = 30 dBm

*Note: Measured by power meter, as cable loss+ Duty cycle factor that offsets on the power meter





6dB & 99% BANDWIDTH MEASUREMENT 8


8.1 **Standard Applicable**

The minimum 6 dB bandwidth shall be at least 500 kHz .

8.2 Measurement Equipment Used

Conducted Emission Test Site						
EQUIPMENT	MFR MODEL SERIAL			LAST	CAL DUE.	
TYPE		NUMBER	NUMBER	CAL.		
Spectrum Analyzer	KEYSIGHT	N9010A	MY54510568	04/14/2015	04/13/2016	
DC Block	PASTERNACK	PE8210	RF29	12/12/2015	12/11/2016	
Coaxial Cable 30cm	WOKEN	00100A1F1A195C	RF01	12/12/2015	12/11/2016	

8.3 Test Set-up:



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or ap-reporting of this document is unlawful and offanders may be prosecuted to the fullest extent of the law pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



8.4 Measurement Procedure:

- 1. Place the EUT on the table and set it in transmitting mode.
- 2. The testing follows the Measurement Procedure of FCC KDB 558074 D01 DTS Meas. Guidance V03r04.
- 3. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
- 4. For 6dB Bandwidth:

Set the spectrum analyzer as RBW=100 kHz, VBW= 3*RBW, Span = 5MHz, Detector=Peak, Sweep=auto.

- 5. Mark the peak frequency and –6dB (upper and lower) frequency.
- 6. For 99% Bandwidth:

Set the spectrum analyzer as RBW=1%, VBW=3*RBW, Span = 2MHz, Detector=Sample, Sweep=auto.

- 7. Turn on the 99% bandwidth function, max reading.
- 8. Repeat above procedures until all test default channel is completed

BLE mode			
Frequency (MHz)	6dB Bandwidth (MHz)	Bandwidth (MHz)	Result
2402	0.6671	> 0.5	PASS
2442	0.6731	> 0.5	PASS
2480	0.6785	> 0.5	PASS

8.5 Measurement Result:

BLE mode

Frequency (MHz)	99%Bandwidth (MHz)
2402	1.014
2442	1.02
2480	1.0267


Note: Refer to next page for plots.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

biness otherwise stated the results stated the results state provide the state of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law



BT4.1 mode 6dB Band Width Test Data CH-Low

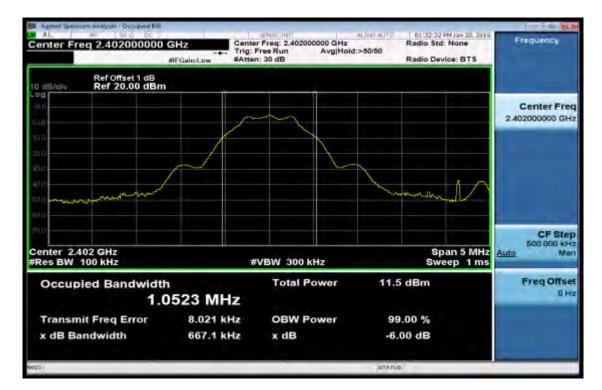

6dB Band Width Test Data CH-Mid




Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are relatined to so days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



6dB Band Width Test Data CH-High

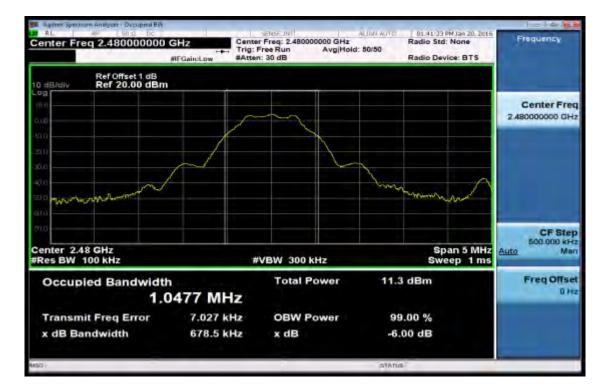


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有说明,此根告结果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or ap-reparatore of this document is unaveruent as unaveruent at the transaction formeant is unaveruent as unaveruent to a prove a fit bis document is unaveruent as unaveruent as unaveruent as the prove of the back. pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



99% Band Width Test Data CH-Low

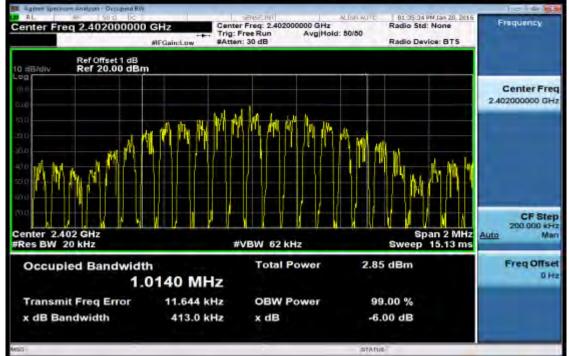

99% Band Width Test Data CH-Mid

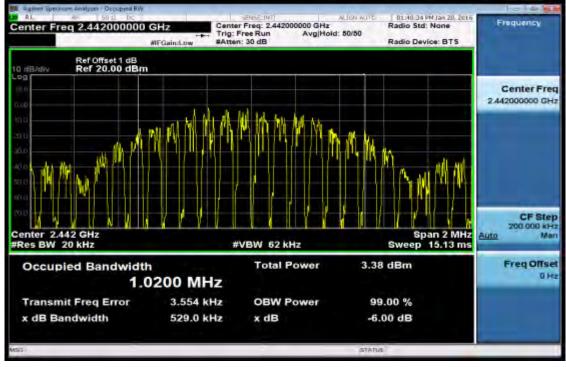


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有说明,此根告结果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or ap-reparatore of this document is unaveruent as unaveruent at the transaction formeant is unaveruent as unaveruent to a prove a fit bis document is unaveruent as unaveruent as unaveruent as the prove of the back. pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



99% Band Width Test Data CH-High

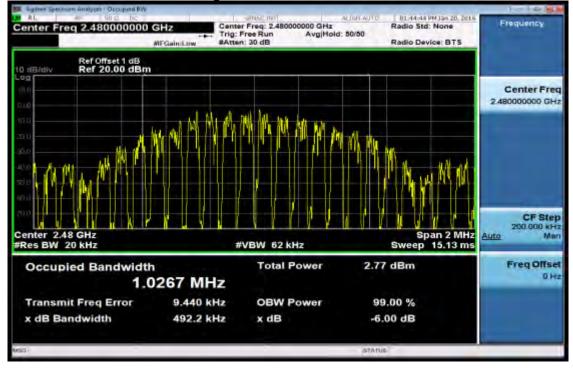

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有说明,此根告结果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or ap-reparatore of this document is unaveruent as unaveruent at the transaction formeant is unaveruent as unaveruent to a prove a fit bis document is unaveruent as unaveruent as unaveruent as the prove of the back. pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



CONDUCTED BAND EDGES AND SPURIOUS EMISSION MEASUREMENT 9


9.1 **Standard Applicable**

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a).

9.2 **Measurement Equipment Used:**

Conducted Emission Test Site						
EQUIPMENT MFR MODEL SERIAL				LAST	CAL DUE.	
TYPE		NUMBER	NUMBER	CAL.		
Spectrum Analyzer	KEYSIGHT	N9010A	MY54510568	04/14/2015	04/13/2016	
DC Block	PASTERNACK	PE8210	RF29	12/12/2015	12/11/2016	
Coaxial Cable 30cm	WOKEN	00100A1F1A195C	RF01	12/12/2015	12/11/2016	

Test SET-UP: 9.3



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only

Ref 另有說明,此報告結果僅對測試之樣品負責、同時此樣品僅保留的玩。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms/e-document.htm. Attention is frawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law



9.4 Measurement Procedure

Conducted Band Edge:

- 1. To connect Antenna Port of EUT to Spectrum.
- 2. The testing follows the Measurement Procedure of FCC KDB 558074 D01 DTS Meas. Guidance V03r04.
- Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
- 4. Set start to edge frequency, and stop frequency of spectrum analyzer so as to encompass the spectrum to be examined.
- 5. Set the spectrum analyzer as RBW=100 kHz, VBW=300 kHz, Detector = Peak, Sweep = auto
- 6. Mark the highest reading of the emission as the reference level measurement.
- 7. Set DL as the limit = reading on marker 1 20dBm
- 8. Marker on frequency, 2.3999GHz and 2.4836GHz, and examine shall 100 kHz immediately outside the authorized (2400~2483.5) be attenuated by 20dB at least relative to the maximum emission of power.
- 9. Repeat above procedures until all default test channel (low, middle, and high) was complete.

Conducted Spurious Emission:

- 1. To connect Antenna Port of EUT to Spectrum.
- 2. The testing follows the Measurement Procedure of FCC KDB 558074 D01 DTS Meas. Guidance V03r04.
- 3. Set RBW = 100 kHz & VBW=300 kHz, Detector = Peak, Sweep = Auto
- 4. Allow trace to fully stabilize.
- 5. Use the peak marker function to determine the maximum power level in any 100 kHz band segment within the fundamental EBW.
- 6. Repeat above procedures until all default test channel measured were complete.

9.5 Measurement Result

Note: Refer to next page spectrum analyzer data chart and tabular data sheets.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

biness otherwise stated the results stated the results state provide the state of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law



BT4.1 mode **Band Edges Test Data CH-Low**

Autor Spectrum Analyset Swep RL 85 500 Center Freq 2.36000	- DC	Trig: Free Run #Atten: 30 dB		ALIGN MITS J Type: Log-Pwr	0113200 PM Jan 25, 2016 TRACE 0 2 3 4 THE DET P NH NH 1	Frequency
Ref Offset 1 dB Mkr3 2.390 0 GHz 0 dB/day Ref 20.00 dBm - 59.45 dBm					Auto Tun	
000 150 0 00 16 0					1 1 1 100 1840	Center Free 2.350000000 GH
20 0					24	Start Fre 2.310000000 GH
50 0 50 0 70 0	a and a start of the		التحاور ولتحاجرك		3 May May	Stop Fre 2 41000000 GH
Res BW 100 KHz	#VBV	V 300 kHz 7	PUNCTION	Sweep 1	Stop 2.41000 GHz .000 ms (1001 pts)	CF Ste 10.000000 MH Auto Me
1 N 1 T N 1 T N 1 T 4 5	2,402 1 GHz 2,399 9 GHz 2,390 0 GHz	8.40 dBm -49.38 dBm -69.45 dBm				Freq Offse 0 H
7 8 9 10						
90				STATUS		

Band Edges Test Data CH-High



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有说明,此根告结果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or ap-reparatore of this document is unaveruent as unaveruent at the transaction formeant is unaveruent as unaveruent to a prove a fit bis document is unaveruent as unaveruent as unaveruent as the prove of the back. pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Conducted Spurious Emission Measurement Result CH-Low 30MHz - 3GHz

B Agitent Spectrum Analyzes / Swept SA	Sense Infl	ALIGN HUTG	01:32:26 PM Jan 25, 2016	
Center Freq 1.515000000	PNO: Fast Trig: Free Run	Avg Type: Log-Pwr	TRACE 224	Frequency
Ref Offset 1 dB	IFGain:Low BAtten: 30 dB	Mkr	2.403 0 GHz 8.34 dBm	Auto Tun
19.0 (10.0) (10.0)			3116180	Center Fre 1.515000000 GH
20 0) 20 0				Start Fre 30.000000 MH
50 0 50 0 10 0	an a			Stop Fre 3.00000000 GP
itart 30 MHz Res BW 100 kHz M/R MODE TRC: SCL X		Sweep 9.6	Stop 3.000 GHz 57 ms (1001 pts)	CF Ste 297.000000 Mi <u>Auto</u> Mi
1 N 1 f 2. 2 3 4 5 6 6 6 6 7 8 9 9 10 11	.403 0 GHz 8.34 dBm			Freq Offse 0 F
99		STATUS	- 1	

CH-Low 3GHz - 26.5GHz

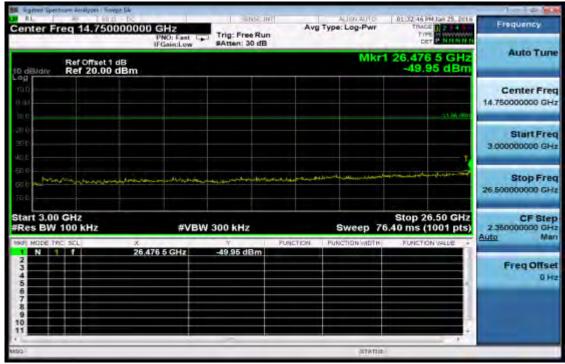

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有说明,此根告结果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or ap-reparatore of this document is unaveruent as unaveruent at the transaction formeant is unaveruent as unaveruent to a prove a fit bis document is unaveruent as unaveruent as unaveruent as the prove of the back. pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



CH-Mid 30MHz - 3GHz

Agitem Spectrum Analyzes / Swept 54					0 0 0
Center Freq 1.51500000	PNO East La Ing.	Free Run n: 30 dB	ALIGN AUTO	124 08 PM Jan 25, 2016 TRACE 12 2 4 1 TREE DET P NH NH N	Frequency
Ref Offset 1 dB	1 destrictions		Mkr1	2.441 6 GHz 8.70 dBm	Auto Tune
190 190 110				-11 30 allow	Center Fred 1.515000000 GH
-20 () 30 C					Start Free 30.000000 MH
50 0 60 t /0 t	Le addre and an	and alternative day		nighter the Report Constant	Stop Free 3.00000000 GH
Start 30 MHz #Res BW 100 kHz	#VBW 300 k	Hz	Sweep 9.66	Stop 3.000 GHz 7 ms (1001 pts)	CF Step 297.000000 MH Auto Mar
1 N 1 f 2, 2 3 4 5 6	441 6 GHz 8.7	0 dBm			Freq Offse 0 Ho
7 8 9 10 11 11					
N9G			STATUS		

CH-Mid 3GHz - 26.5GHz

and the second			0 0 0
PNO: Fast Trig: Free Run	Avg Type: Log-Pwr	01:34:33 PM Jan 25, 2016 TRACE 12:214.0 LITE COMMISSION	Frequency
	Mkr	26.359 0 GHz -51.08 dBm	Auto Tune
		-11.50 (6)-1	Center Freq 14.750000000 GHz
			Start Freq 3.000000000 GHz
ويعاودون والمستريد والمعارية والمستريد والمستريد والمستريد والمستريد والمستريد والمستريد والمستريد والمستريد والمستريد	Same and the second	nie in wester of the Planam, of the Para	Stop Freq 26,50000000 GHz
#VBW 300 kHz	and the second		CF Step 2.350000000 GHz Auto Man
,359 0 GHz -51,08 dBm			Freq Offset 0 Hz
		, ·	
	UGHZ PNO: Fast IFGain:Low Atten: 30 dB	Avg Type: Log-Pwr PNO: Fast PNO: Fast Fig: Pree Run #Atten: 30 dB Mikr Avg Type: Log-Pwr Mikr Mikr	D GHz PNO: Fast IFG.sin:Low Trig: Free Run #Atten: 30 dB Avg Type: Log-Pwr Type: Log-Pwr TriALE Type: Log-Pwr TriALE Type: Log-Pwr Mkr1 26.359 0 GHz -51.08 dBm 11 32 des 11 32 des 11 32 des Mkr1 26.359 0 GHz -51.08 dBm 11 32 des 11 32 des Mkr1 26.359 0 GHz -51.08 dBm 11 32 des

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測试之樣品負責,同時此樣品僅保留卽天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. In is document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or ap-pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. SCET Channel 14 Mu/KunePord NuwToinel/NursiPark Mu/ku/District NuwToinel/City Taiwan2/4803/% th TE RUG % the # TRUE % 134 %



CH-High 30MHz – 3GHz

Agitem Spectrum Analyzes / Swept SA					0 0 0
Center Freq 1.515000000	GHz PNO: Fast	Trig: Free Run #Atten: 30 dB	Aug Type: Log-Pwr	01:36:02 PM Jan 25, 2016 TRACE 0 214 1 TIPE DET P NH NH F	Frequency
Ref Offset 1 dB			M	ur1 2.480 3 GHz 8.41 dBm	Auto Tun
- 00 19.0 0 00					Center Fre 1.515000000 GH
20 0					Start Fre 30.000000 MH
50 0 60 0 70 0	an a	elis XI - o Consultitive		Jumoran	Stop Fre 3.000000000 GH
Start 30 MHz Res BW 100 kHz	#VBW	300 kHz	Sweep 9	Stop 3.000 GHz 667 ms (1001 pts)	CF Ste 297.000000 MH Auto Ma
1 N 1 1 2. 2 3 4 5 5 5 5 5 5 5 5 5 5 5 5 5 5 5 5 5 5	480 3 GHz	8.41 dBm	PORCTON PORCTON METH	FUNCTION VALUE	Freq Offse 0 H
6 7 8 9 10					
90			STATU	el ,	

CH- High 3GHz – 26.5GHz

M Agitent Spectrum Analyzes I Swept SA	a second s	and the second second second	Trade and a second second	0 0 0
Center Freq 14.750000000	PNO: Fast Trig: Free Run IFGainLow #Atten: 30 dB	Avg Type: Log-Pwr	013815 PM Jao 25, 2016 TRACE 0 2 14 0 TITE DET P NIN MINER	Frequency
Ref Offset 1 dB 10 dB/div Ref 20.00 dBm		Mkr	26.359 0 GHz -50.84 dBm	Auto Tune
100 100			51.51) (Ein	Center Freq 14.750000000 GHz
12.0 () (i) () (i) (c) (i) (c) (i) (c) (i) (c) (i) (c) (i) (c)				Start Freq 3.000000000 GHz
60.0 60.0 70.0	موار معرف المراجع المراجع ومن المراجع المراجع المراجع ومعرف المراجع ومعرف المراجع ومعرف المراجع ومعرف المراجع و	and the second		Stop Freq 26,50000000 GHz
Start 3.00 GHz #Res BW 100 kHz	#VBW 300 kHz		Stop 26.50 GHz 6.40 ms (1001 pts)	CF Step 2.35000000 GHz Auto Man
1 N 1 7 26.3 3 4 6 6 7 8	359 0 GHz -50,84 dBm			Freq Offset 0 Hz
9 10 11		STATUS	, ÷	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測试之樣品負責,同時此樣品僅保留卽天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. In is document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or ap-pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. SCET Channel 14 Mu/KunePord NuwToinel/NursiPark Mu/ku/District NuwToinel/City Taiwan2/4803/% th TE RUG % the # TRUE % 134 %



10 RADIATED BANDEDGE AND SPURIOUS EMISSION MEASUREMENT

10.1 Standard Applicable

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. In addition, radiated emissions which fall in the restricted bands must also comply with the §15.209 limit as below.

And according to §15.33(a) (1), for an intentional radiator operates below 10GHz, the frequency range of measurements: to the tenth harmonic of the highest fundamental frequency or to 40GHz, whichever is lower.

Frequency (MHz)	Field strength (microvolts/meter)	Distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Note:

- 1. The lower limit shall apply at the transition frequencies.
- Emission level (dBµV/m) = 20 log Emission level (dBµV/m)

Chicos Statement is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms/e-document.htm. Attention is frawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law SGS Taiwan Ltd.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only




10.2 Measurement Equipment Used

966 Chamber							
EQUIPMENT	MFR	MODEL	SERIAL	LAST	CAL DUE.		
ТҮРЕ		NUMBER	NUMBER	CAL.			
EMI Test Receiver	R&S	ESU 40	100363	04/09/2015	04/08/2016		
Loop Antenna	ETS-Lindgren	6502	00143303	12/23/2015	12/22/2016		
Broadband Antenna	TESEQ	CBL 6112D	35240	10/28/2015	10/27/2016		
Horn Antenna	ETS-Lindgren	3117	00143272	12/16/2015	12/15/2016		
Horn Antenna	Schwarzbeck	BBHA9170	185	07/24/2015	07/23/2016		
Pre Amplifier	EMC Instruments	EMC330	980096	12/12/2015	12/11/2016		
Pre Amplifier	EMC Instruments	EMC001183 0	980199	12/12/2015	12/11/2016		
Pre Amplifier	R&S	SCU-18	10204	12/12/2015	12/11/2016		
Pre Amplifier	R&S	SCU-26	100780	12/12/2015	12/11/2016		
Coaxial Cable	Huber+Suhner	RG 214/U	966Rx 9K-30M	12/12/2015	12/11/2016		
Coaxial Cable	Huber+Suhner	RG 214/U SUCOFLEX 104	966Rx 30M-3G	12/12/2015	12/11/2016		
Coaxial Cable	Huber+Suhner	SUCOFLEX 104	966Rx 1G-18G	12/12/2015	12/11/2016		
Coaxial Cable	Huber+Suhner	mini 141-12 SUCOFLEX 104	966Rx 18G-40G	12/12/2015	12/11/2016		
Coaxial Cable	Huber+Suhner	SUCOFLEX 104	966Tx 30M-18G	12/12/2015	12/11/2016		
Coaxial Cable	Huber+Suhner	SUCOFLEX 102	966Tx 18G-40G	12/12/2015	12/11/2016		
Attenuator	WOKEN	218FS-10	RF27	12/12/2015	12/11/2016		
Site NSA	SGS	966 Cham- ber C	SAC-C	03/04/2015	03/03/2016		
Site VSWR	SGS	966 Cham- ber C	SAC-C	03/04/2015	03/03/2016		
DC Power Supply	HOLA	DP-3003	D7070035	05/04/2015	05/03/2016		
Controller	MF	MF-7802	N/A	N.C.R.	N.C.R.		
Antenna Master	MF	N/A	N/A	N.C.R.	N.C.R.		
Turn Table	MF	N/A	N/A	N.C.R.	N.C.R.		
Test Software	World-Pallas	Dr. E	V 3.0 Lite	N.C.R.	N.C.R.		




10.3 Test SET-UP


(A) Radiated Emission Test Set-UP Frequency Below 30MHz.

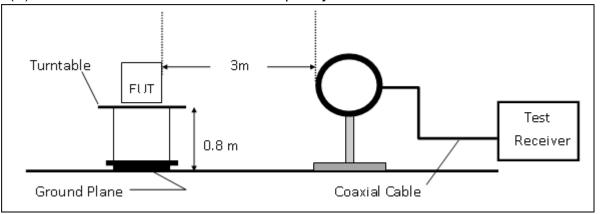

(B) Radiated Emission Test Set-Up, Frequency form 30MHz to 1000MHz

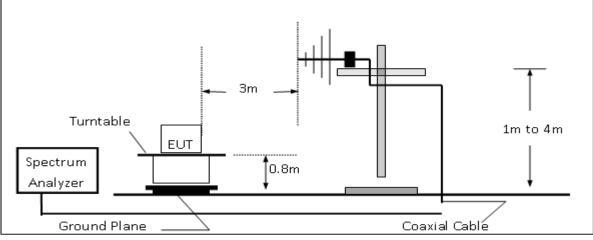

(C) Radiated Emission Test Set-UP Frequency Over 1 GHz

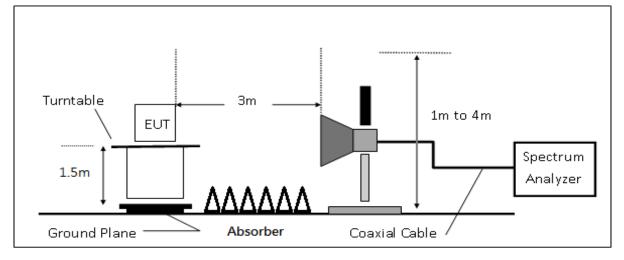

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有说明,此根告结果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or ap-reparatore of this document is unaveruent as unaveruent at the transaction formeant is unaveruent as unaveruent to a prove a fit bis document is unaveruent as unaveruent as unaveruent as the prove of the back. pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



10.4 Measurement Procedure

- 1. The testing follows the Measurement Procedure of FCC KDB 558074 D01 DTS Meas. Guidance V03r04.
- The EUT was placed on a turn table with 0.8m for frequency< 1GHz and 0.8m for frequen-2. cy> 1GHz above ground plan.
- The turn table shall rotate 360 degrees to determine the position of maximum emission level. 3.
- 4. EUT is set 3m away from the receiving antenna which varied from 1m to 4m to find out the highest emissions.
- Set the spectrum analyzer as RBW=120 kHz and VBW=300 kHz for Peak Detector (PK) 5. and Quasi-peak (QP) at frequency below 1 GHz.
- 6. Set the spectrum analyzer as RBW=1 MHz, VBW=3 MHz for Peak Detector at frequency above 1 GHz.
- 7. Set the spectrum analyzer as RBW=1 MHz, VBW=10 Hz (Duty cycle > 98%) or VBW \geq 1/T (Duty cycle < 98%) for Average Detector at frequency above 1 GHz.
- 8. When measurement procedures for electric field radiated emissions above 1 GHz the EUT measurement is to be made "while keeping the antenna in the 'cone of radiation' from that area and pointed at the area both in azimuth and elevation, with polarization oriented for maximum response." is still within the 3dB illumination BW of the measurement antenna.
- 9. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
- 10. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. On spectrum, change spectrum mode in linear display mode, and reduce VBW = 10Hz if average reading is measured.
- 11. Repeat above procedures until all default test channel measured were complete.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only

Chicos Statement is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms/e-document.htm. Attention is frawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law



10.5 Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor (if any) from the measured reading. The basic equation with a sample calculation is as follows:

FS = RA + AF + CL - AG

Where	0	CL = Cable Attenuation Factor (Cable Loss)
	RA = Reading Amplitude	AG = Amplifier Gain
	AF = Antenna Factor	

Actual FS(dB μ V/m) = SPA. Reading level(dB μ V) + Factor(dB)

Factor(dB) = Antenna Factor(dB μ V/m) + Cable Loss(dB) – Pre Amplifier Gain(dB)

Note :

"F" : denotes Fundamental Frequency. ; "H" : denotes Harmonic Frequency.

"E" : denotes Band Edge Frequency. ; "S" : denotes Spurious Frequency.

10.6 Test Results of Radiated Spurious Emissions form 9 kHz to 30 MHz

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit per 15.31(o) was not reported.

10.7 Measurement Result:

Note: Refer to next page spectrum analyzer data chart and tabular data sheets.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only

biness otherwise stated the results stated the results state provide the state of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law SGS Taiwan Ltd.




Radiated Band Edge Measurement Result (BT4.1 mode)

Operation N Fundament Operation E EUT Pol. :	al Frequenc	BT 4.0 y : 2402 M BE CH E2	Low Test Engi	lumi. :	ina Pol. :	2016/1/18 22.7deg_C Ashton Vertical	757RH
Freq.	Note	Detector Mode	Spectum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
2390.00	E	Peak	45.55	6.62	52.17	74	-21.83
2390.00	E	Average	33.31	6.62	39.93	54	-14.07
Operation N	/lode :	BT 4.0	Test Date):		2016/1/18	
	al Frequenc	y: 2402 M	Hz Temp. / H	lumi. :		22.7deg_C	/57RH
Operation E	•	BE CH	•			Ashton	
EUT Pol. :		E2	Measurer	nent Anten	na Pol. :	Horizontal	
_	N1 1	D	0	- .	A		
Freq.	Note	Detector	Spectum	Factor	Actual	Limit	Margin
		Mode	Reading Level	10	FS	@3m	10
MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
2390.00	E	Peak	44.65	6.62	51.26	74	-22.74
2390.00	E	Average	33.08	6.62	39.70	54	-14.30
Operation M	Node :	BT 4.0	Test Date):		2016/1/18	
Fundamenta	al Frequency	y: 2480 M	Hz Temp. / H	łumi. :		22.7deg_0	C/57RH
Fundamenta Operation B	• •	y : 2480 M BE CH				22.7deg_C Ashton	C/57RH
	• •		High Test Engi		ina Pol. :	-	C/57RH
Operation B EUT Pol. :	Band :	BE CH E2	High Test Eng Measure	neer : nent Anter		Ashton Vertical	
Operation B	• •	BE CH E2 Detector	High Test Engi Measure Spectum	neer :	Actual	Ashton Vertical Limit	C/57RH Margin
Operation B EUT Pol. : Freq.	Band : Note	BE CH E2 Detector Mode	High Test Eng Measurer Spectum Reading Level	neer : nent Anten Factor	Actual FS	Ashton Vertical Limit @3m	Margin
Operation B EUT Pol. : Freq. MHz	Band : Note F/H/E/S	BE CH E2 Detector Mode PK/QP/AV	High Test Engi Measure Spectum Reading Level dBµV	neer : nent Anten Factor dB	Actual FS dBµV/m	Ashton Vertical Limit @3m dBµV/m	Margin dB
Operation B EUT Pol. : Freq. <u>MHz</u> 2483.50	Band : Note F/H/E/S E	BE CH E2 Detector Mode PK/QP/AV Peak	High Test Engi Measurer Spectum Reading Level dBµV 51.33	neer : nent Anten Factor dB 6.96	Actual FS dBµV/m 58.29	Ashton Vertical Limit @3m dBµV/m 74	Margin dB -15.71
Operation B EUT Pol. : Freq. <u>MHz</u> 2483.50 2483.50	Band : Note <u>F/H/E/S</u> E E	BE CH E2 Detector Mode PK/QP/AV Peak Average	High Test Eng Measurer Spectum Reading Level dBµV 51.33 41.02	neer : nent Anten Factor dB 6.96 6.96	Actual FS dBµV/m 58.29 47.98	Ashton Vertical @3m dBµV/m 74 54	Margin dB -15.71 -6.02
Operation B EUT Pol. : Freq. <u>MHz</u> 2483.50 2483.50 2489.60	Band : Note F/H/E/S E E S	BE CH E2 Detector Mode PK/QP/AV Peak Average Peak	High Test Engi Measurer Spectum Reading Level <u>dBµV</u> 51.33 41.02 52.06	neer : nent Anten Factor dB 6.96 6.96 6.99	Actual FS dBµV/m 58.29 47.98 59.05	Ashton Vertical Limit @3m dBµV/m 74 54 74	Margin dB -15.71 -6.02 -14.95
Operation B EUT Pol. : Freq. <u>MHz</u> 2483.50 2483.50	Band : Note <u>F/H/E/S</u> E E	BE CH E2 Detector Mode PK/QP/AV Peak Average	High Test Eng Measurer Spectum Reading Level dBµV 51.33 41.02	neer : nent Anten Factor dB 6.96 6.96	Actual FS dBµV/m 58.29 47.98	Ashton Vertical @3m dBµV/m 74 54	Margin dB -15.71 -6.02
Operation B EUT Pol. : Freq. <u>MHz</u> 2483.50 2483.50 2489.60	Band : Note F/H/E/S E E S S	BE CH E2 Detector Mode PK/QP/AV Peak Average Peak	High Test Engi Measurer Spectum Reading Level <u>dBµV</u> 51.33 41.02 52.06	neer : nent Anten Factor dB 6.96 6.96 6.99 6.99	Actual FS dBµV/m 58.29 47.98 59.05	Ashton Vertical Limit @3m dBµV/m 74 54 74	Margin dB -15.71 -6.02 -14.95
Operation B EUT Pol. : Freq. <u>MHz</u> 2483.50 2483.50 2489.60 2489.60 2489.60	Band : Note F/H/E/S E E S S	BE CH E2 Detector Mode PK/QP/AV Peak Average Peak Average BT 4.0	High Test Engi Measurer Spectum Reading Level <u>dBµV</u> 51.33 41.02 52.06 33.60 Test Date	neer : nent Anten Factor dB 6.96 6.99 6.99 6.99	Actual FS dBµV/m 58.29 47.98 59.05	Ashton Vertical @3m dBµV/m 74 54 74 54 54	Margin dB -15.71 -6.02 -14.95 -13.41
Operation B EUT Pol. : Freq. <u>MHz</u> 2483.50 2483.50 2489.60 2489.60 2489.60	Note F/H/E/S E S S Mode : al Frequency	BE CH E2 Detector Mode PK/QP/AV Peak Average Peak Average BT 4.0	High Test Engi Measurer Spectum Reading Level <u>dBµV</u> 51.33 41.02 52.06 33.60 Test Date Hz Temp. / H	neer : nent Anten Factor dB 6.96 6.99 6.99 6.99	Actual FS dBµV/m 58.29 47.98 59.05	Ashton Vertical Limit @3m dBµV/m 74 54 74 54 2016/1/18	Margin dB -15.71 -6.02 -14.95 -13.41
Operation B EUT Pol. : Freq. MHz 2483.50 2483.50 2489.60 2489.60 Operation M Fundamenta	Note F/H/E/S E S S Mode : al Frequency	BE CH E2 Detector Mode PK/QP/AV Peak Average Peak Average BT 4.0 2480 M	High Test Engi Measurer Spectum Reading Level <u>dBµV</u> 51.33 41.02 52.06 33.60 Test Date Hz Temp. / H High Test Engi	neer : nent Anten Factor dB 6.96 6.99 6.99 6.99	Actual FS dBµV/m 58.29 47.98 59.05 40.59	Ashton Vertical Limit @3m dBµV/m 74 54 74 54 2016/1/18 22.7deg_0	Margin dB -15.71 -6.02 -14.95 -13.41
Operation B EUT Pol. : Freq. MHz 2483.50 2483.50 2489.60 2489.60 2489.60 Operation M Fundamenta Operation B	Note F/H/E/S E S S Mode : al Frequency	BE CH E2 Detector Mode PK/QP/AV Peak Average Peak Average BT 4.0 2480 M BE CH E2 Detector	High Test Engi Measurer Spectum Reading Level <u>dBµV</u> 51.33 41.02 52.06 33.60 Hz Test Date Hz Temp. / H High Test Engi Measurer Spectum	neer : ment Anten Factor dB 6.96 6.99 6.99 6.99 e : lumi. : neer :	Actual FS dBµV/m 58.29 47.98 59.05 40.59	Ash ton Vertical Limit @3m dBµV/m 74 54 74 54 2016/1/18 22.7deg_C Ash ton Horizontal Limit	Margin dB -15.71 -6.02 -14.95 -13.41
Operation B EUT Pol. : Freq. MHz 2483.50 2483.50 2489.60 2489.60 2489.60 Operation M Fundamenta Operation B EUT Pol. : Freq.	Band : Note F/H/E/S E S S Mode : al Frequency Band : Note	BE CH E2 Detector Mode PK/QP/AV Peak Average Peak Average BT 4.0 2480 M BE CH E2 Detector Mode	High Test Engi Measurer Spectum Reading Level <u>dBµV</u> 51.33 41.02 52.06 33.60 Hz Test Date High Test Engi Measurer Spectum Reading Level	neer : ment Anten Factor dB 6.96 6.99 6.99 6.99 e : lumi. : neer : ment Anten Factor	Actual FS <u>dBµV/m</u> 58.29 47.98 59.05 40.59 ma Pol. : Actual FS	Ashton Vertical Limit @3m dBµV/m 74 54 74 54 2016/1/18 22.7deg_0 Ashton Horizontal Limit @3m	Margin dB -15.71 -6.02 -14.95 -13.41 C/57RH Margin
Operation B EUT Pol. : Freq. MHz 2483.50 2483.50 2489.60 2489.60 Operation M Fundamenta Operation B EUT Pol. : Freq. MHz	Band : Note F/H/E/S E S S Mode : al Frequency Band : Note F/H/E/S	BE CH E2 Detector Mode PK/QP/AV Peak Average Peak Average BT 4.0 2480 M BE CH E2 Detector Mode PK/QP/AV	High Test Engi Measurer Spectum Reading Level <u>dBµV</u> 51.33 41.02 52.06 33.60 Hz Test Date High Test Engi Measurer Spectum Reading Level dBµV	neer : ment Anten Factor dB 6.96 6.99 6.99 6.99 9 : lumi. : neer : ment Anten Factor dB	Actual FS dBµV/m 58.29 47.98 59.05 40.59 ma Pol. : Actual FS dBµV/m	Ashton Vertical Limit @3m dBµV/m 74 54 74 54 2016/1/18 22.7deg_C Ashton Horizontal Limit @3m dBµV/m	Margin dB -15.71 -6.02 -14.95 -13.41 C/57RH Margin dB
Operation B EUT Pol. : Freq. MHz 2483.50 2483.50 2489.60 2489.60 2489.60 Operation M Fundamenta Operation B EUT Pol. : Freq.	Band : Note F/H/E/S E S S Mode : al Frequency Band : Note	BE CH E2 Detector Mode PK/QP/AV Peak Average Peak Average BT 4.0 2480 M BE CH E2 Detector Mode	High Test Engi Measurer Spectum Reading Level <u>dBµV</u> 51.33 41.02 52.06 33.60 Hz Test Date High Test Engi Measurer Spectum Reading Level	neer : ment Anten Factor dB 6.96 6.99 6.99 6.99 e : lumi. : neer : ment Anten Factor	Actual FS <u>dBµV/m</u> 58.29 47.98 59.05 40.59 ma Pol. : Actual FS	Ashton Vertical Limit @3m dBµV/m 74 54 74 54 2016/1/18 22.7deg_0 Ashton Horizontal Limit @3m	Margin dB -15.71 -6.02 -14.95 -13.41 C/57RH Margin

SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號



Radiated Spurious Emission Measurement Result (BT4.1 mode) For Frequency form 30MHz to 1000MHz

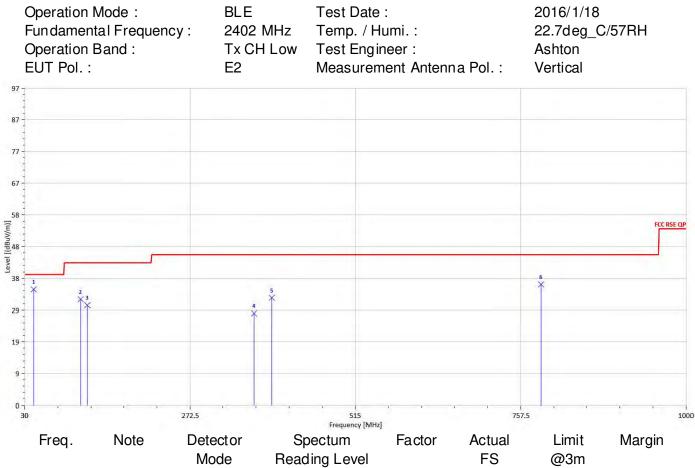


		Mode	Reading Level		FS	@3m	C
MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
43.58	S	Peak	56.88	-21.44	35.44	40	-4.56
112.45	S	Peak	54.49	-22.11	32.38	43.5	-11.12
122.15	S	Peak	51.96	-21.40	30.56	43.5	-12.94
366.59	S	Peak	45.00	-16.91	28.10	46	-17.90
392.78	S	Peak	49.01	-16.16	32.85	46	-13.15
787.57	S	Peak	46.91	-9.93	36.98	46	-9.02

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.




Report No.: E2/2016/10025 Page 40 of 55

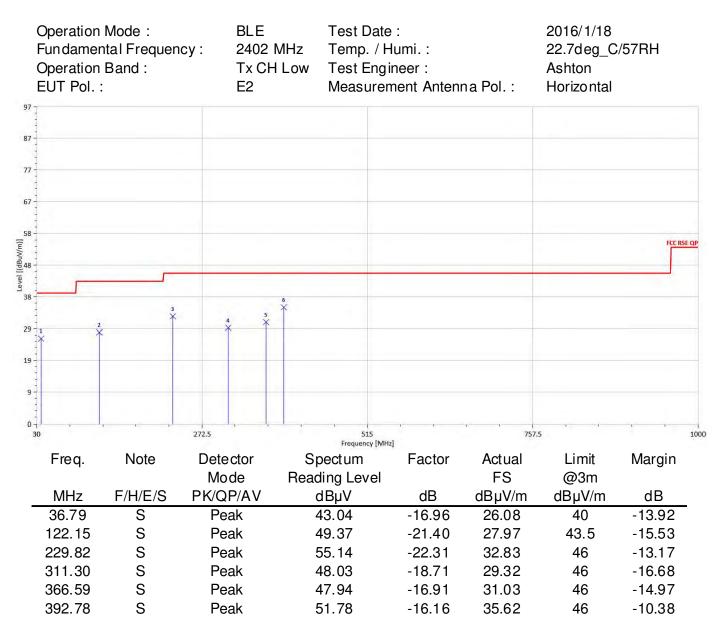


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.




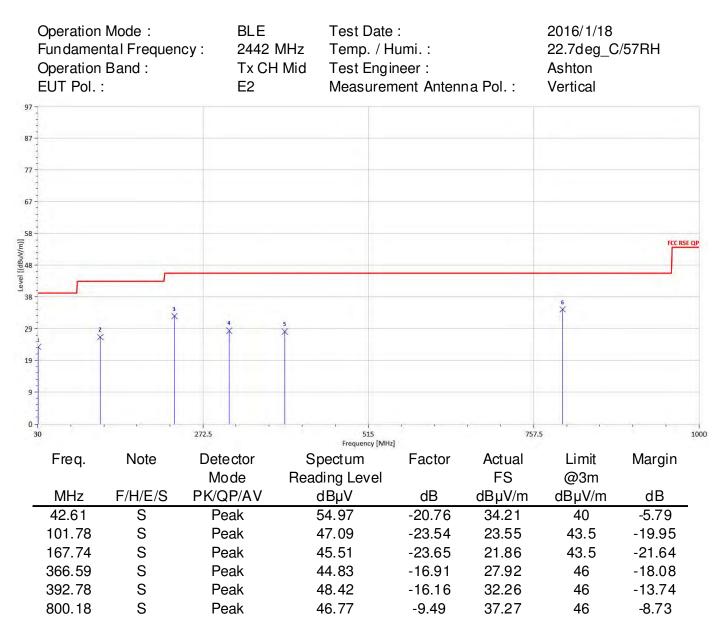




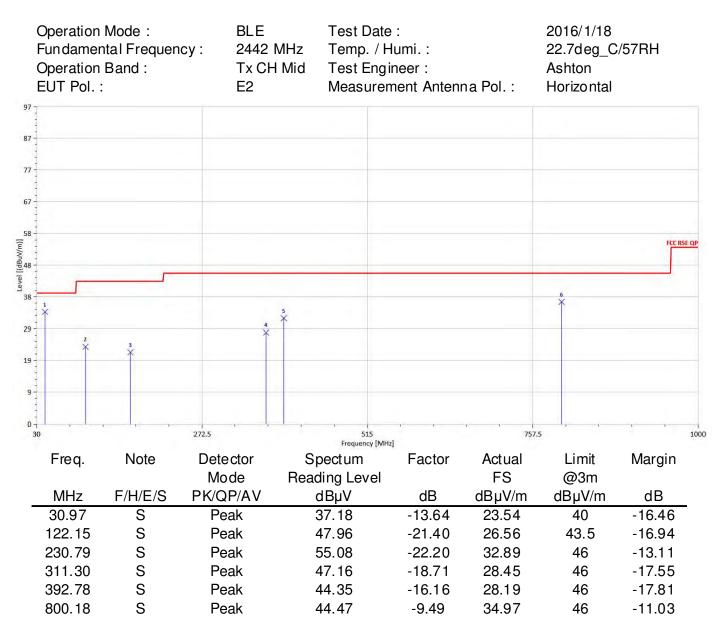



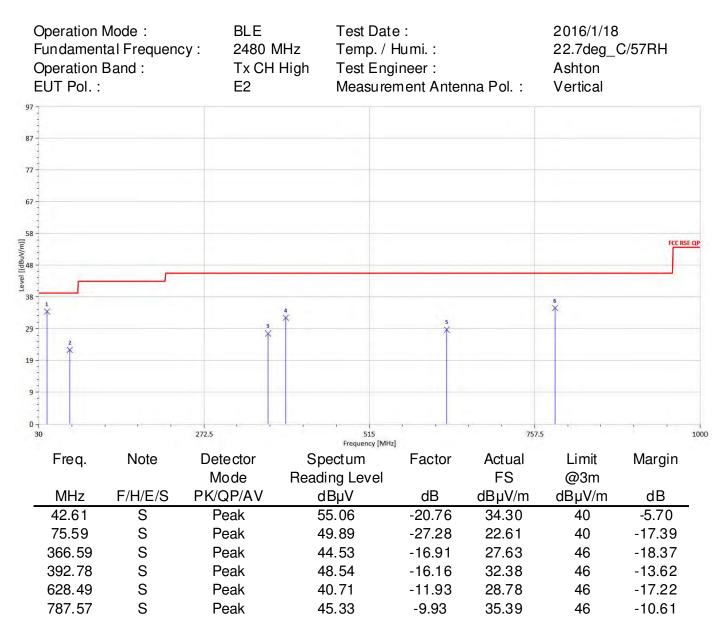



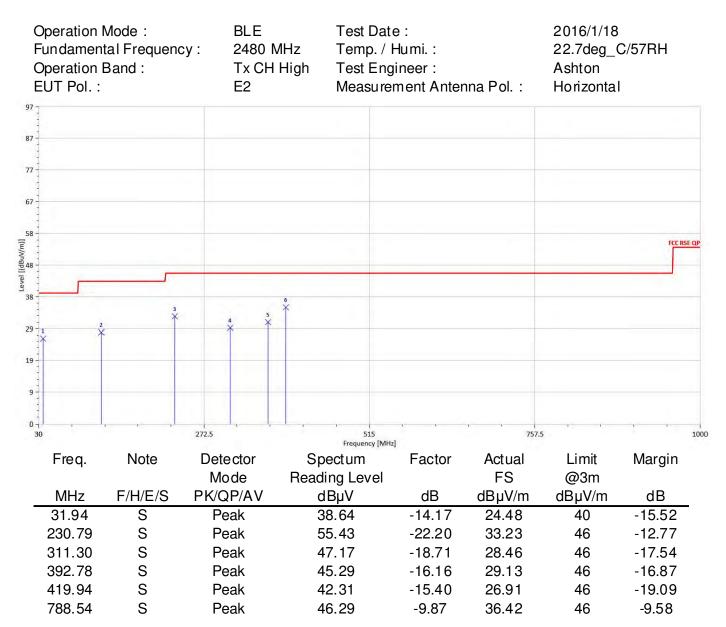




Radiated Spurious Emission Measurement Result (BT4.1 mode) For Frequency above 1GHz

	Operation I Fundament Operation I EUT Pol. :	tal Frequenc	BLE 2402 M Tx CH E2	Low Test E	Date : . / Humi. : Engineer : urement Anten	ina Pol. :	2016/1/18 22.7deg_C/ Ashton Vertical	57RH
97 87								
87 77	-							
67								FCC RSE PK
58	-							
Level [(dBuV/m)]								FCC RSE AV
J level [(c	-	*						
29		2						
19								
9	-							
0	- - - -		r r					
1	1000		7375	137 Frequence	cy [MHz]	2012		26500
	Freq.	Note	Detector Mode	Spectum Reading Le		Actual FS	Limit @3m	Margin
_	MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
	4804.00 4804.00	H H	Peak Average	32.11 22.30	10.98 10.98	43.09 33.28	74 54	-30.91 -20.72

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.




Operation Mode :	BLE	Test Date :	2016/1/18
Fundamental Frequency :	2402 MHz	Temp. / Humi. :	22.7deg_C/57RH
Operation Band :	Tx CH Low	Test Engineer :	Ashton
EUT Pol. :	E2	Measurement Antenna Pol. :	Horizontal

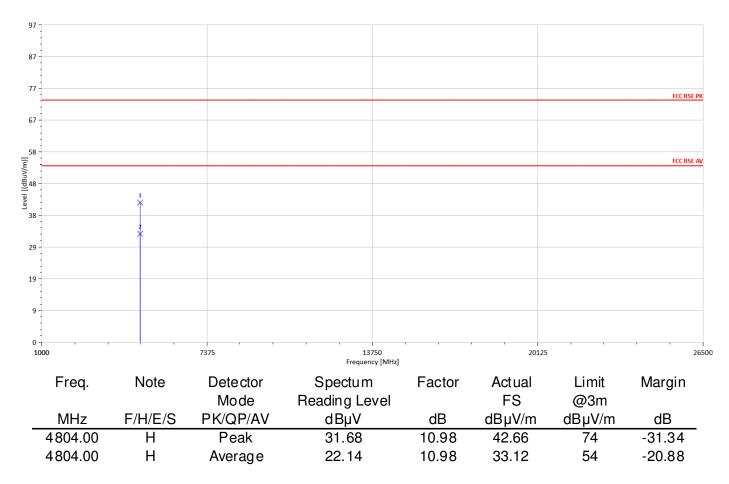




Operation Mode :	BLE	Test Date :	2016/1/18
Fundamental Frequency :	2442 MHz	Temp. / Humi. :	22.7deg_C/57RH
Operation Band :	Tx CH Mid	Test Engineer :	Ashton
EUT Pol. :	E2	Measurement Antenna Pol. :	Vertical

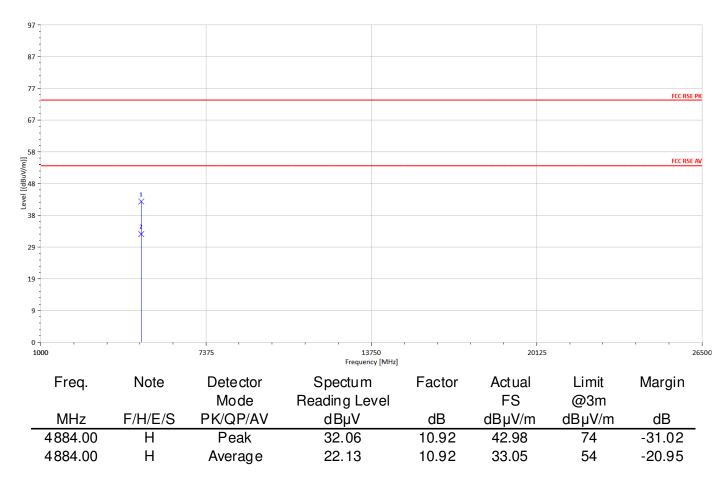




Operation Mode :	BLE	Test Date :	2016/1/18
Fundamental Frequency :	2442 MHz	Temp. / Humi. :	22.7deg_C/57RH
Operation Band :	Tx CH Mid	Test Engineer :	Ashton
EUT Pol. :	E2	Measurement Antenna Pol. :	Horizontal

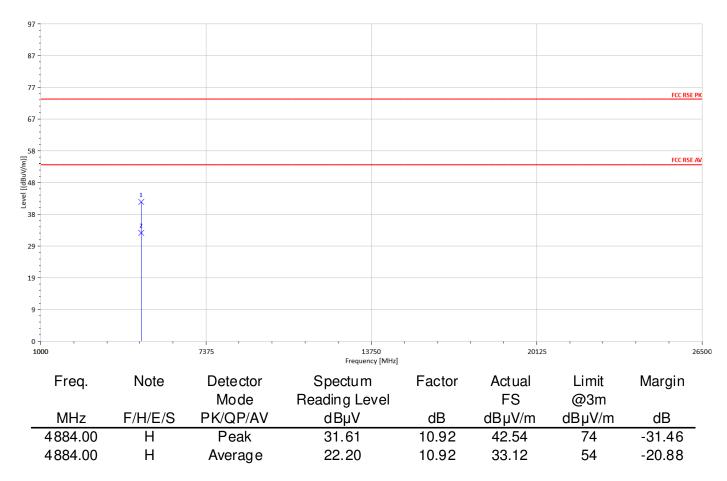




Operation Mode :BLETest DateFundamental Frequency :2480 MHzTemp. / HuOperation Band :Tx CH HighTest EnginEUT Pol. :E2Measurem	ımi.: 22.7deg_C/57RH
---	----------------------

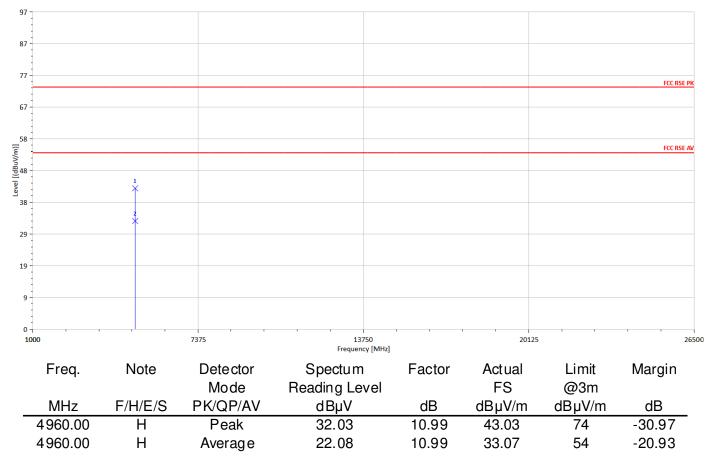



Operation Mode :	BLE	Test Date :	2016/1/18
Fundamental Frequency :	2480 MHz	Temp. / Humi. :	22.7deg_C/57RH
Operation Band :	Tx CH High	Test Engineer :	Ashton
EUT Pol. :	E2	Measurement Antenna Pol. :	Horizontal

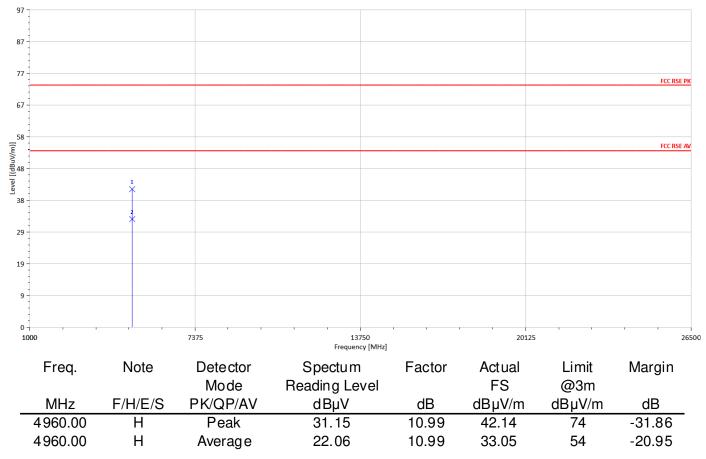



11 PEAK POWER SPECTRAL DENSITY


11.1 Standard Applicable:

The power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3 kHz band during any time interval of continuous transmission.

11.2 Measurement Equipment Used:

Conducted Emission Test Site								
EQUIPMENT MFR MODEL SERIAL LAST CAL DUE								
TYPE		NUMBER	NUMBER	CAL.				
Spectrum Analyzer	KEYSIGHT	N9010A	MY54510568	04/14/2015	04/13/2016			
DC Block	PASTERNACK	PE8210	RF29	12/12/2015	12/11/2016			
Coaxial Cable 30cm	WOKEN	00100A1F1A195C	RF01	12/12/2015	12/11/2016			

11.3 Test Set-up:



11.4 Measurement Procedure:

- 1. Set analyzer center frequency to DTS channel center frequency.
- 2. The testing follows the Measurement Procedure of FCC KDB 558074 D01 DTS Meas. Guidance V03r04.
- 3. Set the span to 1.5 times the DTS channel bandwidth.
- 4. Set the RBW = 3 kHz.
- 5. Set the VBW = 10 kHz.
- 6. Detector = peak.
- 7. Sweep time = auto couple.
- 8. Trace mode = max hold.
- 9. Allow trace to fully stabilize.
- 10. Use the peak marker function to determine the maximum amplitude level.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only

biness otherwise stated the results stated the results state provide the state of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law



11.5 Measurement Result:

BT4.1 mode

RI	F	m	00	P

Frequency	RF Power Density	Maximum Limit	Result				
(MHz)	(dBm)	(dBm)					
2402	-6.62	8	PASS				
2442	-6.44	8	PASS				
2480	-6.58	8	PASS				

Note: Refer to next page for plots.

SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號



BT4.1 mode Power Spectral Density Test Plot (CH-Low)



Power Spectral Density Test Plot (CH-Mid)



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Power Spectral Density Test Plot (CH-High)



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有说明,此根告结果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or ap-reparatore of this document is unaveruent as unaveruent at the transaction formeant is unaveruent as unaveruent to a prove a fit bis document is unaveruent as unaveruent as unaveruent as the prove of the back. pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號



12 ANTENNA REQUIREMENT

12.1 Standard Applicable:

For intentional device, according to §15.203, an intentional radiator shall be designed to ensure that no antenna other than furnished by the responsible party shall be used with the device.

If the transmitting antenna is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi.

In case of point-to-point operation, the power shall be reduced by the one dB for every 3 dB that the directional gain of antenna exceeds 6dBi.

12.2 Antenna Connected Construction:

An embedded-in antenna design is used.

The antenna is designed as permanently attached and no consideration of replacement. Please see EUT photo and antenna spec. for details.

The antenna gain is less than 6dBi. Therefore, it is not necessary to reduce maximum output power limit.

~ End of Report ~

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

biness otherwise stated the results stated the results state provide the state of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law SGS Taiwan Ltd.