



TEST REPORT

FCC ID:ZH2TRACD

Report Number.....: ZKT-240105L0224E-1

Date of Test..... Jan.02,2024 to Jan.09,2024

Date of issue.....: Jan.10,2024

Total number of pages..... 41

Test Result.....: PASS

Testing Laboratory.....: **Shenzhen ZKT Technology Co., Ltd.**

Address: 1/F, No. 101, Building B, No. 6, Tangwei Community Industrial Avenue, Fuhai Street, Bao'an District, Shenzhen, China

Applicant's name: **Dragino Technology Co., Limited**

Address: Room 202, Block B, BCT Incubation Bases, No.8 CaiYunRoad LongCheng Street, LongGang District ; Shenzhen 518116,China

Manufacturer's name: **Dragino Technology Co., Limited.**

Address: Room 202, Block B, BCT Incubation Bases, No.8 CaiYunRoad LongCheng Street, LongGang District ; Shenzhen 518116,China

Test specification:

Standard.....: FCC CFR Title 47 Part 15 Subpart C Section 15.247

Test procedure.....: /

Non-standard test method: N/A

Test Report Form No.....: TRF-EL-110_V0

Test Report Form(s) Originator.....: ZKT Testing

Master TRF: Dated: 2020-01-06

This device described above has been tested by ZKT, and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of ZKT, this document may be altered or revised by ZKT, personal only, and shall be noted in the revision of the document.

Product name.....: **LoRaWAN Tracker**

Trademark: DRAGINO

Model/Type reference.....: TrackerD

Ratings.....: Input: DC 5V
Battery:DC 3.7V 1000mA



Testing procedure and testing location:

Testing Laboratory.....: Shenzhen ZKT Technology Co., Ltd.

**Address.....: 1/F, No. 101, Building B, No. 6, Tangwei Community
Industrial Avenue, Fuhai Street, Bao'an District,
Shenzhen, China**

Tested by (name + signature).....: Jim Liu

Jim Liu

Reviewer (name + signature).....: Jackson Fang

Jackson Fang

Approved (name + signature).....: Lake Xie





TABLE OF CONTENTS

Page

1.VERSION	4
2. TEST SUMMARY	5
2.1 TEST FACILITY	6
2.2 MEASUREMENT UNCERTAINTY	6
3. GENERAL INFORMATION	7
3.1 GENERAL DESCRIPTION OF EUT	7
3.2 TEST MODE	9
3.3 SUPPORT EQUIPMENT	9
3.4 TEST INSTRUMENTS LIST	10
4. EMC EMISSION TEST	12
4.1 CONDUCTED EMISSIONS	12
4.2 CONDUCTED PEAK OUTPUT POWER	15
4.3 20dB BANDWIDTH & -6dB BANDWIDTH	17
4.4 CARRIER FREQUENCIES SEPARATION	19
4.5 HOPPING CHANNEL NUMBER	21
4.6 DWELL TIME	22
4.7 BAND EDGE	25
4.8 POWER SPECTRAL DENSITY	27
4.9 SPURIOUS EMISSION	29
5. ANTENNA REQUIREMENT	40
6. TEST SETUP PHOTO	41
7. EUT CONSTRUCTIONAL DETAILS	41



1.Version

Report No.	Version	Description	Approved
ZKT-240105L0224E-1	Rev.01	Initial issue of report	Jan.10,2024



2. Test Summary

Test Item	Section in CFR 47	Result
Antenna Requirement	15.203/15.247 (c)	Pass
AC Power Line Conducted Emission	15.207	Pass
Conducted Peak Output Power	15.247 (b)(1)	Pass
99% occupied bandwidth & 20dB Bandwidth	15.247 (a)(1)	Pass
Carrier Frequencies Separation	15.247 (a)(1)	Pass
Hopping Channel Number	15.247 (a)(1)	Pass
Dwell Time	15.247 (a)(1)	Pass
Emissions in non-restricted frequency bands	15.247(b)(4)	Pass
Radiated Emission	15.205/15.209	Pass
Band Edge	15.247(d)	Pass
Power Spectral Density	15.247 (e)	Pass

NOTE:

(1)" N/A" denotes test is not applicable in this Test Report



2.1 TEST FACILITY

Shenzhen ZKT Technology Co., Ltd.

Add. : 1/F, No. 101, Building B, No. 6, Tangwei Community Industrial Avenue, Fuhai Street,
Bao'an District, Shenzhen, China

FCC Test Firm Registration Number: 692225

Designation Number: CN1299

IC Registered No.: 27033

2.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95 %.

No.	Item	Uncertainty
1	3m chamber Radiated spurious emission(9KHz-30MHz)	U=4.5dB
2	3m chamber Radiated spurious emission(30MHz-1GHz)	U=4.8dB
3	3m chamber Radiated spurious emission(1GHz-6GHz)	U=4.9dB
4	3m chamber Radiated spurious emission(6GHz-40GHz)	U=5.0dB
5	Conducted disturbance	U=3.2dB
6	RF Band Edge	U=1.68dB
7	RF power conducted	U=1.86dB
8	RF conducted Spurious Emission	U=2.2dB
9	RF Occupied Bandwidth	U=1.8dB
10	RF Power Spectral Density	U=1.75dB
11	humidity uncertainty	U=5.3%
12	Temperature uncertainty	U=0.59℃



3. General Information

3.1 General Description of EUT

Product Name:	LoRaWAN Tracker
Model No.:	TrackerD
Test sample(s) ID:	ZKT-240105L0224
Sample(s) Status:	Engineer sample
Serial No.:	N/A
Hardware Version:	N/A
Software Version:	N/A
Operation Frequency:	902.3MHz~914.9MHz
Channel numbers:	64 for 125KHz bandwidth
Channel separation:	0.2MHz for 125KHz bandwidth
Modulation type:	Lora
Antenna Type:	FPC antenna
Antenna gain:	-0.67dBi
Power supply:	Input: DC 5V Battery:DC 3.7V 1000mA



125KHz :

Operation Frequency each of channel							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	902.3	21	906.3	41	910.3	61	914.3
2	902.5	22	906.5	42	910.5	62	914.5
3	902.7	23	906.7	43	910.7	63	914.7
4	902.9	24	906.9	44	910.9	64	914.9
.	.	.	.	.	.	.	.
.	.	32	908.5	.	.	.	.
.	.	.	.	.	.	.	.
17	905.5	37	909.5	57	913.5	.	.
18	905.7	38	909.7	58	913.7	.	.
19	905.9	39	909.9	59	913.9	.	.
20	906.1	40	910.1	60	914.1	.	.

Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

Channel	Frequency(125KHz)
The lowest channel	902.30MHz
The middle channel	908.50MHz
The Highest channel	914.90MHz



3.2 Test mode

Transmitting mode	Keep the EUT in continuously transmitting mode.
<i>Remark: During the test, the test voltage was tuned from 85% to 115% of the nominal rated supply voltage, and found that the worst case was under the nominal rated supply condition. So the report just shows that condition's data.</i>	

3.3 Support Equipment

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Note
E-1	LoRaWAN Tracker	DRAGINO	TrackerD	N/A	EUT
A-1	AC Adapter	HUAWEI	CP415B	N/A	AE

Item	Shielded Type	Ferrite Core	Length	Note

Note:

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in 『Length』 column.



3.4 Test Instruments list

Radiation Test equipment

Item	Equipment	Manufacturer	Type No.	Serial No.	Firmware Version	Last calibration	Calibrated until
1	Spectrum Analyzer (9kHz-26.5GHz)	KEYSIGHT	9020A	MY55370835	A.17.05	Nov. 02, 2023	Nov. 01, 2024
2	Spectrum Analyzer (10kHz-39.9GHz)	R&S	FSV40-N	100363	1.71 SP2	Nov. 02, 2023	Nov. 01, 2024
3	EMI Test Receiver (9kHz-7GHz)	R&S	ESCI7	100969	4.32	Nov. 02, 2023	Nov. 01, 2024
4	Bilog Antenna (30MHz-1500MHz)	Schwarzbeck	VULB9168	N/A	N/A	Nov. 13, 2023	Nov. 12, 2024
5	Horn Antenna (1GHz-18GHz)	Agilent	AH-118	071145	N/A	Nov. 13, 2023	Nov. 12, 2024
6	Horn Antenna (15GHz-40GHz)	A.H.System	SAS-574	588	N/A	Nov. 13, 2023	Nov. 12, 2024
7	Loop Antenna	TESEQ	HLA6121	58357	N/A	Nov. 16, 2023	Nov. 15, 2024
8	Amplifier (30-1000MHz)	EM Electronics	EM330 Amplifier	60747	N/A	Nov. 02, 2023	Nov. 01, 2024
9	Amplifier (1GHz-26.5GHz)	HuiPu	8449B	3008A00315	N/A	Nov. 02, 2023	Nov. 01, 2024
10	Amplifier (500MHz-40GHz)	QuanJuDa	DLE-161	097	N/A	Nov. 02, 2023	Nov. 01, 2024
11	Test Cable	N/A	R-01	N/A	N/A	Nov. 02, 2023	Nov. 01, 2024
12	Test Cable	N/A	R-02	N/A	N/A	Nov. 02, 2023	Nov. 01, 2024
13	Test Cable	N/A	R-03	N/A	N/A	Nov. 02, 2023	Nov. 01, 2024
14	Test Cable	N/A	RF-01	N/A	N/A	Nov. 02, 2023	Nov. 01, 2024
15	Test Cable	N/A	RF-02	N/A	N/A	Nov. 02, 2023	Nov. 01, 2024
16	Test Cable	N/A	RF-03	N/A	N/A	Nov. 02, 2023	Nov. 01, 2024
17	ESG Signal Generator	Agilent	E4421B	N/A	B.03.84	Nov. 02, 2023	Nov. 01, 2024
18	Signal Generator	Agilent	N5182A	N/A	A.01.87	Nov. 02, 2023	Nov. 01, 2024
19	Magnetic Field	Narda	ELT-400	0-0344	N/A	Nov. 16, 2023	Nov. 15, 2024



	Probe Tester						2024
20	Wideband Radio Communication Test	R&S	CMW500	106504	V 3.7.22	Nov. 02, 2023	Nov. 01, 2024
21	MWRF Power Meter Test system	MW	MW100-RFCB	N/A	N/A	Nov. 02, 2023	Nov. 01, 2024
22	D.C. Power Supply	LongWei	TPR-6405D	N/A	N/A	\	\
23	EMC Software	Frad	EZ-EMC	Ver.EMC-CON 3A1.1	N/A	\	\
24	RF Software	MW	MTS8310	V2.0.0.0	N/A	\	\
25	Turntable	MF	MF-7802BS	N/A	N/A	\	\
26	Antenna tower	MF	MF-7802BS	N/A	N/A	\	\


Conduction Test equipment

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Firmware Version	Last calibration	Calibrated until
1	LISN	R&S	ENV216	101471	N/A	Nov. 14, 2023	Nov. 13, 2024
2	LISN	CYBERTEK	EM5040A	E1850400149	N/A	Nov. 02, 2023	Nov. 01, 2024
3	Test Cable	N/A	C-01	N/A	N/A	Nov. 02, 2023	Nov. 01, 2024
4	Test Cable	N/A	C-02	N/A	N/A	Nov. 02, 2023	Nov. 01, 2024
5	Test Cable	N/A	C-03	N/A	N/A	Nov. 02, 2023	Nov. 01, 2024
6	EMI Test Receiver	R&S	ESCI3	101393	4.42 SP3	Nov. 02, 2023	Nov. 01, 2024
7	Triple-Loop Antenna	N/A	RF300	N/A	N/A	Nov. 02, 2023	Nov. 01, 2024
8	Absorbing Clamp	DZ	ZN23201	15034	N/A	Nov. 07, 2023	Nov. 06, 2024
9	EMC Software	Frad	EZ-EMC	Ver.EMC-CON 3A1.1	N/A	\	\



4. EMC EMISSION TEST


4.1 Conducted Emissions

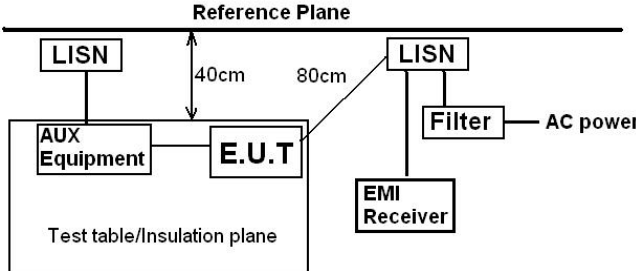Test Requirement:	FCC Part15 C Section 15.207					
Test Method:	ANSI C63.10:2013					
Test Frequency Range:	150KHz to 30MHz					
Class / Severity:	Class B					
Receiver setup:	RBW=9KHz, VBW=30KHz, Sweep time=auto					
Limit:	Frequency range (MHz)		Limit (dBuV)			
			Quasi-peak		Average	
	0.15-0.5		66 to 56*		56 to 46*	
	0.5-5		56		46	
	5-30		60		50	
* Decreases with the logarithm of the frequency.						
Test setup:	Reference Plane  Remark: E.U.T: Equipment Under Test LISN: Line Impedance Stabilization Network Test table height=0.8m					
Test procedure:	1. The E.U.T and simulators are connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm/50uH coupling impedance for the measuring equipment. 2. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination. (Please refer to the block diagram of the test setup and photographs). 3. Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10:2013 on conducted measurement.					
Test Instruments:	Refer to section 6.0 for details					
Test mode:	Refer to section 5.2 for details					
Test environment:	Temp.:	25 °C	Humid.:	52%	Press.:	1012mbar
Test voltage:	AC 120V/60Hz					
Test results:	PASS					



Temperature:	26 °C	Relative Humidity:	55%
Pressure:	1009hPa	Phase :	Neutral
Test Voltage :	AC 230V/50Hz	Test Mode:	Mode 1


Pre-scan all test modes, found worst case at lowest channel of 125KHz bandwidth, so only show the worst case on the report.

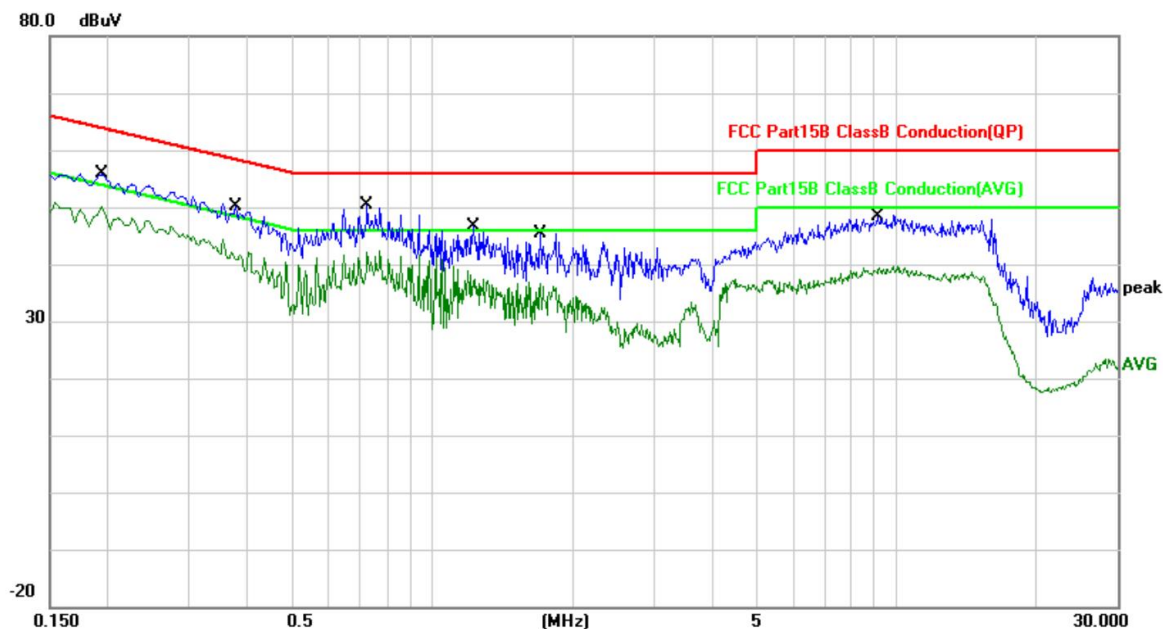

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB	dBuV	dBuV	dB	Detector
1		0.1940	34.05	19.88	53.93	63.86	-9.93	QP
2	*	0.1940	29.45	19.88	49.33	53.86	-4.53	AVG
3		0.3780	24.52	19.88	44.40	58.32	-13.92	QP
4		0.3780	20.46	19.88	40.34	48.32	-7.98	AVG
5		0.7260	27.12	19.88	47.00	56.00	-9.00	QP
6		0.7260	20.40	19.88	40.28	46.00	-5.72	AVG
7		1.2260	24.72	19.89	44.61	56.00	-11.39	QP
8		1.2260	20.88	19.89	40.77	46.00	-5.23	AVG
9		1.7100	17.12	19.90	37.02	56.00	-18.98	QP
10		1.7100	11.66	19.90	31.56	46.00	-14.44	AVG
11		9.0963	28.37	19.95	48.32	60.00	-11.68	QP
12		9.0963	19.44	19.95	39.39	50.00	-10.61	AVG



Temperature:	26 °C	Relative Humidity:	55%
Pressure:	1009hPa	Phase :	Neutral
Test Voltage :	AC 230V/50Hz	Test Mode:	Mode 1

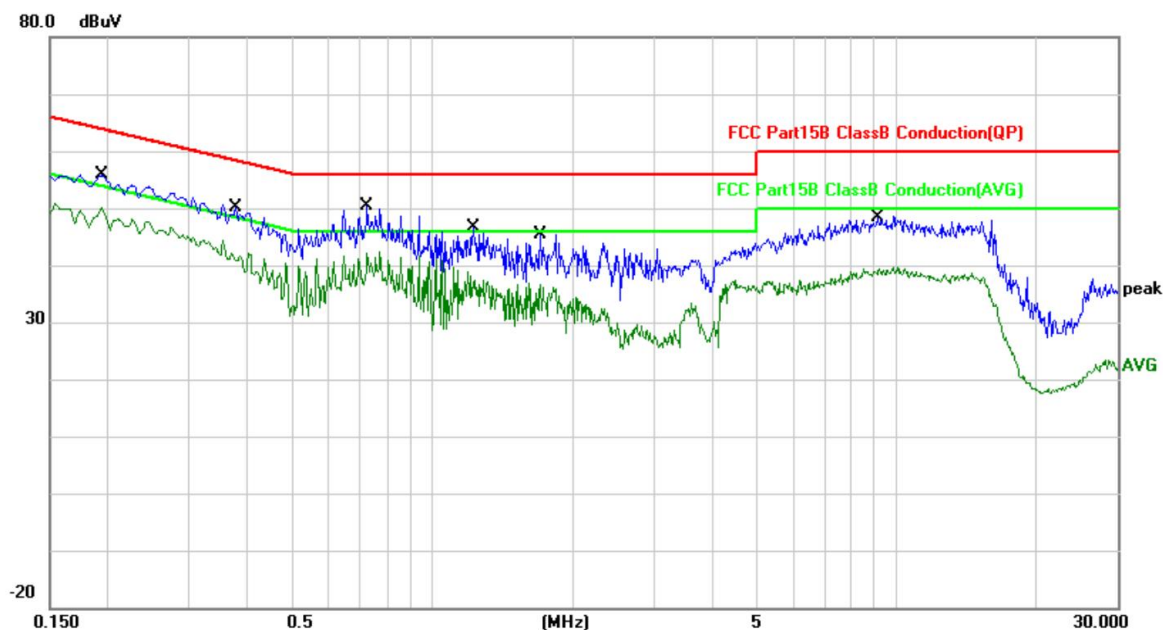

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB	dBuV	dBuV	dB	Detector
1		0.1940	34.05	19.88	53.93	63.86	-9.93	QP
2 *		0.1940	29.45	19.88	49.33	53.86	-4.53	AVG
3		0.3780	24.52	19.88	44.40	58.32	-13.92	QP
4		0.3780	20.46	19.88	40.34	48.32	-7.98	AVG
5		0.7260	27.12	19.88	47.00	56.00	-9.00	QP
6		0.7260	20.40	19.88	40.28	46.00	-5.72	AVG
7		1.2260	24.72	19.89	44.61	56.00	-11.39	QP
8		1.2260	20.88	19.89	40.77	46.00	-5.23	AVG
9		1.7100	17.12	19.90	37.02	56.00	-18.98	QP
10		1.7100	11.66	19.90	31.56	46.00	-14.44	AVG
11		9.0963	28.37	19.95	48.32	60.00	-11.68	QP
12		9.0963	19.44	19.95	39.39	50.00	-10.61	AVG


Notes:

- 1 An initial pre-scan was performed on the live and neutral lines with peak detector.
- 2 Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.

Final Level =Receiver Read level + LISN Factor + Cable Loss



4.2 Conducted Peak Output Power

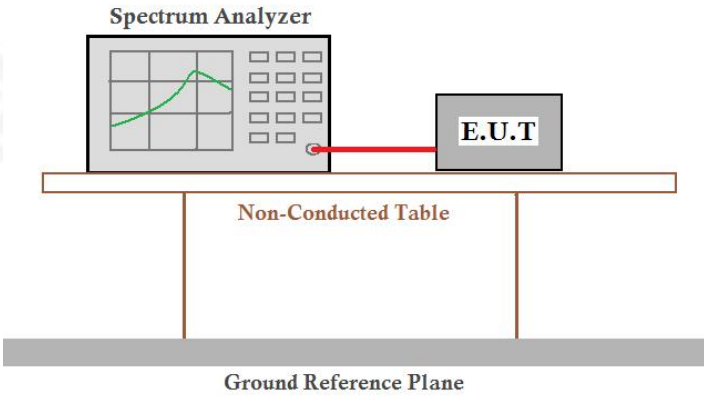Test Requirement:	FCC Part15 C Section 15.247 (b)(3)
Test Method:	ANSI C63.10:2013
Limit:	30dBm
Test setup:	
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.2 for details
Test results:	Pass

Measurement Data

Mode	Test channel	Peak Output Power (dBm)	Limit (dBm)	Result
125KHz Bandwidth	Lowest	11.805	30.00	Pass
	Middle	11.443		
	Highest	11.168		




Test plot as follows:


Test mode:	125KHz Bandwidth
------------	------------------



Lowest channel

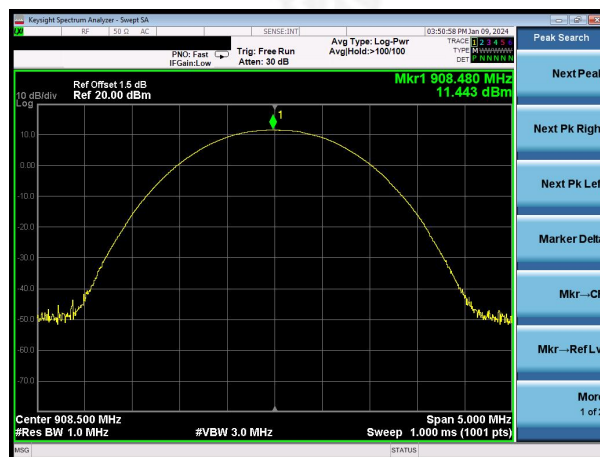


Middle channel

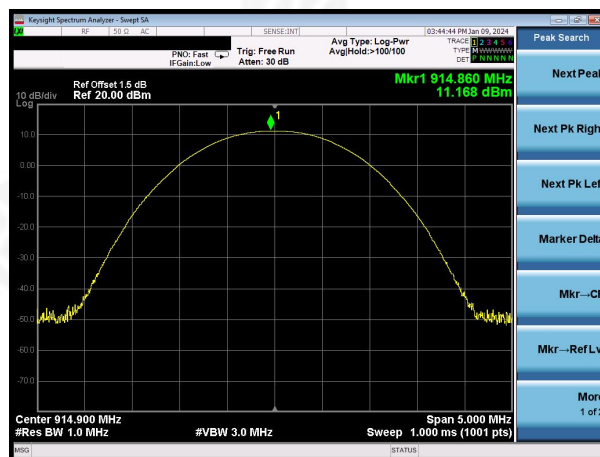

Highest channel



4.3 20dB Bandwidth & -6dB Bandwidth

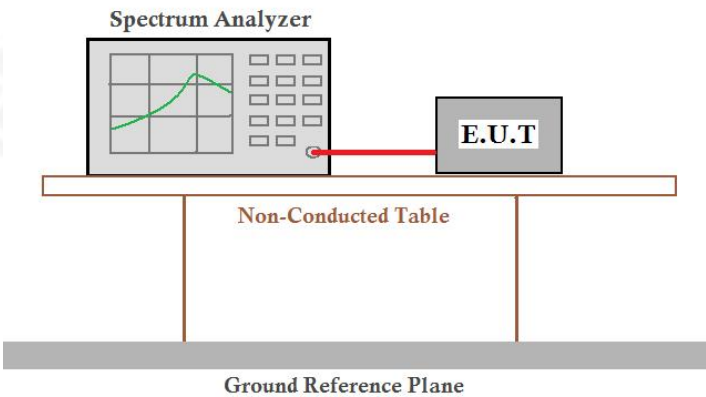Test Requirement:	FCC Part15 C Section 15.247 (a)(2)
Test Method:	ANSI C63.10:2020
Limit:	>500KHz
Test setup:	
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.2 for details
Test results:	Pass

Measurement Data


Mode	Test channel	20dB Bandwidth (KHz)	Result
125KHz Bandwidth	Lowest	156.0	Pass
	Middle	140.8	
	Highest	139.3	




Test plot as follows:

Test mode:


125KHz Bandwidth

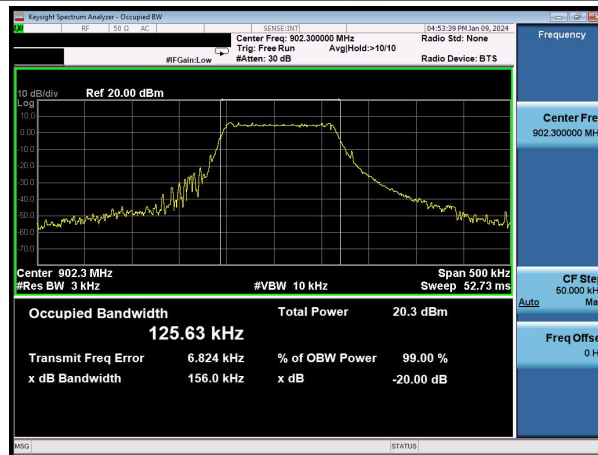

Lowest channel

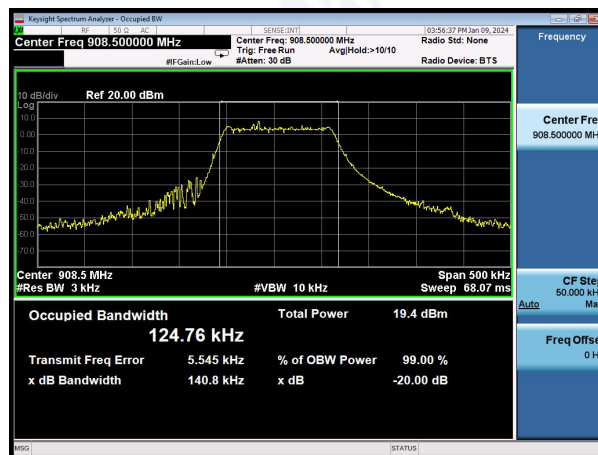


Middle channel

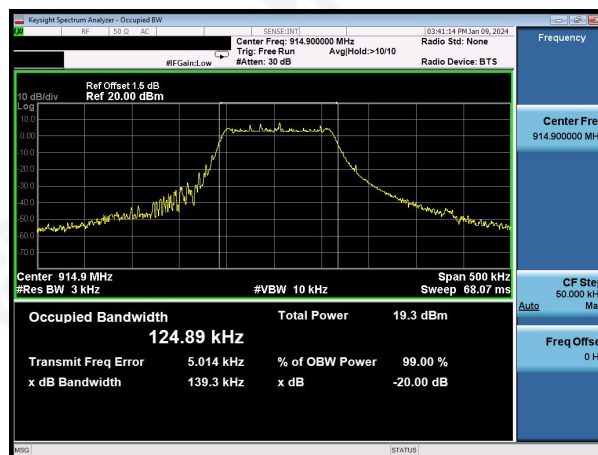

Highest channel



4.4 Carrier Frequencies Separation

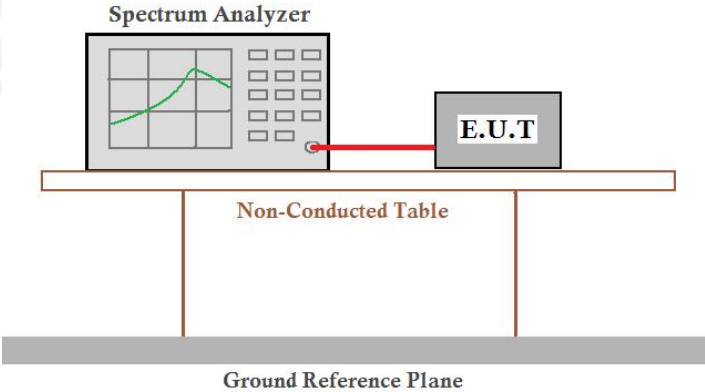Test Requirement:	FCC Part15 C Section 15.247 (a)(1)
Test Method:	ANSI C63.10:2013
Receiver setup:	RBW=100KHz, VBW=300KHz, detector=Peak
Limit:	Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel
Test setup:	
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.2 for details
Test results:	Pass

Measurement Data

Mode	Test channel	Carrier Frequencies Separation (kHz)	Limit (kHz)	Result
125KHz Bandwidth	Lowest	200	2/3 occupied Bandwidth	Pass
	Middle	200		Pass
	Highest	200		Pass



Modulation mode:


125KHz Bandwidth



Lowest channel




Middle channel

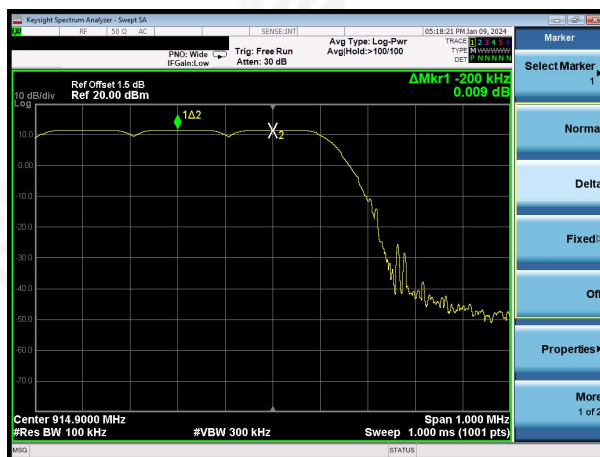

Highest channel




4.5 Hopping Channel Number

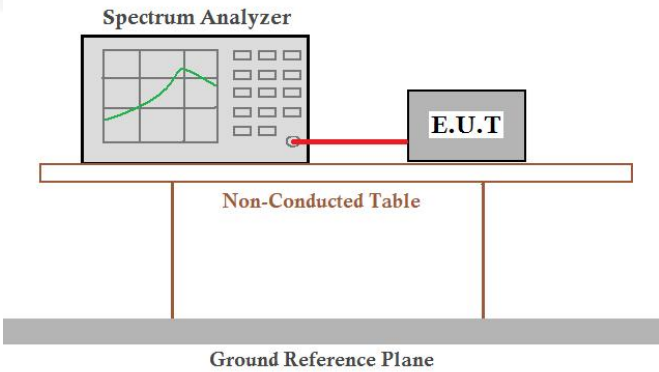Test Requirement:	FCC Part15 C Section 15.247 (a)(1)
Test Method:	ANSI C63.10:2013
Receiver setup:	RBW=100kHz, VBW=300kHz, Frequency range=902-916MHz, Detector=Peak
Limit:	If the 20 dB bandwidth of the hopping channel is less than 250 kHz, the system shall use at least 50 hopping frequencies. If the 20 dB bandwidth of the hopping channel is 250 kHz or greater, the system shall use at least 25 hopping frequencies
Test setup:	
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.2 for details
Test results:	Pass


Measurement Data:

Mode	Hopping channel numbers	Limit	Result
125KHz Bandwidth	64	50	Pass

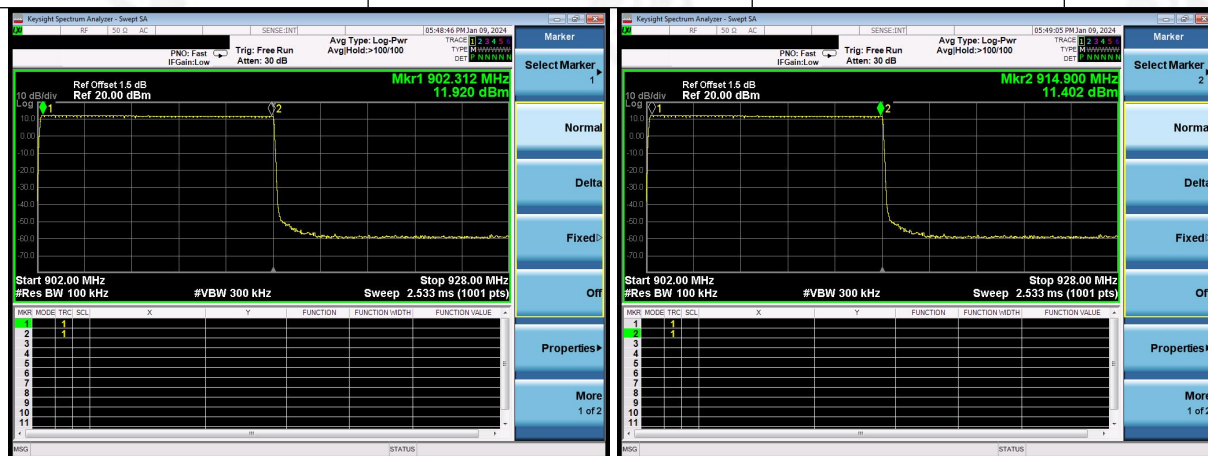



4.6 Dwell Time

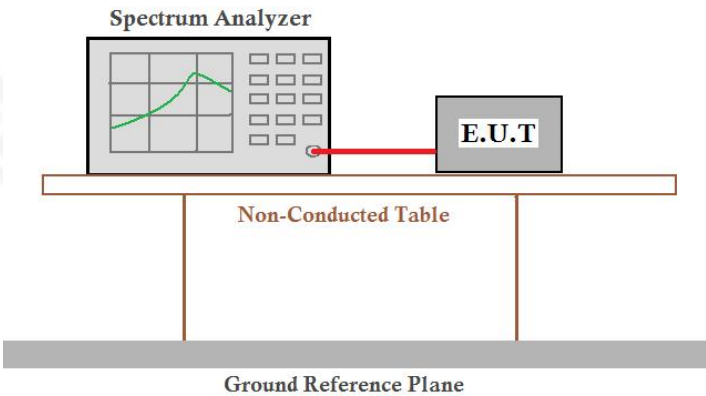Test Requirement:	FCC Part15 C Section 15.247 (a)(1)
Test Method:	ANSI C63.10:2013
Receiver setup:	RBW=10kHz, VBW=30KHz, Span=0Hz, Detector=Peak
Limit:	0.4 Second
Test setup:	
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.2 for details
Test results:	Pass



Measurement Data

Mode	Ton(ms)	Tcycle(ms)	Dwell time(ms)	Limit(ms)	Result
125KHz Bandwidth	8.4	37.36	88.36	400	Pass


Note: Transmit numbers= Continue TX Time/Tcycle
Dwell time=Transmit numbers*Ton




Test plot as follows:

Test Mode:

125KHz Bandwidth

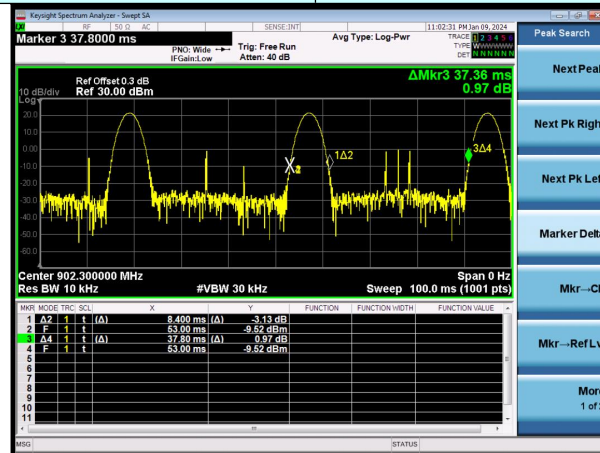


Ton&Tcycle

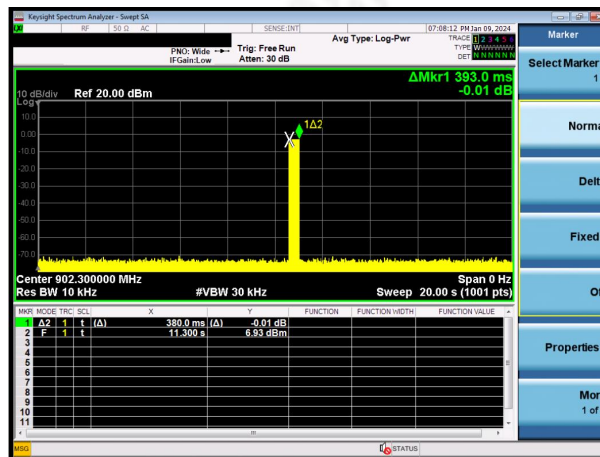

Continue TX Time



4.7 Band Edge

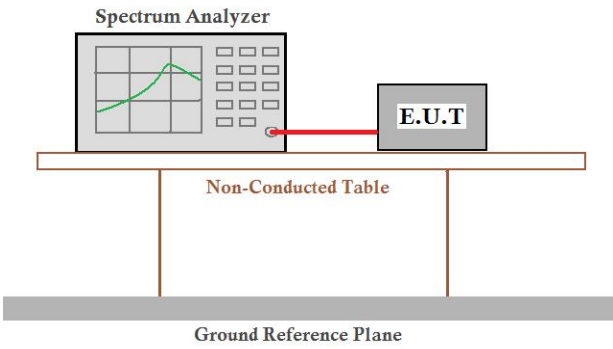
Test Requirement:	FCC Part15 C Section 15.247 (d)
Test Method:	ANSI C63.10:2013
Receiver setup:	RBW=100kHz, VBW=300kHz, Detector=Peak
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.
Test setup:	 The diagram illustrates the test setup for Band Edge testing. A Spectrum Analyzer is connected via a red cable to an E.U.T (Equipment Under Test). Both are placed on a Non-Conducted Table, which is supported by a Ground Reference Plane.
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.2 for details
Test results:	Pass




Test plot as follows:
125KHz Bandwidth:

Test channel:

Lowest channel

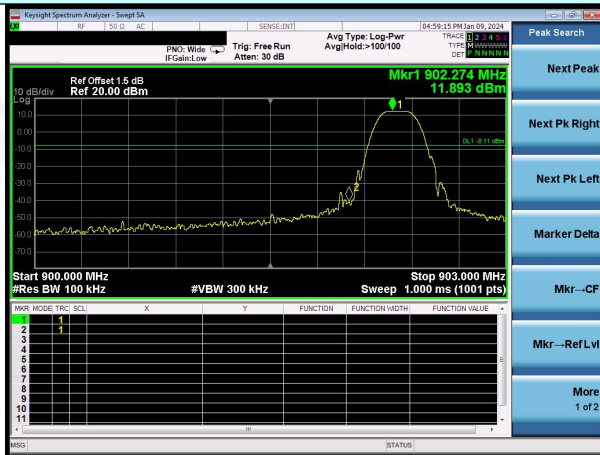


No-hopping mode

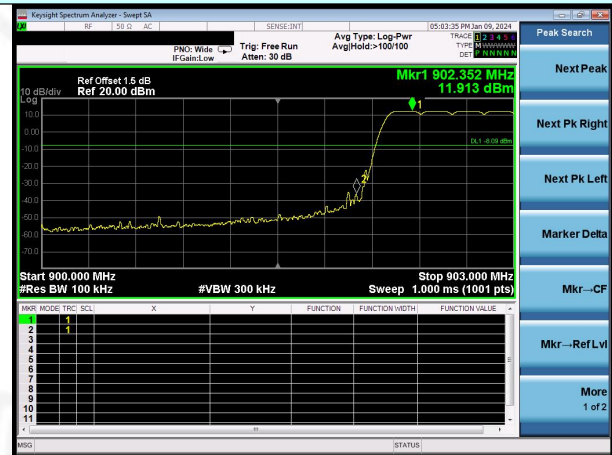


Hopping mode

Test channel:

Highest channel

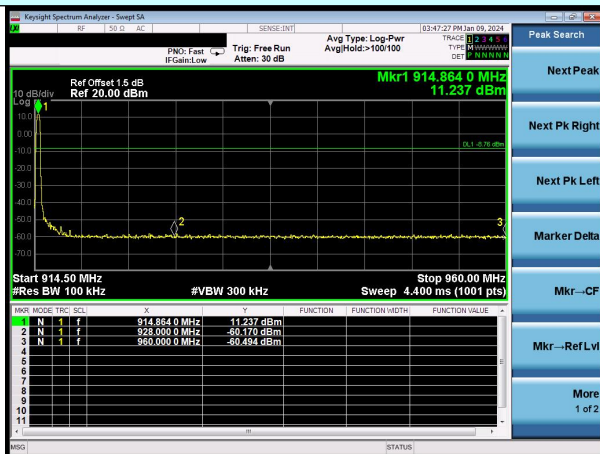


No-hopping mode

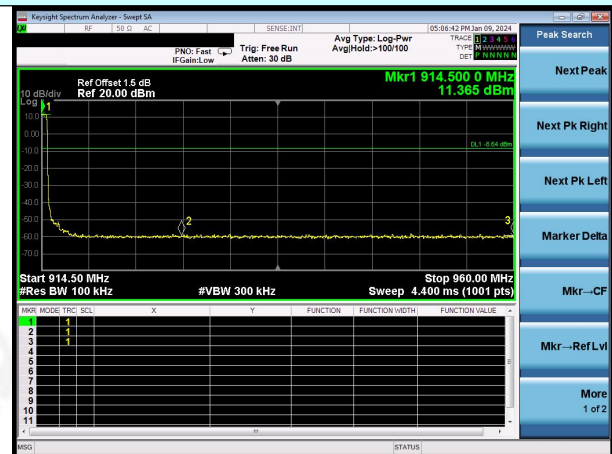

Hopping mode



4.8 Power Spectral Density

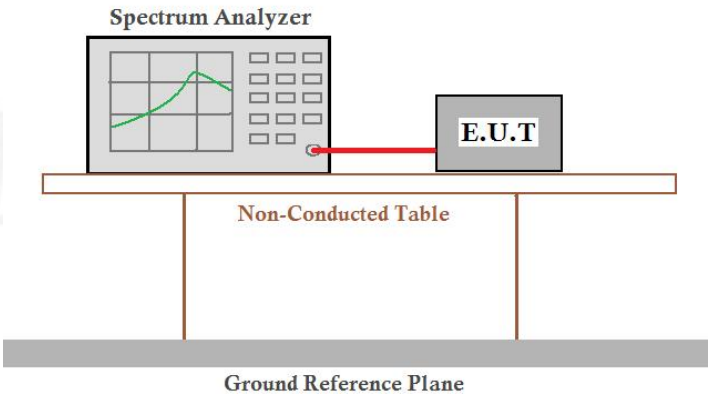
Test Requirement:	FCC Part15 C Section 15.247 (e)
Test Method:	ANSI C63.10:2013 and KDB558074 D01 DTS Meas Guidance v05r02
Limit:	8dBm/3kHz
Test setup:	
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.2 for details
Test results:	Pass

Measurement Data


Test channel	Power Spectral Density (dBm/3kHz)	Limit(dBm/3kHz)	Result
Lowest	0.669	8.00	Pass
Middle	0.954		
Highest	-1.545		




Test plot as follows:

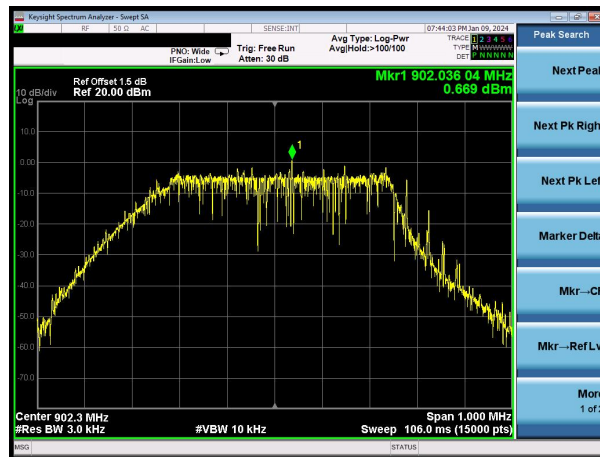

Lowest channel

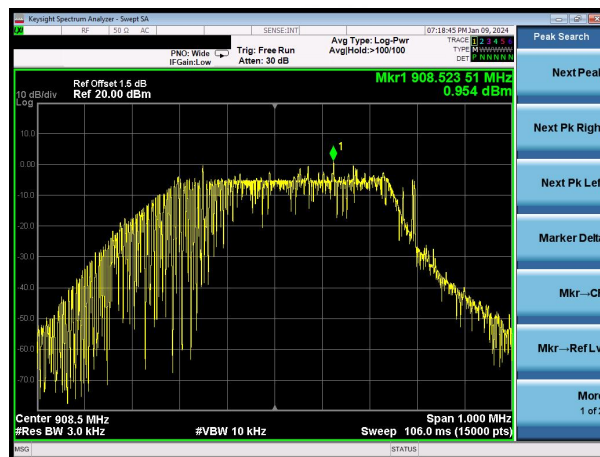

Medlle channel

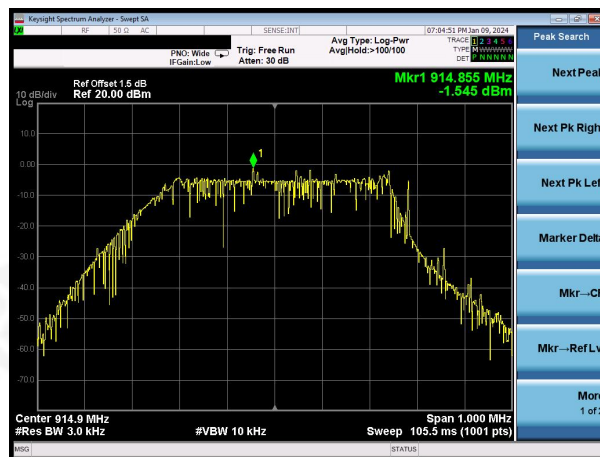


Highest channel



4.9 Spurious Emission


Conducted Emission Method

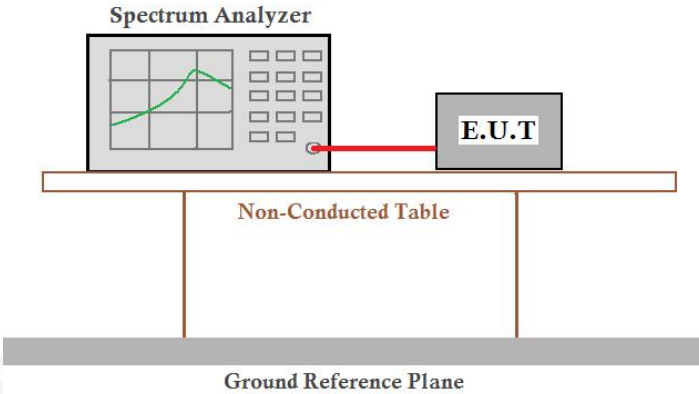Test Requirement:	FCC Part15 C Section 15.247 (d)
Test Method:	ANSI C63.10:2013
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.
Test setup:	 The diagram illustrates the test setup for conducted emission measurement. A Spectrum Analyzer is connected via a red cable to an E.U.T. (Equipment Under Test). Both are placed on a Non-Conducted Table, which is supported by a Ground Reference Plane.
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.2 for details
Test results:	Pass




125KHz Bandwidth:

Test channel:	Lowest channel
---------------	----------------

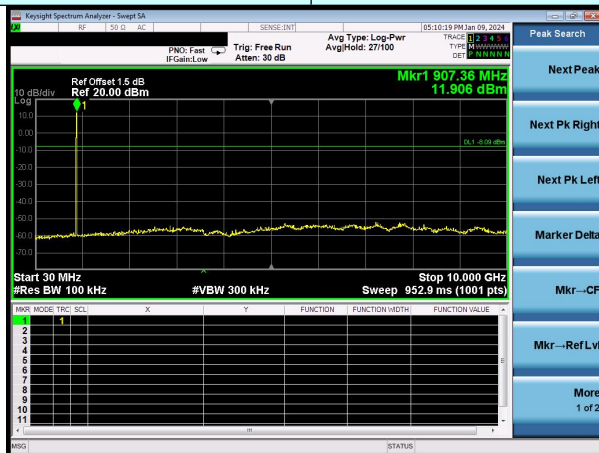


30MHz~10GHz

Test channel:	Middle channel
---------------	----------------

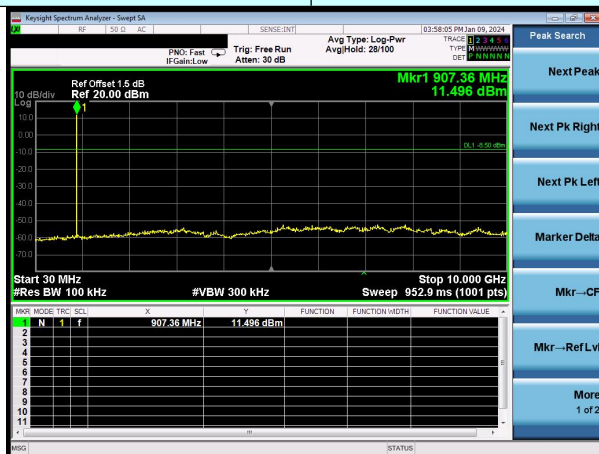

30MHz~10GHz

Test channel:	Highest channel
---------------	-----------------

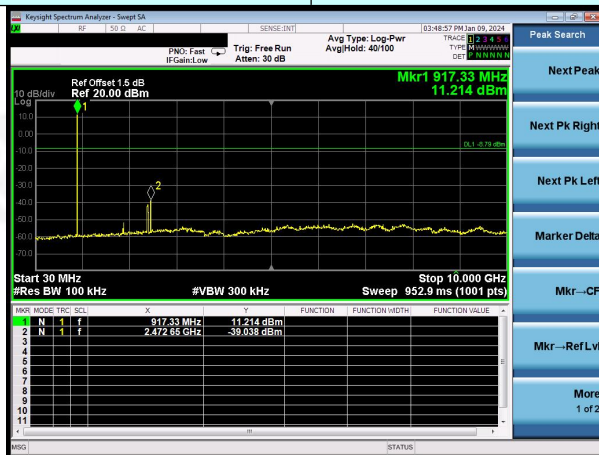


30MHz~10GHz




500KHz Bandwidth:

Test channel:	Lowest channel
---------------	----------------

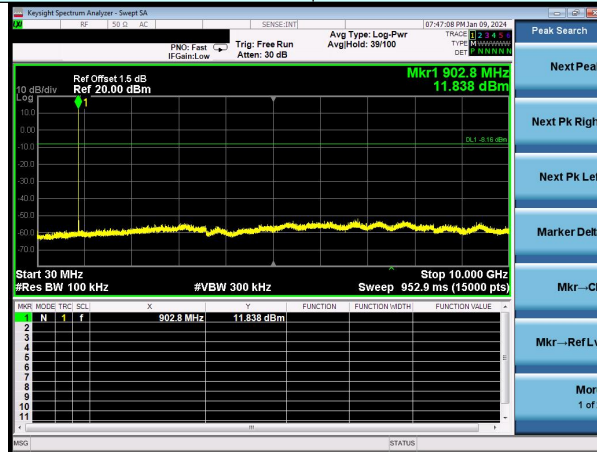


30MHz~10GHz

Test channel:	Middle channel
---------------	----------------

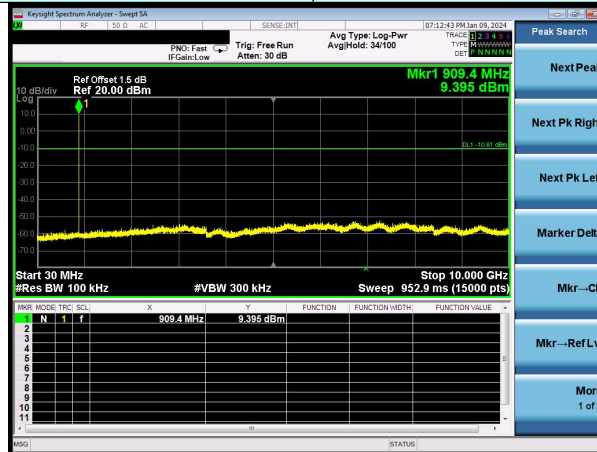

30MHz~10GHz


Test channel:	Highest channel
---------------	-----------------

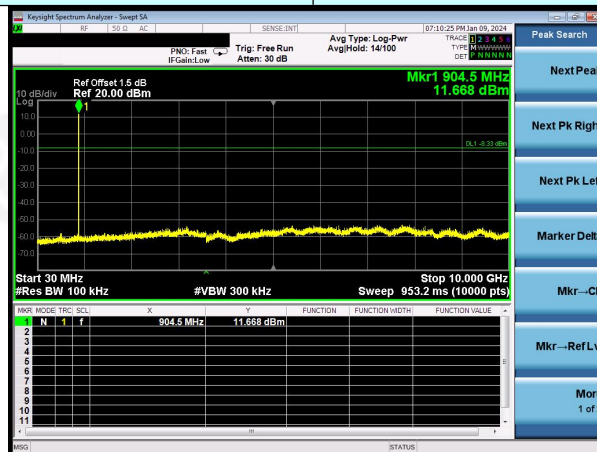

30MHz~10GHz




Radiated Emission Method

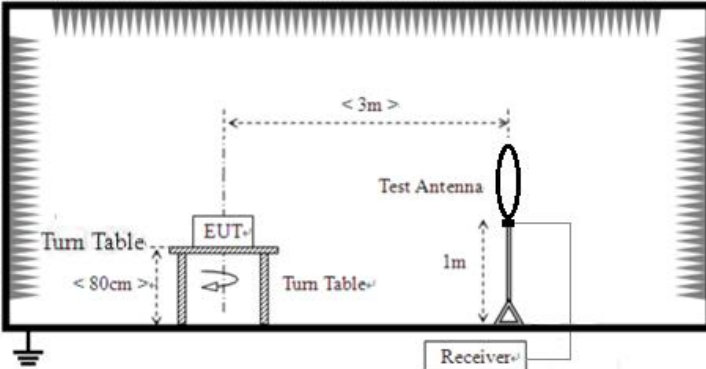
Test Requirement:	FCC Part15 C Section 15.209				
Test Method:	ANSI C63.10:2013				
Test Frequency Range:	9kHz to 25GHz				
Test site:	Measurement Distance: 3m				
Receiver setup:	Frequency	Detector	RBW	VBW	Value
	9KHz-150KHz	Quasi-peak	200Hz	600Hz	Quasi-peak
	150KHz-30MHz	Quasi-peak	9KHz	30KHz	Quasi-peak
	30MHz-1GHz	Quasi-peak	120KHz	300KHz	Quasi-peak
	Above 1GHz	Peak	1MHz	3MHz	Peak
		Peak	1MHz	10Hz	Average
Limit:	Frequency	Limit (uV/m)		Value	Measurement Distance
	0.009MHz-0.490MHz	2400/F(KHz)		QP	300m
	0.490MHz-1.705MHz	24000/F(KHz)		QP	30m
	1.705MHz-30MHz	30		QP	30m
	30MHz-88MHz	100		QP	3m
	88MHz-216MHz	150		QP	
	216MHz-960MHz	200		QP	
	960MHz-1GHz	500		QP	
	Above 1GHz	500		Average	
		5000		Peak	
Test setup:	For radiated emissions from 9kHz to 30MHz				
					



For radiated emissions from 30MHz to 1GHz

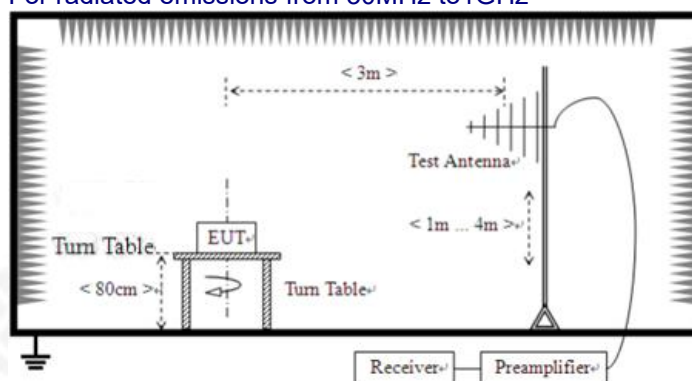

For radiated emissions above 1GHz

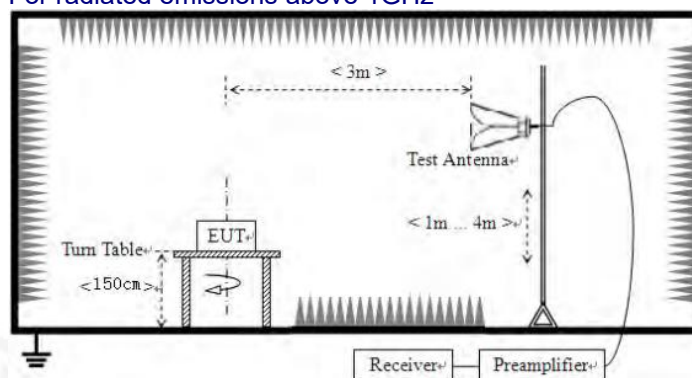

Test Procedure:

1. The EUT was placed on the top of a rotating table (0.8m for below 1G and 1.5m for above 1G) above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation.
2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
3. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading.
5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
6. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

Test Instruments:

Refer to section 6.0 for details

Test mode:

Refer to section 5.2 for details

Test environment:

Temp.:	25 °C	Humid.:	52%	Press.:	1012mbar
--------	-------	---------	-----	---------	----------

Test voltage:

DC 3V

Test results:

Pass



Measurement data:

Remarks:

1. Pre-scan all kind of the place mode (X-axis, Y-axis, Z-axis), and found the Y-axis which it is worse case.

■ **9kHz~30MHz**

The low frequency, which started from 9 kHz to 30 MHz, was pre-scanned and the result which was 20 dB lower than the limit line per 15.31(o) was not reported.



Below 1GHz

Pre-scan all test modes, found worst case at lowest channel of 125KHz bandwidth, so only show the worst case on the report.


Horizontal:



No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB
1	*	49.7066	42.57	-9.45	33.12	40.00	-6.88
2		119.8556	43.73	-10.52	33.21	43.50	-10.29
3		179.3863	35.76	-10.53	25.23	43.50	-18.27
4		291.0360	31.25	-9.37	21.88	46.00	-24.12
5		454.3100	28.44	-4.37	24.07	46.00	-21.93
6		679.9600	29.53	-0.12	29.41	46.00	-16.59



Vertical:

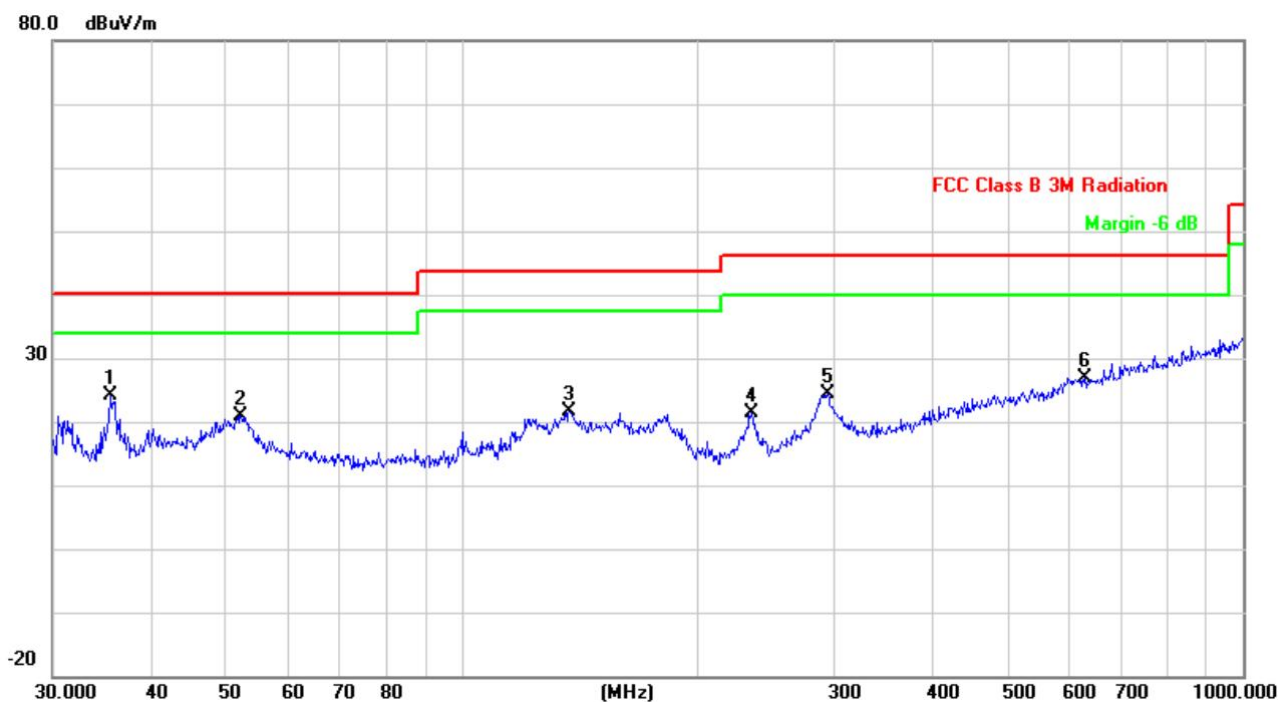

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB
1	*	35.6240	34.39	-10.28	24.11	40.00	-15.89
2		52.2078	30.11	-9.21	20.90	40.00	-19.10
3		137.4202	30.50	-8.77	21.73	43.50	-21.77
4		234.9910	32.68	-11.25	21.43	46.00	-24.57
5		294.1137	33.52	-9.23	24.29	46.00	-21.71
6		627.2737	27.73	-0.83	26.90	46.00	-19.10

Notes:

1. The EUT was test at 3m in field chamber.
2. Final Level =Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor



■ Above 1GHz

Test channel:	Lowest channel
---------------	----------------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
1804.60	42.95	25.35	4.67	34.04	38.93	74.00	-35.07	Vertical
2706.90	35.69	28.26	5.43	33.25	36.13	74.00	-37.87	Vertical
3609.20	34.37	29.18	7.11	37.34	33.32	74.00	-40.68	Vertical
4511.50	*					74.00		Vertical
5413.80	*					74.00		Vertical
6316.10	*					74.00		Vertical
1804.60	41.07	25.35	4.67	34.04	37.05	74.00	-36.95	Horizontal
2706.90	35.86	28.26	5.43	33.25	36.30	74.00	-37.70	Horizontal
3609.20	33.96	29.18	7.11	37.34	32.91	74.00	-41.09	Horizontal
4511.50	*					74.00		Horizontal
5413.80	*					74.00		Horizontal
6316.10	*					74.00		Horizontal

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
1804.60	31.92	25.35	4.67	34.04	27.90	54.00	-26.10	Vertical
2706.90	24.38	28.26	5.43	33.25	24.82	54.00	-29.18	Vertical
3609.20	25.81	29.18	7.11	37.34	24.76	54.00	-29.24	Vertical
4511.50	*					54.00		Vertical
5413.80	*					54.00		Vertical
6316.10	*					54.00		Vertical
1804.60	30.33	25.35	4.67	34.04	26.31	54.00	-27.69	Horizontal
2706.90	24.98	28.26	5.43	33.25	25.42	54.00	-28.58	Horizontal
3609.20	23.45	29.18	7.11	37.34	22.40	54.00	-31.60	Horizontal
4511.50	*					54.00		Horizontal
5413.80	*					54.00		Horizontal
6316.10	*					54.00		Horizontal



Test channel:

Middle channel

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
1830.20	41.32	25.43	4.89	34.12	37.52	74.00	-36.48	Vertical
2745.30	38.32	28.34	5.68	33.57	38.77	74.00	-35.23	Vertical
3660.40	35.57	29.42	7.29	37.66	34.62	74.00	-39.38	Vertical
4575.50	*					74.00		Vertical
5490.60	*					74.00		Vertical
6405.70	*					74.00		Vertical
1830.20	41.56	25.43	4.89	34.12	37.76	74.00	-36.24	Horizontal
2745.30	34.79	28.34	5.68	33.57	35.24	74.00	-38.76	Horizontal
3660.40	34.31	29.42	7.29	37.66	33.36	74.00	-40.64	Horizontal
4575.50	*					74.00		Horizontal
5490.60	*					74.00		Horizontal
6405.70	*					74.00		Horizontal

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
1830.20	32.27	25.43	4.89	34.12	28.47	54.00	-25.53	Vertical
2745.30	24.43	28.34	5.68	33.57	24.88	54.00	-29.12	Vertical
3660.40	25.09	29.42	7.29	37.66	24.14	54.00	-29.86	Vertical
4575.50	*					54.00		Vertical
5490.60	*					54.00		Vertical
6405.70	*					54.00		Vertical
1830.20	31.67	25.43	4.89	34.12	27.87	54.00	-26.13	Horizontal
2745.30	24.63	28.34	5.68	33.57	25.08	54.00	-28.92	Horizontal
3660.40	24.37	29.42	7.29	37.66	23.42	54.00	-30.58	Horizontal
4575.50	*					54.00		Horizontal
5490.60	*					54.00		Horizontal
6405.70	*					54.00		Horizontal



Test channel:	Highest channel
---------------	-----------------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
1855.40	47.11	25.64	4.75	34.67	42.83	74.00	-31.17	Vertical
2783.10	36.98	28.46	5.87	33.83	37.48	74.00	-36.52	Vertical
3710.80	39.54	29.75	7.59	37.76	39.12	74.00	-34.88	Vertical
4638.50	*					74.00		Vertical
5566.20	*					74.00		Vertical
6493.90	*					74.00		Vertical
1855.40	46.46	25.64	4.75	34.67	42.18	74.00	-31.82	Horizontal
2783.10	36.09	28.46	5.87	33.83	36.59	74.00	-37.41	Horizontal
3710.80	35.17	29.75	7.59	37.76	34.75	74.00	-39.25	Horizontal
4638.50	*					74.00		Horizontal
5566.20	*					74.00		Horizontal
6493.90	*					74.00		Horizontal

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
1855.40	37.67	25.64	4.75	34.67	33.39	54.00	-20.61	Vertical
2783.10	27.16	28.46	5.87	33.83	27.66	54.00	-26.34	Vertical
3710.80	27.73	29.75	7.59	37.76	27.31	54.00	-26.69	Vertical
4638.50	*					54.00		Vertical
5566.20	*					54.00		Vertical
6493.90	*					54.00		Vertical
1855.40	36.75	25.64	4.75	34.67	32.47	54.00	-21.53	Horizontal
2783.10	25.72	28.46	5.87	33.83	26.22	54.00	-27.78	Horizontal
3710.80	23.96	29.75	7.59	37.76	23.54	54.00	-30.46	Horizontal
4638.50	*					54.00		Horizontal
5566.20	*					54.00		Horizontal
6493.90	*					54.00		Horizontal

Remarks:

1. *Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor*
2. *"**", means this data is the too weak instrument of signal is unable to test.*
3. *The emission levels of other frequencies are very lower than the limit and not show in test report.*
4. *The test data shows only the worst case 125KHz bandwidth mode.*



5. Antenna Requirement

Standard requirement:	FCC Part15 C Section 15.203 /247(c)
15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. 15.247(c) (1)(i) requirement: (i) Systems operating in the 2400-2483.5 MHz band that is used exclusively for fixed. Point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6dBi.	
EUT Antenna:	
The antenna is PFC antenna, the best case gain of the antennas is 0 dBi, reference to the appendix II for details	



6. Test Setup Photo

Reference to the appendix I for details.

7. EUT Constructional Details

Reference to the appendix II for details.

***** END OF REPORT *****