



TEST REPORT

No. I19Z61729-WMD03

for

LG Electronics USA, Inc.

Multi-band GSM/WCDMA/LTE phone with Bluetooth, WLAN

Model Name: LM-X120HN, LMX120HN, X120HN

FCC ID: ZNFX120HM

Issued Date: 2019-09-27



Note:

The test results in this test report relate only to the devices specified in this report. This report shall not be reproduced except in full without the written approval of CTTL.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the U.S. Government.

Test Laboratory:

CTTL, Telecommunication Technology Labs, CAICT

No. 52, Huayuan North Road, Haidian District, Beijing, P. R. China 100191.

Tel: +86(0)10-62304633-2512, Fax: +86(0)10-62304633-2504

Email: cttl_terminals@caict.ac.cn, website: www.caict.ac.cn

REPORT HISTORY

Report Number	Revision	Description	Issue Date
I19Z61729-WMD03	Rev.0	1 st edition	2019-09-27

CONTENTS

1. TEST LABORATORY.....	4
1.1. INTRODUCTION & ACCREDITATION	4
1.2. TESTING LOCATION	4
1.3. TESTING ENVIRONMENT	4
1.4. PROJECT DATA.....	4
1.5. SIGNATURE	5
2. CLIENT INFORMATION.....	6
2.1. APPLICANT INFORMATION.....	6
2.2. MANUFACTURER INFORMATION.....	6
3. EQUIPMENT UNDER TEST (EUT) AND ANCILLARY EQUIPMENT (AE)	7
3.1. ABOUT EUT	7
3.2. INTERNAL IDENTIFICATION OF EUT USED DURING THE TEST	7
3.3. INTERNAL IDENTIFICATION OF AE USED DURING THE TEST.....	7
3.4. GENERAL DESCRIPTION	7
4. REFERENCE DOCUMENTS	8
4.1. REFERENCE DOCUMENTS FOR TESTING.....	8
5. LABORATORY ENVIRONMENT	9
6. SUMMARY OF TEST RESULT	10
6.1. SUMMARY OF TEST RESULTS	10
6.2. EXPLANATION OF RE-USE OF TEST DATA.....	12
6.3. STATEMENTS	12
7. TEST EQUIPMENTS UTILIZED.....	13
ANNEX A: MEASUREMENT RESULTS	14
A.1 OUTPUT POWER.....	14
A.2 EMISSION LIMIT	39
A.3 FREQUENCY STABILITY	48
A.4 OCCUPIED BANDWIDTH	52
A.5 EMISSION BANDWIDTH.....	79
A.6 BAND EDGE COMPLIANCE	106
A.7 CONDUCTED SPURIOUS EMISSION	128
A.8 PEAK-TO-AVERAGE POWER RATIO	133
ANNEX B: ACCREDITATION CERTIFICATE	135

1. Test Laboratory

1.1. Introduction & Accreditation

Telecommunication Technology Labs, CAICT is an ISO/IEC 17025:2005 accredited test laboratory under NATIONAL VOLUNTARY LABORATORY ACCREDITATION PROGRAM (NVLAP) with lab code 600118-0, and is also an FCC accredited test laboratory (CN5017), and ISED accredited test laboratory (CN0066). The detail accreditation scope can be found on NVLAP website.

1.2. Testing Location

Location 1: CTTL(huayuan North Road)

Address: No. 52, Huayuan North Road, Haidian District, Beijing,
P. R. China 100191

Location 2: CTTL(Shouxiang)

Address: No. 51 Shouxiang Science Building, Xueyuan Road,
Haidian District, Beijing, P. R. China 100191

1.3. Testing Environment

Normal Temperature: 15-35°C
Relative Humidity: 20-75%

1.4. Project data

Testing Start Date: 2019-04-23
Testing End Date: 2019-09-27

1.5. Signature



Dong Yuan
(Prepared this test report)



Zhou Yu
(Reviewed this test report)



Zhao Hui Lin
Deputy Director of the laboratory
(Approved this test report)



2. Client Information

2.1. Applicant Information

Company Name: LG Electronics USA, Inc.
Address /Post: 1000 Sylvan Avenue, Englewood Cliffs NJ 07632

2.2. Manufacturer Information

Company Name: Jiaxing Youngrui Electron Technology Co., Ltd
Address /Post: NO.777 Yazhong Road, Daqiao Town, Nanhu District, Jiaxing City, Zhejiang

3. Equipment Under Test (EUT) and Ancillary Equipment (AE)

3.1. About EUT

Description	Multi-band GSM/WCDMA/LTE phone with Bluetooth, WLAN
Model Name	LM-X120HN, LMX120HN, X120HN
FCC ID	ZNFX120HM
Antenna	Embedded
Output power	25.54dBm maximum EIRP measured for LTE Band 2
Extreme vol. Limits	3.4VDC to 4.4VDC (nominal: 3.85VDC)
Extremetemp. Tolerance	-10°C to +55°C

Note: Components list, please refer to documents of the manufacturer; it is also included in the original test record of CTTL.

3.2. Internal Identification of EUT used during the test

EUT ID*	IMEI	Date of receipt
---------	------	-----------------

UT03a	351686110000206	2019-09-17
-------	-----------------	------------

UT04a	351686110001246	2019-09-17
-------	-----------------	------------

*EUT ID: is used to identify the test sample in the lab internally.

3.3. Internal Identification of AE used during the test

AE ID*	Description
--------	-------------

AE1	Battery
-----	---------

AE1

Model	BL-O1
Manufacturer	Jiade Energy Technology(Zhuhai)Co.,Ltd
Capacitance	3000mAh(rated)
Nominal Voltage	3.85V

*AE ID: is used to identify the test sample in the lab internally.

3.4. General Description

The Equipment Under Test (EUT) is a model of Multi-band GSM/WCDMA/LTE phone with Bluetooth, WLAN with embedded antenna. Manual and specifications of the EUT were provided to fulfil the test.

4. Reference Documents

4.1. Reference Documents for testing

The following documents listed in this section are referred for testing.

Reference	Title	Version
FCC Part 24	PERSONAL COMMUNICATIONS SERVICES	10-1-18 Edition
FCC Part 22	PUBLIC MOBILE SERVICES	10-1-18 Edition
FCC Part 27	MISCELLANEOUS WIRELESS COMMUNICATIONS SERVICES	10-1-18 Edition
ANSI/TIA-603-E	Land Mobile FM or PM Communications Equipment Measurement and Performance Standards	2016
ANSI/TIA-102.CAAA -E	DIGITAL C4FMCQPSK TRANSCEIVER MEASUREMENT METHODS	2016
ANSI C63.26	American National Standard for Compliance Testing of Transmitters Used in Licensed Radio Services	2015
KDB 971168 D01	MEASUREMENT GUIDANCE FOR CERTIFICATION OF LICENSED DIGITAL TRANSMITTERS	v03r01

5. LABORATORY ENVIRONMENT

Control room / conducted chamber did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 35 °C
Relative humidity	Min. = 20 %, Max. = 80 %
Shielding effectiveness	> 110 dB
Electrical insulation	>2 MΩ
Ground system resistance	< 0.5 Ω

Fully-anechoic chamber 2 (8.6 meters×6.1 meters×3.85 meters) did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 30 °C
Relative humidity	Min. = 35 %, Max. = 60 %
Shielding effectiveness	> 110 dB
Electrical insulation	>2 MΩ
Ground system resistance	< 1 Ω
Site voltage standing-wave ratio (SVSWR)	Between 0 and 6 dB, from 1GHz to 18GHz
Uniformity of field strength	Between 0 and 6 dB, from 80 to 4000 MHz

Fully-anechoic chamber 3 (9 meters×6.5 meters×4 meters) did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 30 °C
Relative humidity	Min. = 35 %, Max. = 60 %
Shielding effectiveness	> 100 dB
Electrical insulation	>2 MΩ
Ground system resistance	< 0.5 Ω
Normalised site attenuation (NSA)	<±3.5 dB, 3 m distance
Site voltage standing-wave ratio (SVSWR)	Between 0 and 6 dB, from 1GHz to 18GHz
Uniformity of field strength	Between 0 and 6 dB, from 80 to 3000 MHz

6. SUMMARY OF TEST RESULT

6.1. Summary of test results

LTE Band 2

Items	Test Name	Clause in FCC rules	Verdict
1	Output Power	24.232	BR
2	Emission Limit	2.1051/24.238	BR
3	Frequency Stability	2.1055	BR
4	Occupied Bandwidth	2.1049	BR
5	Emission Bandwidth	24.238	BR
6	Band Edge Compliance	24.238	BR
7	Conducted Spurious Emission	24.238	BR
8	Peak-to-Average Power Ratio	24.232	BR

LTE Band 5

Items	Test Name	Clause in FCC rules	Verdict
1	Output Power	22.913	BR
2	Emission Limit	2.1051/22.917	BR
3	Frequency Stability	2.1055	BR
4	Occupied Bandwidth	2.1049	BR
5	Emission Bandwidth	22.917	BR
6	Band Edge Compliance	22.917	BR
7	Conducted Spurious Emission	22.917	BR

LTE Band 7

Items	Test Name	Clause in FCC rules	Verdict
1	Output Power	27.50	BR
2	Emission Limit	2.1051/27.53	BR
3	Frequency Stability	2.1055	BR
4	Occupied Bandwidth	2.1049	BR
5	Emission Bandwidth	27.53	BR
6	Band Edge Compliance	27.53	BR
7	Conducted Spurious Emission	27.53	BR
8	Peak-to-Average Power Ratio	27.50	BR

LTE Band 12

Items	Test Name	Clause in FCC rules	Verdict
1	Output Power	27.50	P
2	Emission Limit	2.1051/27.53	P
3	Frequency Stability	2.1055	P
4	Occupied Bandwidth	2.1049	P
5	Emission Bandwidth	27.53	P
6	Band Edge Compliance	27.53	P
7	Conducted Spurious Emission	27.53	P
8	Peak-to-Average Power Ratio	27.50	P

LTE Band 17

Items	Test Name	Clause in FCC rules	Verdict
1	Output Power	27.50	BR
2	Emission Limit	2.1051/27.53	BR
3	Frequency Stability	2.1055	BR
4	Occupied Bandwidth	2.1049	BR
5	Emission Bandwidth	27.53	BR
6	Band Edge Compliance	27.53	BR
7	Conducted Spurious Emission	27.53	BR
8	Peak-to-Average Power Ratio	27.50	BR

LTE Band 66

Items	Test Name	Clause in FCC rules	Verdict
1	Output Power	27.50	BR
2	Emission Limit	2.1051/27.53	BR
3	Frequency Stability	2.1055	BR
4	Occupied Bandwidth	2.1049	BR
5	Emission Bandwidth	27.53	BR
6	Band Edge Compliance	27.53	BR
7	Conducted Spurious Emission	27.53	BR
8	Peak-to-Average Power Ratio	27.50	BR

Terms used in Verdict column

P	Pass, The EUT complies with the essential requirements in the standard.
NP	Not Perform, The test was not performed by CTTL
NA	Not Applicable, The test was not applicable
BR	Re-use test data from basic model report.
F	Fail, The EUT does not comply with the essential requirements in the standard

6.2. Explanation of re-use of test data

The Equipment Under Test (EUT) model LM-X120HN, LMX120HNX120HN (FCC ID: ZNFX120HM) is a variant product of LM-X120BMW, LMX120BMW, X120BMW, LM-X120HM, LMX120HM, X120HM (FCC ID: ZNFX120HM), according to the declaration of changes provided by the applicant and FCC KDB publication 484596 D01. Only band12 has been tested it. Other test results are derived from test report No. I19Z60740-WMD03.

For detail differences between two models please refer the Declaration of Changes document.

6.3. Statements

The test cases listed in section 6.1 of this report for the EUT specified in section 3 were performed by CTTL according to the standards or reference documents in section 4.1

The EUT met all applicable requirements of the standards or reference documents in section 4.1.

This report only deals with the LTE functions among the features described in section 3.

7. Test Equipments Utilized

NO.	Description	TYPE	series number	MANUFACTURE	CAL DUE DATE	Calibration interval
1	EMI Antenna	VULB9163	9163-235	Schwarzbeck	2019-11-20	1 year
2	EMI Antenna	3117	00058889	ETS-Lindgren	2020-01-02	1 year
3	EMI Antenna	3117	00119024	ETS-Lindgren	2020-02-25	1 year
4	Universal Radio Communication Tester	CMW500	159082	R&S	2019-12-25	1 year
5	Spectrum Analyzer	FSU26	200030	R&S	2020-06-03	1 year
6	EMI Antenna	9117	177	Schwarzbeck	2019-08-22	1 year
7	EMI Antenna	9117	167	Schwarzbeck	2020-05-27	1 year
8	Signal Generator	SMF100A	101295	R&S	2019-11-27	1 year
9	Climate chamber	SH-242	93008556	ESPEC	2019-12-21	2 year
10	Test Receiver	E4440A	MY48250642	Agilent	2020-03-18	1 year
11	Test Receiver	N5183A	MY49060052	Agilent	2020-06-24	1 year
12	Universal Radio Communication Tester	CMW500	143008	R&S	2019-11-26	1 year
13	Power Amplifier	5S1G4	0341863	AR	/	

Note:

The EMI Antenna which series number is 177 was before the CAL. DUE DATE when used.

ANNEX A: MEASUREMENT RESULTS

A.1 OUTPUT POWER

A.1.1 Summary

During the process of testing, the EUT was controlled via Rhode & Schwarz Digital Radio Communication tester (CMW500) to ensure max power transmission and proper modulation. In all cases, output power is within the specified limits.

A.1.2 Conducted

A.1.2.1 Method of Measurements

The EUT was set up for the max output power with pseudo random data modulation. These measurements were done at 3 frequencies (bottom, middle and top of operational frequency range) for each bandwidth.

A.1.2.2 Measurement result

LTE band 2

Bandwidth	RB size/offset	Frequency (MHz)	Power(dBm)	
			QPSK	16QAM
1.4MHz	1 RB high	1909.3	24.02	23.19
		1880.0	24.02	23.33
		1850.7	24.07	23.26
	1 RB low	1909.3	24.02	23.22
		1880.0	24.01	23.31
		1850.7	24.09	23.31
	50% RB mid	1909.3	24.14	23.25
		1880.0	24.14	23.33
		1850.7	24.21	23.34
	100% RB	1909.3	23.10	22.21
		1880.0	23.19	22.21
		1850.7	23.18	22.28
3MHz	1 RB high	1908.5	24.10	23.25
		1880.0	24.09	23.35
		1851.5	24.12	23.35
	1 RB low	1908.5	24.05	23.23
		1880.0	24.10	23.31
		1851.5	24.15	23.31
	50% RB mid	1908.5	23.16	22.23
		1880.0	23.26	22.26
		1851.5	23.22	22.31
	100% RB	1908.5	23.12	22.18

5MHz		1880.0	23.19	22.17
		1851.5	23.14	22.23
		1907.5	23.97	23.18
	1 RB high	1880.0	23.97	23.25
		1852.5	23.98	23.27
		1907.5	23.97	23.16
	1 RB low	1880.0	23.99	23.30
		1852.5	24.03	23.24
		1907.5	23.16	22.27
	50% RB mid	1880.0	23.23	22.26
		1852.5	23.20	22.33
		1907.5	23.16	22.21
	100% RB	1880.0	23.20	22.22
		1852.5	23.19	22.29
		1905.0	24.08	23.26
10MHz	1 RB high	1880.0	24.06	23.35
		1855.0	24.09	23.37
		1905.0	24.09	23.31
	1 RB low	1880.0	24.11	23.38
		1855.0	24.15	23.37
		1905.0	23.16	22.27
	50% RB mid	1880.0	23.25	22.27
		1855.0	23.28	22.29
		1905.0	23.21	22.27
	100% RB	1880.0	23.25	22.25
		1855.0	23.33	22.29
		1902.5	24.01	23.19
15MHz	1 RB high	1880.0	24.05	23.22
		1857.5	24.04	23.32
		1902.5	24.02	23.18
	1 RB low	1880.0	24.08	23.34
		1857.5	24.13	23.34
		1902.5	23.16	22.25
	50% RB mid	1880.0	23.25	22.27
		1857.5	23.28	22.29
		1902.5	23.20	22.26
	100% RB	1880.0	23.27	22.25
		1857.5	23.30	22.31
		1900.0	23.86	23.05
20MHz	1 RB high	1900.0	23.86	23.05

		1880.0	23.85	23.01
		1860.0	23.88	23.13
	1 RB low	1900.0	23.86	23.07
		1880.0	23.92	23.18
		1860.0	23.97	23.15
	50% RB mid	1900.0	23.16	22.21
		1880.0	23.26	22.24
		1860.0	23.30	22.29
	100% RB	1900.0	23.16	22.23
		1880.0	23.25	22.26
		1860.0	23.27	22.30

LTE band 5

Bandwidth	RB size/offset	Frequency (MHz)	Power(dBm)	
			QPSK	16QAM
1.4MHz	1 RB high	848.3	24.16	23.13
		836.5	24.13	23.16
		824.7	23.99	23.27
	1 RB low	848.3	24.08	23.12
		836.5	24.12	23.14
		824.7	23.98	23.28
	50% RB mid	848.3	24.27	23.42
		836.5	24.10	23.23
		824.7	24.10	23.23
	100% RB	848.3	23.30	22.42
		836.5	23.16	22.25
		824.7	23.10	22.04
3MHz	1 RB high	847.5	24.18	23.10
		836.5	24.11	22.99
		825.5	24.05	23.34
	1 RB low	847.5	24.14	23.17
		836.5	24.06	23.00
		825.5	24.05	23.27
	50% RB mid	847.5	23.26	22.26
		836.5	23.21	22.27
		825.5	23.07	22.10
	100% RB	847.5	23.19	22.17
		836.5	23.15	22.18
		825.5	22.99	22.03
5MHz	1 RB high	846.5	24.15	23.12
		836.5	24.10	23.19
		826.5	23.95	23.39
	1 RB low	846.5	24.08	23.08
		836.5	24.07	23.12
		826.5	23.91	23.36
	50% RB mid	846.5	23.21	22.25
		836.5	23.11	22.25
		826.5	23.05	22.19
	100% RB	846.5	23.18	22.12
		836.5	23.13	22.14
		826.5	23.00	22.04
10MHz	1 RB high	844.0	24.29	23.14
		836.5	24.24	23.05

	1 RB low	829.0	24.17	23.46
		844.0	24.16	23.12
		836.5	24.11	22.99
		829.0	24.05	23.30
	50% RB mid	844.0	23.33	22.36
		836.5	23.21	22.22
		829.0	23.16	22.15
	100% RB	844.0	23.25	22.27
		836.5	23.23	22.18
		829.0	23.06	22.08

LTE band 7

Bandwidth	RB size/offset	Frequency (MHz)	Power(dBm)	
			QPSK	16QAM
5MHz	1 RB high	2567.5	22.65	21.69
		2535	22.67	21.61
		2502.5	22.35	21.78
	1 RB low	2567.5	22.65	21.72
		2535	22.61	21.66
		2502.5	22.31	21.76
	50% RB mid	2567.5	21.82	20.82
		2535	21.67	20.73
		2502.5	21.46	20.55
	100% RB	2567.5	21.77	20.63
		2535	21.65	20.61
		2502.5	21.35	20.42
10MHz	1 RB high	2565	22.72	21.67
		2535	22.69	21.50
		2505	22.52	21.80
	1 RB low	2565	22.69	21.72
		2535	22.59	21.47
		2505	22.43	21.68
	50% RB mid	2565	21.79	20.88
		2535	21.73	20.67
		2505	21.49	20.50
	100% RB	2565	21.81	20.79
		2535	21.71	20.67
		2505	21.51	20.47
15MHz	1 RB high	2562.5	22.70	21.77
		2535	22.56	21.47
		2507.5	22.46	21.79
	1 RB low	2562.5	22.65	21.99
		2535	22.55	21.43
		2507.5	22.42	21.67
	50% RB mid	2562.5	21.82	20.80
		2535	21.79	20.70
		2507.5	21.51	20.52
	100% RB	2562.5	21.84	20.79
		2535	21.76	20.66
		2507.5	21.56	20.50
20MHz	1 RB high	2560	22.45	21.90

		2535	22.45	21.77
		2510	22.27	21.79
	1 RB low	2560	22.45	21.91
		2535	22.33	21.73
		2510	22.16	21.61
	50% RB mid	2560	21.76	20.80
		2535	21.71	20.61
		2510	21.53	20.50
	100% RB	2560	21.79	20.75
		2535	21.67	20.65
		2510	21.49	20.50

LTE band 12

Bandwidth	RB size/offset	Frequency (MHz)	Power(dBm)	
			QPSK	16QAM
1.4MHz	1 RB high	715.3	23.57	22.51
		707.5	23.59	22.57
		699.7	23.64	22.86
	1 RB low	715.3	23.52	22.51
		707.5	23.62	22.59
		699.7	23.62	22.86
	50% RB mid	715.3	23.70	22.82
		707.5	23.69	22.67
		699.7	23.73	22.79
	100% RB	715.3	22.69	21.85
		707.5	22.63	21.80
		699.7	22.65	21.57
3MHz	1 RB high	714.5	23.63	22.51
		707.5	23.62	22.40
		700.5	23.68	22.89
	1 RB low	714.5	23.65	22.62
		707.5	23.60	22.51
		700.5	23.68	22.88
	50% RB mid	714.5	22.73	21.82
		707.5	22.70	21.81
		700.5	22.72	21.83
	100% RB	714.5	22.59	21.63
		707.5	22.65	21.72
		700.5	22.63	21.74
5MHz	1 RB high	713.5	23.61	22.55
		707.5	23.61	22.62
		701.5	23.52	22.94
	1 RB low	713.5	23.56	22.55
		707.5	23.57	22.63
		701.5	23.49	22.94
	50% RB mid	713.5	22.65	21.81
		707.5	22.62	21.81
		701.5	22.65	21.87
	100% RB	713.5	22.59	21.63
		707.5	22.58	21.69
		701.5	22.58	21.71
10MHz	1 RB high	711.0	23.63	22.44
		707.5	23.64	22.88



		704.0	23.57	22.56
	1 RB low	711.0	23.59	22.42
		707.5	23.60	22.79
		704.0	23.53	22.48
	50% RB mid	711.0	22.67	21.75
		707.5	22.65	21.75
		704.0	22.62	21.79
	100% RB	711.0	22.63	21.71
		707.5	22.63	21.69
		704.0	22.61	21.71

LTE band 17

Bandwidth	RB size/offset	Frequency (MHz)	Power(dBm)	
			QPSK	16QAM
5MHz	1 RB high	713.5	23.79	22.72
		710.0	23.88	22.88
		706.5	23.87	22.98
	1 RB low	713.5	23.81	22.83
		710.0	23.94	22.94
		706.5	23.95	22.99
	50% RB mid	713.5	22.86	21.89
		710.0	22.92	22.01
		706.5	23.00	22.12
	100% RB	713.5	22.79	21.72
		710.0	22.86	21.85
		706.5	22.98	22.02
10MHz	1 RB high	711	23.89	22.95
		710	23.84	22.75
		709	23.88	22.71
	1 RB low	711	23.95	23.22
		710	23.94	22.88
		709	23.99	22.84
	50% RB mid	711	22.95	21.95
		710	22.97	22.04
		709	22.99	21.96
	100% RB	711	22.90	21.90
		710	22.93	21.97
		709	22.97	21.97

LTE band 66

Bandwidth	RB size/offset	Frequency (MHz)	Power(dBm)	
			QPSK	16QAM
1.4MHz	1 RB high	1779.3	23.20	22.19
		1745.0	22.94	22.26
		1710.7	22.91	21.97
	1 RB low	1779.3	23.20	22.19
		1745.0	22.92	22.23
		1710.7	22.89	21.99
	50% RB mid	1779.3	23.25	22.26
		1745.0	23.06	22.17
		1710.7	23.08	22.25
	100% RB	1779.3	22.26	21.37
		1745.0	21.97	20.91
		1710.7	22.01	21.19
3MHz	1 RB high	1778.5	23.18	22.03
		1745.0	22.97	22.23
		1711.5	22.89	21.93
	1 RB low	1778.5	23.13	22.03
		1745.0	22.95	22.26
		1711.5	22.96	22.00
	50% RB mid	1778.5	22.25	21.36
		1745.0	21.95	21.09
		1711.5	22.04	21.08
	100% RB	1778.5	22.16	21.20
		1745.0	21.91	20.95
		1711.5	21.98	21.00
5MHz	1 RB high	1777.5	23.15	22.20
		1745.0	22.85	22.32
		1712.5	22.88	21.92
	1 RB low	1777.5	23.15	22.17
		1745.0	22.81	22.32
		1712.5	22.95	21.98
	50% RB mid	1777.5	22.21	21.31
		1745.0	21.98	21.14
		1712.5	22.02	21.10
	100% RB	1777.5	22.18	21.23
		1745.0	21.92	21.00
		1712.5	21.95	20.91
10MHz	1 RB high	1775.0	23.18	22.02
		1745.0	22.97	22.23

	1 RB low	1715.0	22.84	21.92
		1775.0	23.13	22.03
		1745.0	22.91	22.21
		1715.0	22.89	21.93
	50% RB mid	1775.0	22.23	21.30
		1745.0	21.98	21.02
		1715.0	22.02	21.11
	100% RB	1775.0	22.21	21.22
		1745.0	21.96	21.00
		1715.0	21.98	21.04
15MHz	1 RB high	1772.5	22.93	22.42
		1745.0	22.84	21.78
		1717.5	22.83	22.15
	1 RB low	1772.5	23.10	22.41
		1745.0	22.78	21.70
		1717.5	22.91	22.20
	50% RB mid	1772.5	22.26	21.25
		1745.0	21.99	21.01
		1717.5	21.98	21.07
	100% RB	1772.5	22.22	21.26
		1745.0	22.03	21.00
		1717.5	21.99	21.01
20MHz	1 RB high	1770.0	22.97	22.37
		1745.0	22.76	22.20
		1720.0	22.78	22.26
	1 RB low	1770.0	22.80	22.30
		1745.0	22.66	22.07
		1720.0	22.86	22.35
	50% RB mid	1770.0	22.26	21.31
		1745.0	22.04	21.07
		1720.0	22.10	21.17
	100% RB	1770.0	22.24	21.27
		1745.0	22.00	21.02
		1720.0	22.09	21.15

A.1.3 Radiated

A.1.3.1 Description

This is the test for the maximum radiated power from the EUT.

Rule Part 22.913(a) specifies "Mobile stations are limited to 2.0 watts EIRP".

Rule Part 24.232(b) specifies, "Mobile/portable stations are limited to 2 watts e.i.r.p. Peak power" and 24.232(c) specifies that "Peak transmit power must be measured over any interval of continuous transmission using instrumentation calibrated in terms of an rms-equivalent voltage."

Rule Part 27.50(d) specifies "Fixed, mobile, and portable (handheld) stations operating in the 1710–1755 MHz band are limited to 1 watt EIRP".


Rule Part 27.50(h)(2) specifies "Mobile stations are limited to 2.0 watts EIRP".

Rule Part 27.50(c) specifies "Portable stations (hand-held de-vices) are limited to 3 watts ERP".


A.1.3.2 Method of Measurement

The measurements procedures in TIA-603E-2016 are used.

1. EUT was placed on a 1.5 meter high non-conductive stand at a 3 meter test distance from the receive antenna. A receiving antenna was placed on the antenna mast 3 meters from the EUT for emission measurements. The height of receiving antenna is 1.5m. The test setup refers to figure below. Detected emissions were maximized at each frequency by rotating the EUT through 360° and adjusting the receiving antenna polarization. The radiated emission measurements of all transmit frequencies in three channels (High, Middle, Low) were measured with RMS detector.

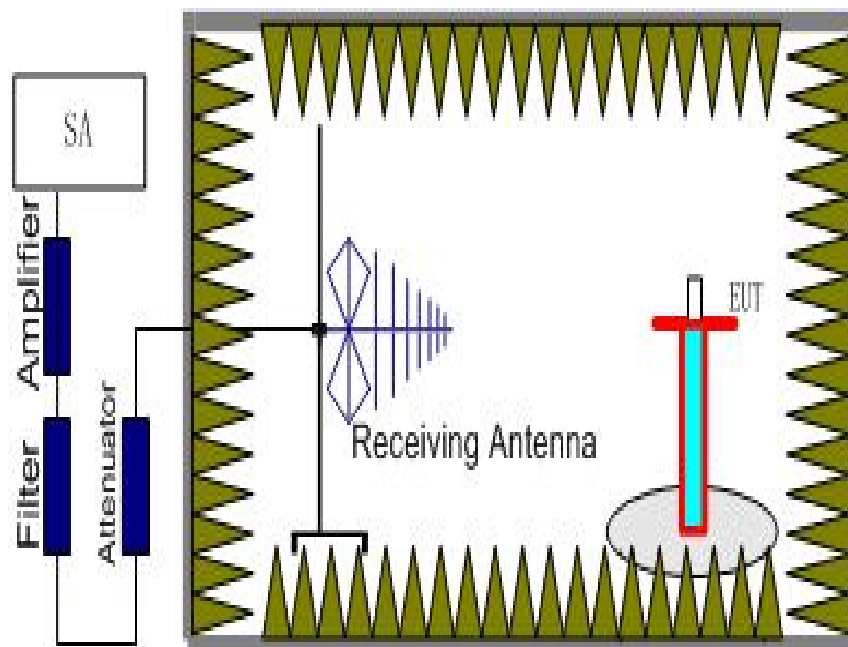

2. The EUT is then put into continuously transmitting mode at its maximum power level during the test. And the maximum value of the receiver should be recorded as (Pr).
3. The EUT shall be replaced by a substitution antenna. The test setup refers to figure below.

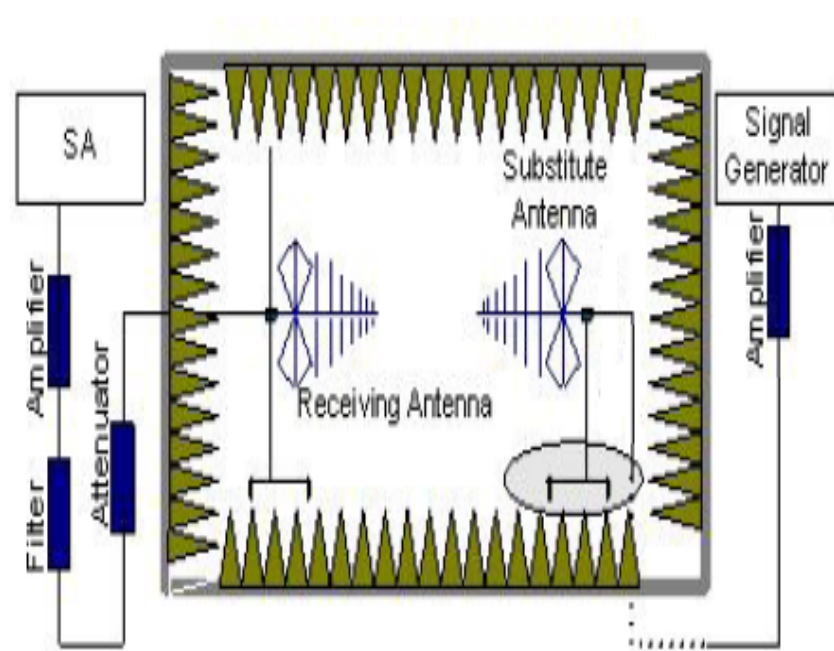

In the chamber, a substitution antenna for the frequency band of interest is placed at the reference point of the chamber. An RF signal source for the frequency band of interest is connected to the substitution antenna with a cable that has been constructed to not interfere with the radiation pattern of the antenna. A power (P_{Mea}) is applied to the input of the substitution antenna. Adjust the level of the signal generator output until the value of the receiver reaches the previously recorded (P_r). The power of signal source (P_{Mea}) is recorded. The test should be performed by rotating the test item and adjusting the receiving antenna polarization.

4. An amplifier should be connected to the Signal Source output port. And the cable should be connected between the amplifier and the substitution antenna.
The cable loss (P_{cl}), the substitution antenna Gain (G_a) and the amplifier Gain (P_{Ag}) should be recorded after test.

The measurement results are obtained as described below:

$$\text{Power (EIRP)} = P_{Mea} - P_{Ag} - P_{cl} - G_a$$

5. This value is EIRP since the measurement is calibrated using an antenna of known gain (unit dBi) and known input power.
6. ERP can be calculated from EIRP by subtracting the gain of the dipole, $ERP = EIRP - 2.15$.

A.1.3.3 Measurement result

LTE Band 2- EIRP

Limits: $\leq 33\text{dBm}$ (2W)

LTE Band 2_1.4MHz_QPSK

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)	P _{Ag} (dB)	G _a (dBi)	EIRP(dBm)	Limit(dBm)	Margin(dB)	Polarization
1850.70	-22.77	2.92	43.75	4.87	22.93	33.00	10.07	V
1880.00	-20.46	2.85	43.75	4.82	25.26	33.00	7.74	V
1909.30	-20.07	2.87	43.77	4.76	25.59	33.00	7.41	V

LTE Band 2_3MHz_QPSK

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)	P _{Ag} (dB)	G _a (dBi)	EIRP(dBm)	Limit(dBm)	Margin(dB)	Polarization
1851.50	-22.87	2.87	43.75	4.87	22.88	33.00	10.12	V
1880.00	-20.47	2.85	43.75	4.82	25.25	33.00	7.75	V
1908.50	-20.22	2.89	43.78	4.76	25.43	33.00	7.57	V

LTE Band 2_5MHz_QPSK

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)	P _{Ag} (dB)	G _a (dBi)	EIRP(dBm)	Limit(dBm)	Margin(dB)	Polarization
1852.50	-22.89	2.87	43.75	4.87	22.86	33.00	10.14	V
1880.00	-20.66	2.85	43.75	4.82	25.06	33.00	7.94	V
1907.50	-20.55	2.84	43.77	4.77	25.15	33.00	7.85	V

LTE Band 2_10MHz_QPSK

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)	P _{Ag} (dB)	G _a (dBi)	EIRP(dBm)	Limit(dBm)	Margin(dB)	Polarization
1855.00	-22.91	2.88	43.74	4.86	22.81	33.00	10.19	V
1880.00	-20.18	2.85	43.75	4.82	25.54	33.00	7.46	V
1905.00	-20.34	2.87	43.77	4.77	25.33	33.00	7.67	V

LTE Band 2_15MHz_QPSK

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)	P _{Ag} (dB)	G _a (dBi)	EIRP(dBm)	Limit(dBm)	Margin(dB)	Polarization
1857.50	-22.74	2.87	43.75	4.86	23.00	33.00	10.00	V
1880.00	-20.37	2.85	43.75	4.82	25.35	33.00	7.65	V
1902.50	-20.45	2.86	43.77	4.78	25.24	33.00	7.76	V

LTE Band 2_20 MHz_QPSK

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)	P _{Ag} (dB)	G _a (dBi)	EIRP(dBm)	Limit(dBm)	Margin(dB)	Polarization
1860.00	-22.41	2.86	43.75	4.85	23.33	33.00	9.67	V
1880.00	-20.41	2.85	43.75	4.82	25.31	33.00	7.69	V
1900.00	-20.29	2.87	43.77	4.78	25.39	33.00	7.61	V

LTE Band 2_1.4MHz_16QAM

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)	P _{Ag} (dB)	G _a (dBi)	EIRP(dBm)	Limit(dBm)	Margin(dB)	Polarization
1850.70	-23.80	2.92	43.75	4.87	21.90	33.00	11.10	V
1880.00	-21.48	2.85	43.75	4.82	24.24	33.00	8.76	V
1909.30	-21.18	2.87	43.77	4.76	24.48	33.00	8.52	V

LTE Band 2_3MHz_16QAM

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)	P _{Ag} (dB)	G _a (dBi)	EIRP(dBm)	Limit(dBm)	Margin(dB)	Polarization
1851.50	-23.84	2.87	43.75	4.87	21.91	33.00	11.09	V
1880.00	-21.49	2.85	43.75	4.82	24.23	33.00	8.77	V
1908.50	-21.25	2.89	43.78	4.76	24.40	33.00	8.60	V

LTE Band 2_5MHz_16QAM

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)	P _{Ag} (dB)	G _a (dBi)	EIRP(dBm)	Limit(dBm)	Margin(dB)	Polarization
1852.50	-23.84	2.87	43.75	4.87	21.91	33.00	11.09	V
1880.00	-21.65	2.85	43.75	4.82	24.07	33.00	8.93	V
1907.50	-21.42	2.84	43.77	4.77	24.28	33.00	8.72	V

LTE Band 2_10MHz_16QAM

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)	P _{Ag} (dB)	G _a (dBi)	EIRP(dBm)	Limit(dBm)	Margin(dB)	Polarization
1855.00	-23.89	2.88	43.74	4.86	21.83	33.00	11.17	V
1880.00	-21.47	2.85	43.75	4.82	24.25	33.00	8.75	V
1905.00	-21.25	2.87	43.77	4.77	24.42	33.00	8.58	V

LTE Band 2_15MHz_16QAM

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)	P _{Ag} (dB)	G _a (dBi)	EIRP(dBm)	Limit(dBm)	Margin(dB)	Polarization
1857.50	-23.51	2.87	43.75	4.86	22.23	33.00	10.77	V
1880.00	-21.39	2.85	43.75	4.82	24.33	33.00	8.67	V
1902.50	-21.57	2.86	43.77	4.78	24.12	33.00	8.88	V

LTE Band 2_20 MHz_16QAM

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)	P _{Ag} (dB)	G _a (dBi)	EIRP(dBm)	Limit(dBm)	Margin(dB)	Polarization
1860.00	-23.53	2.86	43.75	4.85	22.21	33.00	10.79	V
1880.00	-21.34	2.85	43.75	4.82	24.38	33.00	8.62	V
1900.00	-21.28	2.87	43.77	4.78	24.40	33.00	8.60	V

LTE Band 5- ERP

Limits: ≤38.45dBm (7W)

LTE Band 5_1.4MHz_QPSK

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)	P _{Ag} (dB)	G _a (dBi)	Correction (dB)	ERP(dBm)	Limit(dBm)	Margin(dB)	Polarization
824.70	-20.38	2.26	45.79	0.95	2.15	21.95	38.45	16.50	H
836.50	-19.83	2.26	45.66	0.82	2.15	22.24	38.45	16.21	H
848.30	-20.81	2.27	45.55	0.80	2.15	21.12	38.45	17.33	H

LTE Band 5_3MHz_QPSK

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)	P _{Ag} (dB)	G _a (dBi)	Correction (dB)	ERP(dBm)	Limit(dBm)	Margin(dB)	Polarization
825.50	-20.40	2.26	45.79	0.94	2.15	21.92	38.45	16.53	H
836.50	-19.89	2.26	45.66	0.82	2.15	22.18	38.45	16.27	H
847.50	-20.67	2.27	45.56	0.81	2.15	21.28	38.45	17.17	H

LTE Band 5_5MHz_QPSK

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)	P _{Ag} (dB)	G _a (dBi)	Correction (dB)	ERP(dBm)	Limit(dBm)	Margin(dB)	Polarization
826.50	-20.43	2.25	45.77	0.93	2.15	21.87	38.45	16.58	H
836.50	-20.07	2.26	45.66	0.82	2.15	22.00	38.45	16.45	H
846.50	-20.92	2.26	45.56	0.82	2.15	21.05	38.45	17.40	H

LTE Band 5_10MHz_QPSK

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)	P _{Ag} (dB)	G _a (dBi)	Correction (dB)	ERP(dBm)	Limit(dBm)	Margin(dB)	Polarization
829.00	-20.33	2.13	45.74	0.90	2.15	22.03	38.45	16.42	H
836.50	-19.85	2.26	45.66	0.82	2.15	22.22	38.45	16.23	H
844.00	-20.73	2.26	45.59	0.82	2.15	21.27	38.45	17.18	H

LTE Band 5_1.4MHz_16QAM

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)	P _{Ag} (dB)	G _a (dBi)	Correction (dB)	ERP(dBm)	Limit(dBm)	Margin(dB)	Polarization
824.70	-21.29	2.26	45.79	0.95	2.15	21.04	38.45	17.41	H
836.50	-20.75	2.26	45.66	0.82	2.15	21.32	38.45	17.13	H
848.30	-21.72	2.27	45.55	0.80	2.15	20.21	38.45	18.24	H

LTE Band 5_3MHz_16QAM

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)	P _{Ag} (dB)	G _a (dBi)	Correction (dB)	ERP(dBm)	Limit(dBm)	Margin(dB)	Polarization
825.50	-21.29	2.26	45.79	0.94	2.15	21.03	38.45	17.42	H
836.50	-20.77	2.26	45.66	0.82	2.15	21.30	38.45	17.15	H
847.50	-21.57	2.27	45.56	0.81	2.15	20.38	38.45	18.07	H

LTE Band 5_5MHz_16QAM

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)	P _{Ag} (dB)	G _a (dBi)	Correction (dB)	ERP(dBm)	Limit(dBm)	Margin(dB)	Polarization
826.50	-21.16	2.25	45.77	0.93	2.15	21.14	38.45	17.31	H
836.50	-20.91	2.26	45.66	0.82	2.15	21.16	38.45	17.29	H
846.50	-21.62	2.26	45.56	0.82	2.15	20.35	38.45	18.10	H

LTE Band 5_10MHz_16QAM

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)	P _{Ag} (dB)	G _a (dBi)	Correction (dB)	ERP(dBm)	Limit(dBm)	Margin(dB)	Polarization
829.00	-21.14	2.13	45.74	0.90	2.15	21.22	38.45	17.23	H
836.50	-20.73	2.26	45.66	0.82	2.15	21.34	38.45	17.11	H
844.00	-21.42	2.26	45.59	0.82	2.15	20.58	38.45	17.87	H

LTE Band 7- EIRP

Limits: ≤ 33 dBm (2W)

LTE Band 7_5MHz_QPSK

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)	P _{Ag} (dB)	G _a (dBi)	EIRP(dBm)	Limit(dBm)	Margin(dB)	Polarization
2502.50	-26.44	3.58	45.68	6.10	21.76	33.00	11.24	H
2535.00	-24.95	3.63	44.82	6.16	22.40	33.00	10.60	H
2567.50	-24.64	3.65	44.92	6.22	22.85	33.00	10.15	H

LTE Band 7_10MHz_QPSK

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)	P _{Ag} (dB)	G _a (dBi)	EIRP(dBm)	Limit(dBm)	Margin(dB)	Polarization
2505.00	-26.43	3.59	45.64	6.11	21.73	33.00	11.27	H
2535.00	-24.89	3.63	44.82	6.16	22.46	33.00	10.54	H
2565.00	-24.73	3.65	44.97	6.22	22.81	33.00	10.19	H

LTE Band 7_15MHz_QPSK

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)	P _{Ag} (dB)	G _a (dBi)	EIRP(dBm)	Limit(dBm)	Margin(dB)	Polarization
2507.50	-25.82	3.59	44.92	6.11	21.62	33.00	11.38	H
2535.00	-24.89	3.63	44.82	6.16	22.46	33.00	10.54	H
2562.50	-25.59	3.65	45.67	6.21	22.64	33.00	10.36	H

LTE Band 7_20MHz_QPSK

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)	P _{Ag} (dB)	G _a (dBi)	EIRP(dBm)	Limit(dBm)	Margin(dB)	Polarization
2510.00	-26.20	3.58	45.36	6.12	21.70	33.00	11.30	H
2535.00	-24.82	3.63	44.82	6.16	22.53	33.00	10.47	H
2560.00	-25.87	3.64	45.98	6.21	22.68	33.00	10.32	H

LTE Band 7_5MHz_16QAM

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)	P _{Ag} (dB)	G _a (dBi)	EIRP(dBm)	Limit(dBm)	Margin(dB)	Polarization
2502.50	-27.23	3.58	45.68	6.10	20.97	33.00	12.03	H
2535.00	-25.84	3.63	44.82	6.16	21.51	33.00	11.49	H
2567.50	-25.36	3.65	44.92	6.22	22.13	33.00	10.87	H

LTE Band 7_10MHz_16QAM

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)	P _{Ag} (dB)	G _a (dBi)	EIRP(dBm)	Limit(dBm)	Margin(dB)	Polarization
2505.00	-27.36	3.59	45.64	6.11	20.80	33.00	12.20	H
2535.00	-25.69	3.63	44.82	6.16	21.66	33.00	11.34	H
2565.00	-25.60	3.65	44.97	6.22	21.94	33.00	11.06	H

LTE Band 7_15MHz_16QAM

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)	P _{Ag} (dB)	G _a (dBi)	EIRP(dBm)	Limit(dBm)	Margin(dB)	Polarization
2507.50	-26.61	3.59	44.92	6.11	20.83	33.00	12.17	H
2535.00	-25.86	3.63	44.82	6.16	21.49	33.00	11.51	H
2562.50	-26.39	3.65	45.67	6.21	21.84	33.00	11.16	H

LTE Band 7_20MHz_16QAM

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)	P _{Ag} (dB)	G _a (dBi)	EIRP(dBm)	Limit(dBm)	Margin(dB)	Polarization
2510.00	-27.14	3.58	45.36	6.12	20.76	33.00	12.24	H
2535.00	-25.76	3.63	44.82	6.16	21.59	33.00	11.41	H
2560.00	-26.64	3.64	45.98	6.21	21.91	33.00	11.09	H

LTE Band 12 - ERP

Limits: $\leq 34.77\text{dBm}$ (3W)

LTE Band 12_1.4MHz_QPSK

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	P _{Ag} (dB)	G _a (dBi)	Correction (dB)	ERP (dBm)	Limit (dBm)	Margin (dB)	Polarization
699.70	-22.50	1.90	44.66	0.77	2.15	18.88	34.77	15.89	V
707.50	-22.55	1.91	44.94	0.62	2.15	18.95	34.77	15.82	V
715.30	-22.59	1.92	45.26	0.50	2.15	19.10	34.77	15.67	V

LTE Band 12_3MHz_QPSK

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	P _{Ag} (dB)	G _a (dBi)	Correction (dB)	ERP (dBm)	Limit (dBm)	Margin (dB)	Polarization
700.50	-22.53	1.90	44.68	0.76	2.15	18.86	34.77	15.91	V
707.50	-22.62	1.91	44.94	0.62	2.15	18.88	34.77	15.89	V
714.50	-22.68	1.92	45.26	0.50	2.15	19.01	34.77	15.76	V

LTE Band 12_5MHz_QPSK

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	P _{Ag} (dB)	G _a (dBi)	Correction (dB)	ERP (dBm)	Limit (dBm)	Margin (dB)	Polarization
701.50	-22.56	1.90	44.81	0.74	2.15	18.94	34.77	15.83	V
707.50	-22.60	1.91	44.94	0.62	2.15	18.90	34.77	15.87	V
713.50	-22.63	1.92	45.22	0.50	2.15	19.02	34.77	15.75	V

LTE Band 12_10MHz_QPSK

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	P _{Ag} (dB)	G _a (dBi)	Correction (dB)	ERP (dBm)	Limit (dBm)	Margin (dB)	Polarization
704.00	-22.51	1.91	44.93	0.70	2.15	19.06	34.77	15.71	V
707.50	-22.52	1.91	44.94	0.62	2.15	18.98	34.77	15.79	V
711.00	-22.62	1.92	45.19	0.53	2.15	19.03	34.77	15.74	V

LTE Band 12_1.4MHz_16QAM

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	P _{Ag} (dB)	G _a (dBi)	Correction (dB)	ERP (dBm)	Limit (dBm)	Margin (dB)	Polarization
c	-23.53	1.90	44.66	0.77	2.15	17.85	34.77	16.92	V
707.50	-23.46	1.91	44.94	0.62	2.15	18.04	34.77	16.73	V
715.30	-23.68	1.92	45.26	0.50	2.15	18.01	34.77	16.76	V

LTE Band 12_3MHz_16QAM

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	P _{Ag} (dB)	G _a (dBi)	Correction (dB)	ERP (dBm)	Limit (dBm)	Margin (dB)	Polarization
700.50	-23.60	1.90	44.68	0.76	2.15	17.79	34.77	16.98	V
707.50	-23.49	1.91	44.94	0.62	2.15	18.01	34.77	16.76	V
714.50	-23.71	1.92	45.26	0.50	2.15	17.98	34.77	16.79	V

LTE Band 12_5MHz_16QAM

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	P _{Ag} (dB)	G _a (dBi)	Correction (dB)	ERP (dBm)	Limit (dBm)	Margin (dB)	Polarization
701.50	-23.44	1.90	44.81	0.74	2.15	18.06	34.77	16.71	V
707.50	-23.57	1.91	44.94	0.62	2.15	17.93	34.77	16.84	V
713.50	-23.55	1.92	45.22	0.50	2.15	18.10	34.77	16.67	V

LTE Band 12_10MHz_16QAM

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	P _{Ag} (dB)	G _a (dBi)	Correction (dB)	ERP (dBm)	Limit (dBm)	Margin (dB)	Polarization
704.00	-23.54	1.91	44.93	0.70	2.15	18.03	34.77	16.74	V
707.50	-23.42	1.91	44.94	0.62	2.15	18.08	34.77	16.69	V
711.00	-23.66	1.92	45.19	0.53	2.15	17.99	34.77	16.78	V

LTE Band 17 - ERP

Limits: $\leq 34.77\text{dBm}$ (3W)

LTE Band 17_5MHz_QPSK

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)	P _{Ag} (dB)	G _a (dBi)	Correction (dB)	ERP(dBm)	Limit(dBm)	Margin(dB)	Polarization
706.50	-23.18	1.91	45.53	0.66	2.15	18.95	34.77	15.82	H
710.00	-23.32	1.92	45.68	0.54	2.15	18.83	34.77	15.94	H
713.50	-22.71	1.92	45.22	0.50	2.15	18.94	34.77	15.83	H

LTE Band 17_10MHz_QPSK

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)	P _{Ag} (dB)	G _a (dBi)	Correction (dB)	ERP(dBm)	Limit(dBm)	Margin(dB)	Polarization
709.00	-23.09	1.92	45.64	0.57	2.15	19.05	34.77	15.72	H
710.00	-23.11	1.92	45.68	0.54	2.15	19.04	34.77	15.73	H
711.00	-22.67	1.92	45.19	0.53	2.15	18.98	34.77	15.79	H

LTE Band 17_5MHz_16QAM

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)	P _{Ag} (dB)	G _a (dBi)	Correction (dB)	ERP(dBm)	Limit(dBm)	Margin(dB)	Polarization
706.50	-24.05	1.91	45.53	0.66	2.15	18.08	34.77	16.69	H
710.00	-24.30	1.92	45.68	0.54	2.15	17.85	34.77	16.92	H
713.50	-23.54	1.92	45.22	0.50	2.15	18.11	34.77	16.66	H

LTE Band 17_10MHz_16QAM

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)	P _{Ag} (dB)	G _a (dBi)	Correction (dB)	ERP(dBm)	Limit(dBm)	Margin(dB)	Polarization
709.00	-24.03	1.92	45.64	0.57	2.15	18.11	34.77	16.66	H
710.00	-24.22	1.92	45.68	0.54	2.15	17.93	34.77	16.84	H
711.00	-23.65	1.92	45.19	0.53	2.15	18.00	34.77	16.77	H

LTE Band 66- EIRP

Limits: ≤30dBm (1W)

LTE Band 66_1.4MHz_QPSK

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)	P _{Ag} (dB)	G _a (dBi)	EIRP(dBm)	Limit(dBm)	Margin(dB)	Polarization
1710.70	-30.39	3.17	44.10	5.12	22.00	33.00	11.00	V
1745.00	-30.41	3.68	44.16	5.06	22.49	33.00	10.51	V
1779.30	-28.74	3.04	44.03	5.00	23.33	33.00	9.67	H

LTE Band 66_3MHz_QPSK

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)	P _{Ag} (dB)	G _a (dBi)	EIRP(dBm)	Limit(dBm)	Margin(dB)	Polarization
1711.50	-30.78	3.40	44.10	5.12	21.84	33.00	11.16	V
1745.00	-30.55	3.68	44.16	5.06	22.35	33.00	10.65	V
1778.50	-28.80	3.04	44.03	5.00	23.27	33.00	9.73	H

LTE Band 66_5MHz_QPSK

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)	P _{Ag} (dB)	G _a (dBi)	EIRP(dBm)	Limit(dBm)	Margin(dB)	Polarization
1712.50	-23.65	3.66	44.10	5.12	21.91	33.00	11.09	V
1745.00	-23.21	3.68	44.16	5.06	22.33	33.00	10.67	V
1777.50	-22.73	3.04	44.04	5.00	23.27	33.00	9.73	H

LTE Band 66_10MHz_QPSK

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)	P _{Ag} (dB)	G _a (dBi)	EIRP(dBm)	Limit(dBm)	Margin(dB)	Polarization
1715.00	-23.54	3.56	44.10	5.11	22.11	33.00	10.89	V
1745.00	-23.13	3.68	44.16	5.06	22.41	33.00	10.59	V
1775.00	-22.75	3.05	44.05	5.01	23.25	33.00	9.75	H

LTE Band 66_15MHz_QPSK

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)	P _{Ag} (dB)	G _a (dBi)	EIRP(dBm)	Limit(dBm)	Margin(dB)	Polarization
1717.50	-23.75	3.47	44.11	5.11	22.00	33.00	11.00	V
1745.00	-23.21	3.68	44.16	5.06	22.33	33.00	10.67	V
1772.50	-23.22	3.05	44.06	5.01	22.80	33.00	10.20	H

LTE Band 66_20MHz_QPSK

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)	P _{Ag} (dB)	G _a (dBi)	EIRP(dBm)	Limit(dBm)	Margin(dB)	Polarization
1720.00	-23.67	3.37	44.11	5.10	22.17	33.00	10.83	V
1745.00	-23.06	3.68	44.16	5.06	22.48	33.00	10.52	V
1770.00	-22.88	3.05	44.07	5.01	23.16	33.00	9.84	H

LTE Band 66_1.4MHz_16QAM

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)	P _{Ag} (dB)	G _a (dBi)	EIRP(dBm)	Limit(dBm)	Margin(dB)	Polarization
1710.70	-31.45	3.17	44.10	5.12	20.94	33.00	12.06	V
1745.00	-31.39	3.68	44.16	5.06	21.51	33.00	11.49	V
1779.30	-29.67	3.04	44.03	5.00	22.40	33.00	10.60	H

LTE Band 66_3MHz_16QAM

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)	P _{Ag} (dB)	G _a (dBi)	EIRP(dBm)	Limit(dBm)	Margin(dB)	Polarization
1711.50	-31.81	3.40	44.10	5.12	20.81	33.00	12.19	V
1745.00	-31.40	3.68	44.16	5.06	21.50	33.00	11.50	V
1778.50	-29.76	3.04	44.03	5.00	22.31	33.00	10.69	H

LTE Band 66_5MHz_16QAM

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)	P _{Ag} (dB)	G _a (dBi)	EIRP(dBm)	Limit(dBm)	Margin(dB)	Polarization
1712.50	-24.58	3.66	44.10	5.12	20.98	33.00	12.02	V
1745.00	-24.17	3.68	44.16	5.06	21.37	33.00	11.63	V
1777.50	-23.52	3.04	44.04	5.00	22.48	33.00	10.52	H

LTE Band 66_10MHz_16QAM

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)	P _{Ag} (dB)	G _a (dBi)	EIRP(dBm)	Limit(dBm)	Margin(dB)	Polarization
1715.00	-24.70	3.56	44.10	5.11	20.95	33.00	12.05	V
1745.00	-23.99	3.68	44.16	5.06	21.55	33.00	11.45	V
1775.00	-23.71	3.05	44.05	5.01	22.29	33.00	10.71	H

LTE Band 66_15MHz_16QAM

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)	P _{Ag} (dB)	G _a (dBi)	EIRP(dBm)	Limit(dBm)	Margin(dB)	Polarization
1717.50	-24.81	3.47	44.11	5.11	20.94	33.00	12.06	V
1745.00	-24.06	3.68	44.16	5.06	21.48	33.00	11.52	V
1772.50	-24.07	3.05	44.06	5.01	21.95	33.00	11.05	H

LTE Band 66_20MHz_16QAM

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)	P _{Ag} (dB)	G _a (dBi)	EIRP(dBm)	Limit(dBm)	Margin(dB)	Polarization
1720.00	-24.72	3.37	44.11	5.10	21.12	33.00	11.88	V
1745.00	-23.90	3.68	44.16	5.06	21.64	33.00	11.36	V
1770.00	-23.95	3.05	44.07	5.01	22.09	33.00	10.91	H

Peak EIRP(dBm) = P_{Mea}(-20.18dBm) - G_a (-4.82dBi) - P_{Ag} (-43.75dB) - P_{cl} (2.85dB) = 25.54dBm

ANALYZER SETTINGS:

RBW = VBW = 8MHz for occupied bandwidths equal to or less than 5MHz.

RBW = VBW = 20MHz for occupied bandwidths equal to or greater than 10MHz.

Note: Expanded measurement uncertainty is $U = 2.84 \text{ dB}$, $k = 2$.

A.2 EMISSION LIMIT


A.2.1 Measurement Method

The measurements procedures in TIA-603E-2016 are used. This measurement is carried out in fully-anechoic chamber FAC-3.


The spectrum was scanned from 30 MHz to the 10th harmonic of the highest frequency generated within the equipment, which is the transmitted carrier. The resolution bandwidth is set 1MHz. The spectrum was scanned with the mobile station transmitting at carrier frequencies that pertain to low, mid and high channels of the LTE Bands 2 5 7 12 17 66.

The procedure of radiated spurious emissions is as follows:

1. EUT was placed on a 1.5 meter high non-conductive stand at a 3 meter test distance from the receive antenna. A receiving antenna was placed on the antenna mast 3 meters from the EUT for emission measurements. The height of receiving antenna is 1.5m. The test setup refers to figure below. Detected emissions were maximized at each frequency by rotating the EUT through 360° and adjusting the receiving antenna polarization. The radiated emission measurements of all non-harmonic and harmonics of the transmit frequency through the 10th harmonic were measured with peak detector.

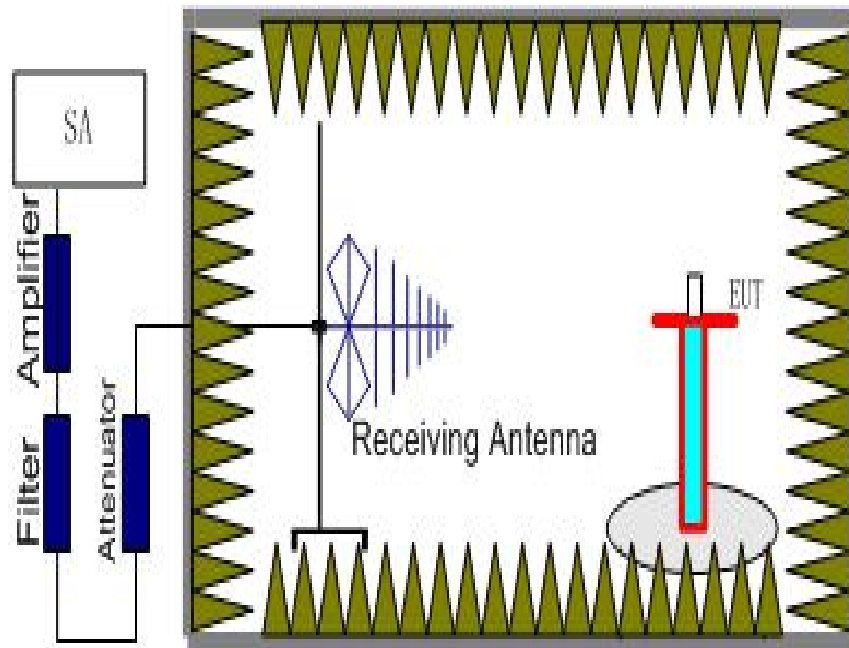

2. The EUT is then put into continuously transmitting mode at its maximum power level during the test. And the maximum value of the receiver should be recorded as (Pr).
3. The EUT shall be replaced by a substitution antenna. The test setup refers to figure below.

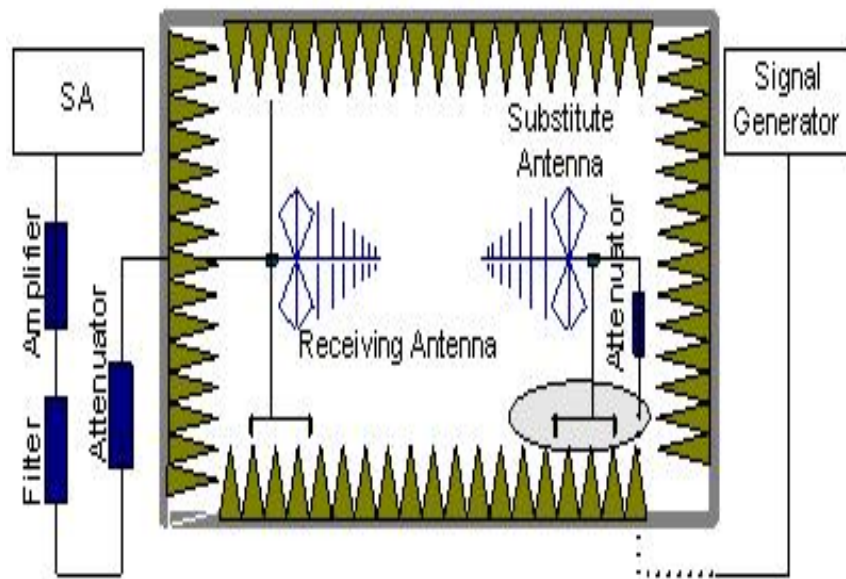

In the chamber, an substitution antenna for the frequency band of interest is placed at the reference point of the chamber. An RF Signal source for the frequency band of interest is connected to the substitution antenna with a cable that has been constructed to not interfere with the radiation pattern of the antenna. A power (P_{Mea}) is applied to the input of the substitution antenna. Adjust the level of the signal generator output until the value of the receiver reaches the previously recorded (P_r). The power of signal source (P_{Mea}) is recorded. The test should be performed by rotating the test item and adjusting the receiving antenna polarization.

4. The Path loss (P_{pl}) between the Signal Source with the Substitution Antenna and the Substitution Antenna Gain (G_a) should be recorded after test.

An amplifier should be connected in for the test.

The Path loss (P_{pl}) is the summation of the cable loss and the gain of the amplifier.

The measurement results are obtained as described below:

$$\text{Power (EIRP)} = P_{Mea} + P_{pl} + G_a$$

5. This value is EIRP since the measurement is calibrated using an antenna of known gain (unit: dBi) and known input power.
6. ERP can be calculated from EIRP by subtracting the gain of the dipole, $ERP = EIRP - 2.15\text{dB}$.

A.2.2 Measurement Limit

Part 22.917, Part 24.238 and Part 27.53(h) specify that the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

The specification that emissions shall be attenuated below the transmitter power (P) by at least $43 + 10 \log(P)$ dB, translates in the relevant power range (1 to 0.001 W) to -13 dBm. At 1 W the specified minimum attenuation becomes 43 dB and relative to a 30 dBm (1 W) carrier becomes a limit of -13 dBm. At 0.001 W (0 dBm) the minimum attenuation is 13 dB, which again yields a limit of -13 dBm. In this way a translation of the specification from relative to absolute terms is carried

out.

Part 27.53(m)(4) specifies for mobile digital stations, the attenuation factor shall be not less than $40 + 10 \log (P)$ dB on all frequencies between the channel edge and 5 megahertz from the channel edge, $43 + 10 \log (P)$ dB on all frequencies between 5 megahertz and X megahertz from the channel edge, and $55 + 10 \log (P)$ dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth as defined in paragraph (m)(6) of this section. In addition, the attenuation factor shall not be less than $43 + 10 \log (P)$ dB on all frequencies between 2490.5 MHz and 2496 MHz and $55 + 10 \log (P)$ dB at or below 2490.5 MHz. Mobile Satellite Service licensees operating on frequencies below 2495 MHz may also submit a documented interference complaint against BRS licensees operating on channel BRS Channel 1 on the same terms and conditions as adjacent channel BRS or EBS licensees.

Part 27.53(c) states for operations in the 746-758 MHz band and the 776-788 MHz band, the power of any emission outside the licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, in accordance with the following: (1) On any frequency outside the 746-758 MHz band, the power of any emission shall be attenuated outside the band below the transmitter power (P) by at least $43 + 10 \log (P)$ dB; (2) On any frequency outside the 776-788 MHz band, the power of any emission shall be attenuated outside the band below the transmitter power (P) by at least $43 + 10 \log (P)$ dB; (4) On all frequencies between 763-775 MHz and 793-805 MHz, by a factor not less than $65 + 10 \log (P)$ dB in a 6.25 kHz band segment, for mobile and portable stations.

A.2.3 Measurement Results

Radiated emissions measurements were made only at the upper, middle, and lower carrier frequencies of the LTE Bands 2 5 7 12 17 66. It was decided that measurements at these three carrier frequencies would be sufficient to demonstrate compliance with emissions limits because it was seen that all the significant spurs occur well outside the band and no radiation was seen from a carrier in one block of the LTE Bands 2 5 7 12 17 66 into any of the other blocks. The equipment must still, however, meet emissions requirements with the carrier at all frequencies over which it is capable of operating and it is the manufacturer's responsibility to verify this. The evaluated frequency range is from 30MHz to 26GHz.

LTE Band 2, 1.4MHz, QPSK, Channel 18607

Frequency(MHz)	P _{Mea} (dBm)	Path Loss(dB)	Antenna Gain(dBi)	Peak EIRP(dBm)	Limit(dBm)	Margin(dB)	Polarization
3701.02	-53.84	6.42	8.48	-51.78	-13.00	38.78	H
5554.02	-51.75	7.19	10.59	-48.35	-13.00	35.35	V
7411.01	-55.06	8.15	12.09	-51.12	-13.00	38.12	H
9271.01	-54.68	9.09	13.26	-50.51	-13.00	37.51	V
11072.01	-50.92	9.89	13.19	-47.62	-13.00	34.62	H
12937.01	-49.37	10.49	13.46	-46.40	-13.00	33.40	H

LTE Band 2, 1.4MHz, QPSK, Channel 18900

Frequency(MHz)	P _{Mea} (dBm)	Path Loss(dB)	Antenna Gain(dBi)	Peak EIRP(dBm)	Limit(dBm)	Margin(dB)	Polarization
3760.02	-53.19	6.26	8.56	-50.89	-13.00	37.89	V
5646.02	-50.70	7.27	10.57	-47.40	-13.00	34.40	H
7533.01	-55.21	8.26	12.23	-51.24	-13.00	38.24	H
9435.01	-53.95	9.21	13.36	-49.80	-13.00	36.80	V
11267.01	-51.36	9.80	13.15	-48.01	-13.00	35.01	V
13195.01	-48.06	10.52	13.77	-44.81	-13.00	31.81	H

LTE Band 2, 1.4MHz, QPSK, Channel 19193

Frequency(MHz)	P _{Mea} (dBm)	Path Loss(dB)	Antenna Gain(dBi)	Peak EIRP(dBm)	Limit(dBm)	Margin(dB)	Polarization
3819.02	-54.20	6.08	8.65	-51.63	-13.00	38.63	H
5729.02	-48.19	7.29	10.55	-44.93	-13.00	31.93	V
7641.01	-54.07	8.16	12.31	-49.92	-13.00	36.92	V
9561.01	-53.97	9.32	13.34	-49.95	-13.00	36.95	H
11433.01	-49.93	9.98	13.11	-46.80	-13.00	33.80	V
13394.01	-48.18	10.57	14.05	-44.70	-13.00	31.70	H

LTE Band 5, 1.4MHz, QPSK, Channel 20407

Frequency(MHz)	P _{Mea} (dBm)	Path Loss(dB)	Antenna Gain(dBi)	Correction (dB)	Peak ERP(dBm)	Limit (dBm)	Margin(dB)	Polarization
1649.01	-51.11	3.56	5.23	2.15	-51.59	-13.00	38.59	V
2475.00	-38.49	4.60	6.03	2.15	-39.21	-13.00	26.21	V
3301.02	-55.68	5.29	7.72	2.15	-55.40	-13.00	42.40	H
4121.02	-55.72	6.04	9.02	2.15	-54.89	-13.00	41.89	H
4945.01	-55.42	6.70	9.85	2.15	-54.42	-13.00	41.42	V
5782.01	-54.72	7.22	10.54	2.15	-53.55	-13.00	40.55	V

LTE Band 5, 1.4MHz, QPSK, Channel 20525

Frequency(MHz)	P _{Mea} (dBm)	Path Loss(dB)	Antenna Gain(dBi)	Correction (dB)	Peak ERP(dBm)	Limit (dBm)	Margin(dB)	Polarization
1673.01	-53.45	3.58	5.19	2.15	-53.99	-13.00	40.99	H
2510.00	-41.17	4.63	6.12	2.15	-41.83	-13.00	28.83	V
3358.02	-54.66	5.33	7.86	2.15	-54.28	-13.00	41.28	H
4181.02	-55.39	6.16	9.08	2.15	-54.62	-13.00	41.62	V
5026.01	-56.17	6.56	9.94	2.15	-54.94	-13.00	41.94	H
5849.01	-53.96	7.23	10.53	2.15	-52.81	-13.00	39.81	H

LTE Band 5, 1.4MHz, QPSK, Channel 20643

Frequency(MHz)	P _{Mea} (dBm)	Path Loss(dB)	Antenna Gain(dBi)	Correction (dB)	Peak ERP(dBm)	Limit (dBm)	Margin(dB)	Polarization
1697.01	-57.84	3.60	5.15	2.15	-58.44	-13.00	45.44	H
2545.00	-44.32	4.66	6.18	2.15	-44.95	-13.00	31.95	V
3406.02	-54.91	5.37	7.97	2.15	-54.46	-13.00	41.46	V
4251.02	-55.30	6.24	9.15	2.15	-54.54	-13.00	41.54	H
5081.01	-55.97	6.72	10.01	2.15	-54.83	-13.00	41.83	H
5952.01	-53.83	7.47	10.51	2.15	-52.94	-13.00	39.94	V

LTE Band 7, 5 MHz, QPSK, Channel 20775

Frequency(MHz)	P _{Mea} (dBm)	Path Loss(dB)	Antenna Gain(dBi)	Peak EIRP(dBm)	Limit(dBm)	Margin(dB)	Polarization
5020.02	-57.97	6.57	9.93	-54.61	-25.00	29.61	V
7509.01	-54.50	8.36	12.21	-50.65	-25.00	25.65	V
10011.01	-47.34	9.21	12.90	-43.65	-25.00	18.65	H
12514.01	-49.29	10.21	13.21	-46.29	-25.00	21.29	H
15019.00	-45.53	11.24	13.99	-42.78	-25.00	17.78	V
17526.00	-43.10	12.82	14.94	-40.98	-25.00	15.98	V

LTE Band 7, 5 MHz, QPSK, Channel 21100

Frequency(MHz)	P _{Mea} (dBm)	Path Loss(dB)	Antenna Gain(dBi)	Peak EIRP(dBm)	Limit(dBm)	Margin(dB)	Polarization
5076.02	-58.14	6.70	10.01	-54.83	-25.00	29.83	H
7607.01	-52.91	8.00	12.29	-48.62	-25.00	23.62	V
10144.01	-46.06	9.39	12.96	-42.49	-25.00	17.49	V
12678.01	-49.79	10.34	13.31	-46.82	-25.00	21.82	H
15223.00	-45.46	11.37	13.87	-42.96	-25.00	17.96	V
17738.00	-44.22	12.39	15.23	-41.38	-25.00	16.38	H

LTE Band 7, 5 MHz, QPSK, Channel 21425

Frequency(MHz)	P _{Mea} (dBm)	Path Loss(dB)	Antenna Gain(dBi)	Peak EIRP(dBm)	Limit(dBm)	Margin(dB)	Polarization
5126.02	-57.12	6.84	10.08	-53.88	-25.00	28.88	H
7705.01	-51.76	8.42	12.36	-47.82	-25.00	22.82	V
10274.01	-46.48	9.55	13.01	-43.02	-25.00	18.02	H
12842.01	-49.44	10.66	13.41	-46.69	-25.00	21.69	V
15417.00	-45.18	11.42	13.75	-42.85	-25.00	17.85	H
17989.00	-43.47	12.90	15.58	-40.79	-25.00	15.79	H

LTE Band 12, 1.4MHz, QPSK, Channel 23017

Frequency (MHz)	P _{Mea} (dBm)	Path Loss(dB)	Antenna Gain(dBi)	Correction (dB)	Peak ERP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1400.01	-57.34	3.24	4.98	2.15	-57.75	-13.00	44.75	H
2099.00	-36.13	4.19	4.90	2.15	-37.57	-13.00	24.57	V
2806.00	-51.33	4.92	6.65	2.15	-51.75	-13.00	38.75	H
3486.02	-55.69	5.49	8.17	2.15	-55.16	-13.00	42.16	H
4192.02	-54.83	6.19	9.09	2.15	-54.08	-13.00	41.08	H
4906.01	-55.14	6.73	9.81	2.15	-54.21	-13.00	41.21	H

LTE Band 12, 1.4MHz, QPSK, Channel 23095

Frequency (MHz)	P _{Mea} (dBm)	Path Loss(dB)	Antenna Gain(dBi)	Correction (dB)	Peak ERP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1415.01	-54.37	3.25	5.06	2.15	-54.71	-13.00	41.71	H
2123.00	-29.15	4.21	4.97	2.15	-30.54	-13.00	17.54	V
2815.00	-50.86	4.93	6.67	2.15	-51.27	-13.00	38.27	V
3538.02	-54.35	5.70	8.25	2.15	-53.95	-13.00	40.95	V
4257.02	-54.89	6.23	9.16	2.15	-54.11	-13.00	41.11	V
4962.01	-54.80	6.67	9.86	2.15	-53.76	-13.00	40.76	V

LTE Band 12, 1.4MHz, QPSK, Channel 23173

Frequency (MHz)	P _{Mea} (dBm)	Path Loss(dB)	Antenna Gain(dBi)	Correction (dB)	Peak ERP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1431.01	-56.36	3.28	5.14	2.15	-56.65	-13.00	43.65	H
2146.00	-31.76	4.24	5.04	2.15	-33.11	-13.00	20.11	V
2859.00	-52.09	4.96	6.75	2.15	-52.45	-13.00	39.45	V
3577.02	-53.93	6.10	8.31	2.15	-53.87	-13.00	40.87	V
4304.02	-54.92	6.19	9.20	2.15	-54.06	-13.00	41.06	H
5011.01	-55.77	6.58	9.92	2.15	-54.58	-13.00	41.58	V

LTE Band 17, 5MHz, QPSK, Channel 23755

Frequency(MHz)	P _{Mea} (dBm)	Path Loss(dB)	Antenna Gain(dBi)	Correction (dB)	Peak ERP(dBm)	Limit (dBm)	Margin(dB)	Polarization
1413.01	-51.79	3.25	5.05	2.15	-52.14	-13.00	39.14	H
2120.00	-41.28	4.21	4.96	2.15	-42.68	-13.00	29.68	V
2815.00	-52.64	4.93	6.67	2.15	-53.05	-13.00	40.05	V
3533.02	-56.03	5.65	8.25	2.15	-55.58	-13.00	42.58	V
4236.02	-56.08	6.25	9.14	2.15	-55.34	-13.00	42.34	H
4937.01	-55.17	6.71	9.84	2.15	-54.19	-13.00	41.19	H

LTE Band 17, 5MHz, QPSK, Channel 23790

Frequency(MHz)	P _{Mea} (dBm)	Path Loss(dB)	Antenna Gain(dBi)	Correction (dB)	Peak ERP(dBm)	Limit (dBm)	Margin(dB)	Polarization
1421.01	-52.11	3.26	5.09	2.15	-52.43	-13.00	39.43	H
2131.00	-51.10	4.22	4.99	2.15	-52.48	-13.00	39.48	H
2854.00	-52.50	4.96	6.74	2.15	-52.87	-13.00	39.87	V
3561.02	-55.94	5.94	8.29	2.15	-55.74	-13.00	42.74	V
4271.02	-55.95	6.22	9.17	2.15	-55.15	-13.00	42.15	H
4972.01	-55.97	6.65	9.87	2.15	-54.90	-13.00	41.90	H

LTE Band 17, 5MHz, QPSK, Channel 23825

Frequency(MHz)	P _{Mea} (dBm)	Path Loss(dB)	Antenna Gain(dBi)	Correction (dB)	Peak ERP(dBm)	Limit (dBm)	Margin(dB)	Polarization
1427.01	-52.87	3.27	5.12	2.15	-53.17	-13.00	40.17	H
2141.00	-53.15	4.24	5.02	2.15	-54.52	-13.00	41.52	H
2864.00	-52.08	4.96	6.76	2.15	-52.43	-13.00	39.43	V
3557.02	-56.38	5.90	8.28	2.15	-56.15	-13.00	43.15	V
4269.02	-55.37	6.22	9.17	2.15	-54.57	-13.00	41.57	V
4981.01	-56.20	6.64	9.88	2.15	-55.11	-13.00	42.11	V

LTE Band 66, 1.4MHz QPSK, Channel 131979

Frequency(MHz)	P _{Mea} (dBm)	Path Loss(dB)	Antenna Gain(dBi)	Peak EIRP(dBm)	Limit(dBm)	Margin(dB)	Polarization
3422.02	-50.58	5.38	8.01	-47.95	-13.00	34.95	H
5137.02	-41.21	6.86	10.09	-37.98	-13.00	24.98	V
6844.01	-51.50	7.83	11.41	-47.92	-13.00	34.92	V
8552.01	-54.66	8.58	13.01	-50.23	-13.00	37.23	H
10263.01	-53.49	9.52	13.01	-50.00	-13.00	37.00	V
11979.01	-49.70	10.15	13.00	-46.85	-13.00	33.85	H

LTE Band 66, 1.4MHz, QPSK, Channel 132322

Frequency(MHz)	P _{Mea} (dBm)	Path Loss(dB)	Antenna Gain(dBi)	Peak EIRP(dBm)	Limit(dBm)	Margin(dB)	Polarization
3491.02	-54.78	5.50	8.18	-52.10	-13.00	39.10	H
5238.02	-42.34	7.00	10.23	-39.11	-13.00	26.11	V
6984.01	-54.31	8.17	11.58	-50.90	-13.00	37.90	H
8720.01	-54.37	8.42	13.04	-49.75	-13.00	36.75	H
10467.01	-51.87	9.70	13.09	-48.48	-13.00	35.48	H
12210.01	-49.40	10.05	13.08	-46.37	-13.00	33.37	H

LTE Band 66, 1.4MHz, QPSK, Channel 132665

Frequency(MHz)	P _{Mea} (dBm)	Path Loss(dB)	Antenna Gain(dBi)	Peak EIRP(dBm)	Limit(dBm)	Margin(dB)	Polarization
3559.02	-53.16	5.92	8.28	-50.80	-13.00	37.80	H
5340.02	-38.28	6.96	10.38	-34.86	-13.00	21.86	V
7121.01	-53.71	8.16	11.75	-50.12	-13.00	37.12	V
8894.01	-54.99	8.83	13.08	-50.74	-13.00	37.74	H
10672.01	-51.01	9.30	13.13	-47.18	-13.00	34.18	H
12459.01	-49.97	10.28	13.18	-47.07	-13.00	34.07	V

Note: The maximum value of expanded measurement uncertainty for this test item is $U = 5.16$ dB, $k = 2$.

A.3 FREQUENCY STABILITY

A.3.1 Method of Measurement

In order to measure the carrier frequency under the condition of AFC lock, it is necessary to make measurements with the EUT in a “call mode”. This is accomplished with the use of R&S CMW500 DIGITAL RADIO COMMUNICATION TESTER.

1. Measure the carrier frequency at room temperature.
2. Subject the EUT to overnight soak at -10°C.
3. With the EUT, powered via nominal voltage, connected to the CMW500 and in a simulated call on middle channel for LTE Bands 2 5 7 12 17 66, measure the carrier frequency. These measurements should be made within 2 minutes of Powering up the EUT, to prevent significant self-warming.
4. Repeat the above measurements at 10°C increments from -10°C to +50°C. Allow at least 1.5 hours at each temperature, unpowered, before making measurements.
5. Re-measure carrier frequency at room temperature with nominal voltage. Vary supply voltage from minimum voltage to maximum voltage, in 0.1Volt increments re-measuring carrier frequency at each voltage. Pause at nominal voltage for 1.5 hours unpowered, to allow any self-heating to stabilize, before continuing.
6. Subject the EUT to overnight soak at +50°C.
7. With the EUT, powered via nominal voltage, connected to the CMW500 and in a simulated call on the centre channel, measure the carrier frequency. These measurements should be made within 2 minutes of Powering up the EUT, to prevent significant self-warming.
8. Repeat the above measurements at 10 °C increments from -10°C to +50°C. Allow at least 1.5 hours at each temperature, unpowered, before making measurements.
9. At all temperature levels hold the temperature to +/- 0.5°C during the measurement procedure.

The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block. As this transceiver is considered "Hand carried, battery powered equipment" Section 2.1055(d)(2) applies. This requires that the lower voltage for frequency stability testing be specified by the manufacturer. This transceiver is specified to operate with an input voltage of between 3.4VDC and 4.4VDC, with a nominal voltage of 3.85VDC. Operation above or below these voltage limits is prohibited by transceiver software in order to prevent improper operation as well as to protect components from overstress.

A.3.2 Measurement results

LTE Band 2, 1.4MHz bandwidth (worst case of all bandwidths)

Frequency Error vs Voltage

Voltage (V)	Frequency error (Hz)		Frequency error (ppm)	
	QPSK	16QAM	QPSK	16QAM
3.4	6.49	-35.92	0.0035	0.0191
3.85	-5.87	-32.42	0.0031	0.0172
4.4	-12.97	-37.75	0.0069	0.0201

Frequency Error vs Temperature

Temperature (°C)	Frequency error (Hz)		Frequency error (ppm)	
	QPSK	16QAM	QPSK	16QAM
50	-14.02	-35.25	0.0075	0.0188
40	-15.74	-38.29	0.0084	0.0204
30	-16.65	-36.46	0.0089	0.0194
20	-14.22	-32.50	0.0076	0.0173
10	-13.16	-38.52	0.0070	0.0205
0	-13.58	-33.09	0.0072	0.0176
- 10	-10.97	-35.15	0.0058	0.0187

LTE Band 5, 1.4MHz bandwidth (worst case of all bandwidths)

Frequency Error vs Voltage

Voltage (V)	Frequency error (Hz)		Frequency error (ppm)	
	QPSK	16QAM	QPSK	16QAM
3.4	-7.25	-19.18	0.0087	0.0229
3.85	-9.27	-21.59	0.0111	0.0258
4.4	-11.99	-15.45	0.0143	0.0185

Frequency Error vs Temperature

Temperature (°C)	Frequency error (Hz)		Frequency error (ppm)	
	QPSK	16QAM	QPSK	16QAM
50	-11.17	-24.96	0.0134	0.0298
40	-12.93	-22.80	0.0155	0.0273
30	-6.19	-21.66	0.0074	0.0259
20	-9.14	-22.92	0.0109	0.0274
10	-10.01	-24.08	0.0120	0.0288
0	-13.30	-21.14	0.0159	0.0253
- 10	-11.39	-25.65	0.0136	0.0307

LTE Band 7, 10MHz bandwidth (worst case of all bandwidths)

Frequency Error vs Voltage

Voltage (V)	Frequency error (Hz)		Frequency error (ppm)	
	QPSK	16QAM	QPSK	16QAM
3.4	-13.07	-19.74	0.0052	0.0078
3.85	8.80	-21.29	0.0035	0.0084
4.4	-11.92	-19.43	0.0047	0.0077

Frequency Error vs Temperature

Temperature (°C)	Frequency error (Hz)		Frequency error (ppm)	
	QPSK	16QAM	QPSK	16QAM
50	-15.72	-24.33	0.0062	0.0096
40	-13.35	-20.63	0.0053	0.0081
30	-17.51	-15.08	0.0069	0.0059
20	-14.35	-16.97	0.0057	0.0067
10	-16.75	10.60	0.0066	0.0042
0	-16.12	-17.07	0.0064	0.0067
- 10	-17.38	-13.55	0.0069	0.0053

LTE Band 12, 1.4MHz bandwidth (worst case of all bandwidths)

Frequency Error vs Voltage

Voltage (V)	Frequency error (Hz)		Frequency error (ppm)	
	QPSK	16QAM	QPSK	16QAM
3.4	-13.00	-6.17	0.0184	0.0087
3.85	-8.96	7.00	0.0127	0.0099
4.4	-9.56	-7.87	0.0135	0.0111

Frequency Error vs Temperature

Temperature (°C)	Frequency error (Hz)		Frequency error (ppm)	
	QPSK	16QAM	QPSK	16QAM
50	-10.80	4.85	0.0153	0.0069
40	-9.98	-3.83	0.0141	0.0054
30	-10.63	5.71	0.0150	0.0081
20	-14.13	7.60	0.0200	0.0107
10	-10.17	5.02	0.0144	0.0071
0	-11.16	-4.65	0.0158	0.0066
- 10	-13.69	-5.55	0.0193	0.0078

LTE Band 17, 5MHz bandwidth (worst case of all bandwidths)

Frequency Error vs Voltage

Voltage (V)	Frequency error (Hz)		Frequency error (ppm)	
	QPSK	16QAM	QPSK	16QAM
3.4	-9.70	-15.71	0.0137	0.0221
3.85	-10.31	-18.85	0.0145	0.0265
4.4	-7.52	-24.03	0.0106	0.0338

Frequency Error vs Temperature

Temperature (°C)	Frequency error (Hz)		Frequency error (ppm)	
	QPSK	16QAM	QPSK	16QAM
50°	-14.05	-19.96	0.0198	0.0281
40°	-12.72	-17.75	0.0179	0.0250
30°	-13.06	-21.01	0.0184	0.0296
20°	-11.01	-19.78	0.0155	0.0279
10°	-8.55	-21.34	0.0120	0.0301
0°	-10.84	-18.57	0.0153	0.0262
- 10°	-8.41	-19.53	0.0118	0.0275

LTE Band 66, 1.4MHz bandwidth (worst case of all bandwidths)

Frequency Error vs Voltage

Voltage (V)	Frequency error (Hz)		Frequency error (ppm)	
	QPSK	16QAM	QPSK	16QAM
3.4	-12.47	15.55	0.0071	0.0089
3.85	-10.17	-15.05	0.0058	0.0086
4.4	-17.04	19.66	0.0098	0.0113

Frequency Error vs Temperature

Temperature (°C)	Frequency error (Hz)		Frequency error (ppm)	
	QPSK	16QAM	QPSK	16QAM
50	-12.47	15.55	0.0071	0.0089
40	-10.17	-15.05	0.0058	0.0086
30	-17.04	19.66	0.0098	0.0113
20	-8.57	17.88	0.0049	0.0102
10	-12.17	19.93	0.0070	0.0114
0	-11.67	17.60	0.0067	0.0101
- 10	-9.93	17.28	0.0057	0.0099

A.4 OCCUPIED BANDWIDTH

A.4.1 Occupied Bandwidth Results

Occupied bandwidth measurements are only provided for selected frequencies in order to reduce the amount of submitted data. Data were taken at the extreme and mid frequencies of the US Cellular/PCS frequency bands. The table below lists the measured 99% BW. Spectrum analyzer plots are included on the following pages.


The measurement method is from KDB 971168 4.2:

- a) The spectrum analyzer center frequency is set to the nominal EUT channel center frequency. The frequency span for the spectrum analyzer shall be set wide enough to capture all modulation products including the emission skirts (i.e., two to five times the OBW).
- b) The nominal IF filter bandwidth (3 dB RBW) shall be in the range of 1 to 5 % of the anticipated OBW, and the VBW shall be at least 3 times the RBW.
- c) Set the reference level of the instrument as required to keep the signal from exceeding the maximum input mixer level for linear operation. In general, the peak of the spectral envelope must be at least $10\log(\text{OBW} / \text{RBW})$ below the reference level.
- d) Set the detection mode to peak, and the trace mode to max hold.
- e) Use the 99 % power bandwidth function of the spectrum analyzer and report the measured bandwidth.

LTE band 2, 1.4MHz (99%)


Frequency(MHz)	Occupied Bandwidth (99%)(kHz)	
1880.0	QPSK	16QAM
	1089.74	1089.74

LTE band 2, 1.4MHz Bandwidth, QPSK (99% BW)

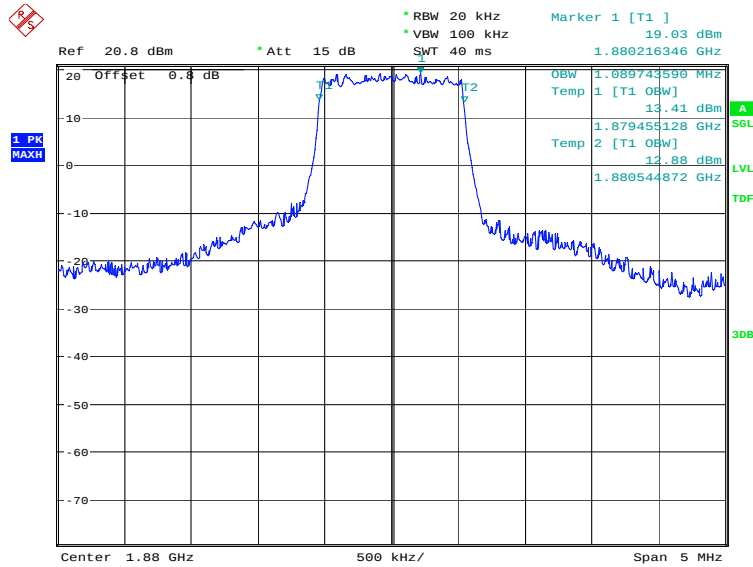

Date: 10.JUN.2019 21:35:29

LTE band 2, 1.4MHz Bandwidth, 16QAM (99% BW)

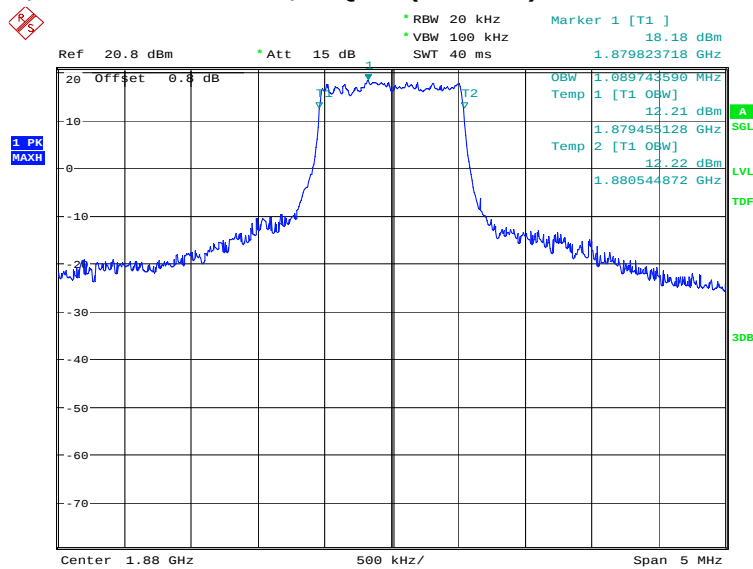


Date: 10.JUN.2019 21:36:53

LTE band 2, 3MHz (99%)


Frequency(MHz)	Occupied Bandwidth (99%)(kHz)	
1880.0	QPSK	16QAM
	2692.31	2692.31

LTE band 2, 3MHz Bandwidth, QPSK (99% BW)

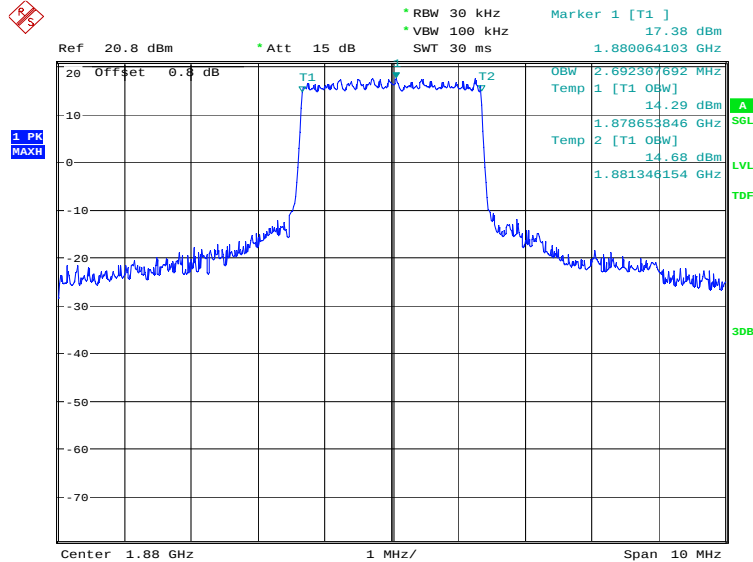

Date: 10.JUN.2019 21:39:07

LTE band 2, 3MHz Bandwidth, 16QAM (99% BW)

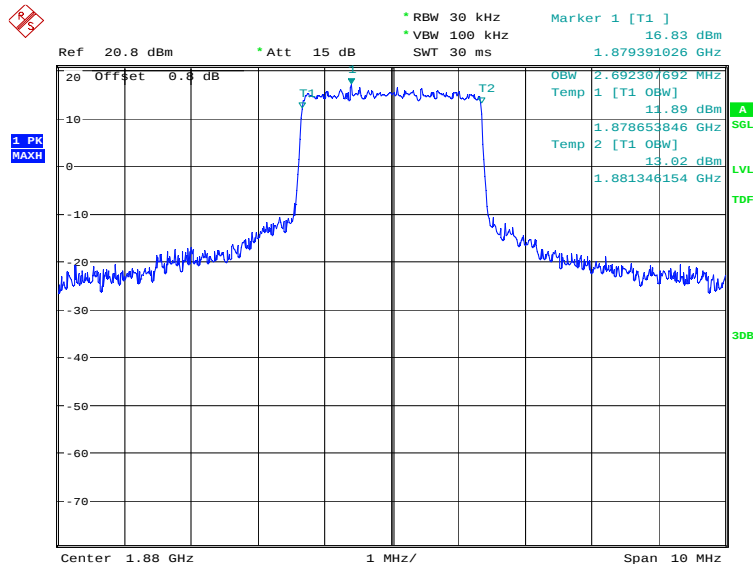


Date: 10.JUN.2019 21:40:31

LTE band 2, 5MHz (99%)


Frequency(MHz)	Occupied Bandwidth (99%)(kHz)	
1880.0	QPSK	16QAM
	4519.23	4519.23

LTE band 2, 5MHz Bandwidth, QPSK (99% BW)

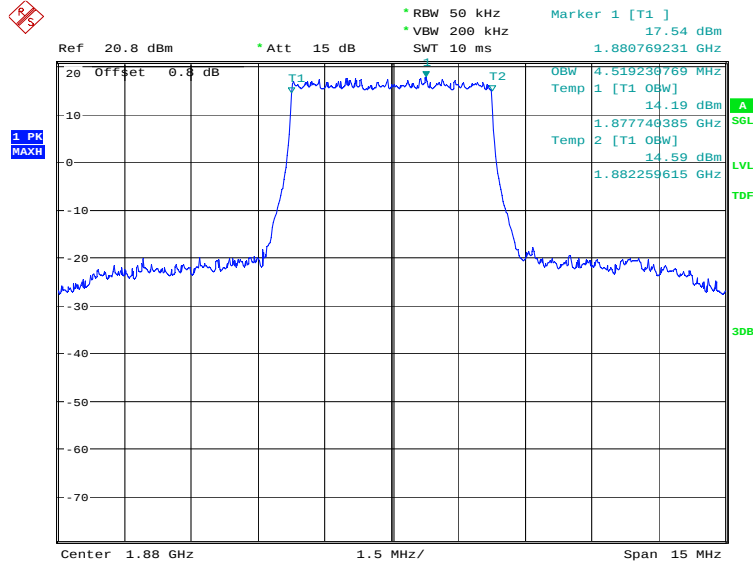

Date: 10.JUN.2019 21:42:44

LTE band 2, 5MHz Bandwidth, 16QAM (99% BW)

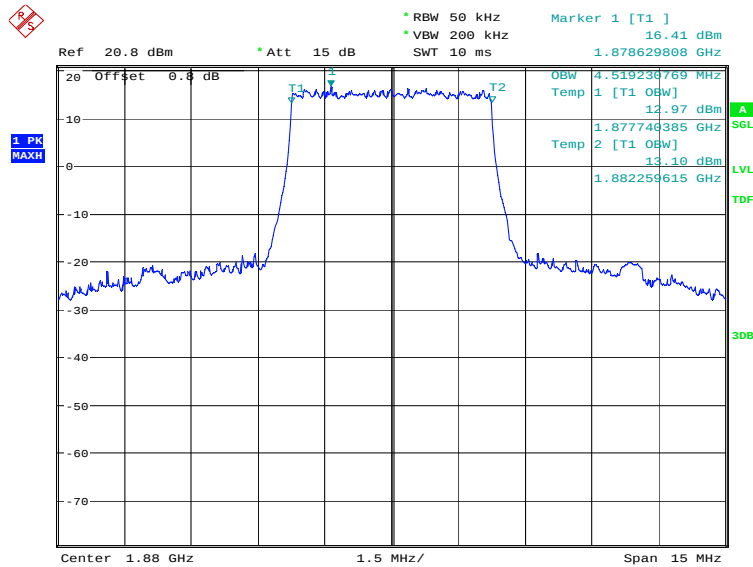


Date: 10.JUN.2019 21:44:08

LTE band 2, 10MHz (99%)


Frequency(MHz)	Occupied Bandwidth (99%)(kHz)	
1880.0	QPSK	16QAM
	8990.38	9038.46

LTE band 2, 10MHz Bandwidth, QPSK (99% BW)

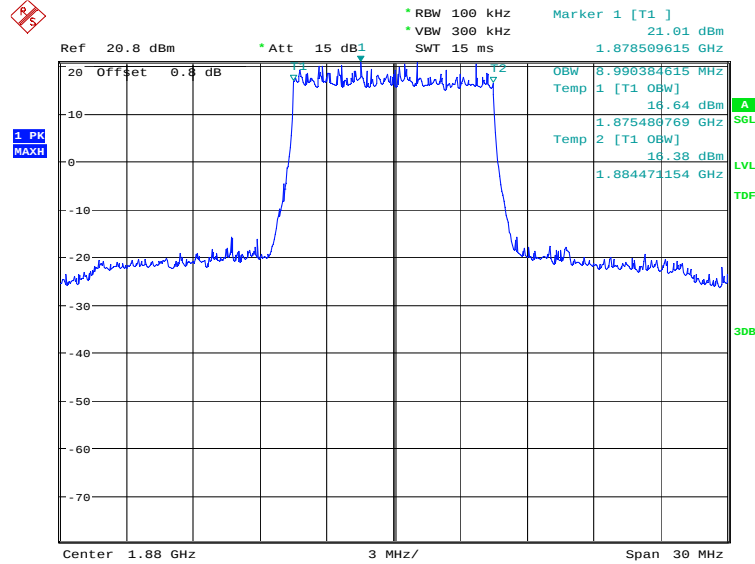

Date: 10.JUN.2019 21:46:22

LTE band 2, 10MHz Bandwidth, 16QAM (99% BW)

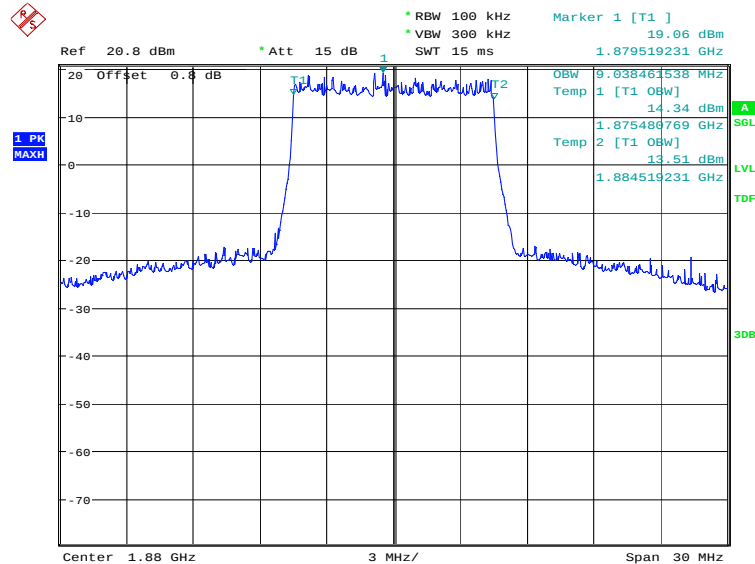


Date: 10.JUN.2019 21:47:46

LTE band 2, 15MHz (99%)


Frequency(MHz)	Occupied Bandwidth (99%)(kHz)	
1880.0	QPSK	16QAM
	13557.69	13485.58

LTE band 2, 15MHz Bandwidth, QPSK (99% BW)

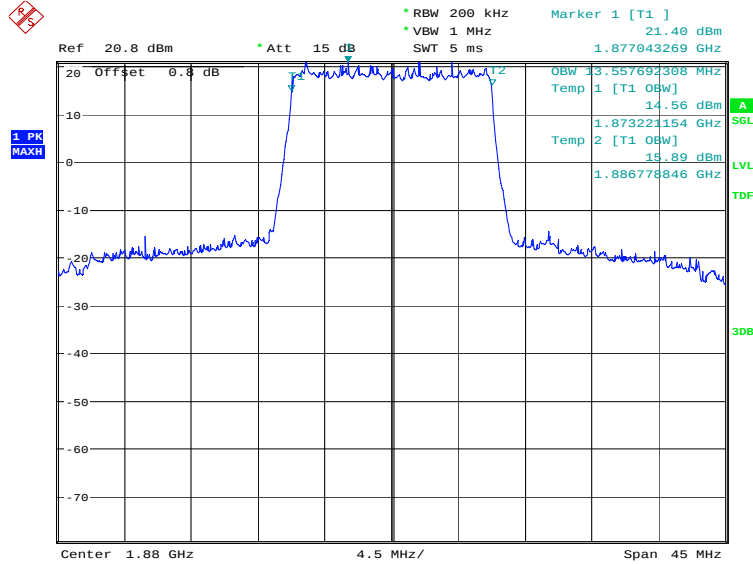

Date: 10.JUN.2019 21:50:00

LTE band 2, 15MHz Bandwidth, 16QAM (99% BW)

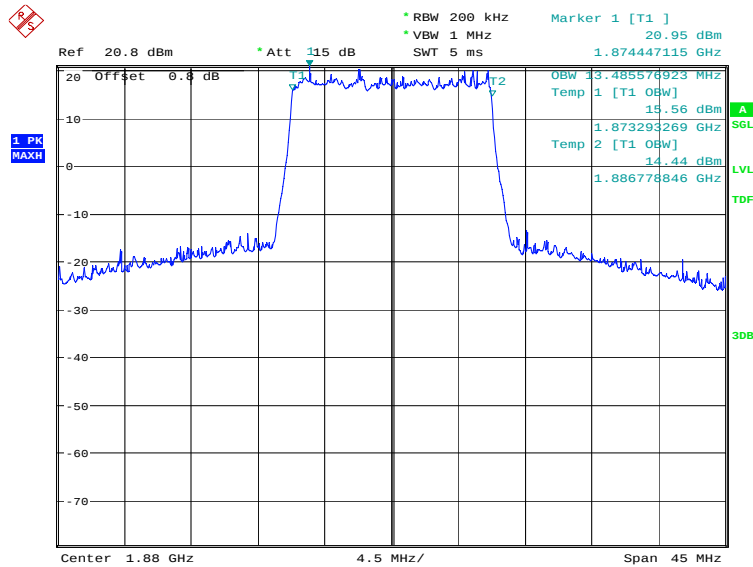


Date: 10.JUN.2019 21:51:24

LTE band 2, 20MHz (99%)


Frequency(MHz)	Occupied Bandwidth (99%)(kHz)	
1880.0	QPSK	16QAM
	17884.62	17980.77

LTE band 2, 20MHz Bandwidth, QPSK (99% BW)

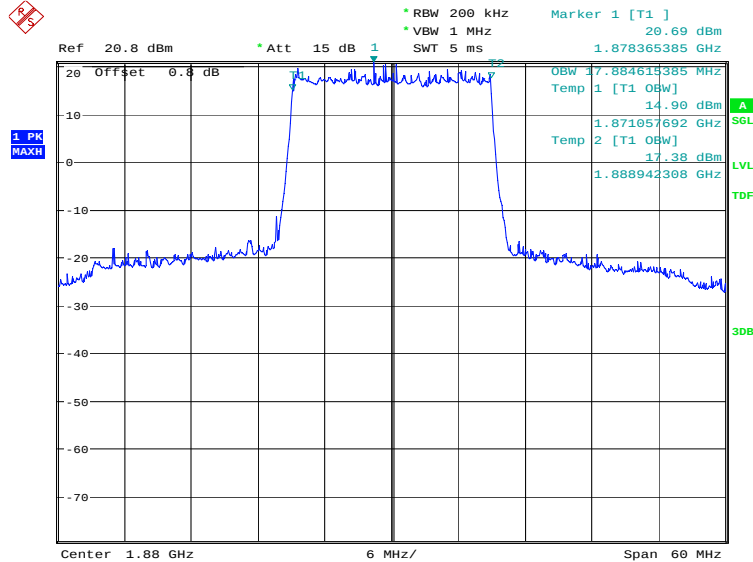

Date: 10.JUN.2019 21:53:37

LTE band 2, 20MHz Bandwidth, 16QAM (99% BW)

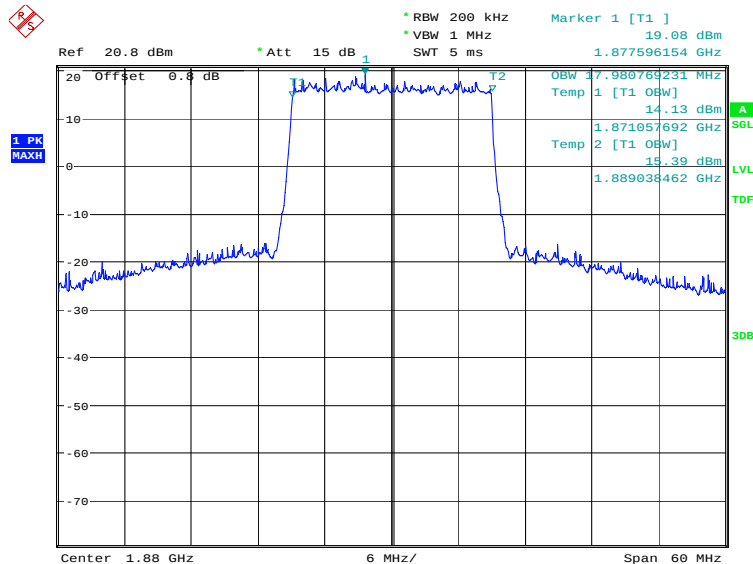


Date: 10.JUN.2019 21:55:02

LTE band 5, 1.4MHz (99%)


Frequency(MHz)	Occupied Bandwidth (99%)(kHz)	
836.5	QPSK	16QAM
	1105.77	1089.74

LTE band 5, 1.4MHz Bandwidth, QPSK (99% BW)

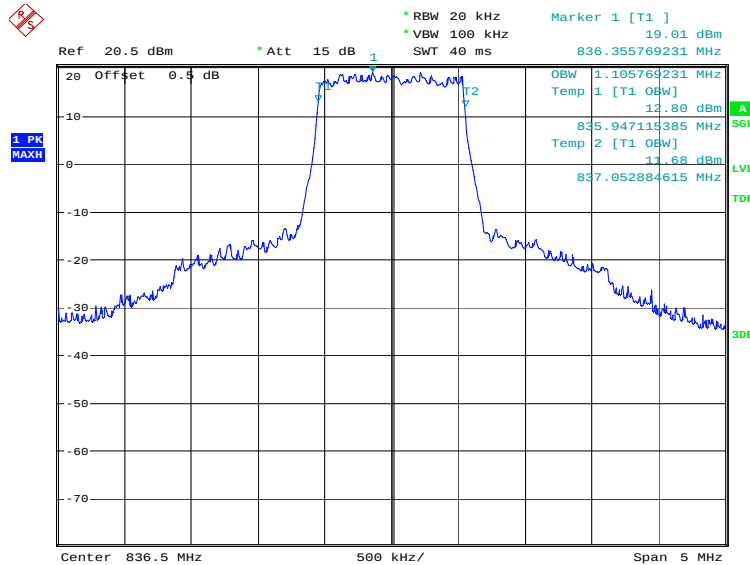

Date: 10.JUN.2019 21:57:16

LTE band 5, 1.4MHz Bandwidth, 16QAM (99% BW)

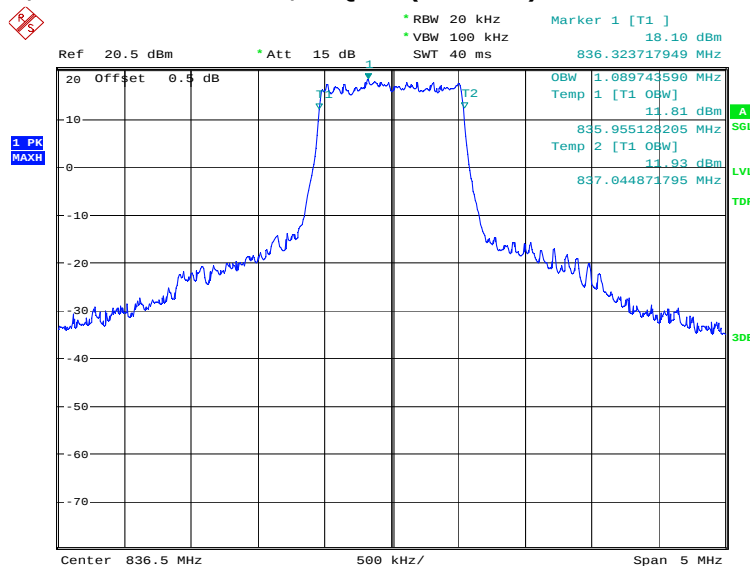


Date: 10.JUN.2019 21:58:41

LTE band 5, 3MHz (99%)


Frequency(MHz)	Occupied Bandwidth (99%)(kHz)	
836.5	QPSK	16QAM
	2692.31	2692.31

LTE band 5, 3MHz Bandwidth, QPSK (99% BW)

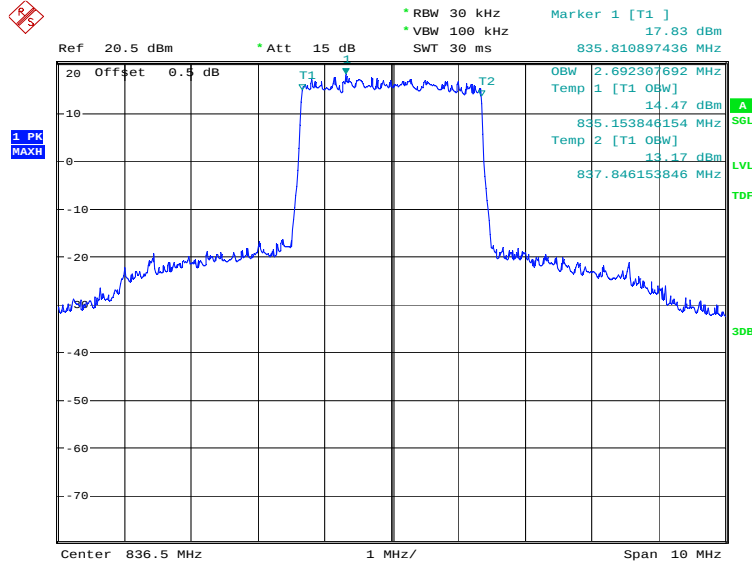

Date: 10.JUN.2019 22:00:54

LTE band 5, 3MHz Bandwidth, 16QAM (99% BW)

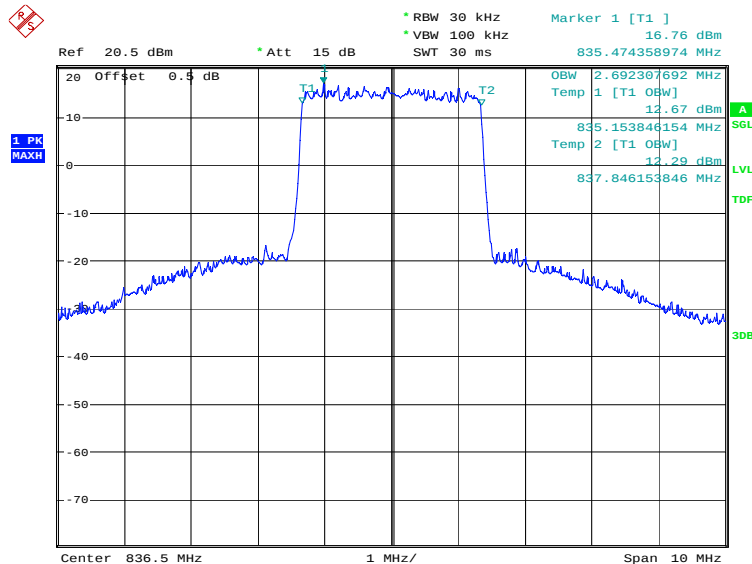


Date: 10.JUN.2019 22:02:19

LTE band 5, 5MHz (99%)


Frequency(MHz)	Occupied Bandwidth (99%)(kHz)	
836.5	QPSK	16QAM
	4519.23	4519.23

LTE band 5, 5MHz Bandwidth, QPSK (99% BW)

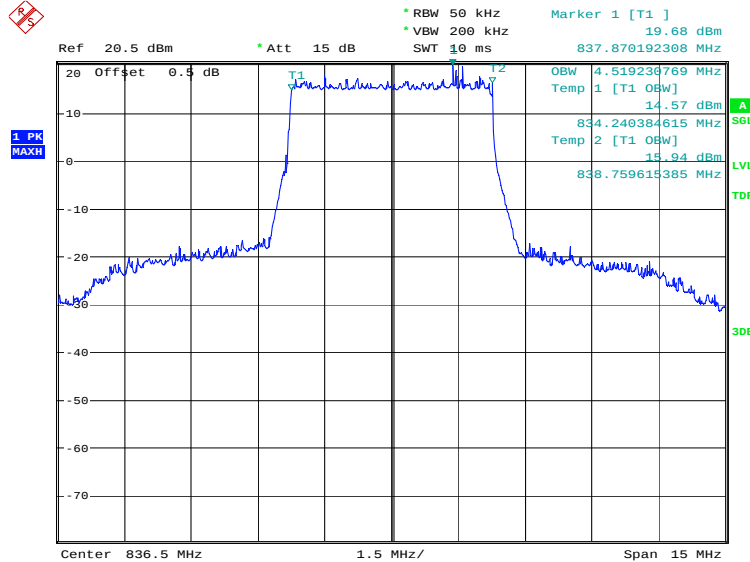

Date: 10.JUN.2019 22:04:32

LTE band 5, 5MHz Bandwidth, 16QAM (99% BW)

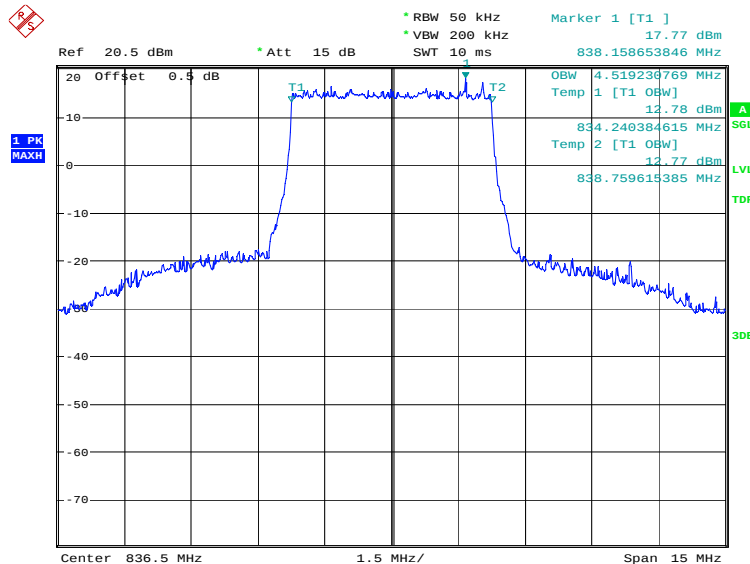


Date: 10.JUN.2019 22:05:57

LTE band 5, 10MHz (99%)


Frequency(MHz)	Occupied Bandwidth (99%)(kHz)	
836.5	QPSK	16QAM
	8990.38	8942.31

LTE band 5, 10MHz Bandwidth, QPSK (99% BW)

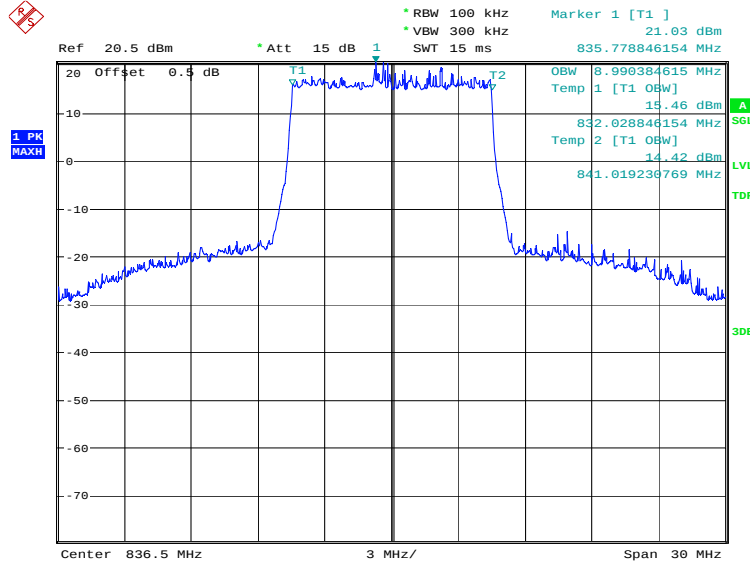

Date: 10.JUN.2019 22:08:10

LTE band 5, 10MHz Bandwidth, 16QAM (99% BW)

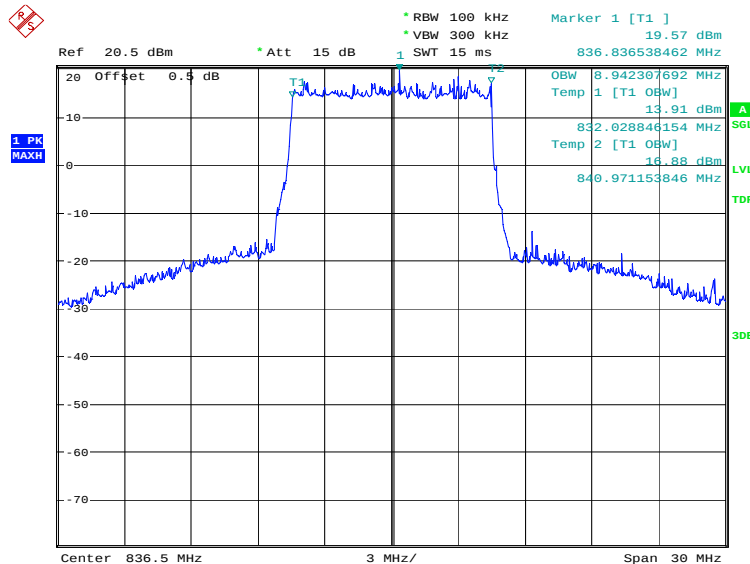


Date: 10.JUN.2019 22:09:34

LTE band 7, 5MHz (99%)


Frequency(MHz)	Occupied Bandwidth (99%)(kHz)	
2535.0	QPSK	16QAM
	4495.19	4495.19

LTE band 7, 5MHz Bandwidth, QPSK (99% BW)

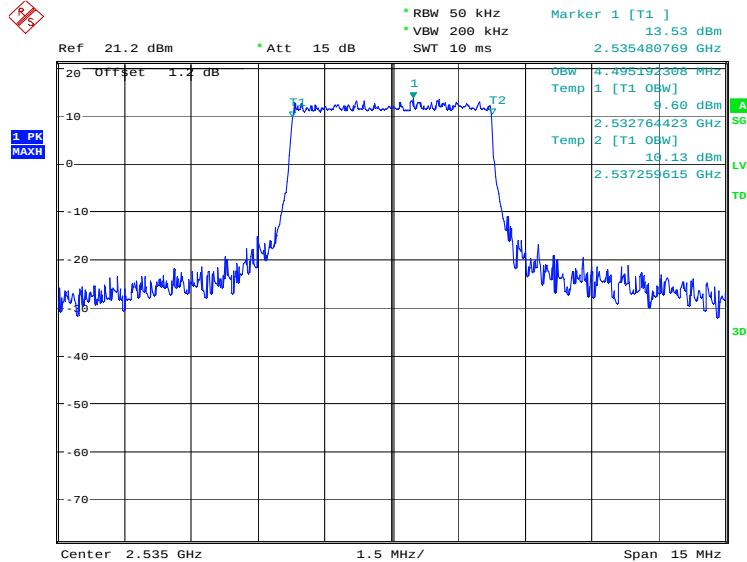

Date: 10.JUN.2019 22:11:49

LTE band 7, 5MHz Bandwidth, 16QAM (99% BW)

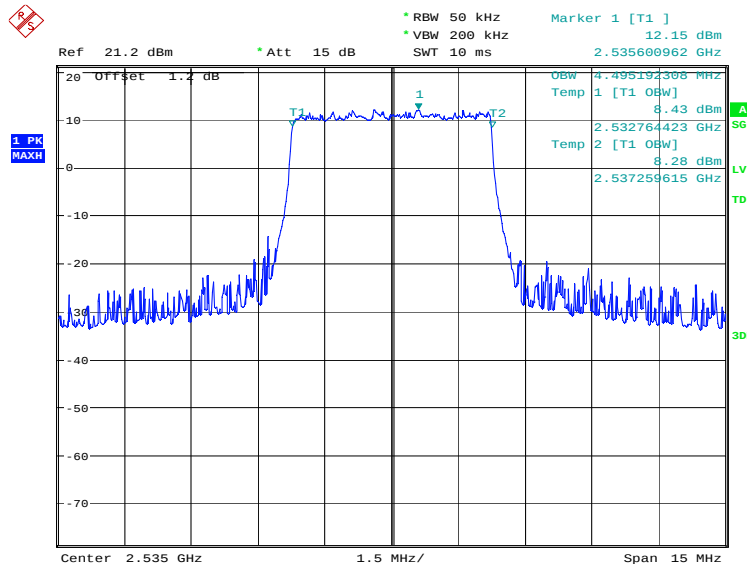


Date: 10.JUN.2019 22:13:13

LTE band 7, 10MHz (99%)


Frequency(MHz)	Occupied Bandwidth (99%)(kHz)	
2535.0	QPSK	16QAM
	8990.38	9038.46

LTE band 7, 10MHz Bandwidth, QPSK (99% BW)

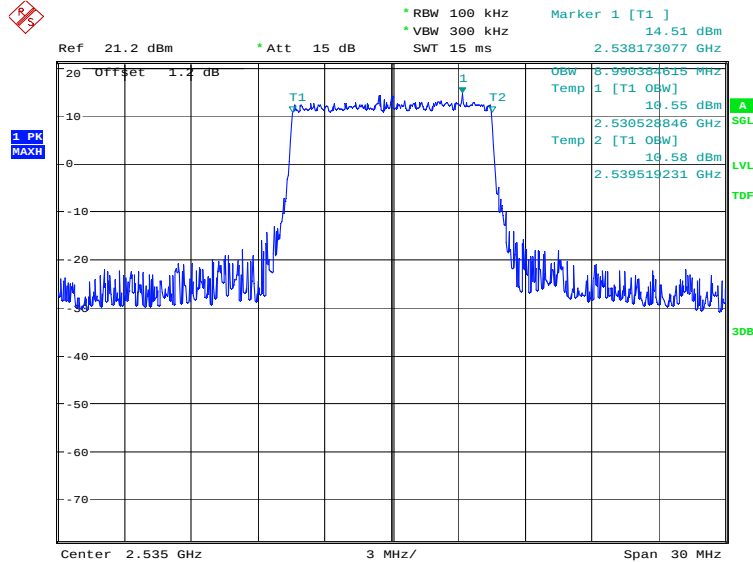

Date: 10.JUN.2019 22:15:27

LTE band 7, 10MHz Bandwidth, 16QAM (99% BW)

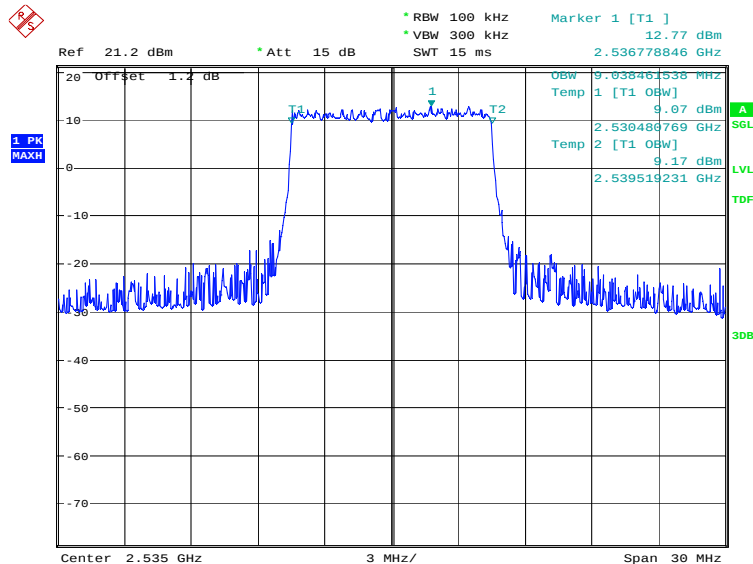


Date: 10.JUN.2019 22:16:51

LTE band 7, 15MHz (99%)


Frequency(MHz)	Occupied Bandwidth (99%)(kHz)	
2535.0	QPSK	16QAM
	13485.58	13485.58

LTE band 7, 15MHz Bandwidth, QPSK (99% BW)

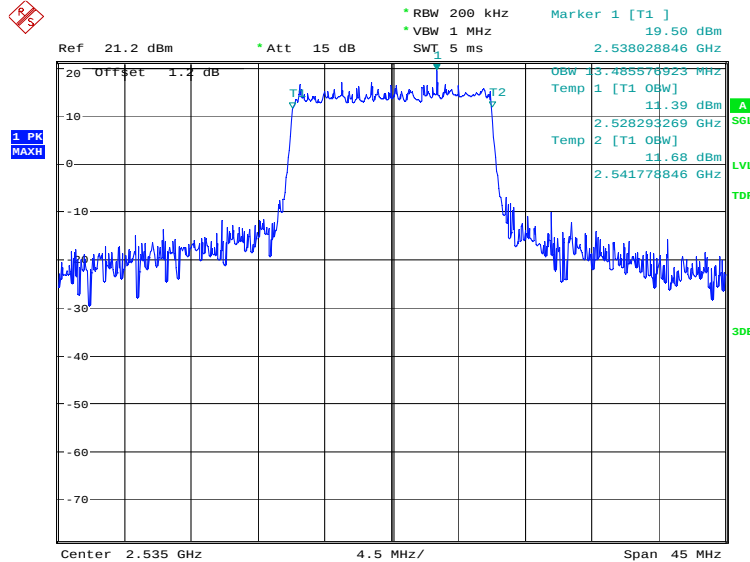

Date: 10.JUN.2019 22:19:05

LTE band 7, 15MHz Bandwidth, 16QAM (99% BW)

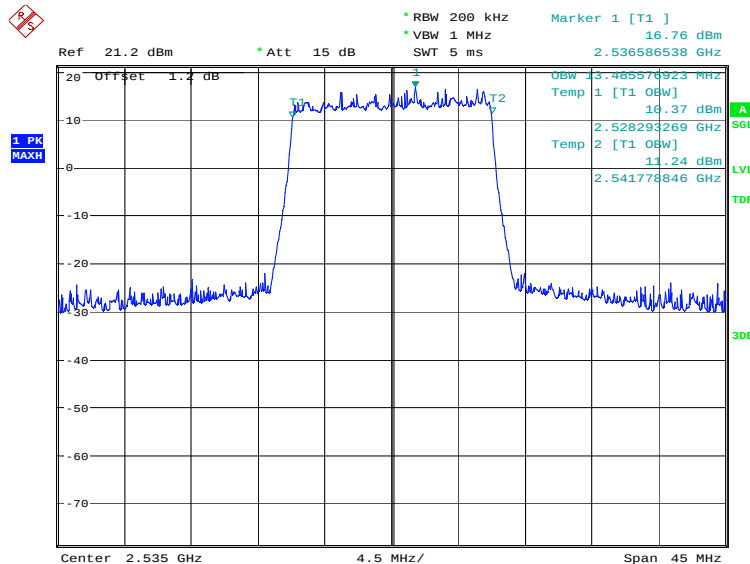


Date: 10.JUN.2019 22:20:29

LTE band 7, 20MHz (99%)


Frequency(MHz)	Occupied Bandwidth (99%)(kHz)	
2535.0	QPSK	16QAM
	17980.77	17884.62

LTE band 7, 20MHz Bandwidth, QPSK (99% BW)

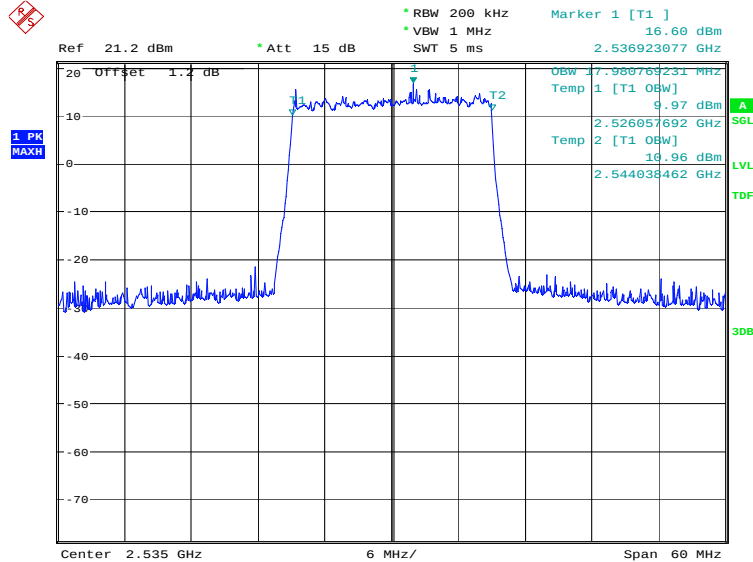

Date: 10.JUN.2019 22:22:43

LTE band 7, 20MHz Bandwidth, 16QAM (99% BW)

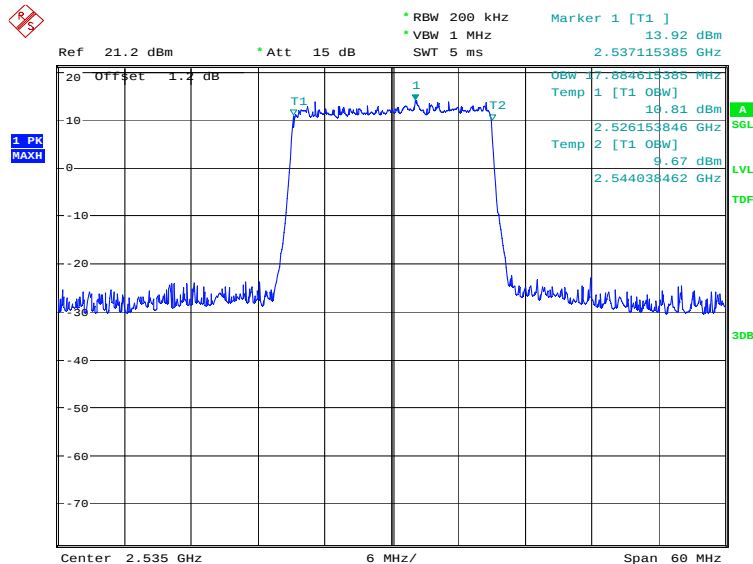


Date: 10.JUN.2019 22:24:07

LTE band 12, 1.4MHz (99%)


Frequency(MHz)	Occupied Bandwidth (99%)(kHz)	
707.5	QPSK	16QAM
	1089.74	1089.74

LTE band 12, 1.4MHz Bandwidth, QPSK (99% BW)

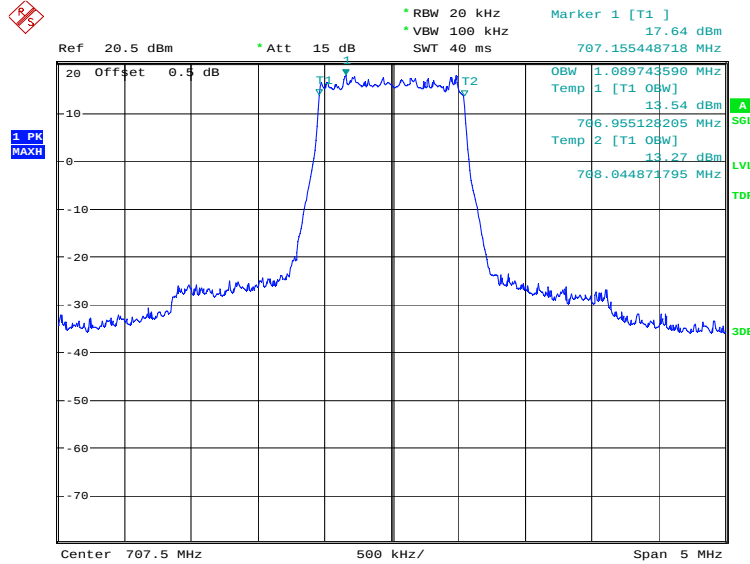

Date: 27.SEP.2019 13:04:23

LTE band 12, 1.4MHz Bandwidth, 16QAM (99% BW)

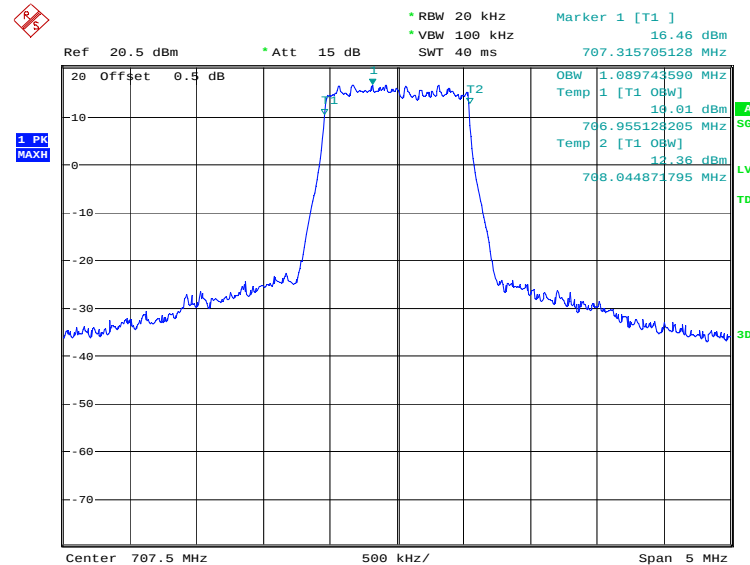

Date: 27.SEP.2019 13:05:47

Frequency(MHz)	Occupied Bandwidth (99%)(kHz)	
707.5	QPSK	16QAM
	2692.31	2692.31

Ref 20.5 dBm Att 15 dB RBW 30 kHz VBW 100 kHz SWT 30 ms Marker 1 [T1] 17.33 dBm 707.836538462 MHz

20 Offset 0.5 dB

1 PK MAXH

OBW 2.692307692 MHz
Temp 1 [T1 OBW] 11.30 dBm
706.153846154 MHz
Temp 2 [T1 OBW] 12.42 dBm
708.846153846 MHz

Center 707.5 MHz 1 MHz/ Span 10 MHz


[illegible]

©Copyright. All rights reserved by CTTL.

LTE band 12, 5MHz (99%)


Frequency(MHz)	Occupied Bandwidth (99%)(kHz)	
707.5	QPSK	16QAM
	4519.23	4495.19

LTE band 12, 5MHz Bandwidth, QPSK (99% BW)

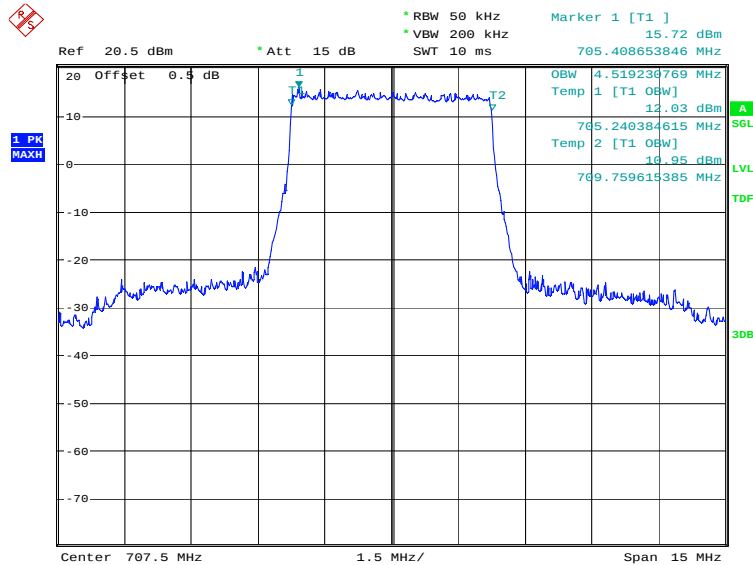

Date: 27.SEP.2019 13:11:38

LTE band 12, 5MHz Bandwidth, 16QAM (99% BW)

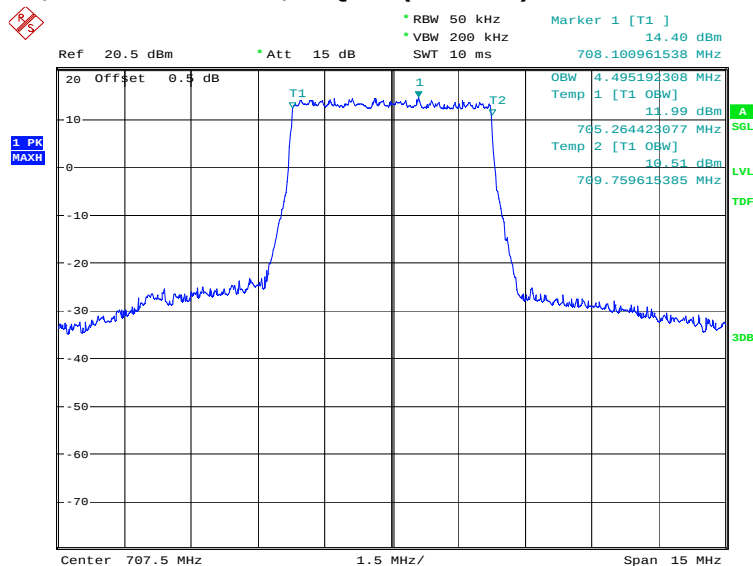


Date: 27.SEP.2019 13:13:02

LTE band 12, 10MHz (99%)


Frequency(MHz)	Occupied Bandwidth (99%)(kHz)	
707.5	QPSK	16QAM
	8990.38	8990.38

LTE band 12, 10MHz Bandwidth, QPSK (99% BW)

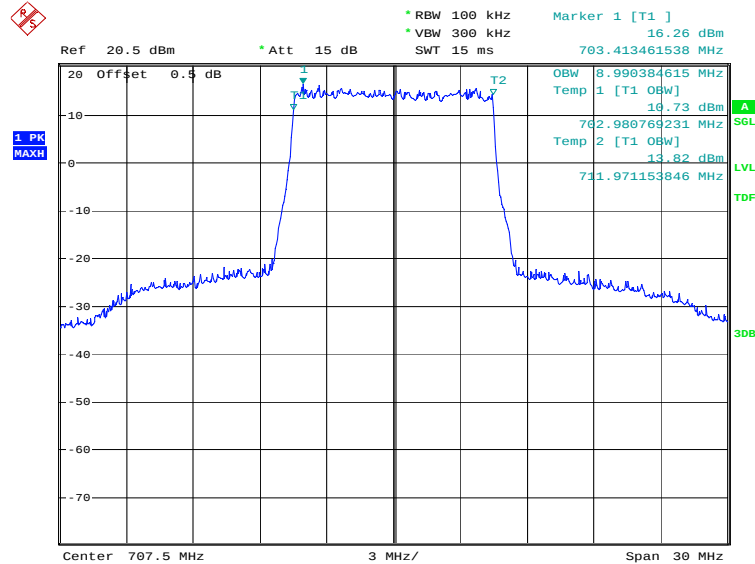

Date: 27.SEP.2019 13:15:15

LTE band 12, 10MHz Bandwidth, 16QAM (99% BW)

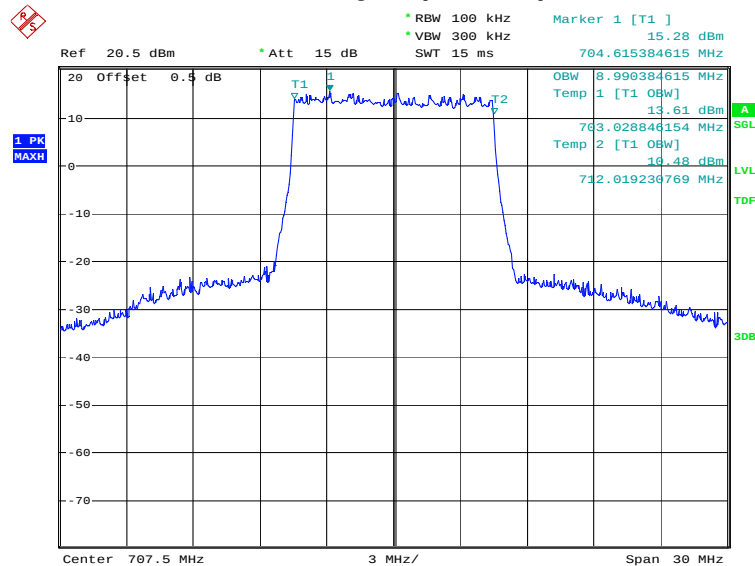


Date: 27.SEP.2019 13:16:39

LTE band 17, 5MHz(99% BW)


Frequency(MHz)	Occupied Bandwidth (99% BW) (kHz)	
710.0	QPSK	16QAM
	4519.23	4495.19

LTE band 17, 5MHz Bandwidth, QPSK (99% BW)

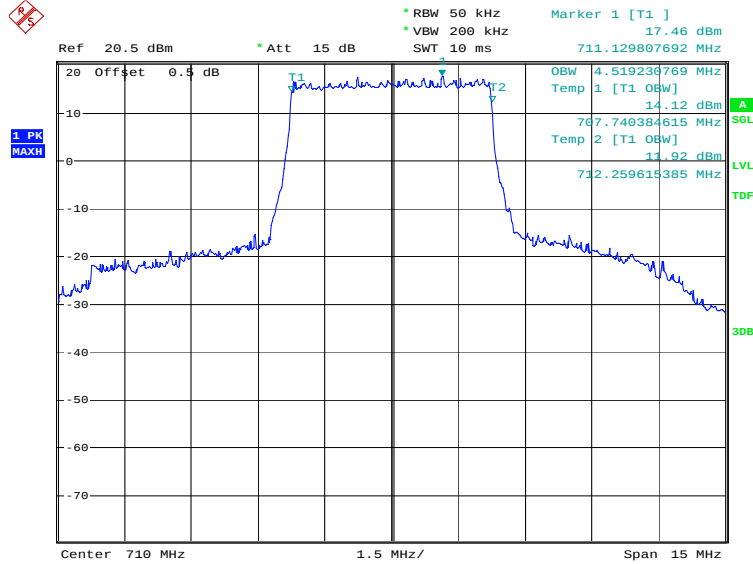

Date: 10.JUN.2019 22:26:21

LTE band 17, 5MHz Bandwidth,16QAM (99% BW)

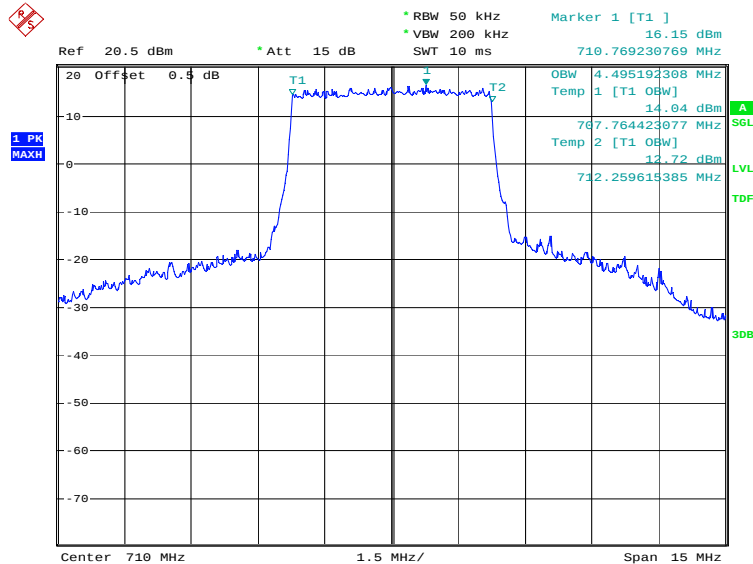


Date: 10.JUN.2019 22:27:46

LTE band 17, 10MHz(99% BW)


Frequency(MHz)	Occupied Bandwidth (99% BW) (kHz)	
710.0	QPSK	16QAM
	8942.31	8942.31

LTE band 17, 10MHz Bandwidth, QPSK (99% BW)

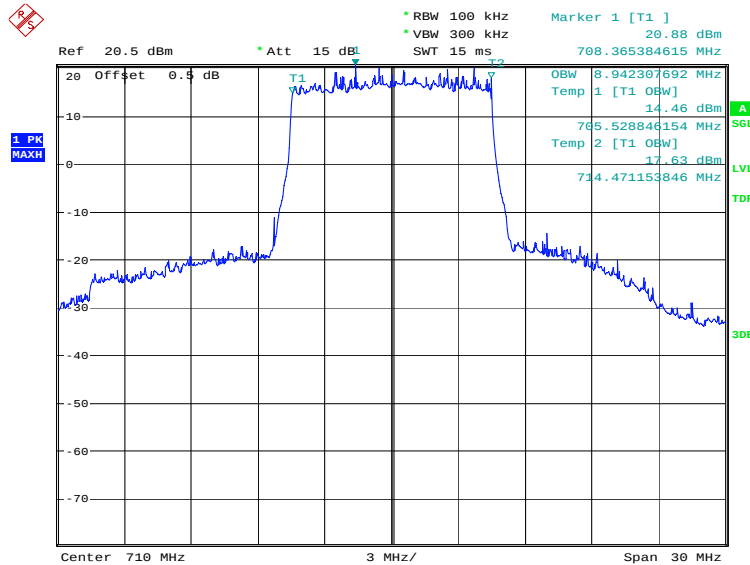

Date: 10.JUN.2019 22:29:59

LTE band 17, 10MHz Bandwidth,16QAM (99% BW)

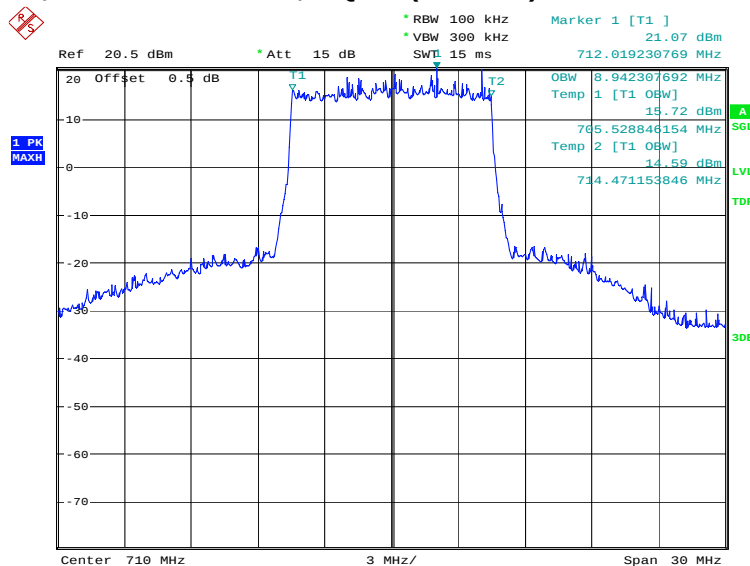


Date: 10.JUN.2019 22:31:24

LTE band 66, 1.4MHz (99%)


Frequency(MHz)	Occupied Bandwidth (99%)(kHz)	
1745.0	QPSK	16QAM
	1081.73	1089.74

LTE band 66, 1.4MHz Bandwidth, QPSK (99% BW)

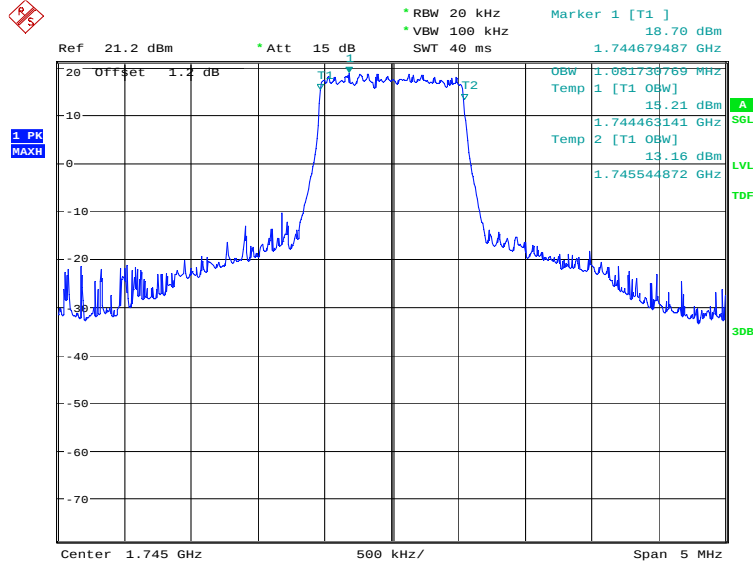

Date: 10.JUN.2019 22:33:39

LTE band 66, 1.4MHz Bandwidth, 16QAM (99% BW)

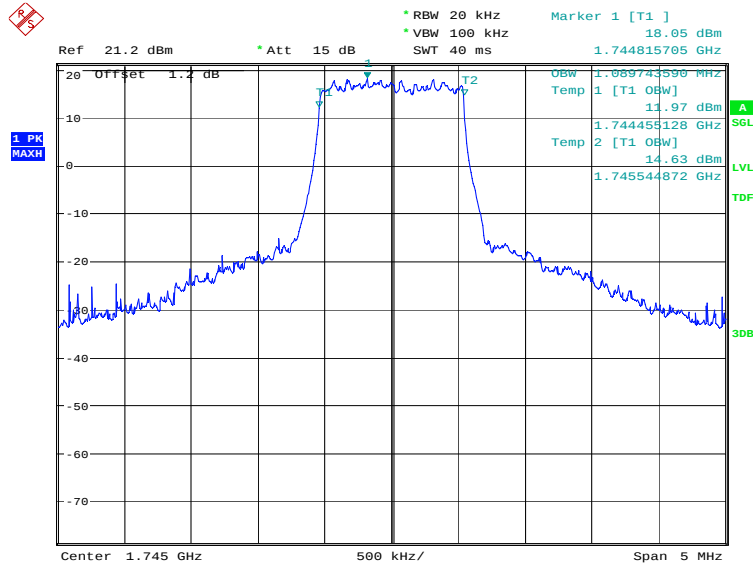


Date: 10.JUN.2019 22:35:03

LTE band 66, 3MHz (99%)


Frequency(MHz)	Occupied Bandwidth (99%)(kHz)	
1745.0	QPSK	16QAM
	2692.31	2692.31

LTE band 66, 3MHz Bandwidth, QPSK (99% BW)

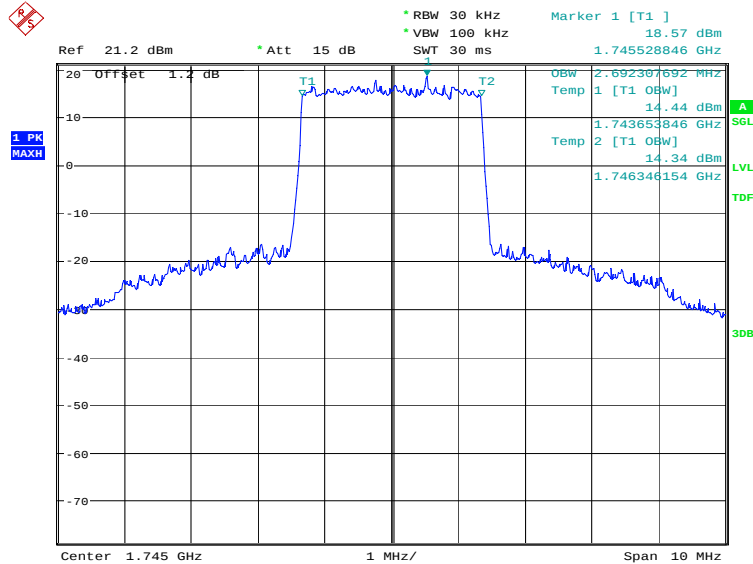

Date: 10.JUN.2019 22:37:17

LTE band 66, 3MHz Bandwidth, 16QAM (99% BW)

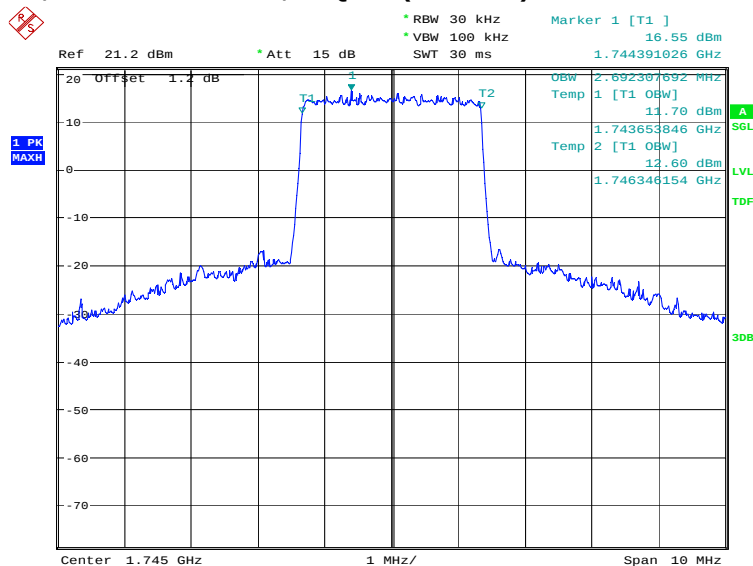

Date: 10.JUN.2019 22:38:41

Frequency(MHz)	Occupied Bandwidth (99%)(kHz)	
1745.0	QPSK	16QAM
	4495.19	4471.15

The screenshot displays a spectrum analyzer interface with the following details:

- Top Bar:**
 - Left: A red diamond icon with the letter 'R' and a green diamond icon with the letter 'S'.
 - Center: Measurement parameters including 'Ref 21.2 dBm', 'Att 15 dB', and a green dot.
 - Right: Settings for 'RBW 50 kHz', 'VBW 200 kHz', 'SWT 10 ms', and a frequency value '19.75 dBm'.
- Plot Area:**
 - Y-axis: Power level in dB, ranging from -70 to 20.
 - X-axis: Frequency in GHz, ranging from 1.745 to 1.745144231.
 - Signal: A blue trace showing a signal with two markers, T1 and T2, indicating a peak and a dip.
 - Grid: A grid is visible on the plot area.
- Right Panel:**
 - Marker 1 [T1]: 4.495192308 MHz, 16.22 dBm.
 - Marker 2 [T2]: 1.742764423 GHz, 14.27 dBm.
 - Other values: 1.745144231 GHz, 1.747259615 GHz.
- Bottom Bar:**
 - Center: 1.745 GHz
 - Span: 15 MHz
- Left Panel:**
 - A blue box with the text '1 PK MAXH'.

Ref 21.2 dBm

* Att 15 dB

* RBW 50 kHz

* VBW 200 kHz

SWT 10 ms

Marker 1 [T1] 18.65 dBm

1.743870192 GHz

Offset 1.2 dB

T1

T2

OBW 4.471193846 MHz

Temp 1 [T1 OBW] 14.49 dBm

1.742764423 GHz

Temp 2 [T1 OBW] 12.65 dBm

1.747235577 GHz

1.74 dBm

Center 1.745 GHz

1.5 MHz/


Span 15 MHz

©Copyright. All rights reserved by CTTL.

LTE band 66, 10MHz (99%)


Frequency(MHz)	Occupied Bandwidth (99%)(kHz)	
1745.0	QPSK	16QAM
	8990.38	8942.31

LTE band 66, 10MHz Bandwidth, QPSK (99% BW)

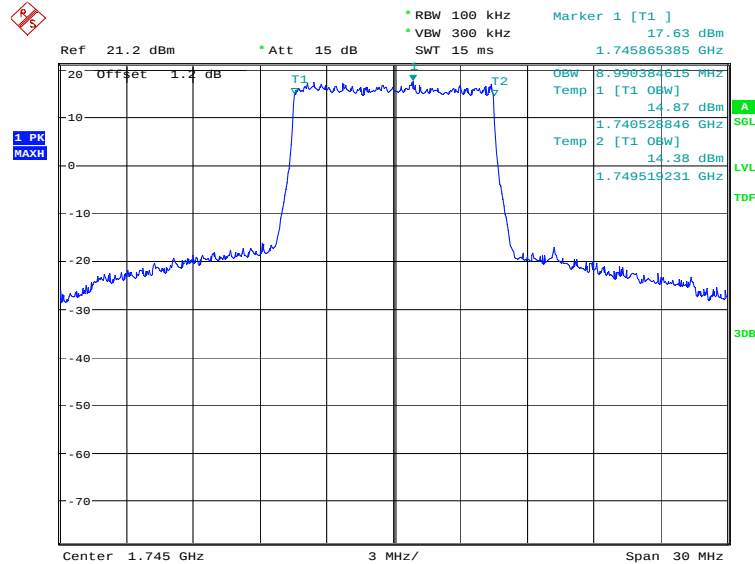

Date: 10.JUN.2019 22:44:33

LTE band 66, 10MHz Bandwidth, 16QAM (99% BW)

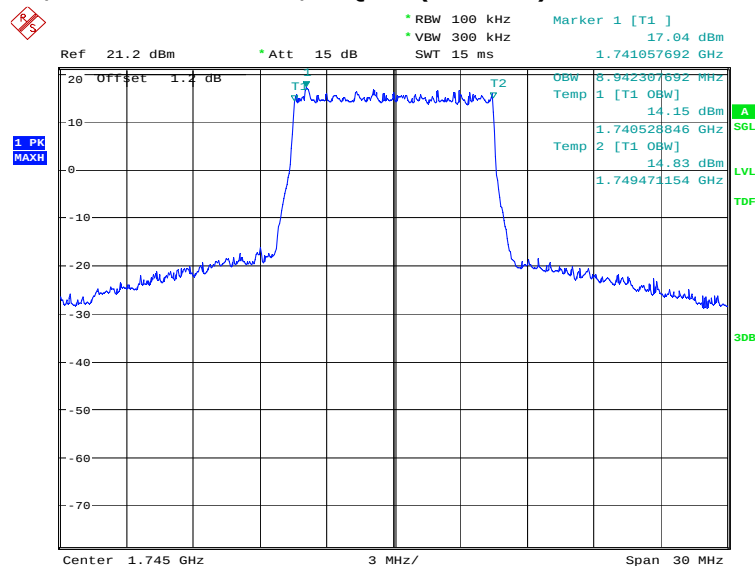


Date: 10.JUN.2019 22:45:57

LTE band 66, 15MHz (99%)


Frequency(MHz)	Occupied Bandwidth (99%)(kHz)	
1745.0	QPSK	16QAM
	13557.69	13485.58

LTE band 66, 15MHz Bandwidth, QPSK (99% BW)

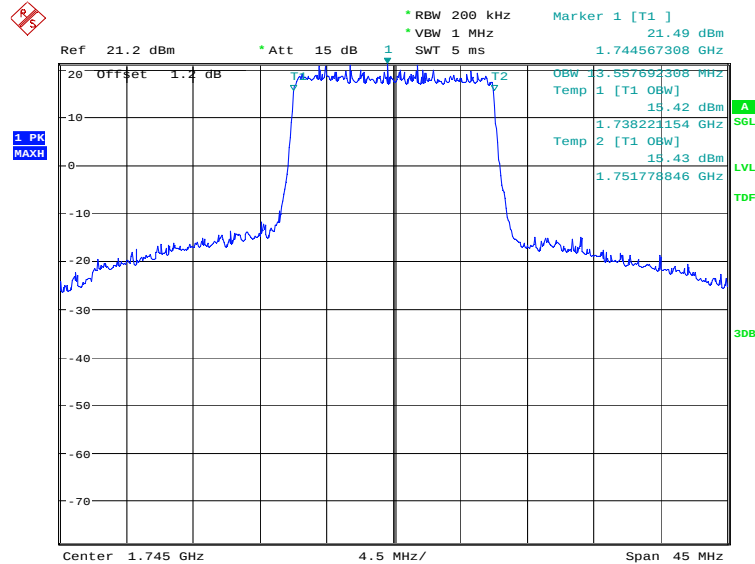

Date: 10.JUN.2019 22:48:11

LTE band 66, 15MHz Bandwidth, 16QAM (99% BW)

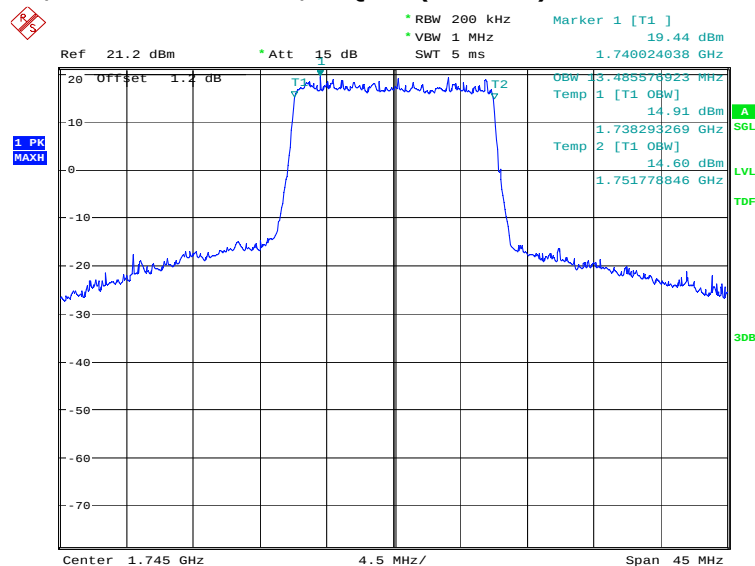


Date: 10.JUN.2019 22:49:35

LTE band 66, 20MHz (99%)


Frequency(MHz)	Occupied Bandwidth (99%)(kHz)	
1745.0	QPSK	16QAM
	17980.77	17980.77

LTE band 66, 20MHz Bandwidth, QPSK (99% BW)

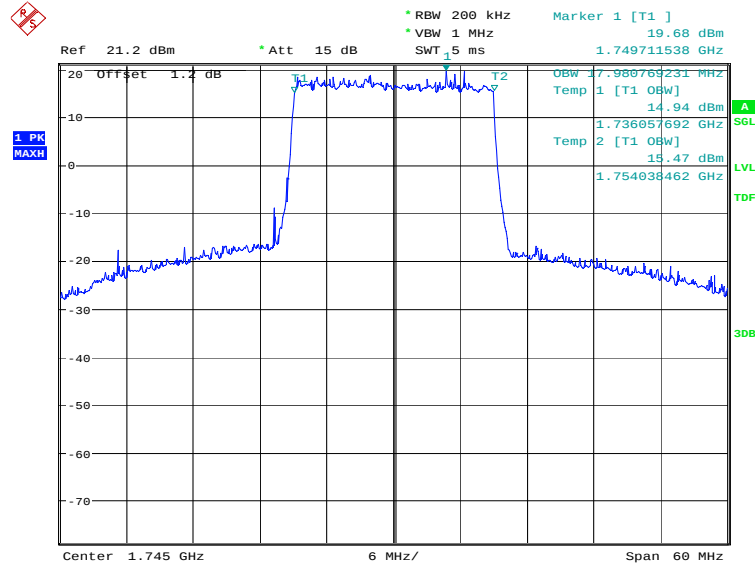

Date: 10.JUN.2019 22:51:49

LTE band 66, 20MHz Bandwidth, 16QAM (99% BW)

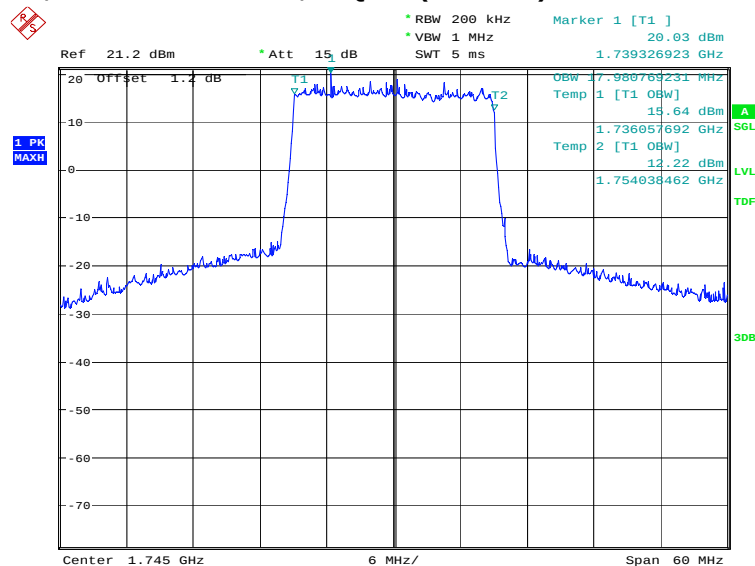

Date: 10.JUN.2019 22:53:13



A.5 EMISSION BANDWIDTH


A.5.1 Emission Bandwidth Results

The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power. Table below lists the measured -26dBc BW. Spectrum analyzer plots are included on the following pages.

LTE band 2, 1.4MHz (-26dBc)


Frequency(MHz)	Occupied Bandwidth (-26dBc)(kHz)	
1880.0	QPSK	16QAM
	1306.09	1322.12

LTE band 2, 1.4MHz Bandwidth, QPSK (-26dBc BW)

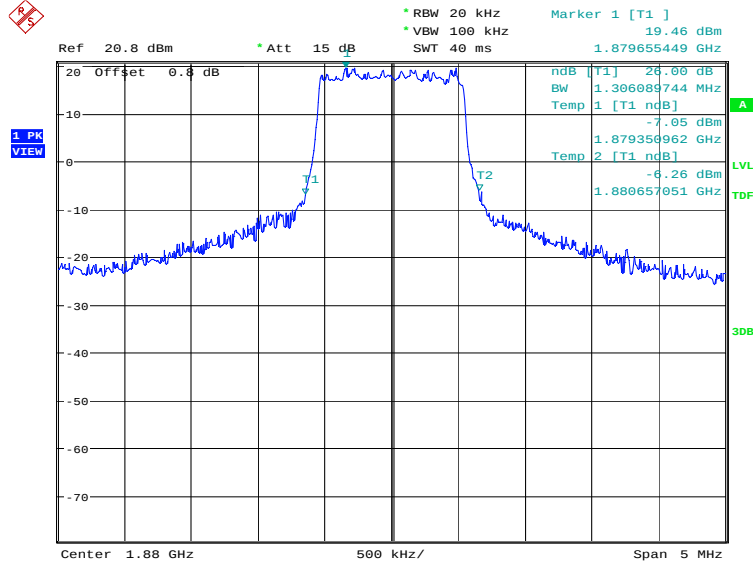

Date: 10.JUN.2019 22:55:13

LTE band 2, 1.4MHz Bandwidth, 16QAM (-26dBc BW)

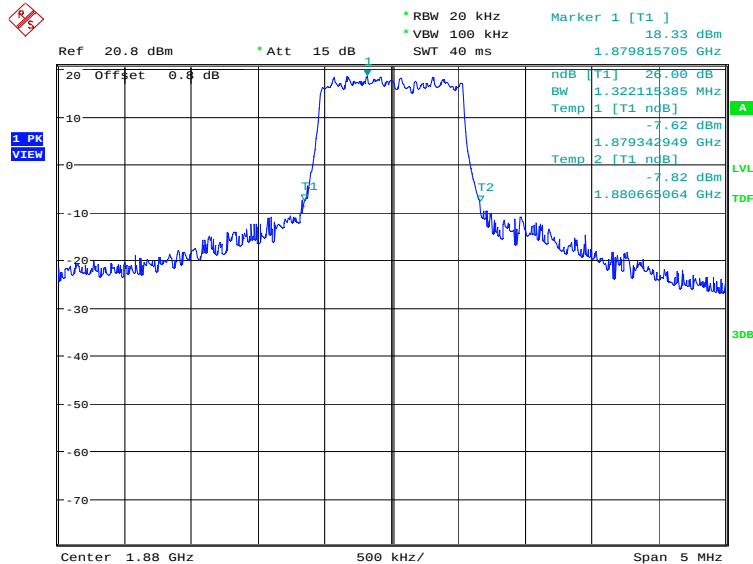


Date: 10.JUN.2019 22:56:38

LTE band 2, 3MHz (-26dBc)


Frequency(MHz)	Occupied Bandwidth (-26dBc)(kHz)	
1880.0	QPSK	16QAM
	2900.64	2948.72

LTE band 2, 3MHz Bandwidth, QPSK (-26dBc BW)

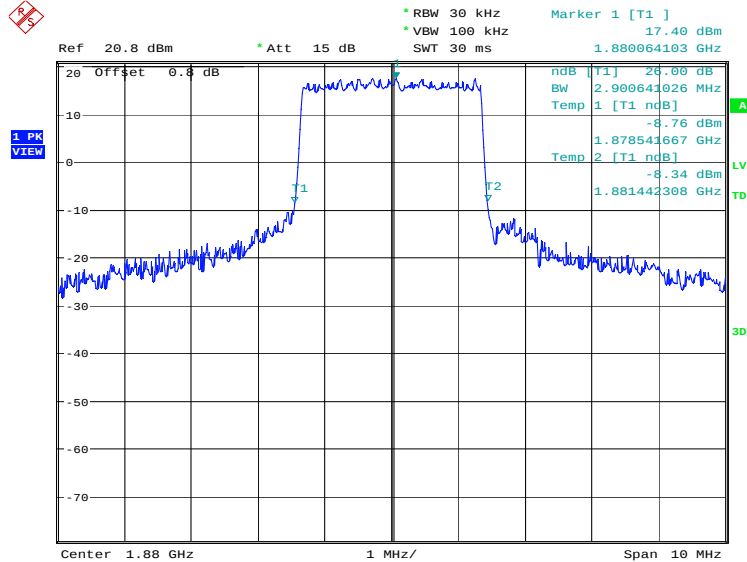

Date: 10.JUN.2019 22:58:52

LTE band 2, 3MHz Bandwidth, 16QAM (-26dBc BW)

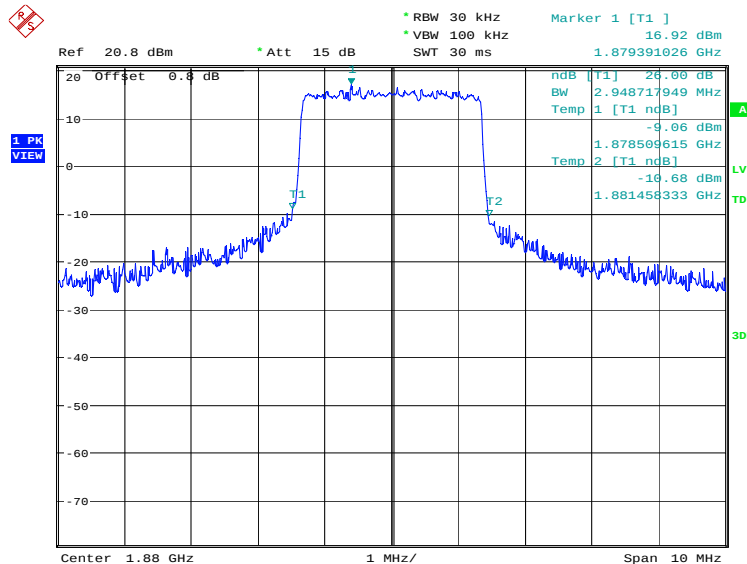


Date: 10.JUN.2019 23:00:17

LTE band 2, 5MHz (-26dBc)


Frequency(MHz)	Occupied Bandwidth (-26dBc)(kHz)	
1880.0	QPSK	16QAM
	5048.08	5120.19

LTE band 2, 5MHz Bandwidth, QPSK (-26dBc BW)

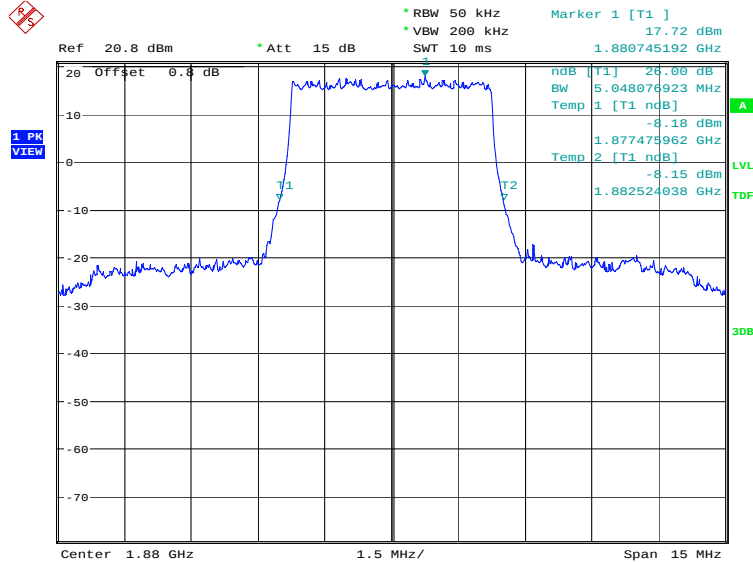

Date: 10.JUN.2019 23:02:31

LTE band 2, 5MHz Bandwidth, 16QAM (-26dBc BW)

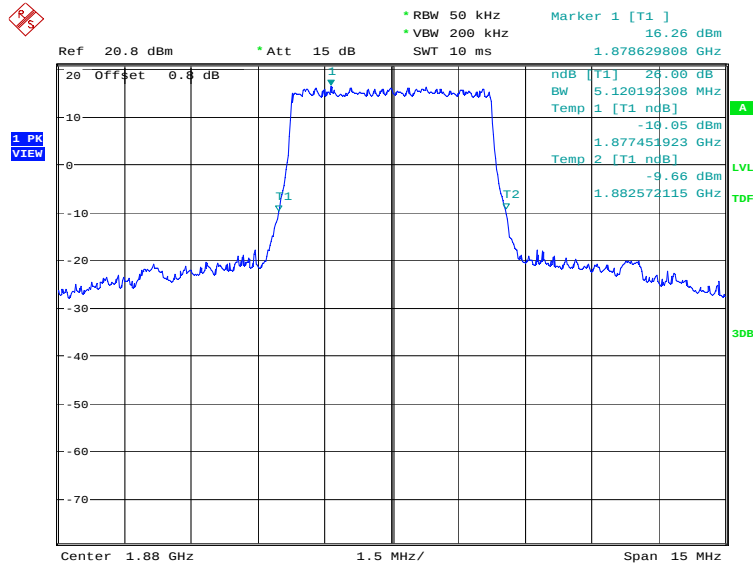


Date: 10.JUN.2019 23:03:56

LTE band 2, 10MHz (-26dBc)


Frequency(MHz)	Occupied Bandwidth (-26dBc)(kHz)	
1880.0	QPSK	16QAM
	10000.00	10048.08

LTE band 2, 10MHz Bandwidth, QPSK (-26dBc BW)

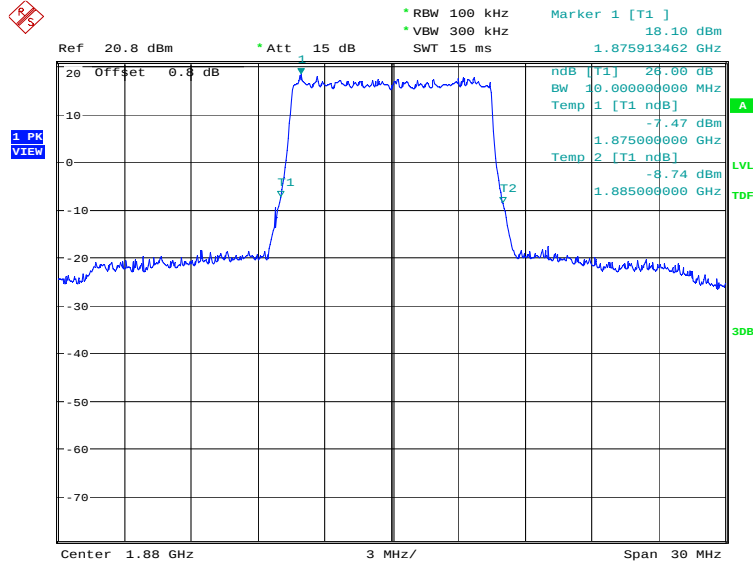

Date: 10.JUN.2019 23:06:11

LTE band 2, 10MHz Bandwidth, 16QAM (-26dBc BW)

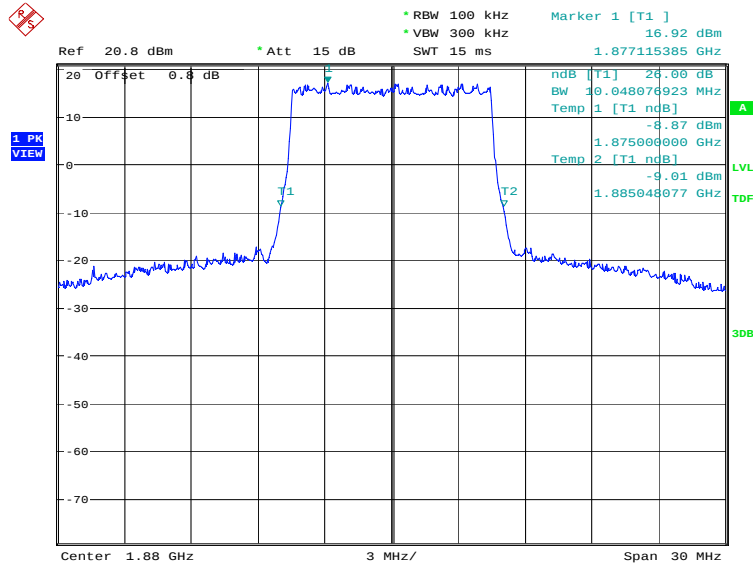


Date: 10.JUN.2019 23:07:36

LTE band 2, 15MHz (-26dBc)


Frequency(MHz)	Occupied Bandwidth (-26dBc)(kHz)	
1880.0	QPSK	16QAM
	15144.23	15000.00

LTE band 2, 15MHz Bandwidth, QPSK (-26dBc BW)

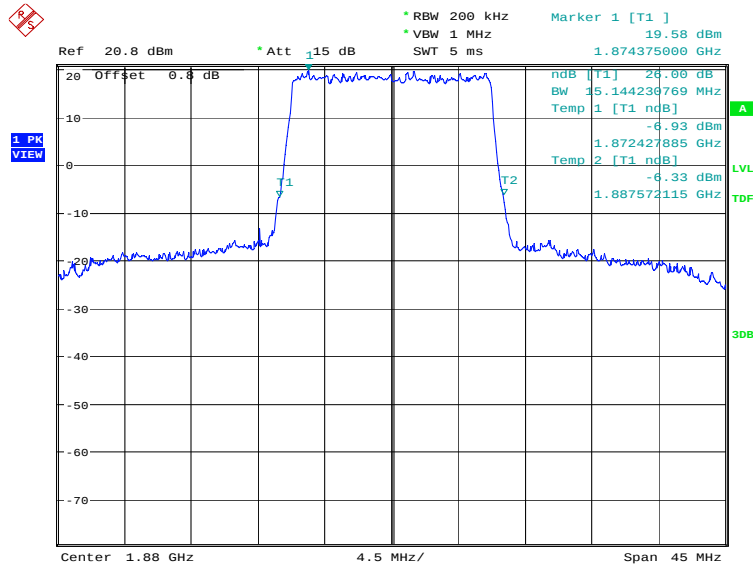

Date: 10.JUN.2019 23:09:50

LTE band 2, 15MHz Bandwidth, 16QAM (-26dBc BW)

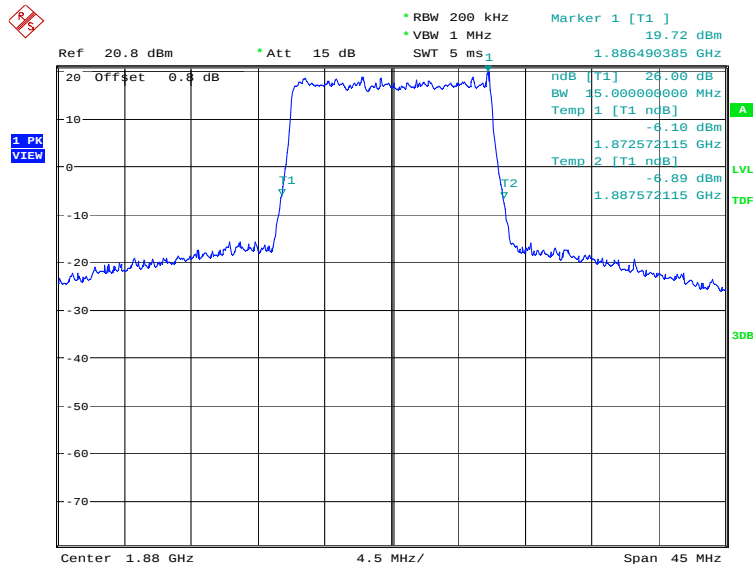


Date: 10.JUN.2019 23:11:15

LTE band 2, 20MHz (-26dBc)


Frequency(MHz)	Occupied Bandwidth (-26dBc)(kHz)	
1880.0	QPSK	16QAM
	19519.23	19519.23

LTE band 2, 20MHz Bandwidth, QPSK (-26dBc BW)

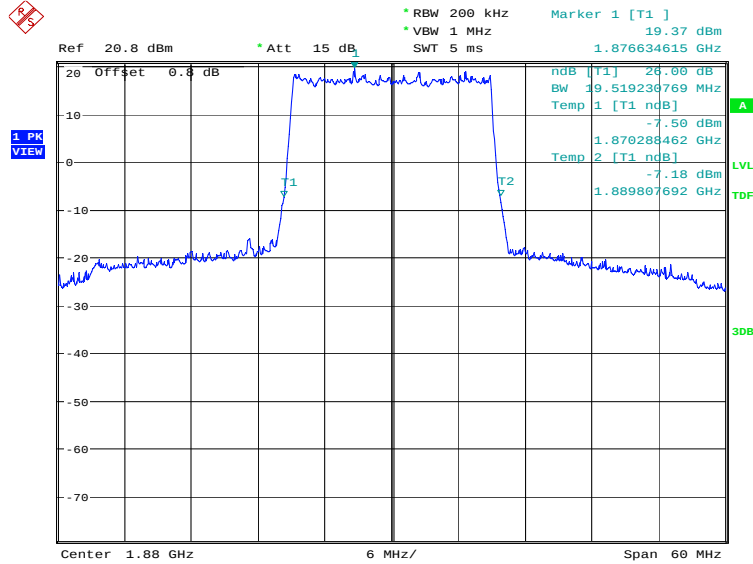

Date: 10.JUN.2019 23:13:29

LTE band 2, 20MHz Bandwidth, 16QAM (-26dBc BW)

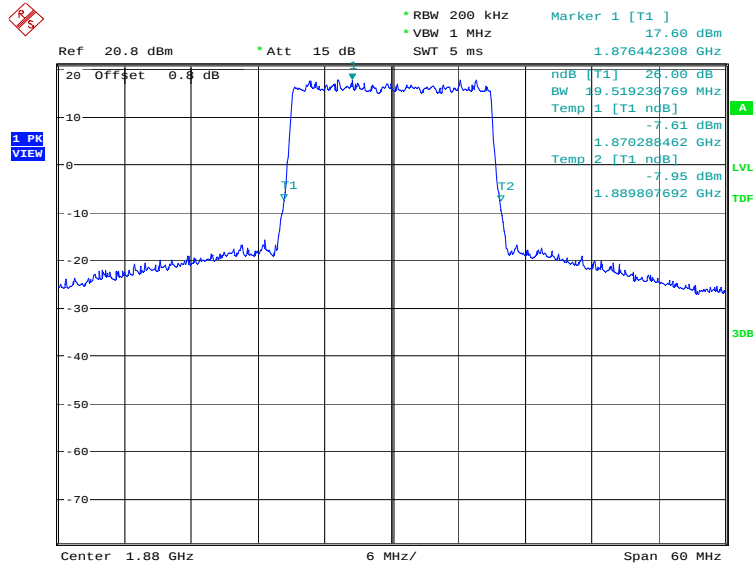


Date: 10.JUN.2019 23:14:54

LTE band 5, 1.4MHz (-26dBc)


Frequency(MHz)	Occupied Bandwidth (-26dBc)(kHz)	
836.5	QPSK	16QAM
	1306.09	1282.05

LTE band 5, 1.4MHz Bandwidth, QPSK (-26dBc BW)

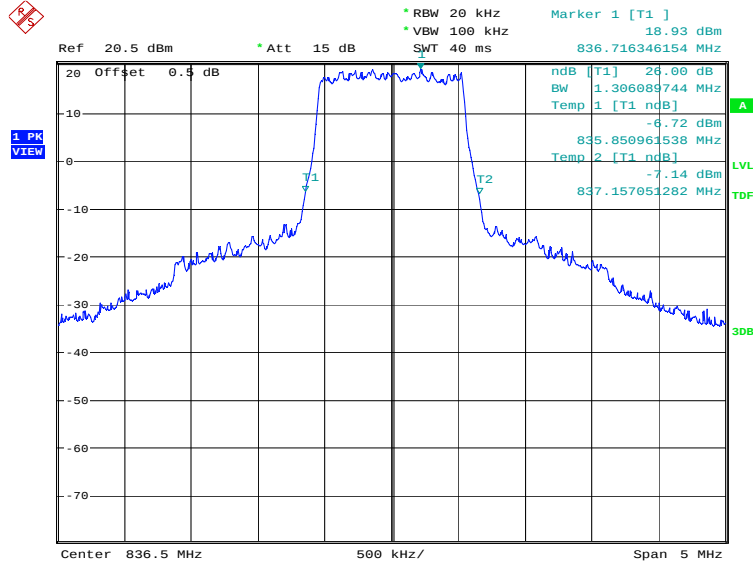

Date: 10.JUN.2019 23:17:09

LTE band 5, 1.4MHz Bandwidth, 16QAM (-26dBc BW)

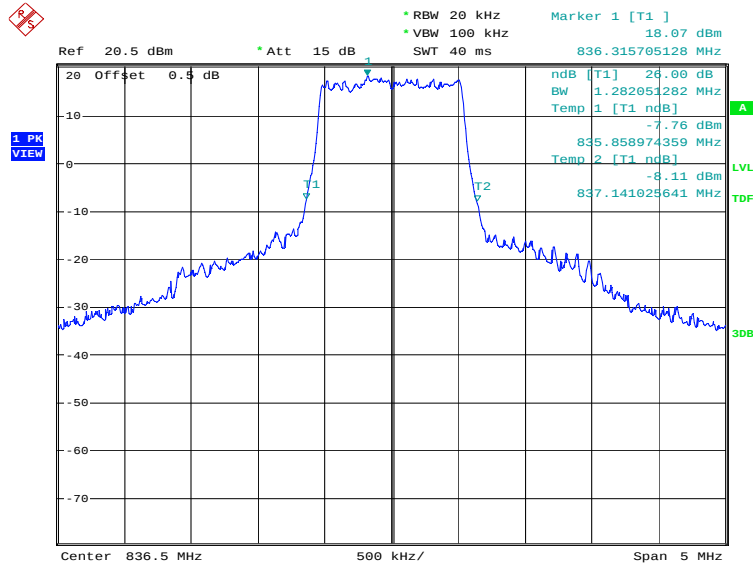


Date: 10.JUN.2019 23:18:34

LTE band 5, 3MHz (-26dBc)


Frequency(MHz)	Occupied Bandwidth (-26dBc)(kHz)	
836.5	QPSK	16QAM
	2900.64	2900.64

LTE band 5, 3MHz Bandwidth, QPSK (-26dBc BW)

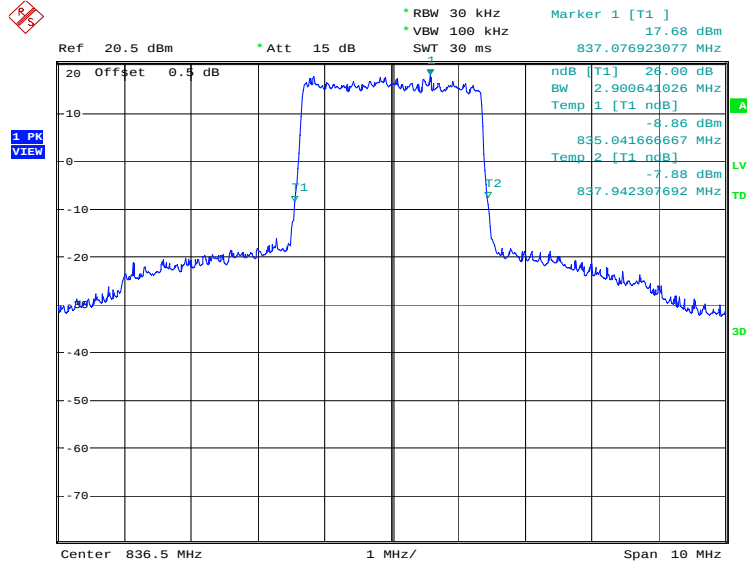

Date: 10.JUN.2019 23:20:48

LTE band 5, 3MHz Bandwidth, 16QAM (-26dBc BW)

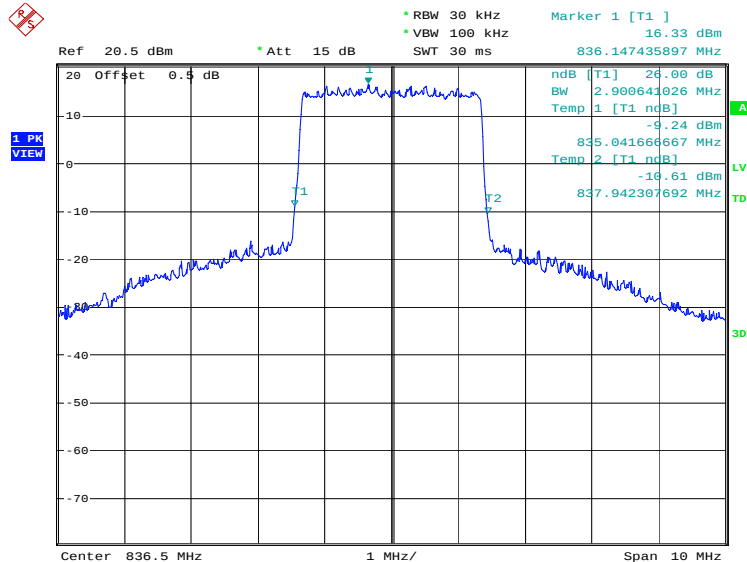


Date: 10.JUN.2019 23:22:14

LTE band 5, 5MHz (-26dBc)


Frequency(MHz)	Occupied Bandwidth (-26dBc)(kHz)	
836.5	QPSK	16QAM
	5072.12	5024.04

LTE band 5, 5MHz Bandwidth, QPSK (-26dBc BW)

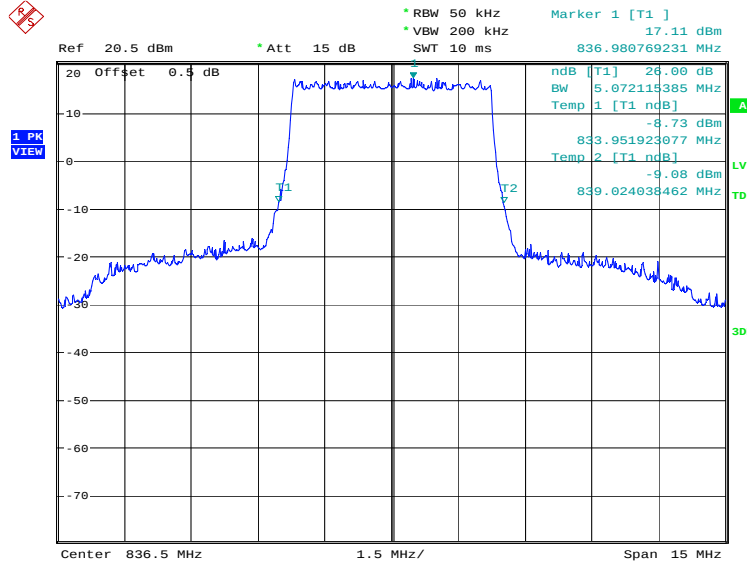

Date: 10.JUN.2019 23:24:28

LTE band 5, 5MHz Bandwidth, 16QAM (-26dBc BW)

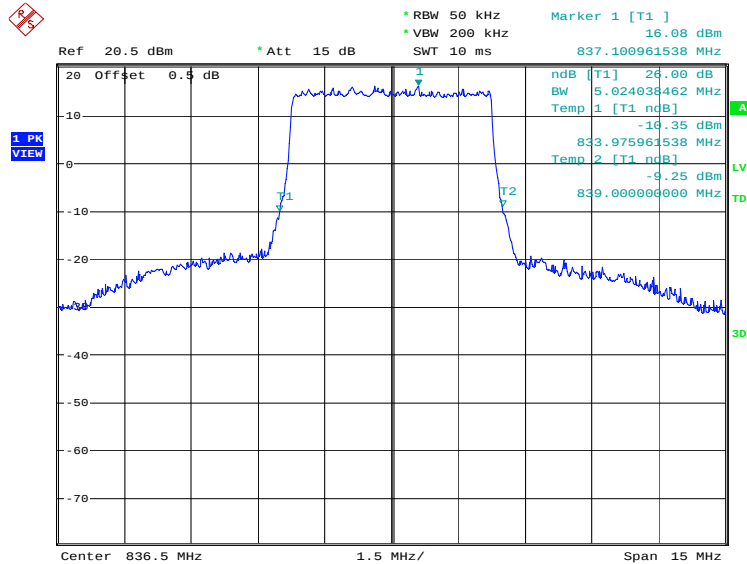


Date: 10.JUN.2019 23:25:53

LTE band 5, 10MHz (-26dBc)


Frequency(MHz)	Occupied Bandwidth (-26dBc)(kHz)	
836.5	QPSK	16QAM
	10096.15	10000.00

LTE band 5, 10MHz Bandwidth, QPSK (-26dBc BW)

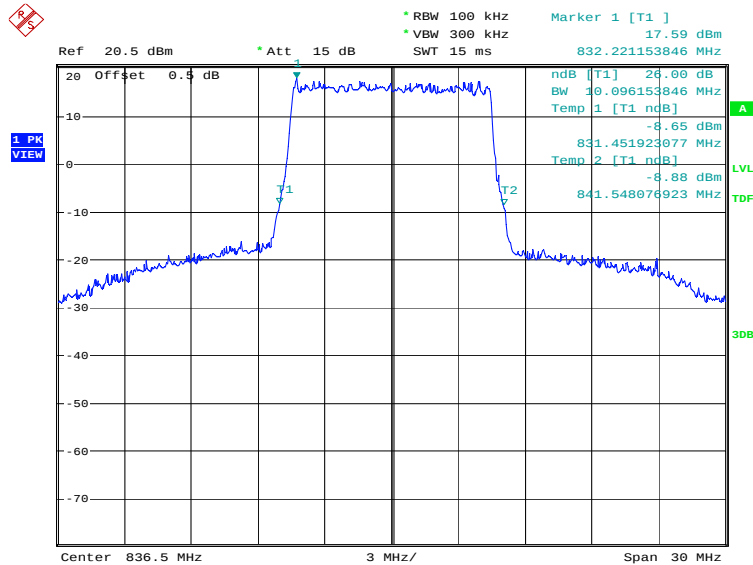

Date: 10.JUN.2019 23:28:07

LTE band 5, 10MHz Bandwidth, 16QAM (-26dBc BW)

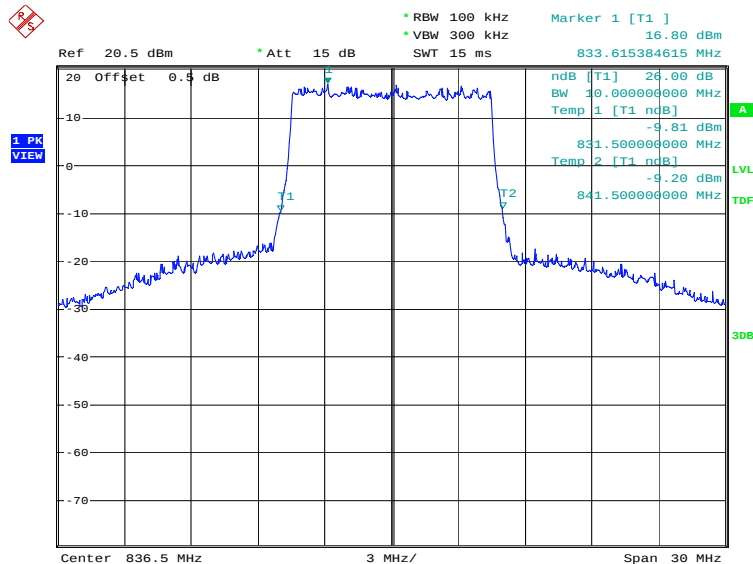


Date: 10.JUN.2019 23:29:32

LTE band 7, 5MHz (-26dBc)


Frequency(MHz)	Occupied Bandwidth (-26dBc)(kHz)	
2535.0	QPSK	16QAM
	5240.38	5144.23

LTE band 7, 5MHz Bandwidth, QPSK (-26dBc BW)

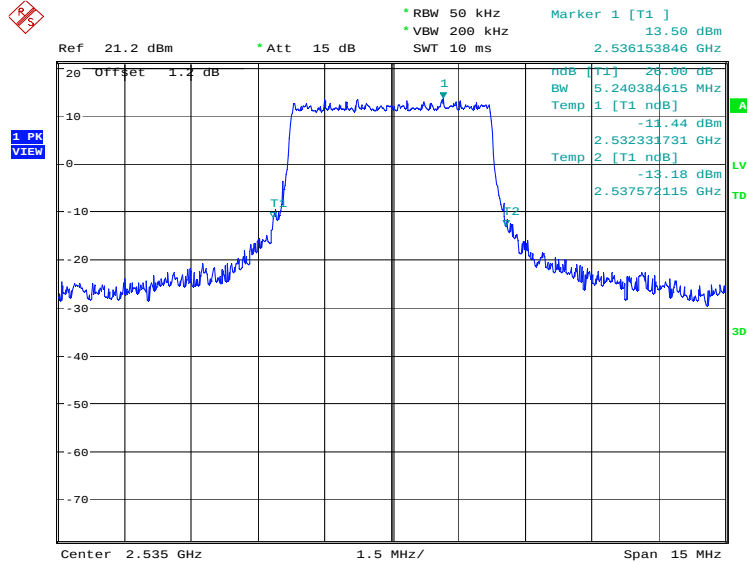

Date: 10.JUN.2019 23:31:47

LTE band 7, 5MHz Bandwidth, 16QAM (-26dBc BW)

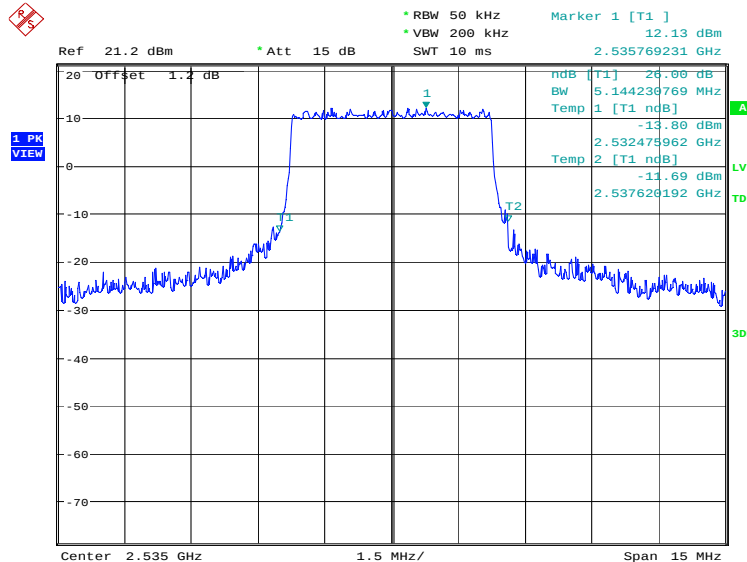


Date: 10.JUN.2019 23:33:12

LTE band 7, 10MHz (-26dBc)


Frequency(MHz)	Occupied Bandwidth (-26dBc)(kHz)	
2535.0	QPSK	16QAM
	10000.00	10000.00

LTE band 7, 10MHz Bandwidth, QPSK (-26dBc BW)

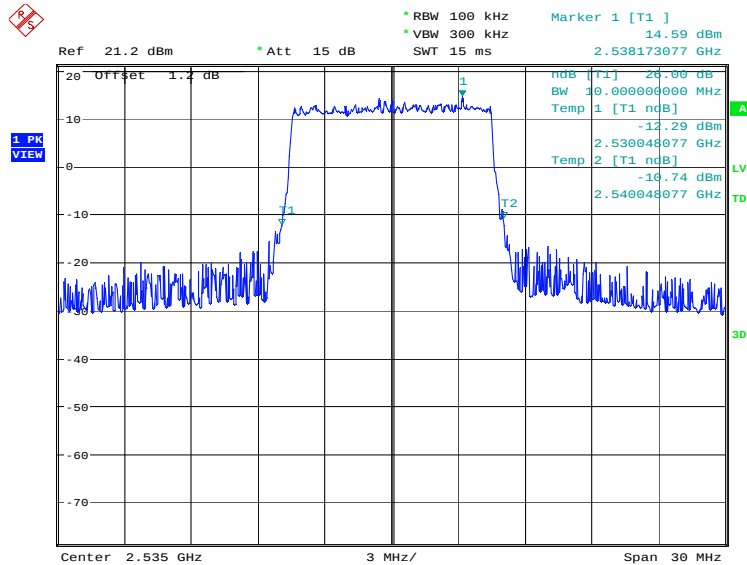

Date: 10.JUN.2019 23:35:27

LTE band 7, 10MHz Bandwidth, 16QAM (-26dBc BW)

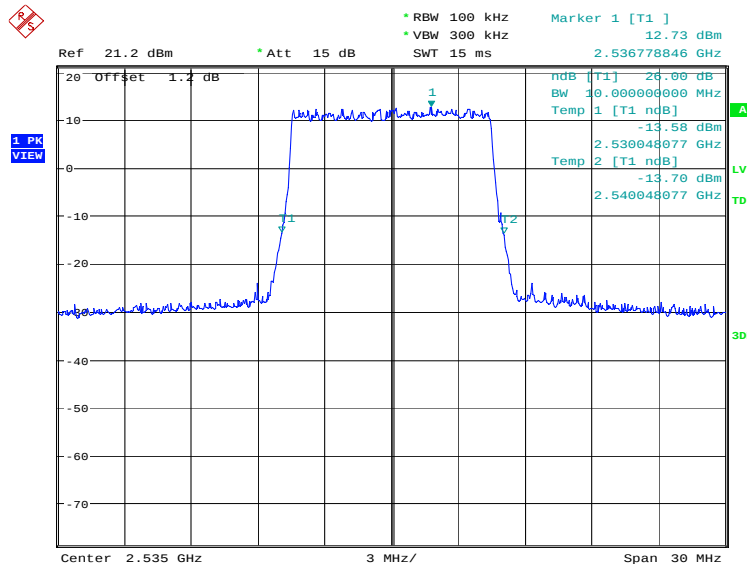


Date: 10.JUN.2019 23:36:52

LTE band 7, 15MHz (-26dBc)


Frequency(MHz)	Occupied Bandwidth (-26dBc)(kHz)	
2535.0	QPSK	16QAM
	15144.23	14927.88

LTE band 7, 15MHz Bandwidth, QPSK (-26dBc BW)

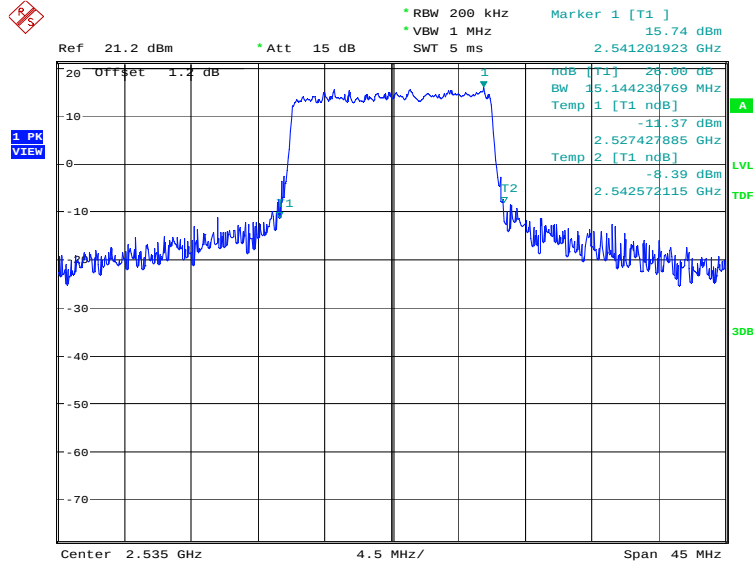

Date: 10.JUN.2019 23:39:06

LTE band 7, 15MHz Bandwidth, 16QAM (-26dBc BW)

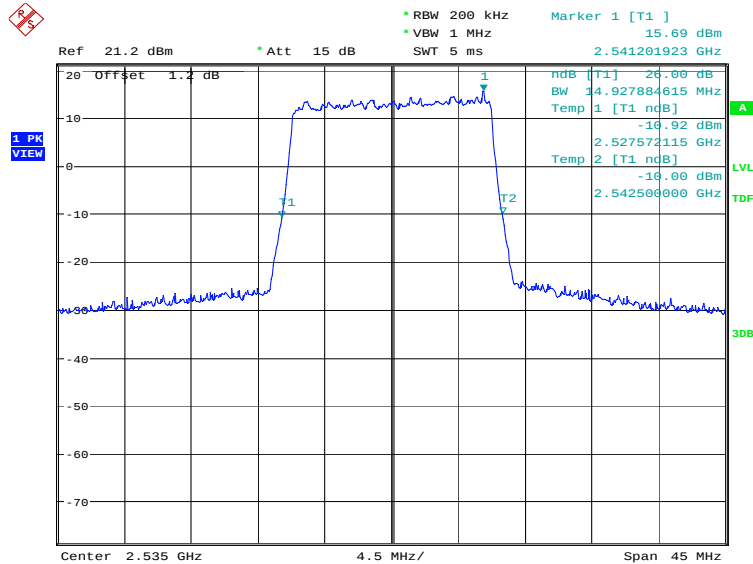


Date: 10.JUN.2019 23:40:31

LTE band 7, 20MHz (-26dBc)


Frequency(MHz)	Occupied Bandwidth (-26dBc)(kHz)	
2535.0	QPSK	16QAM
	19423.08	19519.23

LTE band 7, 20MHz Bandwidth, QPSK (-26dBc BW)

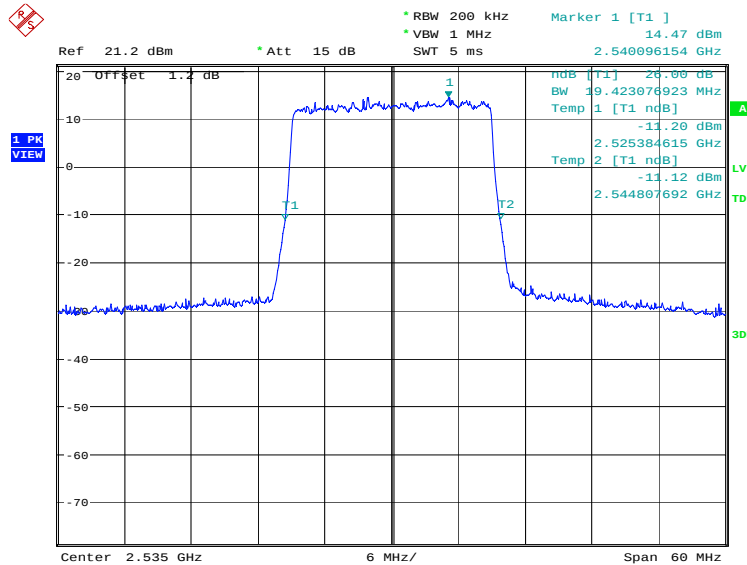

Date: 10.JUN.2019 23:42:45

LTE band 7, 20MHz Bandwidth,16QAM (-26dBc BW)

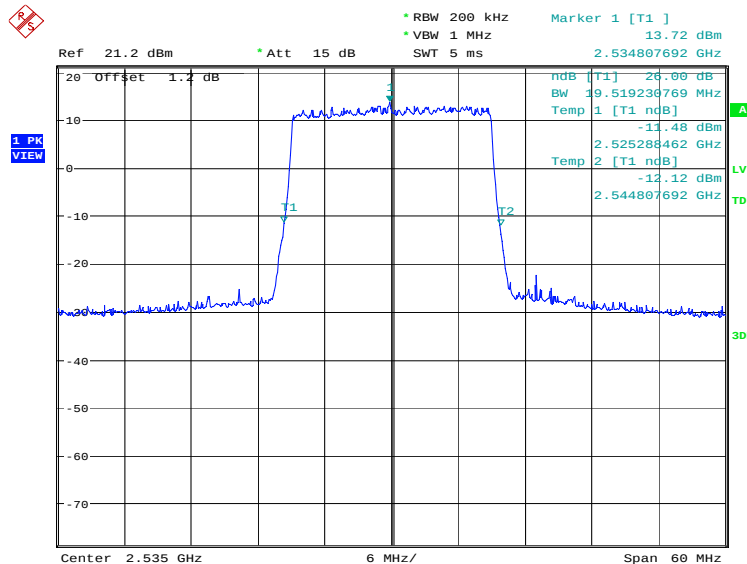


Date: 10.JUN.2019 23:44:10

LTE band 12, 1.4MHz (-26dBc)


Frequency(MHz)	Occupied Bandwidth (-26dBc)(kHz)	
707.5	QPSK	16QAM
	1274.04	1298.08

LTE band 12, 1.4MHz Bandwidth, QPSK (-26dBc BW)

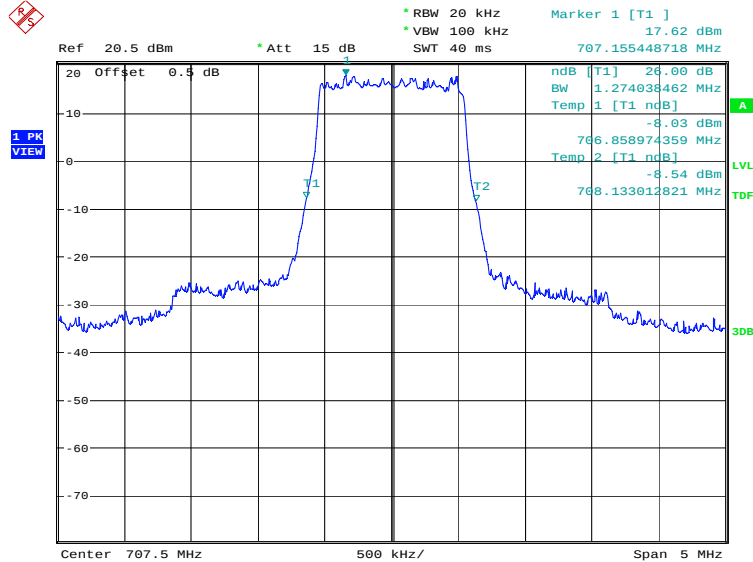

Date: 27.SEP.2019 13:18:39

LTE band 12, 1.4MHz Bandwidth, 16QAM (-26dBc BW)

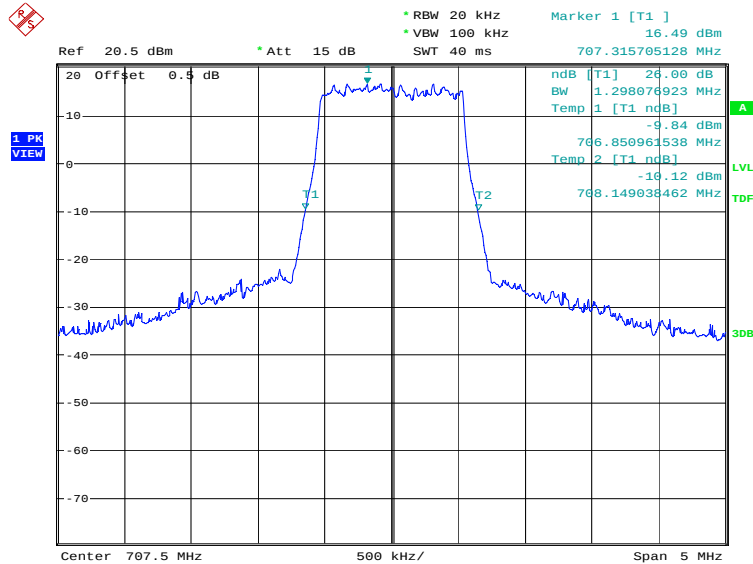


Date: 27.SEP.2019 13:20:03

LTE band 12, 3MHz (-26dBc)


Frequency(MHz)	Occupied Bandwidth (-26dBc)(kHz)	
707.5	QPSK	16QAM
	2884.62	2916.67

LTE band 12, 3MHz Bandwidth, QPSK (-26dBc BW)

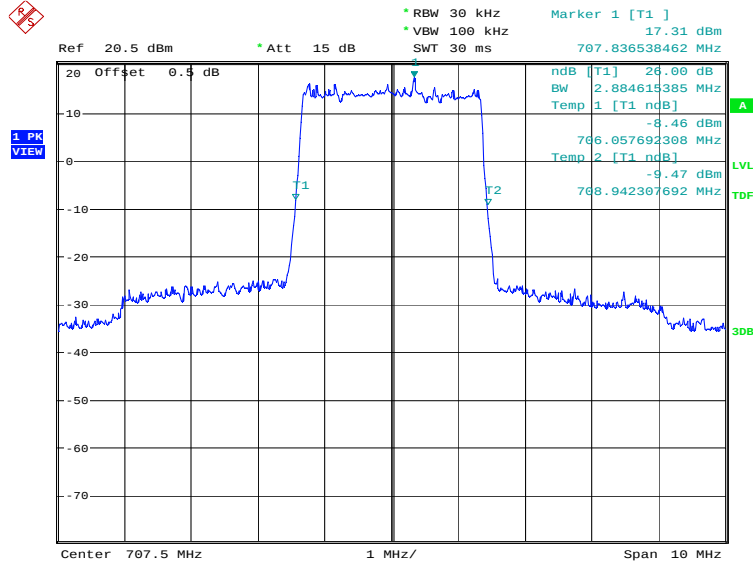

Date: 27.SEP.2019 13:22:17

LTE band 12, 3MHz Bandwidth, 16QAM (-26dBc BW)

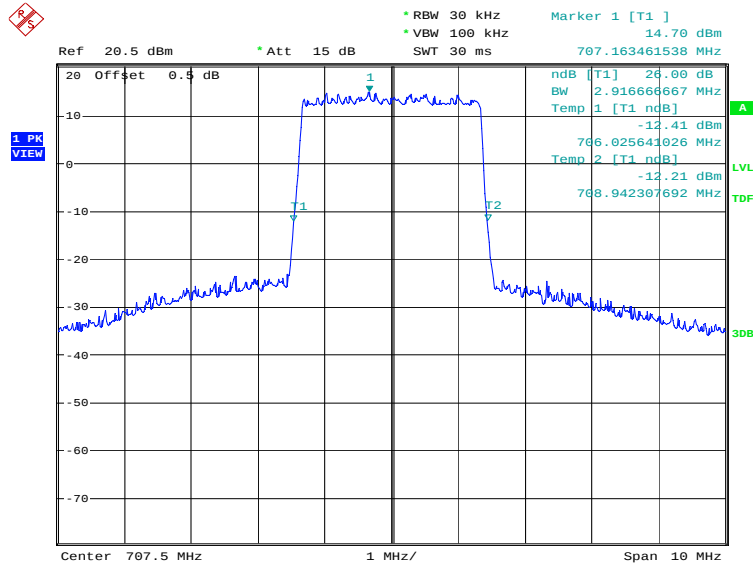


Date: 27.SEP.2019 13:23:41

LTE band 12, 5MHz (-26dBc)


Frequency(MHz)	Occupied Bandwidth (-26dBc)(kHz)	
707.5	QPSK	16QAM
	5048.08	5000.00

LTE band 12, 5MHz Bandwidth, QPSK (-26dBc BW)

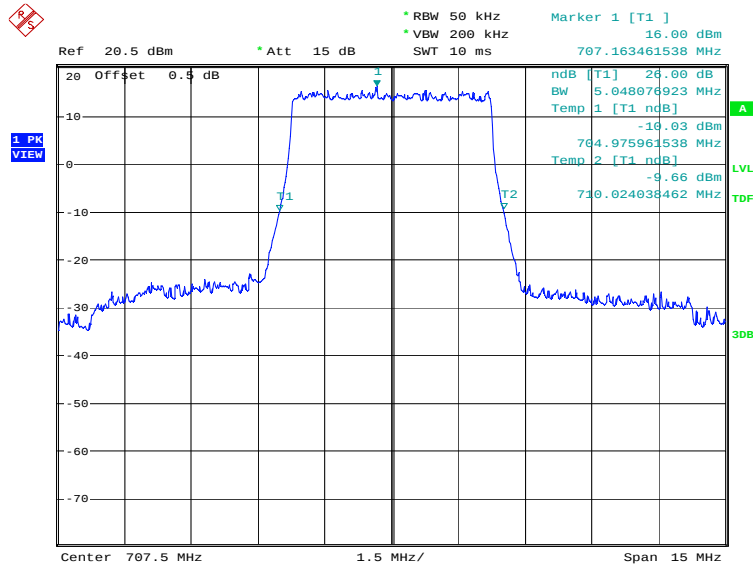

Date: 27.SEP.2019 13:25:55

LTE band 12, 5MHz Bandwidth, 16QAM (-26dBc BW)

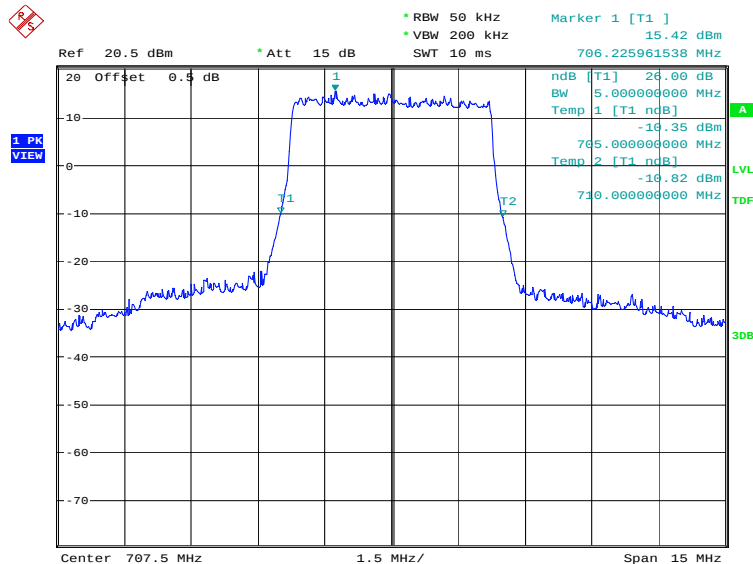


Date: 27.SEP.2019 13:27:19

LTE band 12, 10MHz (-26dBc)


Frequency(MHz)	Occupied Bandwidth (-26dBc)(kHz)	
707.5	QPSK	16QAM
	10000.00	9951.92

LTE band 12, 10MHz Bandwidth, QPSK (-26dBc BW)

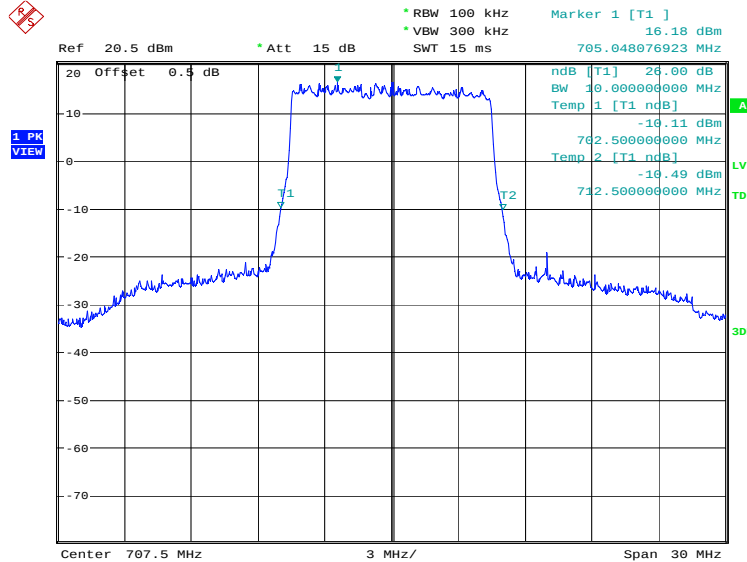

Date: 27.SEP.2019 13:29:33

LTE band 12, 10MHz Bandwidth, 16QAM (-26dBc BW)

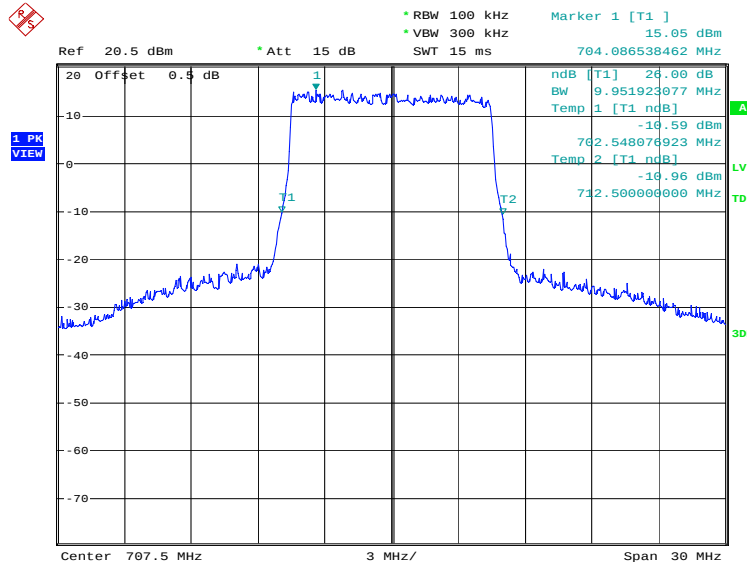


Date: 27.SEP.2019 13:30:57

LTE band 17, 5MHz (-26dBc)


Frequency(MHz)	Occupied Bandwidth (-26dBc)(kHz)	
710.0	QPSK	16QAM
	5096.15	5120.19

LTE band 17, 5MHz Bandwidth, QPSK (-26dBc BW)

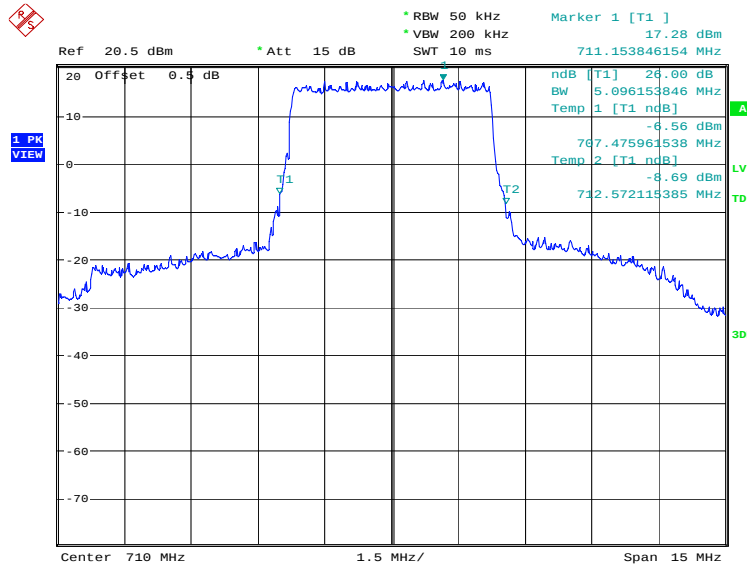

Date: 10.JUN.2019 23:46:25

LTE band 17, 5MHz Bandwidth, 16QAM (-26dBc BW)

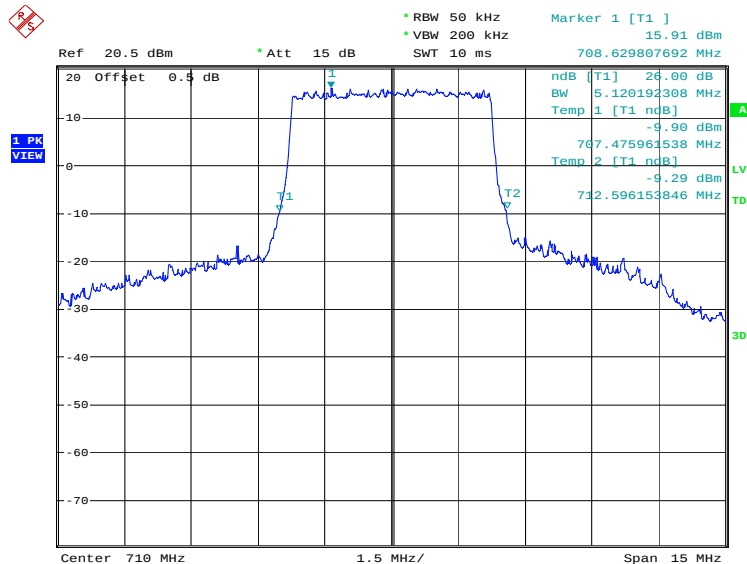


Date: 10.JUN.2019 23:47:50

LTE band 17, 10MHz (-26dBc)


Frequency(MHz)	Occupied Bandwidth (-26dBc)(kHz)	
710.0	QPSK	16QAM
	10048.08	9855.77

LTE band 17, 10MHz Bandwidth, QPSK (-26dBc BW)

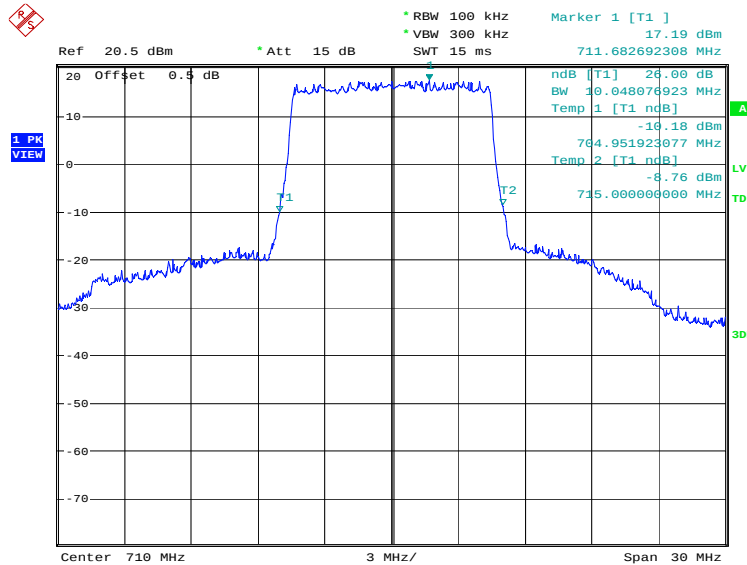

Date: 10.JUN.2019 23:50:04

LTE band 17, 10MHz Bandwidth, 16QAM (-26dBc BW)

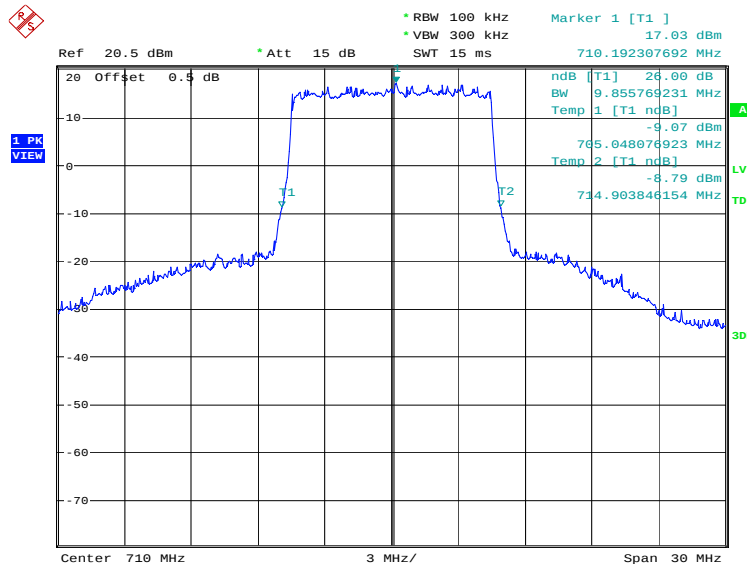


Date: 10.JUN.2019 23:51:29

LTE band 66, 1.4MHz (-26dBc)


Frequency(MHz)	Occupied Bandwidth (-26dBc)(kHz)	
1745.0	QPSK	16QAM
	1314.10	1314.10

LTE band 66, 1.4MHz Bandwidth, QPSK (-26dBc BW)

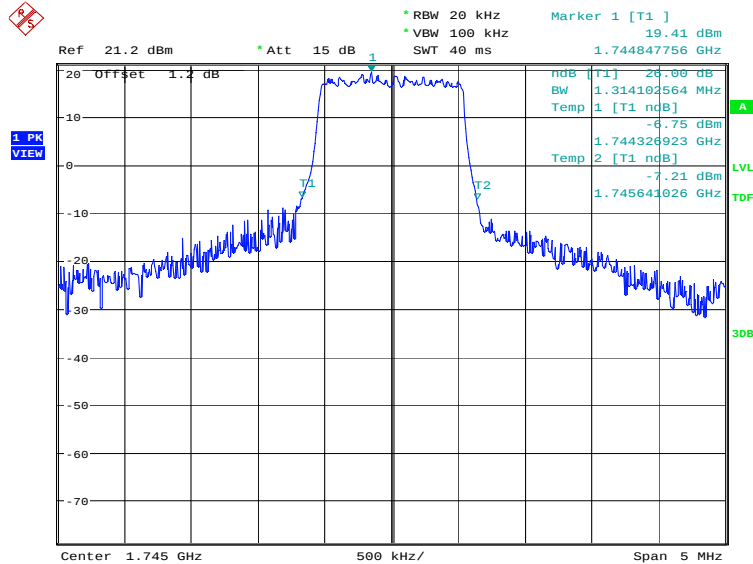

Date: 10.JUN.2019 23:53:45

LTE band 66, 1.4MHz Bandwidth, 16QAM (-26dBc BW)

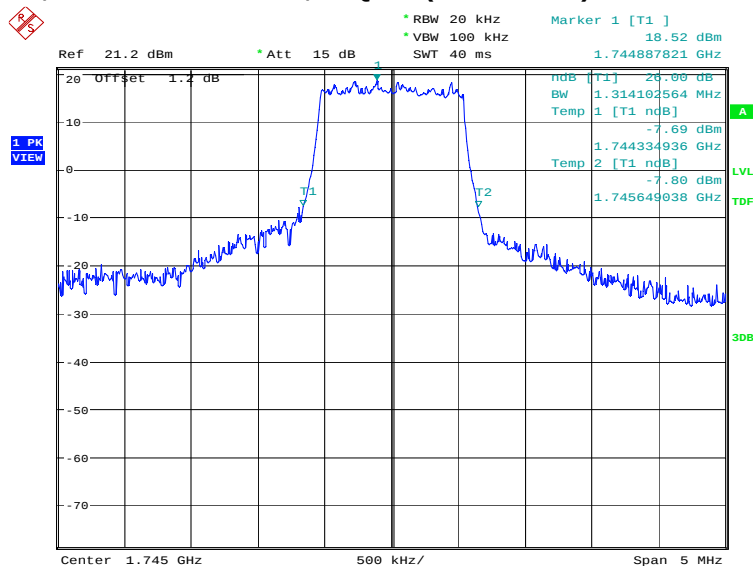


Date: 10.JUN.2019 23:55:10

LTE band 66, 3MHz (-26dBc)


Frequency(MHz)	Occupied Bandwidth (-26dBc)(kHz)	
1745.0	QPSK	16QAM
	2932.69	2900.64

LTE band 66, 3MHz Bandwidth, QPSK (-26dBc BW)

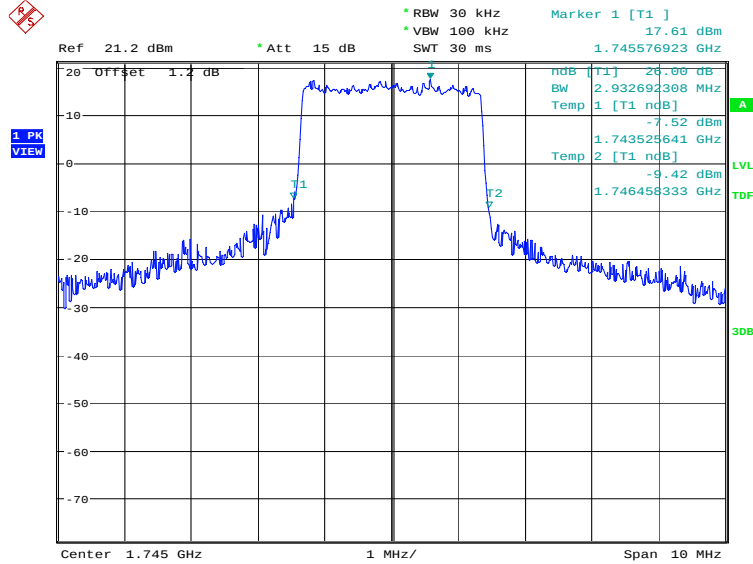

Date: 10.JUN.2019 23:57:24

LTE band 66, 3MHz Bandwidth, 16QAM (-26dBc BW)

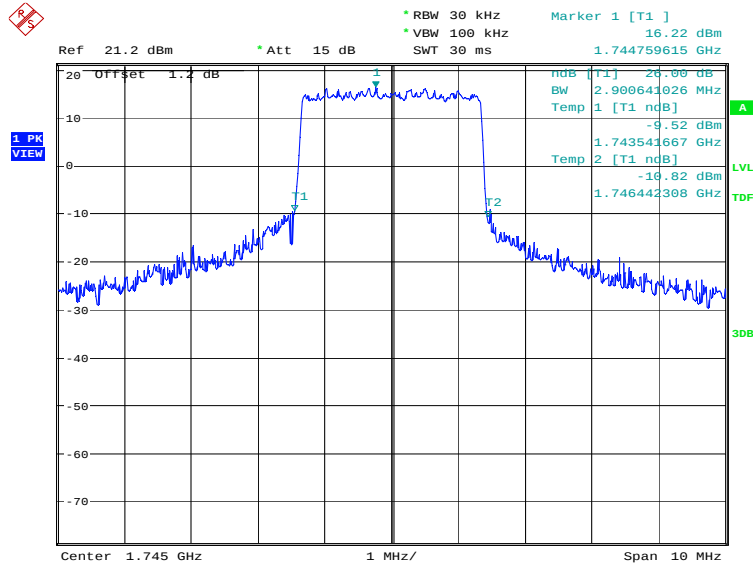


Date: 10.JUN.2019 23:58:49

LTE band 66, 5MHz (-26dBc)


Frequency(MHz)	Occupied Bandwidth (-26dBc)(kHz)	
1745.0	QPSK	16QAM
	5120.19	5120.19

LTE band 66, 5MHz Bandwidth, QPSK (-26dBc BW)

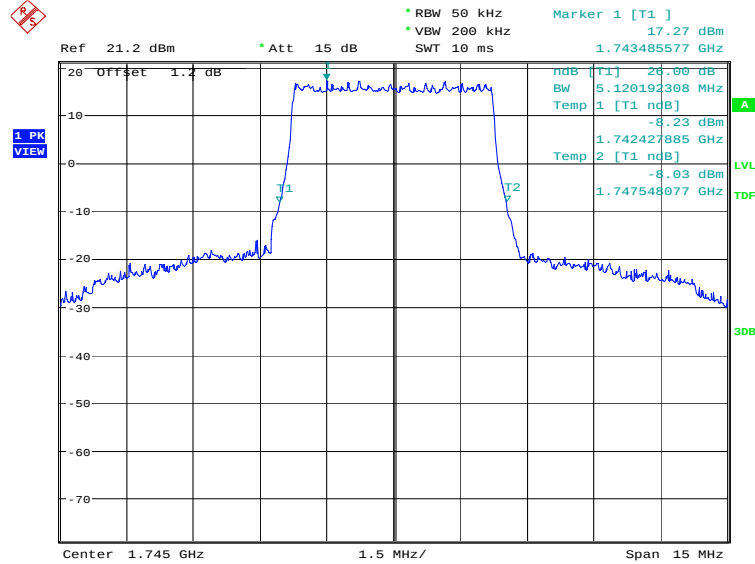

Date: 11.JUN.2019 00:01:04

LTE band 66, 5MHz Bandwidth, 16QAM (-26dBc BW)

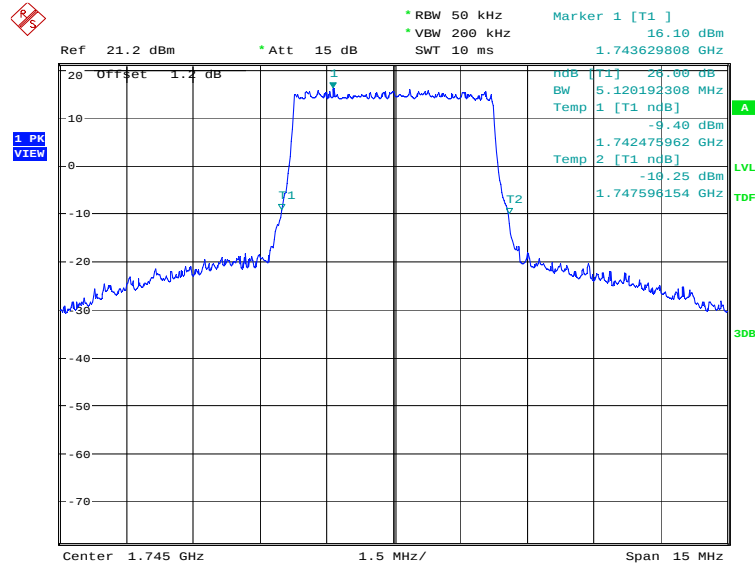


Date: 11.JUN.2019 00:02:29

LTE band 66, 10MHz (-26dBc)


Frequency(MHz)	Occupied Bandwidth (-26dBc)(kHz)	
1745.0	QPSK	16QAM
	10048.08	10048.08

LTE band 66, 10MHz Bandwidth, QPSK (-26dBc BW)

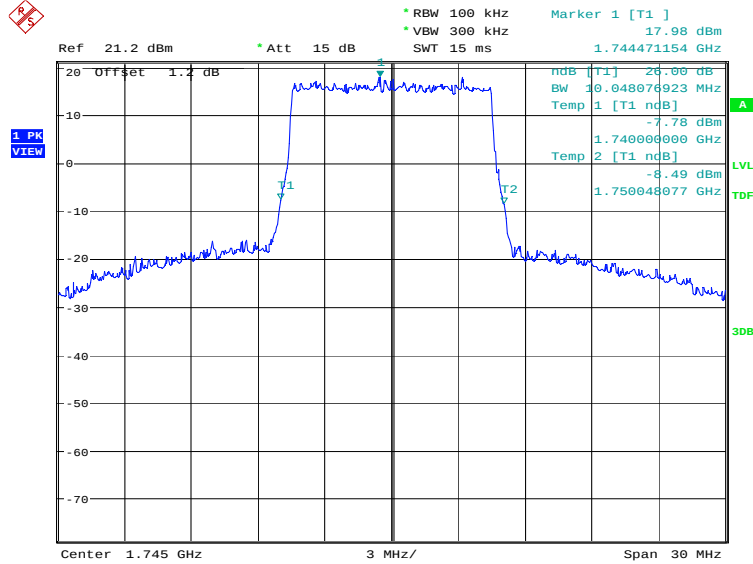

Date: 11.JUN.2019 00:04:43

LTE band 66, 10MHz Bandwidth, 16QAM (-26dBc BW)

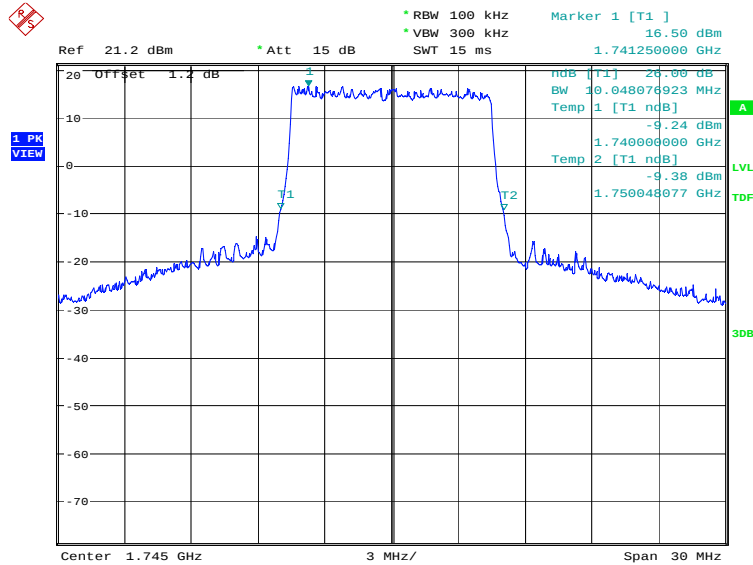


Date: 11.JUN.2019 00:06:08

LTE band 66, 15MHz (-26dBc)


Frequency(MHz)	Occupied Bandwidth (-26dBc)(kHz)	
1745.0	QPSK	16QAM
	15072.12	14927.88

LTE band 66, 15MHz Bandwidth, QPSK (-26dBc BW)

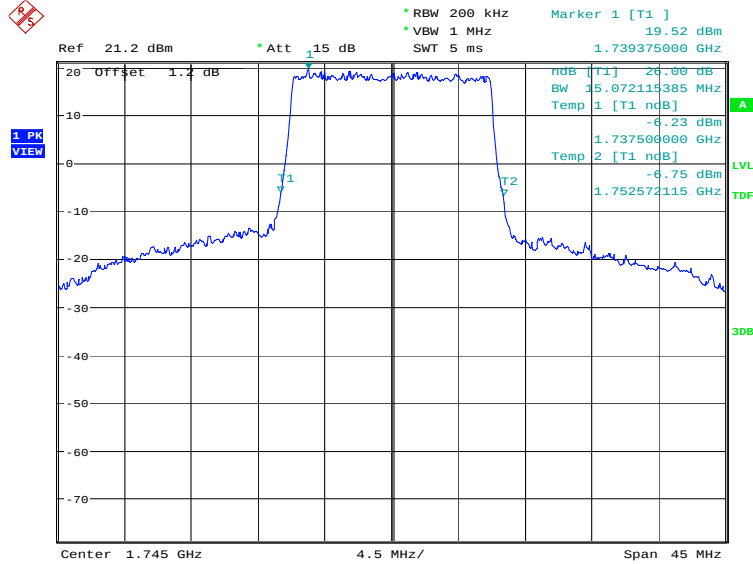

Date: 11.JUN.2019 00:08:23

LTE band 66, 15MHz Bandwidth, 16QAM (-26dBc BW)

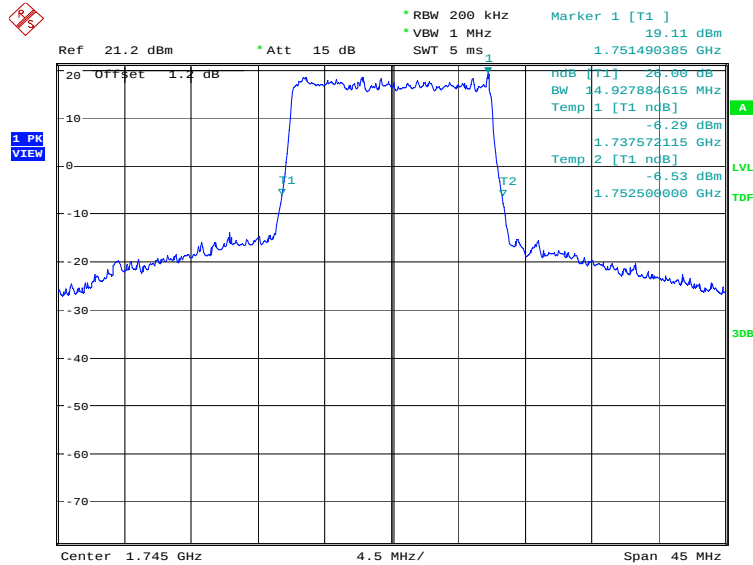


Date: 11.JUN.2019 00:09:48

LTE band 66, 20MHz (-26dBc)


Frequency(MHz)	Occupied Bandwidth (-26dBc)(kHz)	
1745.0	QPSK	16QAM
	19519.23	19615.38

LTE band 66, 20MHz Bandwidth, QPSK (-26dBc BW)

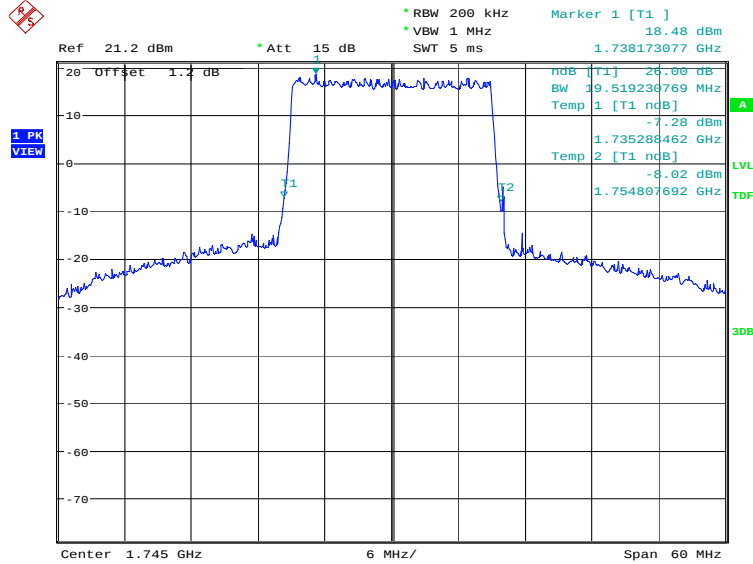

Date: 11.JUN.2019 00:12:02

LTE band 66, 20MHz Bandwidth, 16QAM (-26dBc BW)

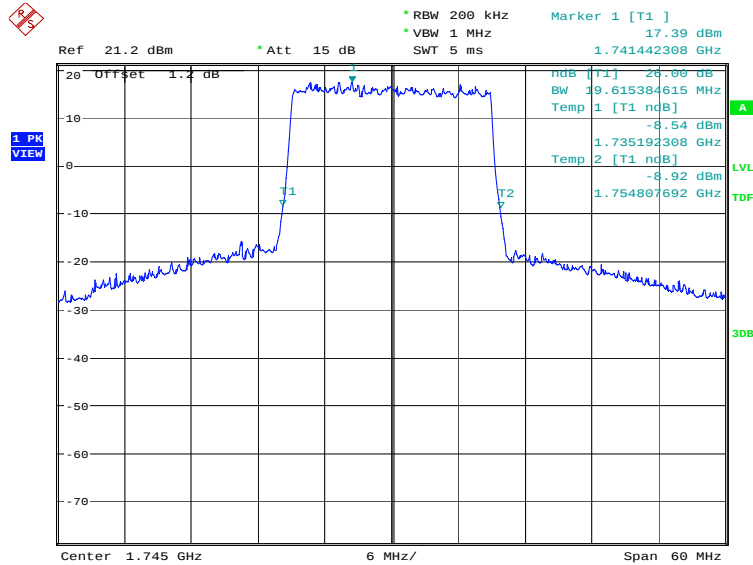

Date: 11.JUN.2019 00:13:27

A.6 BAND EDGE COMPLIANCE

A.6.1 Measurement limit

Part 22.917, Part 24.238 and Part 27.53(h) specify that the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

According to KDB 971168 6.0, a relaxation of the reference bandwidth is often provided for measurements within a specified frequency range at the edge of the authorized frequency block/band. This is often implemented by permitting the use of a narrower RBW (typically limited to a minimum RBW of 1% of the OBW) for measuring the out-of-band emissions without a requirement to integrate the result over the full reference bandwidth.

The specification that emissions shall be attenuated below the transmitter power (P) by at least $43 + 10 \log(P)$ dB, translates in the relevant power range (1 to 0.001 W) to -13 dBm. At 1 W the specified minimum attenuation becomes 43 dB and relative to a 30 dBm (1 W) carrier becomes a limit of -13 dBm. At 0.001 W (0 dBm) the minimum attenuation is 13 dB, which again yields a limit of -13 dBm. In this way a translation of the specification from relative to absolute terms is carried out.

Part 27.53(m)(4) specifies for mobile digital stations, the attenuation factor shall be not less than $40 + 10 \log(P)$ dB on all frequencies between the channel edge and 5 megahertz from the channel edge, $43 + 10 \log(P)$ dB on all frequencies between 5 megahertz and X megahertz from the channel edge, and $55 + 10 \log(P)$ dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth as defined in paragraph (m)(6) of this section. In addition, the attenuation factor shall not be less than $43 + 10 \log(P)$ dB on all frequencies between 2490.5 MHz and 2496 MHz and $55 + 10 \log(P)$ dB at or below 2490.5 MHz. Mobile Satellite Service licensees operating on frequencies below 2495 MHz may also submit a documented interference complaint against BRS licensees operating on channel BRS Channel 1 on the same terms and conditions as adjacent channel BRS or EBS licensees.


Part 27.53(c) states for operations in the 746-758 MHz band and the 776-788 MHz band, the power of any emission outside the licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, in accordance with the following: (1) On any frequency outside the 746-758 MHz band, the power of any emission shall be attenuated outside the band below the transmitter power (P) by at least $43 + 10 \log(P)$ dB; (2) On any frequency outside the 776-788 MHz band, the power of any emission shall be attenuated outside the band below the transmitter power (P) by at least $43 + 10 \log(P)$ dB; (4) On all frequencies between 763-775 MHz and 793-805 MHz, by a factor not less than $65 + 10 \log(P)$ dB in a 6.25 kHz band segment, for mobile and portable stations.

A.6.2 Measurement result

Only worst case result is given below


LTE band 2

OBW: 1RB-low_offset

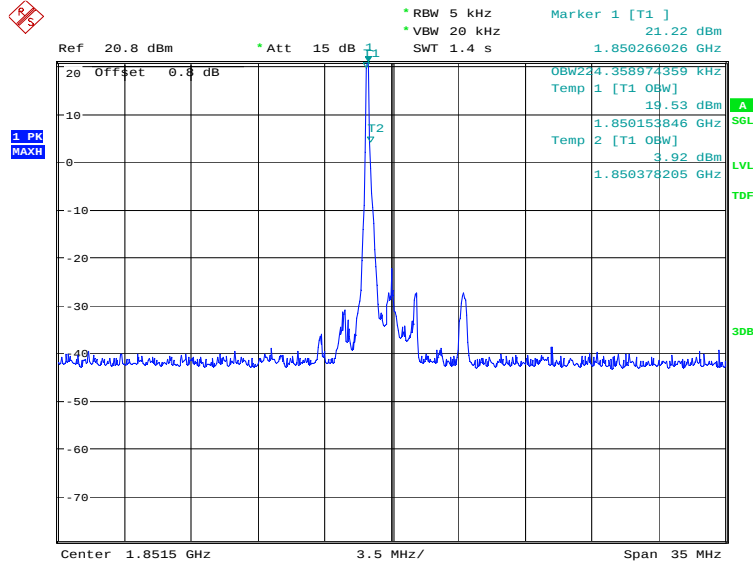


Date: 12.JUN.2019 09:23:49

LOW BAND EDGE BLOCK-1RB-low_offset

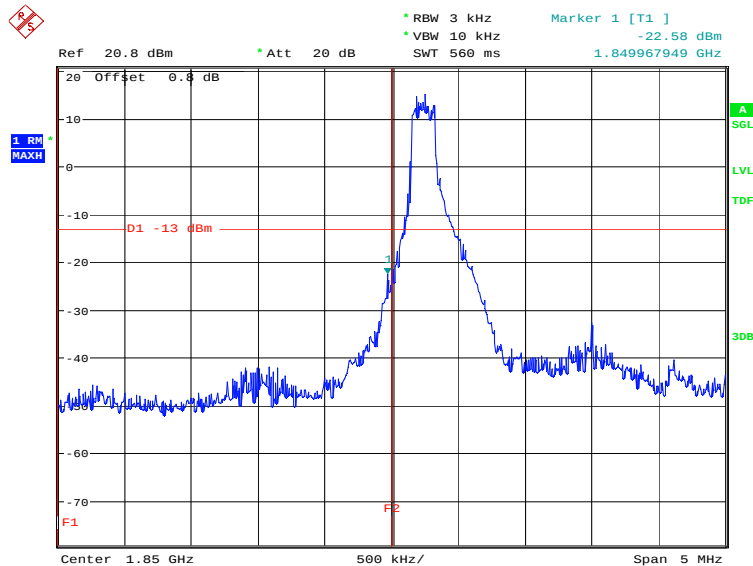


Date: 12.JUN.2019 09:24:05

OBW: 1RB-high_offset

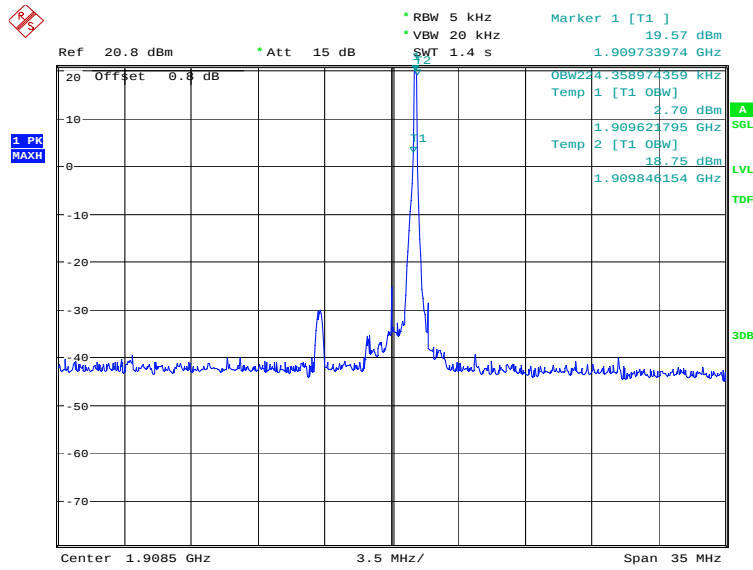


Date: 12.JUN.2019 09:26:44

HIGH BAND EDGE BLOCK-1RB-high_offset

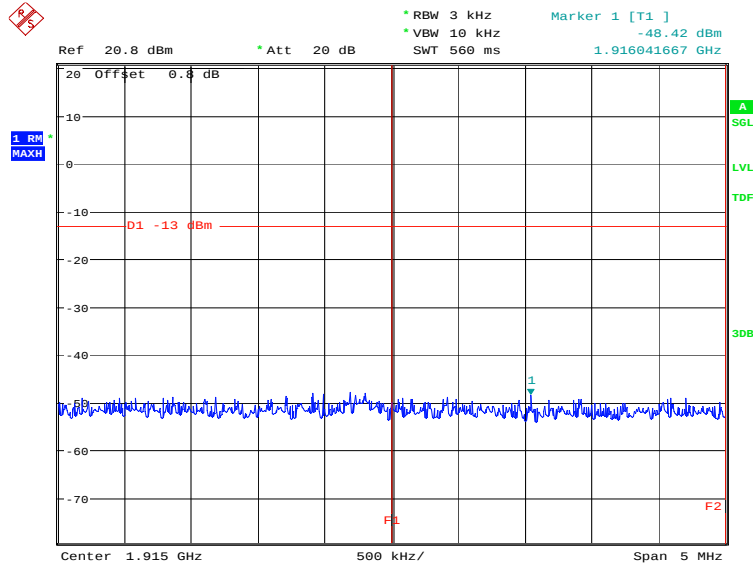


Date: 12.JUN.2019 09:27:00

LOW BAND EDGE BLOCK-20MHz-100%RB

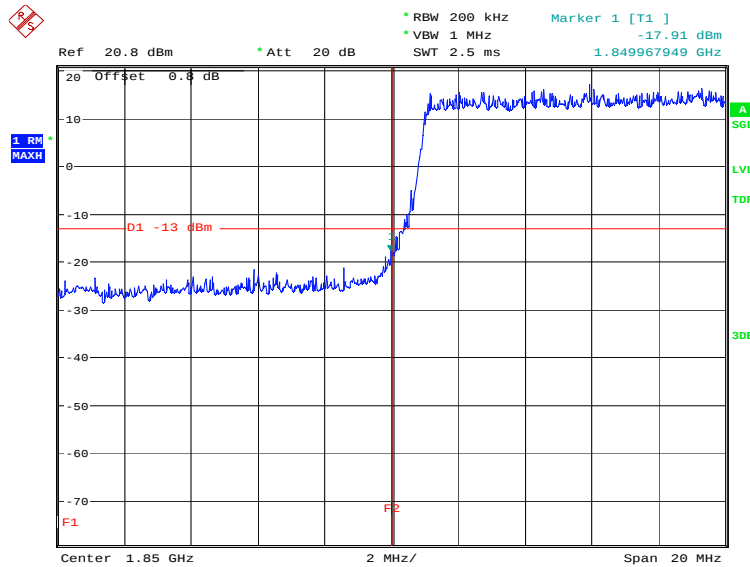

Date: 12.JUN.2019 09:24:46


HIGH BAND EDGE BLOCK-20MHz-100%RB

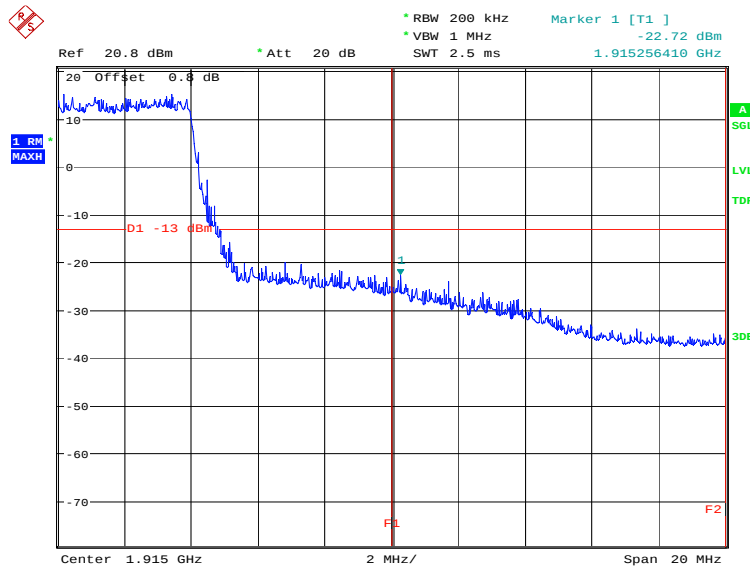

Date: 12.JUN.2019 09:27:41


LTE band 5

OBW: 1RB-low_offset


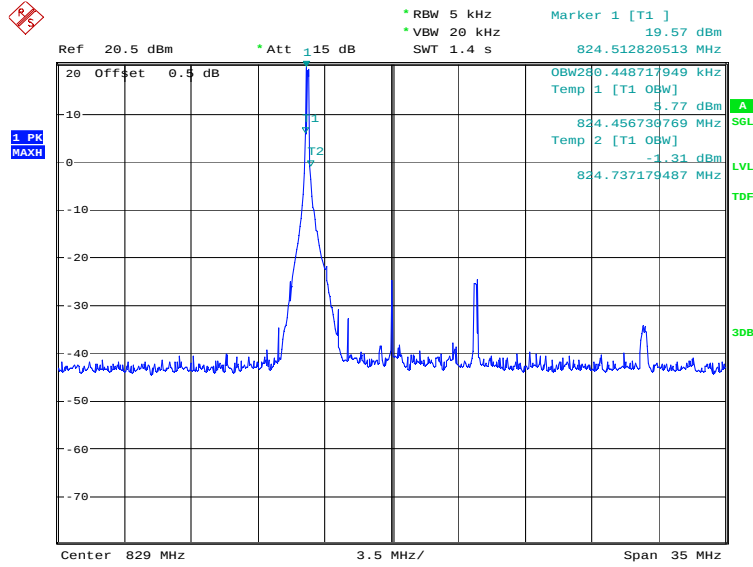


Date: 12.JUN.2019 09:30:01


LOW BAND EDGE BLOCK-1RB-low_offset

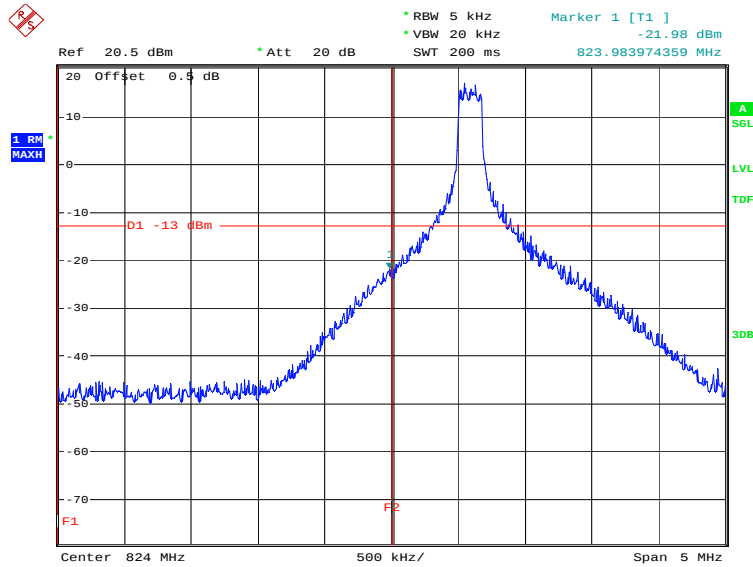

Date: 12.JUN.2019 09:30:17




LOW BAND EDGE BLOCK-10MHz-100%RB

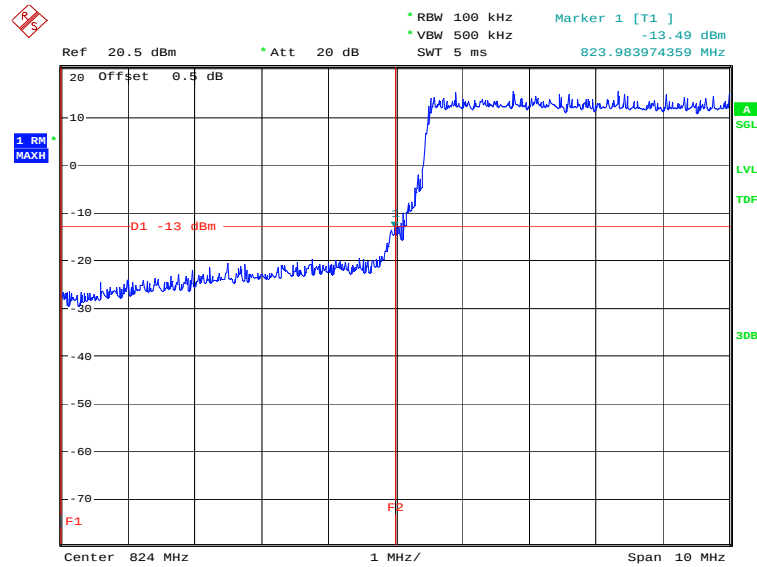


Date: 14.JUN.2019 08:54:13

HIGH BAND EDGE BLOCK-10MHz-100%RB

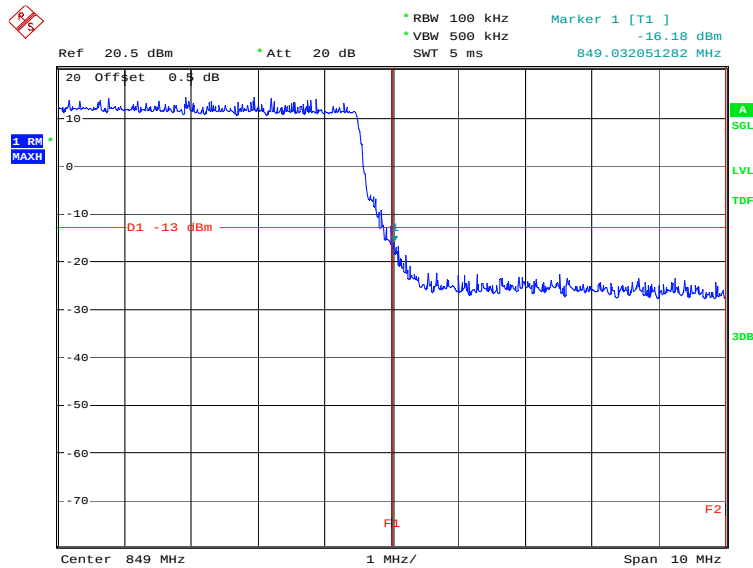


Date: 12.JUN.2019 09:32:50

LTE band 7
OBW: 1RB-low_offset

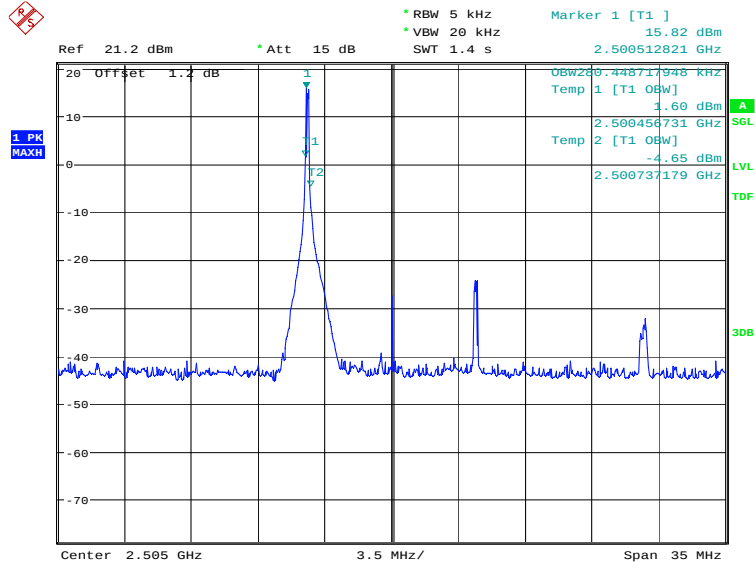


Date: 12.JUN.2019 09:41:44

LOW BAND EDGE BLOCK-1RB-low_offset

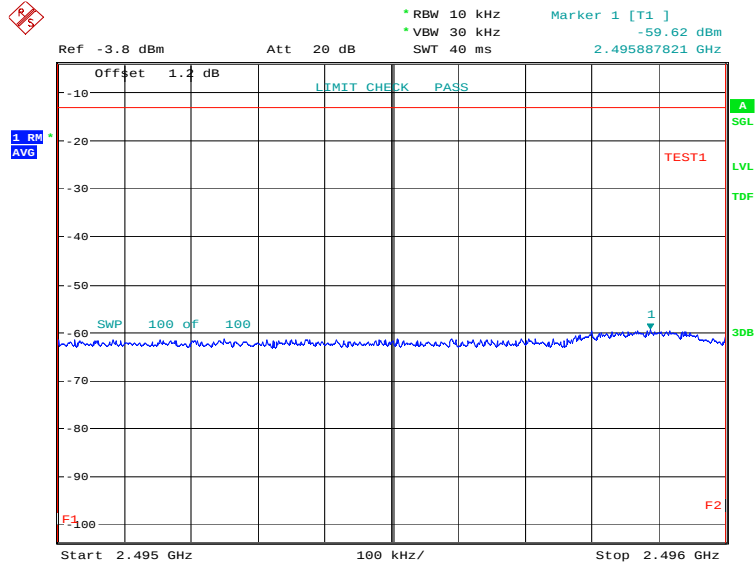


Date: 12.JUN.2019 09:42:05

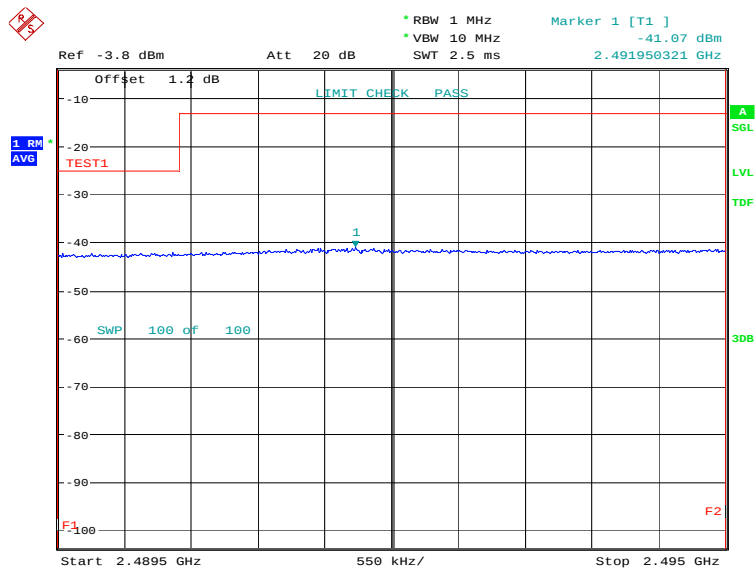


Date: 12.JUN.2019 09:42:20

OBW: 1RB-high_offset

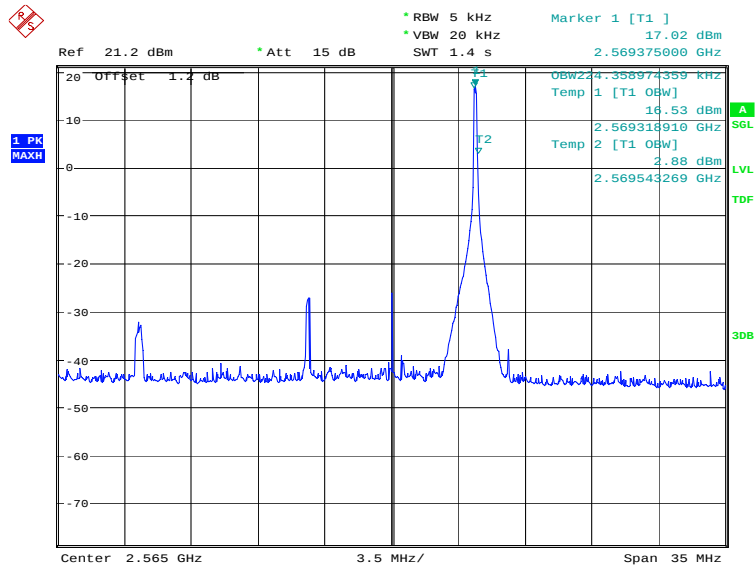

Date: 12.JUN.2019 09:45:11

[illegible]

RBW 1 MHz
 VBW 10 MHz
 SWT 2.5 ms
 Marker 1 [T1]
 -45.96 dBm
 2.699870192 GHz

Ref -3.8 dBm
 Att 20 dB


Offset 1.2 dB
 LIMIT CHECK PASS
 TEST1
 SWP 100 of 100
 F1
 F2
 1

Start 2.691 GHz
 900 kHz/
 Stop 2.7 GHz


A SGL
 LVL
 TDF
 3DB

©Copyright. All rights reserved by CTTL.

LOW BAND EDGE BLOCK-20MHz-100%RB

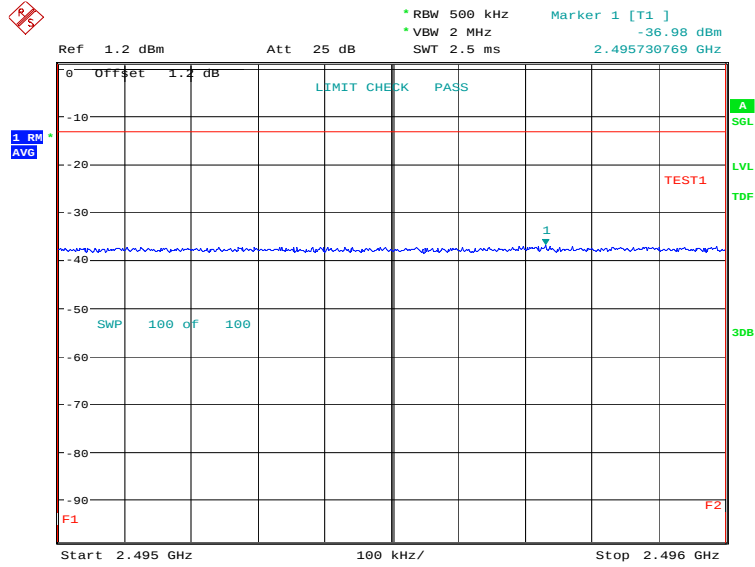


Date: 12.JUN.2019 09:42:55

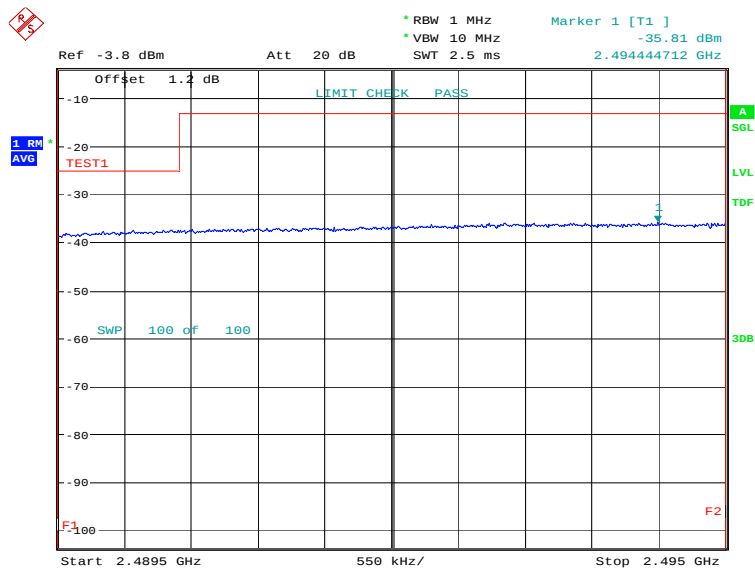


Date: 12.JUN.2019 09:43:10

HIGH BAND EDGE BLOCK-20MHz-100%RB

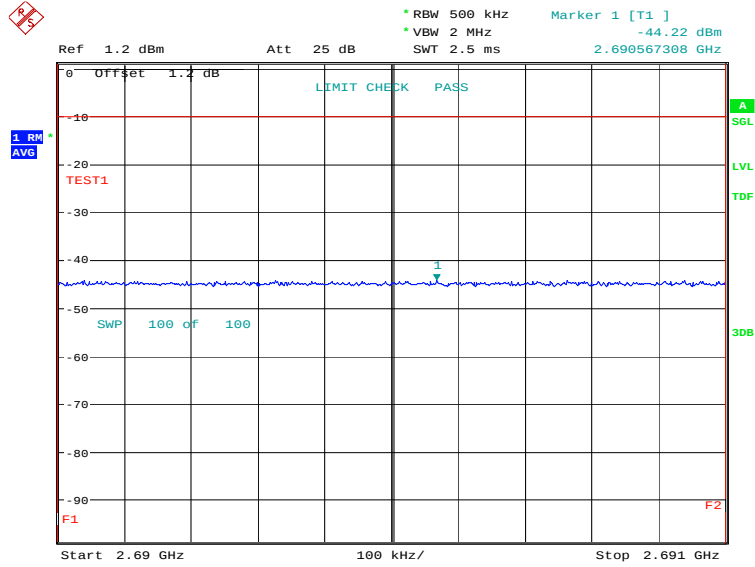


Date: 12.JUN.2019 09:46:22

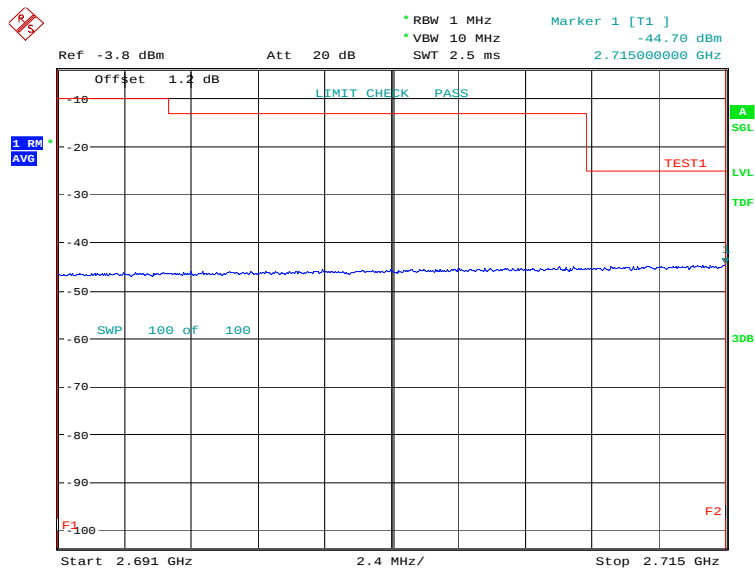

Date: 12.JUN.2019 09:46:37


LTE band 12

OBW: 1RB-low_offset

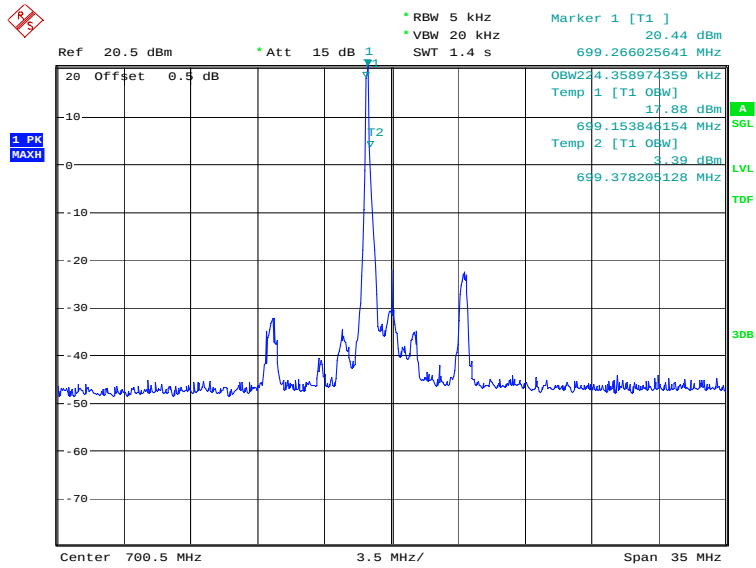


Date: 27.SEP.2019 15:57:50

LOW BAND EDGE BLOCK-1RB-low_offset

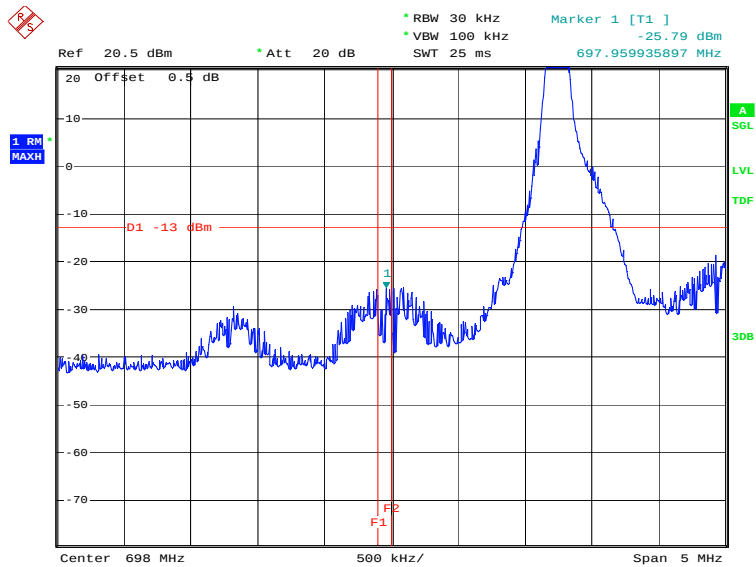


Date: 27.SEP.2019 15:58:06



Date: 27.SEP.2019 16:00:45


Date: 27.SEP.2019 16:01:01

LOW BAND EDGE BLOCK-10MHz-100%RB

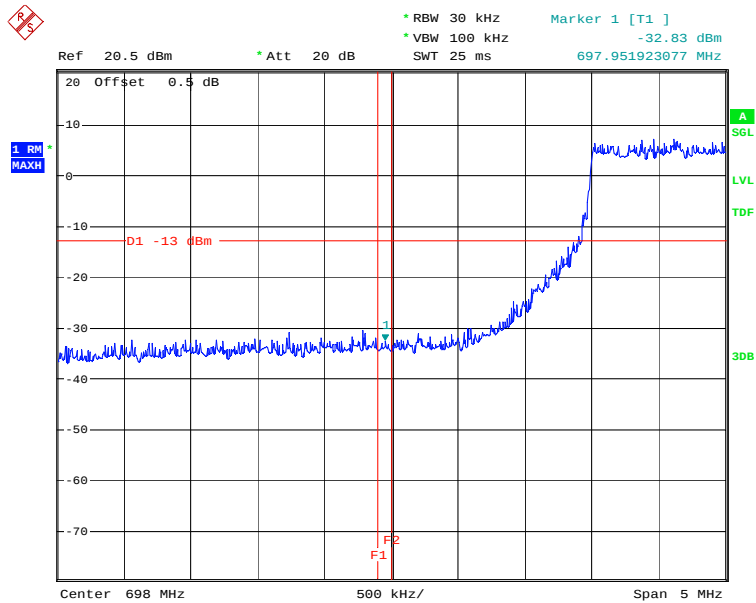

Date: 27.SEP.2019 15:58:47


HIGH BAND EDGE BLOCK-10MHz-100%RB

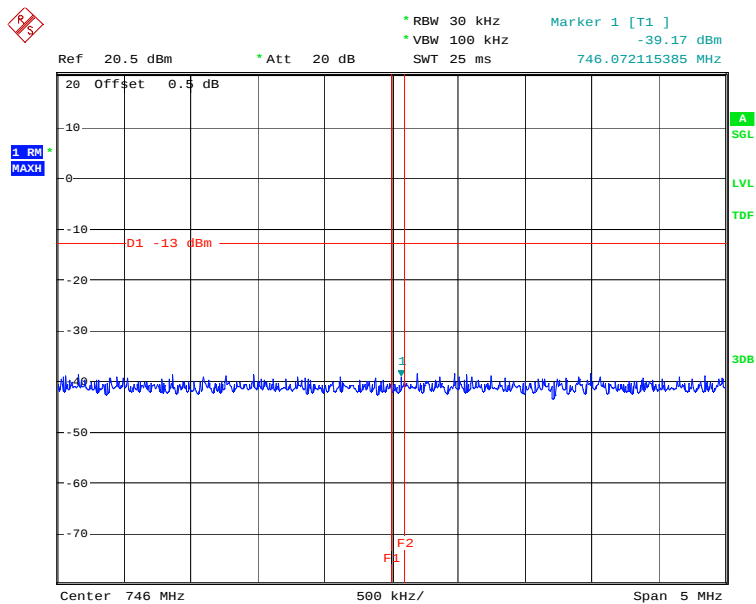

Date: 27.SEP.2019 16:01:42


LTE band 17

OBW: 1RB-low_offset


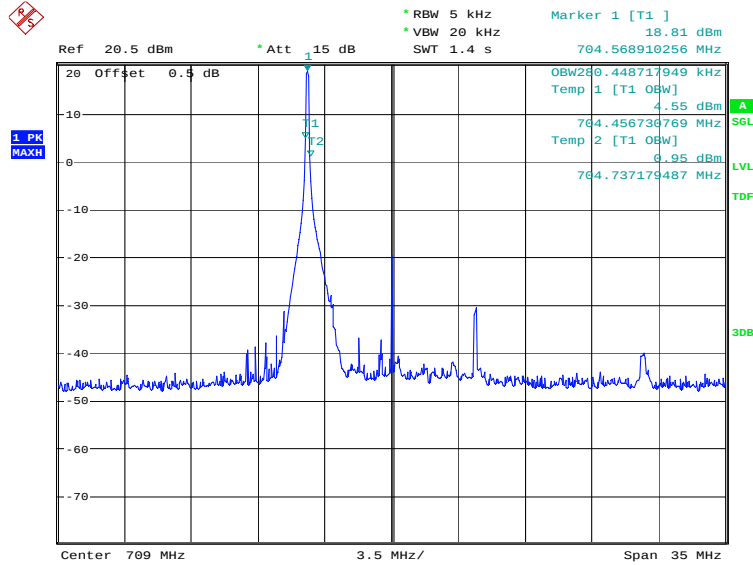



Date: 12.JUN.2019 09:49:37

LOW BAND EDGE BLOCK-1RB-low_offset

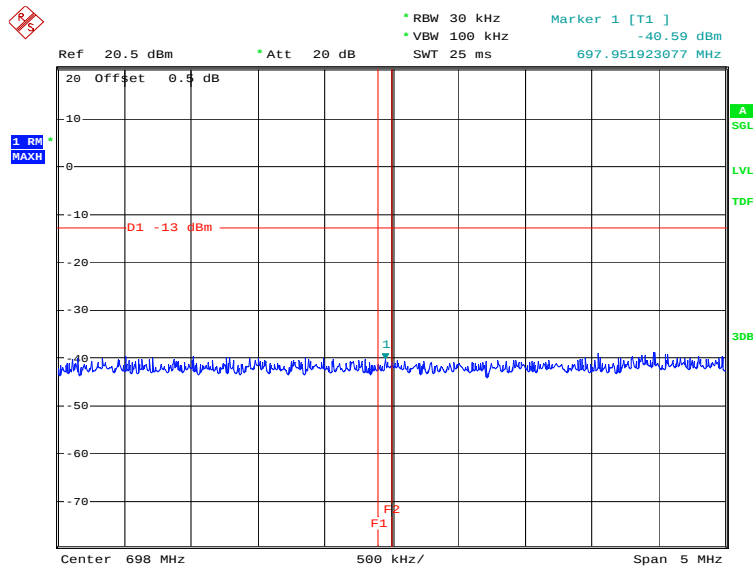

Date: 12.JUN.2019 09:49:52





The screenshot shows a Spectrum Analyzer interface. The main display is a plot of power spectral density (PSD) in dBm versus frequency in kHz. The y-axis ranges from -70 to 20 dBm, and the x-axis ranges from 0 to 1000 kHz. A blue trace shows a noisy signal centered around 698 kHz. A red horizontal line at -13 dBm is labeled 'D1 -13 dBm'. A red vertical line at 697.919871795 MHz is labeled 'Marker 1 [T1]'. The noise floor is indicated by a green label '-33.71 dBm' on the right side of the plot. The reference signal is indicated by a green label '-13 dBm' on the right side of the plot. The plot is titled '1 RBW MAXH' in the top left corner. The bottom of the plot shows 'Center 698 MHz', '500 kHz/' for the span, and 'Span 5 MHz'.

Ref 20.5 dBm Att 20 dB RBW 30 kHz VBW 100 kHz SWT 25 ms Marker 1 [T1] -40.02 dBm 746.080128205 MHz

20 Offset 0.4 dB

10

0

-10

-20

-30

-40

-50

-60

-70

D1 -13 dBm


F1 F2

Center 746 MHz 500 kHz/ Span 5 MHz

©Copyright. All rights reserved by CTTL.


LTE band 66

OBW: 1RB-low_offset

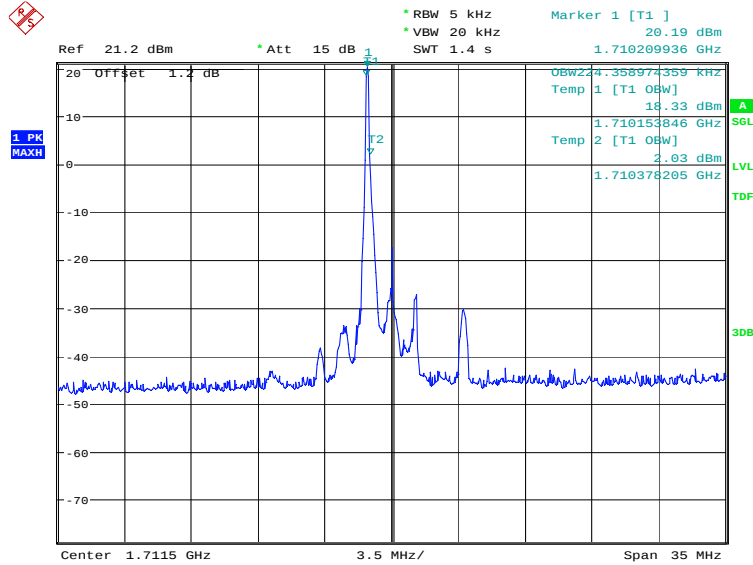


Date: 12.JUN.2019 10:16:17

LOW BAND EDGE BLOCK-1RB-low_offset

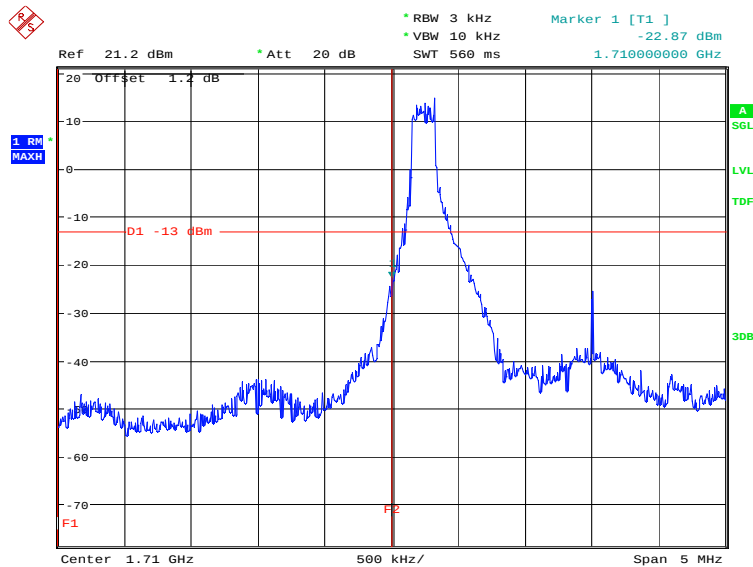


Date: 12.JUN.2019 10:16:32

OBW: 1RB-high_offset

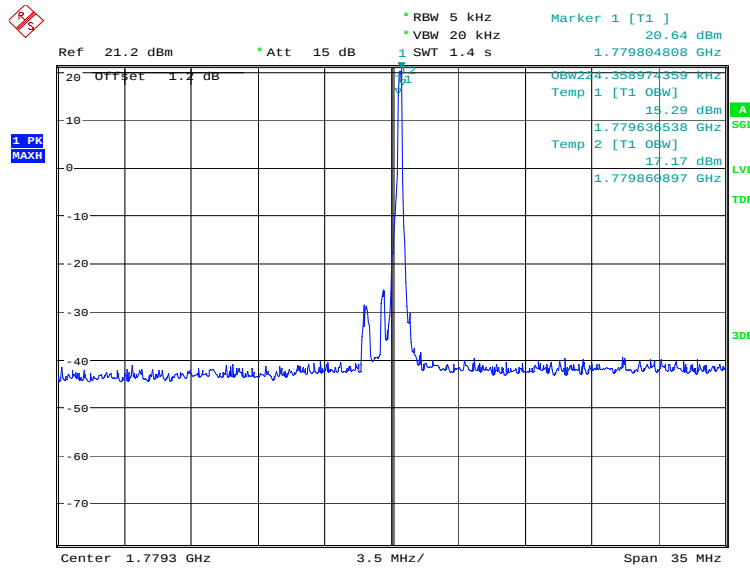


Date: 12.JUN.2019 10:18:34

HIGH BAND EDGE BLOCK-1RB-high_offset

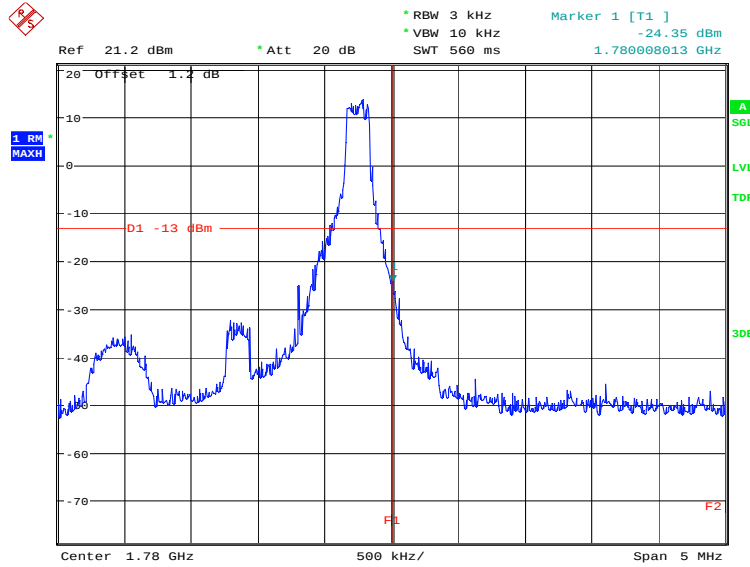


Date: 12.JUN.2019 10:18:49

LOW BAND EDGE BLOCK-20MHz-100%RB

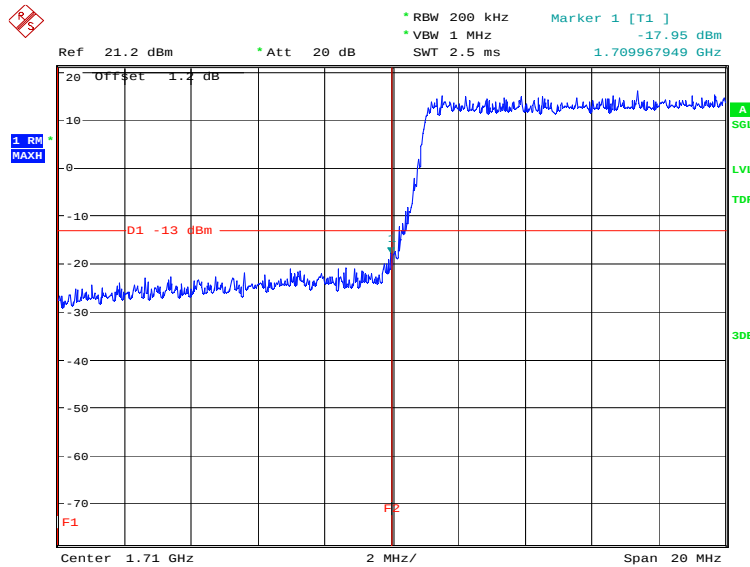

Date: 12.JUN.2019 10:17:13

HIGH BAND EDGE BLOCK-20MHz-100%RB

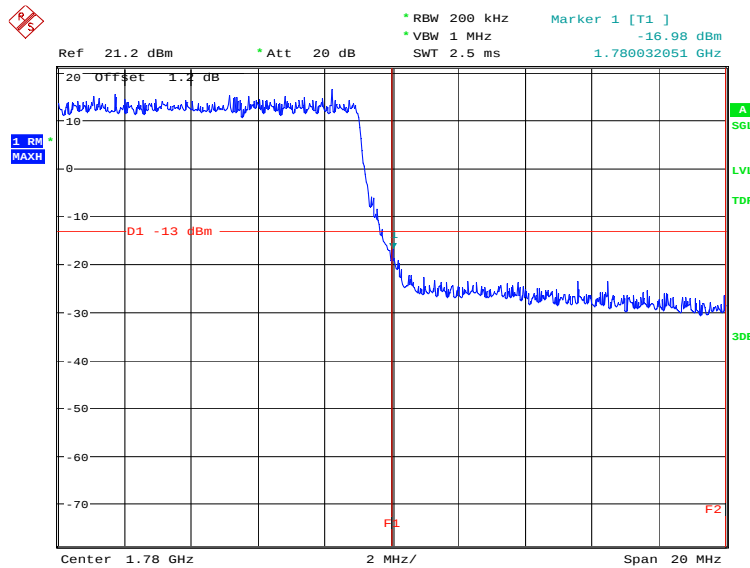

Date: 12.JUN.2019 10:19:20

A.7 CONDUCTED SPURIOUS EMISSION

A.7.1 Measurement Method

The following steps outline the procedure used to measure the conducted emissions from the EUT.

1. Determine frequency range for measurements: From CFR 2.1057 the spectrum should be investigated from the lowest radio frequency generated in the equipment up to at least the 10th harmonic of the carrier frequency. For the mobile station equipment tested, this equates to a frequency range of 13 MHz to 9 GHz, data taken from 10 MHz to 25 GHz.
2. Determine EUT transmit frequencies: below outlines the band edge frequencies pertinent to conducted emissions testing.
3. The number of sweep points of spectrum analyzer is set to 30001 which is greater than span/RBW.

A. 7.2 Measurement Limit

Part 22.917, Part 24.238 and Part 27.53(h) specify that the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

The specification that emissions shall be attenuated below the transmitter power (P) by at least $43 + 10 \log(P)$ dB, translates in the relevant power range (1 to 0.001 W) to -13 dBm. At 1 W the specified minimum attenuation becomes 43 dB and relative to a 30 dBm (1 W) carrier becomes a limit of -13 dBm. At 0.001 W (0 dBm) the minimum attenuation is 13 dB, which again yields a limit of -13 dBm. In this way a translation of the specification from relative to absolute terms is carried out.


Part 27.53(m)(4) specifies for mobile digital stations, the attenuation factor shall be not less than $40 + 10 \log(P)$ dB on all frequencies between the channel edge and 5 megahertz from the channel edge, $43 + 10 \log(P)$ dB on all frequencies between 5 megahertz and X megahertz from the channel edge, and $55 + 10 \log(P)$ dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth as defined in paragraph (m)(6) of this section. In addition, the attenuation factor shall not be less than $43 + 10 \log(P)$ dB on all frequencies between 2490.5 MHz and 2496 MHz and $55 + 10 \log(P)$ dB at or below 2490.5 MHz. Mobile Satellite Service licensees operating on frequencies below 2495 MHz may also submit a documented interference complaint against BRS licensees operating on channel BRS Channel 1 on the same terms and conditions as adjacent channel BRS or EBS licensees.

Part 27.53(c) states for operations in the 746-758 MHz band and the 776-788 MHz band, the power of any emission outside the licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, in accordance with the following: (1) On any frequency outside the 746-758 MHz band, the power of any emission shall be attenuated outside the band below the transmitter power (P) by at least $43 + 10 \log(P)$ dB; (2) On any frequency outside the 776-788 MHz band, the power of any emission shall be attenuated outside the band below the transmitter power (P) by at least $43 + 10 \log(P)$ dB; (4) On all frequencies between 763-775 MHz and 793-805 MHz, by a factor not less than $65 + 10 \log(P)$ dB in a 6.25 kHz band segment, for mobile and portable stations.

A. 7.2 Measurement result


Only worst case result is given below

LTE band 2: 30MHz – 19.15GHz

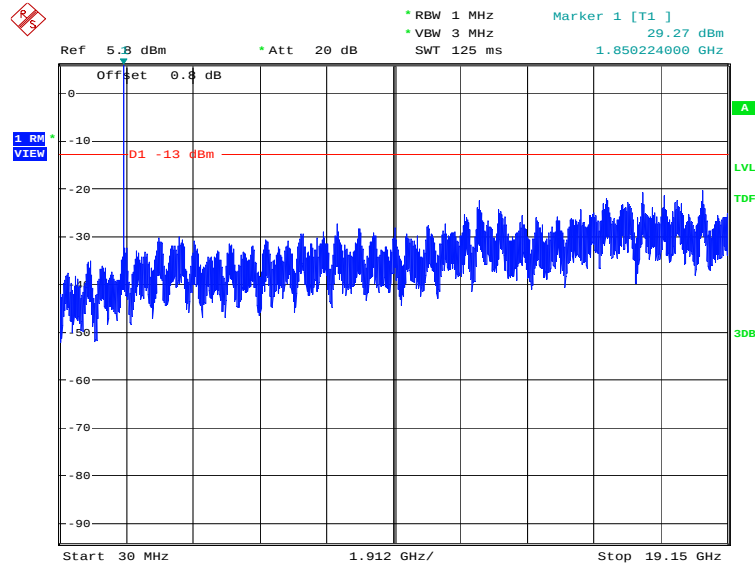


Date: 12.JUN.2019 10:30:25

LTE band 5: 30MHz – 8.49GHz

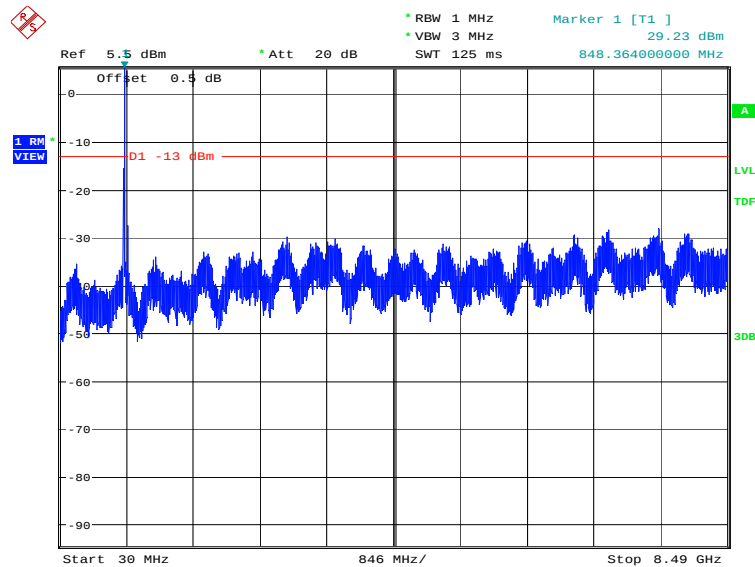


Date: 12.JUN.2019 10:28:21

LTE band 7: 30MHz – 26.5GHz

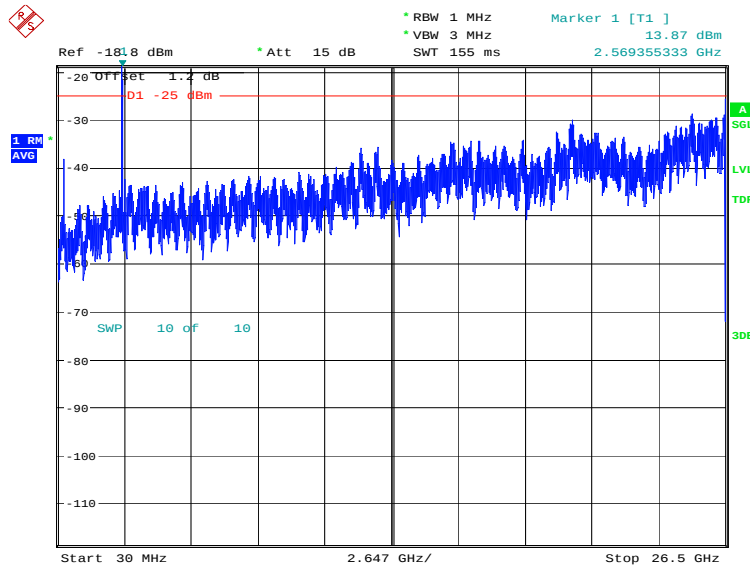


Date: 12.JUN.2019 10:24:24

LTE band 12: 30MHz – 7.46GHz

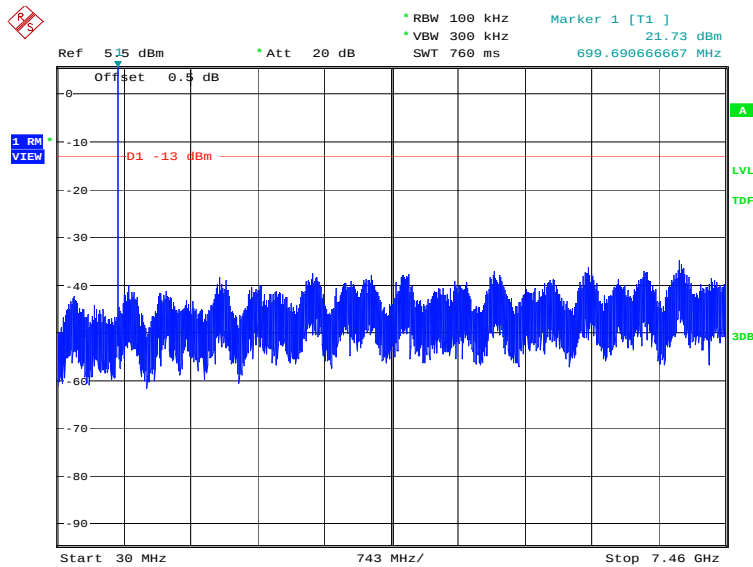


Date: 27.SEP.2019 16:02:42

LTE band 17: 30MHz – 7.46GHz

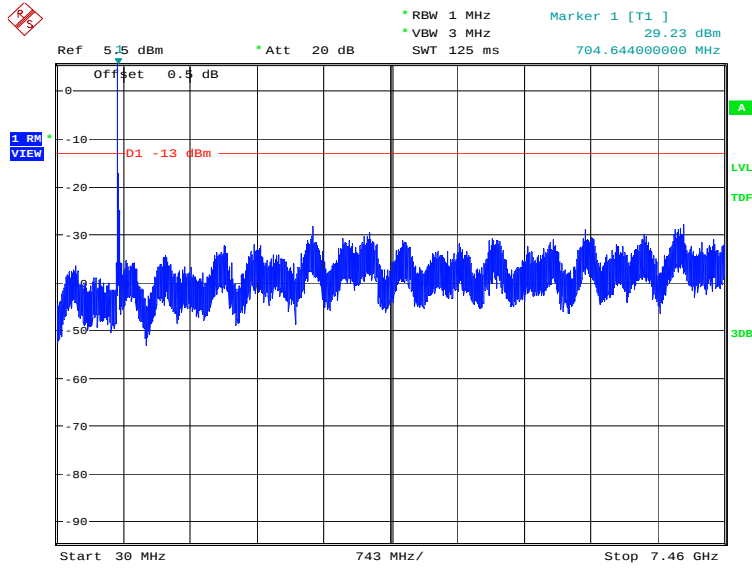

Date: 12.JUN.2019 10:23:00

LTE band 66: 30MHz – 17.8GHz

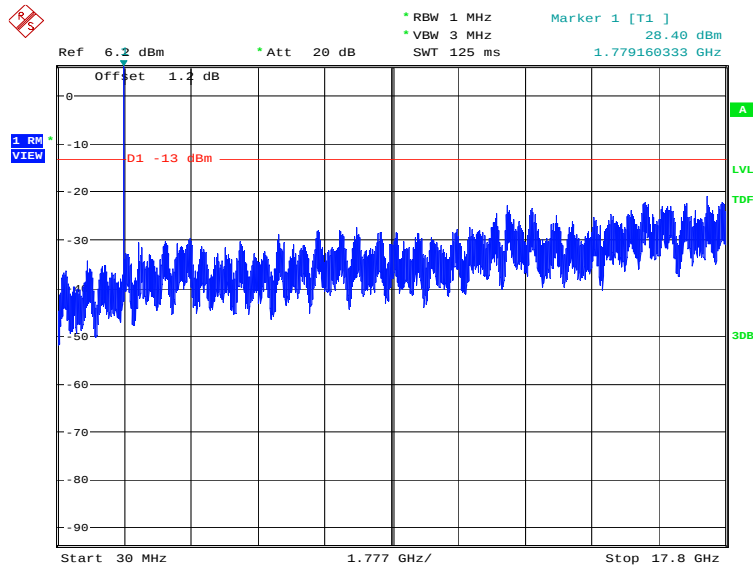

Date: 12.JUN.2019 10:21:35

A.8 PEAK-TO-AVERAGE POWER RATIO

The peak-to-average power ratio (PAPR) of the transmitter output power must not exceed 13 dB. The PAPR measurements should be made using either an instrument with complementary cumulative distribution function (CCDF) capabilities to determine that PAPR will not exceed 13 dB for more than 0.1 percent of the time or other Commission approved procedure. The measurement must be performed using a signal corresponding to the highest PAPR expected during periods of continuous transmission.

According to KDB 971168 5.7.1:

- a) Refer to instrument's analyzer instruction manual for details on how to use the power statistics/CCDF function;
- b) Set resolution/measurement bandwidth $\geq$ signal's occupied bandwidth;
- c) Set the number of counts to a value that stabilizes the measured CCDF curve;
- d) Set the measurement interval to 1 ms
- e) Record the maximum PAPR level associated with a probability of 0.1%

A.8.1 Measurement limit

not exceed 13 dB

A.8.2 Measurement results

LTE band 2, 20MHz

Frequency(MHz)	PAPR(dB)	
1880.0	QPSK	16QAM
	6.60	7.44

LTE band 7, 20MHz

Frequency(MHz)	PAPR(dB)	
2535.0	QPSK	16QAM
	6.89	7.37

LTE band 12, 10MHz

Frequency(MHz)	PAPR(dB)	
707.5	QPSK	16QAM
	5.45	6.19



LTE band 17,10MHz

Frequency(MHz)	PAPR(dB)	
710.0	QPSK	16QAM
	5.26	6.15

LTE band 66, 20MHz

Frequency(MHz)	PAPR(dB)	
1745.0	QPSK	16QAM
	6.63	7.15

ANNEX B: Accreditation Certificate

United States Department of Commerce National Institute of Standards and Technology NVLAP[®] Certificate of Accreditation to ISO/IEC 17025:2005 NVLAP LAB CODE: 600118-0 Telecommunication Technology Labs, CAICT Beijing China <i>is accredited by the National Voluntary Laboratory Accreditation Program for specific services, listed on the Scope of Accreditation, for:</i> Electromagnetic Compatibility & Telecommunications <i>This laboratory is accredited in accordance with the recognized International Standard ISO/IEC 17025:2005. This accreditation demonstrates technical competence for a defined scope and the operation of a laboratory quality management system (refer to joint ISO-ILAC-IAF Communique dated January 2009).</i> <table><tr><td> 2018-09-28 through 2019-09-30 Effective Dates </td><td></td><td> <i>[Signature]</i> For the National Voluntary Laboratory Accreditation Program </td></tr></table>		2018-09-28 through 2019-09-30 Effective Dates		<i>[Signature]</i> For the National Voluntary Laboratory Accreditation Program
2018-09-28 through 2019-09-30 Effective Dates		<i>[Signature]</i> For the National Voluntary Laboratory Accreditation Program		

END OF REPORT