



FCC RF Test Report

APPLICANT : Shenzhen Tinno Mobile Technology Corp.
EQUIPMENT : HONOR CHOICE TNHCHOP Pencil
BRAND NAME : TNHCHOP
MODEL NAME : MAL-HP00
FCC ID : XD6MAL-HP00
STANDARD : FCC Part 15 Subpart C §15.247
CLASSIFICATION : (DTS) Digital Transmission System
TEST DATE(S) : Jan. 02, 2024 ~ Jan. 10, 2024

We, Sporton International Inc. (Shenzhen), would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. (Shenzhen), the test report shall not be reproduced except in full.

Jason Jia



Approved by: Jason Jia

Sporton International Inc. (ShenZhen)

1/F, 2/F, Bldg 5, Shiling Industrial Zone, Xinwei Village, Xili, Nanshan, Shenzhen, 518055

People's Republic of China



TABLE OF CONTENTS

| | |
|--|-----------|
| REVISION HISTORY..... | 3 |
| SUMMARY OF TEST RESULT | 4 |
| 1 GENERAL DESCRIPTION..... | 5 |
| 1.1 Applicant..... | 5 |
| 1.2 Manufacturer..... | 5 |
| 1.3 Product Feature of Equipment Under Test..... | 5 |
| 1.4 Product Specification of Equipment Under Test..... | 5 |
| 1.5 Modification of EUT | 5 |
| 1.6 Testing Location | 6 |
| 1.7 Test Software..... | 6 |
| 1.8 Applicable Standards..... | 6 |
| 2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST..... | 7 |
| 2.1 Carrier Frequency Channel | 7 |
| 2.2 Test Mode..... | 8 |
| 2.3 Connection Diagram of Test System..... | 9 |
| 2.4 Support Unit used in test configuration and system | 10 |
| 2.5 EUT Operation Test Setup | 10 |
| 2.6 Measurement Results Explanation Example..... | 10 |
| 3 TEST RESULT | 11 |
| 3.1 6dB and 99% Bandwidth Measurement | 11 |
| 3.2 Output Power Measurement..... | 18 |
| 3.3 Power Spectral Density Measurement | 19 |
| 3.4 Conducted Band Edges and Spurious Emission Measurement | 26 |
| 3.5 Radiated Band Edges and Spurious Emission Measurement | 35 |
| 3.6 AC Conducted Emission Measurement..... | 39 |
| 3.7 Antenna Requirements..... | 41 |
| 4 LIST OF MEASURING EQUIPMENT..... | 42 |
| 5 MEASUREMENT UNCERTAINTY..... | 43 |
| APPENDIX A. CONDUCTED TEST RESULTS | |
| APPENDIX B. AC CONDUCTED EMISSION TEST RESULT | |
| APPENDIX C. RADIATED SPURIOUS EMISSION AND PLOTS | |
| APPENDIX D. DUTY CYCLE PLOTS | |
| APPENDIX E. SETUP PHOTOGRAPHS | |



REVISION HISTORY

| REPORT NO. | VERSION | DESCRIPTION | ISSUED DATE |
|------------|---------|-------------------------|---------------|
| FR3D0505 | Rev. 01 | Initial issue of report | Feb. 01, 2024 |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |

SUMMARY OF TEST RESULT

| Report Section | FCC Rule | Description | Limit | Result | Remark |
|----------------|--------------------|--|--------------------------------|-------------|---|
| 3.1 | 15.247(a)(2) | 6dB Bandwidth | $\geq 0.5\text{MHz}$ | Pass | - |
| 3.1 | - | 99% Bandwidth | - | Report only | - |
| 3.2 | 15.247(b)(3) | Peak Output Power | $\leq 30\text{dBm}$ | Pass | - |
| 3.3 | 15.247(e) | Power Spectral Density | $\leq 8\text{dBm}/3\text{kHz}$ | Pass | - |
| 3.4 | 15.247(d) | Conducted Band Edges and Spurious Emission | $\leq 20\text{dBc}$ | Pass | - |
| 3.5 | 15.247(d) | Radiated Band Edges and Spurious Emission | 15.209(a) & 15.247(d) | Pass | Under limit 3.70 dB at 4804.000 MHz |
| 3.6 | 15.207 | AC Conducted Emission | 15.207(a) | Pass | Under limit 17.30 dB at 0.660 MHz |
| 3.7 | 15.203 & 15.247(b) | Antenna Requirement | 15.203 & 15.247(b) | Pass | - |

Conformity Assessment Condition:

- The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacture who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
- The measurement uncertainty please refer to each test result in the section "Measurement Uncertainty"

Disclaimer:

The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.

1 General Description

1.1 Applicant

Shenzhen Tinno Mobile Technology Corp.

27-001, South Side of Tianlong Mobile Headquarters Building, Tongfa South Road, Xili Community, Xili Street, Nanshan District, Shenzhen City, Guangdong Province, PRC.

1.2 Manufacturer

Shenzhen Tinno Mobile Technology Corp.

27-001, South Side of Tianlong Mobile Headquarters Building, Tongfa South Road, Xili Community, Xili Street, Nanshan District, Shenzhen City, Guangdong Province, PRC.

1.3 Product Feature of Equipment Under Test

| Product Feature | |
|-----------------|-----------------------------|
| Equipment | HONOR CHOICE TNHCHOP Pencil |
| Brand Name | TNHCHOP |
| Model Name | MAL-HP00 |
| FCC ID | XD6MAL-HP00 |
| EUT Stage | Production Unit |

Remark: The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

1.4 Product Specification of Equipment Under Test

| Standards-related Product Specification | |
|---|--|
| Tx/Rx Frequency Range | 2402 MHz ~ 2480 MHz |
| Number of Channels | 40 |
| Carrier Frequency of Each Channel | 40 Channel(37 hopping + 3 advertising channel) |
| Maximum Output Power to Antenna | BLE 1Mbps: 7.09 dBm (0.0051 W) BLE 2Mbps: 7.01 dBm (0.0050 W) |
| 99% Occupied Bandwidth | BLE 1Mbps:1.033MHz BLE 2Mbps:2.046MHz |
| Antenna Type / Gain | FPC Antenna with gain 0.80 dBi |
| Type of Modulation | Bluetooth LE : GFSK |

1.5 Modification of EUT

No modifications are made to the EUT during all test items.



1.6 Testing Location

Sporton International Inc. (ShenZhen) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.01.

| | | | |
|---------------------------|---|----------------------------|---------------------------------------|
| Test Firm | Sporton International Inc. (ShenZhen) | | |
| Test Site Location | 1/F, 2/F, Bldg 5, Shiling Industrial Zone, Xinwei Village, Xili, Nanshan, Shenzhen, 518055 People's Republic of China TEL: +86-755-86379589 FAX: +86-755-86379595 | | |
| Test Site No. | Sporton Site No. | FCC Designation No. | FCC Test Firm Registration No. |
| | CO01-SZ TH01-SZ | CN1256 | 421272 |

| | | | |
|---------------------------|---|----------------------------|---------------------------------------|
| Test Firm | Sporton International Inc. (ShenZhen) | | |
| Test Site Location | 101, 1st Floor, Block B, Building 1, No. 2, Tengfeng 4th Road, Fenghuang Community, Fuyong Street, Baoan District, Shenzhen City, Guangdong Province 518103 People's Republic of China TEL: +86-755-86066985 | | |
| Test Site No. | Sporton Site No. | FCC Designation No. | FCC Test Firm Registration No. |
| | 03CH04-SZ | CN1256 | 421272 |

1.7 Test Software

| Item | Site | Manufacturer | Name | Version |
|------|-----------|--------------|------|-------------|
| 1. | 03CH04-SZ | AUDIX | E3 | 6.2009-8-24 |
| 2. | CO01-SZ | AUDIX | E3 | 6.120613b |

1.8 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- 47 CFR Part 15 Subpart C §15.247
- FCC KDB 558074 D01 15.247 Meas Guidance v05r02
- ANSI C63.10-2013

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.



2 Test Configuration of Equipment Under Test

2.1 Carrier Frequency Channel

| Frequency Band | Channel | Freq. (MHz) | Channel | Freq. (MHz) |
|-----------------|---------|----------------|---------|----------------|
| 2400-2483.5 MHz | 0 | 2402 | 21 | 2444 |
| | 1 | 2404 | 22 | 2446 |
| | 2 | 2406 | 23 | 2448 |
| | 3 | 2408 | 24 | 2450 |
| | 4 | 2410 | 25 | 2452 |
| | 5 | 2412 | 26 | 2454 |
| | 6 | 2414 | 27 | 2456 |
| | 7 | 2416 | 28 | 2458 |
| | 8 | 2418 | 29 | 2460 |
| | 9 | 2420 | 30 | 2462 |
| | 10 | 2422 | 31 | 2464 |
| | 11 | 2424 | 32 | 2466 |
| | 12 | 2426 | 33 | 2468 |
| | 13 | 2428 | 34 | 2470 |
| | 14 | 2430 | 35 | 2472 |
| | 15 | 2432 | 36 | 2474 |
| | 16 | 2434 | 37 | 2476 |
| | 17 | 2436 | 38 | 2478 |
| | 18 | 2438 | 39 | 2480 |
| | 19 | 2440 | - | - |
| | 20 | 2442 | - | - |

2.2 Test Mode


- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (X plane) were recorded in this report.
- b. AC power line Conducted Emission was tested under maximum output power.

The following summary table is showing all test modes to demonstrate in compliance with the standard.


| Summary table of Test Cases | |
|--|---|
| Test Item | Data Rate / Modulation |
| | Bluetooth – LE / GFSK |
| Conducted TCs | Mode 1: Bluetooth Tx CH00_2402 MHz_BLE 1Mbps |
| | Mode 2: Bluetooth Tx CH19_2440 MHz_BLE 1Mbps |
| | Mode 3: Bluetooth Tx CH39_2480 MHz_BLE 1Mbps |
| | Mode 4: Bluetooth Tx CH00_2402 MHz_BLE 2Mbps |
| | Mode 5: Bluetooth Tx CH19_2440 MHz_BLE 2Mbps |
| | Mode 6: Bluetooth Tx CH39_2480 MHz_BLE 2Mbps |
| Radiated TCs | Mode 1: Bluetooth Tx CH00_2402 MHz_BLE 1Mbps |
| | Mode 2: Bluetooth Tx CH19_2440 MHz_BLE 1Mbps |
| | Mode 3: Bluetooth Tx CH39_2480 MHz_BLE 1Mbps |
| | Mode 4: Bluetooth Tx CH00_2404 MHz_BLE 2Mbps |
| | Mode 5: Bluetooth Tx CH39_2478 MHz_BLE 2Mbps |
| AC Conducted Emission | Mode 1: Bluetooth Link + USB Cable(Charging From Adapter) + Battery |
| Remark: For Radiated Test Cases, The tests were performed with Adapter, Battery and USB Cable | |

2.3 Connection Diagram of Test System

< AC Conducted Emission >

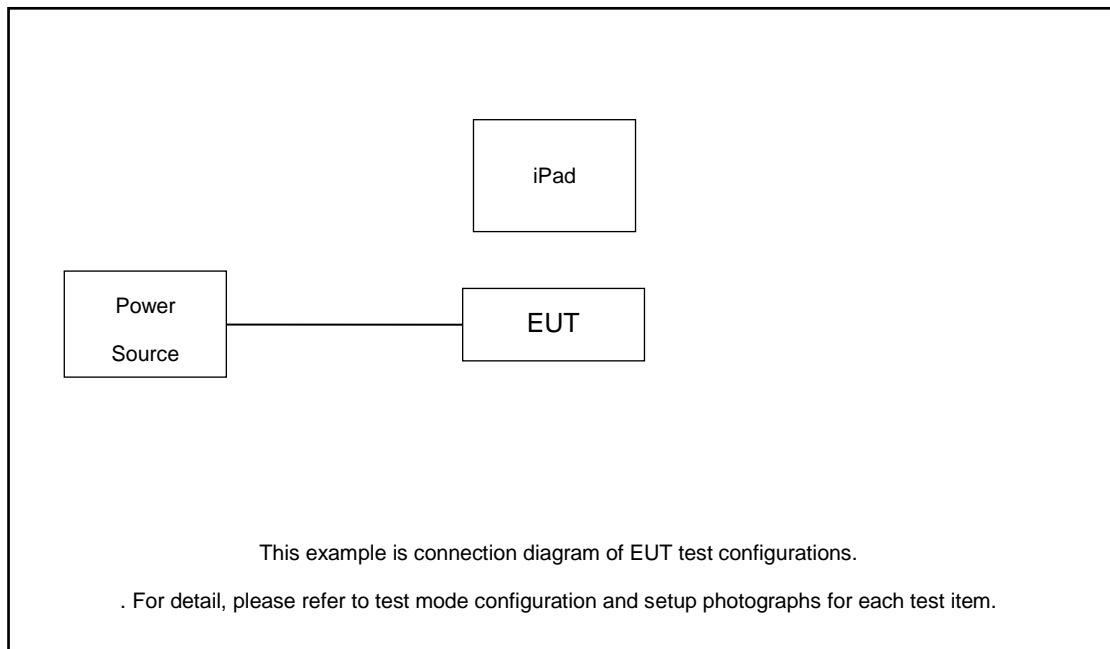

< Radiated Emission >

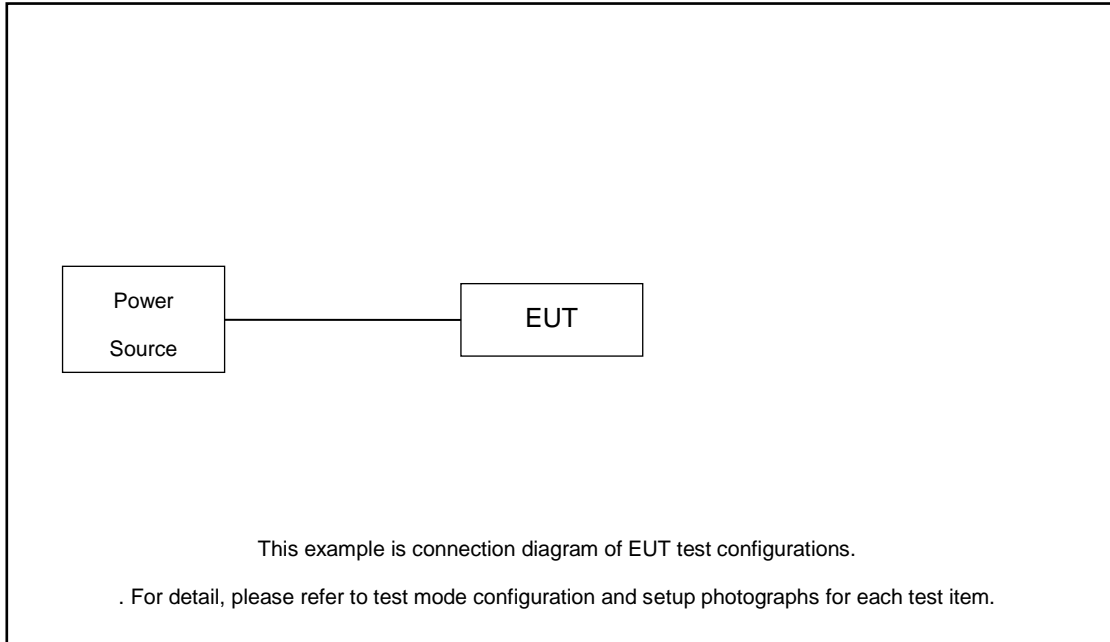

2.4 Support Unit used in test configuration and system

| Item | Equipment | Trade Name | Model Name | FCC ID | Data Cable | Power Cord |
|------|-----------|------------|------------|--------|------------|------------|
| 1. | USB Cable | NA | NA | NA | NA | N/A |
| 2. | Adapter | NA | NA | NA | NA | N/A |
| 3. | iPad | Honor | HEY2-W09 | N/A | N/A | N/A |

2.5 EUT Operation Test Setup

For BLE function, the engineering test program was provided and enabled to make EUT continuous transmit.

2.6 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example :

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 3.30 dB and 20dB attenuator.

$$\begin{aligned}\text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)} \\ &= 3.30 + 20 = 23.30 \text{ (dB)}\end{aligned}$$

3 Test Result

3.1 6dB and 99% Bandwidth Measurement

3.1.1 Limit of 6dB and 99% Bandwidth

The minimum 6 dB bandwidth shall be at least 500 kHz.

3.1.2 Measuring Instruments

The section 4.0 of List of Measuring Equipment of this test report is used for test.

3.1.3 Test Procedures

1. The testing follows ANSI C63.10-2013 clause 11.8
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. Set the Video bandwidth (VBW) = 300 kHz. In order to make an accurate measurement. The 6 dB bandwidth must be greater than 500 kHz.
5. For 99% Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) is set 1% to 5% of the 99% OBW and the VBW is set to 3 times of the RBW.
6. Measure and record the results in the test report.

3.1.4 Test Setup






3.1.5 Test Result of 6dB Bandwidth

Please refer to Appendix A.


BLE 1Mbps

6 dB Bandwidth Plot on Channel 00

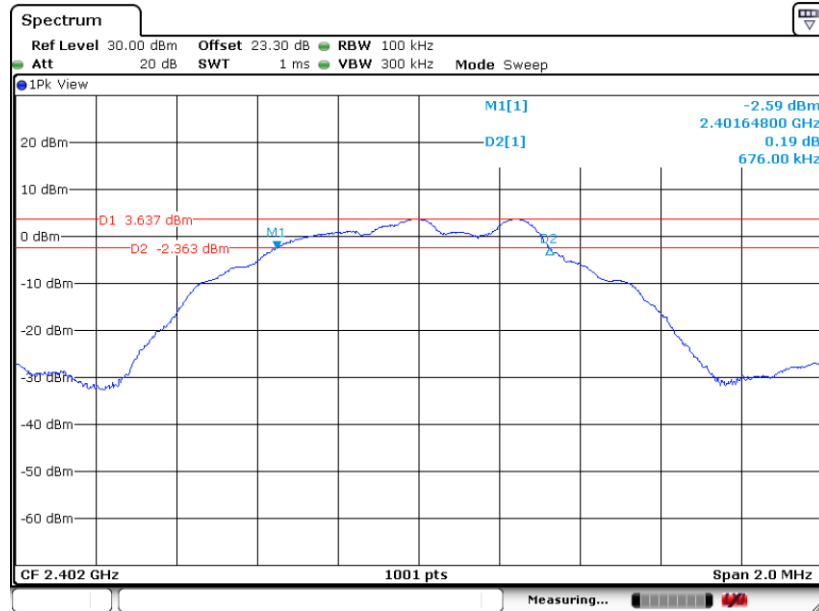

Date: 3. JAN 2024 14:24:24


6 dB Bandwidth Plot on Channel 19

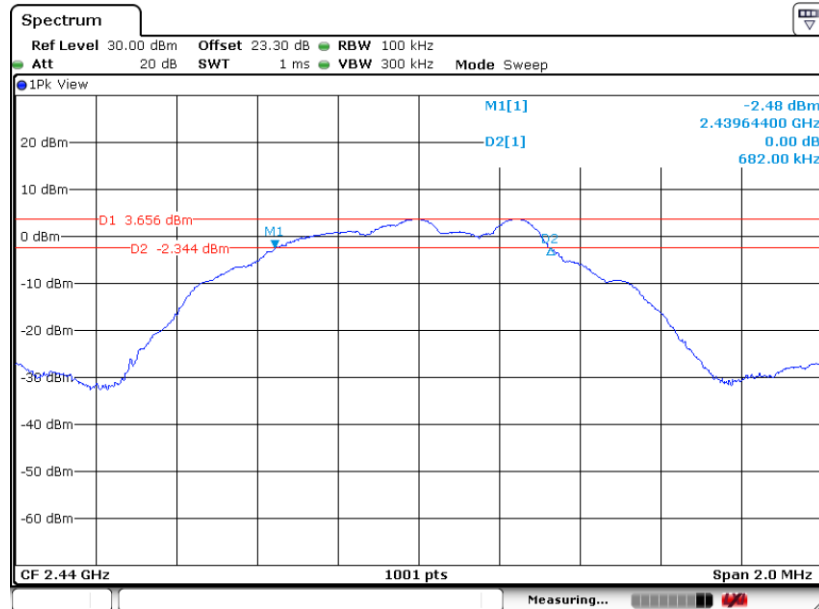

Date: 3. JAN 2024 14:27:57




6 dB Bandwidth Plot on Channel 39

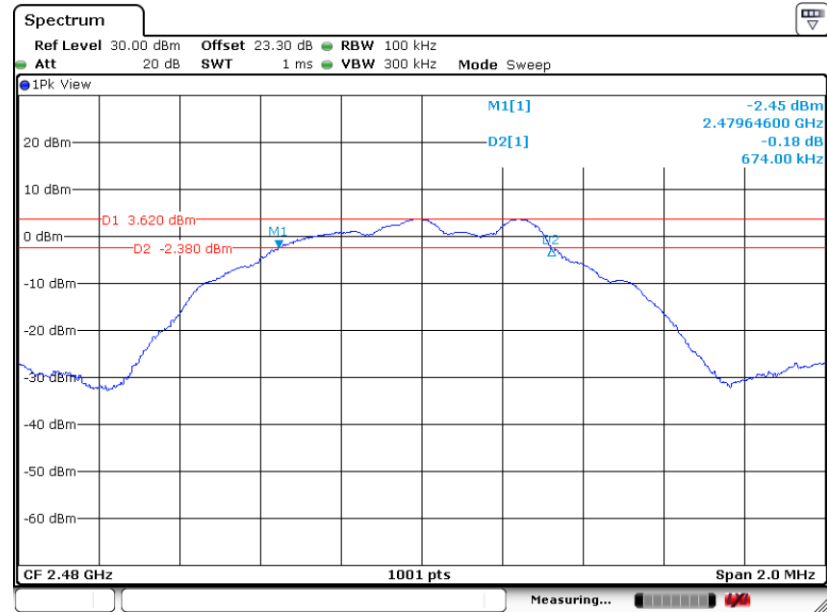

Date: 3 JAN 2024 14:30:05

BLE 2Mbps


6 dB Bandwidth Plot on Channel 00

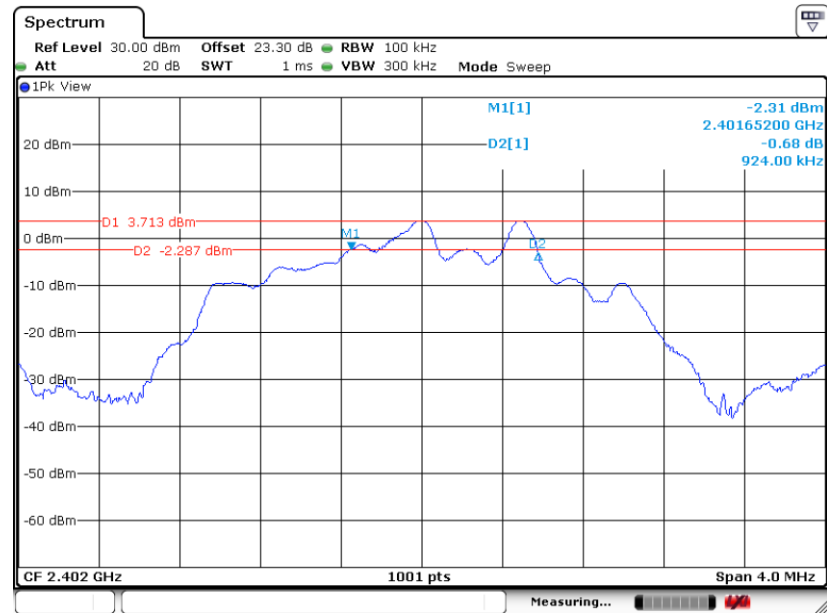

Date: 3 JAN 2024 14:37:53




6 dB Bandwidth Plot on Channel 19

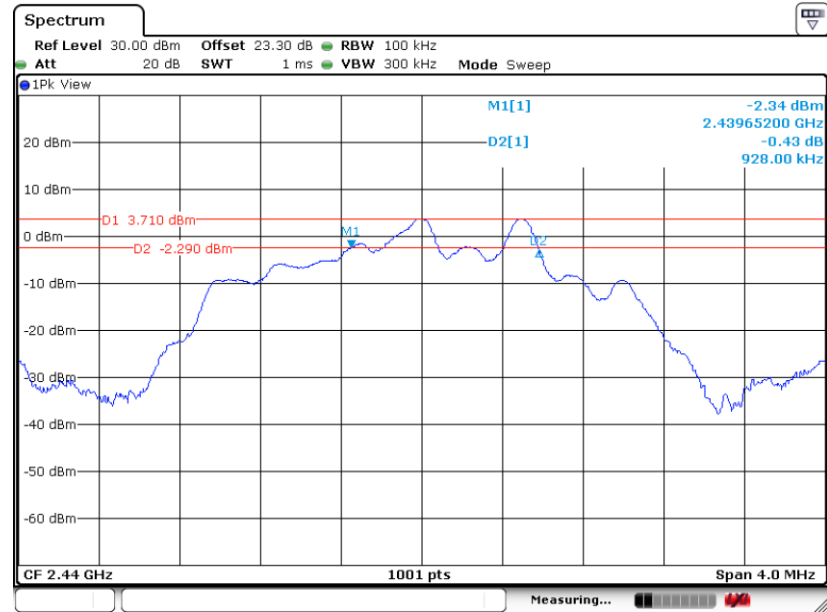

Date: 3 JAN 2024 14:36:07

6 dB Bandwidth Plot on Channel 39

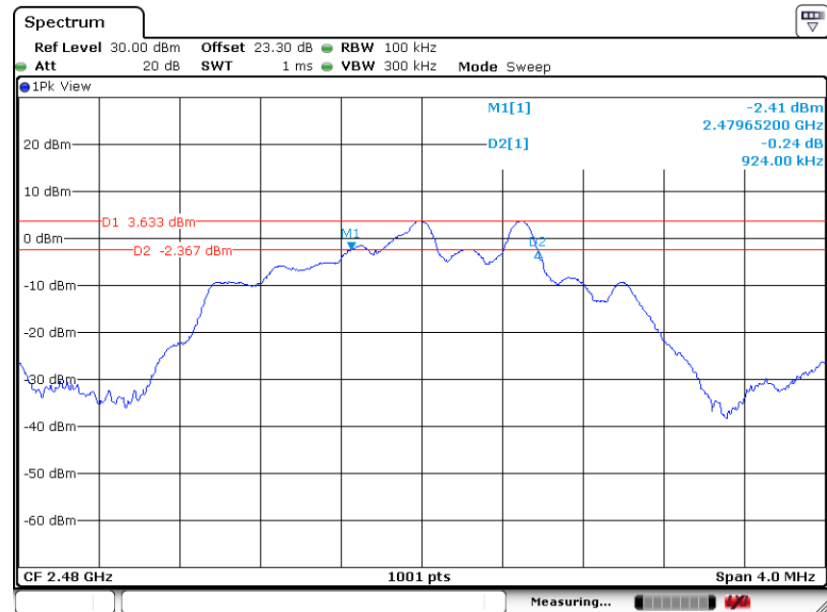

Date: 3 JAN 2024 14:33:14




3.1.6 Test Result of 99% Occupied Bandwidth


Please refer to Appendix A.

BLE 1Mbps

99% Occupied Bandwidth Plot on Channel 00

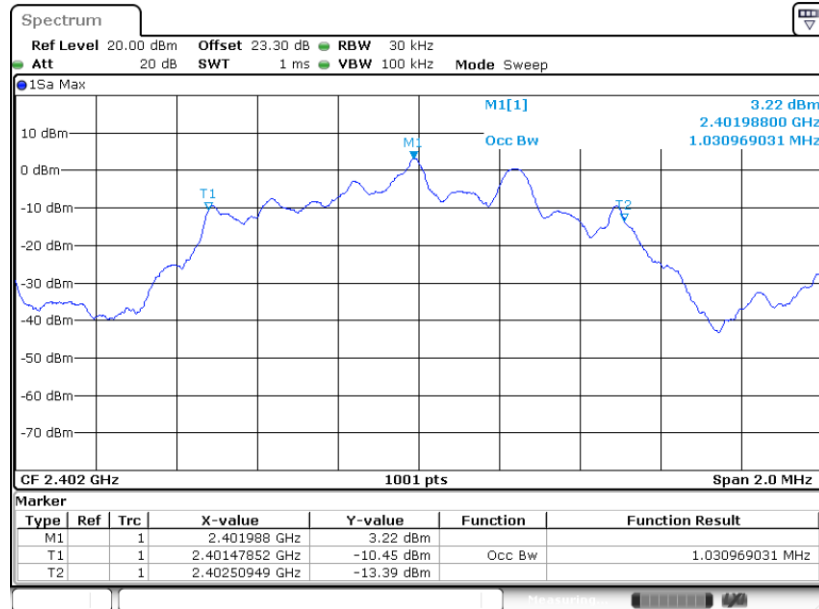


99% Occupied Bandwidth Plot on Channel 19

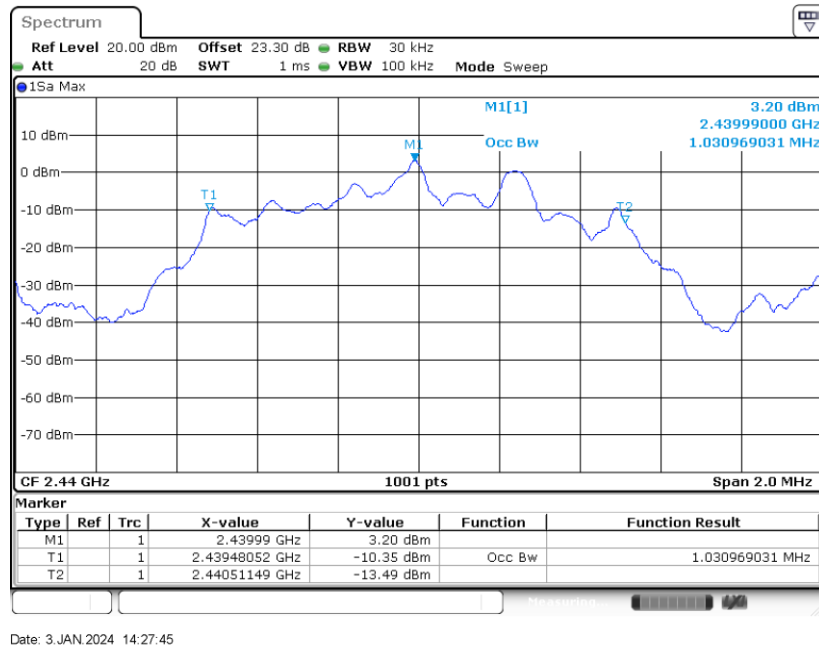




99% Occupied Bandwidth Plot on Channel 39

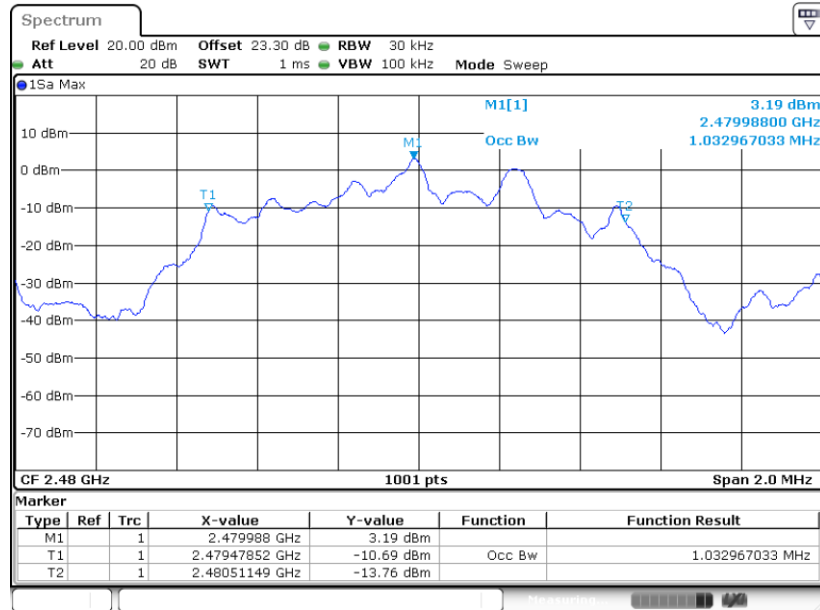

Date: 3 JAN 2024 14:29:49

BLE 2Mbps


99% Occupied Bandwidth Plot on Channel 00

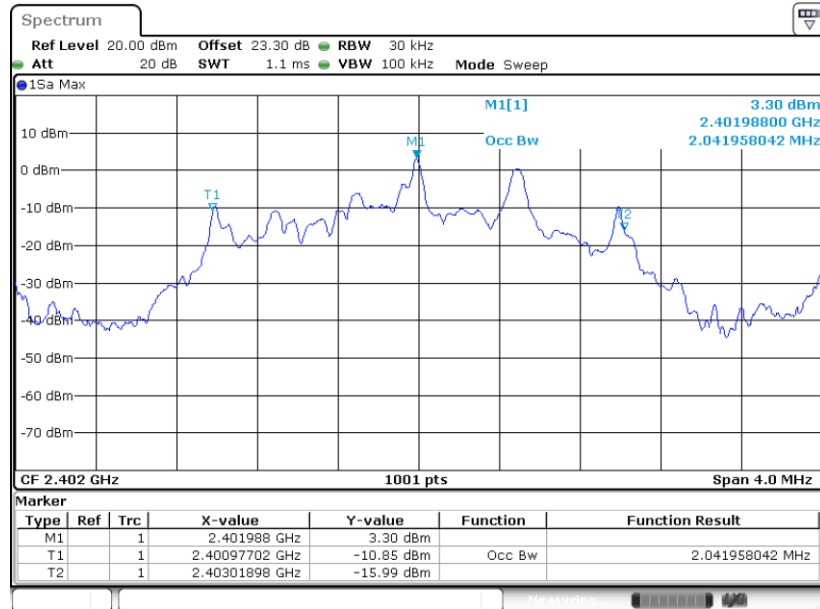

Date: 3 JAN 2024 14:37:40




99% Occupied Bandwidth Plot on Channel 19

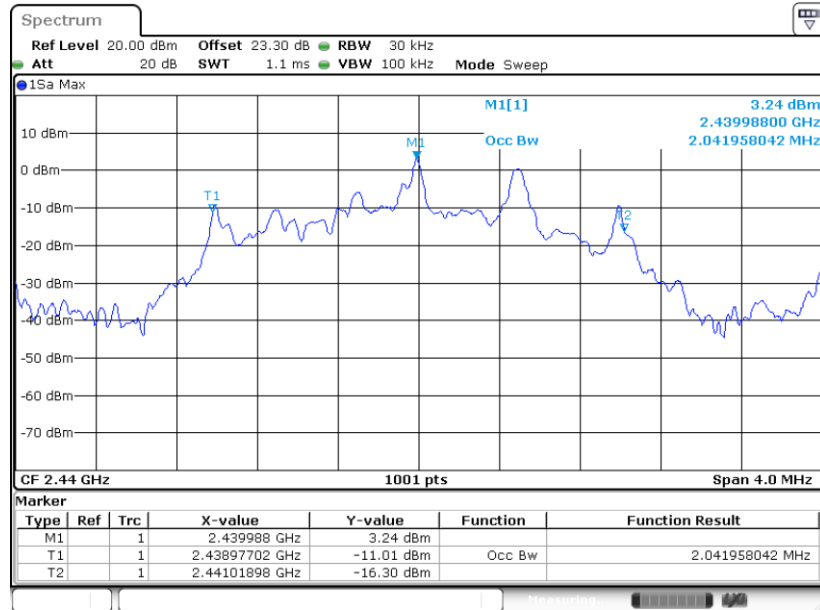

Date: 3 JAN 2024 14:35:55

99% Occupied Bandwidth Plot on Channel 39

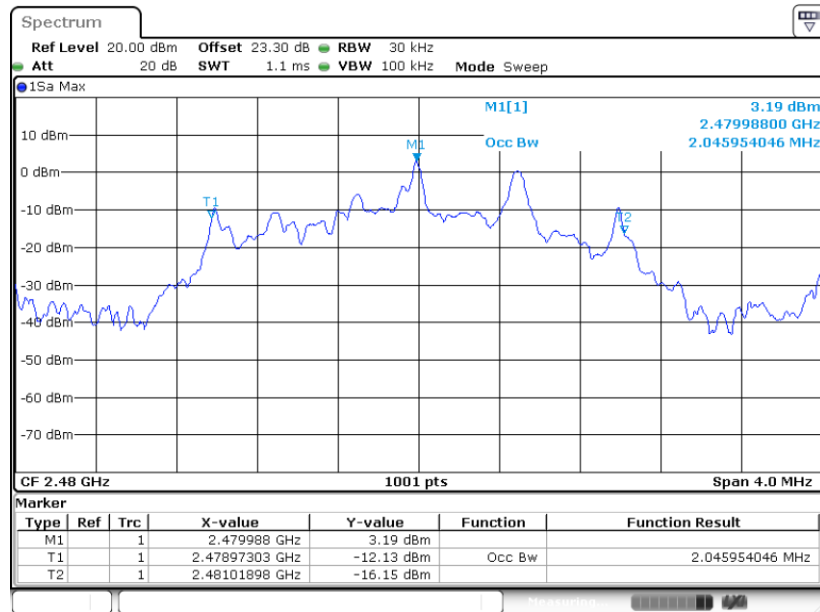

Date: 3 JAN 2024 14:33:02

Note : The occupied channel bandwidth is maintained within the band of operation for all of the modulations.

3.2 Output Power Measurement

3.2.1 Limit of Output Power

For systems using digital modulation in the 2400-2483.5MHz, the limit for peak output power is 30dBm. If transmitting antenna of directional gain greater than 6dBi is used, the peak output power from the intentional radiator shall be reduced below the above stated value by the amount in dB that the directional gain of the antenna exceeds 6 dBi. In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi.


3.2.2 Measuring Instruments

The section 4.0 of List of Measuring Equipment of this test report is used for test.

3.2.3 Test Procedures

1. The testing follows the Measurement Procedure of ANSI C63.10-2013 clause 11.9.1.3 PKPM1 Peak power meter or ANSI C63.10-2013 clause 11.9.2.3.1 Method AVGPM method.
2. The RF output of EUT was connected to the power meter by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Measure the conducted output power and record the results in the test report.

3.2.4 Test Setup

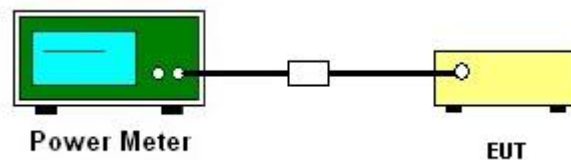

3.2.5 Test Result of Peak Output Power

Please refer to Appendix A.

3.2.6 Test Result of Average Output Power (Reporting Only)

Please refer to Appendix A.

3.3 Power Spectral Density Measurement

3.3.1 Limit of Power Spectral Density

The peak power spectral density shall not be greater than 8dBm in any 3kHz band at any time interval of continuous transmission.


3.3.2 Measuring Instruments

The section 4.0 of List of Measuring Equipment of this test report is used for test.

3.3.3 Test Procedures

1. The testing follows Measurement Procedure of ANSI C63.10-2013 clause 11.10.2 Method PKPSD.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 3 kHz. Video bandwidth VBW = 10 kHz In order to make an accurate measurement, set the span to 1.5 times DTS Channel Bandwidth. (6dB BW)
5. Detector = peak, Sweep time = auto couple, Trace mode = max hold, Allow trace to fully stabilize. Use the peak marker function to determine the maximum power level.
6. Measure and record the results in the test report.
7. The Measured power density (dBm)/ 100kHz is a reference level and used as 20dBc down limit line for Conducted Band Edges and Conducted Spurious Emission.

3.3.4 Test Setup

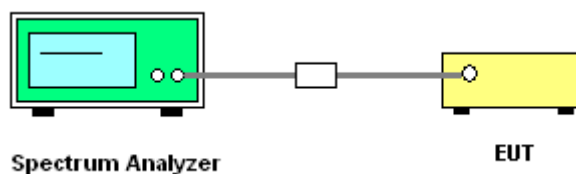


3.3.5 Test Result of Power Spectral Density

Please refer to Appendix A.

3.3.6 Test Result of Power Spectral Density Plots (100kHz)


BLE 1Mbps

PSD 100kHz Plot on Channel 00

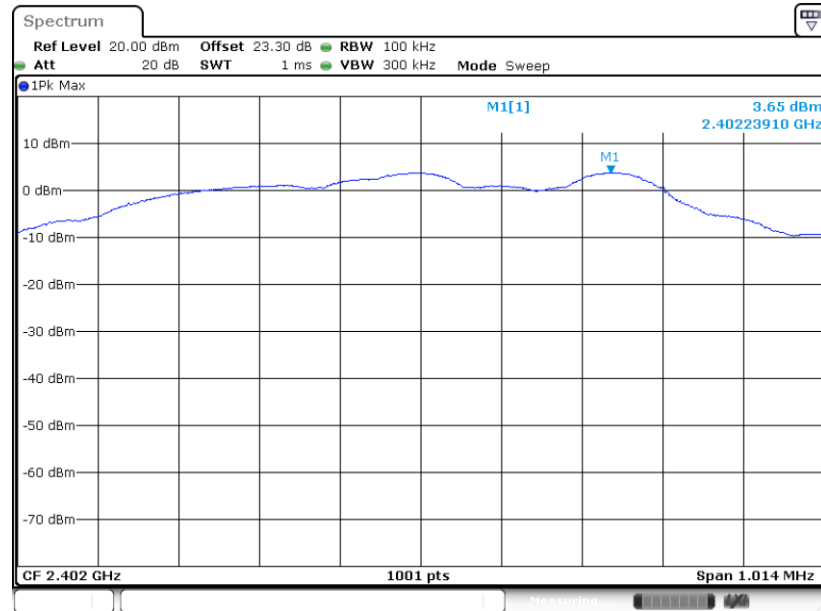

Date: 3.JAN.2024 14:24:56


PSD 100kHz Plot on Channel 19

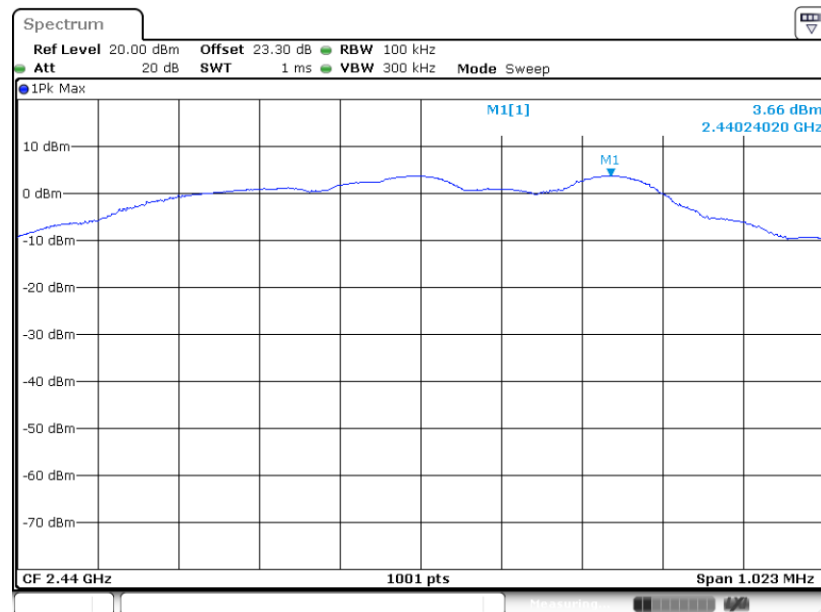

Date: 3.JAN.2024 14:28:33




PSD 100kHz Plot on Channel 39

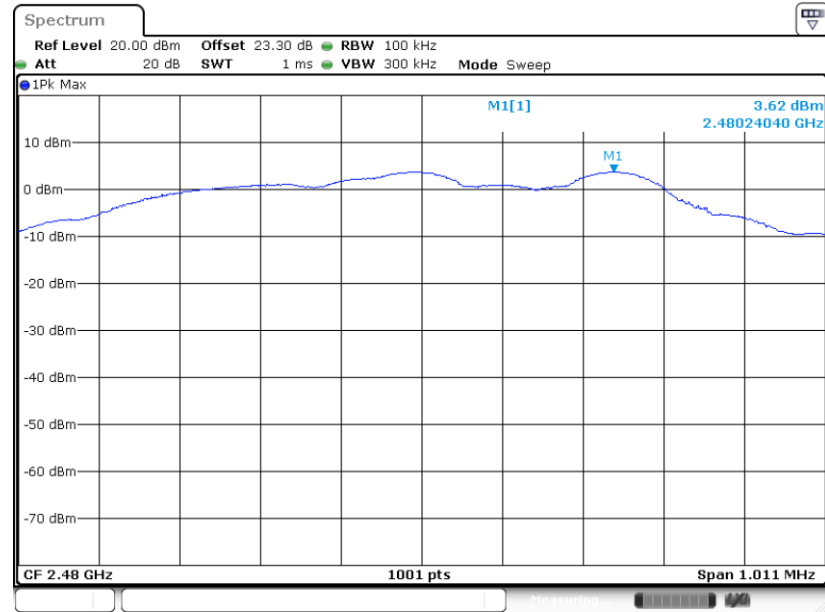

Date: 3 JAN 2024 14:30:39

BLE 2Mbps


PSD 100kHz Plot on Channel 00

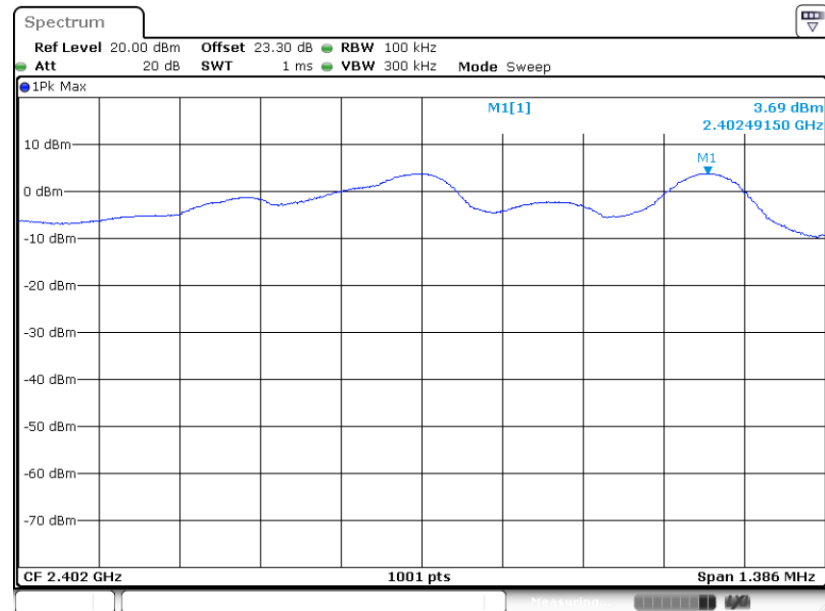

Date: 3 JAN 2024 14:38:25




PSD 100kHz Plot on Channel 19

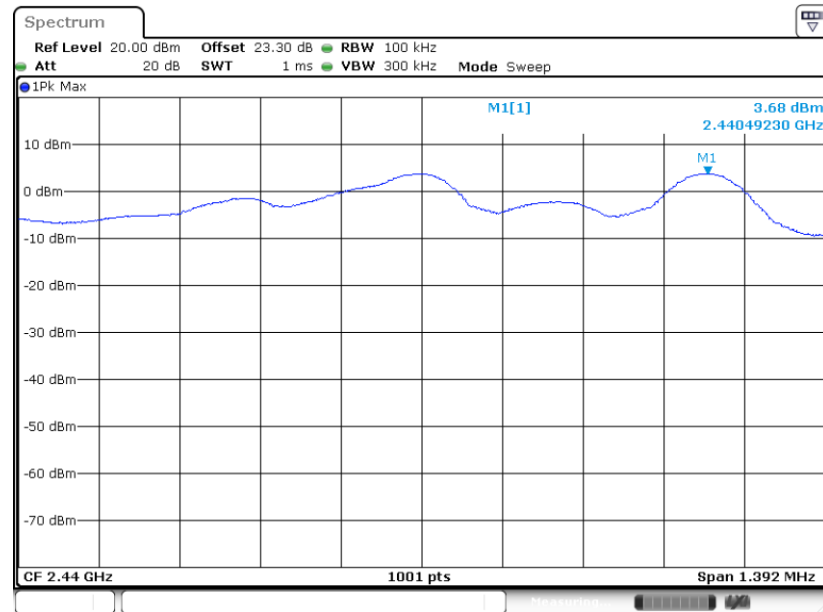

Date: 3 JAN 2024 14:36:35

PSD 100kHz Plot on Channel 39

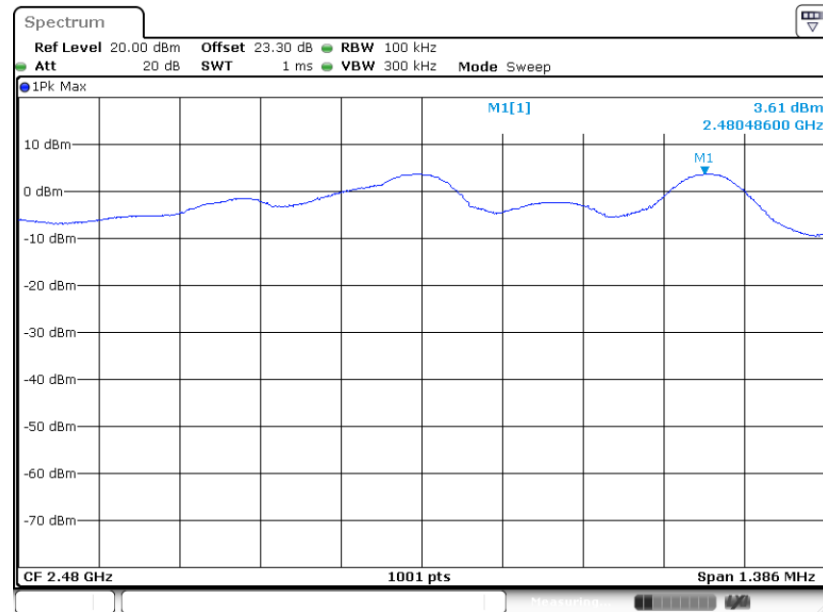


Date: 3 JAN 2024 14:33:55



3.3.7 Test Result of Power Spectral Density Plots (3kHz)


BLE 1Mbps

PSD 3kHz Plot on Channel 00

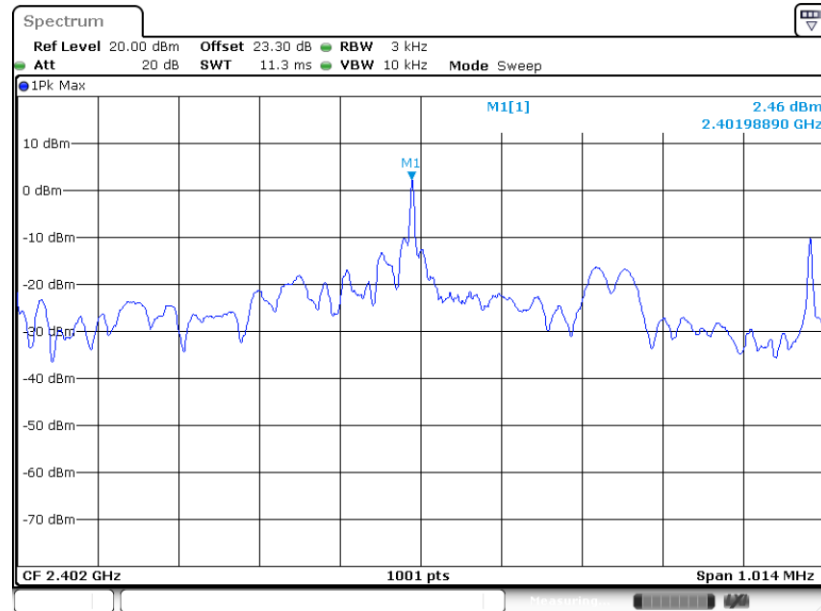

Date: 3.JAN.2024 14:24:36


PSD 3kHz Plot on Channel 19

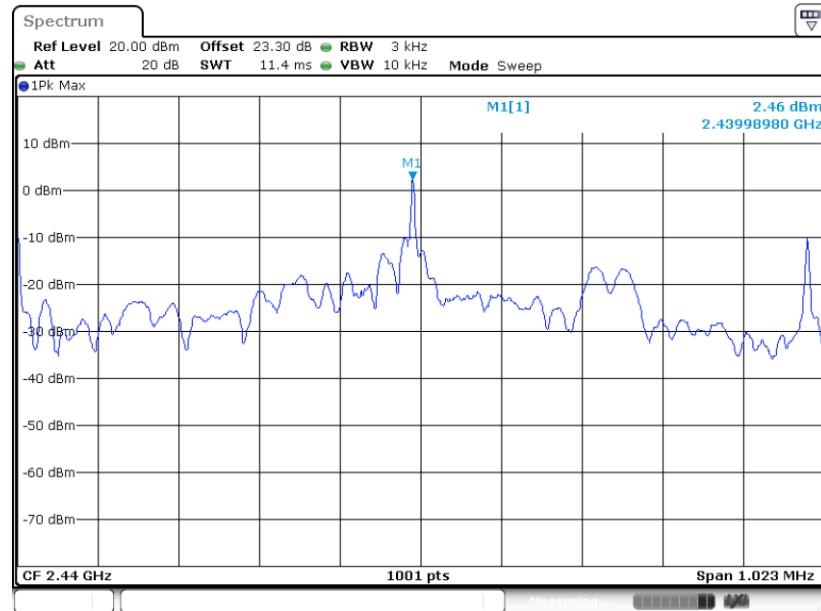

Date: 3.JAN.2024 14:28:17




PSD 3kHz Plot on Channel 39

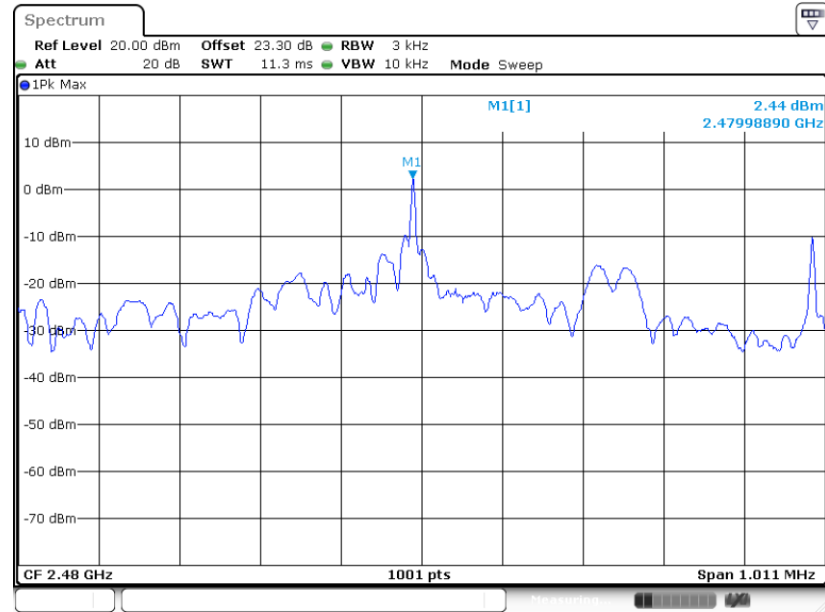


BLE 2Mbps

PSD 3kHz Plot on Channel 00

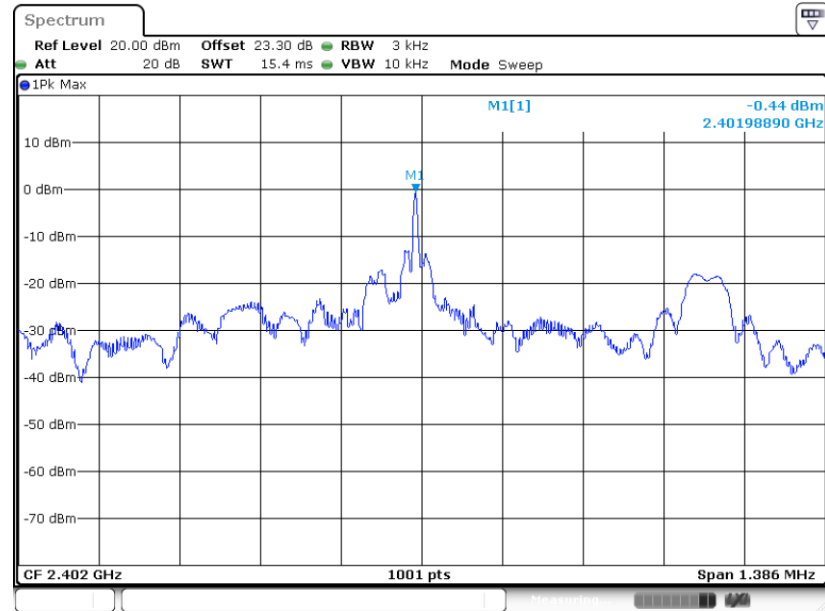




PSD 3kHz Plot on Channel 19

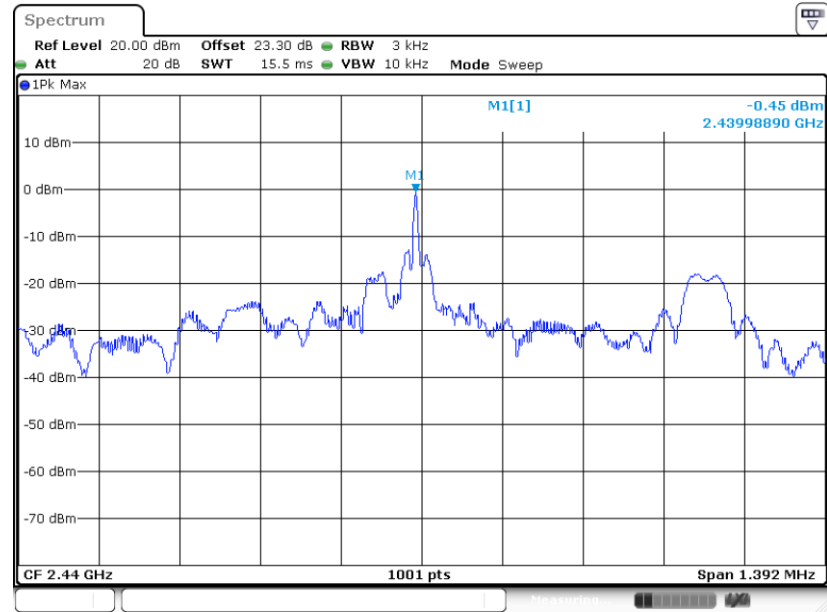

Date: 3 JAN 2024 14:36:17

PSD 3kHz Plot on Channel 39

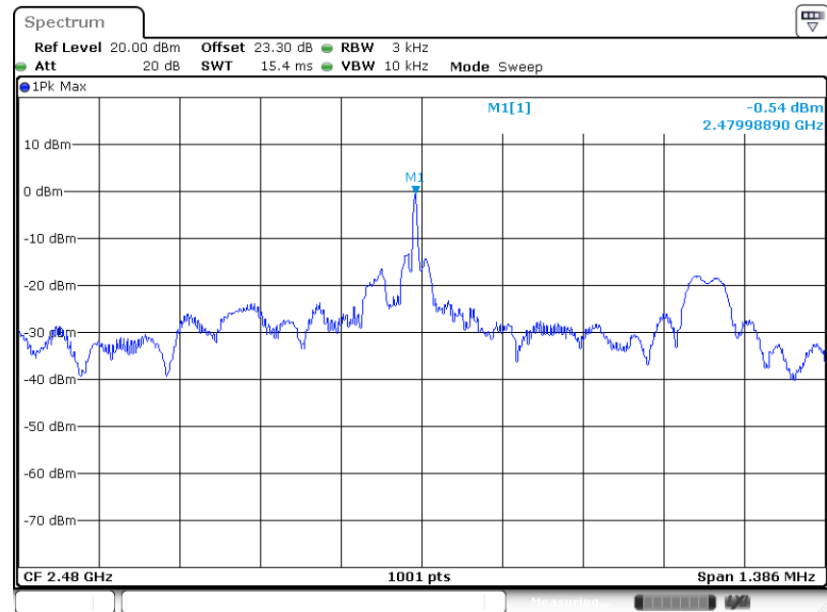

Date: 3 JAN 2024 14:33:35

3.4 Conducted Band Edges and Spurious Emission Measurement

3.4.1 Limit of Conducted Band Edges and Spurious Emission

All harmonics/spurious must be at least 20 dB down from the highest emission level within the authorized band.

3.4.2 Measuring Instruments

The section 4.0 of List of Measuring Equipment of this test report is used for test.

3.4.3 Test Procedure

1. The testing follows ANSI C63.10-2013 clause 11.13
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Set RBW = 100 kHz, VBW=300 kHz, Peak Detector. Unwanted Emissions measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz when maximum peak conducted output power procedure is used. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.
5. Measure and record the results in the test report.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

3.4.4 Test Setup






3.4.5 Test Result of Conducted Band Edges Plots


BLE 1Mbps

Low Band Edge Plot on Channel 00

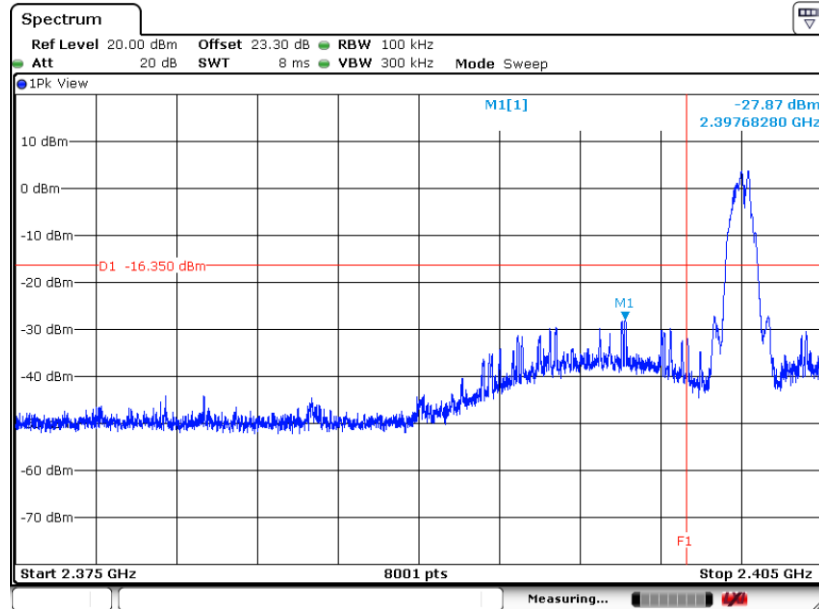

Date: 3.JAN.2024 14:26:19

High Band Edge Plot on Channel 39

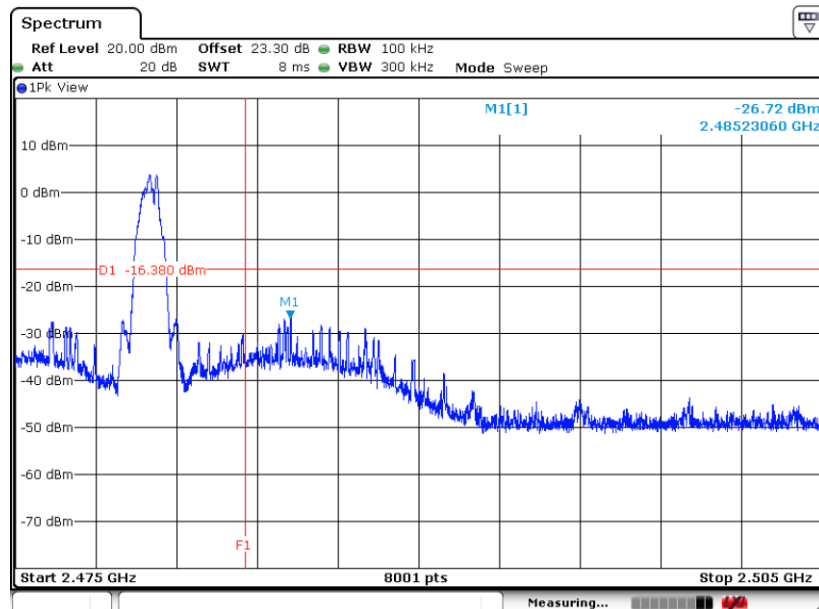


Date: 3.JAN.2024 14:31:43




BLE 2Mbps

Low Band Edge Plot on Channel 00

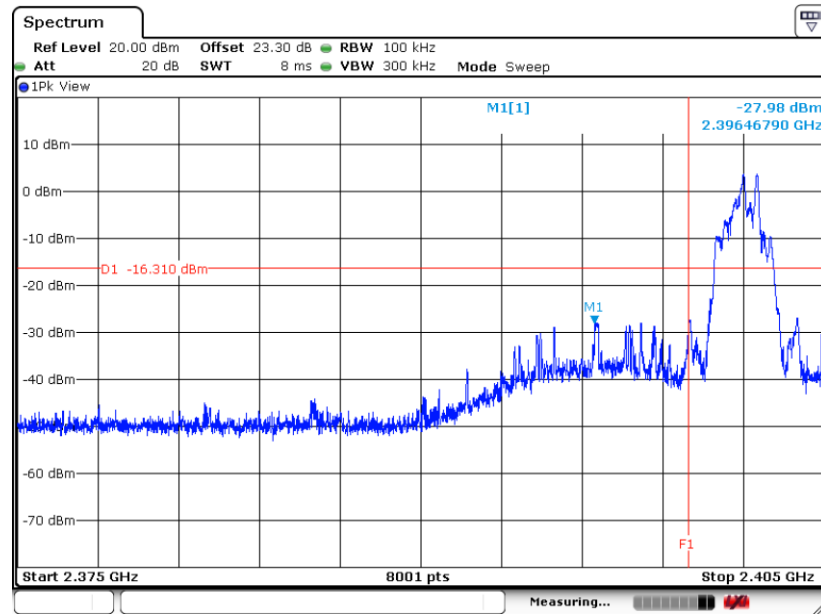

Date: 3. JAN. 2024 14:39:35


High Band Edge Plot on Channel 39

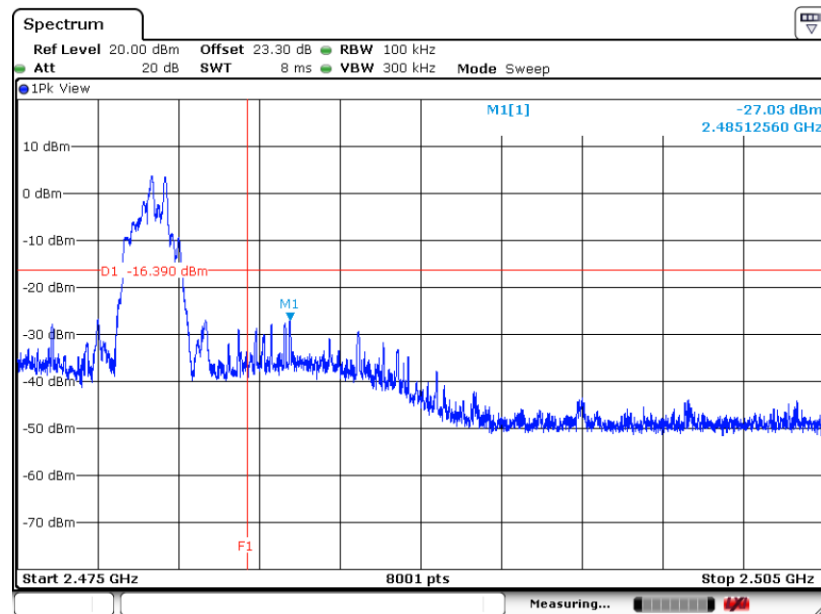

Date: 3. JAN. 2024 14:35:18


3.4.6 Test Result of Conducted Spurious Emission Plots

Conducted Spurious Emission Plot on Bluetooth LE 1Mbps GFSK Channel 00

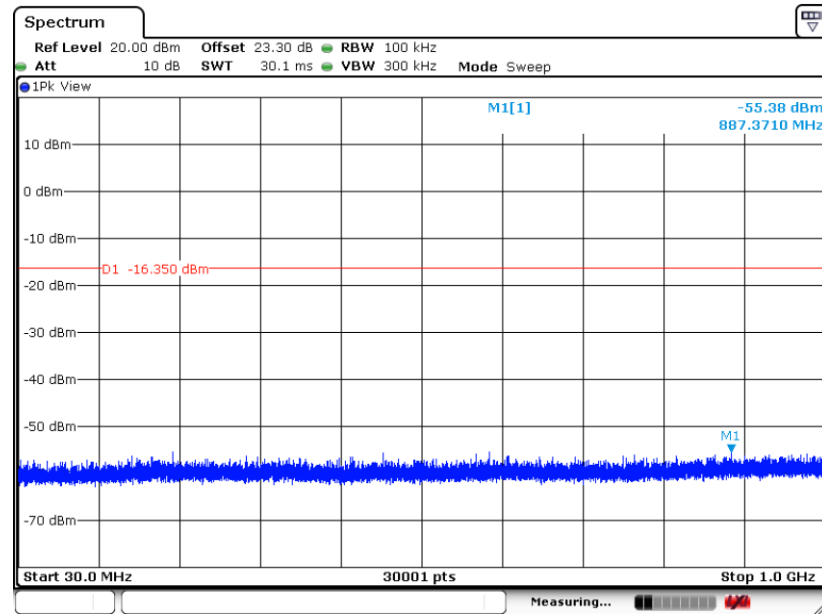

Date: 3.JAN.2024 14:25:22


Conducted Spurious Emission Plot on Bluetooth LE 1Mbps GFSK Channel 00

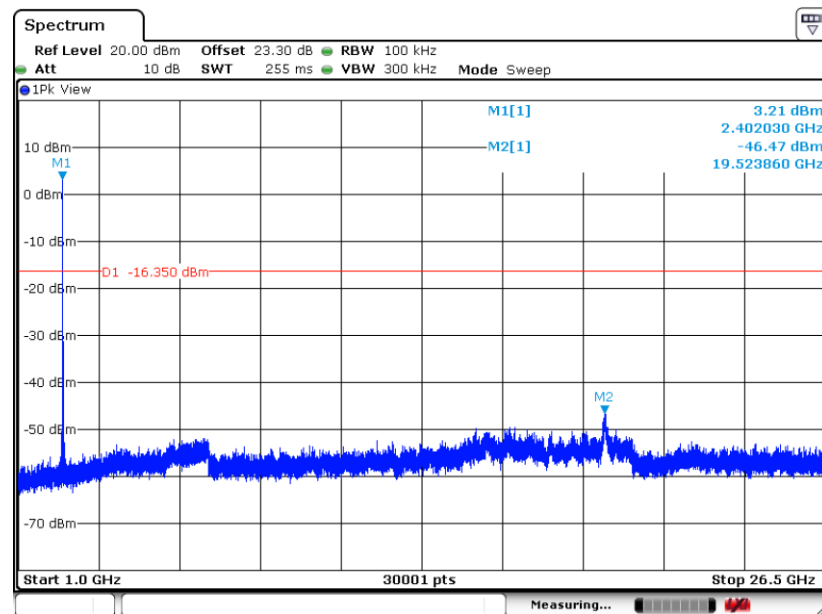

Date: 3.JAN.2024 14:26:01




Conducted Spurious Emission Plot on Bluetooth LE 1Mbps
GFSK Channel 19

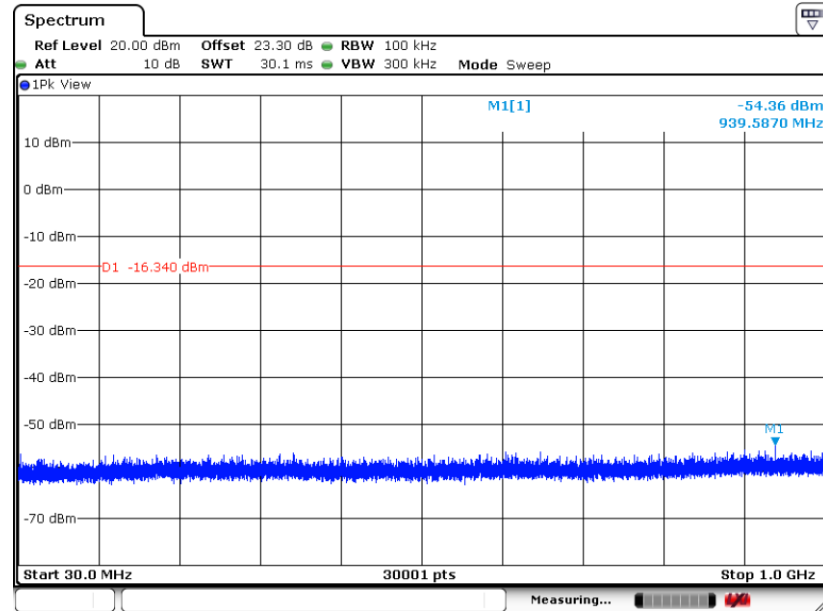

Date: 3.JAN.2024 14:28:53


Conducted Spurious Emission Plot on Bluetooth LE 1Mbps
GFSK Channel 19

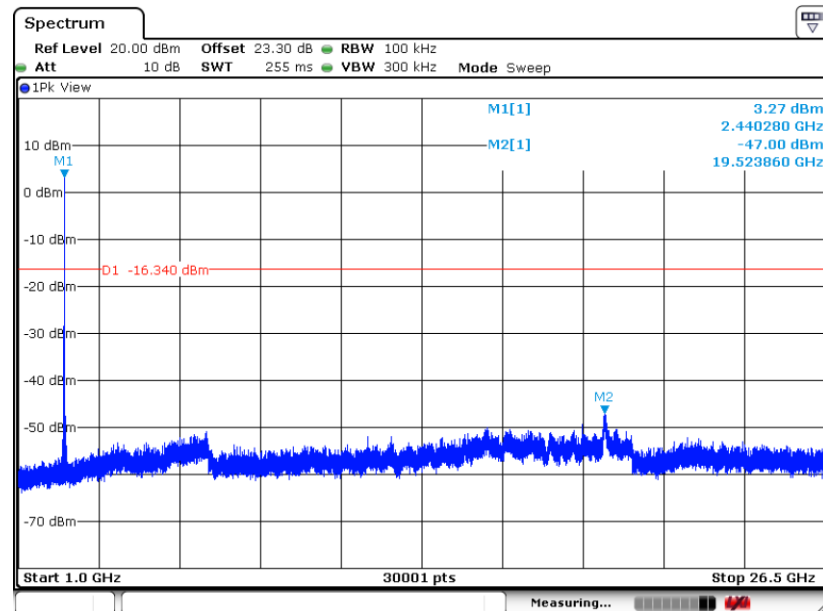

Date: 3.JAN.2024 14:29:09




Conducted Spurious Emission Plot on Bluetooth LE 1Mbps
GFSK Channel 39

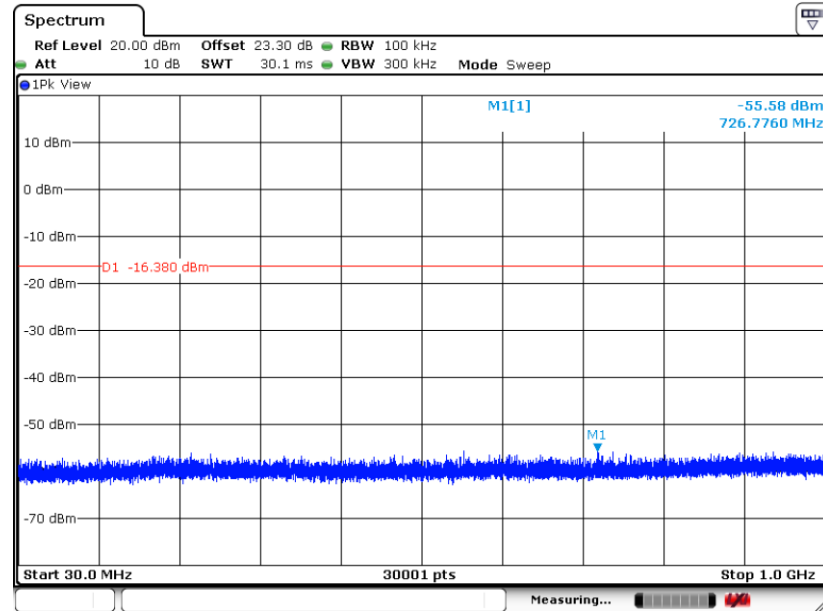

Date: 3.JAN.2024 14:30:57


Conducted Spurious Emission Plot on Bluetooth LE 1Mbps
GFSK Channel 39

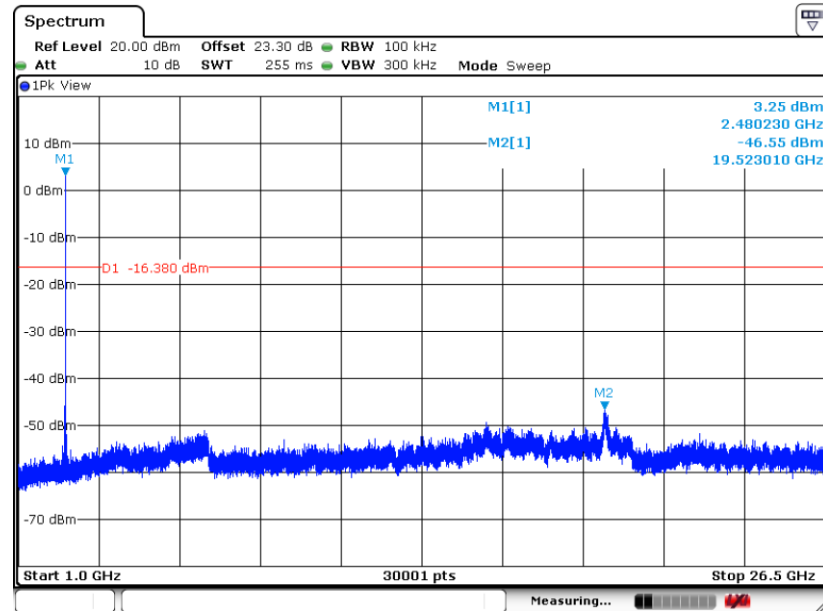

Date: 3.JAN.2024 14:31:28




Conducted Spurious Emission Plot on Bluetooth LE 2Mbps
GFSK Channel 00

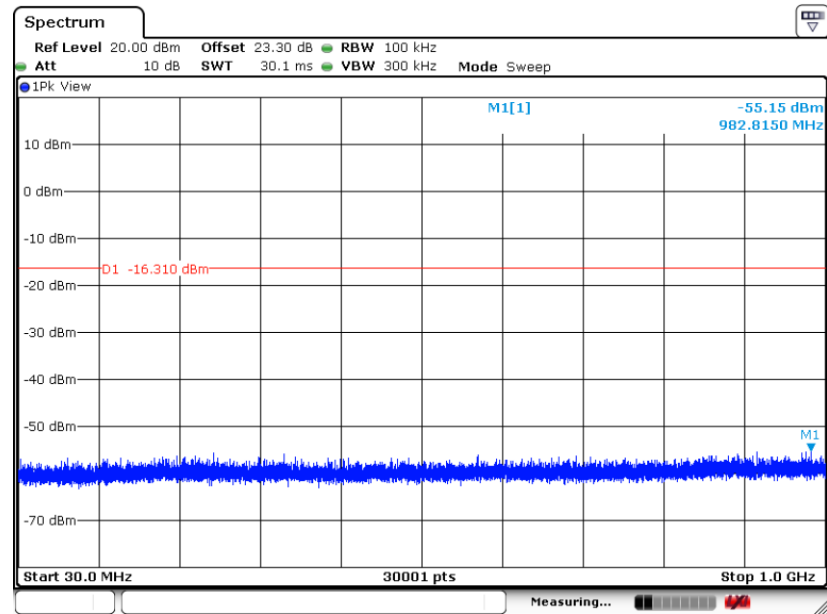

Date: 3 JAN 2024 14:38:43


Conducted Spurious Emission Plot on Bluetooth LE 2Mbps
GFSK Channel 00

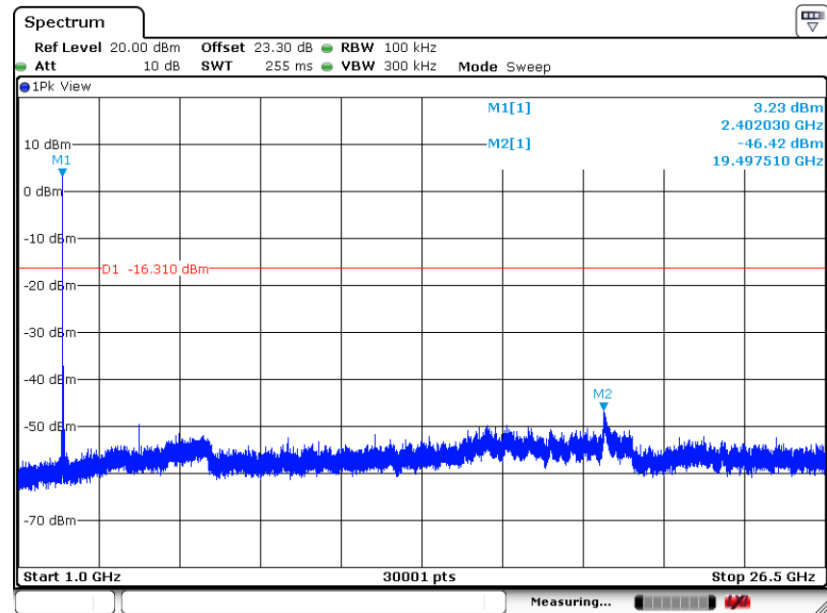

Date: 3 JAN 2024 14:38:59




Conducted Spurious Emission Plot on Bluetooth LE 2Mbps
GFSK Channel 19

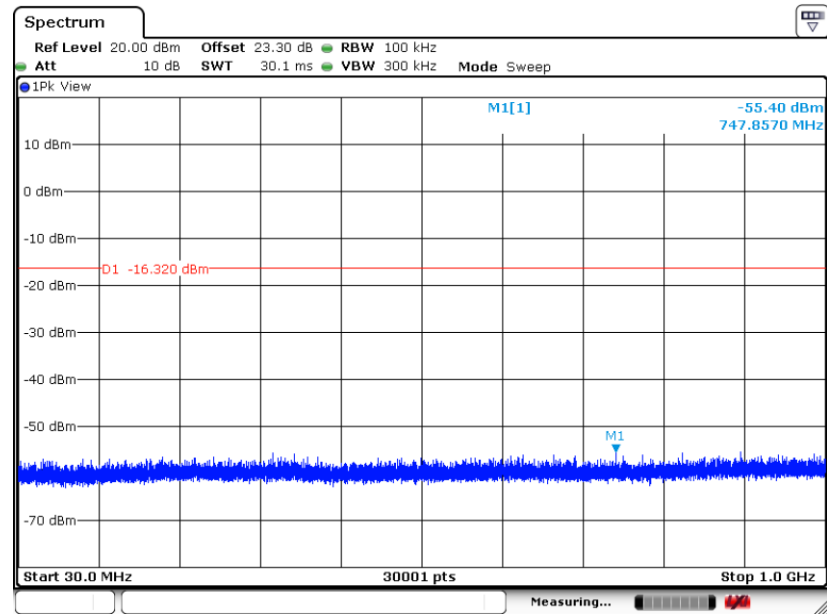

Date: 3.JAN.2024 14:36:52


Conducted Spurious Emission Plot on Bluetooth LE 2Mbps
GFSK Channel 19

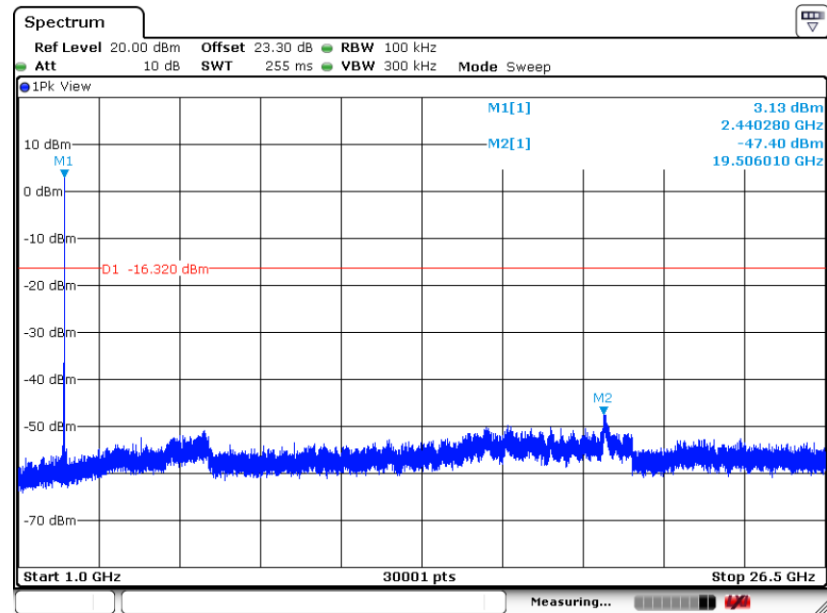


Date: 3.JAN.2024 14:37:10



Conducted Spurious Emission Plot on Bluetooth LE 2Mbps
GFSK Channel 39

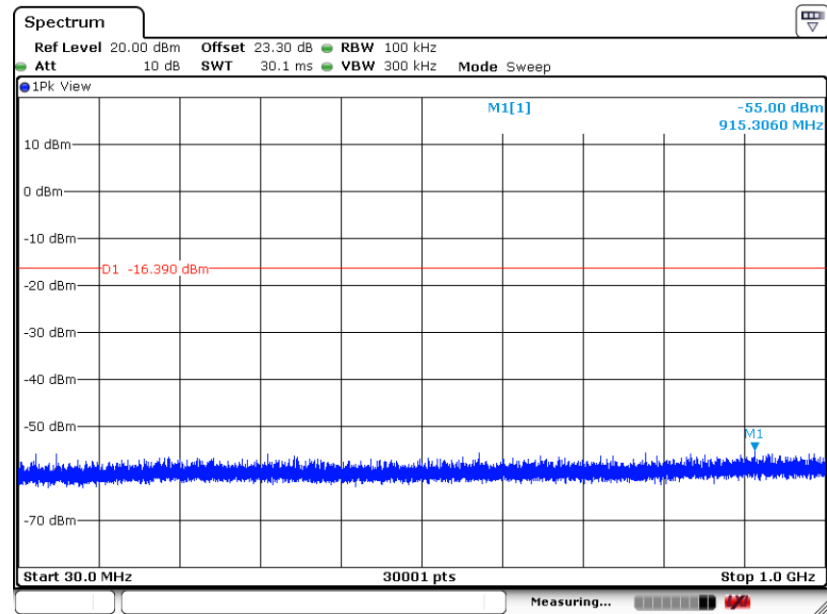

Conducted Spurious Emission Plot on Bluetooth LE 2Mbps
GFSK Channel 39

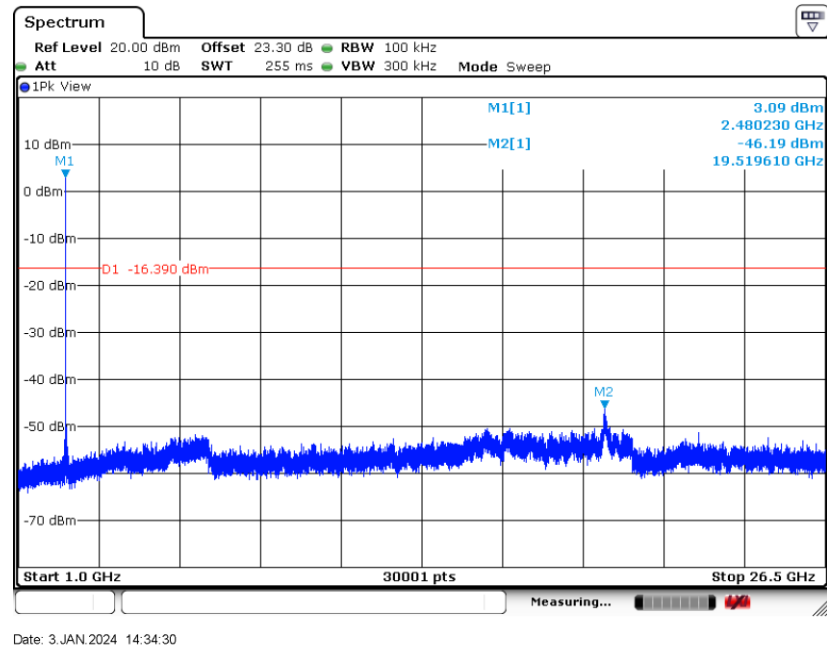

3.5 Radiated Band Edges and Spurious Emission Measurement

3.5.1 Limit of Radiated Band Edges and Spurious Emission

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. If the output power of this device was measured by spectrum analyzer, the attenuation under this paragraph shall be 30 dB instead of 20 dB. In addition, radiated emissions which fall in the restricted bands must also comply with the limits as below.

| Frequency (MHz) | Field Strength (microvolts/meter) | Measurement Distance (meters) |
|--------------------|--------------------------------------|----------------------------------|
| 0.009 – 0.490 | 2400/F(kHz) | 300 |
| 0.490 – 1.705 | 24000/F(kHz) | 30 |
| 1.705 – 30.0 | 30 | 30 |
| 30 – 88 | 100 | 3 |
| 88 – 216 | 150 | 3 |
| 216 - 960 | 200 | 3 |
| Above 960 | 500 | 3 |

3.5.2 Measuring Instruments


The section 4.0 of List of Measuring Equipment of this test report is used for test.

3.5.3 Test Procedures


1. The testing follows ANSI C63.10-2013 clause 11.11 & 11.12
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level.
3. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
6. For testing below 1GHz, if the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then peak values of EUT will be reported, otherwise, the emissions will be repeated one by one using the CISPR quasi-peak method and reported.
7. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than peak limit (that means the emission level in average mode also complies with the limit in average mode), then peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
8. Use the following spectrum analyzer settings:
 - (1) Span shall wide enough to fully capture the emission being measured;
 - (2) Set RBW=100 kHz for $f < 1$ GHz; $VBW \geq RBW$; Sweep = auto; Detector function = peak; Trace = max hold;
 - (3) Set RBW = 1 MHz, VBW= 3MHz for $f \geq 1$ GHz for peak measurement.
For average measurement:
 - $VBW = 10$ Hz, when duty cycle is no less than 98 percent.
 - $VBW \geq 1/T$, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.

3.5.4 Test Setup


For radiated emissions below 30MHz

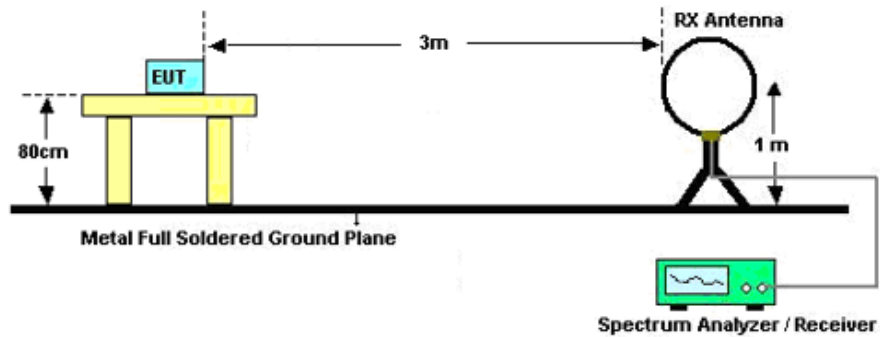

For radiated emissions from 30MHz to 1GHz

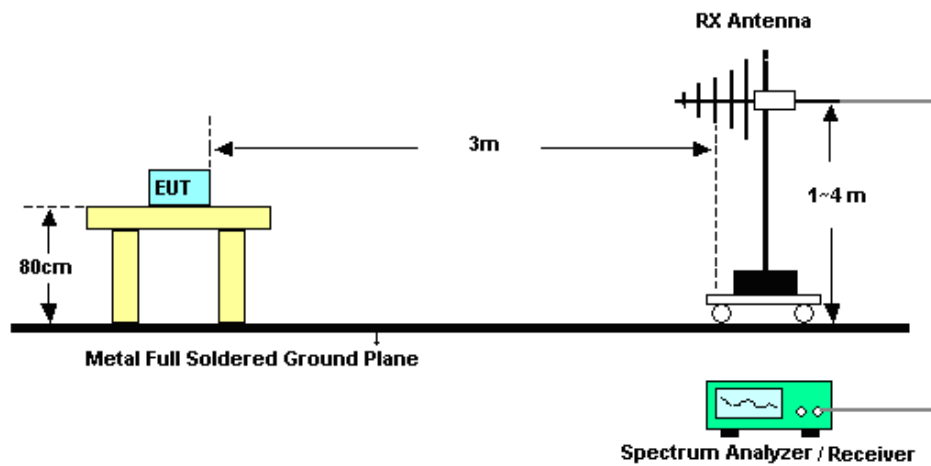

For radiated emissions above 1GHz

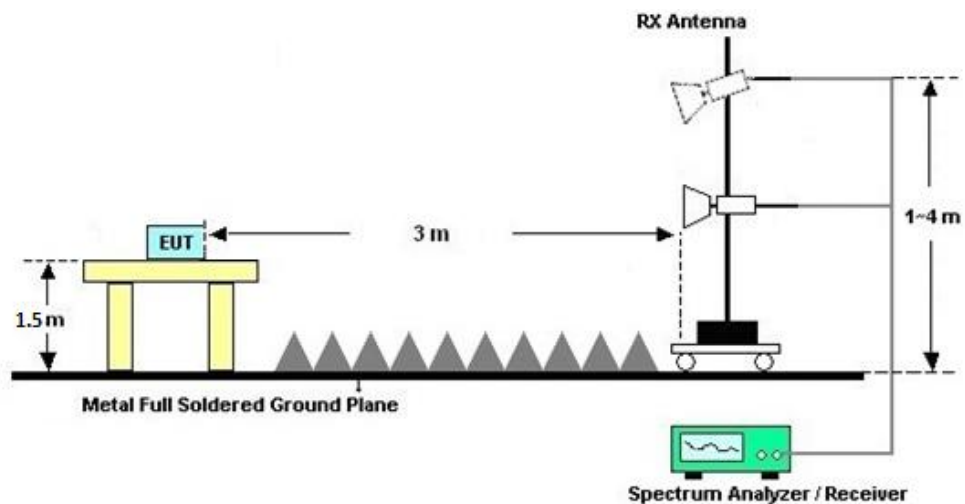



3.5.5 Test Results of Radiated Spurious Emissions (9 kHz ~ 30 MHz)

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is a comparison data of both open-field test site and semi-Anechoic chamber, and the result came out very similar.

3.5.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix C

3.5.7 Duty Cycle

Please refer to Appendix D.

3.5.8 Test Result of Radiated Spurious Emission (30MHz ~ 10th Harmonic or 40GHz, whichever is lower)

Please refer to Appendix C.

3.6 AC Conducted Emission Measurement

3.6.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

| Frequency of emission (MHz) | Conducted limit (dBμV) | |
|-----------------------------|------------------------|-----------|
| | Quasi-peak | Average |
| 0.15-0.5 | 66 to 56* | 56 to 46* |
| 0.5-5 | 56 | 46 |
| 5-30 | 60 | 50 |

*Decreases with the logarithm of the frequency.


3.6.2 Measuring Instruments

The section 4.0 of List of Measuring Equipment of this test report is used for test.

3.6.3 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF Bandwidth = 9kHz) with Maximum Hold Mode. Then measurement is also conducted by Average Detector and Quasi-Peak Detector Function respectively.

3.6.4 Test Setup

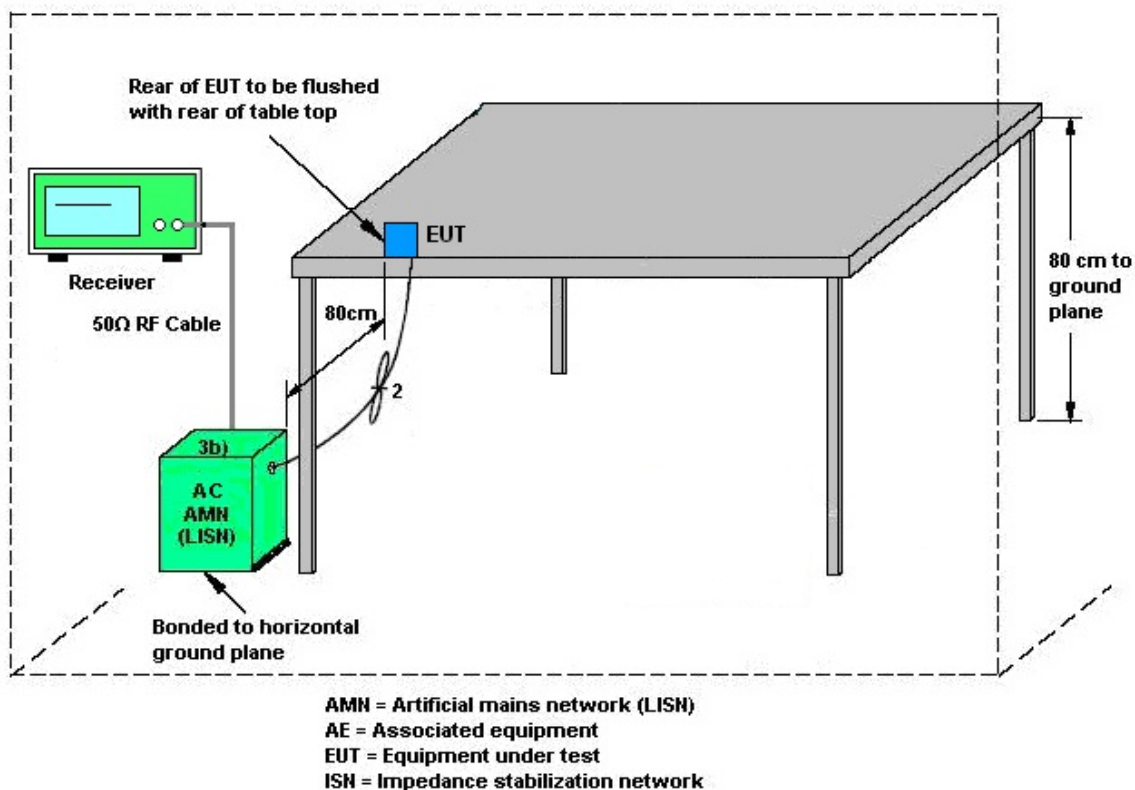

3.6.5 Test Result of AC Conducted Emission

Please refer to Appendix B.



3.7 Antenna Requirements

3.7.1 Standard Applicable

If directional gain of transmitting antennas is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the rule.

3.7.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.

3.7.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.



4 List of Measuring Equipment

| Instrument | Manufacturer | Model No. | Serial No. | Characteristics | Calibration Date | Test Date | Due Date | Remark |
|-----------------------------------|----------------------|--------------------------|--------------|-----------------|------------------|---------------------------------|---------------|-----------------------|
| Spectrum Analyzer | R&S | FSV40 | 101078 | 10Hz~40GHz | Apr. 06, 2023 | Jan. 02, 2024 ~Jan. 04, 2024 | Apr. 05, 2024 | Conducted (TH01-SZ) |
| Pulse Power Sensor | Anritsu | MA2411B | 1339473 | 30MHz~40GHz | Dec. 26, 2023 | Jan. 02, 2024 ~Jan. 04, 2024 | Dec. 25, 2024 | Conducted (TH01-SZ) |
| Power Meter | Anritsu | ML2495A | 1542004 | 50MHz Bandwidth | Dec. 26, 2023 | Jan. 02, 2024 ~Jan. 04, 2024 | Dec. 25, 2024 | Conducted (TH01-SZ) |
| EMI Test Receiver | R&S | ESR7 | 101404 | 9kHz~7GHz | Oct. 18, 2023 | Jan. 02, 2024 ~Jan. 09, 2024 | Oct. 17, 2024 | Radiation (03CH04-SZ) |
| EXA Spectrum Analyzer | KEYSIGHT | N9010A | MY55150213 | 10Hz~44GHz | Jul. 07, 2023 | Jan. 02, 2024 ~Jan. 09, 2024 | Jul. 06, 2024 | Radiation (03CH04-SZ) |
| Loop Antenna | R&S | HFH2-Z2 | 100354 | 9kHz~30MHz | Jun. 28, 2022 | Jan. 02, 2024 ~Jan. 09, 2024 | Jun. 27, 2024 | Radiation (03CH04-SZ) |
| Bilog Antenna | TeseQ | CBL6111D | 41909 | 30MHz~1GHz | May 14, 2023 | Jan. 02, 2024 ~Jan. 09, 2024 | May 13, 2024 | Radiation (03CH04-SZ) |
| Double Ridge Horn Antenna | SCHWARZBECK | BBHA9120D | 9120D-1474 | 1GHz~18GHz | Jul. 07, 2023 | Jan. 02, 2024 ~Jan. 09, 2024 | Jul. 06, 2024 | Radiation (03CH04-SZ) |
| Horn Antenna | SCHWARZBECK | BBHA9170 | 9170#679 | 15GHz~40GHz | Jul. 08, 2023 | Jan. 02, 2024 ~Jan. 09, 2024 | Jul. 07, 2024 | Radiation (03CH04-SZ) |
| Amplifier | Burgeon | BPA-530 | 102211 | 0.01Hz~3000MHz | Oct. 18, 2023 | Jan. 02, 2024 ~Jan. 09, 2024 | Oct. 17, 2024 | Radiation (03CH04-SZ) |
| HF Amplifier | MITEQ | AMF-7D-00101800-30-10P-R | 1943528 | 1GHz~18GHz | Oct. 18, 2023 | Jan. 02, 2024 ~Jan. 09, 2024 | Oct. 17, 2024 | Radiation (03CH04-SZ) |
| HF Amplifier | MITEQ | TTA1840-35-HG | 1871923 | 18GHz~40GHz | Jul. 07, 2023 | Jan. 02, 2024 ~Jan. 09, 2024 | Jul. 06, 2024 | Radiation (03CH04-SZ) |
| Amplifier | Agilent Technologies | 83017A | MY57280136 | 500MHz~26.5GHz | Aug. 21, 2023 | Jan. 02, 2024 ~Jan. 09, 2024 | Aug. 20, 2024 | Radiation (03CH04-SZ) |
| AC Power Source | APC | AFV-S-600B | F119050019 | N/A | Oct. 18, 2023 | Jan. 02, 2024 ~Jan. 09, 2024 | Oct. 17, 2024 | Radiation (03CH04-SZ) |
| Turn Table | EM | EM1000 | N/A | 0~360 degree | NCR | Jan. 02, 2024 ~Jan. 09, 2024 | NCR | Radiation (03CH04-SZ) |
| Antenna Mast | EM | EM1000 | N/A | 1 m~4 m | NCR | Jan. 02, 2024 ~Jan. 09, 2024 | NCR | Radiation (03CH04-SZ) |
| EMI Receiver | R&S | ESR7 | 101630 | 9kHz~7GHz; | Jul. 06, 2023 | Jan. 10, 2024 | Jul. 05, 2024 | Conduction (CO01-SZ) |
| AC LISN | R&S | ENV216 | 100063 | 9kHz~30MHz | Aug. 21, 2023 | Jan. 10, 2024 | Aug. 20, 2024 | Conduction (CO01-SZ) |
| AC LISN (for auxiliary equipment) | EMCO | 3816/2SH | 00103892 | 9kHz~30MHz | Oct. 16, 2023 | Jan. 10, 2024 | Oct. 15, 2024 | Conduction (CO01-SZ) |
| AC Power Source | Chroma | 61602 | 616020000891 | 100Vac~250Vac | Jul. 07, 2023 | Jan. 10, 2024 | Jul. 06, 2024 | Conduction (CO01-SZ) |

NCR: No Calibration Required

5 Measurement Uncertainty

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI 63.10-2013. All the measurement uncertainty value were shown with a coverage K=2 to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

Uncertainty of Conducted Measurement

| Test Item | Uncertainty |
|--|-------------|
| Conducted Spurious Emission & Bandedge | ±1.34 dB |
| Occupied Channel Bandwidth | ±0.1% |
| Conducted Power | ±1.34 dB |
| Conducted Power Spectral Density | ±1.32 dB |
| Frequency | ±1.3 Hz |

Uncertainty of AC Conducted Emission Measurement (0.15 MHz ~ 30 MHz)

| | |
|---|-------|
| Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y)) | 2.7dB |
|---|-------|

Uncertainty of Radiated Emission Measurement (9 KHz ~ 30 MHz)

| | |
|---|-------|
| Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y)) | 2.5dB |
|---|-------|

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

| | |
|---|-------|
| Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y)) | 5.1dB |
|---|-------|

Uncertainty of Radiated Emission Measurement (1 GHz ~ 18 GHz)

| | |
|---|-------|
| Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y)) | 4.8dB |
|---|-------|

Uncertainty of Radiated Emission Measurement (18 GHz ~ 40 GHz)

| | |
|---|-------|
| Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y)) | 5.1dB |
|---|-------|

----- THE END -----



Appendix A. Conducted Test Results

Appendix A. Test Result of Conducted Test Items

| | | | | |
|----------------|---------------------|--------------------|-------|----|
| Test Engineer: | ZhiQiang Chen | Temperature: | 21~25 | °C |
| Test Date: | 2024/1/02~2024/1/04 | Relative Humidity: | 51~54 | % |

TEST RESULTS DATA
6dB and 99% Occupied Bandwidth

| Mod. | Data Rate | NTX | CH. | Freq. (MHz) | 99% Occupied BW (MHz) | 6dB BW (MHz) | 6dB BW Limit (MHz) | Pass/Fail |
|------|-----------|-----|-----|-------------|-----------------------|--------------|--------------------|-----------|
| BLE | 1Mbps | 1 | 0 | 2402 | 1.031 | 0.676 | 0.50 | Pass |
| BLE | 1Mbps | 1 | 19 | 2440 | 1.031 | 0.682 | 0.50 | Pass |
| BLE | 1Mbps | 1 | 39 | 2480 | 1.033 | 0.674 | 0.50 | Pass |

TEST RESULTS DATA
Peak Power Table

| Mod. | Data Rate | NTX | CH. | Freq. (MHz) | Peak Conducted Power (dBm) | Conducted Power Limit (dBm) | DG (dBi) | EIRP Power (dBm) | EIRP Power Limit (dBm) | Pass /Fail |
|------|-----------|-----|-----|-------------|----------------------------|-----------------------------|----------|------------------|------------------------|------------|
| BLE | 1Mbps | 1 | 0 | 2402 | 7.09 | 30.00 | 0.80 | 7.89 | 36.00 | Pass |
| BLE | 1Mbps | 1 | 19 | 2440 | 7.05 | 30.00 | 0.80 | 7.85 | 36.00 | Pass |
| BLE | 1Mbps | 1 | 39 | 2480 | 7.02 | 30.00 | 0.80 | 7.82 | 36.00 | Pass |

TEST RESULTS DATA
Average Power Table

| Mod. | Data Rate | NTX | CH. | Freq. (MHz) | Duty Factor (dB) | Average Conducted Power (dBm) |
|------|-----------|-----|-----|-------------|------------------|-------------------------------|
| BLE | 1Mbps | 1 | 0 | 2402 | 1.79 | 4.40 |
| BLE | 1Mbps | 1 | 19 | 2440 | 1.79 | 4.40 |
| BLE | 1Mbps | 1 | 39 | 2480 | 1.79 | 4.30 |

TEST RESULTS DATA
Peak Power Density

| Mod. | Data Rate | NTX | CH. | Freq. (MHz) | Peak PSD (dBm /100kHz) | Peak PSD (dBm /3kHz) | DG (dBi) | Peak PSD Limit (dBm /3kHz) | Pass/Fail |
|------|-----------|-----|-----|-------------|------------------------|----------------------|----------|----------------------------|-----------|
| BLE | 1Mbps | 1 | 0 | 2402 | 3.65 | 2.46 | 0.80 | 8.00 | Pass |
| BLE | 1Mbps | 1 | 19 | 2440 | 3.66 | 2.46 | 0.80 | 8.00 | Pass |
| BLE | 1Mbps | 1 | 39 | 2480 | 3.62 | 2.44 | 0.80 | 8.00 | Pass |

Note: PSD (dBm/ 100kHz) is a reference level used for Conducted Band Edges and Conducted Spurious Emission 20dBc limit.

Appendix A. Test Result of Conducted Test Items

| | | | | |
|----------------|---------------------|--------------------|-------|----|
| Test Engineer: | ZhiQiang Chen | Temperature: | 21~25 | °C |
| Test Date: | 2024/1/02~2024/1/04 | Relative Humidity: | 51~54 | % |

TEST RESULTS DATA
6dB and 99% Occupied Bandwidth

| Mod. | Data Rate | NTX | CH. | Freq. (MHz) | 99% Occupied BW (MHz) | 6dB BW (MHz) | 6dB BW Limit (MHz) | Pass/Fail |
|------|-----------|-----|-----|-------------|-----------------------|--------------|--------------------|-----------|
| BLE | 2Mbps | 1 | 0 | 2402 | 2.042 | 0.924 | 0.50 | Pass |
| BLE | 2Mbps | 1 | 19 | 2440 | 2.042 | 0.928 | 0.50 | Pass |
| BLE | 2Mbps | 1 | 39 | 2480 | 2.046 | 0.924 | 0.50 | Pass |

TEST RESULTS DATA
Peak Power Table

| Mod. | Data Rate | NTX | CH. | Freq. (MHz) | Peak Conducted Power (dBm) | Conducted Power Limit (dBm) | DG (dBi) | EIRP Power (dBm) | EIRP Power Limit (dBm) | Pass /Fail |
|--------|-----------|-----|-----|-------------|----------------------------|-----------------------------|----------|------------------|------------------------|------------|
| BLE5.0 | 2Mbps | 1 | 0 | 2402 | 7.01 | 30.00 | 0.80 | 7.81 | 36.00 | Pass |
| BLE5.0 | 2Mbps | 1 | 19 | 2440 | 6.98 | 30.00 | 0.80 | 7.78 | 36.00 | Pass |
| BLE5.0 | 2Mbps | 1 | 39 | 2480 | 6.95 | 30.00 | 0.80 | 7.75 | 36.00 | Pass |

TEST RESULTS DATA
Average Power Table

| Mod. | Data Rate | NTX | CH. | Freq. (MHz) | Duty Factor (dB) | Average Conducted Power (dBm) |
|------|-----------|-----|-----|-------------|------------------|-------------------------------|
| BLE | 2Mbps | 1 | 0 | 2402 | 4.37 | 4.30 |
| BLE | 2Mbps | 1 | 19 | 2440 | 4.37 | 4.30 |
| BLE | 2Mbps | 1 | 39 | 2480 | 4.37 | 4.20 |


TEST RESULTS DATA
Peak Power Density

| Mod. | Data Rate | NTX | CH. | Freq. (MHz) | Peak PSD (dBm /100kHz) | Peak PSD (dBm /3kHz) | DG (dBi) | Peak PSD Limit (dBm /3kHz) | Pass/Fail |
|------|-----------|-----|-----|-------------|------------------------|----------------------|----------|----------------------------|-----------|
| BLE | 2Mbps | 1 | 0 | 2402 | 3.69 | -0.44 | 0.80 | 8.00 | Pass |
| BLE | 2Mbps | 1 | 19 | 2440 | 3.68 | -0.45 | 0.80 | 8.00 | Pass |
| BLE | 2Mbps | 1 | 39 | 2480 | 3.61 | -0.54 | 0.80 | 8.00 | Pass |

Note: PSD (dBm/ 100kHz) is a reference level used for Conducted Band Edges and Conducted Spurious Emission 20dBc limit.

Appendix B. AC Conducted Emission Test Results

| | | | |
|------------------------|---|----------------------------|---------|
| Test Engineer : | Yuki Tang | Temperature : | 22~24°C |
| | | Relative Humidity : | 44~50% |
| Test Voltage : | 120Vac / 60Hz | Phase : | Line |
| Remark : | All emissions not reported here are more than 10 dB below the prescribed limit. | | |

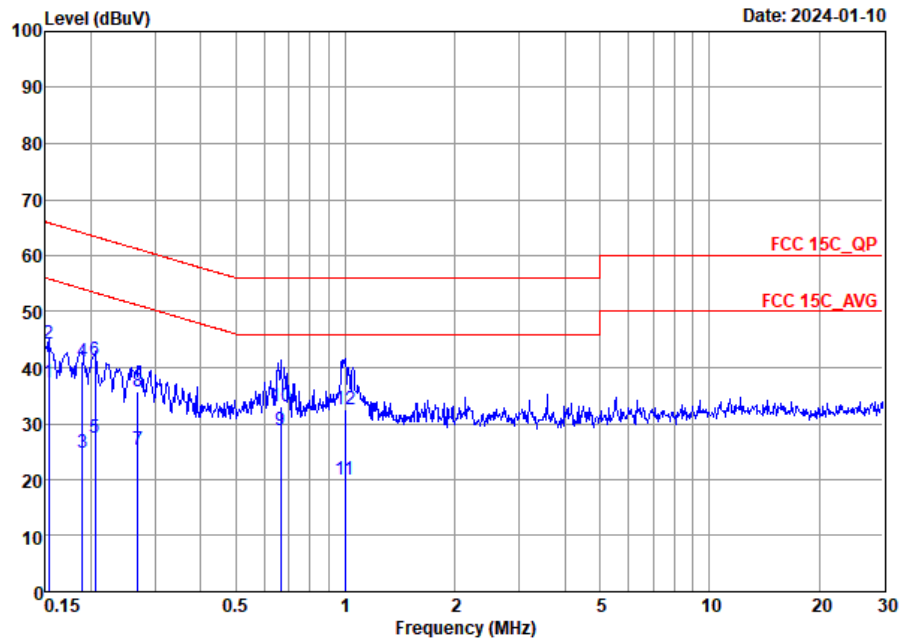


Site : CO01-SZ
Condition: FCC 15C QP AC LISN 100063_L LINE

| | Freq | Level | Over Limit | Limit Line | Read Level | LISN Factor | Cable Loss | Remark |
|-----|------|-------|------------|------------|------------|-------------|------------|---------|
| | MHz | dBuV | dB | dBuV | dBuV | dB | dB | |
| 1 | 0.15 | 37.30 | -18.52 | 55.82 | 16.81 | 10.36 | 10.13 | Average |
| 2 | 0.15 | 44.40 | -21.42 | 65.82 | 23.91 | 10.36 | 10.13 | QP |
| 3 | 0.19 | 24.85 | -29.21 | 54.06 | 4.30 | 10.40 | 10.15 | Average |
| 4 | 0.19 | 41.05 | -23.01 | 64.06 | 20.50 | 10.40 | 10.15 | QP |
| 5 | 0.21 | 27.50 | -25.90 | 53.40 | 6.90 | 10.45 | 10.15 | Average |
| 6 | 0.21 | 41.30 | -22.10 | 63.40 | 20.70 | 10.45 | 10.15 | QP |
| 7 | 0.27 | 25.45 | -25.71 | 51.16 | 5.21 | 10.09 | 10.15 | Average |
| 8 | 0.27 | 35.75 | -25.41 | 61.16 | 15.51 | 10.09 | 10.15 | QP |
| 9 * | 0.66 | 28.70 | -17.30 | 46.00 | 8.60 | 9.94 | 10.16 | Average |
| 10 | 0.66 | 33.00 | -23.00 | 56.00 | 12.90 | 9.94 | 10.16 | QP |
| 11 | 1.00 | 20.11 | -25.89 | 46.00 | -0.30 | 10.25 | 10.16 | Average |
| 12 | 1.00 | 32.51 | -23.49 | 56.00 | 12.10 | 10.25 | 10.16 | QP |



| | | | |
|------------------------|---|----------------------------|---------|
| Test Engineer : | Yuki Tang | Temperature : | 22~24°C |
| | | Relative Humidity : | 44~50% |
| Test Voltage : | 120Vac / 60Hz | Phase : | Neutral |
| Remark : | All emissions not reported here are more than 10 dB below the prescribed limit. | | |

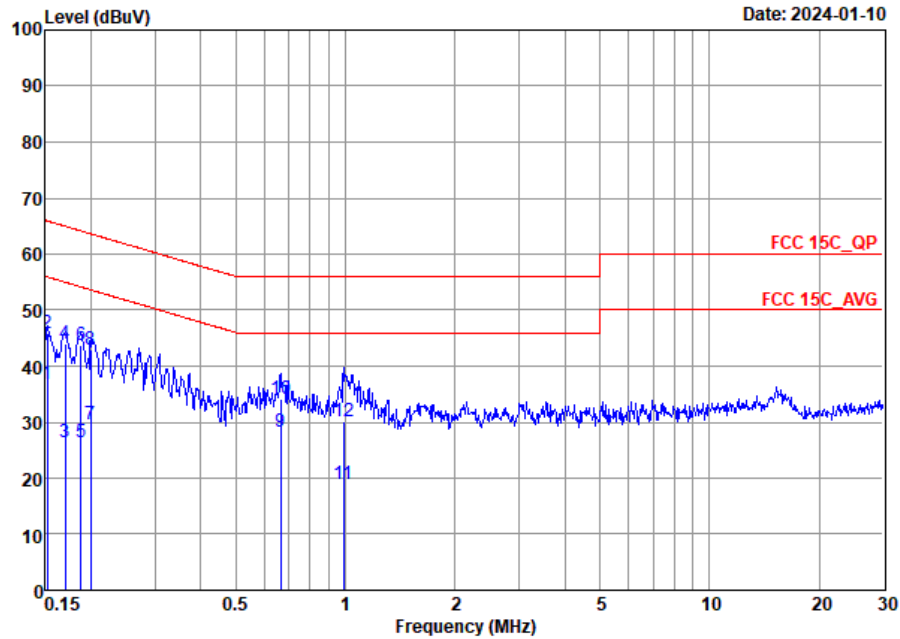

Site : CO01-SZ
Condition: FCC 15C QP AC LISN 100063_N NEUTRAL

| | Freq | Level | Over | Limit | Read | LISN | Cable | |
|-----|------|-------|--------|-------|-------|--------|-------|---------|
| | MHz | dBuV | Limit | Line | Level | Factor | Loss | Remark |
| | | | dB | dBuV | dBuV | dB | dB | |
| 1 | 0.15 | 36.70 | -19.21 | 55.91 | 16.41 | 10.16 | 10.13 | Average |
| 2 | 0.15 | 45.90 | -20.01 | 65.91 | 25.61 | 10.16 | 10.13 | QP |
| 3 | 0.17 | 26.35 | -28.59 | 54.94 | 5.70 | 10.51 | 10.14 | Average |
| 4 | 0.17 | 43.95 | -20.99 | 64.94 | 23.30 | 10.51 | 10.14 | QP |
| 5 | 0.19 | 26.41 | -27.74 | 54.15 | 5.89 | 10.37 | 10.15 | Average |
| 6 | 0.19 | 43.81 | -20.34 | 64.15 | 23.29 | 10.37 | 10.15 | QP |
| 7 | 0.20 | 29.72 | -23.90 | 53.62 | 9.30 | 10.27 | 10.15 | Average |
| 8 | 0.20 | 42.82 | -20.80 | 63.62 | 22.40 | 10.27 | 10.15 | QP |
| 9 * | 0.66 | 28.25 | -17.75 | 46.00 | 7.80 | 10.29 | 10.16 | Average |
| 10 | 0.66 | 34.05 | -21.95 | 56.00 | 13.60 | 10.29 | 10.16 | QP |
| 11 | 0.99 | 19.00 | -27.00 | 46.00 | -1.40 | 10.24 | 10.16 | Average |
| 12 | 0.99 | 30.20 | -25.80 | 56.00 | 9.80 | 10.24 | 10.16 | QP |

Note:

- Level(dBμV) = Read Level(dBμV) + LISN Factor(dB) + Cable Loss(dB)
- Over Limit(dB) = Level(dBμV) – Limit Line(dBμV)

Appendix C. Radiated Spurious Emission Test Data

| | | | |
|------------------------|------------|----------------------------|-----------|
| Test Engineer : | Wenbo Xiao | Relative Humidity : | 45~50% |
| | | Temperature : | 20°C~22°C |

Radiated Spurious Emission Test Modes





| Mode | Band (MHz) | Antenna | Modulation | Channel | Frequency | Data Rate | RU | Remark |
|--------|-------------|---------|-----------------|---------|-----------|-----------|----|--------|
| Mode 1 | 2400-2483.5 | SISO | Bluetooth-LE | 00 | 2402 | 1Mbps | - | - |
| Mode 2 | 2400-2483.5 | SISO | Bluetooth-LE | 19 | 2440 | 1Mbps | - | - |
| Mode 3 | 2400-2483.5 | SISO | Bluetooth-LE | 39 | 2480 | 1Mbps | - | - |
| Mode 4 | 2400-2483.5 | SISO | Bluetooth-LE | 00 | 2402 | 2Mbps | - | - |
| Mode 5 | 2400-2483.5 | SISO | Bluetooth-LE | 39 | 2480 | 2Mbps | - | - |
| Mode 6 | 2400-2483.5 | SISO | Bluetooth-LE-LF | 00 | 2402 | 1Mbps | - | LF |

Note: We only had assessed Radiated Band Edge to test in accordance with the lower conducted Power of Bluetooth LE 2Mbps.





Summary of each worse mode

| Mode | Modulation | Ch. | Freq. (MHz) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Pol. | Peak Avg. | Result | Remark |
|------|-----------------|-----|-------------|----------------|----------------|-------------|------|-----------|--------|-----------|
| 1 | Bluetooth-LE | 00 | 2385.90 | 44.60 | 54.00 | -9.40 | V | AVERAGE | Pass | Band Edge |
| | Bluetooth-LE | 00 | 4804.00 | 50.30 | 54.00 | -3.70 | V | Average | Pass | Harmonic |
| 2 | Bluetooth-LE | 19 | - | - | - | - | - | - | - | Band Edge |
| | Bluetooth-LE | 19 | 4880.00 | 45.90 | 54.00 | -8.10 | H | Average | Pass | Harmonic |
| 3 | Bluetooth-LE | 39 | 2495.96 | 44.41 | 54.00 | -9.59 | H | AVERAGE | Pass | Band Edge |
| | Bluetooth-LE | 39 | 4960.00 | 46.00 | 54.00 | -8.00 | H | Average | Pass | Harmonic |
| 4 | Bluetooth-LE | 00 | 2386.08 | 43.59 | 54.00 | -10.41 | V | AVERAGE | Pass | Band Edge |
| | Bluetooth-LE | 00 | - | - | - | - | - | - | - | Harmonic |
| 5 | Bluetooth-LE | 39 | 2496.00 | 44.04 | 54.00 | -9.96 | V | AVERAGE | Pass | Band Edge |
| | Bluetooth-LE | 39 | - | - | - | - | - | - | - | Harmonic |
| 6 | Bluetooth-LE-LF | 00 | 945.68 | 33.55 | 46.00 | -12.45 | H | PEAK | Pass | LF |

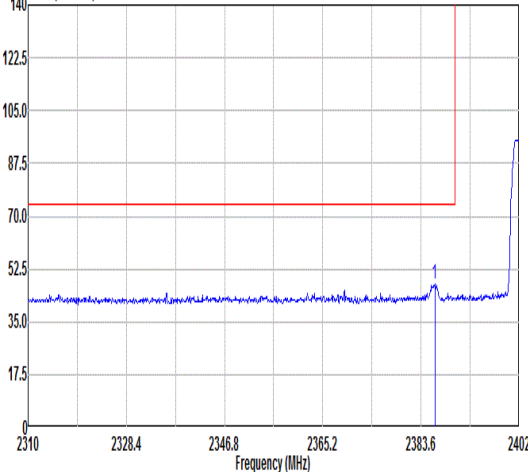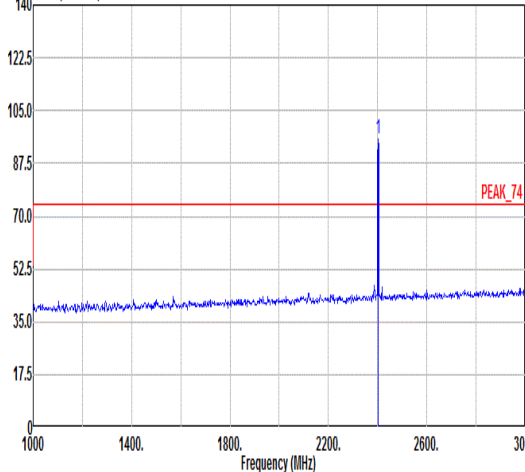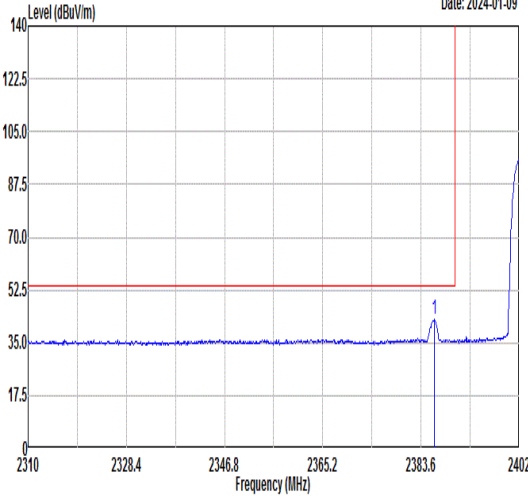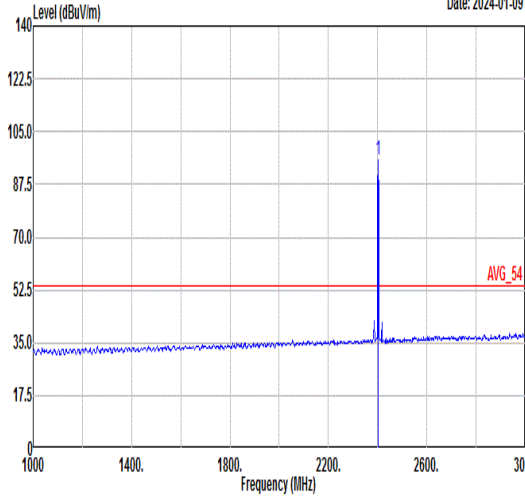

| Mode | 1 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|------|---|-------------|--------|--------|--------|-------------|--------|--------|-------------|-------------|--|------|-------|------|------|-------|--------|-------------|--|--|--------|-----|--------|--------|--|------|------|----|----|----|-----|---|---------|-------|-------|--------|-------|-------|------|-------|-----|-------------|---|--|-------|--------|------|-----|-------|--------|------|------|--|------|-------|------|------|-------|--------|-------------|--|--|--------|-----|--------|--------|--|------|------|----|----|----|-----|---|---------|-------|-------|-------|-------|------|-------|-----|-------------|
| | Band Edge | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | 2400-2483.5_Bluetooth-LE_CH00_2402MHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ANT | SISO | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Pol. | Horizontal | Fundamental | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak | <div><div>Level (dBuV/m)</div><div><div>Date: 2024-01-09</div></div><div>Frequency (MHz)</div></div> <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2386.18</td><td>47.57</td><td>74.00</td><td>-26.43</td><td>44.75</td><td>30.72</td><td>5.36</td><td>33.26</td><td>100</td><td>231 PEAK</td></tr></tbody></table> | | Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | | Freq | Level | Line | (dB) | Level | Factor | Loss Factor | | | Remark | MHz | dBuV/m | dBuV/m | | dBuV | dB/m | dB | dB | cm | deg | 1 | 2386.18 | 47.57 | 74.00 | -26.43 | 44.75 | 30.72 | 5.36 | 33.26 | 100 | 231 PEAK | <div><div>Level (dBuV/m)</div><div><div>Date: 2024-01-09</div></div><div>Frequency (MHz)</div></div> <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2402.00</td><td>95.47</td><td>-----</td><td>92.62</td><td>30.72</td><td>5.37</td><td>33.24</td><td>100</td><td>231 PEAK</td></tr></tbody></table> | | Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | | Freq | Level | Line | (dB) | Level | Factor | Loss Factor | | | Remark | MHz | dBuV/m | dBuV/m | | dBuV | dB/m | dB | dB | cm | deg | 1 | 2402.00 | 95.47 | ----- | 92.62 | 30.72 | 5.37 | 33.24 | 100 | 231 PEAK |
| | | Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | (dB) | Level | Factor | Loss Factor | | | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 2386.18 | 47.57 | 74.00 | -26.43 | 44.75 | 30.72 | 5.36 | 33.26 | 100 | 231 PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | (dB) | Level | Factor | Loss Factor | | | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 2402.00 | 95.47 | ----- | 92.62 | 30.72 | 5.37 | 33.24 | 100 | 231 PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Avg | <div><div>Level (dBuV/m)</div><div><div>Date: 2024-01-09</div></div><div>Frequency (MHz)</div></div> <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2386.08</td><td>42.54</td><td>54.00</td><td>-11.46</td><td>39.72</td><td>30.72</td><td>5.36</td><td>33.26</td><td>100</td><td>231 AVERAGE</td></tr></tbody></table> | | Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | | Freq | Level | Line | (dB) | Level | Factor | Loss Factor | | | Remark | MHz | dBuV/m | dBuV/m | | dBuV | dB/m | dB | dB | cm | deg | 1 | 2386.08 | 42.54 | 54.00 | -11.46 | 39.72 | 30.72 | 5.36 | 33.26 | 100 | 231 AVERAGE | <div><div>Level (dBuV/m)</div><div><div>Date: 2024-01-09</div></div><div>Frequency (MHz)</div></div> <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2402.00</td><td>95.47</td><td>-----</td><td>92.62</td><td>30.72</td><td>5.37</td><td>33.24</td><td>100</td><td>231 AVERAGE</td></tr></tbody></table> | | Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | | Freq | Level | Line | (dB) | Level | Factor | Loss Factor | | | Remark | MHz | dBuV/m | dBuV/m | | dBuV | dB/m | dB | dB | cm | deg | 1 | 2402.00 | 95.47 | ----- | 92.62 | 30.72 | 5.37 | 33.24 | 100 | 231 AVERAGE |
| | | Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | (dB) | Level | Factor | Loss Factor | | | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 2386.08 | 42.54 | 54.00 | -11.46 | 39.72 | 30.72 | 5.36 | 33.26 | 100 | 231 AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | (dB) | Level | Factor | Loss Factor | | | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 2402.00 | 95.47 | ----- | 92.62 | 30.72 | 5.37 | 33.24 | 100 | 231 AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |

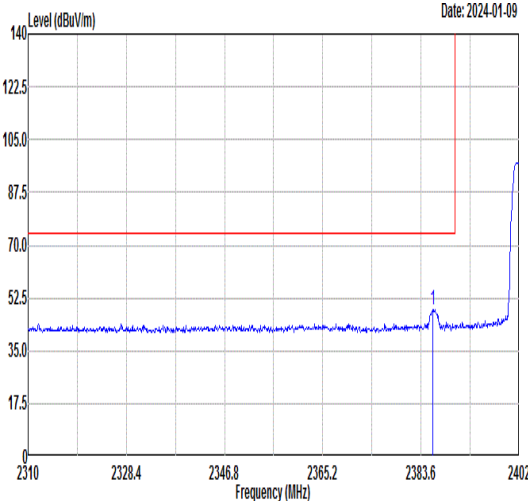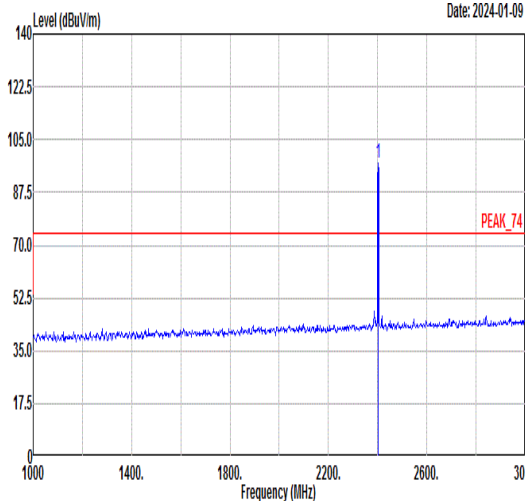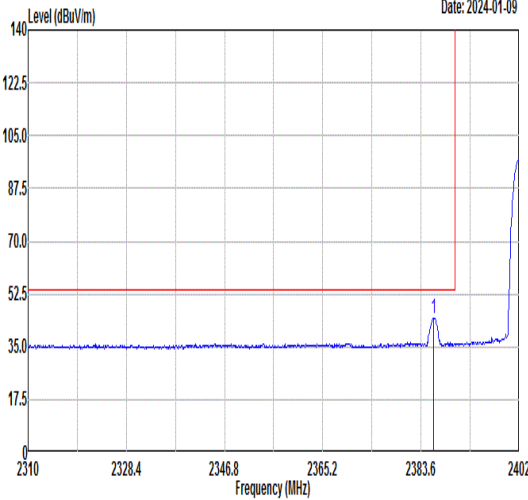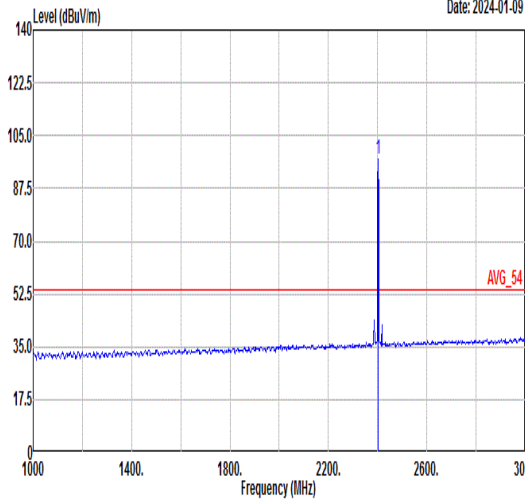

| | | 1 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|------|--|--------|--------|--------|--------|-------------|--|-------|-----------------|------|-----|-------|--------|------|------|--|------|-------|------|------|-------|--------|-------------|--|--|--------|--|-----|--------|--------|------|------|----|----|----|-----|---|---------|-------|-------|--------|-------|-------|------|-------|-----------------|--|--|--|--|--|--|-------|--------|------|-----|-------|--------|------|------|--|------|-------|------|------|-------|--------|-------------|--|--|--------|--|-----|--------|--------|------|------|----|----|----|-----|---|---------|-------|-------|-------|-------|------|-------|-----|
| Mode | Band Edge | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | 2400-2483.5_Bluetooth-LE_CH00_2402MHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ANT | SISO | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Pol. | Vertical | | | | | | Fundamental | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak |  | | | | | |  | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2385.81</td><td>48.46</td><td>74.00</td><td>-25.54</td><td>45.64</td><td>30.72</td><td>5.36</td><td>33.26</td><td>349 252 PEAK</td></tr></tbody></table> | | | | | | | Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | | Freq | Level | Line | (dB) | Level | Factor | Loss Factor | | | Remark | | MHz | dBuV/m | dBuV/m | dBuV | dB/m | dB | dB | cm | deg | 1 | 2385.81 | 48.46 | 74.00 | -25.54 | 45.64 | 30.72 | 5.36 | 33.26 | 349 252 PEAK | <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2402.00</td><td>97.10</td><td>-----</td><td>94.25</td><td>30.72</td><td>5.37</td><td>33.24</td><td>349</td><td>252 PEAK</td></tr></tbody></table> | | | | | | Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | | Freq | Level | Line | (dB) | Level | Factor | Loss Factor | | | Remark | | MHz | dBuV/m | dBuV/m | dBuV | dB/m | dB | dB | cm | deg | 1 | 2402.00 | 97.10 | ----- | 94.25 | 30.72 | 5.37 | 33.24 | 349 |
| | Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | (dB) | Level | Factor | Loss Factor | | | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | MHz | dBuV/m | dBuV/m | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 2385.81 | 48.46 | 74.00 | -25.54 | 45.64 | 30.72 | 5.36 | 33.26 | 349 252 PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | (dB) | Level | Factor | Loss Factor | | | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | MHz | dBuV/m | dBuV/m | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 2402.00 | 97.10 | ----- | 94.25 | 30.72 | 5.37 | 33.24 | 349 | 252 PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Avg |  | | | | | |  | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2385.90</td><td>44.60</td><td>54.00</td><td>-9.40</td><td>41.78</td><td>30.72</td><td>5.36</td><td>33.26</td><td>349 252 AVERAGE</td></tr></tbody></table> | | | | | | | Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | | Freq | Level | Line | (dB) | Level | Factor | Loss Factor | | | Remark | | MHz | dBuV/m | dBuV/m | dBuV | dB/m | dB | dB | cm | deg | 1 | 2385.90 | 44.60 | 54.00 | -9.40 | 41.78 | 30.72 | 5.36 | 33.26 | 349 252 AVERAGE | <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2402.00</td><td>97.17</td><td>-----</td><td>94.32</td><td>30.72</td><td>5.37</td><td>33.24</td><td>349</td><td>252 AVERAGE</td></tr></tbody></table> | | | | | | Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | | Freq | Level | Line | (dB) | Level | Factor | Loss Factor | | | Remark | | MHz | dBuV/m | dBuV/m | dBuV | dB/m | dB | dB | cm | deg | 1 | 2402.00 | 97.17 | ----- | 94.32 | 30.72 | 5.37 | 33.24 | 349 |
| | Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | (dB) | Level | Factor | Loss Factor | | | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | MHz | dBuV/m | dBuV/m | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 2385.90 | 44.60 | 54.00 | -9.40 | 41.78 | 30.72 | 5.36 | 33.26 | 349 252 AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | (dB) | Level | Factor | Loss Factor | | | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | MHz | dBuV/m | dBuV/m | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 2402.00 | 97.17 | ----- | 94.32 | 30.72 | 5.37 | 33.24 | 349 | 252 AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |







| Mode | 1 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|-----------------|---|--------|--------|--------|--------|--------|--|--------|------|-----|---------|--------|------|------|--|------|-------|------|--------|-------|--------|------|--------|--------|--|-----|--------|--------|----|------|------|----|----|-----|---|---------|-------|-------|--------|-------|-------|------|-------|-----|-----|------|---|---------|-------|-------|-------|-------|-------|------|-------|-----|-----|---------|---|--|--|--|--|--|--|-------|------|-----|-------|--------|------|------|--|------|-------|------|--------|-------|--------|------|--------|--------|--|-----|--------|--------|----|------|------|----|----|-----|---|---------|-------|-------|--------|-------|-------|------|-------|-----|-----|------|---|---------|-------|-------|-------|-------|-------|------|-------|-----|-----|---------|
| | Harmonic | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | 2400-2483.5_Bluetooth-LE_CH00_2402MHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ANT | SISO | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Pol. | Horizontal | | | | | | Vertical | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak Avg | <div><div>Level (dBuV/m)</div><div><div>Date: 2024-01-09</div><div>Frequency (MHz)</div></div></div> | | | | | | <div><div>Level (dBuV/m)</div><div><div>Date: 2024-01-09</div><div>Frequency (MHz)</div></div></div> | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4804.00</td><td>51.42</td><td>74.00</td><td>-22.58</td><td>71.59</td><td>35.73</td><td>8.94</td><td>64.84</td><td>130</td><td>286</td><td>Peak</td></tr><tr><td>2</td><td>4804.00</td><td>49.43</td><td>54.00</td><td>-4.57</td><td>69.60</td><td>35.73</td><td>8.94</td><td>64.84</td><td>130</td><td>286</td><td>Average</td></tr></table> | | | | | | | Limit | Read | Ant | Cable | Preamp | APos | TPos | | Freq | Level | Line | Margin | Level | Factor | Loss | Factor | Remark | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | cm | deg | 1 | 4804.00 | 51.42 | 74.00 | -22.58 | 71.59 | 35.73 | 8.94 | 64.84 | 130 | 286 | Peak | 2 | 4804.00 | 49.43 | 54.00 | -4.57 | 69.60 | 35.73 | 8.94 | 64.84 | 130 | 286 | Average | <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4804.00</td><td>52.33</td><td>74.00</td><td>-21.67</td><td>72.50</td><td>35.73</td><td>8.94</td><td>64.84</td><td>345</td><td>255</td><td>Peak</td></tr><tr><td>2</td><td>4804.00</td><td>50.30</td><td>54.00</td><td>-3.70</td><td>70.47</td><td>35.73</td><td>8.94</td><td>64.84</td><td>345</td><td>255</td><td>Average</td></tr></table> | | | | | | | Limit | Read | Ant | Cable | Preamp | APos | TPos | | Freq | Level | Line | Margin | Level | Factor | Loss | Factor | Remark | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | cm | deg | 1 | 4804.00 | 52.33 | 74.00 | -21.67 | 72.50 | 35.73 | 8.94 | 64.84 | 345 | 255 | Peak | 2 | 4804.00 | 50.30 | 54.00 | -3.70 | 70.47 | 35.73 | 8.94 | 64.84 | 345 | 255 | Average |
| | | Limit | Read | Ant | Cable | Preamp | APos | TPos | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | Margin | Level | Factor | Loss | Factor | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 4804.00 | 51.42 | 74.00 | -22.58 | 71.59 | 35.73 | 8.94 | 64.84 | 130 | 286 | Peak | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2 | 4804.00 | 49.43 | 54.00 | -4.57 | 69.60 | 35.73 | 8.94 | 64.84 | 130 | 286 | Average | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | Limit | Read | Ant | Cable | Preamp | APos | TPos | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | Margin | Level | Factor | Loss | Factor | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 4804.00 | 52.33 | 74.00 | -21.67 | 72.50 | 35.73 | 8.94 | 64.84 | 345 | 255 | Peak | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2 | 4804.00 | 50.30 | 54.00 | -3.70 | 70.47 | 35.73 | 8.94 | 64.84 | 345 | 255 | Average | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |

Note: Only the worst case has assessed 18G ~26GHz to test.







| Mode | 2 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--|--|---------|--------|--------|--------|--------|--------|--------|--------|------|---------|--------|-------|-------|------|------|-----|-------|--------|--------|------|--------|--------|-------|-------|--------|--------|--------|--------|--------|--------|--|-----|--------|--------|--------|------|------|------|----|----|-----|-----|--|---|---------|---------|-------|--------|--------|-------|-------|-------|-------|-----|------|------|---------|---------|-------|--------|-------|-------|-------|-------|-------|-----|------|---------|---|---------|-------|-------|--------|-------|-------|-------|-------|-----|-----|------|
| | Harmonic | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | 2400-2483.5_Bluetooth-LE_CH19_2440MHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ANT | SISO | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Pol. | Horizontal | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak Avg | <div><div>Level (dBuV/m)</div><div>Date: 2024-01-09</div><table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1</td><td>4880.00</td><td>50.00</td><td>74.00</td><td>-24.00</td><td>70.25</td><td>35.91</td><td>8.71</td><td>64.87</td><td>100</td><td>289</td><td>Peak</td></tr><tr><td>2</td><td>4880.00</td><td>45.90</td><td>54.00</td><td>-8.10</td><td>66.15</td><td>35.91</td><td>8.71</td><td>64.87</td><td>100</td><td>289</td><td>Average</td></tr><tr><td>3</td><td>7320.00</td><td>45.44</td><td>74.00</td><td>-28.56</td><td>63.25</td><td>36.87</td><td>10.18</td><td>64.86</td><td>---</td><td>---</td><td>Peak</td></tr></table></div> | | | | | | | | | | | | | Limit | | Read | | Ant | Cable | Preamp | APos | TPos | Remark | Freq | Level | Line | Margin | Level | Factor | Loss | Factor | | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | 1 | 4880.00 | 50.00 | 74.00 | -24.00 | 70.25 | 35.91 | 8.71 | 64.87 | 100 | 289 | Peak | 2 | 4880.00 | 45.90 | 54.00 | -8.10 | 66.15 | 35.91 | 8.71 | 64.87 | 100 | 289 | Average | 3 | 7320.00 | 45.44 | 74.00 | -28.56 | 63.25 | 36.87 | 10.18 | 64.86 | --- | --- | Peak |
| | | | Limit | | Read | | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | Freq | Level | Line | Margin | Level | Factor | Loss | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | 1 | 4880.00 | 50.00 | 74.00 | -24.00 | 70.25 | 35.91 | 8.71 | 64.87 | 100 | 289 | Peak | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2 | 4880.00 | 45.90 | 54.00 | -8.10 | 66.15 | 35.91 | 8.71 | 64.87 | 100 | 289 | Average | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 3 | 7320.00 | 45.44 | 74.00 | -28.56 | 63.25 | 36.87 | 10.18 | 64.86 | --- | --- | Peak | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| <div><div>Level (dBuV/m)</div><div>Date: 2024-01-09</div><table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1</td><td>4880.00</td><td>44.84</td><td>74.00</td><td>-29.16</td><td>65.09</td><td>35.91</td><td>8.71</td><td>64.87</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>7320.00</td><td>46.09</td><td>74.00</td><td>-27.91</td><td>63.90</td><td>36.87</td><td>10.18</td><td>64.86</td><td>---</td><td>---</td><td>Peak</td></tr></table></div> | | | | | | | | | | | | | Limit | | Read | | Ant | Cable | Preamp | APos | TPos | Remark | Freq | Level | Line | Margin | Level | Factor | Loss | Factor | | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | 1 | 4880.00 | 44.84 | 74.00 | -29.16 | 65.09 | 35.91 | 8.71 | 64.87 | --- | --- | Peak | 2 | 7320.00 | 46.09 | 74.00 | -27.91 | 63.90 | 36.87 | 10.18 | 64.86 | --- | --- | Peak | | | | | | | | | | | | | |
| | | Limit | | Read | | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | Margin | Level | Factor | Loss | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 4880.00 | 44.84 | 74.00 | -29.16 | 65.09 | 35.91 | 8.71 | 64.87 | --- | --- | Peak | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2 | 7320.00 | 46.09 | 74.00 | -27.91 | 63.90 | 36.87 | 10.18 | 64.86 | --- | --- | Peak | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |

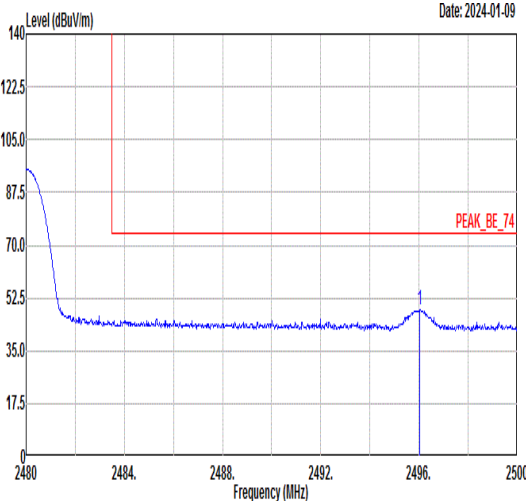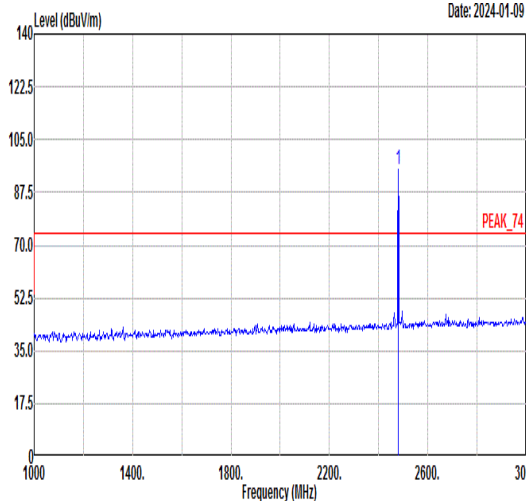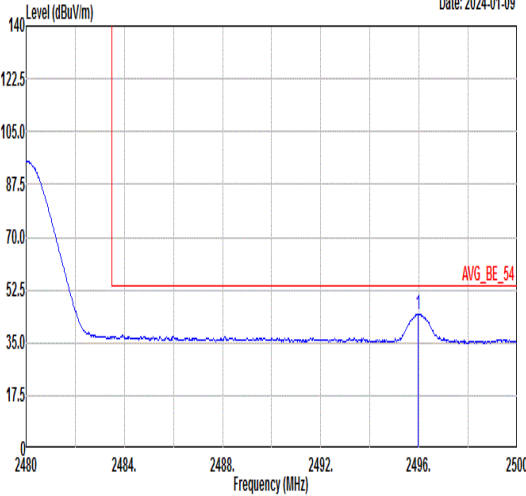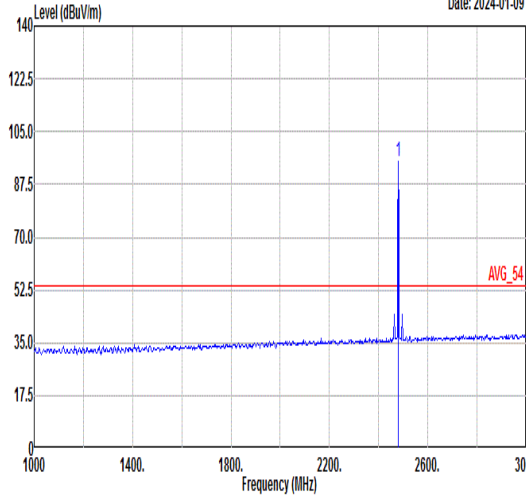

| Mode | 3 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|------|---|--------|-------|--------|--------|--------|--|-------|--------|-------------|-----|-------|--------|------|------|--|------|-------|------|------|-------|--------|------|--------|--|--------|-----|--------|--------|--|------|------|----|----|----|-----|---|---------|-------|-------|--------|-------|-------|------|-------|-----|-------------|---|--|--|--|--|--|-------|--------|------|-----|-------|--------|------|------|--|------|-------|------|------|-------|--------|------|--------|--|--------|-----|--------|--------|--|------|------|----|----|----|-----|---|---------|-------|-------|-------|-------|-------|------|-------|-----|
| | Band Edge | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | 2400-2483.5_Bluetooth-LE_CH39_2480MHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ANT | SISO | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Pol. | Horizontal | | | | | | Fundamental | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak |  | | | | | |  | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2496.04</td><td>48.57</td><td>74.00</td><td>-25.43</td><td>45.51</td><td>30.70</td><td>5.47</td><td>33.11</td><td>145</td><td>227 PEAK</td></tr></table> | | | | | | | Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | | Freq | Level | Line | (dB) | Level | Factor | Loss | Factor | | Remark | MHz | dBuV/m | dBuV/m | | dBuV | dB/m | dB | dB | cm | deg | 1 | 2496.04 | 48.57 | 74.00 | -25.43 | 45.51 | 30.70 | 5.47 | 33.11 | 145 | 227 PEAK | <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2480.00</td><td>95.03</td><td>-----</td><td>-----</td><td>92.00</td><td>30.70</td><td>5.46</td><td>33.13</td><td>145</td><td>227 PEAK</td></tr></table> | | | | | | Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | | Freq | Level | Line | (dB) | Level | Factor | Loss | Factor | | Remark | MHz | dBuV/m | dBuV/m | | dBuV | dB/m | dB | dB | cm | deg | 1 | 2480.00 | 95.03 | ----- | ----- | 92.00 | 30.70 | 5.46 | 33.13 | 145 |
| | Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | (dB) | Level | Factor | Loss | Factor | | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 2496.04 | 48.57 | 74.00 | -25.43 | 45.51 | 30.70 | 5.47 | 33.11 | 145 | 227 PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | (dB) | Level | Factor | Loss | Factor | | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 2480.00 | 95.03 | ----- | ----- | 92.00 | 30.70 | 5.46 | 33.13 | 145 | 227 PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Avg |  | | | | | |  | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2495.96</td><td>44.41</td><td>54.00</td><td>-9.59</td><td>41.35</td><td>30.70</td><td>5.47</td><td>33.11</td><td>145</td><td>227 AVERAGE</td></tr></table> | | | | | | | Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | | Freq | Level | Line | (dB) | Level | Factor | Loss | Factor | | Remark | MHz | dBuV/m | dBuV/m | | dBuV | dB/m | dB | dB | cm | deg | 1 | 2495.96 | 44.41 | 54.00 | -9.59 | 41.35 | 30.70 | 5.47 | 33.11 | 145 | 227 AVERAGE | <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2480.00</td><td>95.16</td><td>-----</td><td>-----</td><td>92.13</td><td>30.70</td><td>5.46</td><td>33.13</td><td>145</td><td>227 AVERAGE</td></tr></table> | | | | | | Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | | Freq | Level | Line | (dB) | Level | Factor | Loss | Factor | | Remark | MHz | dBuV/m | dBuV/m | | dBuV | dB/m | dB | dB | cm | deg | 1 | 2480.00 | 95.16 | ----- | ----- | 92.13 | 30.70 | 5.46 | 33.13 | 145 |
| | Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | (dB) | Level | Factor | Loss | Factor | | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 2495.96 | 44.41 | 54.00 | -9.59 | 41.35 | 30.70 | 5.47 | 33.11 | 145 | 227 AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | (dB) | Level | Factor | Loss | Factor | | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 2480.00 | 95.16 | ----- | ----- | 92.13 | 30.70 | 5.46 | 33.13 | 145 | 227 AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |

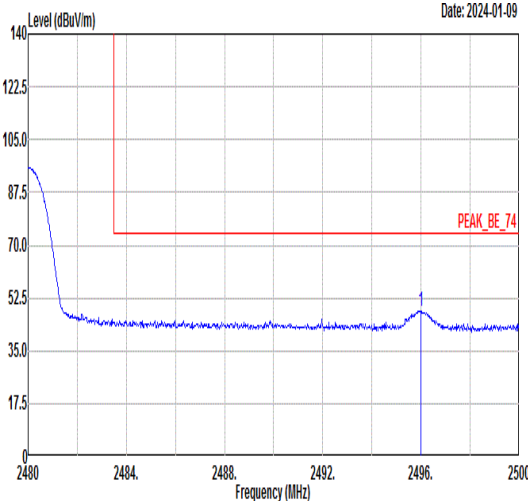
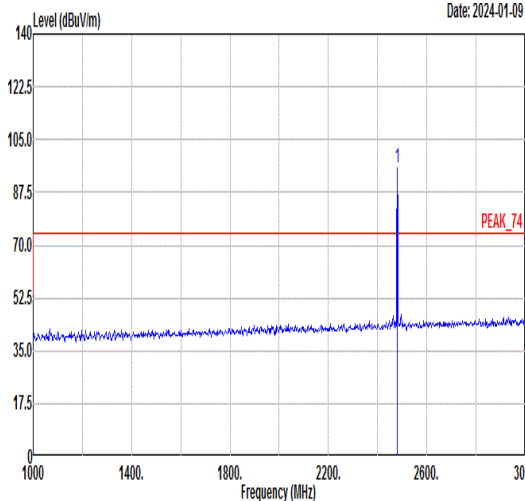
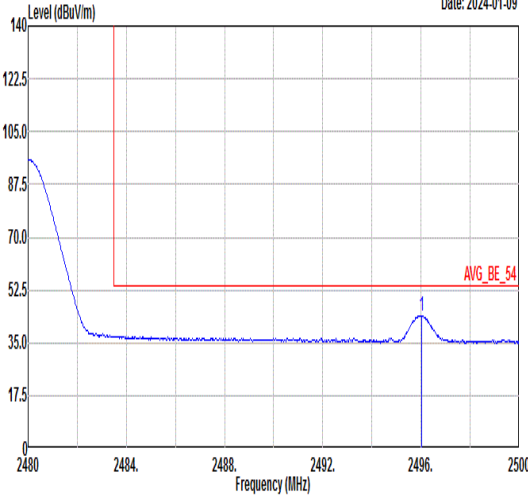
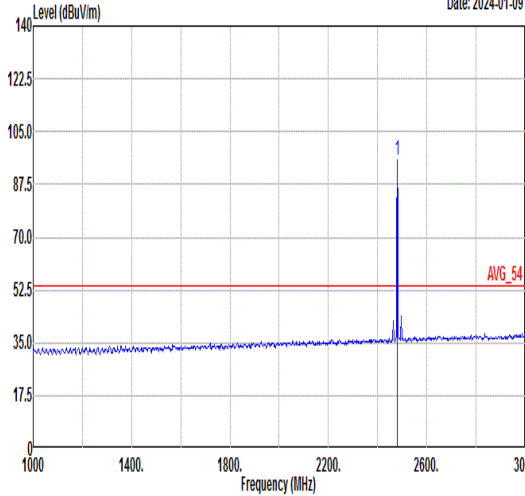


| | | 3 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|-----------|---|---------------------------------------|--------|-------|--------|--|-------------|------|-------------|--|------|-------|------|------|-------|--------|-------------|--|--|--------|-----|--------|--------|--|------|------|----|----|----|-----|-----------|-------|-------|--------|-------|-------|------|-------|-----|-------------|--|--|-------|--------|------|-----|-------|--------|------|------|--|------|-------|------|------|-------|--------|-------------|--|--|--------|-----|--------|--------|--|------|------|----|----|----|-----|-----------|-------|-------|-------|-------|-------|------|-------|-----|
| Mode | | Band Edge | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | 2400-2483.5_Bluetooth-LE_CH39_2480MHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ANT | | SISO | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Pol. | | Vertical | | | | | Fundamental | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak |  | | | | |  | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | | Freq | Level | Line | (dB) | Level | Factor | Loss Factor | | | Remark | MHz | dBuV/m | dBuV/m | | dBuV | dB/m | dB | dB | cm | deg | 1 2495.98 | 48.16 | 74.00 | -25.84 | 45.10 | 30.70 | 5.47 | 33.11 | 363 | 257 PEAK | <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 2480.00</td><td>95.53</td><td>-----</td><td>-----</td><td>92.50</td><td>30.70</td><td>5.46</td><td>33.13</td><td>363</td><td>257 PEAK</td></tr></table> | | Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | | Freq | Level | Line | (dB) | Level | Factor | Loss Factor | | | Remark | MHz | dBuV/m | dBuV/m | | dBuV | dB/m | dB | dB | cm | deg | 1 2480.00 | 95.53 | ----- | ----- | 92.50 | 30.70 | 5.46 | 33.13 | 363 |
| | Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | (dB) | Level | Factor | Loss Factor | | | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 2495.98 | 48.16 | 74.00 | -25.84 | 45.10 | 30.70 | 5.47 | 33.11 | 363 | 257 PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | (dB) | Level | Factor | Loss Factor | | | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 2480.00 | 95.53 | ----- | ----- | 92.50 | 30.70 | 5.46 | 33.13 | 363 | 257 PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Avg |  | | | | |  | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | | Freq | Level | Line | (dB) | Level | Factor | Loss Factor | | | Remark | MHz | dBuV/m | dBuV/m | | dBuV | dB/m | dB | dB | cm | deg | 1 2496.04 | 43.96 | 54.00 | -10.04 | 40.90 | 30.70 | 5.47 | 33.11 | 363 | 257 AVERAGE | <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 2480.00</td><td>95.64</td><td>-----</td><td>-----</td><td>92.61</td><td>30.70</td><td>5.46</td><td>33.13</td><td>363</td><td>257 AVERAGE</td></tr></table> | | Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | | Freq | Level | Line | (dB) | Level | Factor | Loss Factor | | | Remark | MHz | dBuV/m | dBuV/m | | dBuV | dB/m | dB | dB | cm | deg | 1 2480.00 | 95.64 | ----- | ----- | 92.61 | 30.70 | 5.46 | 33.13 | 363 |
| | Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | (dB) | Level | Factor | Loss Factor | | | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 2496.04 | 43.96 | 54.00 | -10.04 | 40.90 | 30.70 | 5.47 | 33.11 | 363 | 257 AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | (dB) | Level | Factor | Loss Factor | | | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 2480.00 | 95.64 | ----- | ----- | 92.61 | 30.70 | 5.46 | 33.13 | 363 | 257 AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |







| Mode | 3 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|-----------------|--|--------|--------|--------|--------|--------|----------|--------|--------|-----|---------|--------|------|------|--|------|-------|------|--------|-------|--------|------|--------|--------|--|-----|--------|--------|----|------|------|----|----|----|-----|--|---|---------|-------|-------|--------|-------|-------|------|-------|-----|-----|------|---|---------|-------|-------|-------|-------|-------|------|-------|-----|-----|---------|---|---------|-------|-------|--------|-------|-------|-------|-------|-----|-----|------|--|--|--|--|--|--|--|-------|------|-----|-------|--------|------|------|--|------|-------|------|--------|-------|--------|------|--------|--------|--|-----|--------|--------|----|------|------|----|----|----|-----|--|---|---------|-------|-------|--------|-------|-------|------|-------|-----|-----|------|---|---------|-------|-------|--------|-------|-------|-------|-------|-----|-----|------|
| | Harmonic | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | 2400-2483.5_Bluetooth-LE_CH39_2480MHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ANT | SISO | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Pol. | Horizontal | | | | | | Vertical | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak Avg | <div><div>Level (dBuV/m)</div><div>Date: 2024-01-09</div></div> <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>4960.00</td><td>49.14</td><td>74.00</td><td>-24.86</td><td>69.48</td><td>36.10</td><td>8.46</td><td>64.90</td><td>103</td><td>294</td><td>Peak</td></tr><tr><td>2</td><td>4960.00</td><td>46.00</td><td>54.00</td><td>-8.00</td><td>66.34</td><td>36.10</td><td>8.46</td><td>64.90</td><td>103</td><td>294</td><td>Average</td></tr><tr><td>3</td><td>7440.00</td><td>43.88</td><td>74.00</td><td>-30.12</td><td>61.75</td><td>36.82</td><td>10.17</td><td>64.86</td><td>---</td><td>---</td><td>Peak</td></tr></table> | | | | | | | Limit | Read | Ant | Cable | Preamp | APos | TPos | | Freq | Level | Line | Margin | Level | Factor | Loss | Factor | Remark | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | 1 | 4960.00 | 49.14 | 74.00 | -24.86 | 69.48 | 36.10 | 8.46 | 64.90 | 103 | 294 | Peak | 2 | 4960.00 | 46.00 | 54.00 | -8.00 | 66.34 | 36.10 | 8.46 | 64.90 | 103 | 294 | Average | 3 | 7440.00 | 43.88 | 74.00 | -30.12 | 61.75 | 36.82 | 10.17 | 64.86 | --- | --- | Peak | <div><div>Level (dBuV/m)</div><div>Date: 2024-01-09</div></div> <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>4960.00</td><td>44.06</td><td>74.00</td><td>-29.94</td><td>64.40</td><td>36.10</td><td>8.46</td><td>64.90</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>7440.00</td><td>43.86</td><td>74.00</td><td>-30.14</td><td>61.73</td><td>36.82</td><td>10.17</td><td>64.86</td><td>---</td><td>---</td><td>Peak</td></tr></table> | | | | | | | Limit | Read | Ant | Cable | Preamp | APos | TPos | | Freq | Level | Line | Margin | Level | Factor | Loss | Factor | Remark | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | 1 | 4960.00 | 44.06 | 74.00 | -29.94 | 64.40 | 36.10 | 8.46 | 64.90 | --- | --- | Peak | 2 | 7440.00 | 43.86 | 74.00 | -30.14 | 61.73 | 36.82 | 10.17 | 64.86 | --- | --- | Peak |
| | | Limit | Read | Ant | Cable | Preamp | APos | TPos | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | Freq | Level | Line | Margin | Level | Factor | Loss | Factor | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 4960.00 | 49.14 | 74.00 | -24.86 | 69.48 | 36.10 | 8.46 | 64.90 | 103 | 294 | Peak | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2 | 4960.00 | 46.00 | 54.00 | -8.00 | 66.34 | 36.10 | 8.46 | 64.90 | 103 | 294 | Average | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 3 | 7440.00 | 43.88 | 74.00 | -30.12 | 61.75 | 36.82 | 10.17 | 64.86 | --- | --- | Peak | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | Limit | Read | Ant | Cable | Preamp | APos | TPos | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | Margin | Level | Factor | Loss | Factor | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 4960.00 | 44.06 | 74.00 | -29.94 | 64.40 | 36.10 | 8.46 | 64.90 | --- | --- | Peak | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2 | 7440.00 | 43.86 | 74.00 | -30.14 | 61.73 | 36.82 | 10.17 | 64.86 | --- | --- | Peak | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |

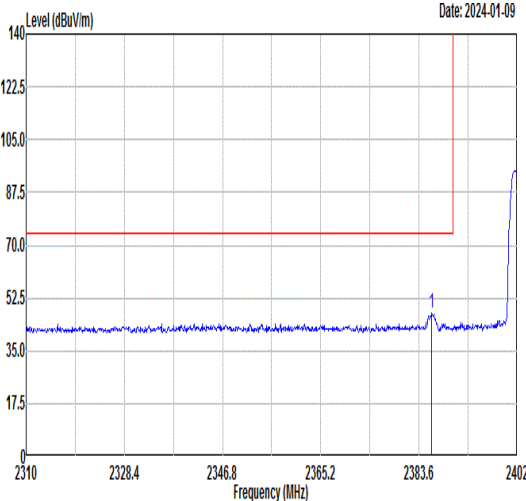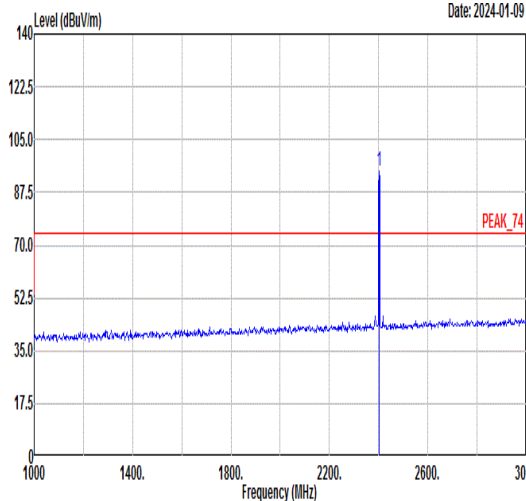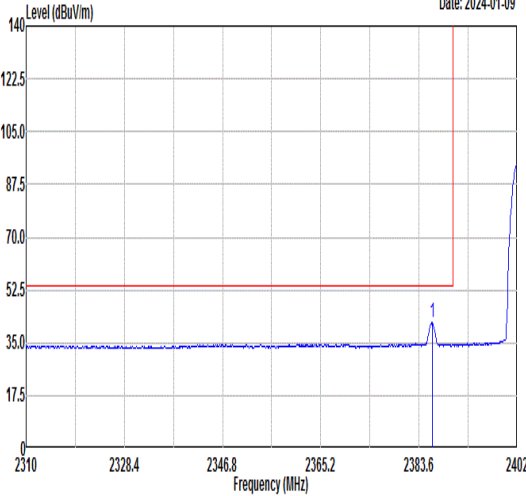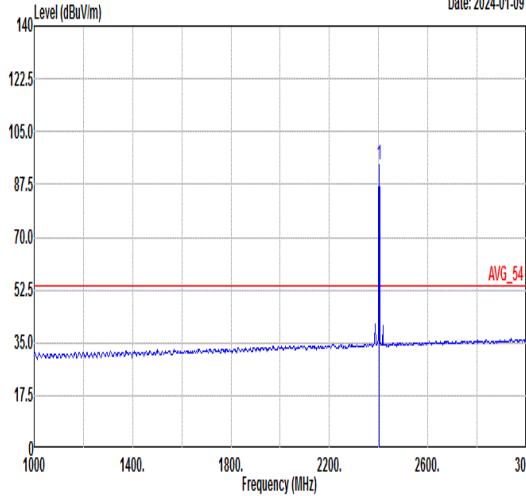

| Mode | 4 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|------|---|--------|-------|--------|--------|--|-------|--------|--------|-------------|-------|--------|------|------|--|------|-------|------|------|-------|--------|-------------|--|--|--------|-----|--------|--------|--|------|------|----|----|----|-----|---|---------|-------|-------|--------|-------|-------|------|-------|-----|-------------|--|--|--|--|--|--|-------|--------|------|-----|-------|--------|------|------|--|------|-------|------|------|-------|--------|-------------|--|--|--------|-----|--------|--------|--|------|------|----|----|----|-----|---|---------|-------|-------|-------|-------|-------|------|-------|-----|
| | Band Edge | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | 2400-2483.5_Bluetooth-LE_CH00_2402MHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ANT | SISO | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Pol. | Horizontal | | | | | Fundamental | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak |  | | | | |  | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2385.99</td><td>47.52</td><td>74.00</td><td>-26.48</td><td>44.70</td><td>30.72</td><td>5.36</td><td>33.26</td><td>400</td><td>290 PEAK</td></tr></table> | | | | | | Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | | Freq | Level | Line | (dB) | Level | Factor | Loss Factor | | | Remark | MHz | dBuV/m | dBuV/m | | dBuV | dB/m | dB | dB | cm | deg | 1 | 2385.99 | 47.52 | 74.00 | -26.48 | 44.70 | 30.72 | 5.36 | 33.26 | 400 | 290 PEAK | <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2402.00</td><td>94.51</td><td>-----</td><td>-----</td><td>91.66</td><td>30.72</td><td>5.37</td><td>33.24</td><td>400</td><td>290 PEAK</td></tr></table> | | | | | | Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | | Freq | Level | Line | (dB) | Level | Factor | Loss Factor | | | Remark | MHz | dBuV/m | dBuV/m | | dBuV | dB/m | dB | dB | cm | deg | 1 | 2402.00 | 94.51 | ----- | ----- | 91.66 | 30.72 | 5.37 | 33.24 | 400 |
| | Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | (dB) | Level | Factor | Loss Factor | | | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 2385.99 | 47.52 | 74.00 | -26.48 | 44.70 | 30.72 | 5.36 | 33.26 | 400 | 290 PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | (dB) | Level | Factor | Loss Factor | | | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 2402.00 | 94.51 | ----- | ----- | 91.66 | 30.72 | 5.37 | 33.24 | 400 | 290 PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Avg |  | | | | |  | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2386.08</td><td>41.76</td><td>54.00</td><td>-12.24</td><td>38.94</td><td>30.72</td><td>5.36</td><td>33.26</td><td>400</td><td>290 AVERAGE</td></tr></table> | | | | | | Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | | Freq | Level | Line | (dB) | Level | Factor | Loss Factor | | | Remark | MHz | dBuV/m | dBuV/m | | dBuV | dB/m | dB | dB | cm | deg | 1 | 2386.08 | 41.76 | 54.00 | -12.24 | 38.94 | 30.72 | 5.36 | 33.26 | 400 | 290 AVERAGE | <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2402.00</td><td>94.04</td><td>-----</td><td>-----</td><td>91.19</td><td>30.72</td><td>5.37</td><td>33.24</td><td>400</td><td>290 AVERAGE</td></tr></table> | | | | | | Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | | Freq | Level | Line | (dB) | Level | Factor | Loss Factor | | | Remark | MHz | dBuV/m | dBuV/m | | dBuV | dB/m | dB | dB | cm | deg | 1 | 2402.00 | 94.04 | ----- | ----- | 91.19 | 30.72 | 5.37 | 33.24 | 400 |
| | Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | (dB) | Level | Factor | Loss Factor | | | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 2386.08 | 41.76 | 54.00 | -12.24 | 38.94 | 30.72 | 5.36 | 33.26 | 400 | 290 AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | (dB) | Level | Factor | Loss Factor | | | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 2402.00 | 94.04 | ----- | ----- | 91.19 | 30.72 | 5.37 | 33.24 | 400 | 290 AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |

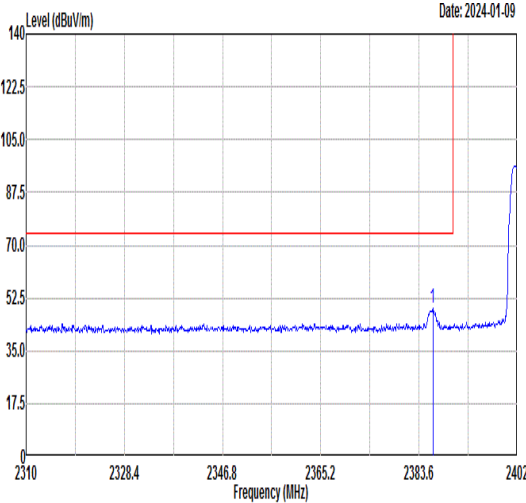
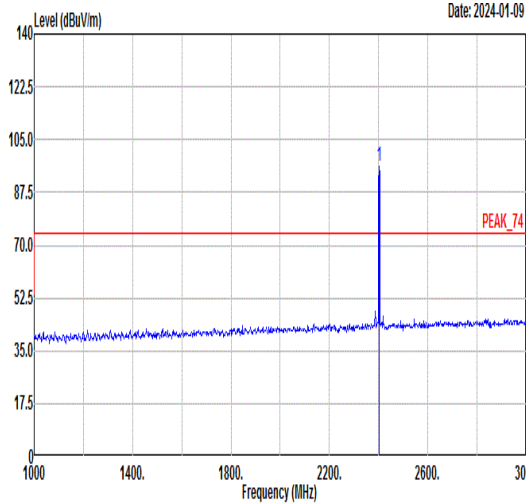
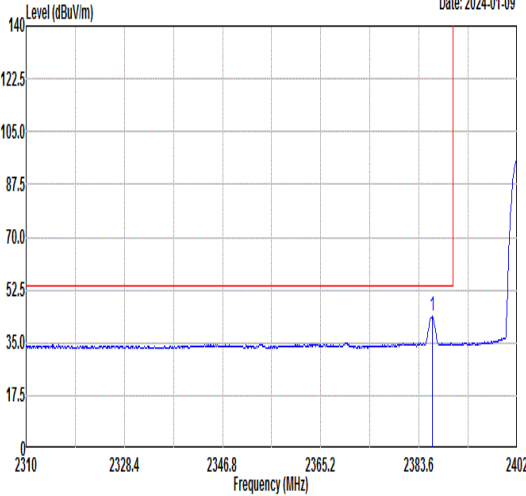
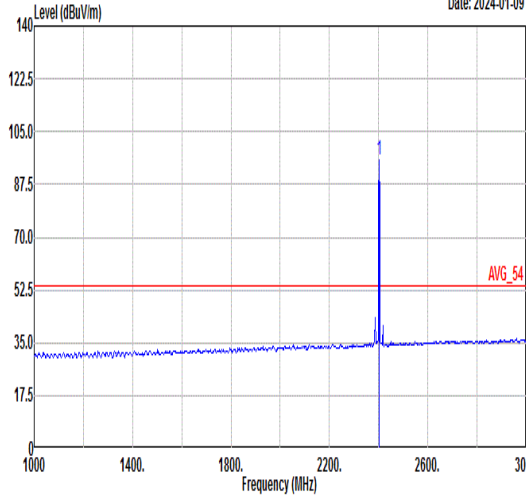


| Mode | 4 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|-----------|---|-------------|--------|--------|--------|-------------|--------|--------|-------------|------|--|------|-------|------|------|-------|--------|-------------|--|--|--------|-----|--------|--------|--|------|------|----|----|----|-----|-----------|-------|-------|--------|-------|-------|------|-------|-----|-------------|---|--|-------|--------|------|-----|-------|--------|------|------|--|------|-------|------|------|-------|--------|-------------|--|--|--------|-----|--------|--------|--|------|------|----|----|----|-----|-----------|-------|-------|-------|-------|-------|------|-------|-----|-------------|
| | Band Edge | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | 2400-2483.5_Bluetooth-LE_CH00_2402MHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ANT | SISO | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Pol. | Vertical | Fundamental | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak | <div><div>Level (dBuV/m)</div><div><div>Date: 2024-01-09</div></div><div><table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 2386.18</td><td>48.95</td><td>74.00</td><td>-25.05</td><td>46.13</td><td>30.72</td><td>5.36</td><td>33.26</td><td>400</td><td>247 PEAK</td></tr></tbody></table></div></div> | | Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | | Freq | Level | Line | (dB) | Level | Factor | Loss Factor | | | Remark | MHz | dBuV/m | dBuV/m | | dBuV | dB/m | dB | dB | cm | deg | 1 2386.18 | 48.95 | 74.00 | -25.05 | 46.13 | 30.72 | 5.36 | 33.26 | 400 | 247 PEAK | <div><div>Level (dBuV/m)</div><div><div>Date: 2024-01-09</div></div><div><table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 2402.00</td><td>96.04</td><td>-----</td><td>-----</td><td>93.19</td><td>30.72</td><td>5.37</td><td>33.24</td><td>400</td><td>247 PEAK</td></tr></tbody></table></div></div> | | Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | | Freq | Level | Line | (dB) | Level | Factor | Loss Factor | | | Remark | MHz | dBuV/m | dBuV/m | | dBuV | dB/m | dB | dB | cm | deg | 1 2402.00 | 96.04 | ----- | ----- | 93.19 | 30.72 | 5.37 | 33.24 | 400 | 247 PEAK |
| | | Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | (dB) | Level | Factor | Loss Factor | | | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 2386.18 | 48.95 | 74.00 | -25.05 | 46.13 | 30.72 | 5.36 | 33.26 | 400 | 247 PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | (dB) | Level | Factor | Loss Factor | | | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 2402.00 | 96.04 | ----- | ----- | 93.19 | 30.72 | 5.37 | 33.24 | 400 | 247 PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Avg | <div><div>Level (dBuV/m)</div><div><div>Date: 2024-01-09</div></div><div><table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 2386.08</td><td>43.59</td><td>54.00</td><td>-10.41</td><td>40.77</td><td>30.72</td><td>5.36</td><td>33.26</td><td>400</td><td>247 AVERAGE</td></tr></tbody></table></div></div> | | Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | | Freq | Level | Line | (dB) | Level | Factor | Loss Factor | | | Remark | MHz | dBuV/m | dBuV/m | | dBuV | dB/m | dB | dB | cm | deg | 1 2386.08 | 43.59 | 54.00 | -10.41 | 40.77 | 30.72 | 5.36 | 33.26 | 400 | 247 AVERAGE | <div><div>Level (dBuV/m)</div><div><div>Date: 2024-01-09</div></div><div><table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 2402.00</td><td>95.80</td><td>-----</td><td>-----</td><td>92.95</td><td>30.72</td><td>5.37</td><td>33.24</td><td>400</td><td>247 AVERAGE</td></tr></tbody></table></div></div> | | Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | | Freq | Level | Line | (dB) | Level | Factor | Loss Factor | | | Remark | MHz | dBuV/m | dBuV/m | | dBuV | dB/m | dB | dB | cm | deg | 1 2402.00 | 95.80 | ----- | ----- | 92.95 | 30.72 | 5.37 | 33.24 | 400 | 247 AVERAGE |
| | Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | (dB) | Level | Factor | Loss Factor | | | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 2386.08 | 43.59 | 54.00 | -10.41 | 40.77 | 30.72 | 5.36 | 33.26 | 400 | 247 AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | (dB) | Level | Factor | Loss Factor | | | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 2402.00 | 95.80 | ----- | ----- | 92.95 | 30.72 | 5.37 | 33.24 | 400 | 247 AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |





| Mode | 5 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|-----------|---|-------------|--------|--------|--------|-------------|--------|--------|-------------|------|--|------|-------|------|------|-------|--------|-------------|--|--|--------|-----|--------|--------|--|------|------|----|----|----|-----|-----------|-------|-------|--------|-------|-------|------|-------|-----|-------------|---|--|-------|--------|------|-----|-------|--------|------|------|--|------|-------|------|------|-------|--------|-------------|--|--|--------|-----|--------|--------|--|------|------|----|----|----|-----|-----------|-------|-------|-------|-------|-------|------|-------|-----|-------------|
| | Band Edge | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | 2400-2483.5_Bluetooth-LE_CH39_2480MHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ANT | SISO | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Pol. | Horizontal | Fundamental | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak | <div><p>Date: 2024-01-09</p><p>Level (dBuV/m)</p><p>Frequency (MHz)</p><p>PEAK_BE_74</p></div> <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 2495.90</td><td>48.55</td><td>74.00</td><td>-25.45</td><td>45.49</td><td>30.70</td><td>5.47</td><td>33.11</td><td>148</td><td>230 PEAK</td></tr></tbody></table> | | Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | | Freq | Level | Line | (dB) | Level | Factor | Loss Factor | | | Remark | MHz | dBuV/m | dBuV/m | | dBuV | dB/m | dB | dB | cm | deg | 1 2495.90 | 48.55 | 74.00 | -25.45 | 45.49 | 30.70 | 5.47 | 33.11 | 148 | 230 PEAK | <div><p>Date: 2024-01-09</p><p>Level (dBuV/m)</p><p>Frequency (MHz)</p><p>PEAK_74</p></div> <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 2480.00</td><td>96.24</td><td>-----</td><td>-----</td><td>93.21</td><td>30.70</td><td>5.46</td><td>33.13</td><td>148</td><td>230 PEAK</td></tr></tbody></table> | | Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | | Freq | Level | Line | (dB) | Level | Factor | Loss Factor | | | Remark | MHz | dBuV/m | dBuV/m | | dBuV | dB/m | dB | dB | cm | deg | 1 2480.00 | 96.24 | ----- | ----- | 93.21 | 30.70 | 5.46 | 33.13 | 148 | 230 PEAK |
| | | Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | (dB) | Level | Factor | Loss Factor | | | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 2495.90 | 48.55 | 74.00 | -25.45 | 45.49 | 30.70 | 5.47 | 33.11 | 148 | 230 PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | (dB) | Level | Factor | Loss Factor | | | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 2480.00 | 96.24 | ----- | ----- | 93.21 | 30.70 | 5.46 | 33.13 | 148 | 230 PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Avg | <div><p>Date: 2024-01-09</p><p>Level (dBuV/m)</p><p>Frequency (MHz)</p><p>AVG_BE_54</p></div> <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 2495.96</td><td>43.39</td><td>54.00</td><td>-10.61</td><td>40.33</td><td>30.70</td><td>5.47</td><td>33.11</td><td>148</td><td>230 AVERAGE</td></tr></tbody></table> | | Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | | Freq | Level | Line | (dB) | Level | Factor | Loss Factor | | | Remark | MHz | dBuV/m | dBuV/m | | dBuV | dB/m | dB | dB | cm | deg | 1 2495.96 | 43.39 | 54.00 | -10.61 | 40.33 | 30.70 | 5.47 | 33.11 | 148 | 230 AVERAGE | <div><p>Date: 2024-01-09</p><p>Level (dBuV/m)</p><p>Frequency (MHz)</p><p>AVG_54</p></div> <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 2480.00</td><td>95.88</td><td>-----</td><td>-----</td><td>92.85</td><td>30.70</td><td>5.46</td><td>33.13</td><td>148</td><td>230 AVERAGE</td></tr></tbody></table> | | Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | | Freq | Level | Line | (dB) | Level | Factor | Loss Factor | | | Remark | MHz | dBuV/m | dBuV/m | | dBuV | dB/m | dB | dB | cm | deg | 1 2480.00 | 95.88 | ----- | ----- | 92.85 | 30.70 | 5.46 | 33.13 | 148 | 230 AVERAGE |
| | Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | (dB) | Level | Factor | Loss Factor | | | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 2495.96 | 43.39 | 54.00 | -10.61 | 40.33 | 30.70 | 5.47 | 33.11 | 148 | 230 AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | (dB) | Level | Factor | Loss Factor | | | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 2480.00 | 95.88 | ----- | ----- | 92.85 | 30.70 | 5.46 | 33.13 | 148 | 230 AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |

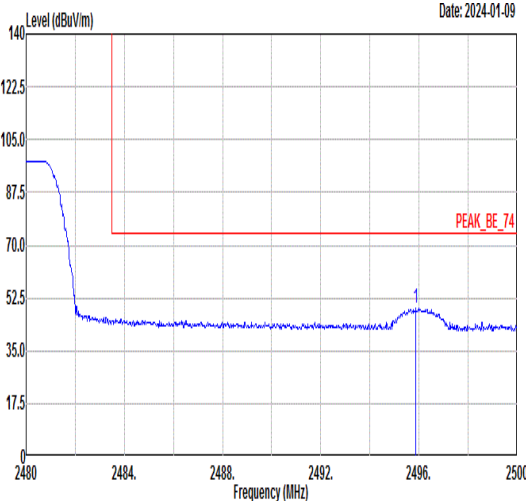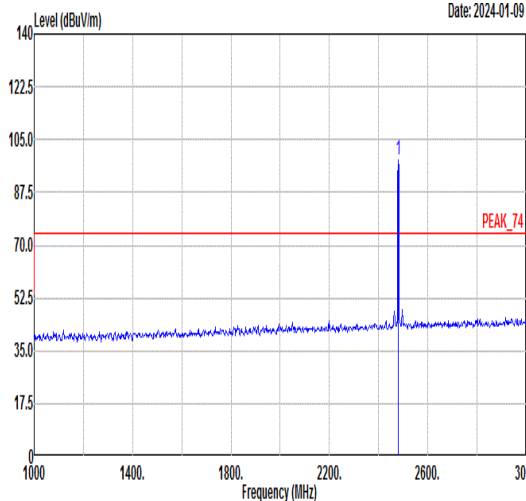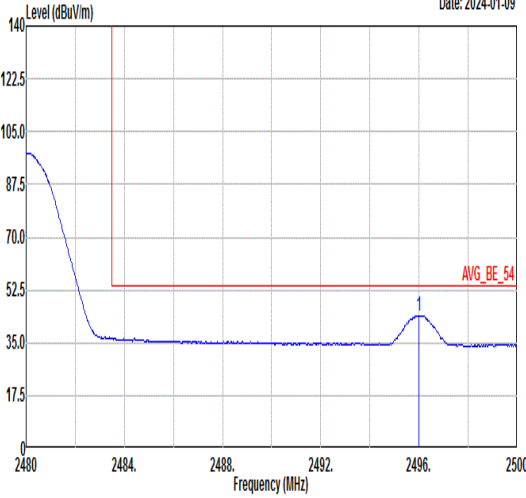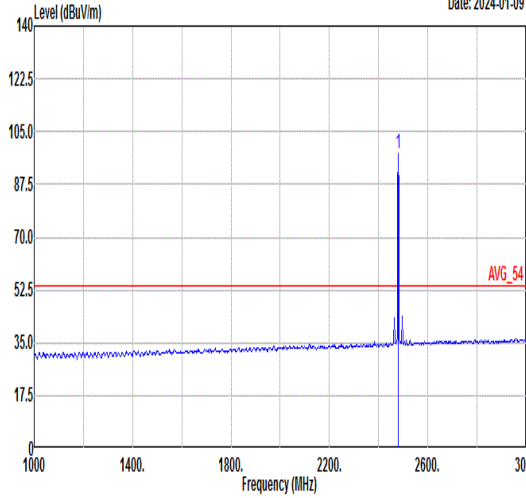

| Mode | 5 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|------|---|--------|-------|--------|--------|--------|--|-------|--------|------|---------|-------|--------|------|------|--|------|-------|------|------|-------|--------|------|--------|--|--------|-----|--------|--------|--|------|------|----|----|----|-----|---|---------|-------|-------|--------|-------|-------|------|-------|-----|-----|---------|---|--|--|--|--|--|--|-------|--------|------|-----|-------|--------|------|------|--|------|-------|------|------|-------|--------|------|--------|--|--------|-----|--------|--------|--|------|------|----|----|----|-----|---|---------|-------|-------|-------|-------|-------|------|-------|-----|-----|
| | Band Edge | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | 2400-2483.5_Bluetooth-LE_CH39_2480MHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ANT | SISO | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Pol. | Vertical | | | | | | Fundamental | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak |  | | | | | |  | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2495.88</td><td>49.02</td><td>74.00</td><td>-24.98</td><td>45.96</td><td>30.70</td><td>5.47</td><td>33.11</td><td>362</td><td>242</td><td>PEAK</td></tr></table> | | | | | | | Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | | Freq | Level | Line | (dB) | Level | Factor | Loss | Factor | | Remark | MHz | dBuV/m | dBuV/m | | dBuV | dB/m | dB | dB | cm | deg | 1 | 2495.88 | 49.02 | 74.00 | -24.98 | 45.96 | 30.70 | 5.47 | 33.11 | 362 | 242 | PEAK | <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2480.00</td><td>98.07</td><td>-----</td><td>-----</td><td>95.04</td><td>30.70</td><td>5.46</td><td>33.13</td><td>362</td><td>242</td><td>PEAK</td></tr></table> | | | | | | | Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | | Freq | Level | Line | (dB) | Level | Factor | Loss | Factor | | Remark | MHz | dBuV/m | dBuV/m | | dBuV | dB/m | dB | dB | cm | deg | 1 | 2480.00 | 98.07 | ----- | ----- | 95.04 | 30.70 | 5.46 | 33.13 | 362 | 242 |
| | Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | (dB) | Level | Factor | Loss | Factor | | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 2495.88 | 49.02 | 74.00 | -24.98 | 45.96 | 30.70 | 5.47 | 33.11 | 362 | 242 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | (dB) | Level | Factor | Loss | Factor | | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 2480.00 | 98.07 | ----- | ----- | 95.04 | 30.70 | 5.46 | 33.13 | 362 | 242 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Avg |  | | | | | |  | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2496.00</td><td>44.04</td><td>54.00</td><td>-9.96</td><td>40.98</td><td>30.70</td><td>5.47</td><td>33.11</td><td>362</td><td>242</td><td>AVERAGE</td></tr></table> | | | | | | | Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | | Freq | Level | Line | (dB) | Level | Factor | Loss | Factor | | Remark | MHz | dBuV/m | dBuV/m | | dBuV | dB/m | dB | dB | cm | deg | 1 | 2496.00 | 44.04 | 54.00 | -9.96 | 40.98 | 30.70 | 5.47 | 33.11 | 362 | 242 | AVERAGE | <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2480.00</td><td>97.73</td><td>-----</td><td>-----</td><td>94.70</td><td>30.70</td><td>5.46</td><td>33.13</td><td>362</td><td>242</td><td>AVERAGE</td></tr></table> | | | | | | | Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | | Freq | Level | Line | (dB) | Level | Factor | Loss | Factor | | Remark | MHz | dBuV/m | dBuV/m | | dBuV | dB/m | dB | dB | cm | deg | 1 | 2480.00 | 97.73 | ----- | ----- | 94.70 | 30.70 | 5.46 | 33.13 | 362 | 242 |
| | Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | (dB) | Level | Factor | Loss | Factor | | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 2496.00 | 44.04 | 54.00 | -9.96 | 40.98 | 30.70 | 5.47 | 33.11 | 362 | 242 | AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | (dB) | Level | Factor | Loss | Factor | | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 2480.00 | 97.73 | ----- | ----- | 94.70 | 30.70 | 5.46 | 33.13 | 362 | 242 | AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |

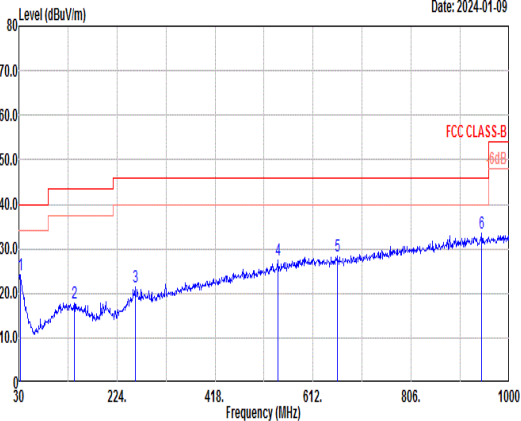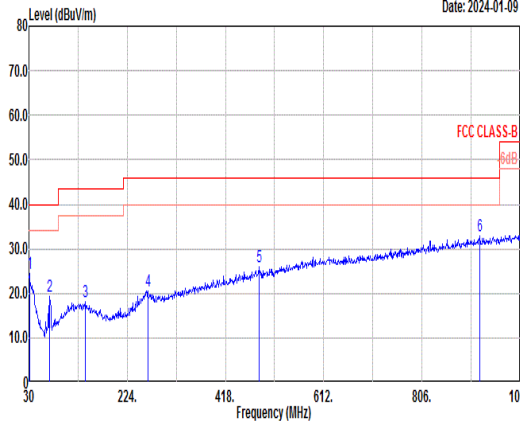


| Mode | 6 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|-------------|--|--------|--------|--------|--------|--------|---|--------|--------|-----|-------|--------|------|------|--|------|-------|------|--------|-------|--------|------|--------|--------|-----|--------|--------|----|------|------|----|----|----|-----|---|-------|-------|-------|--------|-------|-------|------|-------|-----|-----|------|---|--------|-------|-------|--------|-------|-------|------|-------|-----|-----|------|---|--------|-------|-------|--------|-------|-------|------|-------|-----|-----|------|---|--------|-------|-------|--------|-------|-------|------|-------|-----|-----|------|---|--------|-------|-------|--------|-------|-------|------|-------|-----|-----|------|---|--------|-------|-------|--------|-------|-------|------|-------|-----|-----|------|---|--|--|--|--|--|--|-------|------|-----|-------|--------|------|------|--|------|-------|------|--------|-------|--------|------|--------|--------|-----|--------|--------|----|------|------|----|----|----|-----|---|-------|-------|-------|--------|-------|-------|------|-------|-----|-----|------|---|-------|-------|-------|--------|-------|-------|------|-------|-----|-----|------|---|--------|-------|-------|--------|-------|-------|------|-------|-----|-----|------|---|--------|-------|-------|--------|-------|-------|------|-------|-----|-----|------|---|--------|-------|-------|--------|-------|-------|------|-------|-----|-----|------|---|--------|-------|-------|--------|-------|-------|------|-------|-----|-----|------|
| | LF | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | 2400-2483.5_Bluetooth-LE-LF_CH00_2402MHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ANT | SISO | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Pol. | Horizontal | | | | | | Vertical | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| QP/ Peak |  | | | | | |  | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>33.88</td><td>24.28</td><td>40.00</td><td>-15.72</td><td>32.30</td><td>23.10</td><td>0.56</td><td>31.68</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>139.61</td><td>17.81</td><td>43.50</td><td>-25.69</td><td>30.84</td><td>17.50</td><td>1.21</td><td>31.74</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>3</td><td>259.89</td><td>21.32</td><td>46.00</td><td>-24.68</td><td>31.62</td><td>19.60</td><td>1.68</td><td>31.58</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>4</td><td>543.13</td><td>27.40</td><td>46.00</td><td>-18.60</td><td>31.65</td><td>24.54</td><td>2.44</td><td>31.23</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>5</td><td>659.53</td><td>28.47</td><td>46.00</td><td>-17.53</td><td>30.60</td><td>26.40</td><td>2.67</td><td>31.20</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>6</td><td>945.68</td><td>33.55</td><td>46.00</td><td>-12.45</td><td>30.50</td><td>30.64</td><td>3.22</td><td>30.81</td><td>---</td><td>---</td><td>Peak</td></tr></table> | | | | | | | Limit | Read | Ant | Cable | Preamp | APos | TPos | | Freq | Level | Line | Margin | Level | Factor | Loss | Factor | Remark | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 | 33.88 | 24.28 | 40.00 | -15.72 | 32.30 | 23.10 | 0.56 | 31.68 | --- | --- | Peak | 2 | 139.61 | 17.81 | 43.50 | -25.69 | 30.84 | 17.50 | 1.21 | 31.74 | --- | --- | Peak | 3 | 259.89 | 21.32 | 46.00 | -24.68 | 31.62 | 19.60 | 1.68 | 31.58 | --- | --- | Peak | 4 | 543.13 | 27.40 | 46.00 | -18.60 | 31.65 | 24.54 | 2.44 | 31.23 | --- | --- | Peak | 5 | 659.53 | 28.47 | 46.00 | -17.53 | 30.60 | 26.40 | 2.67 | 31.20 | --- | --- | Peak | 6 | 945.68 | 33.55 | 46.00 | -12.45 | 30.50 | 30.64 | 3.22 | 30.81 | --- | --- | Peak | <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>30.97</td><td>24.33</td><td>40.00</td><td>-15.67</td><td>30.71</td><td>24.70</td><td>0.54</td><td>31.62</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>70.74</td><td>19.18</td><td>40.00</td><td>-20.82</td><td>37.64</td><td>12.50</td><td>0.84</td><td>31.80</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>3</td><td>140.58</td><td>18.17</td><td>43.50</td><td>-25.33</td><td>31.20</td><td>17.50</td><td>1.21</td><td>31.74</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>4</td><td>264.74</td><td>20.55</td><td>46.00</td><td>-25.45</td><td>31.53</td><td>18.90</td><td>1.69</td><td>31.57</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>5</td><td>483.96</td><td>26.04</td><td>46.00</td><td>-19.96</td><td>31.50</td><td>23.68</td><td>2.29</td><td>31.43</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>6</td><td>920.46</td><td>32.87</td><td>46.00</td><td>-13.13</td><td>31.04</td><td>29.50</td><td>3.19</td><td>30.86</td><td>---</td><td>---</td><td>Peak</td></tr></table> | | | | | | | Limit | Read | Ant | Cable | Preamp | APos | TPos | | Freq | Level | Line | Margin | Level | Factor | Loss | Factor | Remark | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 | 30.97 | 24.33 | 40.00 | -15.67 | 30.71 | 24.70 | 0.54 | 31.62 | --- | --- | Peak | 2 | 70.74 | 19.18 | 40.00 | -20.82 | 37.64 | 12.50 | 0.84 | 31.80 | --- | --- | Peak | 3 | 140.58 | 18.17 | 43.50 | -25.33 | 31.20 | 17.50 | 1.21 | 31.74 | --- | --- | Peak | 4 | 264.74 | 20.55 | 46.00 | -25.45 | 31.53 | 18.90 | 1.69 | 31.57 | --- | --- | Peak | 5 | 483.96 | 26.04 | 46.00 | -19.96 | 31.50 | 23.68 | 2.29 | 31.43 | --- | --- | Peak | 6 | 920.46 | 32.87 | 46.00 | -13.13 | 31.04 | 29.50 | 3.19 | 30.86 | --- | --- | Peak |
| | | Limit | Read | Ant | Cable | Preamp | APos | TPos | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | Freq | Level | Line | Margin | Level | Factor | Loss | Factor | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | 1 | 33.88 | 24.28 | 40.00 | -15.72 | 32.30 | 23.10 | 0.56 | 31.68 | --- | --- | Peak | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | 2 | 139.61 | 17.81 | 43.50 | -25.69 | 30.84 | 17.50 | 1.21 | 31.74 | --- | --- | Peak | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | 3 | 259.89 | 21.32 | 46.00 | -24.68 | 31.62 | 19.60 | 1.68 | 31.58 | --- | --- | Peak | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | 4 | 543.13 | 27.40 | 46.00 | -18.60 | 31.65 | 24.54 | 2.44 | 31.23 | --- | --- | Peak | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | 5 | 659.53 | 28.47 | 46.00 | -17.53 | 30.60 | 26.40 | 2.67 | 31.20 | --- | --- | Peak | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 6 | 945.68 | 33.55 | 46.00 | -12.45 | 30.50 | 30.64 | 3.22 | 30.81 | --- | --- | Peak | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | Limit | Read | Ant | Cable | Preamp | APos | TPos | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | Margin | Level | Factor | Loss | Factor | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 30.97 | 24.33 | 40.00 | -15.67 | 30.71 | 24.70 | 0.54 | 31.62 | --- | --- | Peak | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2 | 70.74 | 19.18 | 40.00 | -20.82 | 37.64 | 12.50 | 0.84 | 31.80 | --- | --- | Peak | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 3 | 140.58 | 18.17 | 43.50 | -25.33 | 31.20 | 17.50 | 1.21 | 31.74 | --- | --- | Peak | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 4 | 264.74 | 20.55 | 46.00 | -25.45 | 31.53 | 18.90 | 1.69 | 31.57 | --- | --- | Peak | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 5 | 483.96 | 26.04 | 46.00 | -19.96 | 31.50 | 23.68 | 2.29 | 31.43 | --- | --- | Peak | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 6 | 920.46 | 32.87 | 46.00 | -13.13 | 31.04 | 29.50 | 3.19 | 30.86 | --- | --- | Peak | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |

Appendix D. Duty Cycle Plots

| Band | Duty Cycle(%) | T(ms) | 1/T(kHz) | VBW Setting |
|--------------------|---------------|-------|----------|-------------|
| Bluetooth LE 1Mbps | 66.20 | 0.414 | 2.413 | 3KHz |
| Bluetooth LE 2Mbps | 36.57 | 0.229 | 4.367 | 10KHZ |

Bluetooth LE 1Mbps

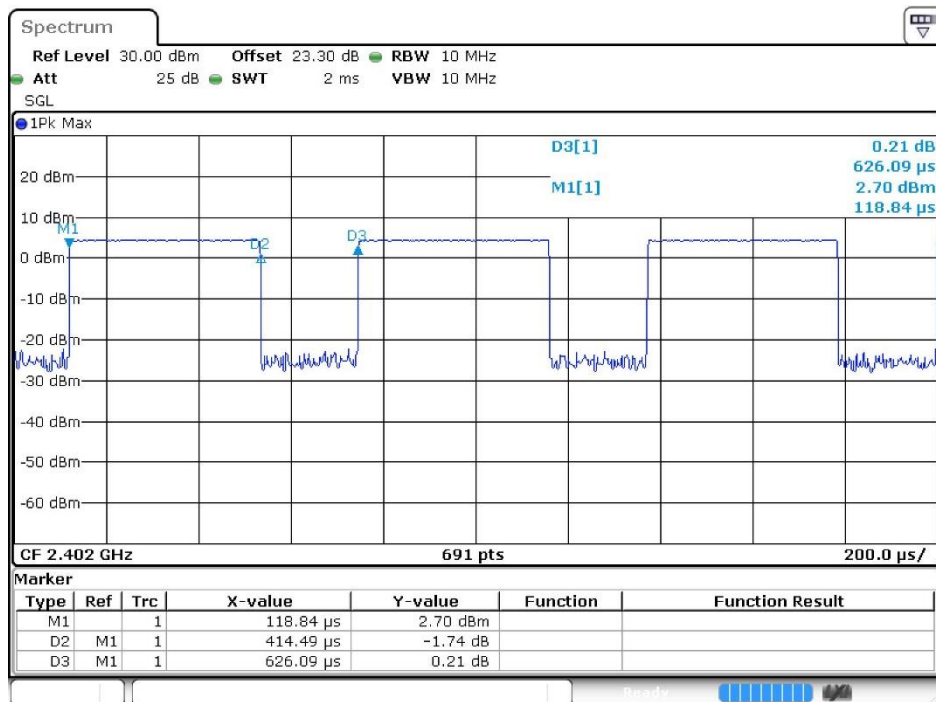



Bluetooth LE 2Mbps

