


APPLICATION FOR CERTIFICATION
On Behalf of
ViewSonic Corporation
21" Color CRT Display Monitor with USB Pedestal

Model : VCDTS21492-4*

FCC ID : GSS21013



Prepared for : ViewSonic Corporation
381 Brea Canyon Rd., Walnut,
CA 91789, U.S.A.

Prepared By : Taiwan Tokin EMC Eng. Corp.
No. 53-11, Tin-Fu Tsun, Lin-Kou,
Taipei Hsien, Taiwan, R.O.C.

Tel : (02) 2609-9301, 2609-2311
Fax : (02) 2609-9303

File Number : ATM-G99032
Report Number : TTEMC-F99026
Date of Test : Feb. 03 ~ Mar. 01, 1999
Date of Report : Mar. 06, 1999

TABLE OF CONTENTS

Description	Page
Test Report Certification	
1.GENERAL INFORMATION	4
1.1. Description of Device (EUT)	4
1.2. Tested Supporting System Details	5
1.3. Description of Test Facility	8
2.POWERLINE CONDUCTED TEST	9
2.1. Test Equipment	9
2.2. Block Diagram of Test Setup	9
2.3. Powerline Conducted Emission Limit (CLASS B)	9
2.4. EUT's Configuration during Compliance Measurement	10
2.5. Operating Condition of EUT	11
2.6. Test Procedure	12
2.7. Line Conducted RF Voltage Measurement Results	12
3.RADIATED EMISSION TEST	21
3.1. Test Equipment	21
3.2. Block Diagram of Test Setup	21
3.3. Radiation Limit (CLASS B)	22
3.4. EUT's Configuration during Compliance Measurement	22
3.5. Operating Condition of EUT	22
3.6. Test Procedure	23
3.7. Radiated Emission Measurement Results	24
4.DEVIATIONS TO TEST SPECIFICATIONS	26
5.PHOTOGRAPHS	27
5.1. Photos of Powerline Conducted Measurement	27
5.2. Photos of Radiated Measurement at Open Field Test Site	28
5.3. Photos of Radiated Measurement at Anechoic Chamber	30
APPENDIX I	32
APPENDIX II	33

TEST REPORT CERTIFICATION

Applicant : ViewSonic Corporation
 Manufacturer : ViewSonic Corporation
 FCC ID : GSS21013
 EUT Description : 21" Color CRT Display Monitor with USB Pedestal
 (A) MODEL NO. : VCDTS21492-4*
 (B) SERIAL NO. : FX9110003
 (C) POWER SUPPLY : AC 120V/60Hz

Measurement Procedure Used:


FCC RULES AND REGULATIONS PART 15 SUBPART B CLASS B OCTOBER 1997
AND FCC / ANSI C63.4-1992


The device described above was tested by TAIWAN TOKIN EMC ENG. CORP. to determine the maximum emission levels emanating from the device. The maximum emission levels were compared to the FCC Part 15B Class B limits both radiated and conducted emissions.


The measurement results were contained in this test report and TAIWAN TOKIN EMC ENG. CORP. was assumed full responsibility for the accuracy and completeness of these measurements. Also, this report showed that the EUT to be technically compliance with the FCC official limits.

This report applied to above tested sample only. This report shall not be reproduced in part without written approval of Taiwan Tokin EMC Eng. corp.

Date of Test : Feb. 03 ~ Mar. 01, 1999

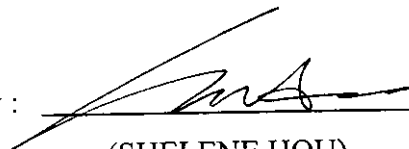Prepared by :  2.10.99
(SHELENE HOU)

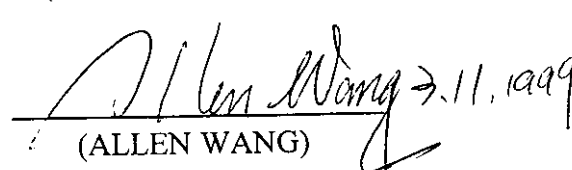Test Engineer :  2.11.1999
(ALLEN WANG)

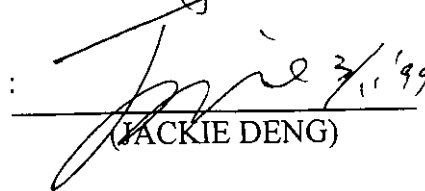Approve & Authorized Signer :  3.1.99
(JACKIE DENG)

1. GENERAL INFORMATION

1.1. Description of Device (EUT)

Description	:	21" Color CRT Display Monitor with USB Pedestal
Model Number	:	VCDTS21492-4*
		“*” is Alphabet suffix A to Z or 1 to 9.
Serial Number	:	FX9110003
Applicant	:	ViewSonic Corporation
		381 Brea Canyon Rd., Walnut, CA 91789, U.S.A.
Manufacturer	:	ViewSonic Corporation
		381 Brea Canyon Rd., Walnut, CA 91789, U.S.A.
CRT	:	Panasonic, M/N M51LRF280X
Data Cable # 1 (D-Sub)	:	Shielded, Detachable, 1.5m Bonded two ferrite cores
Data Cable # 2 (D-Sub)	:	Shielded, Detachable, 1.8m Bonded two ferrite cores
Data Cable # 3 (D-Sub)	:	Shielded, Detachable, 3m Bonded two ferrite cores
Data Cable # 4 (BNC)	:	Shielded, Detachable, 1.8m
USB Pedestal	:	Matsushita Electric Industrial Co., Ltd. M/N TY-LD68AZ Cable : Non-Shielded, Undetachable, 0.7m Bonded a ferrite core (USB to EUT)
USB Data Cable	:	Shielded, Detachable, 1.8m (USB to PC)
Monitor Control (DIN)	:	Shielded, Detachable, 0.65m (USB to EUT)

Power Cord	:	Non-Shielded, Detachable, 1.8m
Date of Receipt of Sample	:	Feb. 01, 1999
Date of Test	:	Feb. 03 ~ Mar. 01 , 1999

1.2. Tested Supporting System Details

1.2.1. PERSONAL COMPUTER

Model Number	:	D4594B
Serial Number	:	SG74350121
FCC ID	:	By DoC
Manufacturer	:	Hewlett Packard
VGA Card	:	Matrox Graphics, M/N 79075010153 (MGA-MIL/2/DIP) S/N CAJ92909 FCC ID ID7057600
Power Cord	:	Non-Shielded, Detachable, 1.8m

1.2.2. KEYBOARD

Model Number	:	RT6656TWJP
Serial Number	:	31470782
FCC ID	:	AQ6-MTN4C15
Manufacturer	:	Hewlett Packard
Data Cable	:	Shielded, Undetachable, 1.3m

1.2.3. PRINTER

Model Number	:	2225C
Serial Number	:	2526S40437
FCC ID	:	BS46XU2225C
Manufacturer	:	Hewlett Packard
Power Cord	:	Non-Shielded, Undetachable, 1.8m
Data Cable	:	Shielded, Detachable, 1.2m

1.2.4. MODEM # 1

Model Number	:	DM-1414
Serial Number	:	980034392
FCC ID	:	IFAXDM1414
Manufacturer	:	Aceex
Data Cable	:	Shielded, Detachable, 1.2m
Power Adapter	:	Amigo, Model AM-91000A Non-Shielded, Undetachable, 1.8m

1.2.5. MODEM # 2

Model Number	:	DM-1414
Serial Number	:	980034391
FCC ID	:	IFAXDM1414
Manufacturer	:	Aceex
Data Cable	:	Shielded, Detachable, 1.2m
Power Adapter	:	Amigo, Model AM-91000A
		Non-Shielded, Undetachable, 1.8m

1.2.6. PS2 MOUSE

Model Number	:	M-S34
Serial Number	:	LZ64952349
FCC ID	:	DZL211029
Manufacturer	:	Hewlett Packard
Data Cable	:	Shielded, Undetachable, 2.0m

1.2.7. USB MOUSE # 1 (to EUT)

Model Number	:	ECM-S3906
Serial Number	:	0000031
FCC ID	:	EW4ECM-S3906
Manufacturer	:	Mitsumi Electronics Corp.
Data Cable	:	Shielded, Undetachable, 1.6m

1.2.8. USB MOUSE # 2 (to EUT)

Model Number	:	ECM-S3906
Serial Number	:	0000036
FCC ID	:	EW4ECM-S3906
Manufacturer	:	Mitsumi Electronics Corp.
Data Cable	:	Shielded, Undetachable, 1.6m

1.2.9. USB MOUSE # 3 (to EUT)

Model Number	:	ECM-S3906
Serial Number	:	0000052
FCC ID	:	EW4ECM-S3906
Manufacturer	:	Mitsumi Electronics Corp.
Data Cable	:	Shielded, Undetachable, 1.6m

1.2.10. USB MOUSE # 4 (to EUT)

Model Number	:	ECM-S3906
Serial Number	:	0000065
FCC ID	:	EW4ECM-S3906
Manufacturer	:	Mitsumi Electronics Corp.
Data Cable	:	Shielded, Undetachable, 1.6m

1.2.11. USB MOUSE # 5 (to PC)

Model Number	:	M-UB48
Serial Number	:	LZB81900209
FCC ID	:	DZL211137
Manufacturer	:	Logitech
Data Cable	:	Shielded, Undetachable, 1.8m

1.2.12. JOYSTICK

Model Number	:	1FD05015
Serial Number	:	N/A
Manufacturer	:	Rambo
Data Cable	:	Non-Shielded, Undetachable, 1.6m

1.2.13. SPEAKER # 1

Model Number	:	J-008
Serial Number	:	97-C-009783-T
Manufacturer	:	(J-S) JAZZ HIPSTER
Data Cable	:	Non-Shielded, Undetachable, 1m

1.2.14. SPEAKER # 2

Model Number	:	J-008
Serial Number	:	97-C-008926-T
Manufacturer	:	(J-S) JAZZ HIPSTER
Data Cable	:	Non-Shielded, Undetachable, 1m

1.2.15. WALKMAN

Model Number	:	RQ-P35LT-K
Serial Number	:	HA08465
Manufacturer	:	Panasonic
Data Cable	:	Non-Shielded, Detachable, 1.8m

1.2.16. MICROPHONE

Model Number	:	HD-303
Serial Number	:	N/A
Manufacturer	:	Multimedia Microphone System
Data Cable	:	Non-Shielded, Undetachable, 2.2m

1.2.17. EARPHONE # 1

Model Number	:	N/A
Serial Number	:	N/A
Manufacturer	:	Panasonic
Data Cable	:	Non-Shielded, Undetachable, 1.1m

1.2.18. EARPHONE # 2

Model Number	:	N/A
Serial Number	:	N/A
Manufacturer	:	Panasonic
Data Cable	:	Non-Shielded, Undetachable, 1.1m

1.3. Description of Test Facility

Site Description (No. 2 Open Site)	:	Jul. 15, 1996 Re-file on Federal Communication Commission FCC Engineering Laboratory 7435 Oakland Mills Road Columbia, MD 21046, U.S.A.
Name of Firm	:	Taiwan Tokin EMC Eng. Corp.
Site Location	:	No. 53-11, Tin-Fu Tsun, Lin-Kou, Taipei Hsien, Taiwan, R.O.C.
NVLAP Lab. Code	:	200077-0


2. POWERLINE CONDUCTED TEST

2.1. Test Equipment

The following test equipments were used during the power line conducted tests :

Item	Type	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	Test Receiver	Rohde & Schwarz	ESH3	880647/035	Jun.24, 98'	1 Year
2.	L.I.S.N. # 1	Kyoritsu	KNW-407	8-855-9	Apr.14, 98'	1 Year
3.	L.I.S.N. # 2	Kyoritsu	KNW-407	8-881-13	Apr.14, 98'	1 Year

2.2. Block Diagram of Test Setup

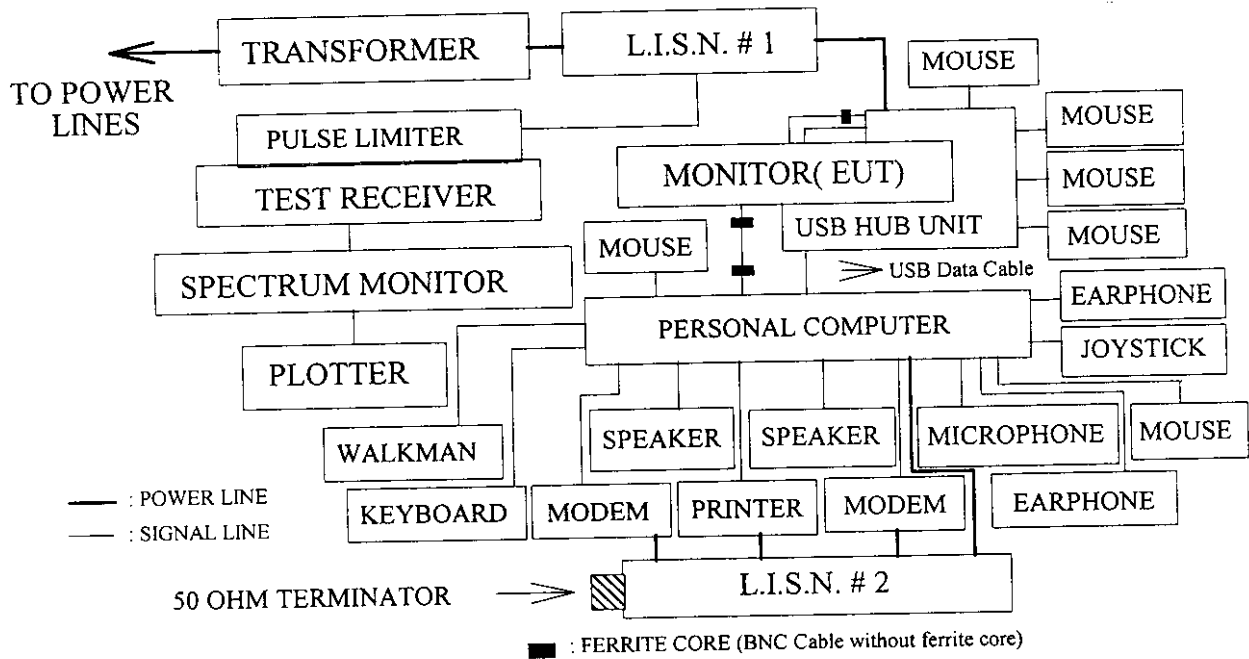

2.3. Powerline Conducted Emission Limit (CLASS B)

Frequency	Maximum RF Line Voltage	
	uV	dBuV
0.45MHz ~ 30Mhz	250	48

REMARKS : RF LINE VOLTAGE (dBuV) = 20 log RF LINE VOLTAGE (uV)

2.4. EUT's Configuration during Compliance Measurement

The following equipments were installed on RF LINE VOLTAGE measurement to meet the Commission requirement and operating in a manner which tend to maximize its emission characteristics in a normal application.

2.4.1. 21" Color CRT Display Monitor with USB Pedestal (EUT)

Model Number	: VCDTS21492-4*
Serial Number	: FX9110003
Manufacturer	: ViewSonic Corporation
CRT	: Panasonic, M/N M51LRF280X
Data Cable # 1 (D-Sub)	: Shielded, Detachable, 1.5m Bonded two ferrite cores
Data Cable # 2 (D-Sub)	: Shielded, Detachable, 1.8m Bonded two ferrite cores
Data Cable # 3 (D-Sub)	: Shielded, Detachable, 3m Bonded two ferrite cores
Data Cable # 4 (BNC)	: Shielded, Detachable, 1.8m
USB Pedestal	: Matsushita Electric Industrial Co., Ltd. M/N TY-LD68AZ Cable : Non-Shielded, Undetachable, 0.7m Bonded a ferrite core (USB to EUT)
USB Data Cable	: Shielded, Detachable, 1.8m (USB to PC)
Monitor Control (DIN)	: Shielded, Detachable, 0.65m (USB to EUT)
Power Cord	: Non-Shielded, Detachable, 1.8m

2.4.2. Supporting System : As in Section 1.2.

2.5. Operating Condition of EUT

2.5.1. Setup the EUT and simulator as shown on 2.2.

2.5.2. Turn on the power of all equipments.

2.5.3. Personal Computer read data from disk.

2.5.4. Personal Computer sent "H" character to the monitor (EUT) and the screen displayed and full with "H" pattern.

2.5.5. The other peripheral devices were driven and operated in turn during all testing.

2.5.6. Repeat the above procedures from 2.5.3 to 2.5.5.

2.6. Test Procedure

The EUT was connected to the power mains through a line impedance stabilization network (L.I.S.N.# 1). The other peripheral devices power cord connected to the power mains through a line impedance stabilization network (L.I.S.N. # 2). This provided a 50 ohm coupling impedance for the measuring equipment. (Please refer to the block diagram of the test setup and photographs.)

Both sides of A.C. line were checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipments and all of the interface cables were changed according to FCC ANSI C63.4-1992 during conducted measurement.

The bandwidth of the R&S Test Receiver ESH3 was set at 10kHz.

The frequency range from 450KHz to 30MHz was checked.

Three kinds of horizontal working frequency with four kinds of data cables were investigated during pre-scanning and reported the three worst test modes (with 3m D-Sub Data Cable) in section 2.7., the others test data were attached within Appendix I. The detail of test modes are as follows :

Three kinds of display frequency :

	640*480 (Hf: 31.5kHz)	1600*1200 (Hf: 115.0kHz)	1800*1440 (Hf: 105.0kHz)
(a) Dot Clock Frequency	25.175 MHz	239.35 MHz	250 MHz
(b) Vertical Frequency	50 Hz	180 Hz	70 Hz
(c) Horizontal Frequency	30 kHz	115 kHz	105 kHz

Four kinds of data cable :

- (1) 1.5m D-Sub data cable with two ferrite cores
- (2) 1.8m D-Sub data cable with two ferrite cores
- (3) 3.0m D-Sub data cable with two ferrite cores
- (4) 1.8m BNC data cable

2.7. Line Conducted RF Voltage Measurement Results

The frequency range 450KHz to 30 MHz was investigated.

All emissions not reported below were too low against the prescribed limits.


Date of Test : Feb. 10, 1999 Temperature : 20°C

EUT : 21" Color CRT Display Monitor with USB Pedestal Humidity : 45%


Test Mode : 31.5kHz/640*480 with 3m D-Sub Data Cable

Frequency (MHz)	Factor dB	Measurement (dBuV)		Reading (dBuV)		Limits (dBuV)	Margin (dBuV)	
		VA	VB	VA	VB		VA	VB
0.5104	0.5	37.8	31.5	38.3	32.0	48.0	9.7	16.0
1.0135	0.5	30.1	30.2	30.6	30.7	48.0	17.4	17.3
1.3161	0.5	30.2	30.8	30.7	31.3	48.0	17.3	16.7
2.0313	0.5	31.6	33.1	32.1	33.6	48.0	15.9	14.4
5.0699	0.8	30.8	*	31.6	*	48.0	16.4	*
5.1654	0.8	*	31.6	*	32.4	48.0	*	15.6
21.0426	1.1	36.1	38.1	37.2	39.2	48.0	10.8	8.8

- Remark :
1. All reading were Quasi-Peak values.
 2. Factor = Insertion Loss + Cable Loss
 3. The worst emission was detected at 21.0426MHz with corrected signal level of 39.2dBuV (limit was 48dBuV) when the VB side of the EUT was connected to L.I.S.N.

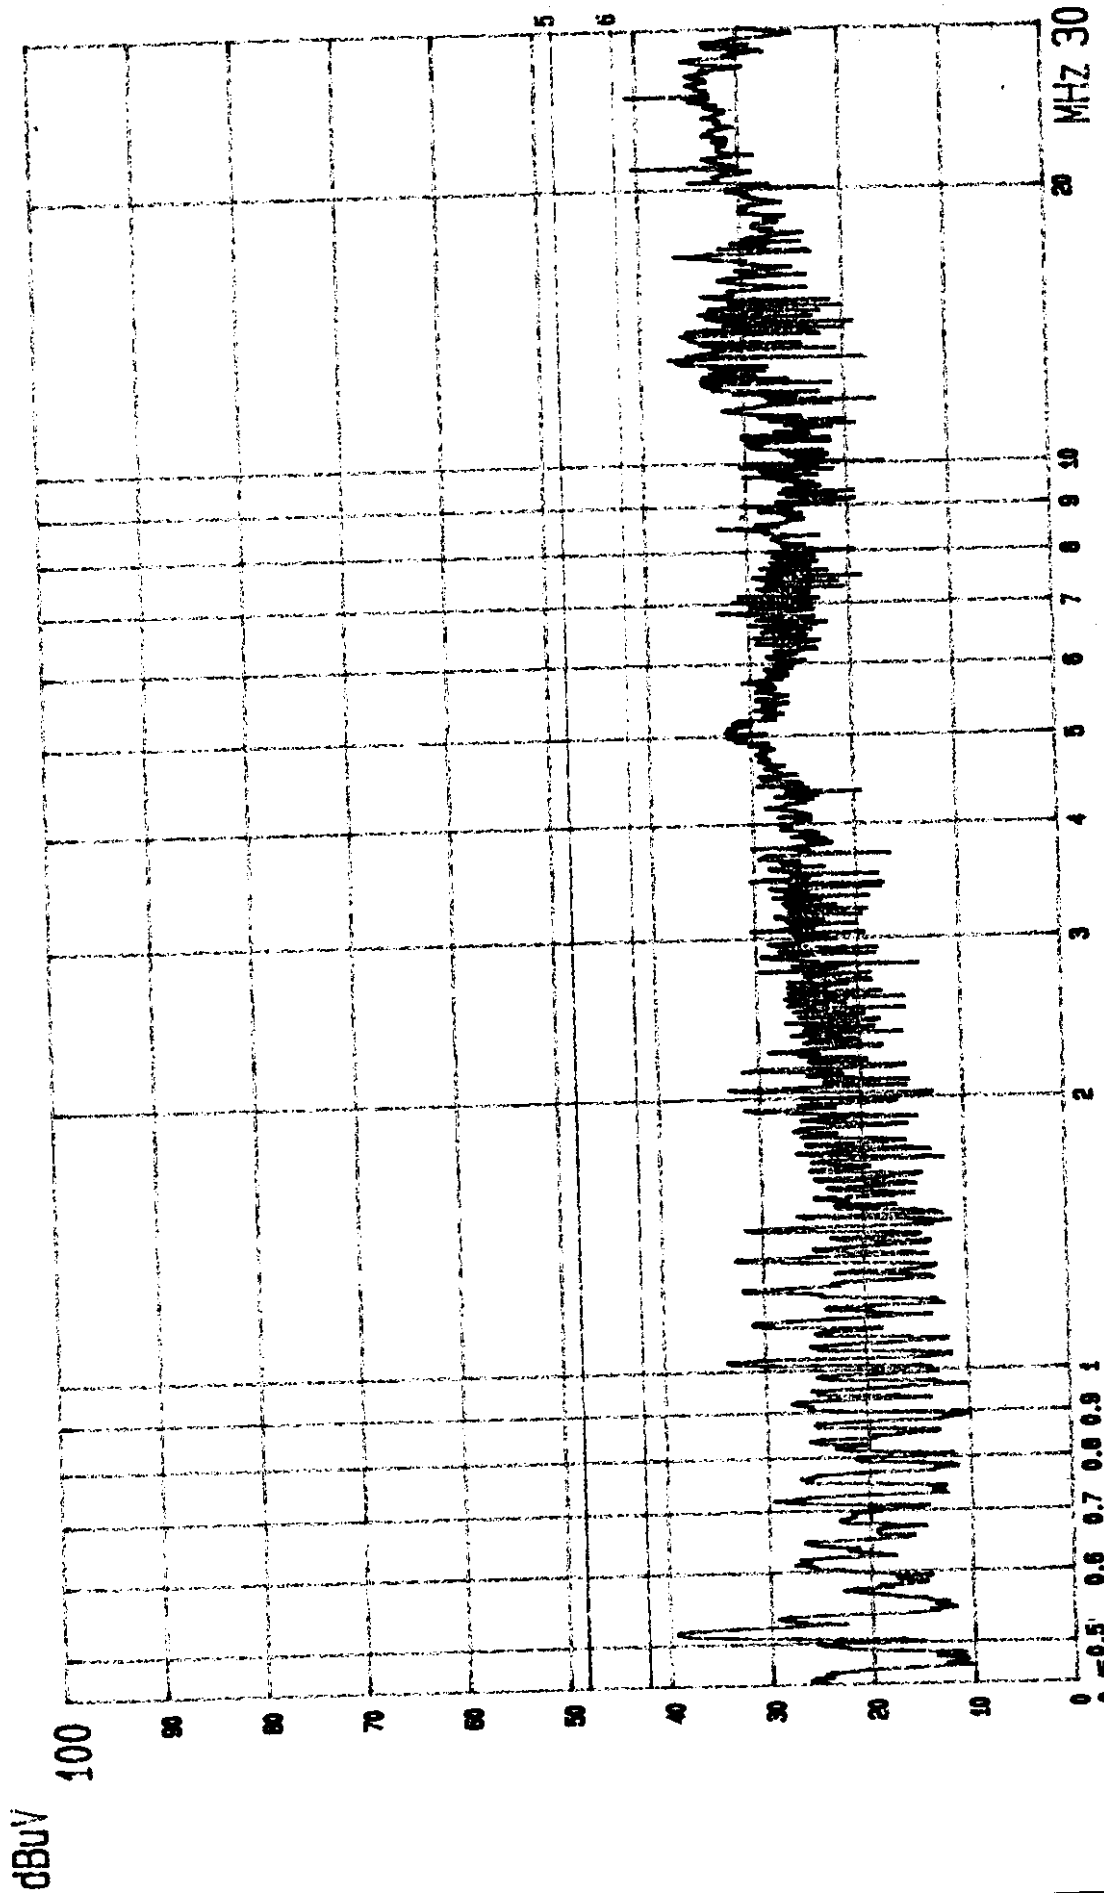

Date 10.FEB '99 Time 21:09:35
 EUT: MONITOR
 M/N: VCDTS21492-4*
 VIEW SONIC
 LINE: VA.
 MENO: (640X480; 31.5KHz) 3.0M D-SUB
 (PEAK VALUE) TTEMC.
 PAGE: 002.

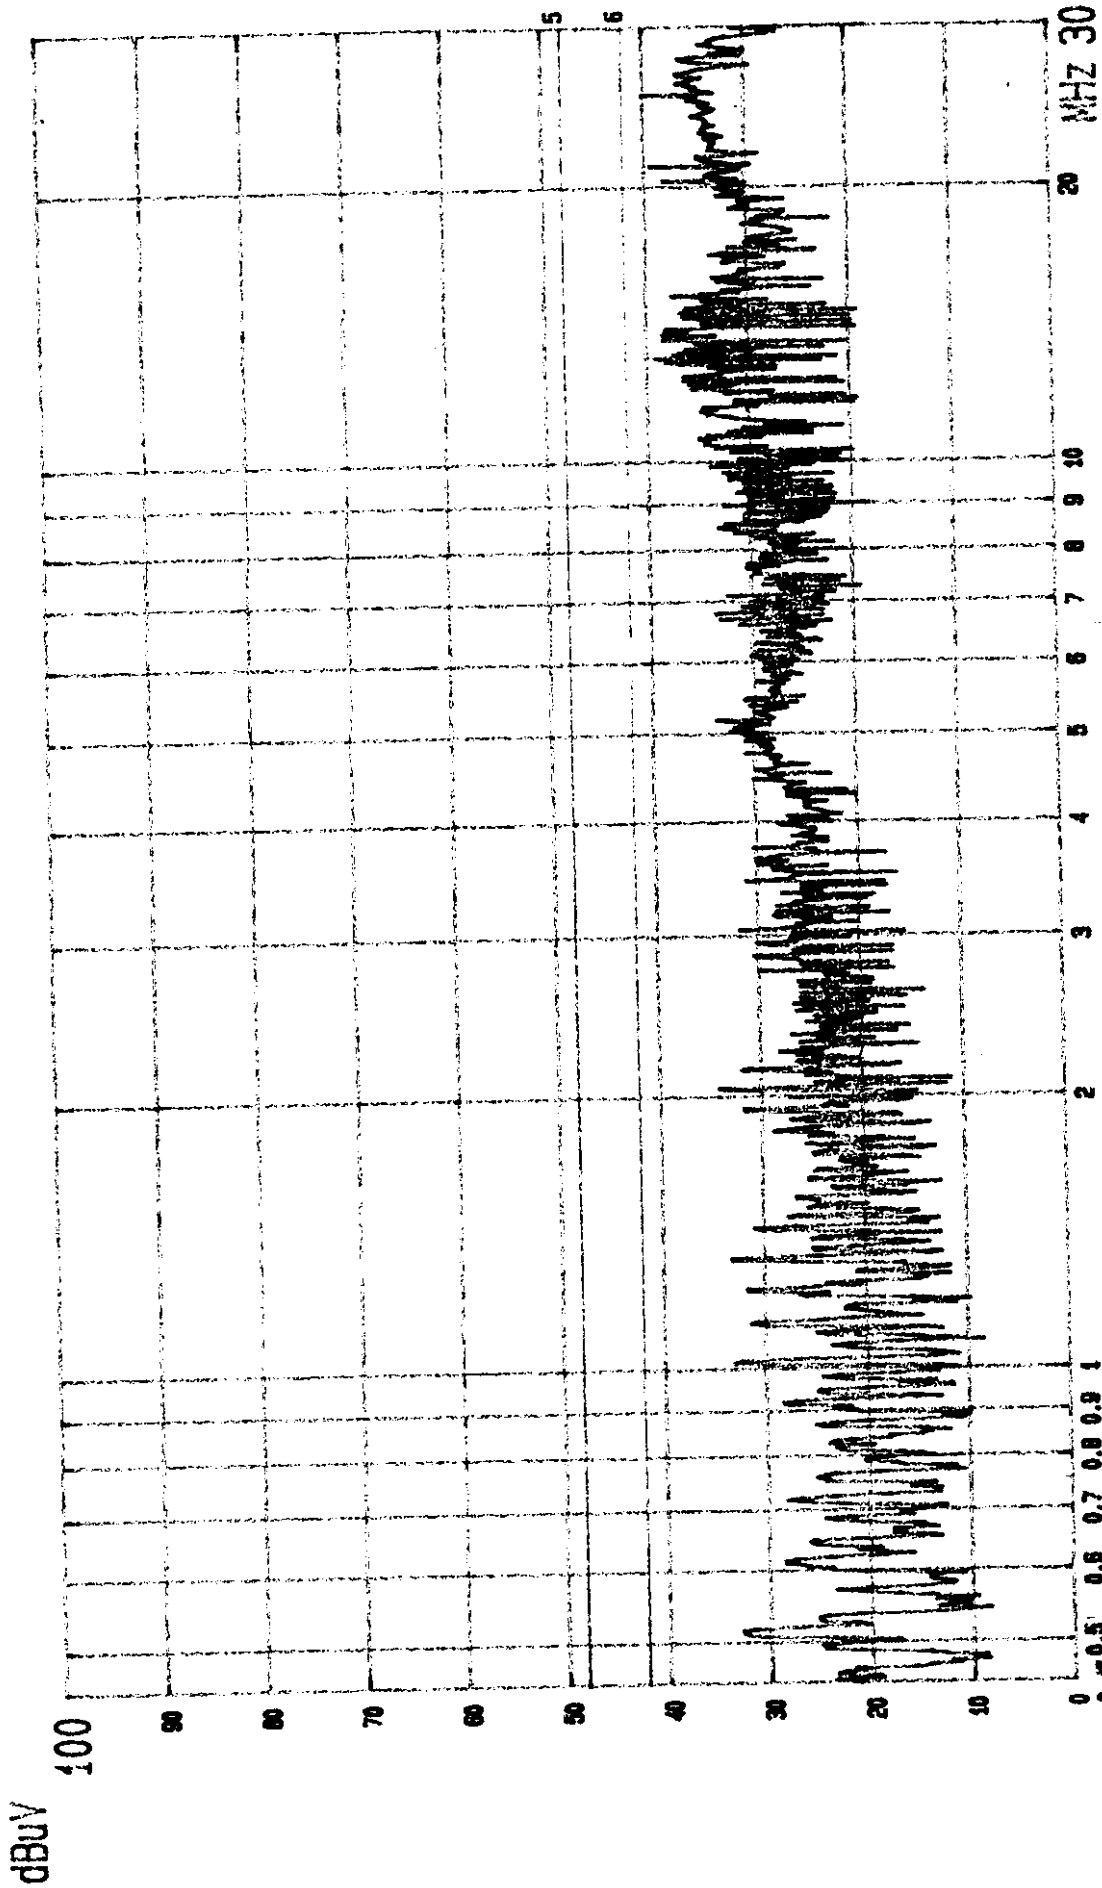

Date 10.FEB '99 Time 21:07:22
 EUT: MONITOR
 MENO: (640X480; 31.5KHz) 3.0M D-SUB
 M/N: VCOTIS21492-4*
 PAGE: 001.
 (PEAK VALUE) TTENC.


Date of Test : Feb. 10, 1999 Temperature : 20°C

EUT : 21" Color CRT Display Monitor with USB Pedestal Humidity : 45%


Test Mode : 115kHz/1600*1200 with 3m D-Sub Data Cable

Frequency (MHz)	Factor dB	Measurement (dBuV)		Reading (dBuV)		Limits (dBuV)	Margin (dBuV)	
		VA	VB	VA	VB		VA	VB
0.5104	0.5	37.7	30.2	38.2	30.7	48.0	9.8	17.3
0.9189	0.5	30.2	27.3	30.7	27.8	48.0	17.3	20.2
1.3161	0.5	30.6	30.3	31.1	30.8	48.0	16.9	17.2
4.9292	0.8	34.1	34.2	34.9	35.0	48.0	13.1	13.0
12.9520	1.0	35.8	35.6	36.8	36.6	48.0	11.2	11.4
25.2429	1.2	38.6	38.7	39.8	39.9	48.0	8.2	8.1

- Remark :
1. All reading were Quasi-Peak values.
 2. Factor = Insertion Loss + Cable Loss
 3. The worst emission was detected at 25.2429MHz with corrected signal level of 39.9dBuV (limit was 48dBuV) when the VB side of the EUT was connected to L.I.S.N.

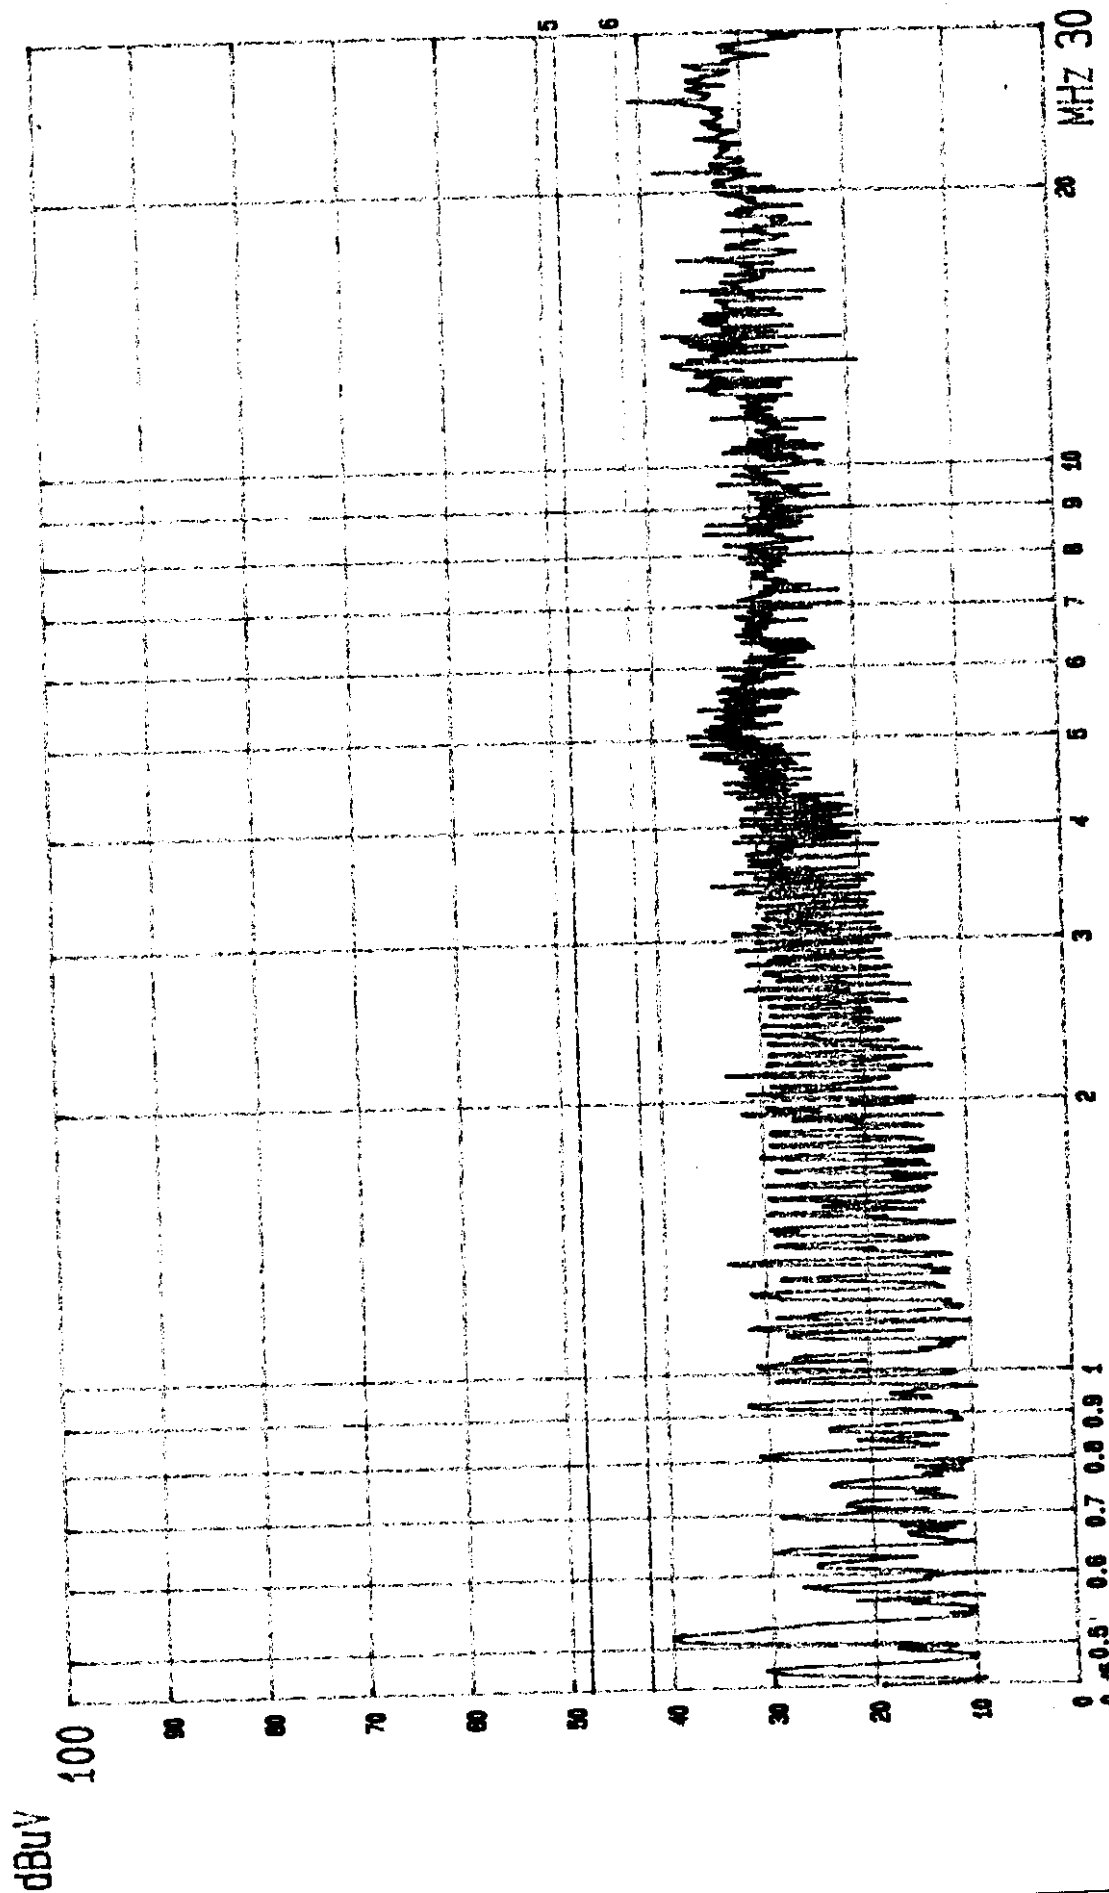

Date 10.FEB '99 Time 21:18:59
 VIEW SONIC EUT: MONITOR
 LINE: VA. M/N: VCDS21492-4*
 (PEAK VALUE) TTEM.

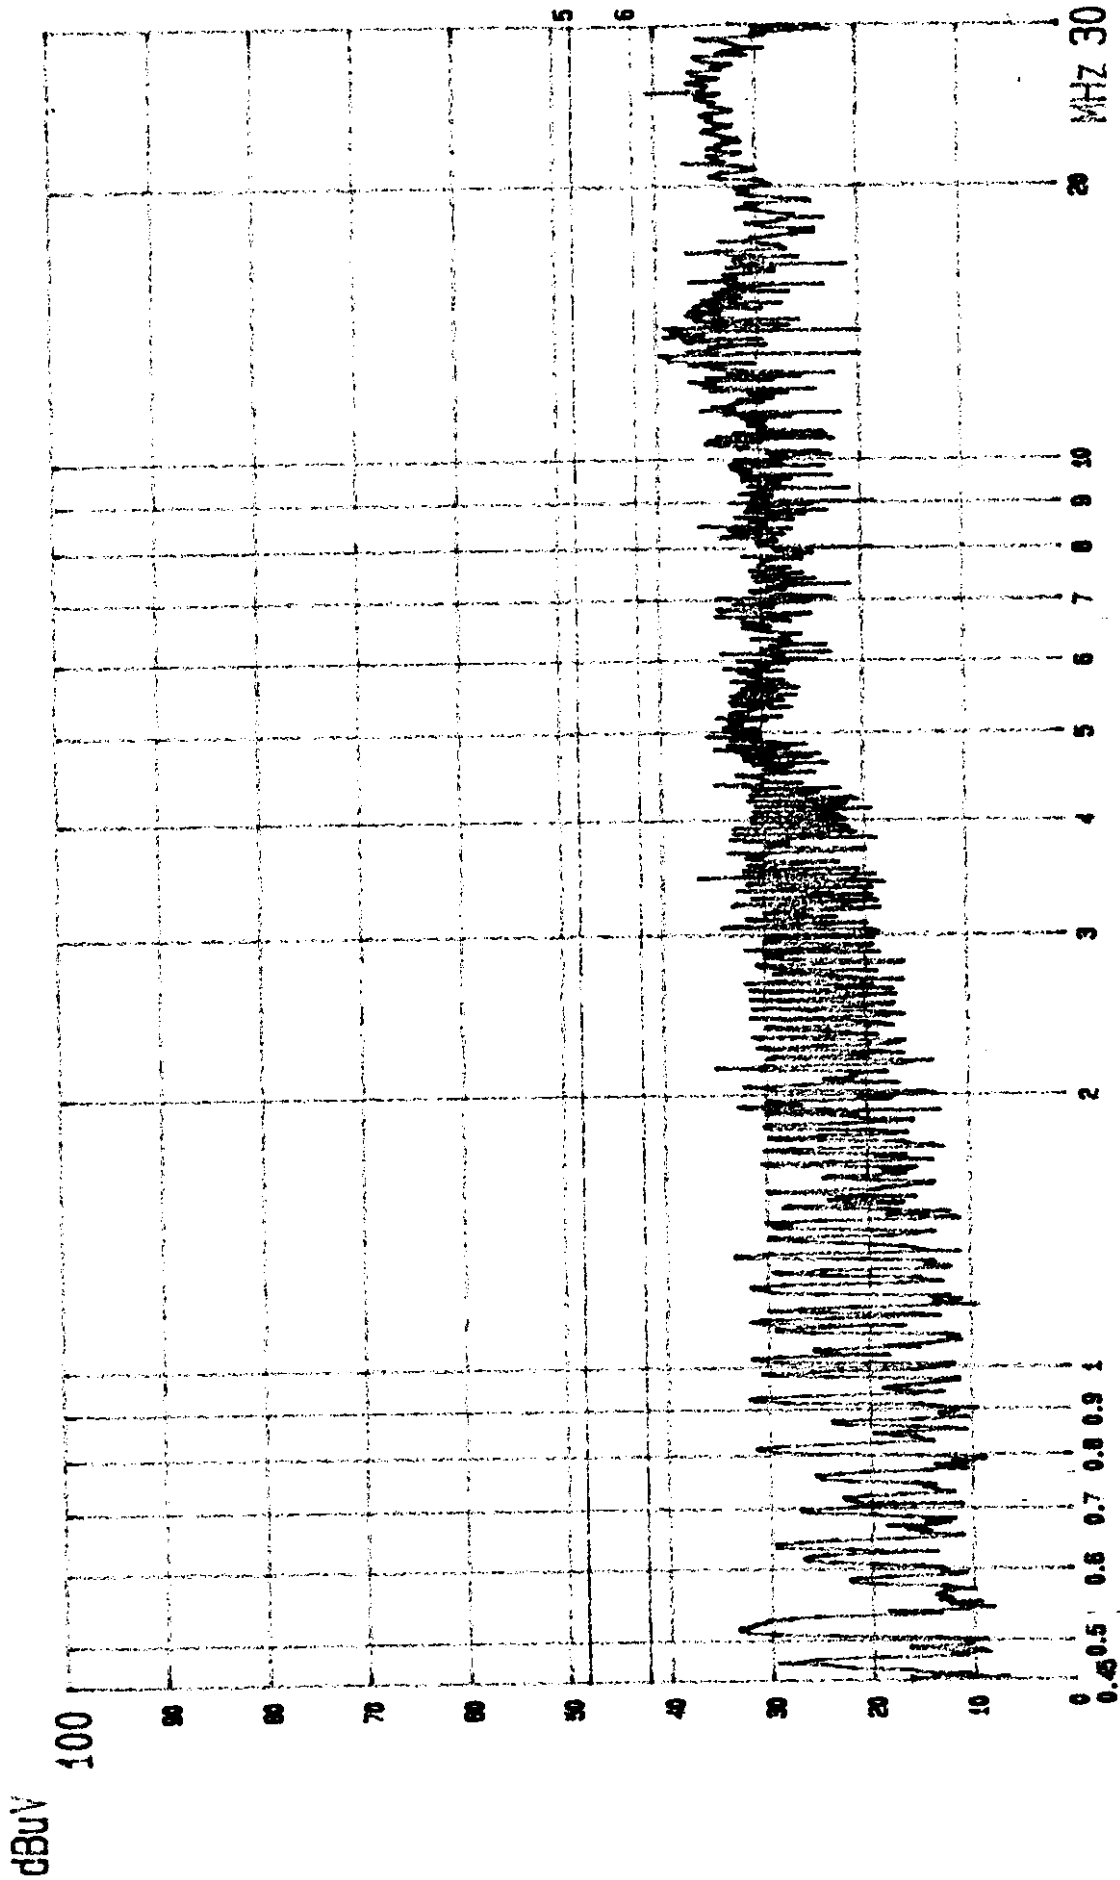

Date 10.FEB '99 Time 21:20:29
 VIEW SONIC
 LINE: VB.
 EUT: MONITOR
 MNO: (1600*1200; 115KHZ) 3.0M D-SUB
 M/N: VCDTS21492-4*
 PAGE: 002.
 (PEAK VALUE) TTEMC.


Date of Test : Feb. 10, 1999 Temperature : 20°C

EUT : 21" Color CRT Display Monitor with USB Pedestal Humidity : 45%


Test Mode : 105kHz/1800*1440 with 3m D-Sub Data Cable

Frequency (MHz)	Factor dB	Measurement (dBuV)		Reading (dBuV)		Limits (dBuV)	Margin (dBuV)	
		VA	VB	VA	VB		VA	VB
0.5038	0.5	29.3	30.1	29.8	30.6	48.0	18.2	17.4
1.1329	0.5	28.4	28.6	28.9	29.1	48.0	19.1	18.9
2.1068	0.5	32.1	32.5	32.6	33.0	48.0	15.4	15.0
6.7819	0.8	35.6	35.9	36.4	36.7	48.0	11.6	11.3
13.6314	1.0	38.1	38.2	39.1	39.2	48.0	8.9	8.8
25.2131	1.2	38.2	40.1	39.4	41.3	48.0	8.6	6.7

- Remark :
1. All reading were Quasi-Peak values.
 2. Factor = Insertion Loss + Cable Loss
 3. The worst emission was detected at 25.2131MHz with corrected signal level of 41.3dBuV (limit was 48dBuV) when the VB side of the EUT was connected to L.I.S.N.

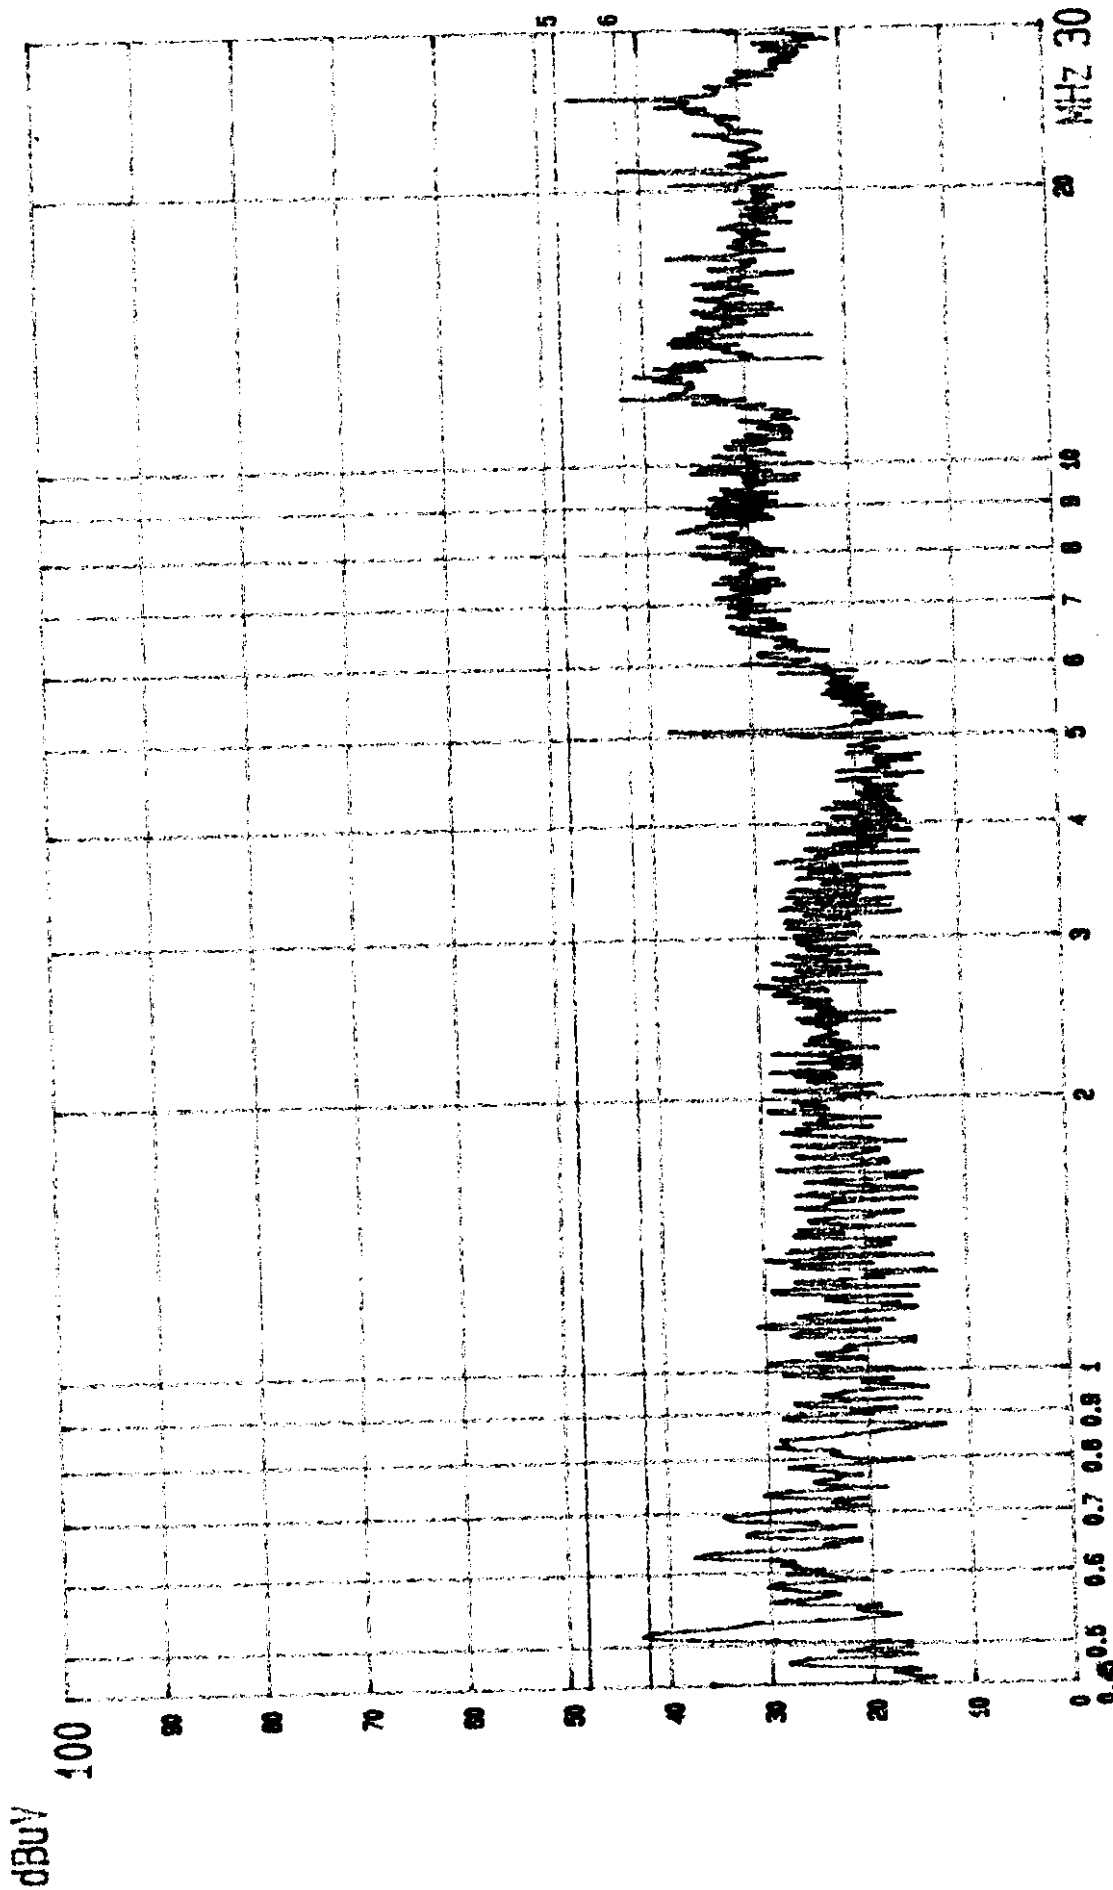

Date 10.FEB '99 Time 21:35:37
 EUT: MONITOR
 M/N: VCDTS21492-4*
 VIEW SONIC
 LINE: VA.
 (PEAK VALUE) TTENC.

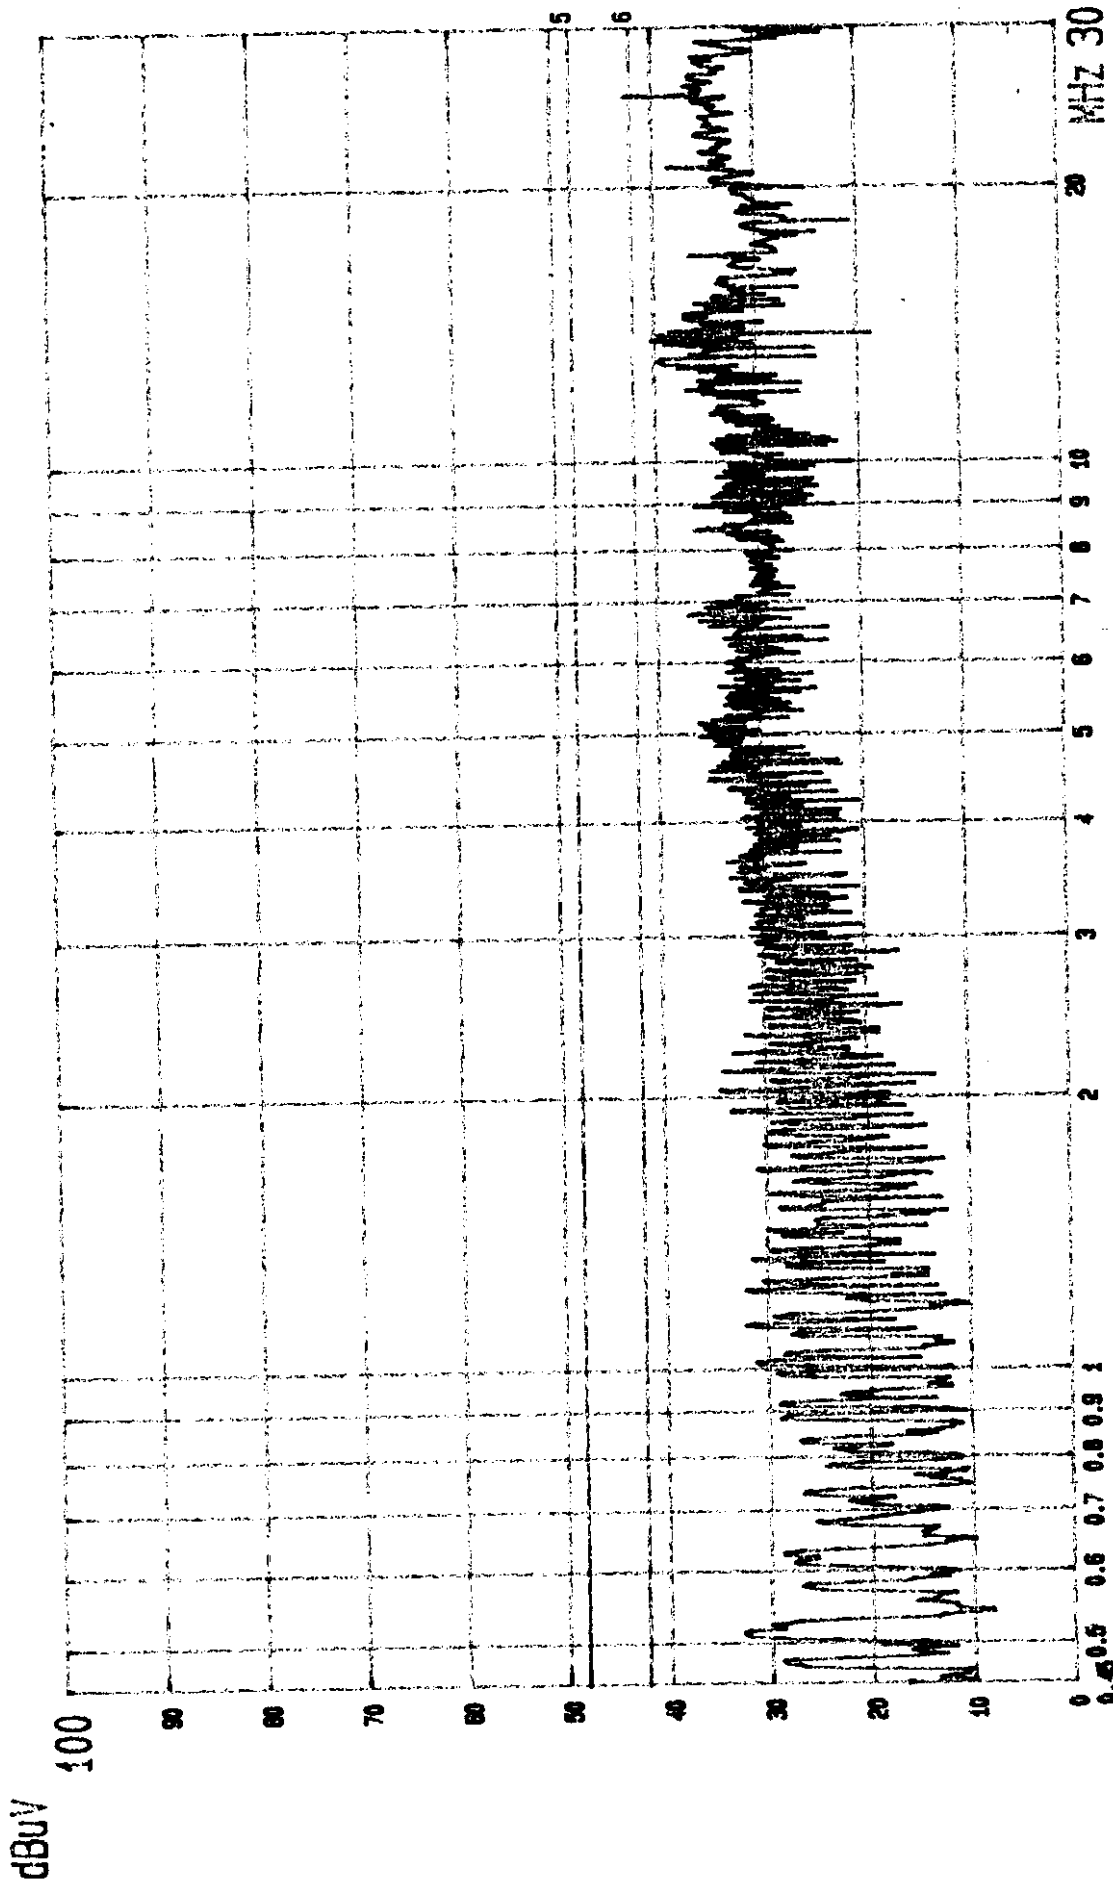

Date 10.FEB '99 Time 21:31:16
 VIEW SONIC EUT: MONITOR
 LINE: VB. MENO: (1800*1440; 105KHz) 3.0M D-SUB
 M/N: VCDTS21492-4*
 PAGE: 001.
 (PEAK VALUE) TTEM.

3. RADIATED EMISSION TEST

3.1. Test Equipment

The following test equipments are used during the radiated emission tests :

3.1.1. For Anechoic Chamber :


Item	Type	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	Spectrum Analyzer	HP	8593A	3212A01727	Jul.25, 98'	1 Year
2.	Pre-Amplifier	HP	8447D	2944A06305	May.13, 98'	1 Year
3.	Broadband Antenna	Schwarzbeck	BBA9106	A3L	Dec.09, 98'	1 Year
4.	Broadband Antenna	Schwarzbeck	UHALP9107	A3H	Dec.09, 98'	1 Year

3.1.2. For No. 2 Open Site :

Item	Type	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	Test Receiver	Rohde&Schwarz	ESVP	893202/001	Jul.24, 98'	1 Year
2.	Broadband Antenna	Chase	VBA6106A	1240	Jul.15, 98'	1 Year
3.	Broadband Antenna	Chase	UPA6109	1048	Jul.15, 98'	1 Year


3.2. Block Diagram of Test Setup

3.2.1. Block Diagram of connection between EUT and simulators

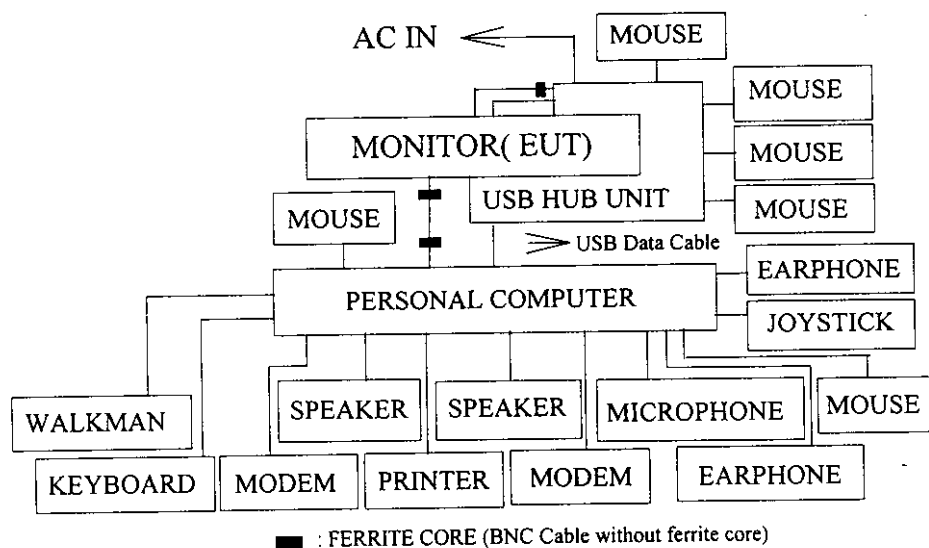

3.2.2. Open Field Test Site Setup Diagram

ANTENNA TOWER

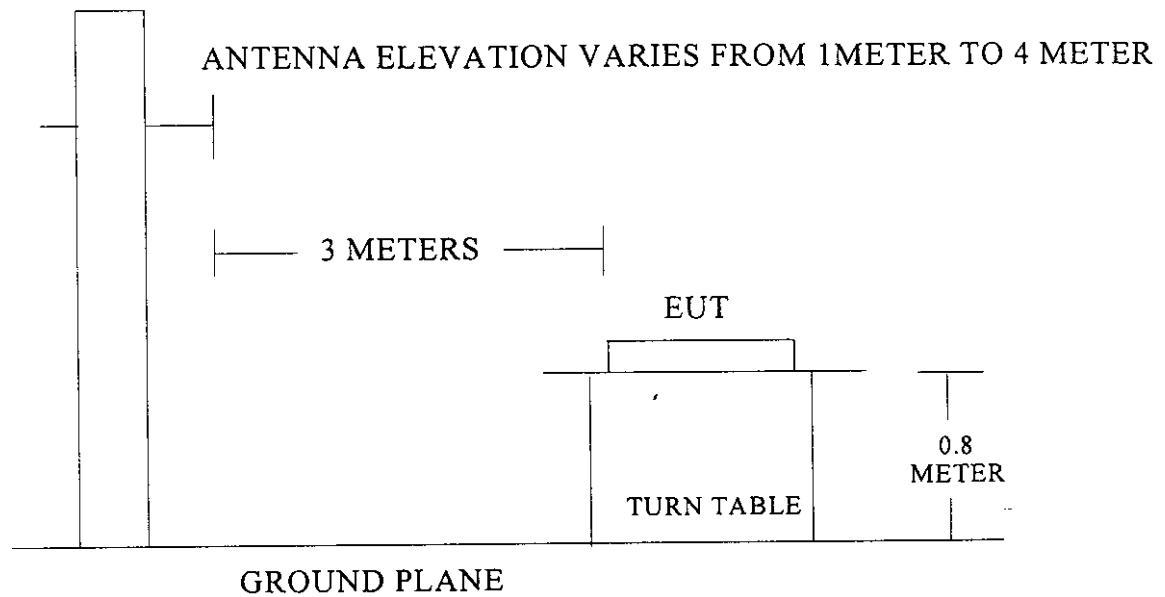

3.3. Radiation Limit (CLASS B)

FREQUENCY MHz	DISTANCE Meters	FIELD STRENGTHS LIMITS	
		uV/M	dBuV/M
30 ~ 88	3	100	40.0
88 ~ 216	3	150	43.5
216 ~ 960	3	200	46.0
960 ~ 1000	3	500	54.0

- Remark :
- (1) Emission level (dBuV/M) = 20 log Emission level (uV/M)
 - (2) The tighter limit applies at the edge between two frequency bands.
 - (3) Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system.

3.4. EUT's Configuration during Compliance Measurement

The configuration of EUT and its simulators were same as those used in conducted measurement. Please refer to 2.4.

3.5. Operating Condition of EUT

Same as conducted measurement which was listed in 2.5.

3.6. Test Procedure

The EUT and its simulators were placed on a turn table which was 0.8 meter above ground. The turn table rotate 360 degrees to determine the position of the maximum emission level. EUT was set 3 meters away from the receiving antenna which were mounted on a antenna tower. The antenna can move up and down between 1 meter and 4 meters to find out the maximum emission level. Broadband antenna (calibrated biconical and log periodical antenna) and dipole antenna were used as receiving antenna. Both horizontal and vertical polarization of the antenna were set on measurement. In order to find the maximum emission, all of the interface cables were manipulated according to ANSI C63.4-1992 during radiated measurement.

The bandwidth of the R&S Test Receiver ESVP was set at 120KHz.

The frequency range from 30MHz to 1000MHz was checked.

Three kinds of horizontal working frequency with four kinds of data cable were investigated separately within Anechoic Chamber and all the scanning waveform were attached in Appendix II.

Finally, re-measured the worst operating situation (115kHz/1600*1200 with 3m D-Sub data cable) at No. 2 Open Field Test site and all the test results are listed in section 3.7.

Three kinds of display frequency :

	640*480 (Hf : 31.5kHz)	1600*1200 (Hf : 115.0kHz)	1800*1440 (Hf : 105.0kHz)
(a) Dot Clock Frequency	25.175 MHz	239.35 MHz	250 MHz
(b) Vertical Frequency	50 Hz	180 Hz	70 Hz
(c) Horizontal Frequency	30 kHz	115 kHz	105 kHz

Four kinds of data cable :

- (1) 1.5m D-Sub data cable with two ferrite cores
- (2) 1.8m D-Sub data cable with two ferrite cores
- (3) 3.0m D-Sub data cable with two ferrite cores
- (4) 1.8m BNC data cable

3.7. Radiated Emission Measurement Results

The frequency spectrum from 30 MHz to 1000MHz was investigated. All the emissions not reported below were too low against the FCC CLASS B limit.

Date of Test : Mar. 01, 1999 Temperature : 19°C

EUT : 21" Color CRT Display Monitor with USB Pedestal Humidity : 80%

Test Mode : 115kHz/1600*1200 with 3m D-Sub Data Cable

	Antenna	Cable	Meter Reading	Emission Level		
Frequency	Factor	Loss	Horizontal	Horizontal	Limits	Margin
MHz	dB/m	dB	dBuV	dBuV/m	dBuV/m	dBuV/m
47.769	16.92	2.22	2.27	21.41	40.00	18.59
57.269	13.08	2.48	14.17	29.73	40.00	10.27
86.028	15.56	3.13	5.13	23.82	40.00	16.18
114.544	18.91	3.67	4.74	27.32	43.50	16.18
143.179	20.94	4.04	4.98	29.96	43.50	13.54
171.815	21.67	4.65	2.31	28.63	43.50	14.87
190.833	22.48	4.84	1.23	28.55	43.50	14.95
209.973	22.01	5.17	5.37	32.55	43.50	10.95
248.236	23.63	5.56	6.94	36.13	46.00	9.87
286.390	25.43	6.06	0.39	31.88	46.00	14.12
305.470	13.34	6.16	14.98	34.48	46.00	11.52
343.629	15.74	6.66	14.23	36.63	46.00	9.37
362.814	15.62	6.82	7.51	29.95	46.00	16.05
400.969	15.98	7.21	13.37	36.56	46.00	9.44
439.129	16.37	7.76	6.63	30.76	46.00	15.24
458.197	16.63	7.87	13.40	37.90	46.00	8.10
* 496.473	17.71	8.37	15.48	41.56	46.00	4.44
515.445	17.85	8.51	9.05	35.41	46.00	10.59
534.628	18.64	8.64	8.92	36.20	46.00	9.80

- Remark :
1. All reading were Quasi-Peak values.
 2. The worst emission was detected at 496.473MHz with corrected signal level of 41.56dBuV/m (limit was 46dBuV/m) when the antenna was at horizontal polarization and was at 1.3m high and the turn table was at 220°.
 3. 0° is the table front facing the antenna. Degree was calculated from 0° clockwise facing the antenna.

Date of Test : Mar. 01, 1999 Temperature : 19°C

EUT : 21" Color CRT Display Monitor with USB Pedestal Humidity : 80%

Test Mode : 115kHz/1600*1200 with 3m D-Sub Data Cable


Frequency MHz	Antenna Cable		Meter Reading		Emission Level	
	Factor dB/m	Loss dB	Vertical dBuV	Vertical dBuV/m	Limits dBuV/m	Margin dBuV/m
38.158	20.09	2.01	6.50	28.60	40.00	11.40
57.248	13.71	2.48	13.51	29.70	40.00	10.30
57.253	13.71	2.48	13.41	29.60	40.00	10.40
76.334	14.43	2.86	9.60	26.89	40.00	13.11
124.118	18.05	3.74	3.81	25.60	43.50	17.90
152.736	21.10	4.39	3.80	29.29	43.50	14.21
190.843	21.32	4.84	3.31	29.47	43.50	14.03
209.977	21.90	5.17	2.40	29.47	43.50	14.03
229.088	24.54	5.40	2.00	31.94	46.00	14.06
248.236	23.03	5.56	7.61	36.20	46.00	9.80
257.727	22.81	5.71	- 2.10	26.42	46.00	19.58
286.378	25.24	6.06	2.00	33.30	46.00	12.70
305.473	13.80	6.16	16.04	36.00	46.00	10.00
343.630	15.08	6.66	19.13	40.87	46.00	5.13
362.817	15.02	6.82	11.63	33.47	46.00	12.53
372.360	14.83	6.97	11.94	33.74	46.00	12.26
400.974	15.74	7.21	17.73	40.68	46.00	5.32
458.205	16.99	7.87	14.94	39.80	46.00	6.20
477.285	17.74	8.02	8.94	34.70	46.00	11.30
* 496.366	18.09	8.37	15.54	42.00	46.00	4.00
515.447	18.22	8.51	9.43	36.16	46.00	9.84

- Remark :
1. All reading were Quasi-Peak values.
 2. The worst emission was detected at 496.366MHz with corrected signal level of 42.00dBuV/m (limit was 46dBuV/m) when the antenna was at vertical polarization and was at 1m high and the turn table was at 160°.
 3. 0° is the table front facing the antenna. Degree was calculated from 0° clockwise facing the antenna.


4. DEVIATIONS TO TEST SPECIFICATIONS

[NONE]

APPENDIX I

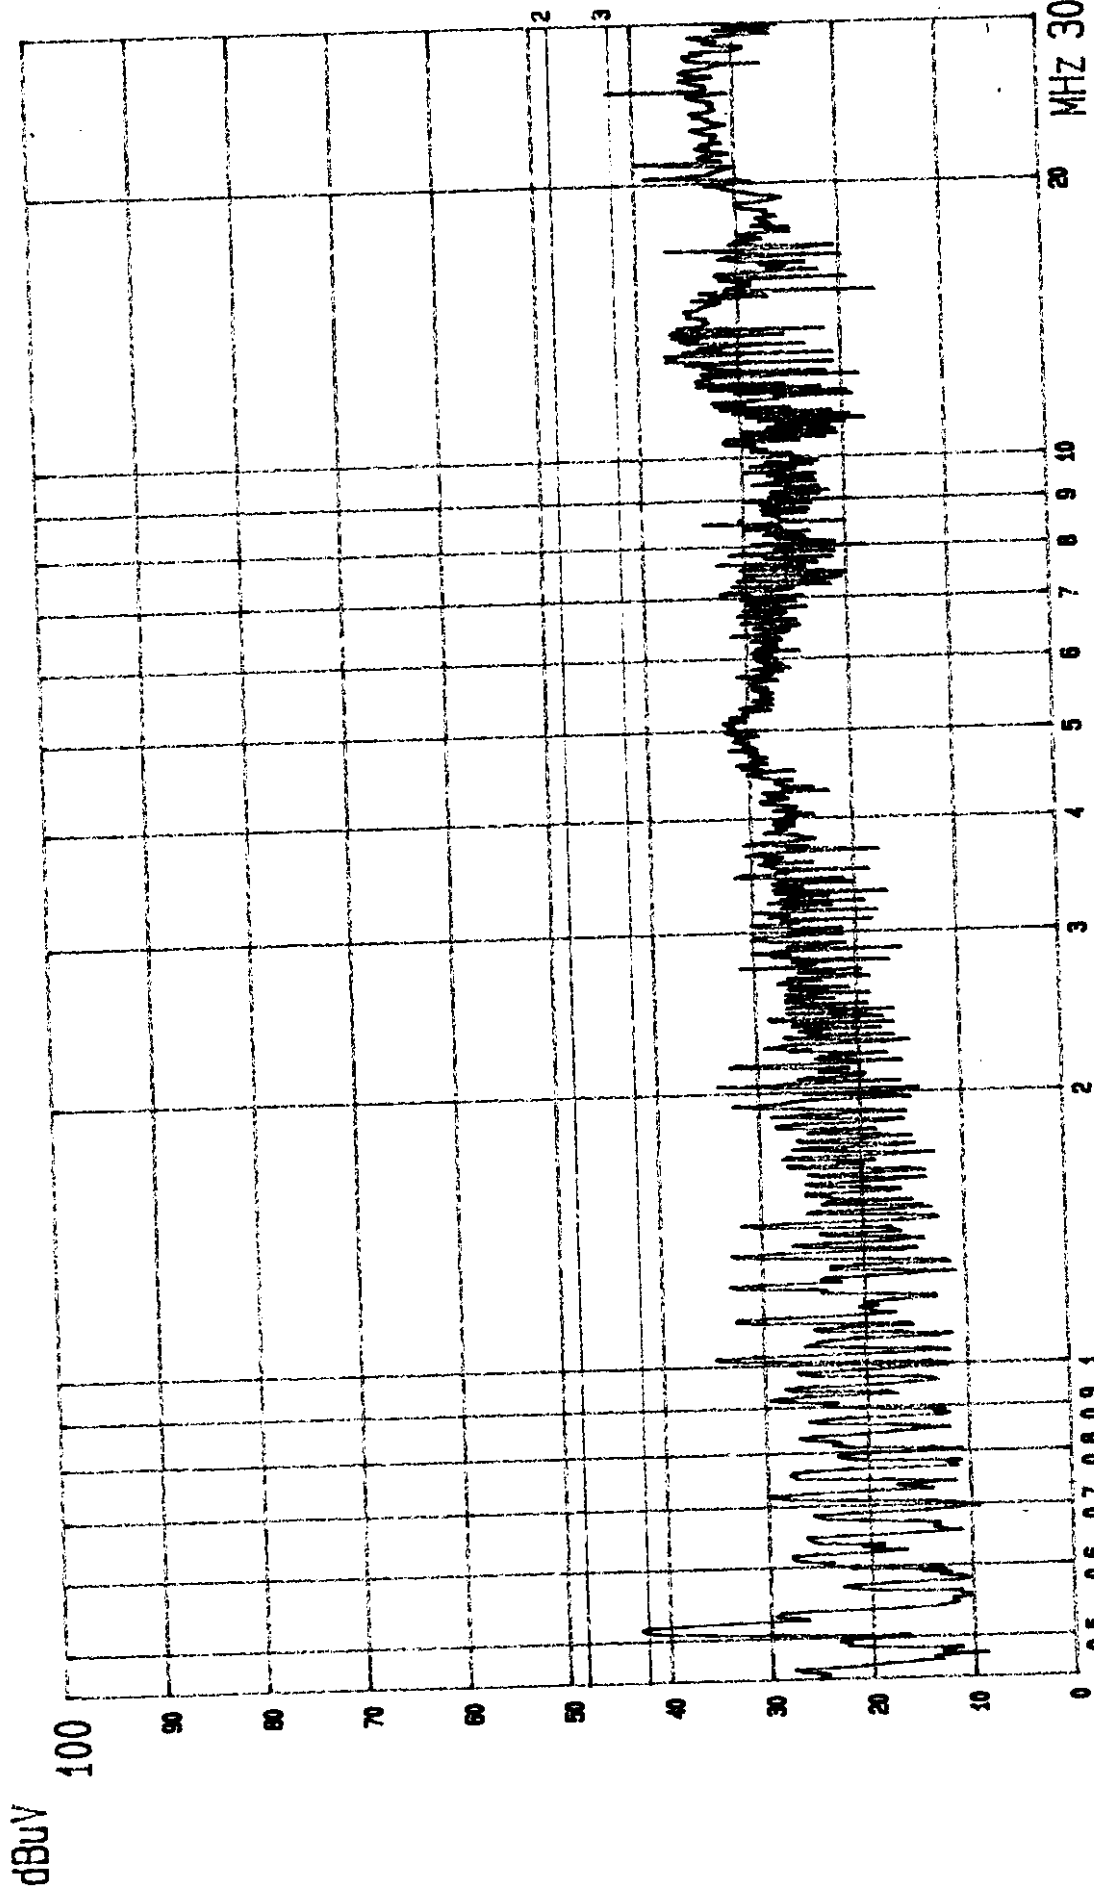

--- Date 10.FEB '99 Time 15:14:38
VIEW SONIC EUT: MONITOR
LINE: VA. MENO: (640X480; 31.5KHz) 1.5M D-SUB
M/N: VCDTS21492-4*
PAGE: 001.
(PEAK VALUE) TTEMC.

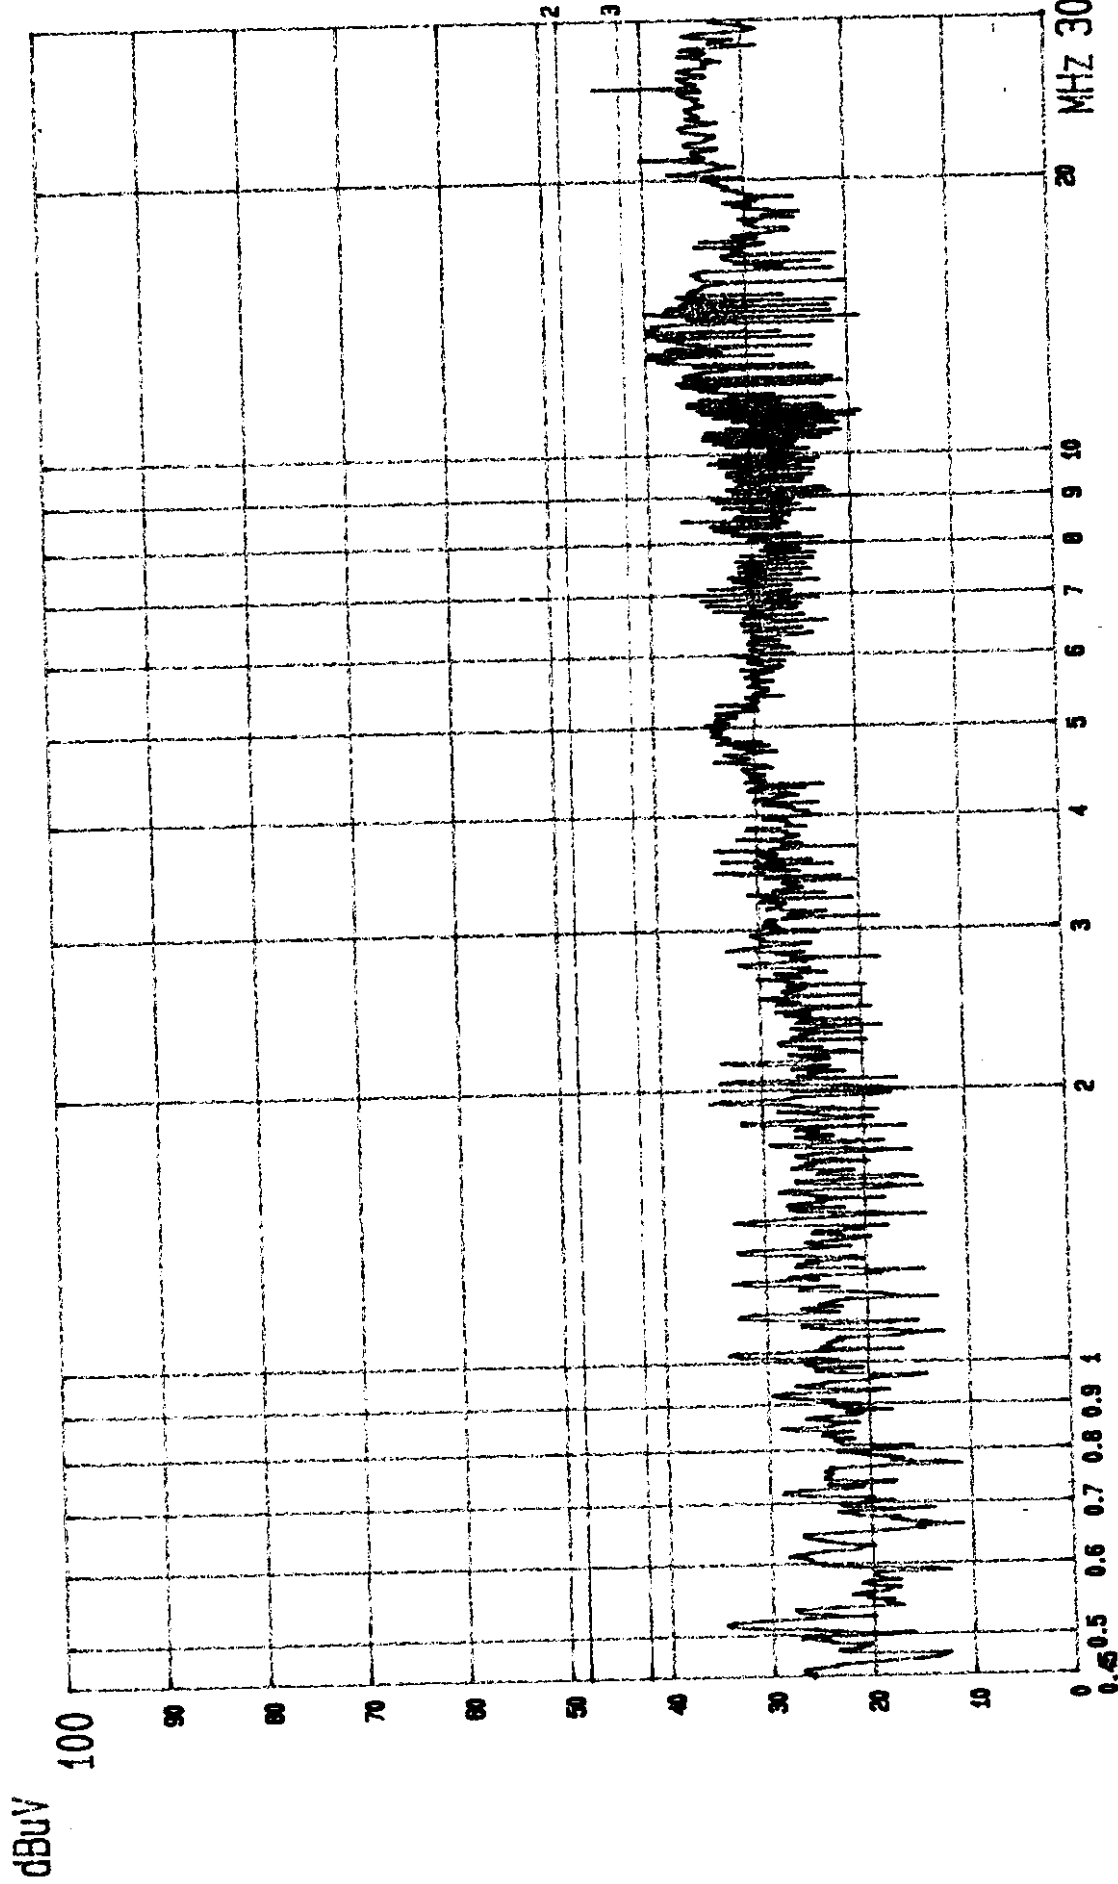

--- Date 10.FEB '99 Time 15:17:23

VIEW SONIC EUT: MONITOR


LINE: VB.

M/N: VCDTS21492-4*

MEN0: (640X480; 31.5KHz) 1.5M D-SUB

PAGE: 002.
(PEAK VALUE) TTENC.

dBuV

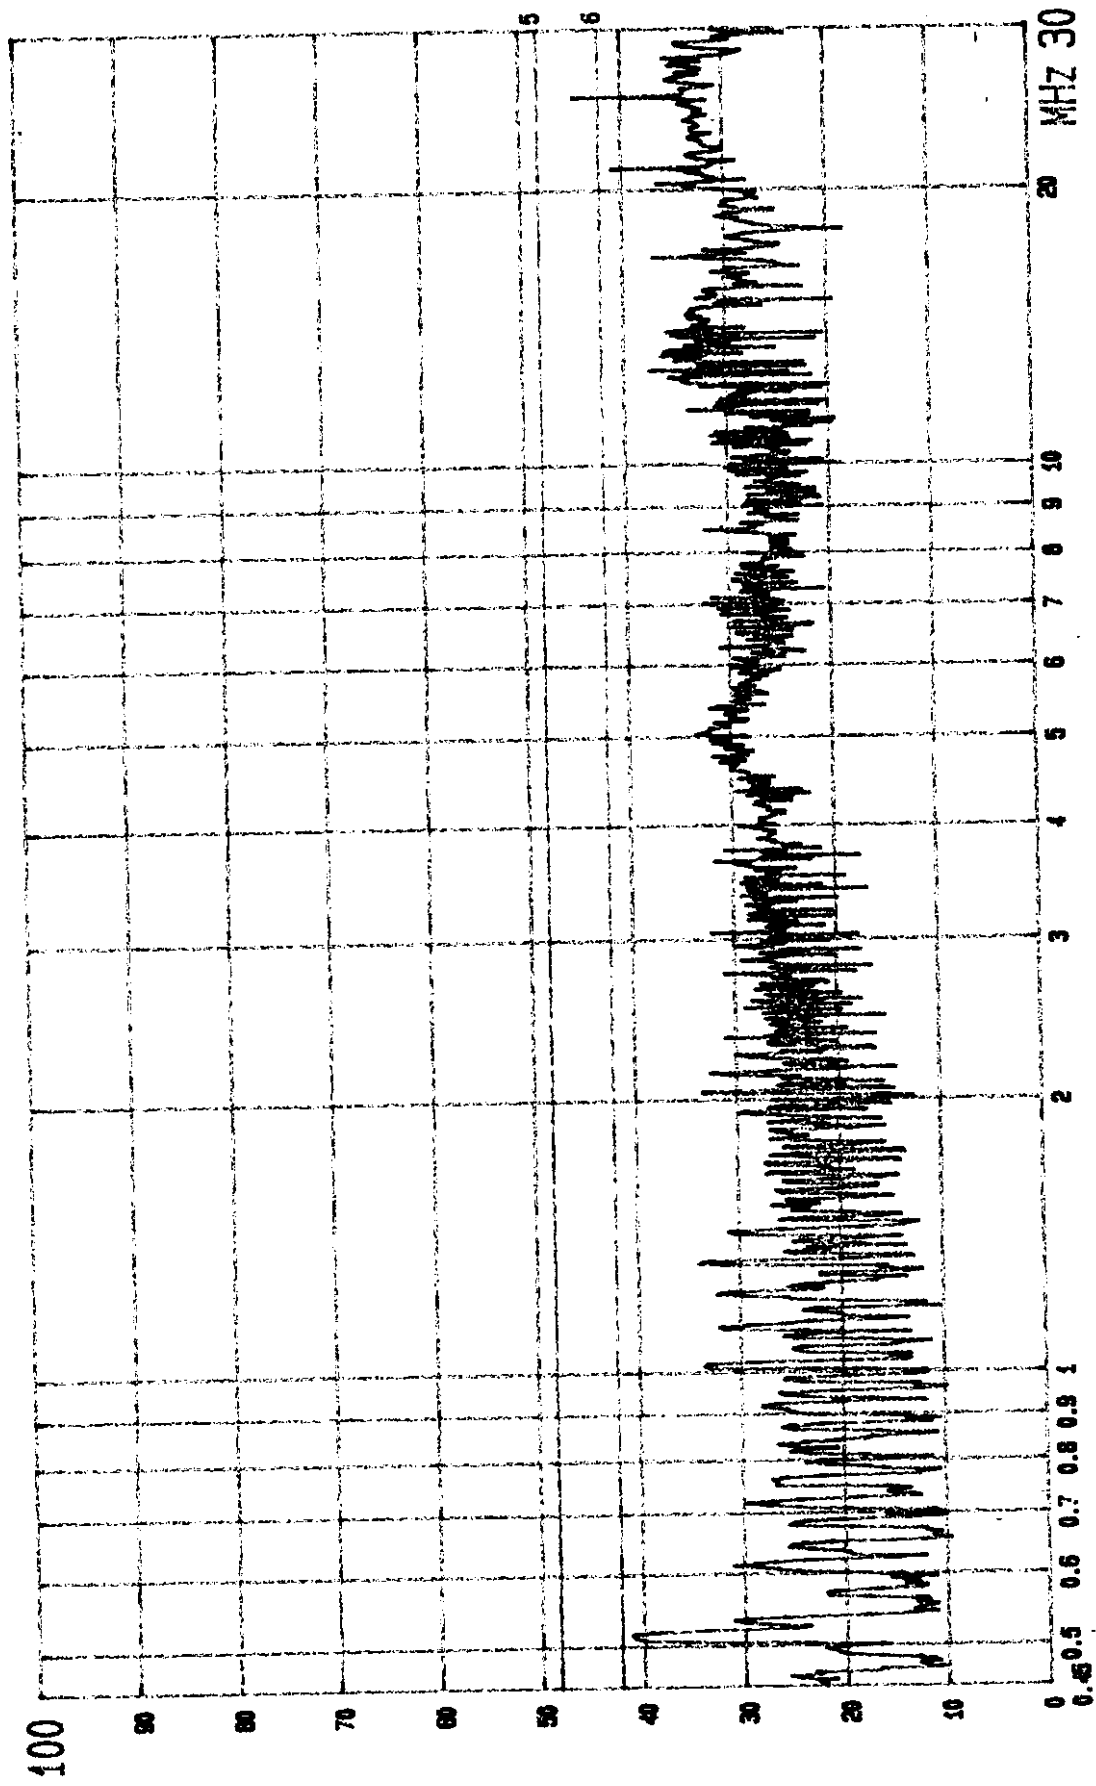

--- Date 10.FEB '99 Time 20:51:56

EUT: MONITOR


MEN0: (640X480; 31.5KHz) 1.8M D-SUB

M/N: VCDTS21492-4*

PAGE: 001.
(PEAK VALUE) TTEMC.

VIEW SONIC
LINE: VA.

dBuV

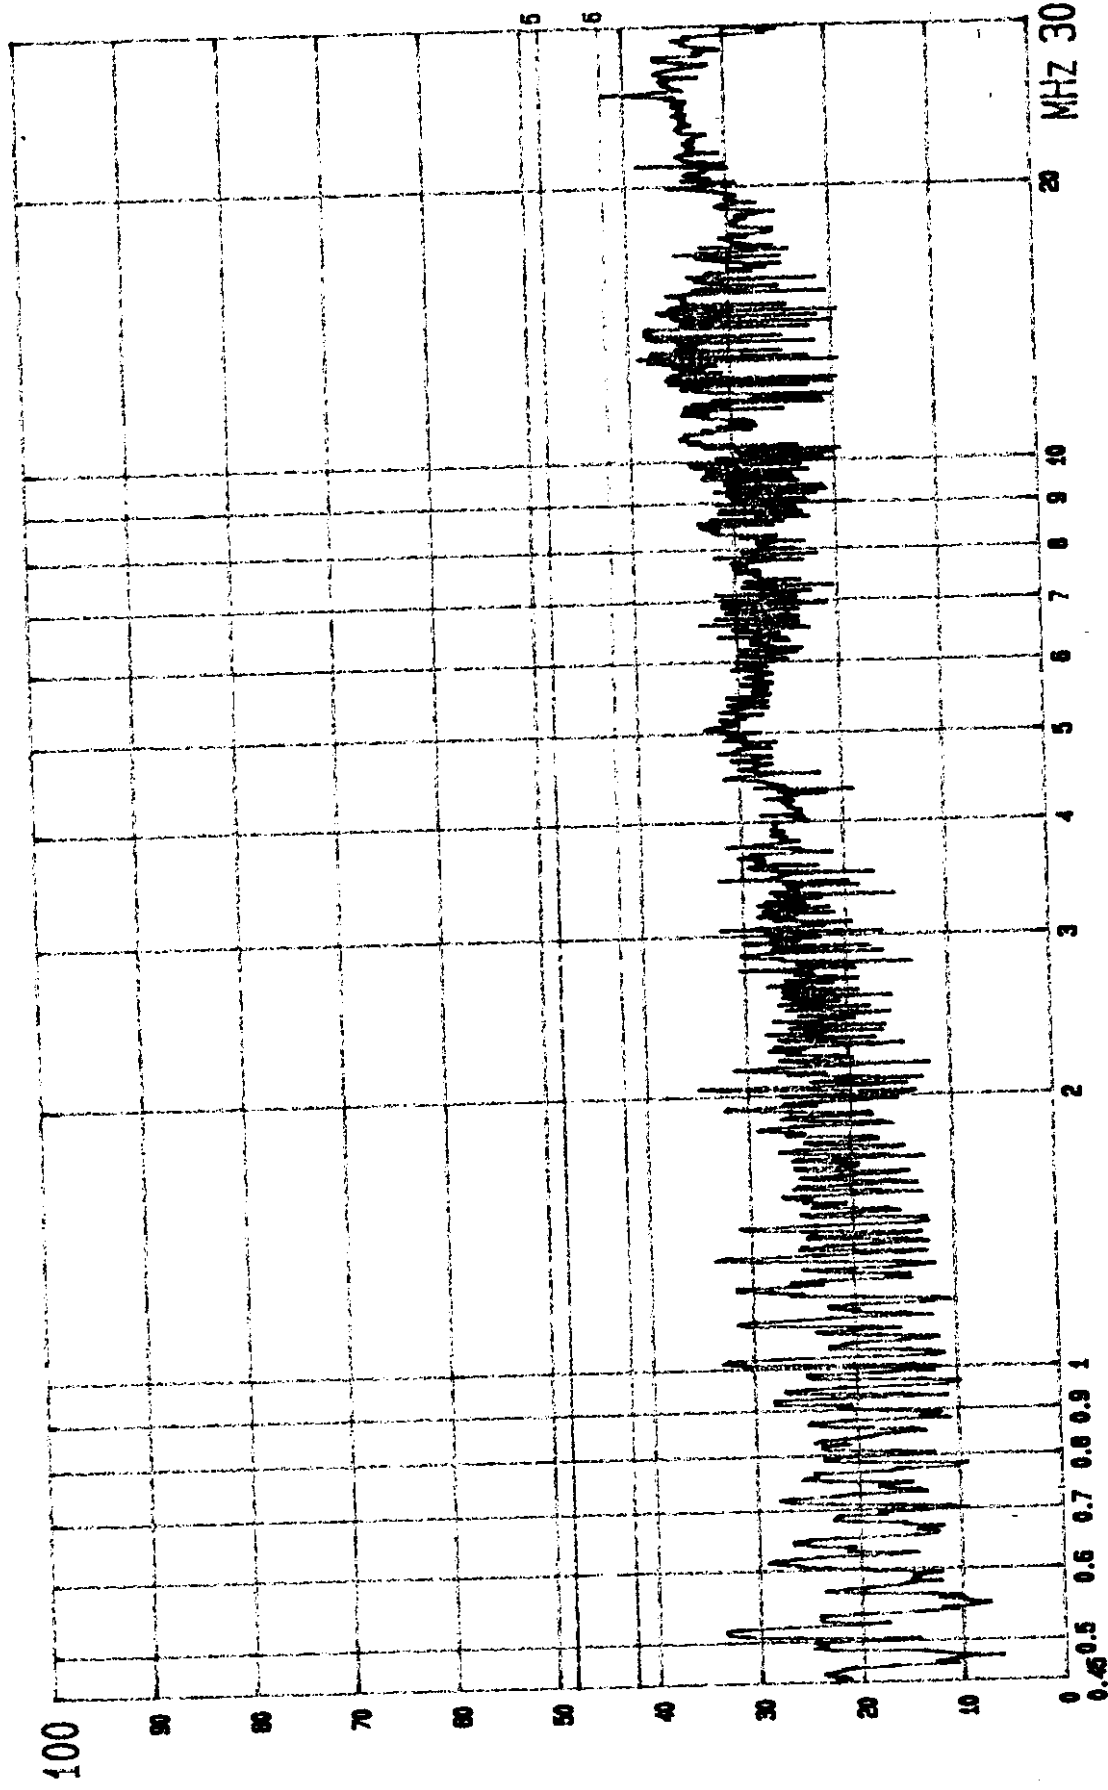

--- Date 10.FEB '99 Time 20:53:54

VIEW SONIC EUT: MONITOR


LINE: VB.

M/N: VCDTS21492-4*

MENO: (640X480; 31.5KHz) 1.8M D-SUB

PAGE: 002.

(PEAK VALUE) TTEM.C.

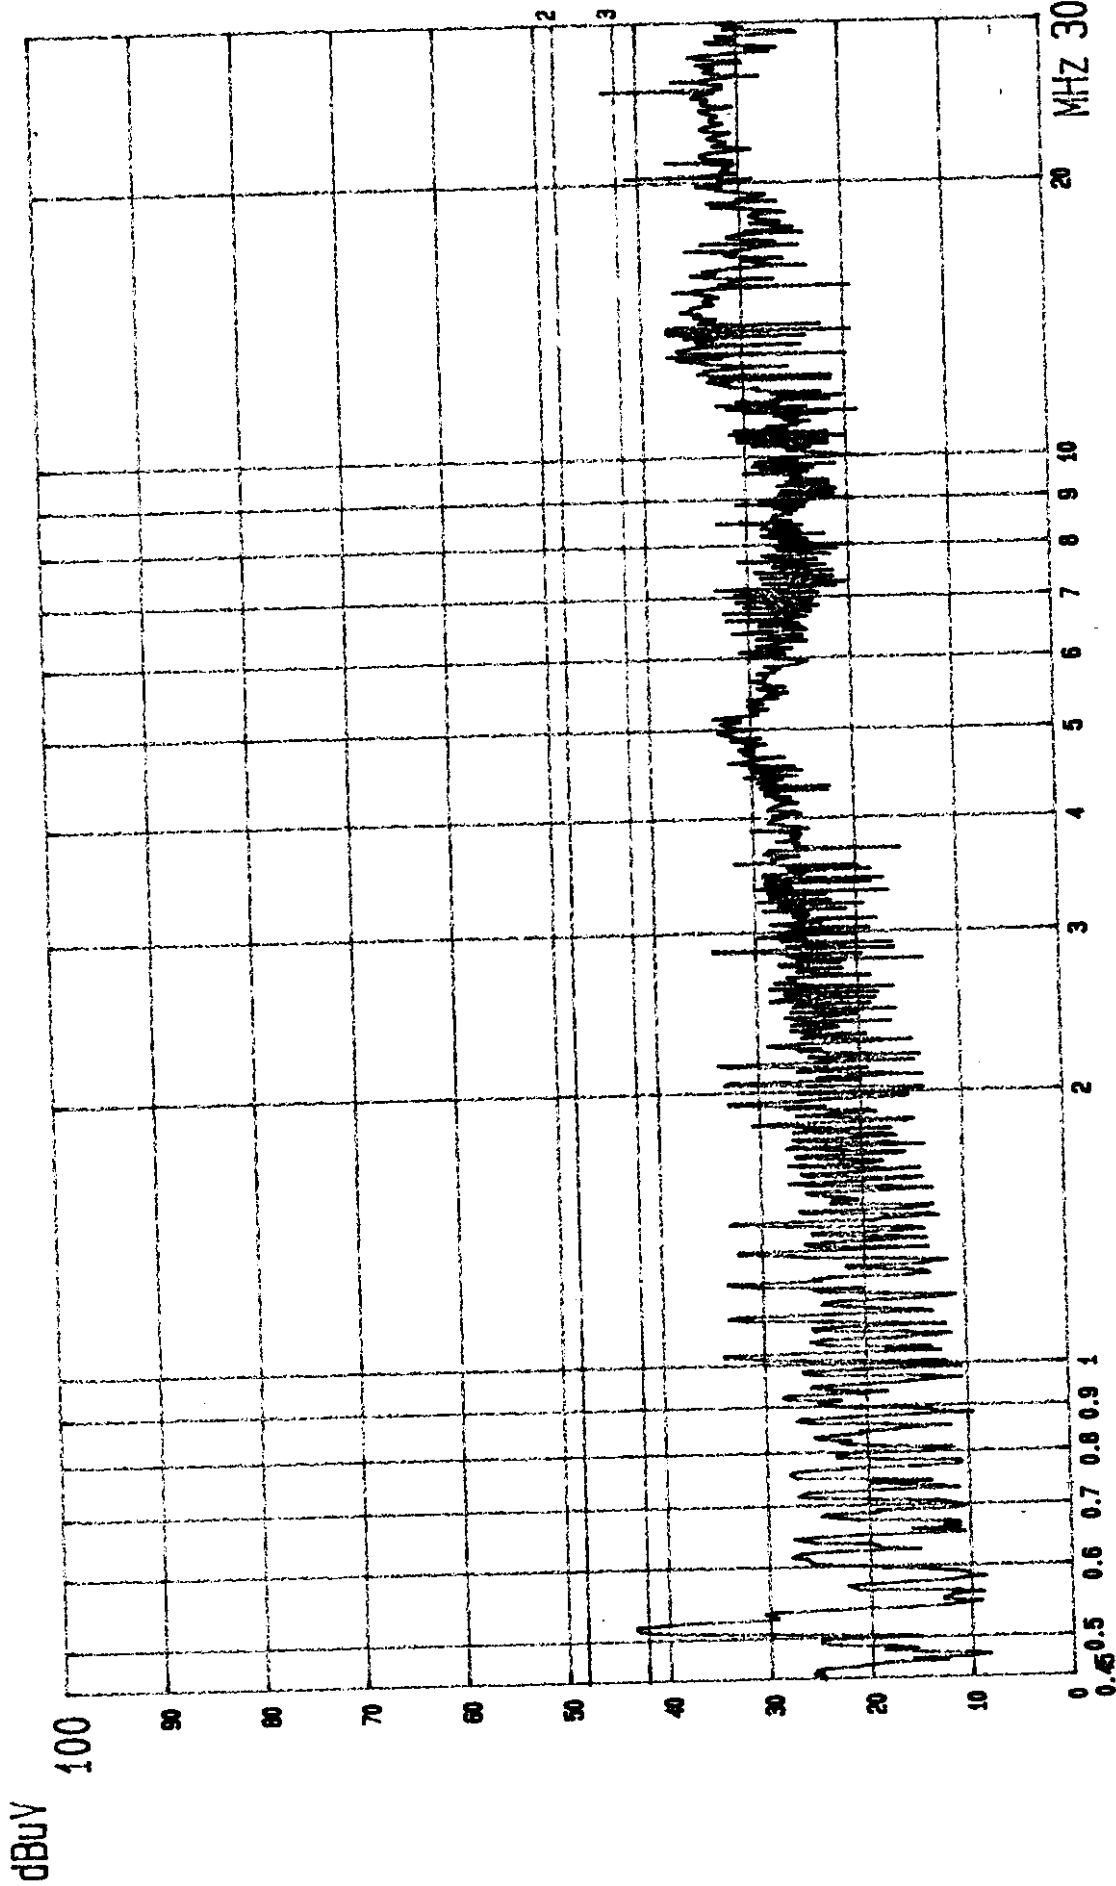


--- Date 10.FEB '99 Time 14:54:08
VIEW SONIC
LINE: VA.

EUT: MONITOR
MEN0: (640X480; 31.5KHz) 1.8M BNC

M/N: VCDTS21492-4*

PAGE: 002.
(PEAK VALUE) TTENC.


dBuV

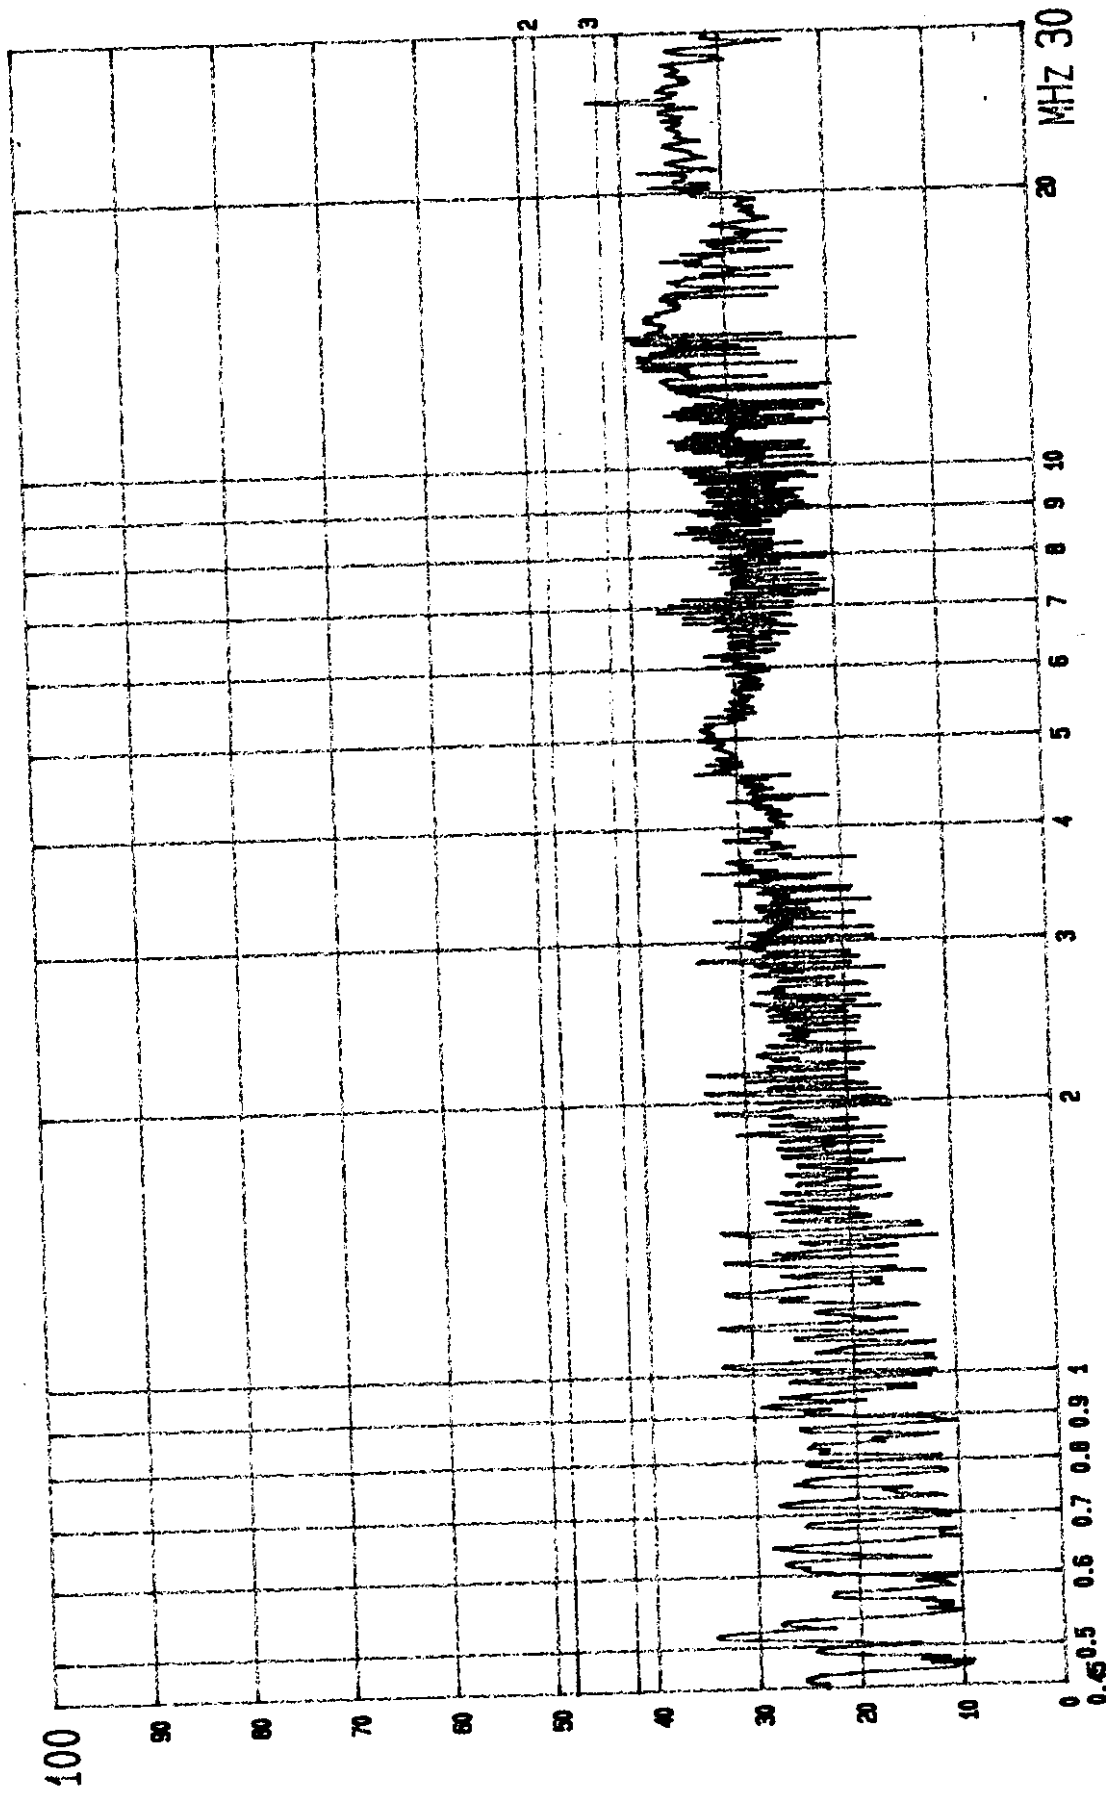

--- Date 10.FEB '99 Time 14:48:53
VIEW: SOMIC
LINE: VB.


EUT: MONITOR
M/N: VCDTS21492-4*
MENO: (640X480; 31.5KHz) 1.8M BNC

PAGE: 001.
(PEAK VALUE) ITEM C.

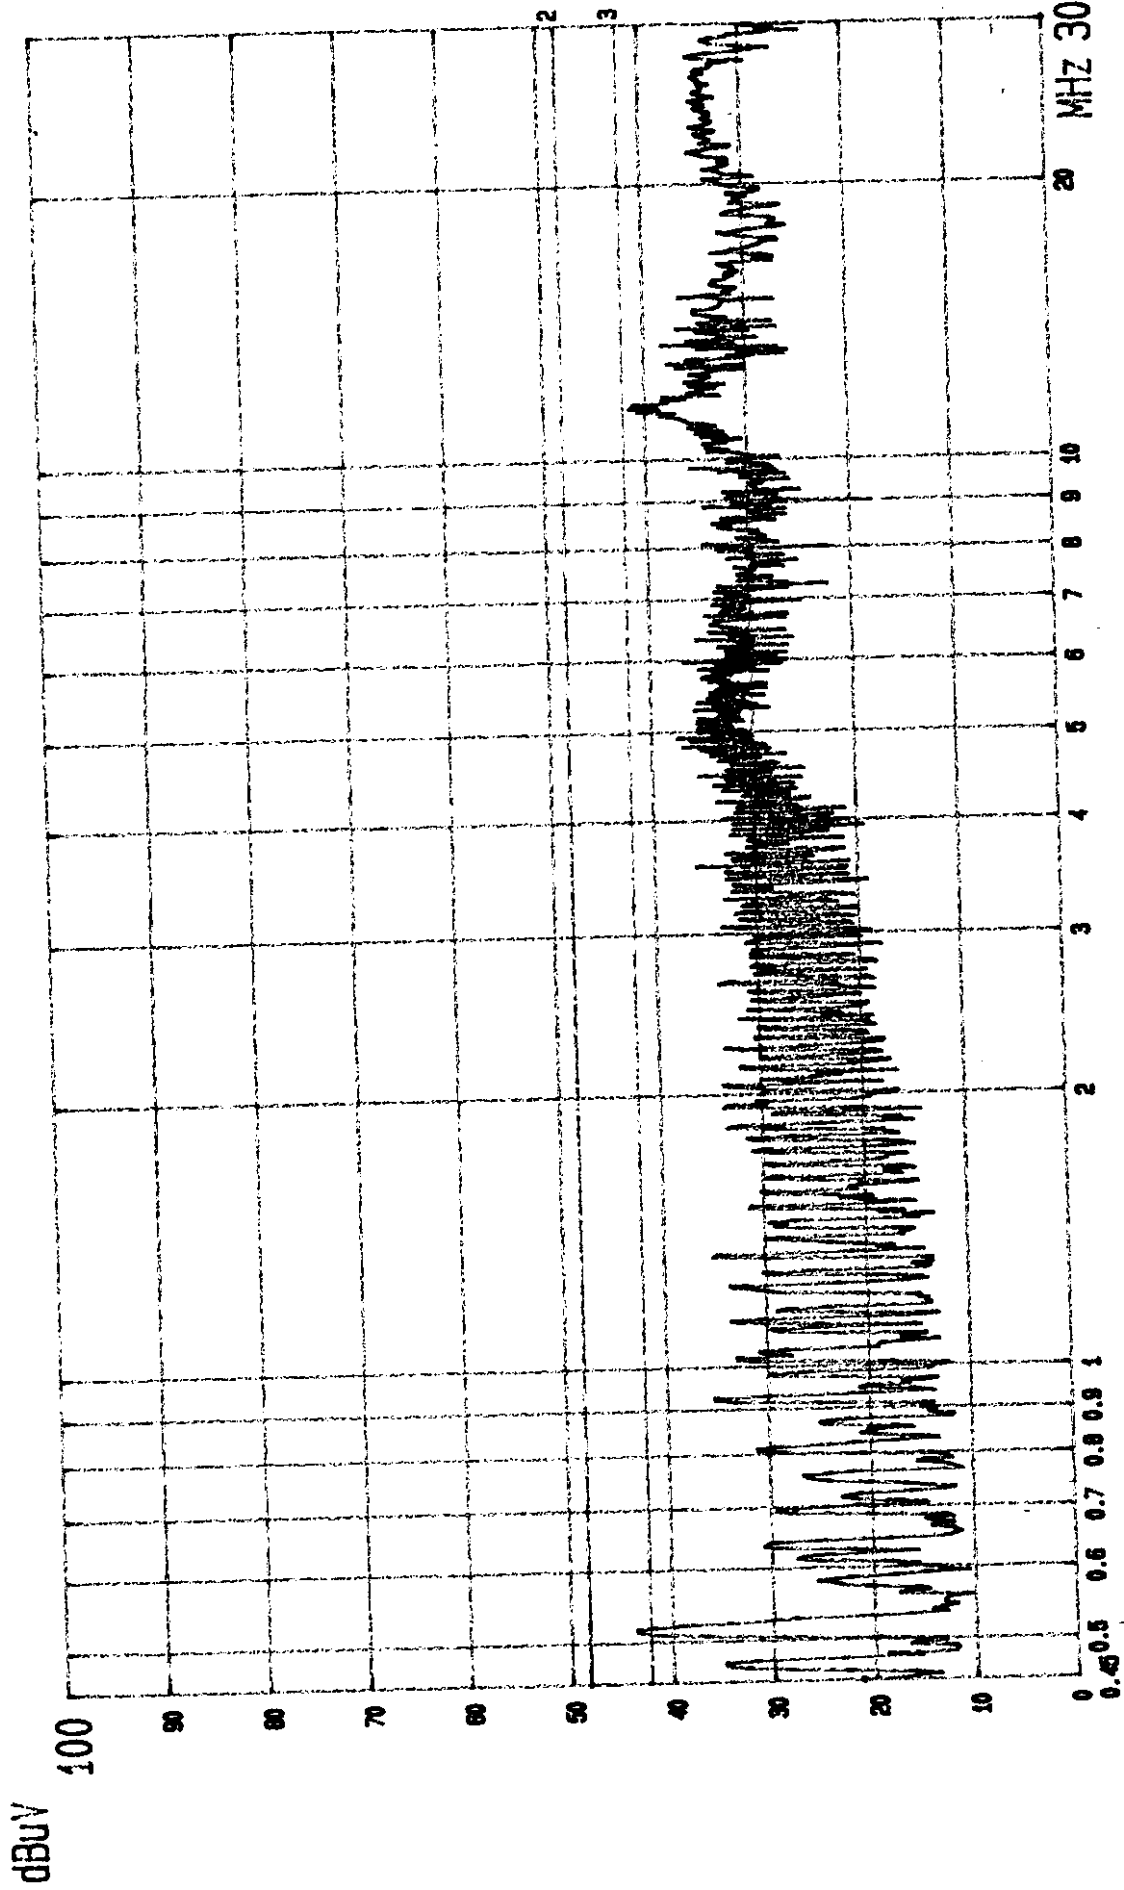

---- Date 10.FEB '99 Time 15:33:00
VIEW SONIC EUT: MONITOR
LINE: VA. MENO: (1600X1200; 115KHz) 1.5M D-SUB
M/N: VCDTS21492-4*
PAGE: 002.
(PEAK VALUE) TTEMC.

dBuV

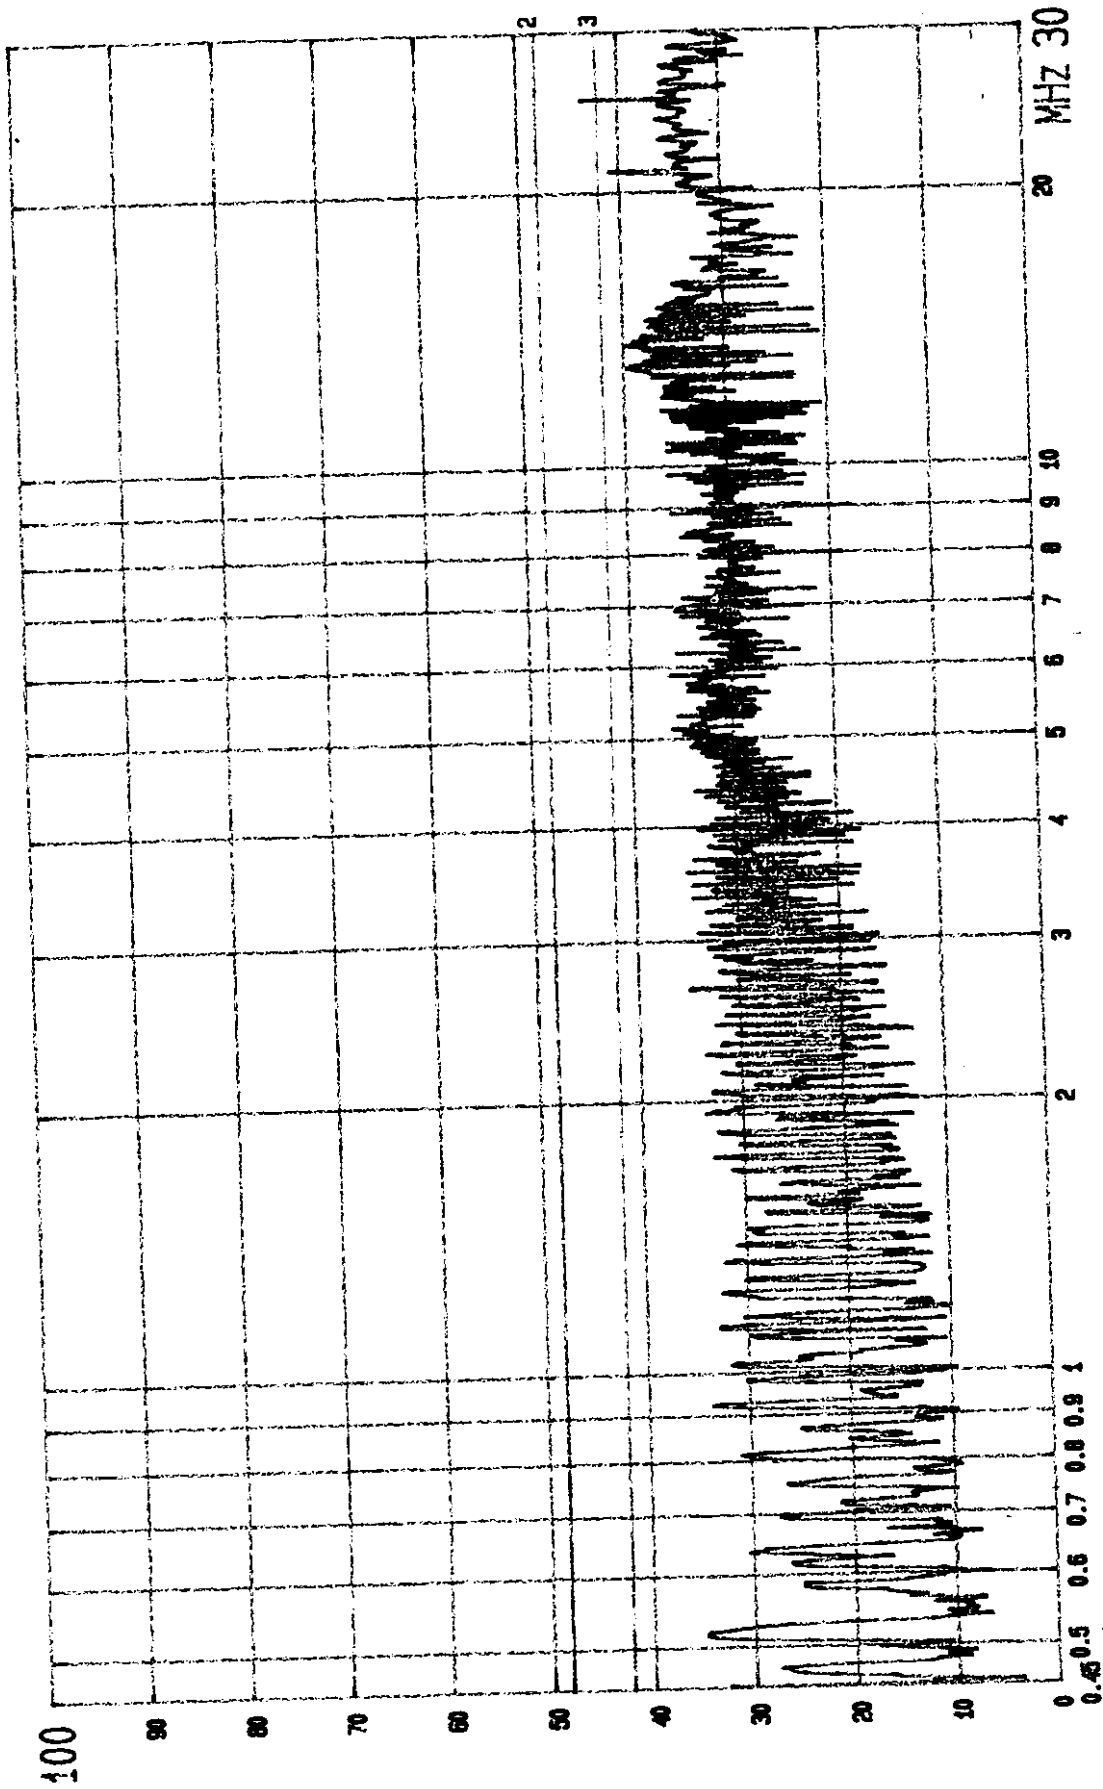


--- Date 10.FEB '99 Time 15:24:13
VIEW SONIC
LINE: VB.

M/N: VCDTS21492-4*
EUT: MONITOR
MENO: (1600X1200; 115KHz) 1.5M D-SUB

PAGE: 001.
(PEAK VALUE) TTEMPC.

dBuV

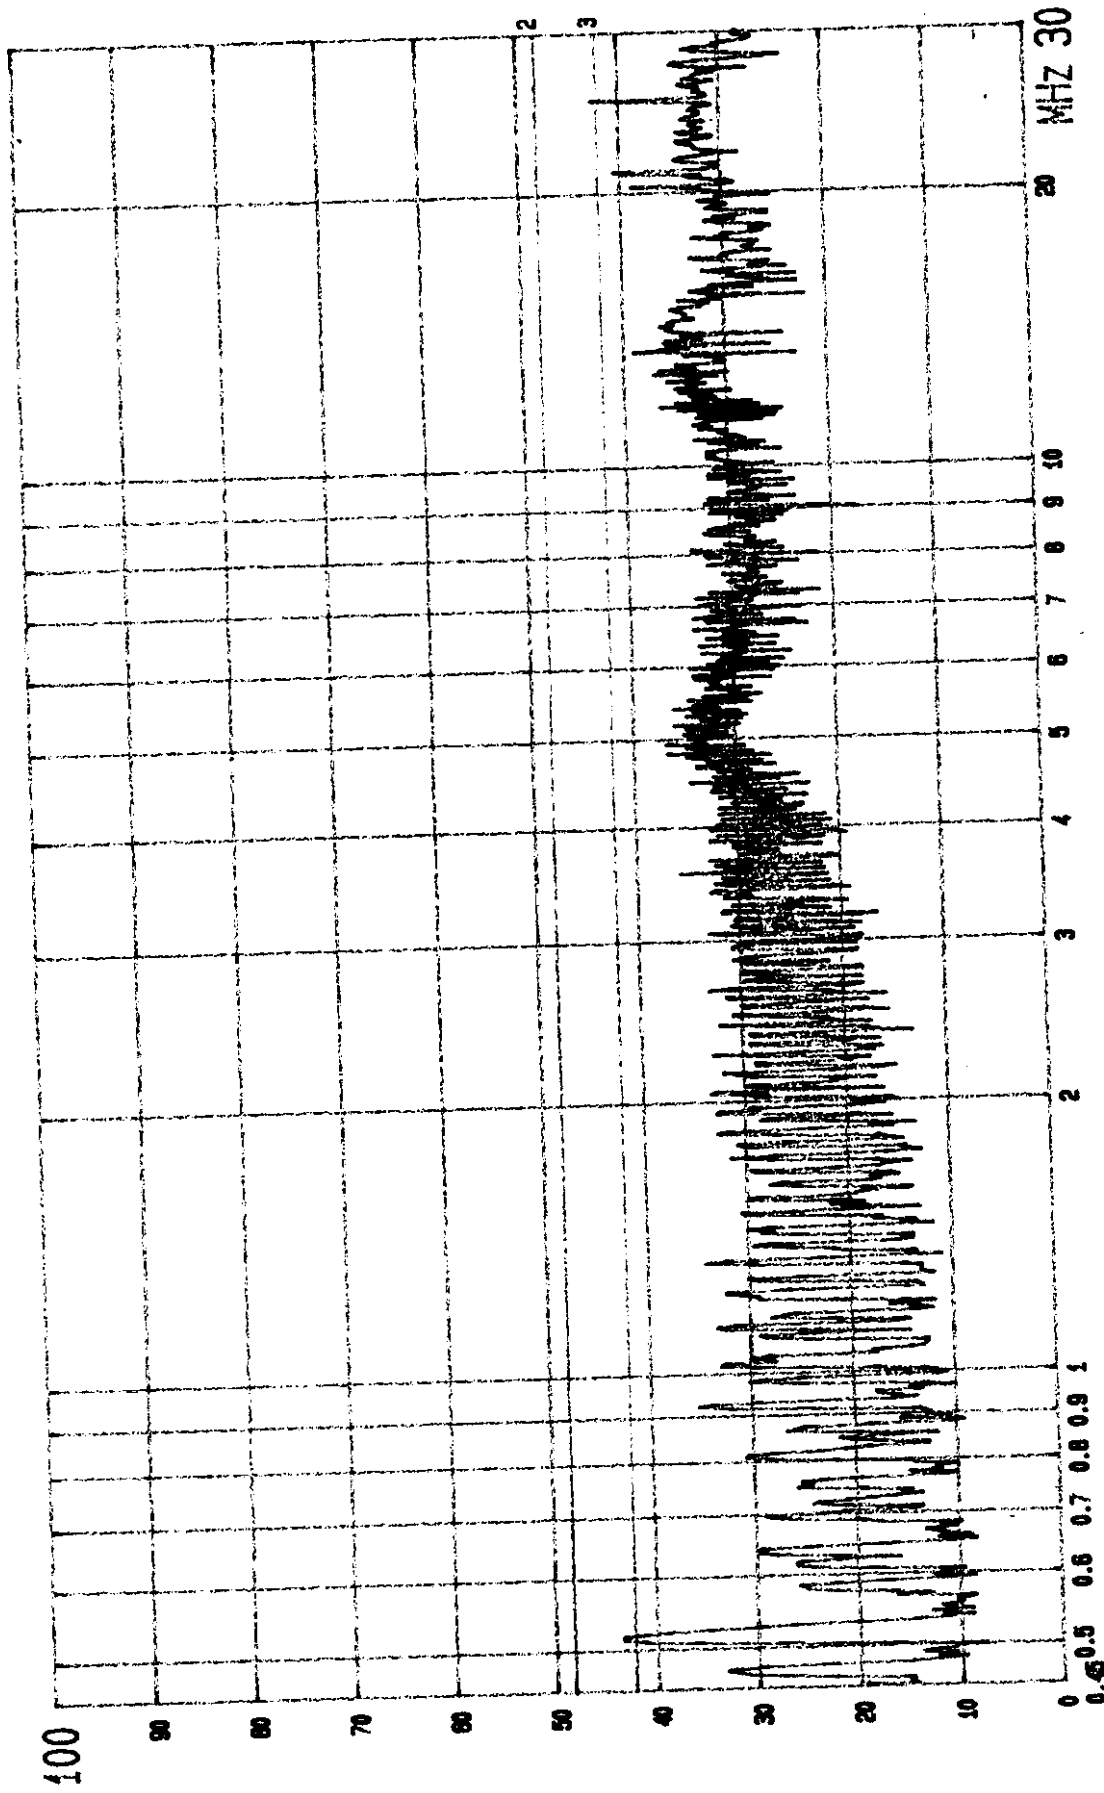


--- Date 10.FEB '99 Time 15:56:50
VIEW SONIC
LINE: VA.

M/N: VCDTS21492-4*
EUT: MONITOR
MENO: (1600X1200; 115KHz) 1.8M D-SUB

PAGE: 001.
(PEAK VALUE) TTEMC.


dBuV

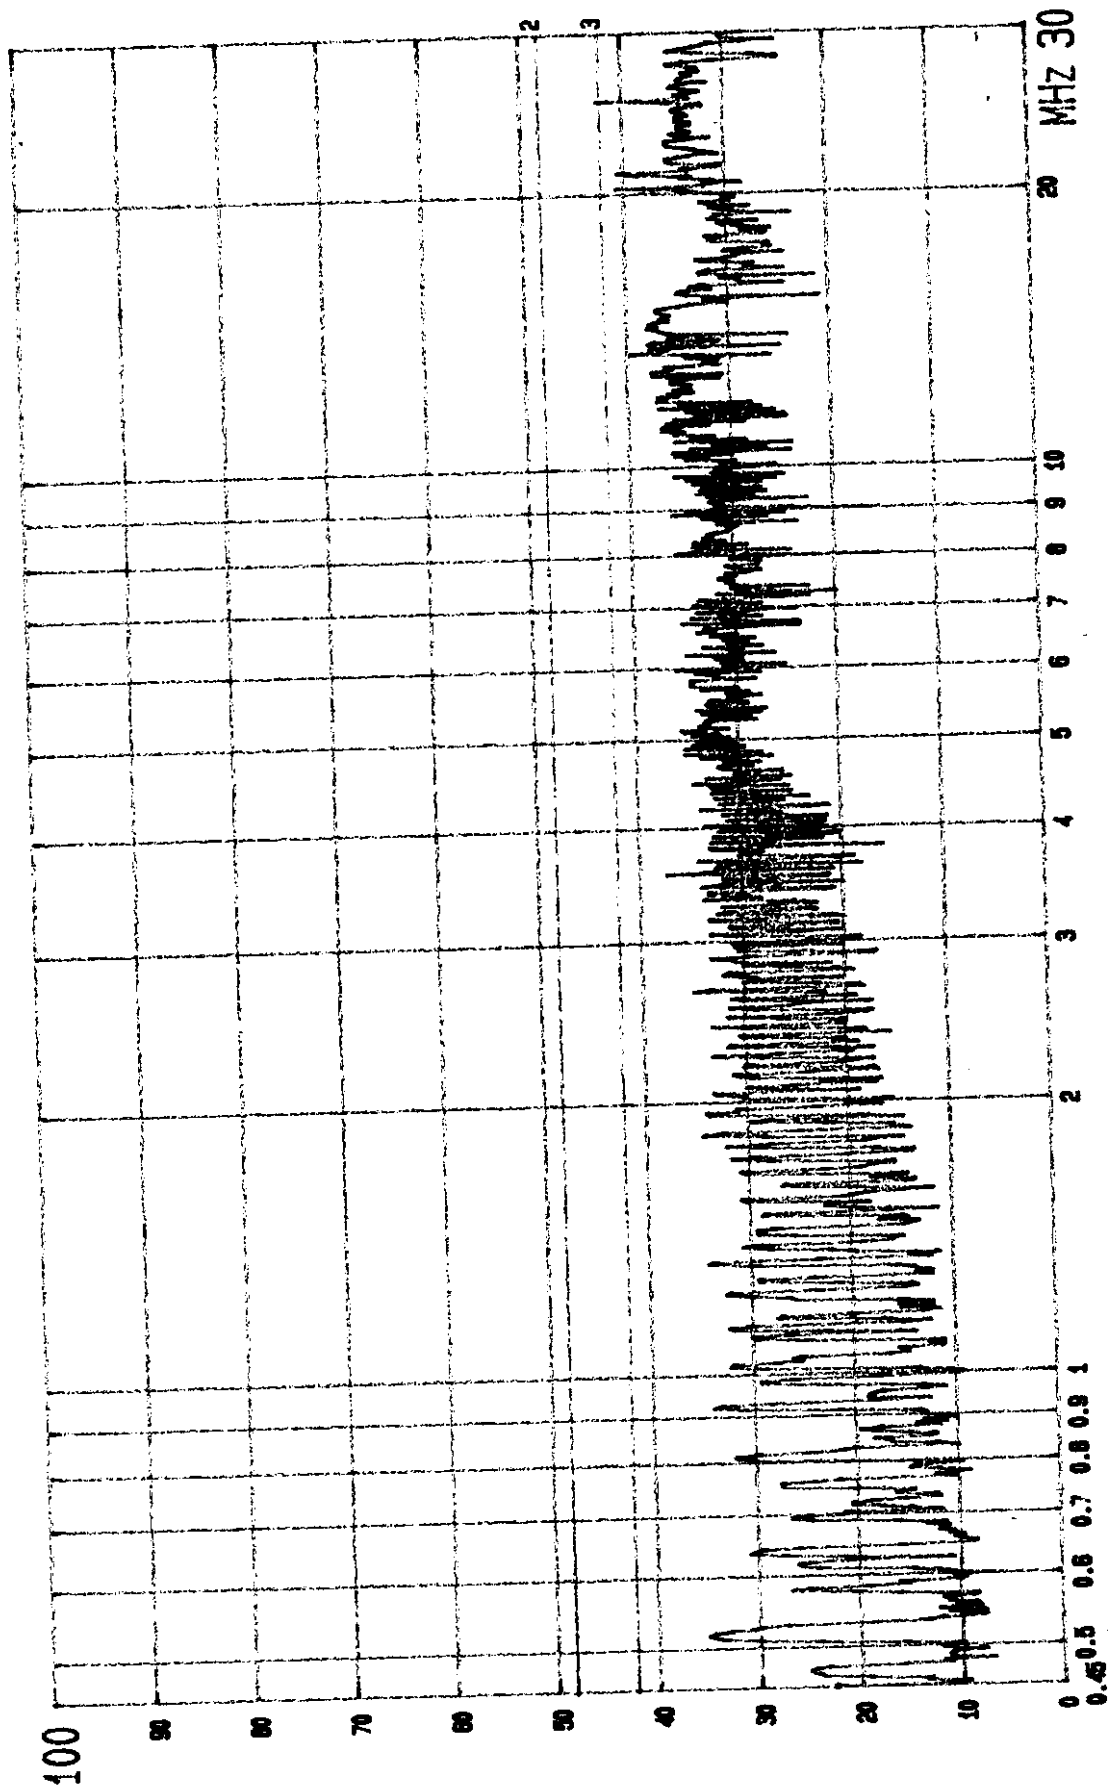

--- Date 10.FEB '99 Time 15:58:37
VIEW SONIC
LINE: VB.

M/N: VCDTS21492-4*
EUT: MONITOR
MEN0: (1600X1200; 115KHz) 1.8M D-SUB

PAGE: 002.
(PEAK VALUE) ITEM C.

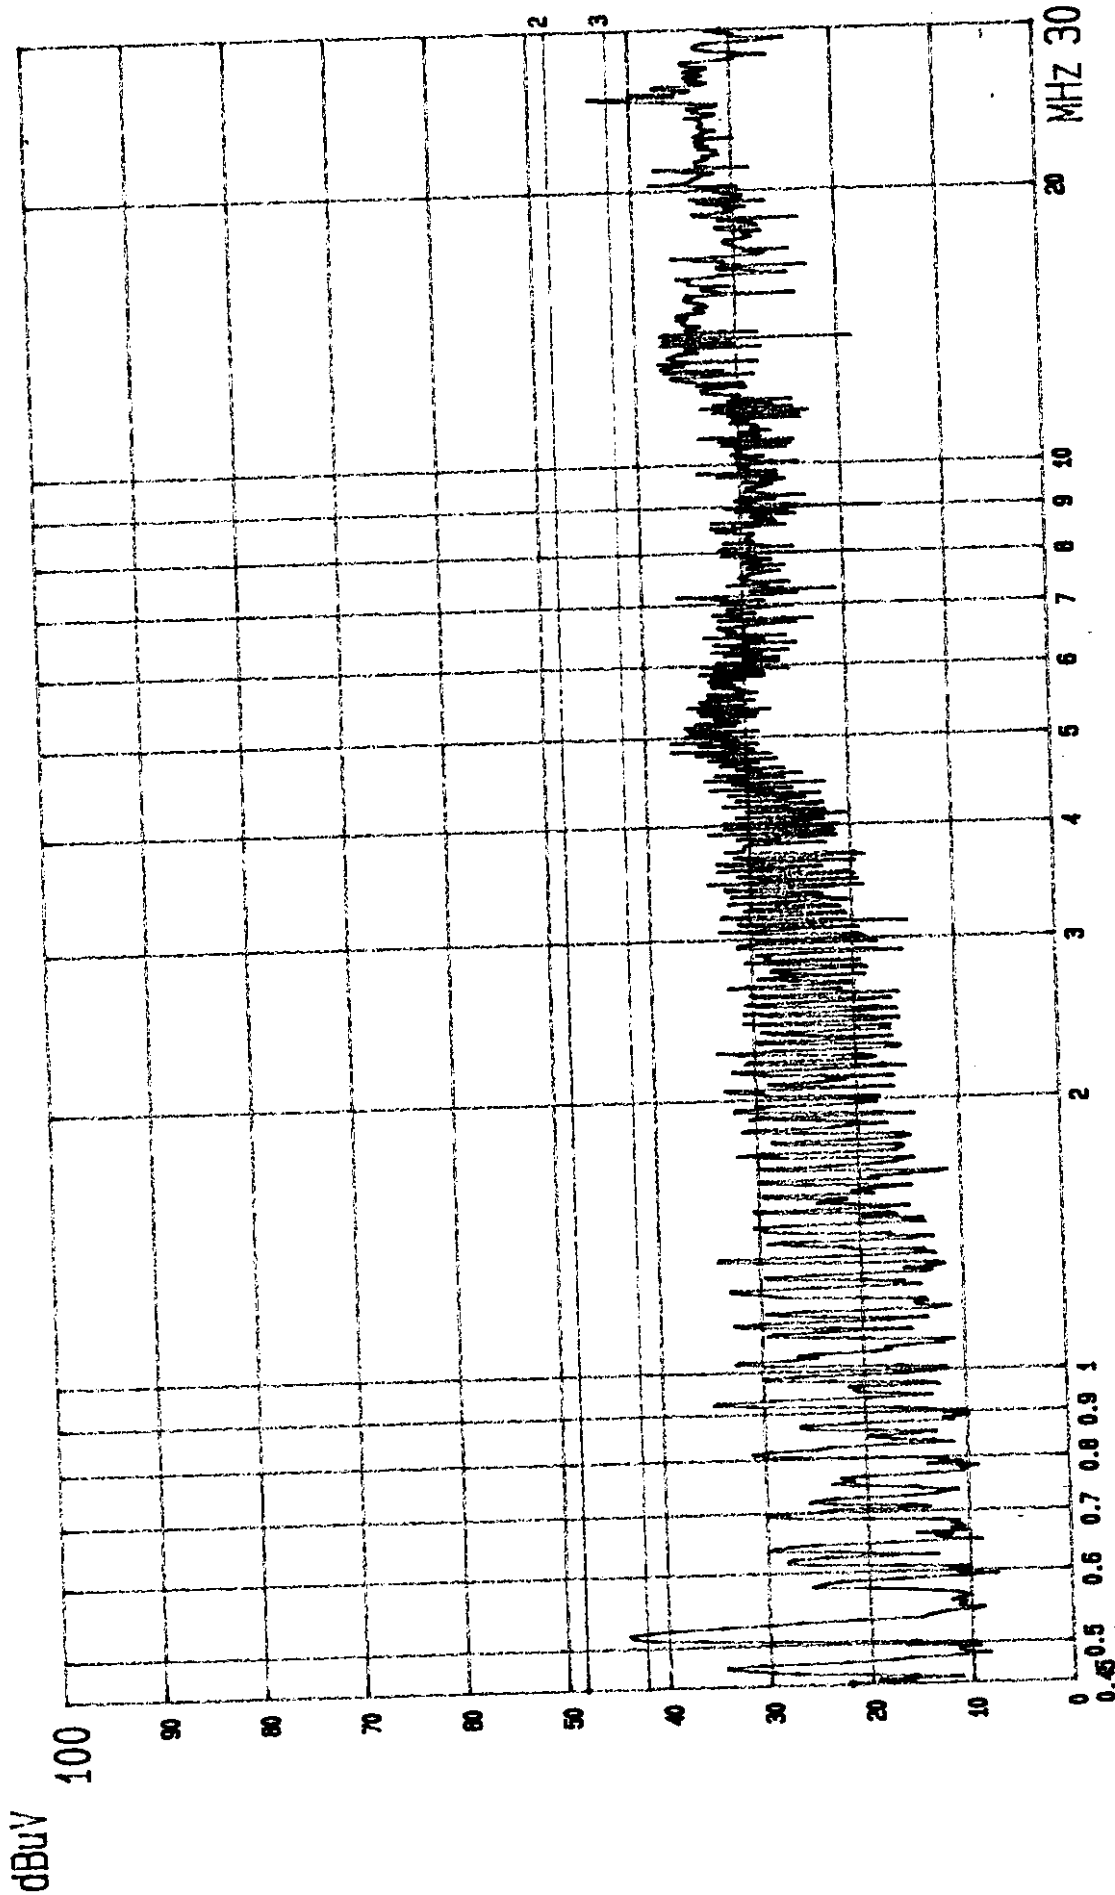


--- Date 10.FEB '99 Time 14:39:51
VIEW SONIC
LINE: VA.

EUT: MONITOR
MENO: (1600X1200; 115KHz) 1.8M BNC

M/N: VCDTS21492-4*

PAGE: 001.
(PEAK VALUE) TTEMPC.

dBuV

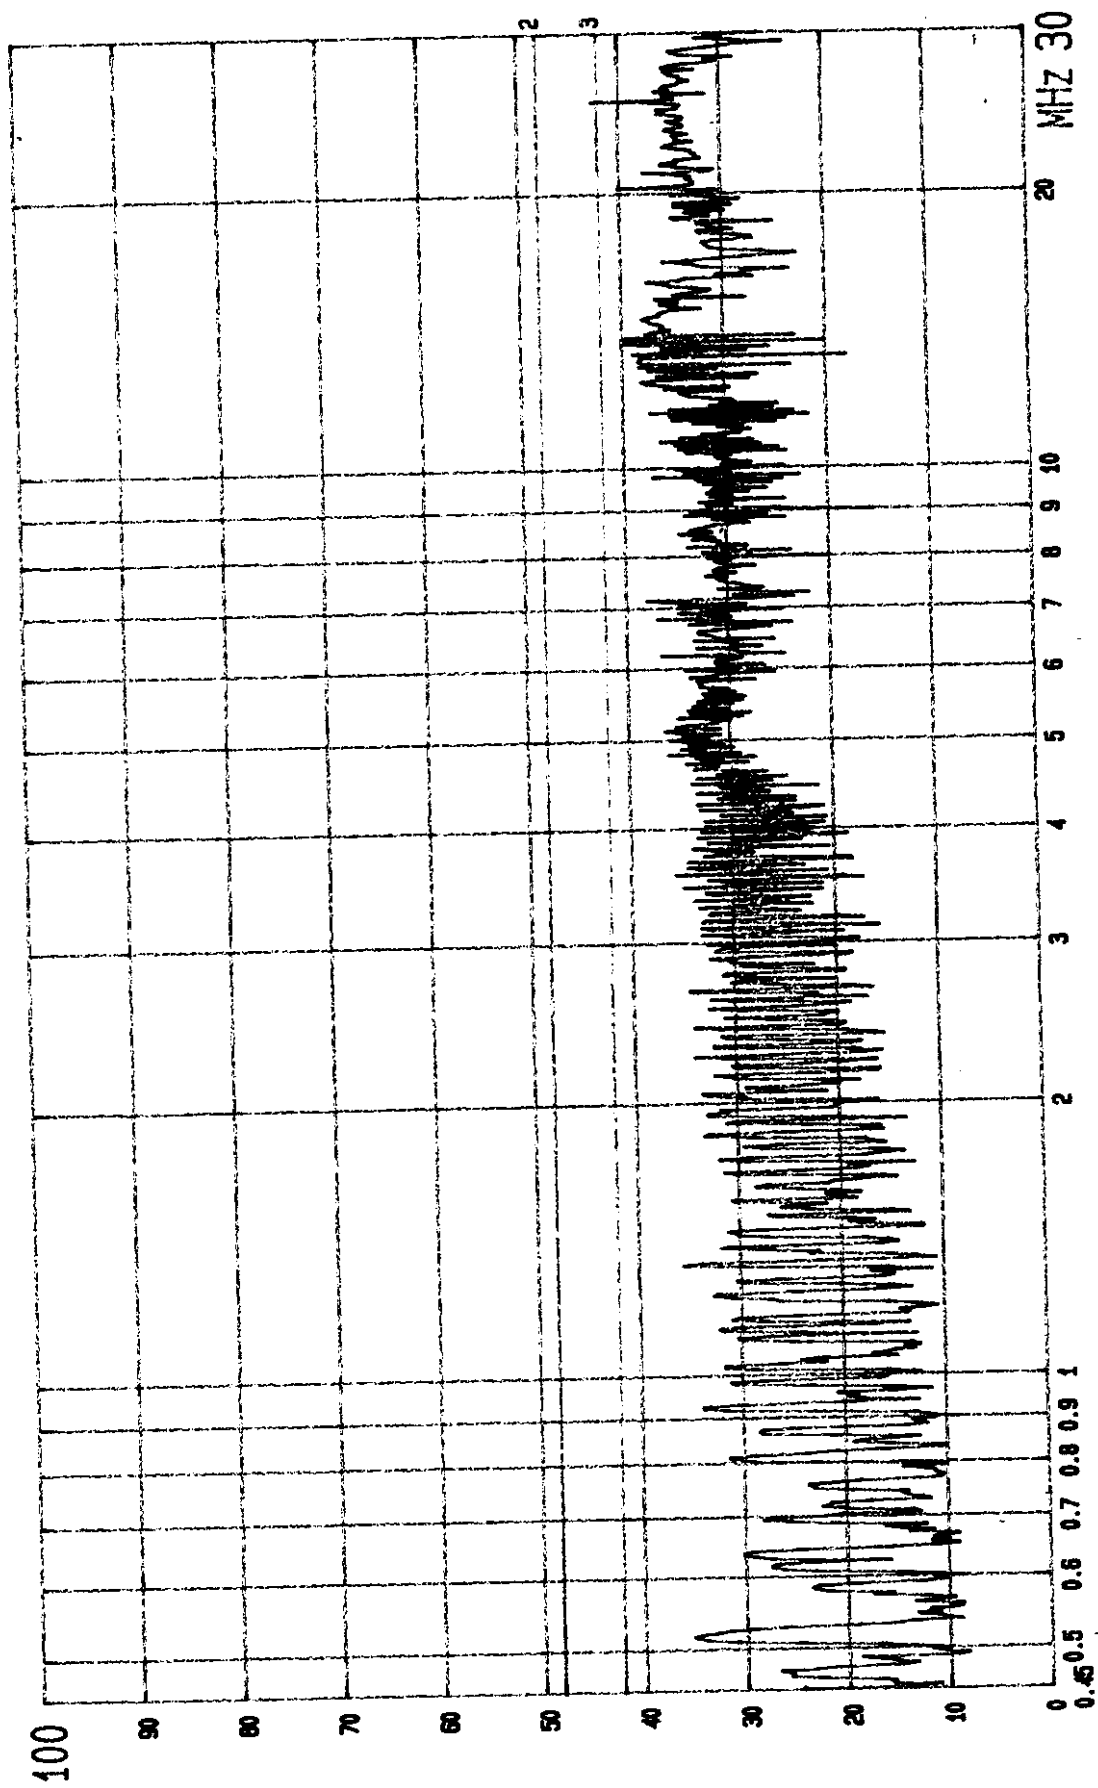

--- Date 10.FEB '99 Time 14:45:11

EUT: MONITOR

M/N: VCDTS21492-4*


PAGE: 002.
(PEAK VALUE) ITEM C.

MEN0: (1600X1200; 115KHz)

1.8M BNC

VIEW SONIC
LINE: VB.

dBuV

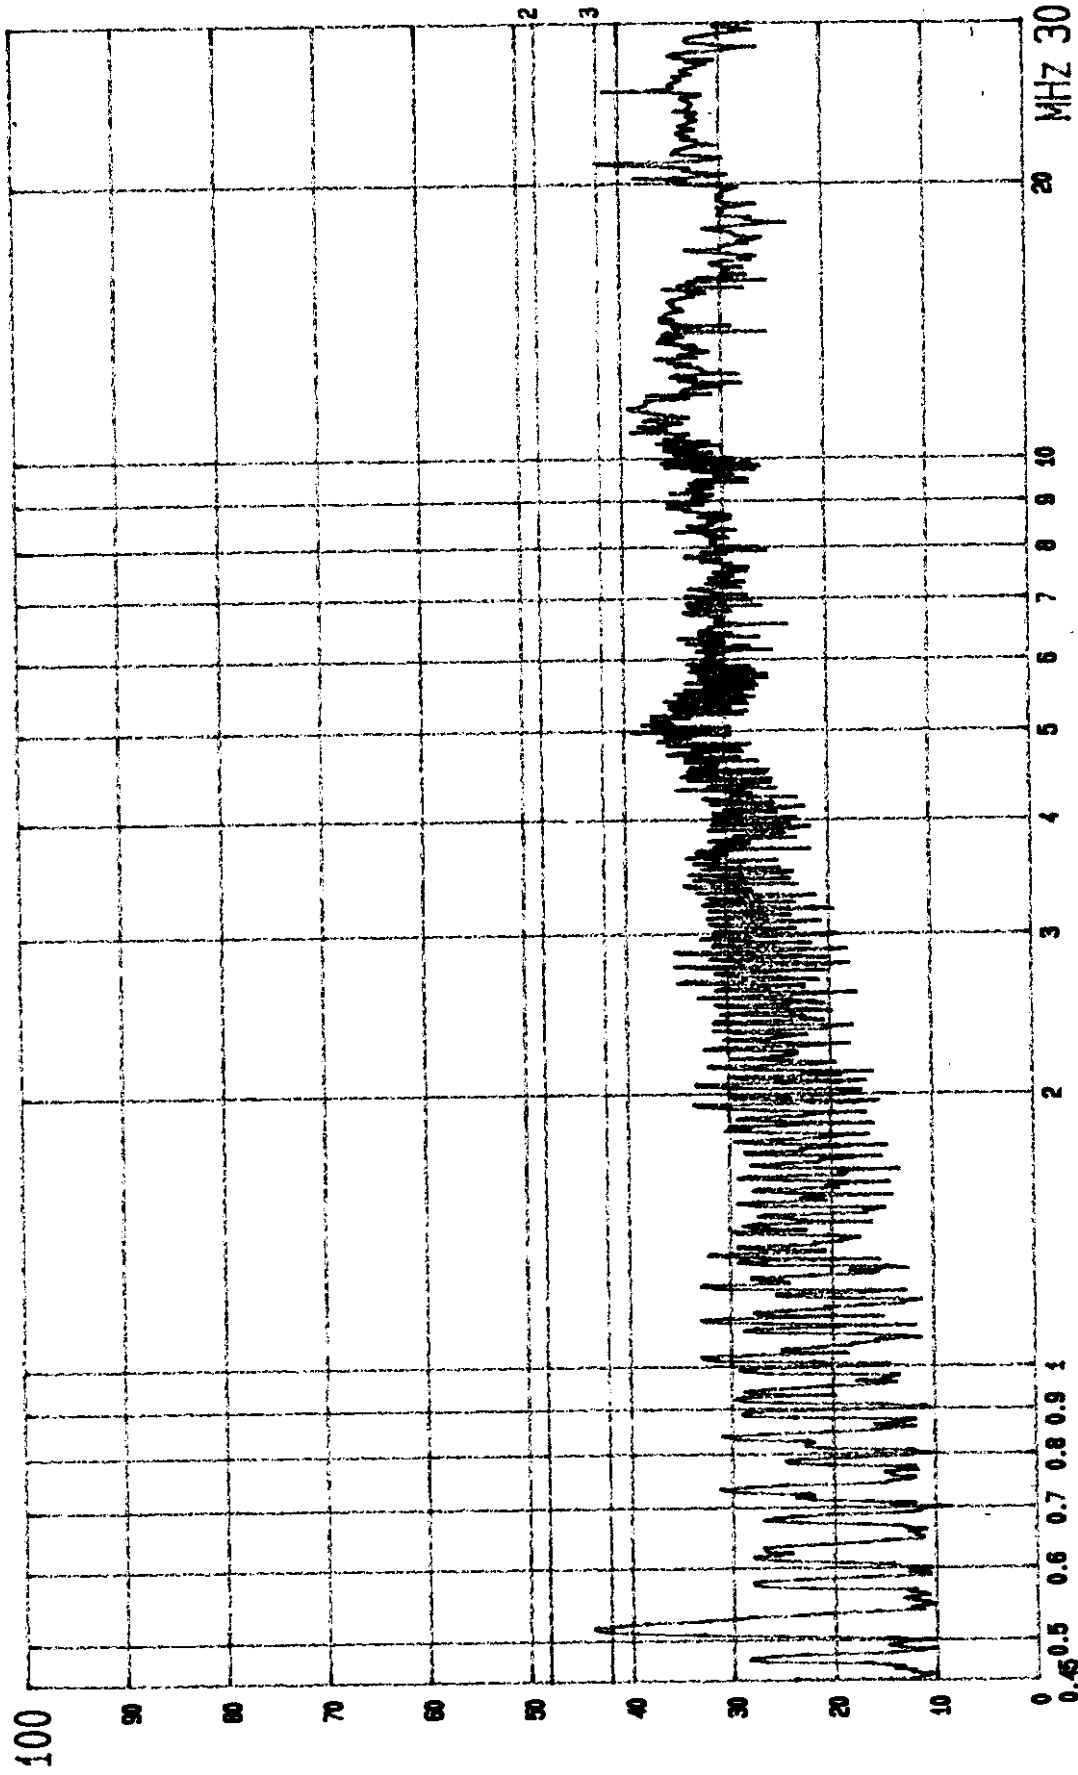

--- Date 10.FEB '99 Time 15:41:23


VIEW SONIC EUT: MONITOR

LINE: VA.

M/N: VCDTS21492-4*

MEN0: (1800X1440; 105KHZ) 1.5M D-SUB

PAGE: 001.
(PEAK VALUE) TTEM C.

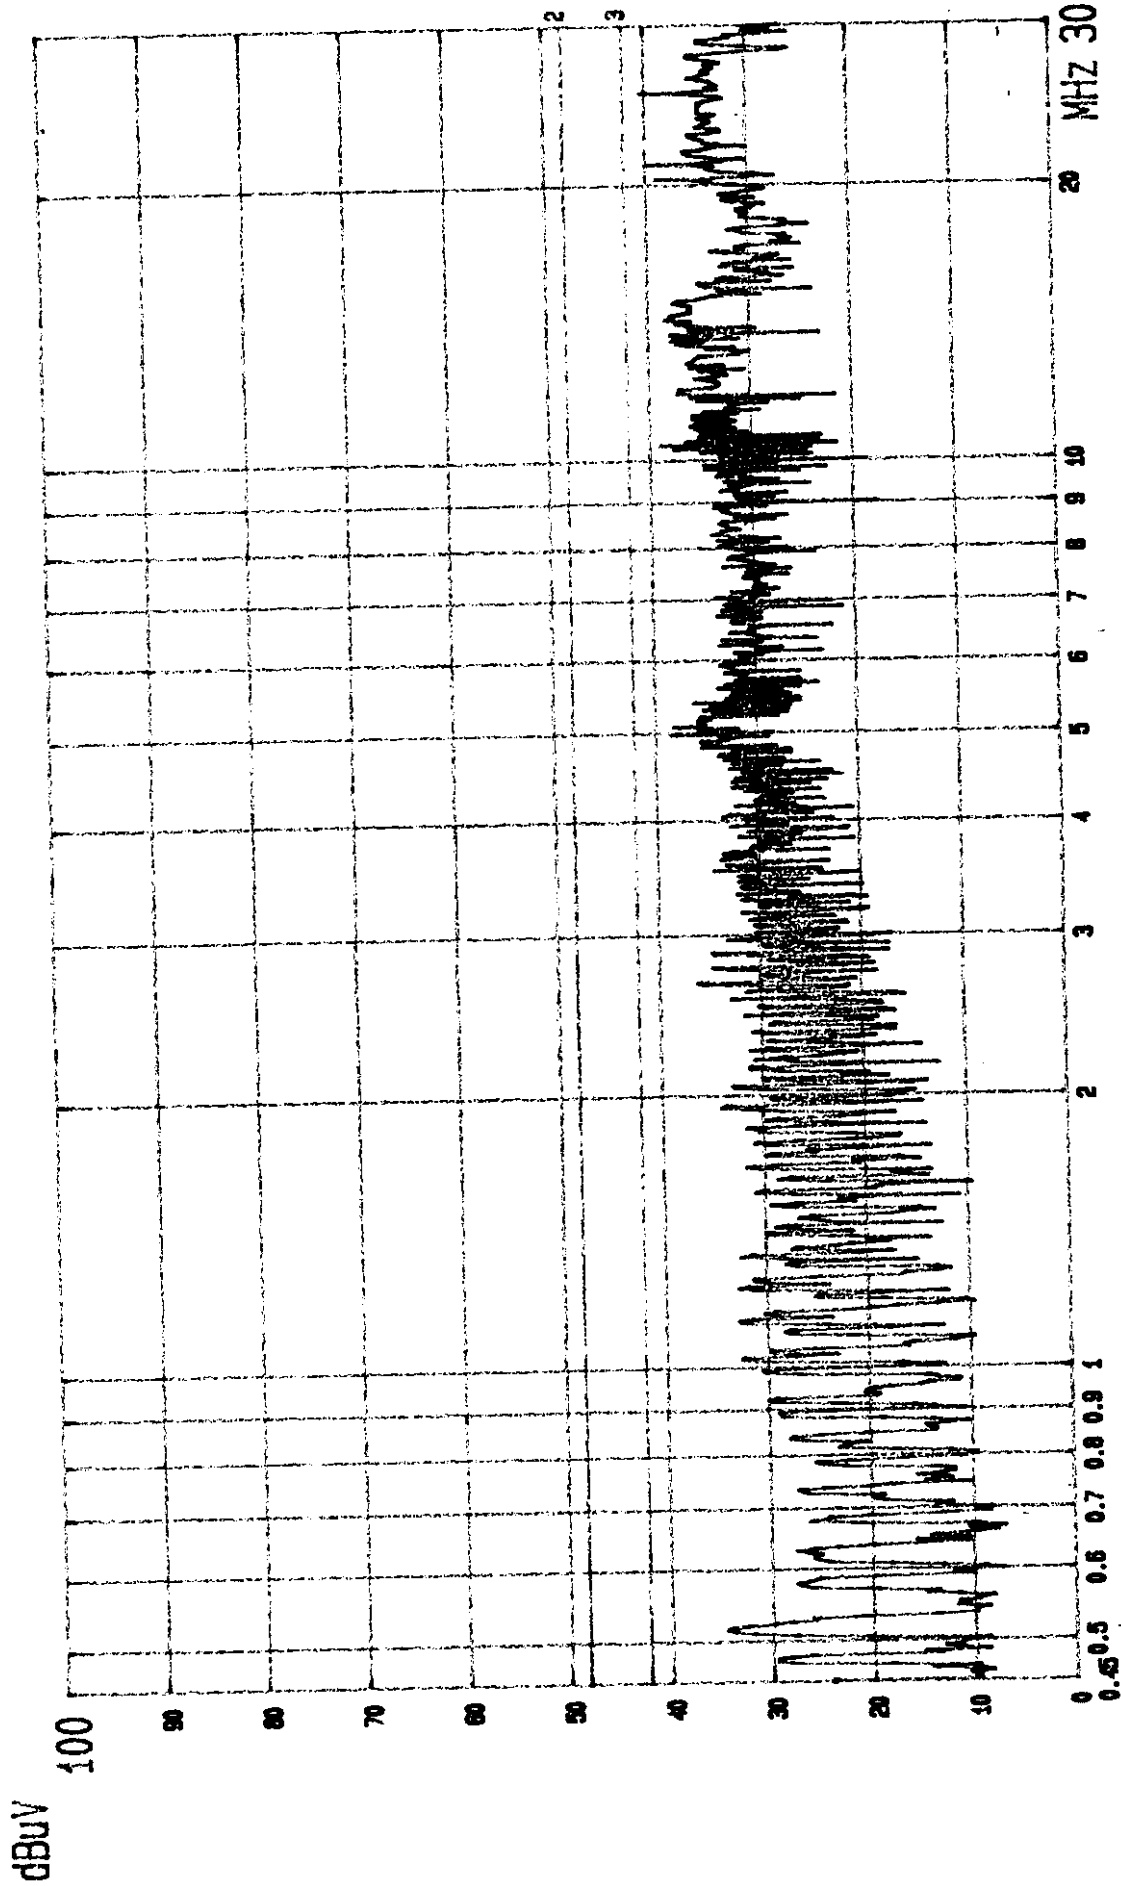

--- Date 10.FEB '99 Time 15:43:13

VIEW SONIC EUT: MONITOR


LINE: VB.

M/N: VCDTS21492-4*

MEN0: (1800X1440; 105KHz) 1.5M D-SUB

PAGE: 002.
(PEAK VALUE) ITEM C.

dBuV

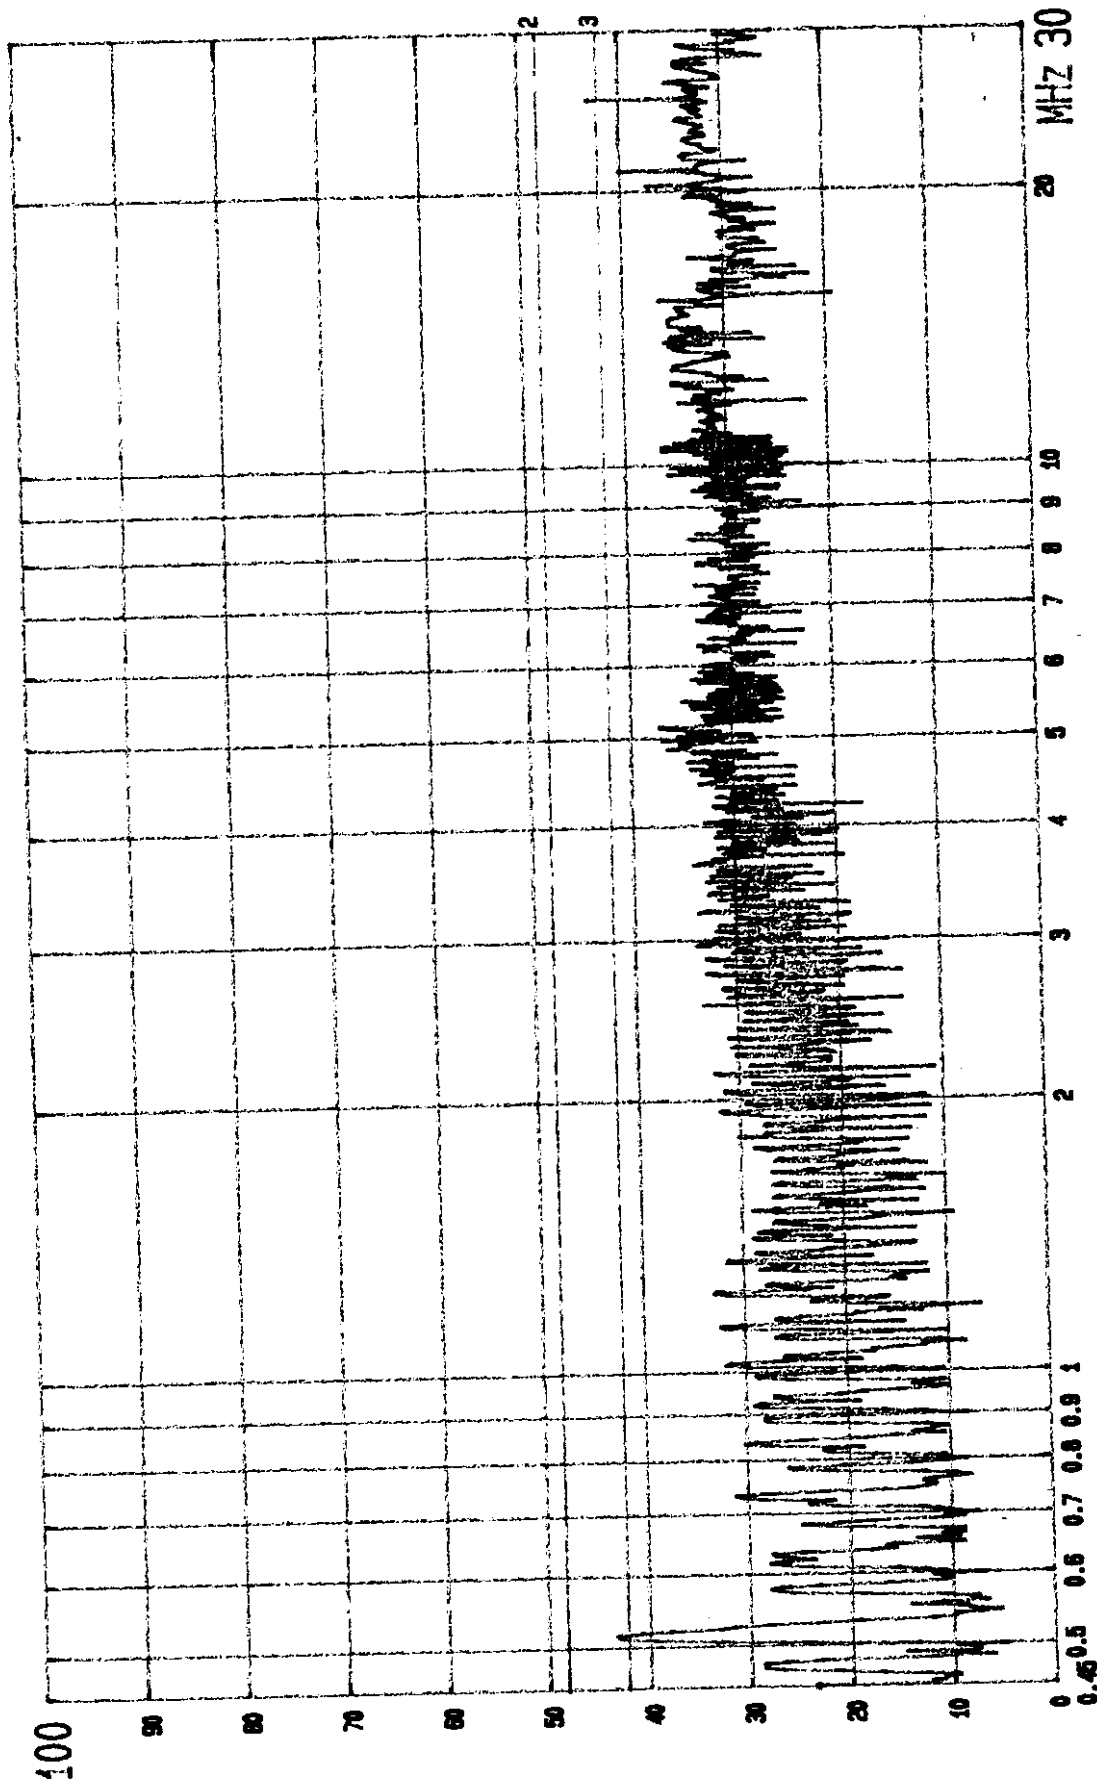

--- Date 10.FEB '99 Time 15:51:23

VIEW SONIC EUT: MONITOR


LINE: VA.

M/N: VCDTS21492-4*

MEN0: (1800X1440; 105KHz) 1.8M D-SUB

PAGE: 002.
(PEAK VALUE) TTEMC.

dBuV

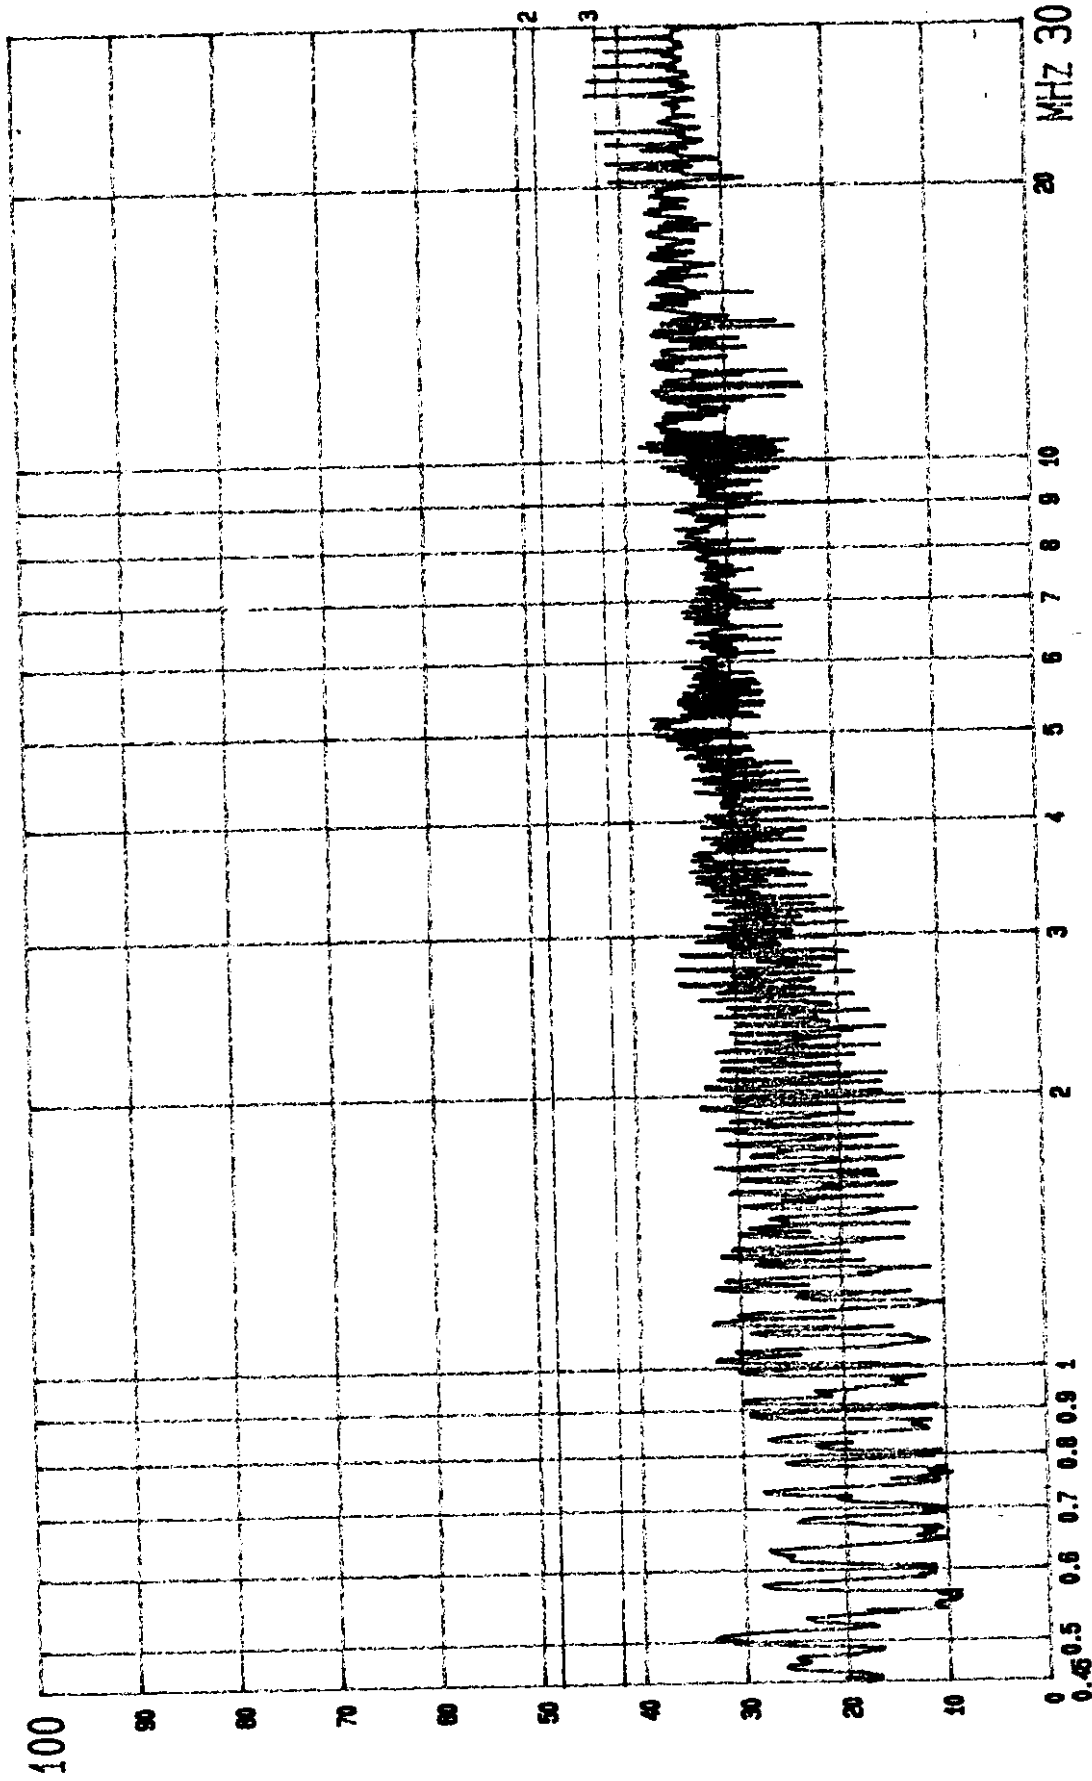


--- Date 10.FEB '99 Time 15:49:24

VIEW SONIC EUT: MONITOR

LINE: VB. MENO: (1800X1440; 105KHz) 1.8M D-SUB

M/N: VCDTS21492-4*

PAGE: 001.
(PEAK VALUE) TTEMC.

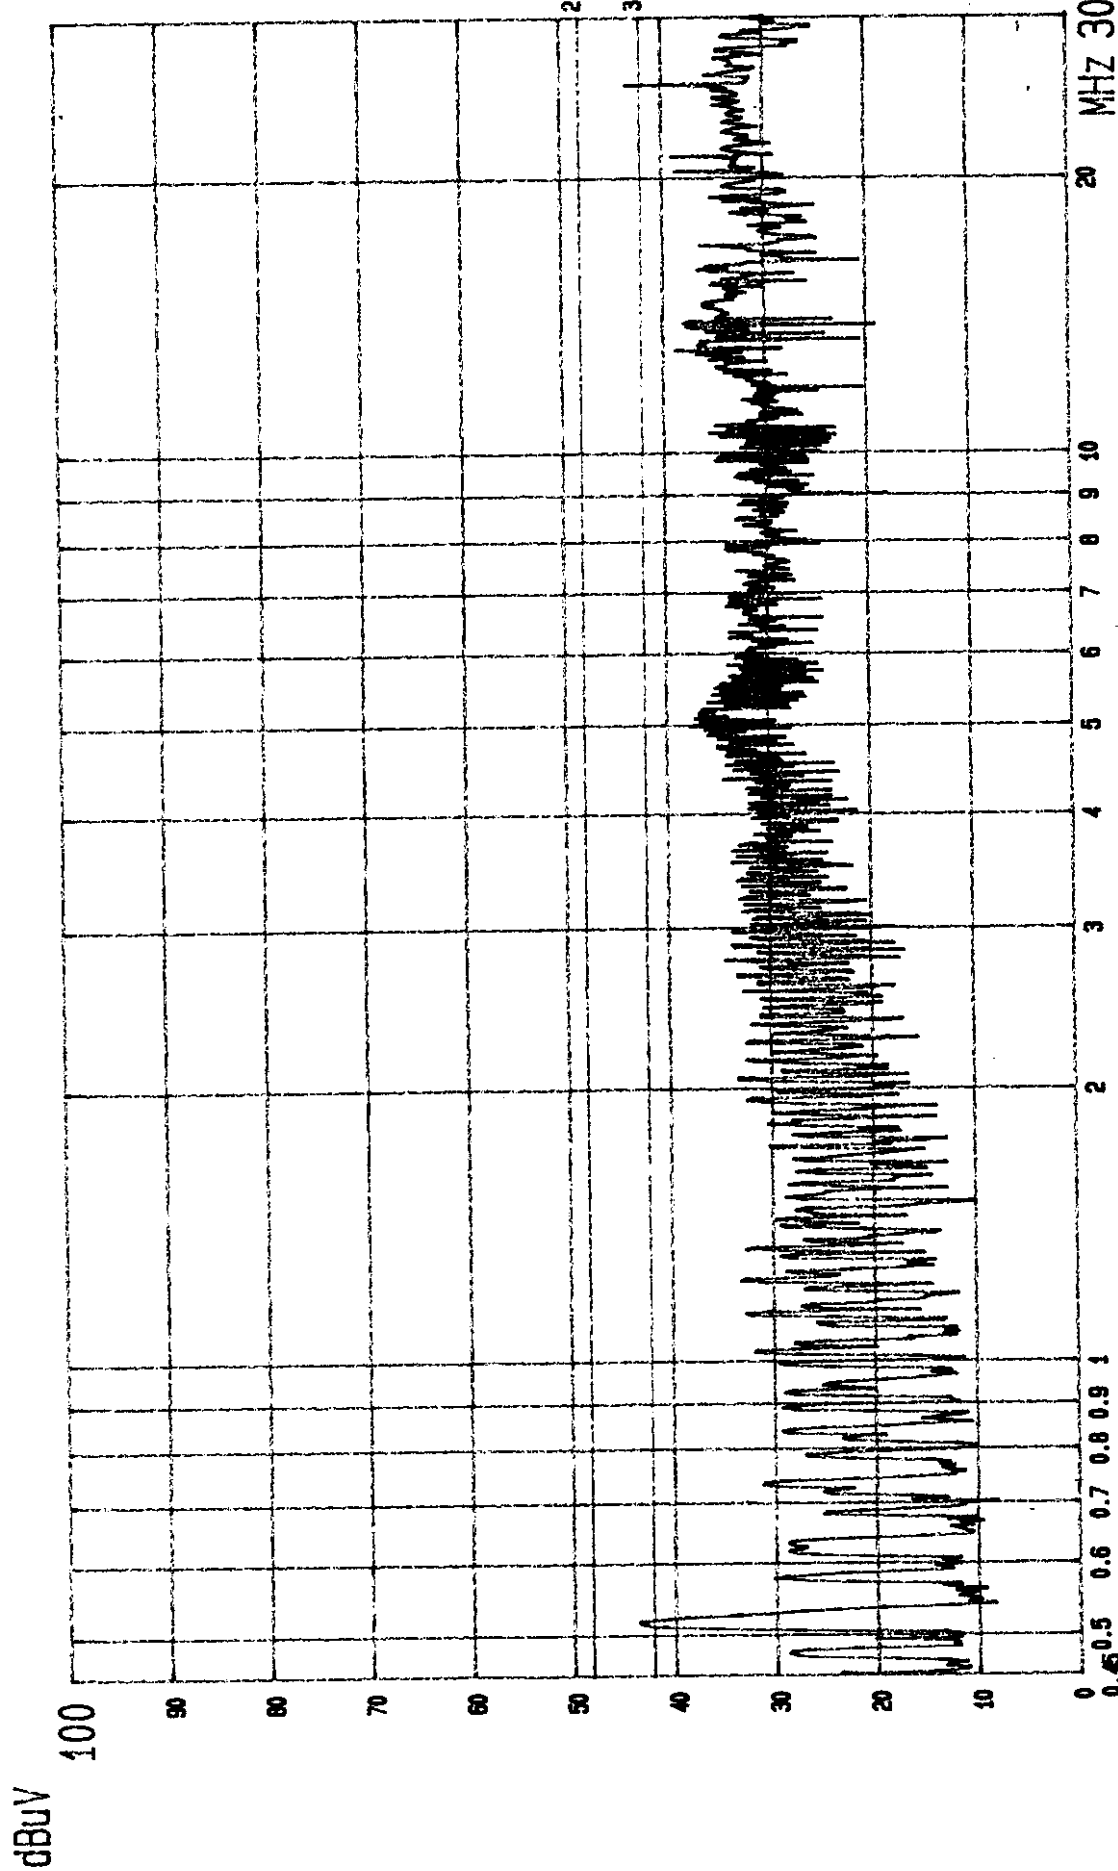

--- Date 10.FEB '99 Time 14:27:22

VIEW SONIC EUT: MONITOR


LINE: VA.

M/N: VCDTS21492-4*

MEN0: (1800X1440; 105KHz) 1.8M BNC

PAGE: 001.
(PEAK VALUE) ITEM C.

dBuV

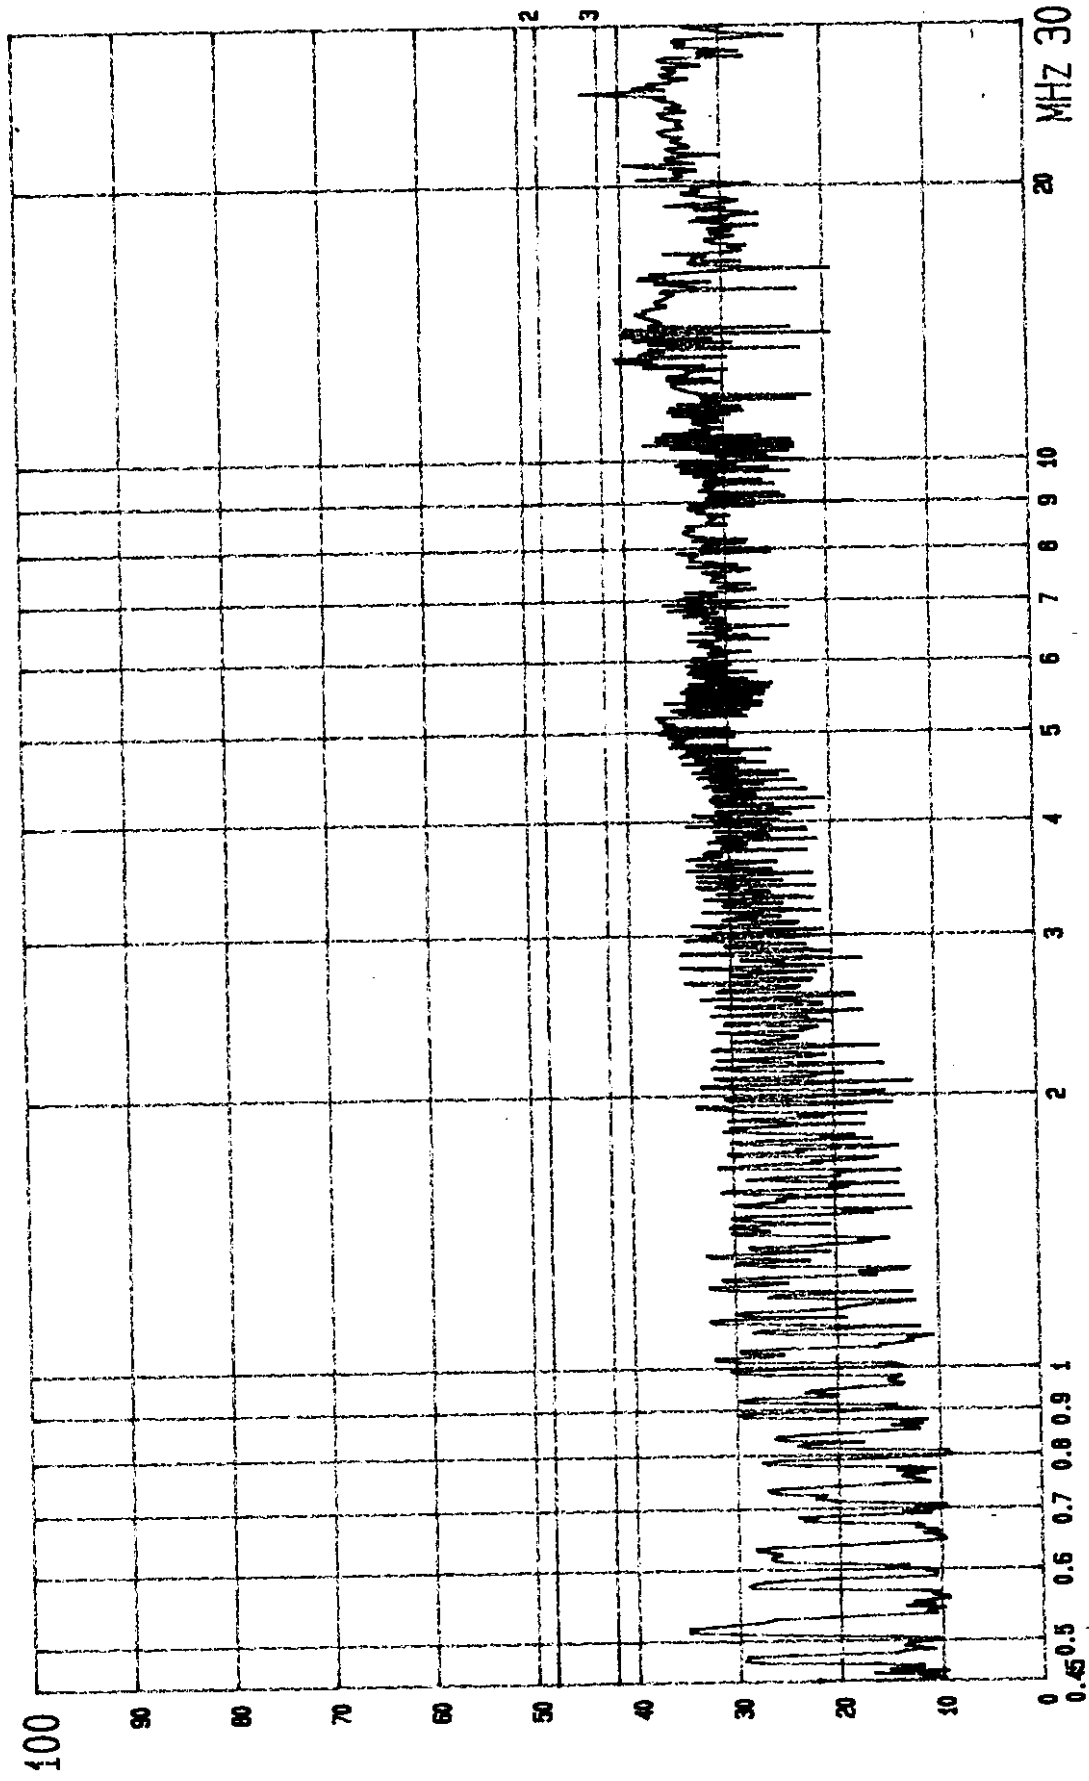

---- Date 10.FEB '99 Time 14:24:32

VIEW SONIC EUT: MONITOR


LINE: VB. MENO: (1800X1440; 105KHz) 1.8M BNC

M/N: VCDTS21492-4*


PAGE: 002.
(PEAK VALUE) TTEMG.

APPENDIX II


Page#1: 750 SP File#1: U1820701.E1 Date: 02-05-1999 Time: 17:07:08
 400MHz ANECHOIC CHAMBER TAIWAN TOKIN EMC ENG. CORP.

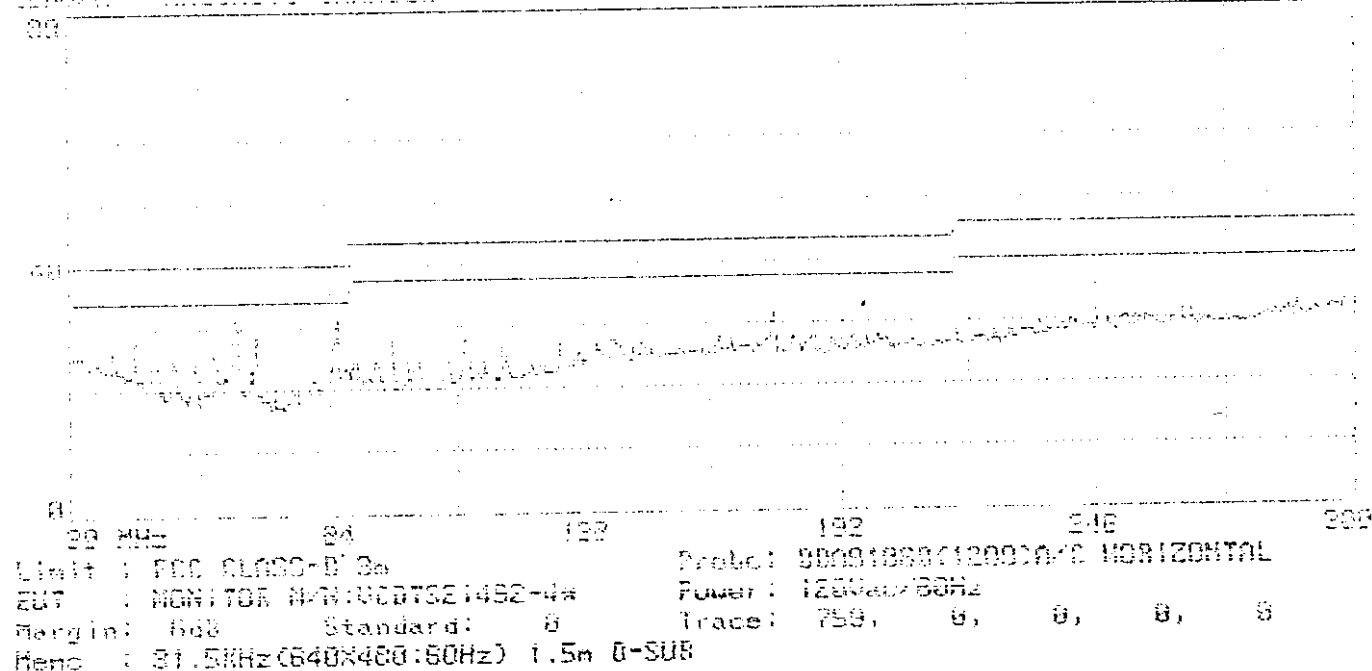


Page#1: 760 SP File#1: U1820701.E1 Date: 02-05-1999 Time: 17:09:00
 400MHz ANECHOIC CHAMBER TAIWAN TOKIN EMC ENG. CORP.

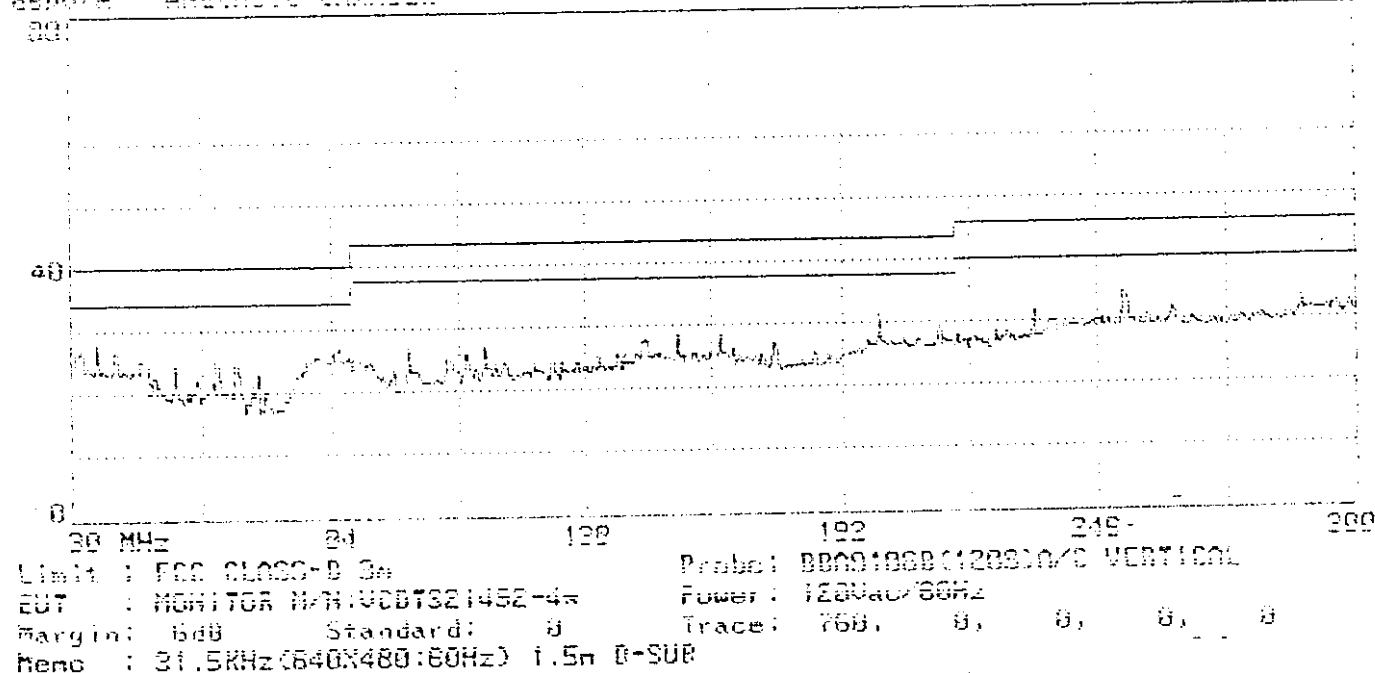


Page#1: 761 SP File#1: VIEWSONI.E1 Date: 82-05-1999 Time: 17:11:58
 40dB/10cm ANECHOIC CHAMBER TAIWAN TOKIN EMC ENG. CORP.

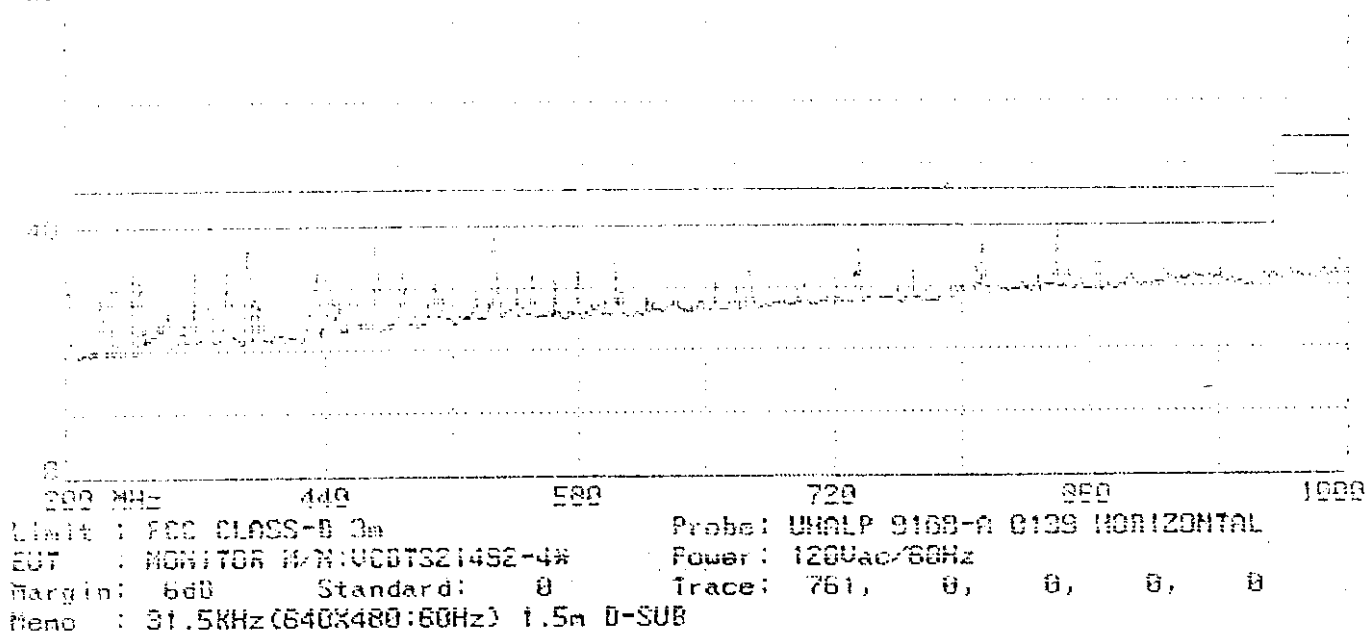


Page#1: 762 SP File#1: VIEWSONI.E1 Date: 82-05-1999 Time: 17:13:10
 40dB/10cm ANECHOIC CHAMBER TAIWAN TOKIN EMC ENG. CORP.

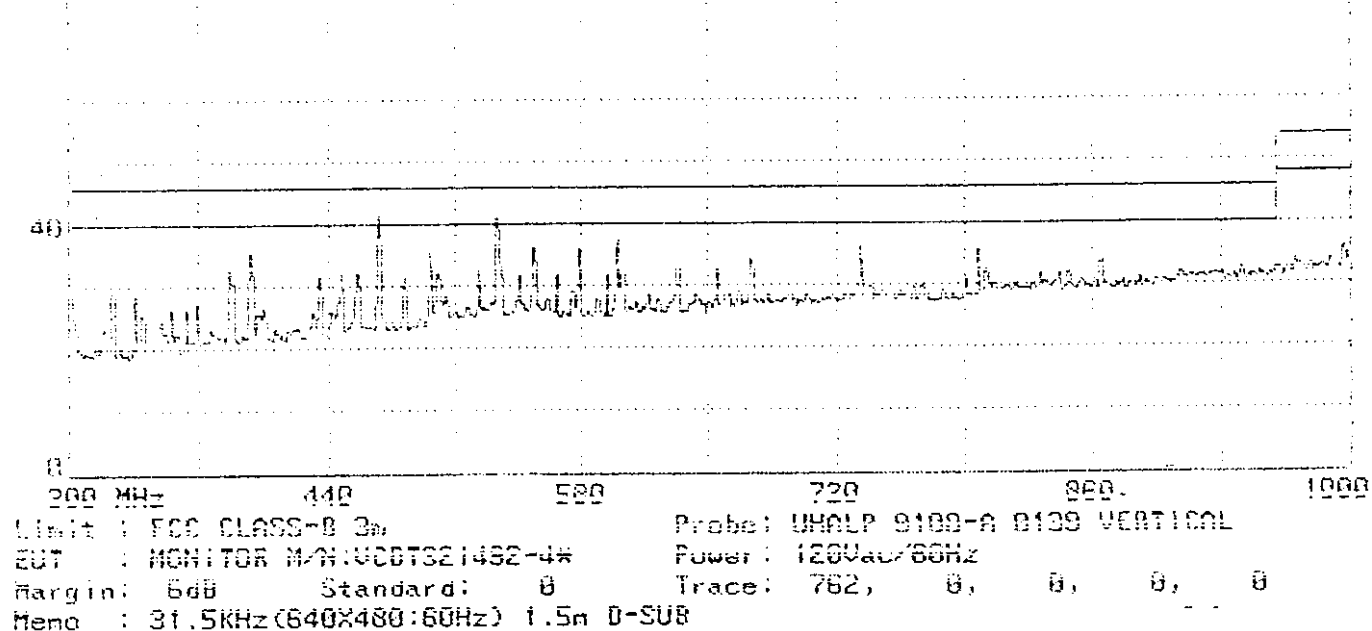


Page#1: 757 SP File#1: VIEWSONI E1 Date: 02-05-1999 Time: 17:01:24
 42004- ANECHOIC CHAMBER TAIWAN TOKIN ENG. ENG. CORP.
 00.

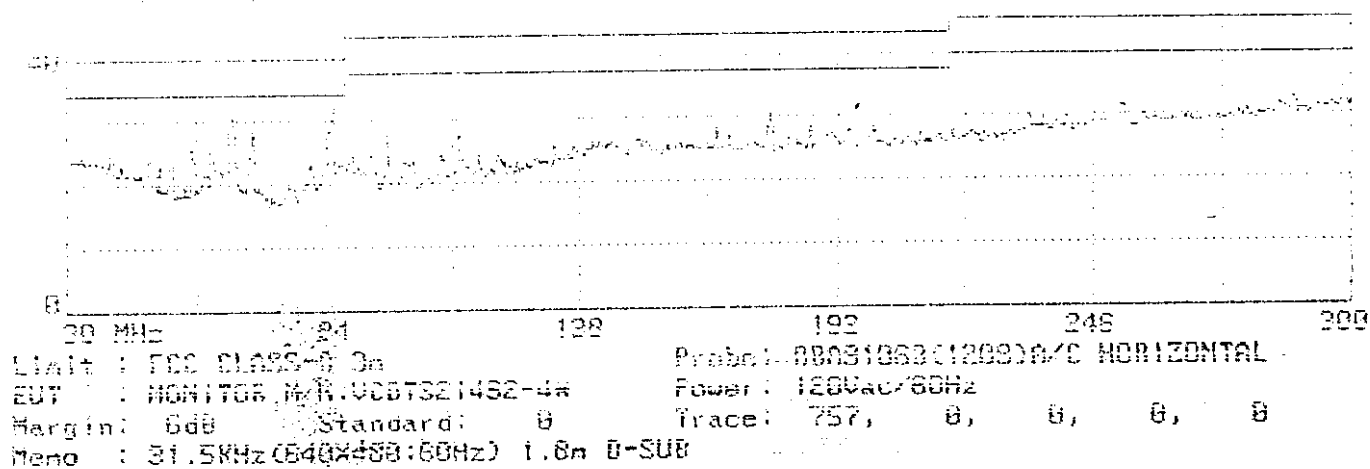


Page#1: 758 SP File#1: VIEWSONI E1 Date: 02-05-1999 Time: 17:02:50
 42004- ANECHOIC CHAMBER TAIWAN TOKIN ENG. ENG. CORP.
 00.

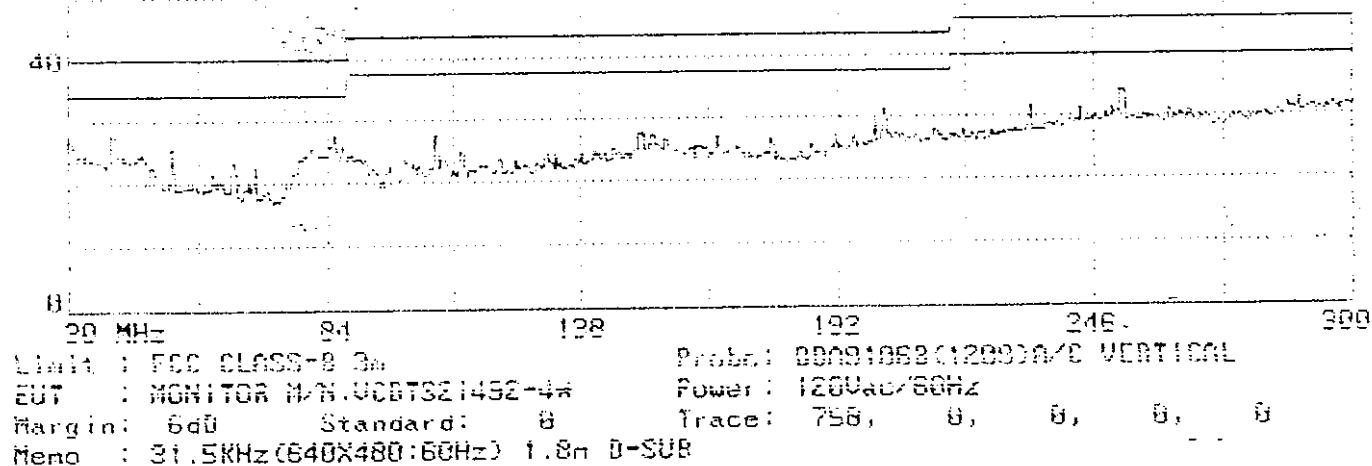


Page#: 755 SP File#: VIEWSONI E1 Date: 02-05-1999 Time: 16:57:29
 4500V/m ANECHOIC CHAMBER TAIWAN TOKIN ENG. ENG. CORP.

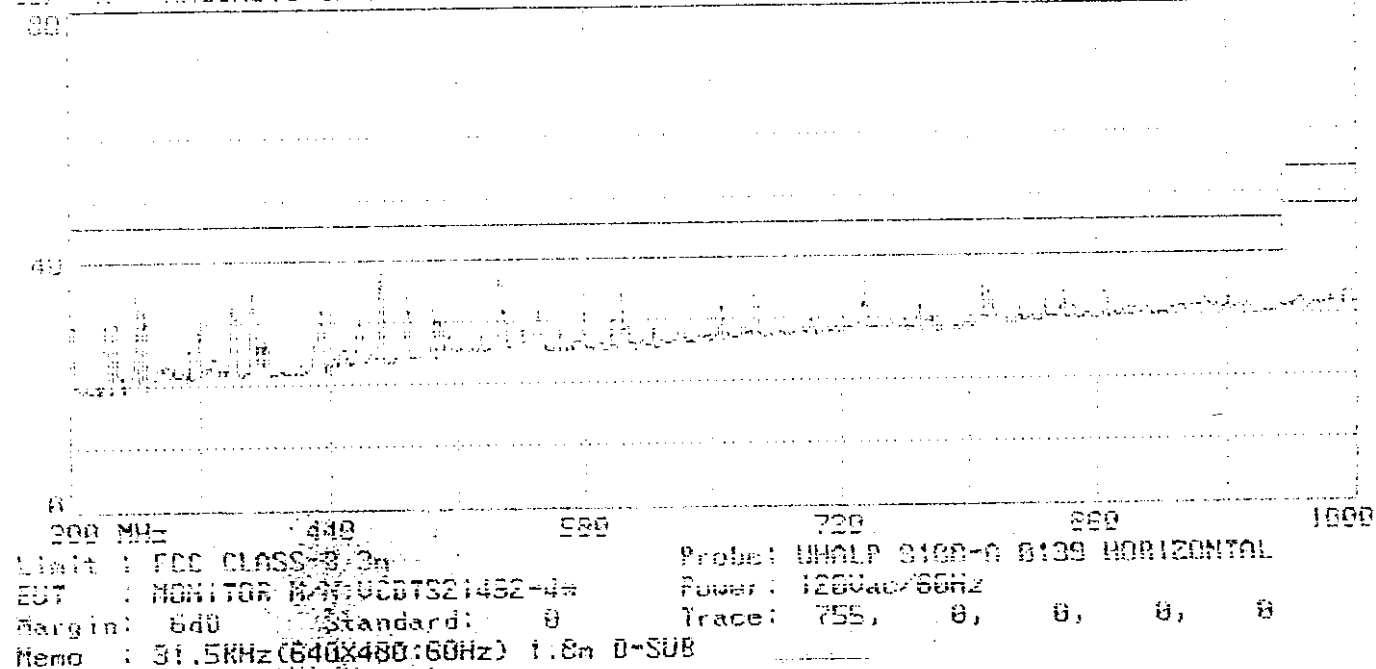


Page#: 756 SP File#: VIEWSONI E1 Date: 02-05-1999 Time: 16:58:59
 4500V/m ANECHOIC CHAMBER TAIWAN TOKIN ENG. ENG. CORP.

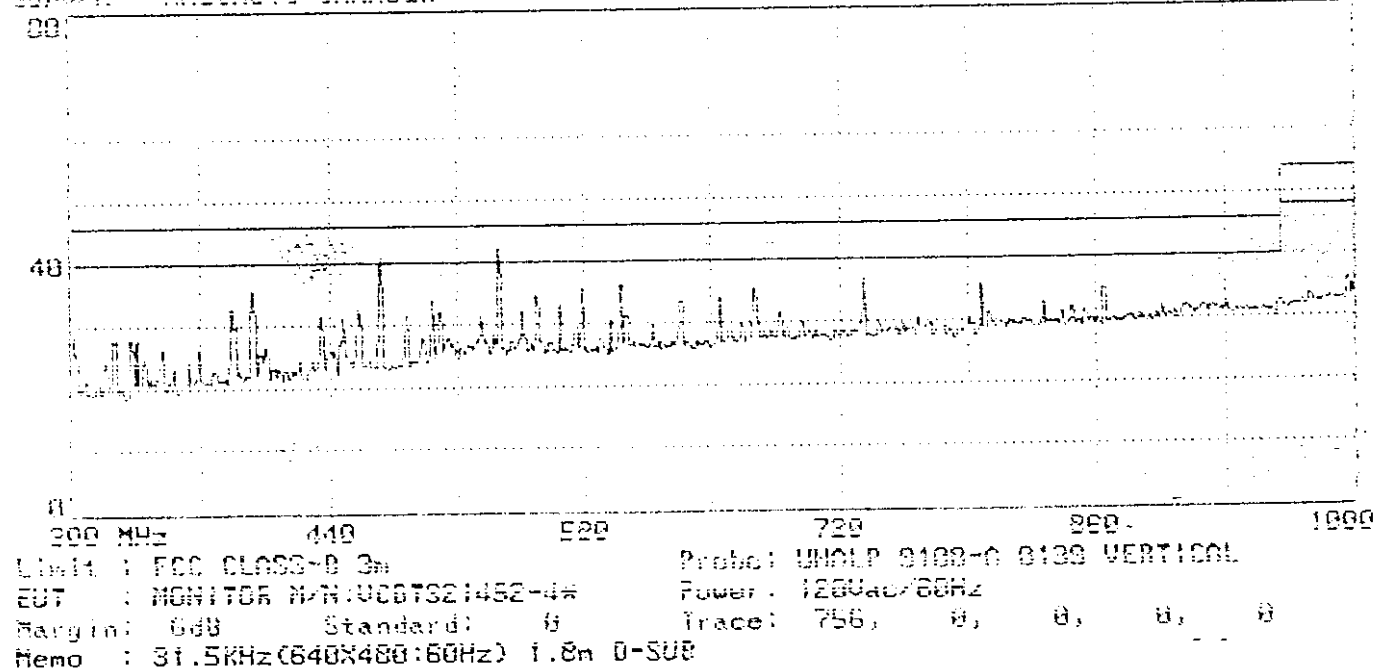


Page#: 751 SP File#: VIEWSDN1.E1 Date: 82-05-1989 Time: 16:49:18
 dBm/Hz ANECHOIC CHAMBER TAIWAN TOKIN EMC ENG. CORP.

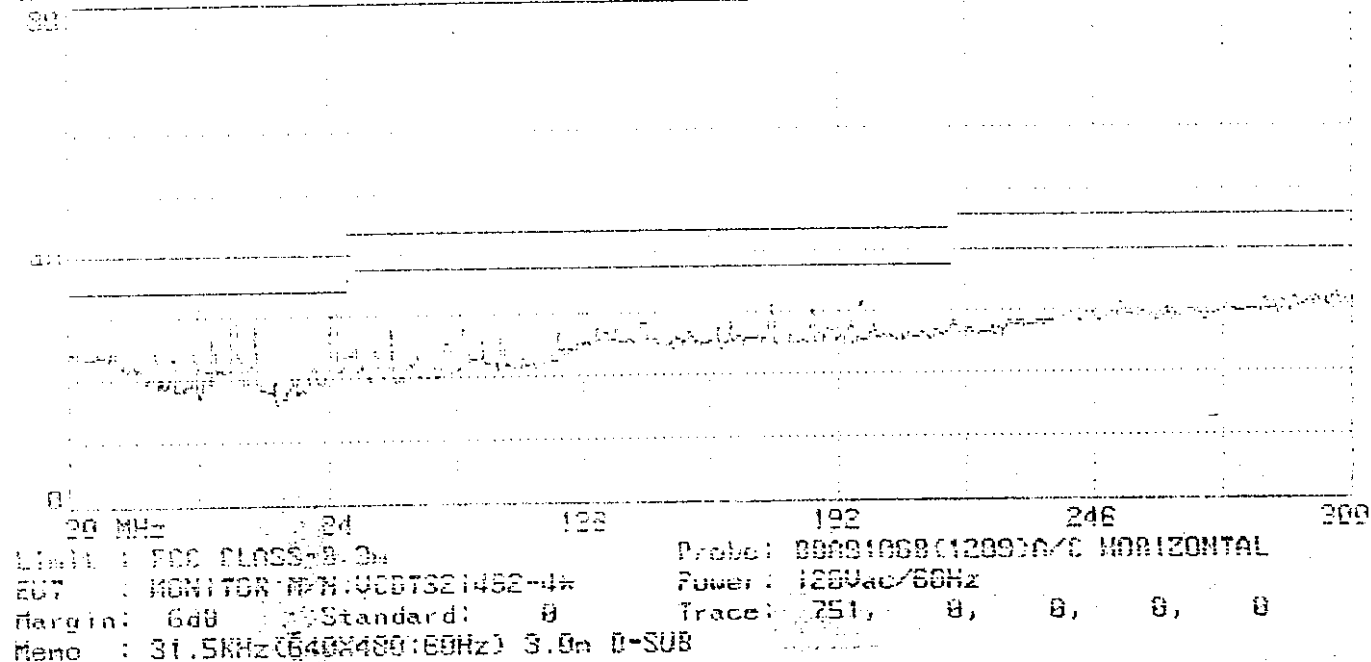


Page#: 752 SP File#: VIEWSDN1.E1 Date: 82-05-1989 Time: 16:50:26
 dBm/Hz ANECHOIC CHAMBER TAIWAN TOKIN EMC ENG. CORP.

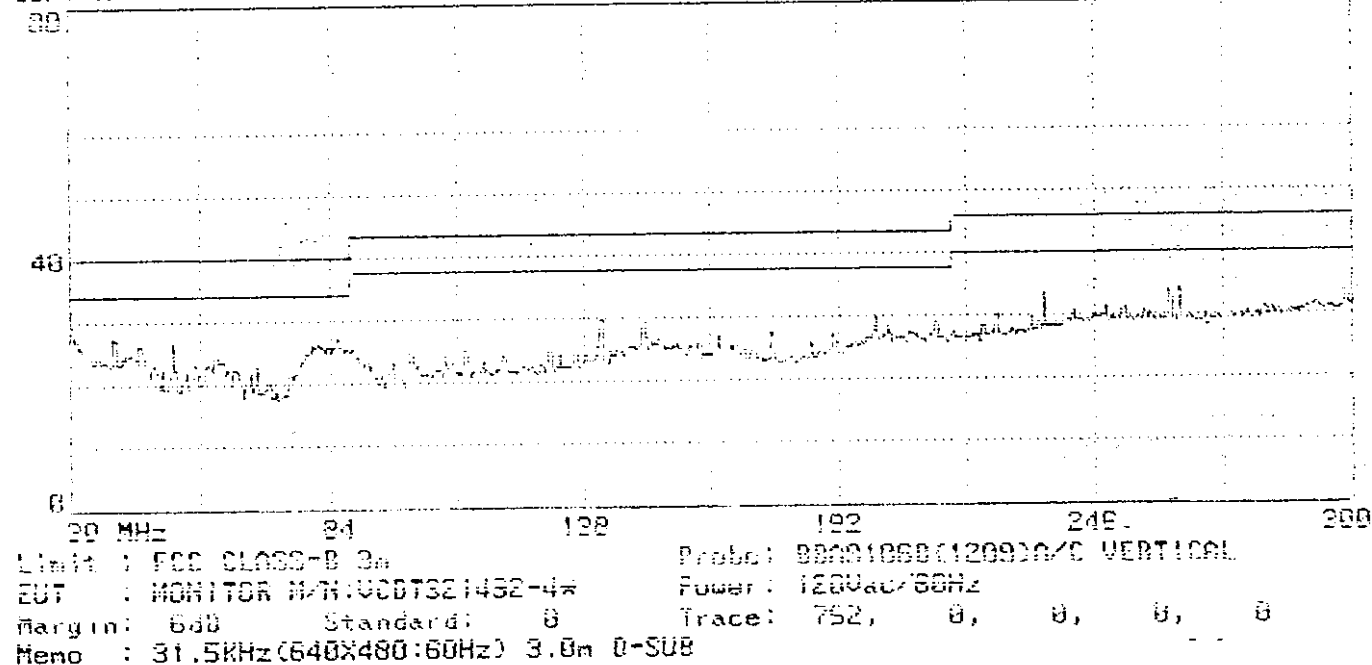


Page#: 753 SP File#: VIEWSON1.E1 Date: 02-05-1999 Time: 16:53:00
 49001/m ANECHOIC CHAMBER TAIHAN TOKIN EMC ENG. CORP.

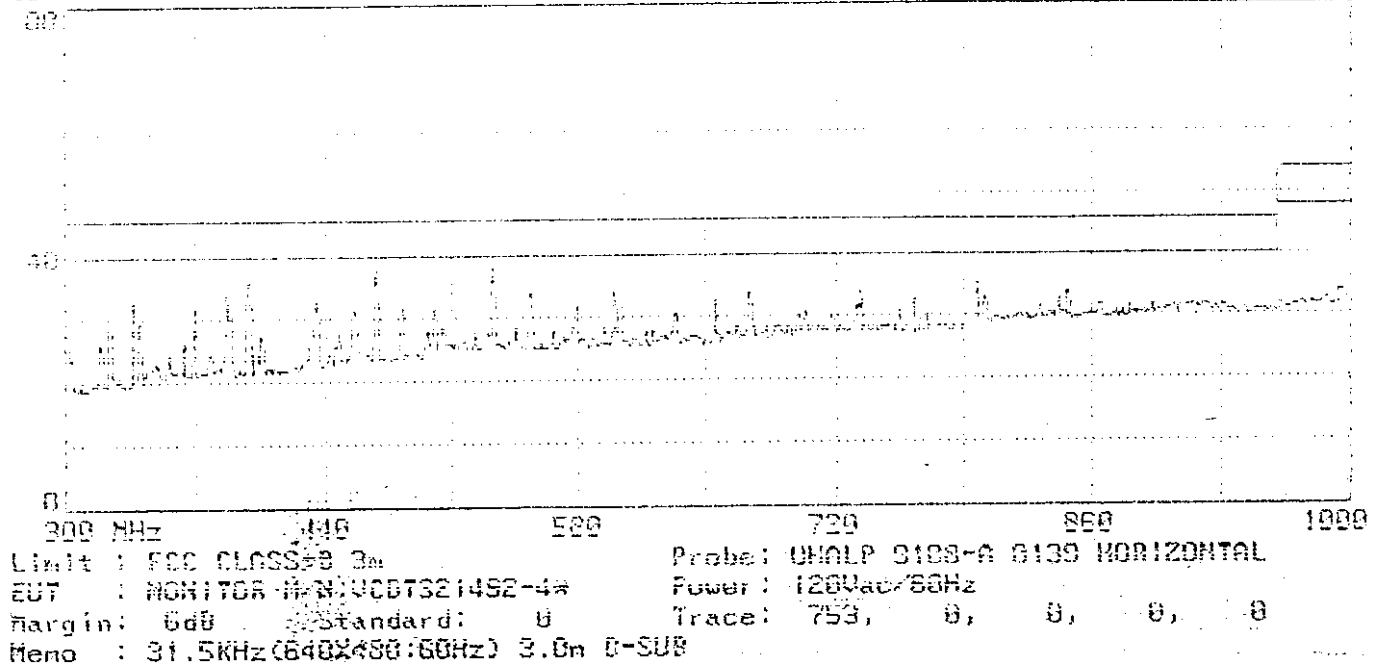


Page#: 754 SP File#: VIEWSON1.E1 Date: 02-05-1999 Time: 16:54:02
 49001/m ANECHOIC CHAMBER TAIHAN TOKIN EMC ENG. CORP.

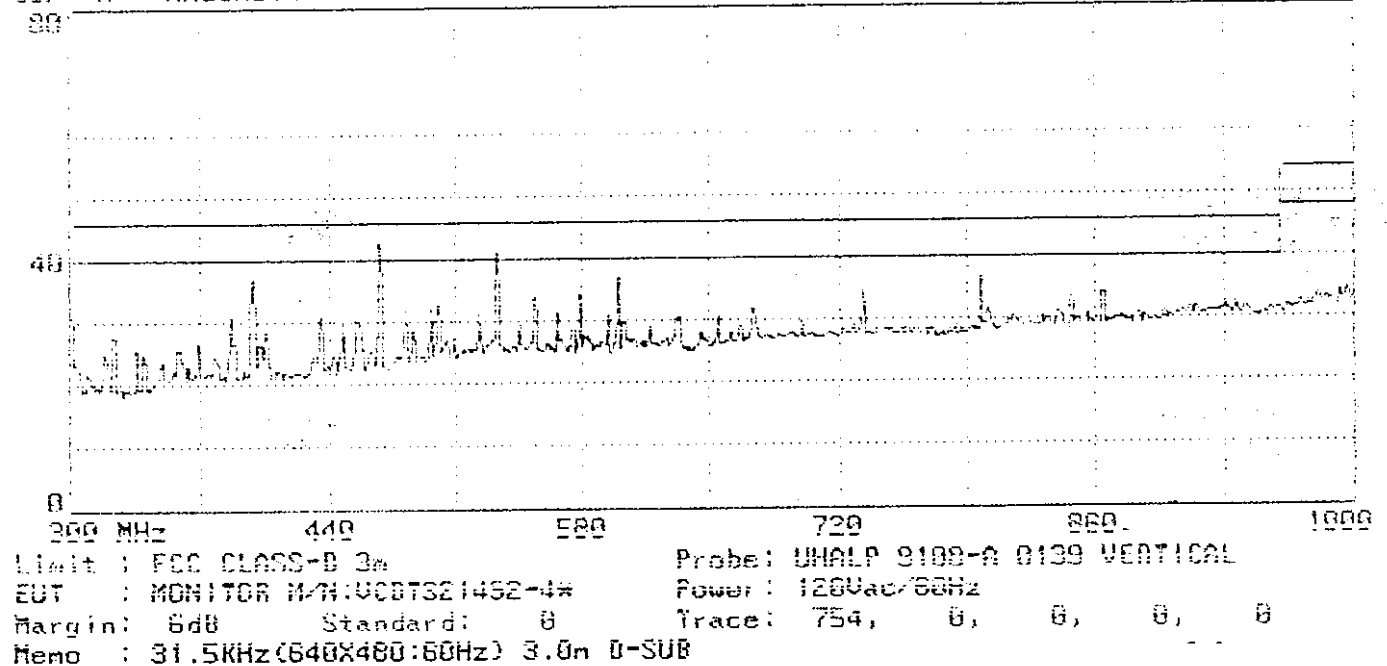

Page#1: 754 SP File#: VIEWSONI.E1 Date: 02-05-1999 Time: 17:21:59
 d50017- ANECHOIC CHAMBER TAIWAN TOKIN EMC ENG. CORP.

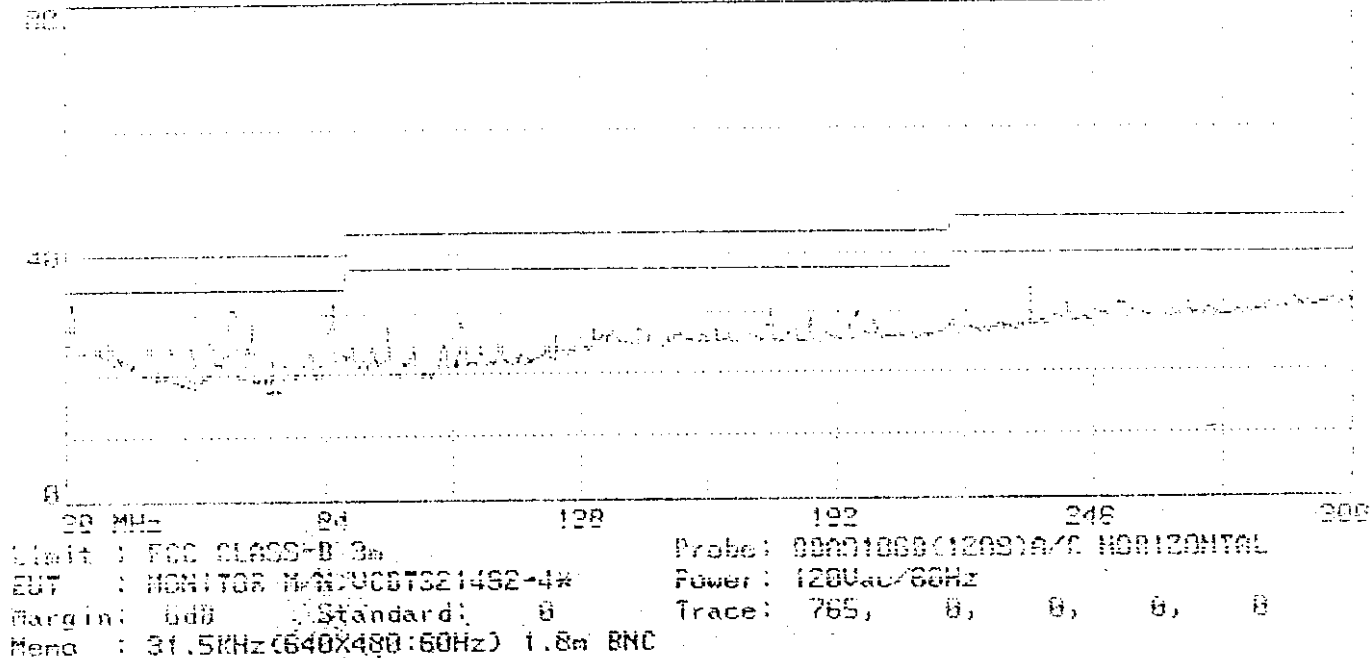

Page#1: 766 SP File#: VIEWSONI.E1 Date: 02-05-1999 Time: 17:24:04
 d50017- ANECHOIC CHAMBER TAIWAN TOKIN EMC ENG. CORP.

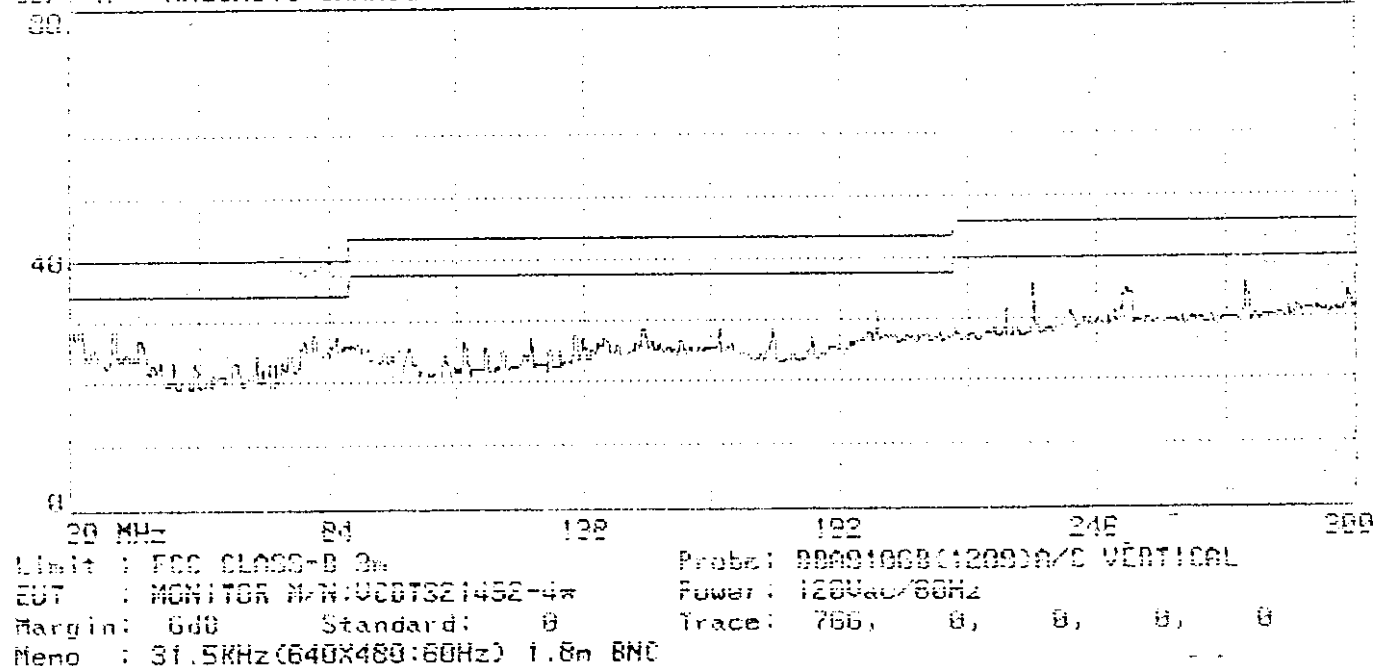

Page#: 764 SP File#: VIEWSONI.E1 Date: 02-05-1998 Time: 17:17:25
 4500V/E ANECHOIC CHAMBER TAIWAN TOKIN EMC ENG. CORP.

30

40

300 MHz 440 580 720 860 1000
 Limit : FCC CLASS-B 3m
 EUT : MONITOR M/N:UCBT321452-4m
 Margin: 6dB Standard: 0
 Memo : 31.5KHz(640X480:60Hz) 1.8m BNC
 Probe: UNCLP 9109-A 9138 HORIZONTAL
 Power: 120VAC/50Hz
 Trace: 763, 0, 0, 0, 0


Page#: 764 SP File#: VIEWSONI.E1 Date: 02-05-1998 Time: 17:18:59
 4500V/E ANECHOIC CHAMBER TAIWAN TOKIN EMC ENG. CORP.

30


40

300 MHz 440 580 720 860 1000
 Limit : FCC CLASS-B 3m
 EUT : MONITOR M/N:UCBT321452-4m
 Margin: 6dB Standard: 0
 Memo : 31.5KHz(640X480:60Hz) 1.8m BNC
 Probe: UNCLP 9109-A 9138 VERTICAL
 Power: 120VAC/50Hz
 Trace: 764, 0, 0, 0, 0


Page#1: 730 SP File#1: UIEWSUNI.E1 Date: 82-03-1988 Time: 19:10:47
 40dB/Hz ANECHOIC CHAMBER TAIWAN TOWNS EMC ENG. CORP.

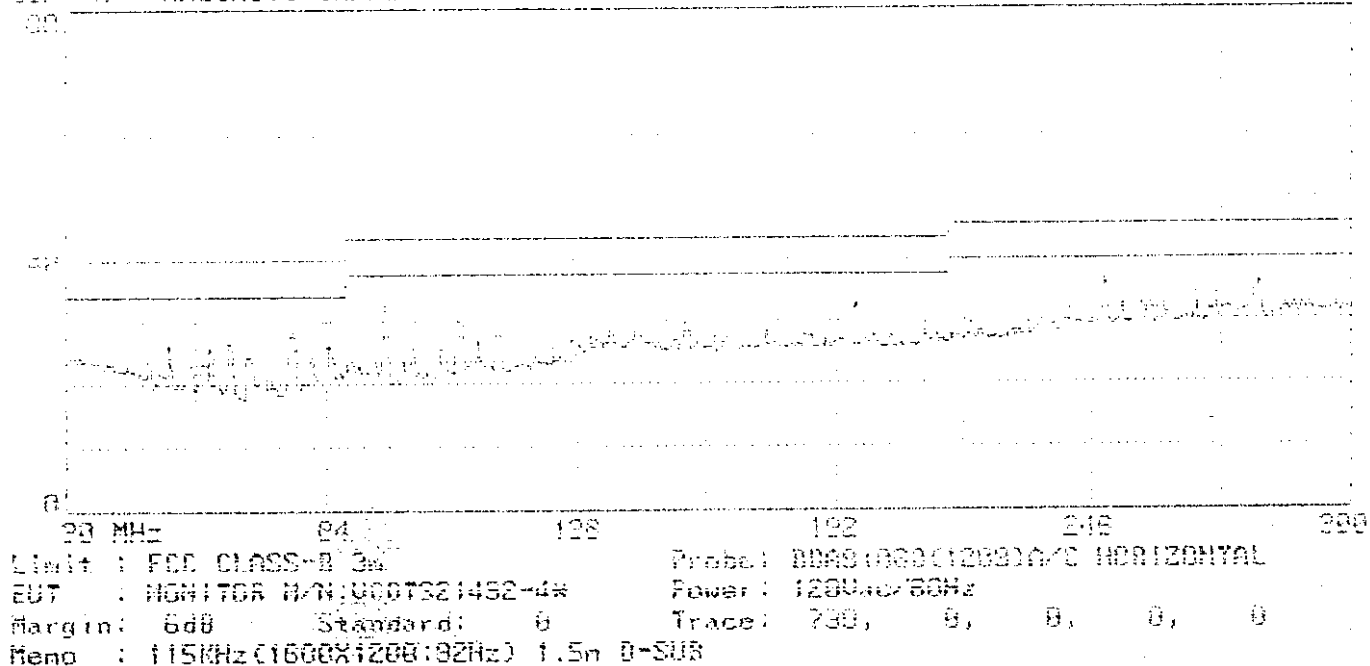


Page#1: 740 SP File#1: UIEWSUNI.E1 Date: 82-03-1988 Time: 19:30:41
 40dB/Hz ANECHOIC CHAMBER TAIWAN TOWNS EMC ENG. CORP.

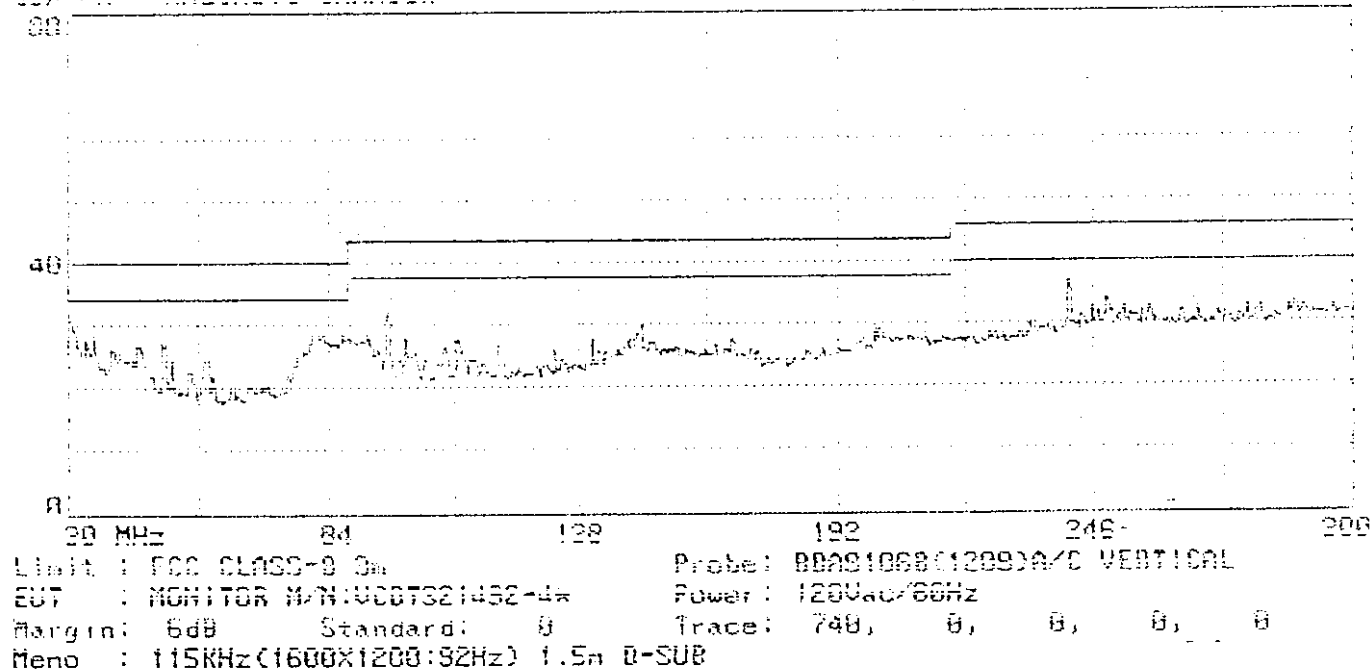


Page#1: 721 SP File#1: VIEWSONI.E1 Date: 92-03-1999 Time: 19:38:27
 600MHz ANECHOIC CHAMBER TAIWAN TOKIN EMC ENG. CORP.

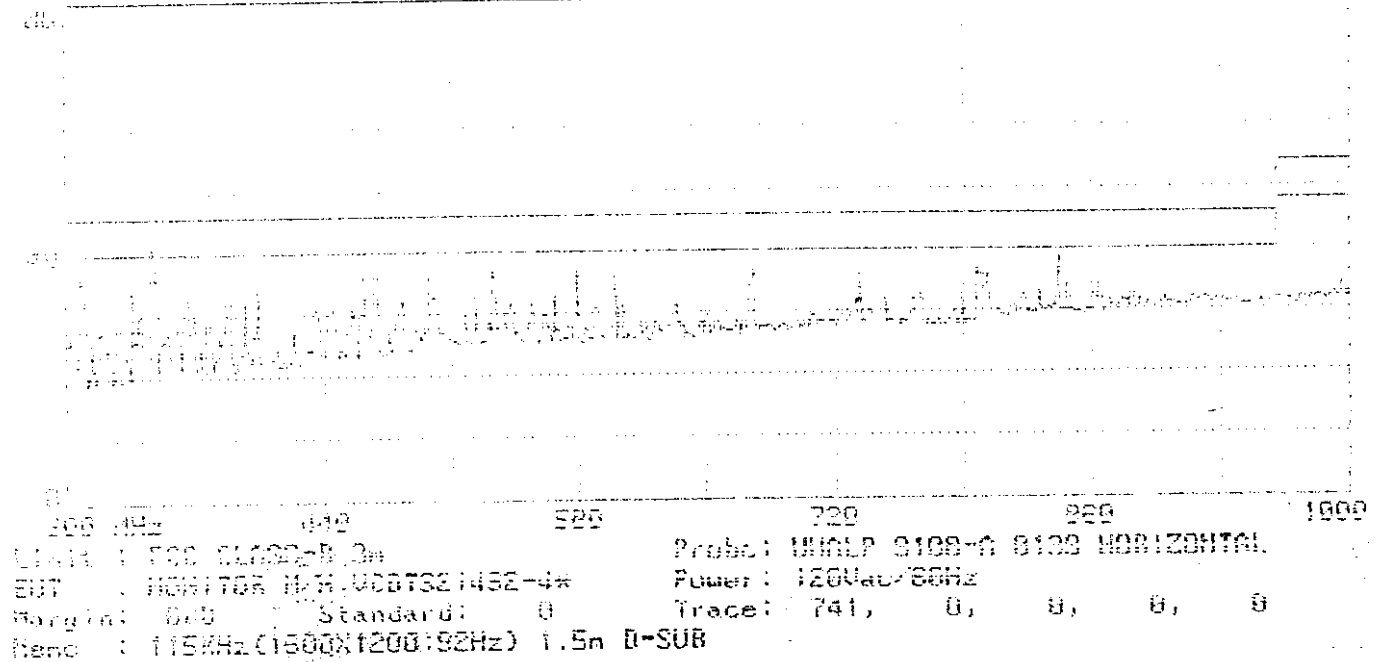

Page#1: 742 SP File#1: VIEWSONI.E1 Date: 92-03-1999 Time: 19:41:07
 600MHz ANECHOIC CHAMBER TAIWAN TOKIN EMC ENG. CORP.

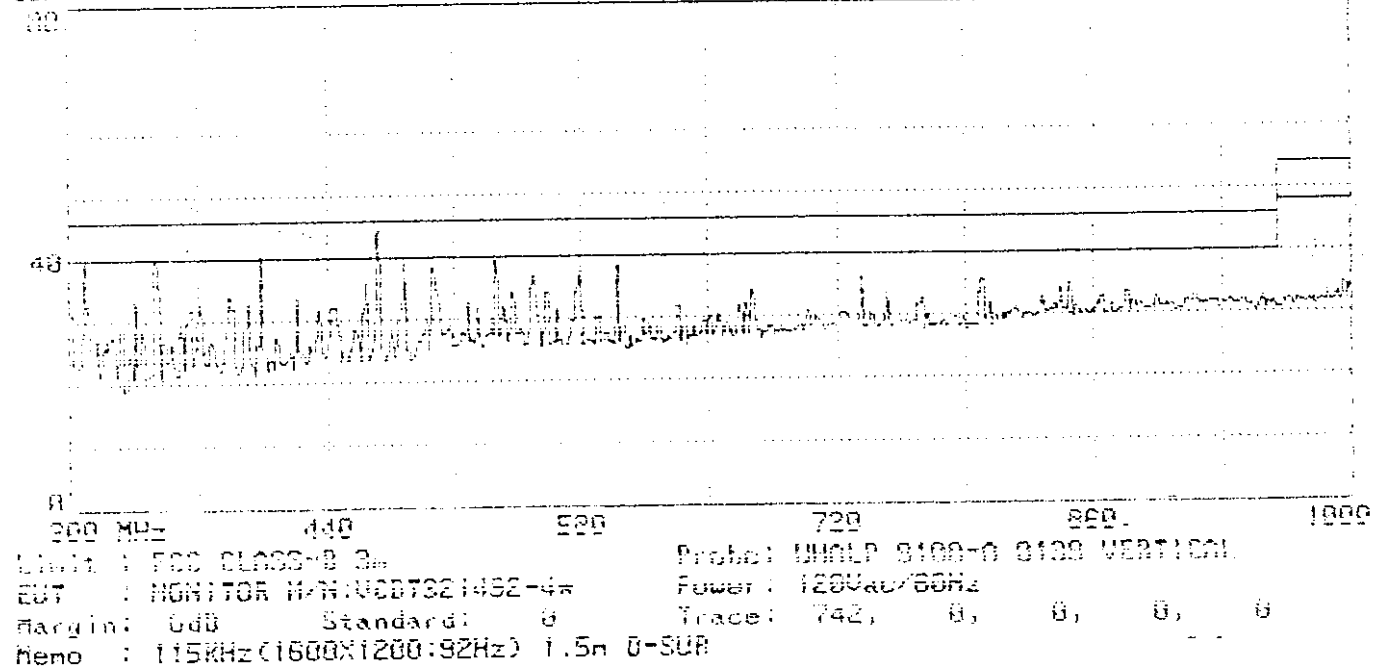


Page#: 749 SP File#: VIEWSONI E1 Date: 02-03-1999 Time: 19:56:27
 ABN/75 ANECHOIC CHAMBER TOSHIBA TOKIN EMC ENG. CORP.
 00

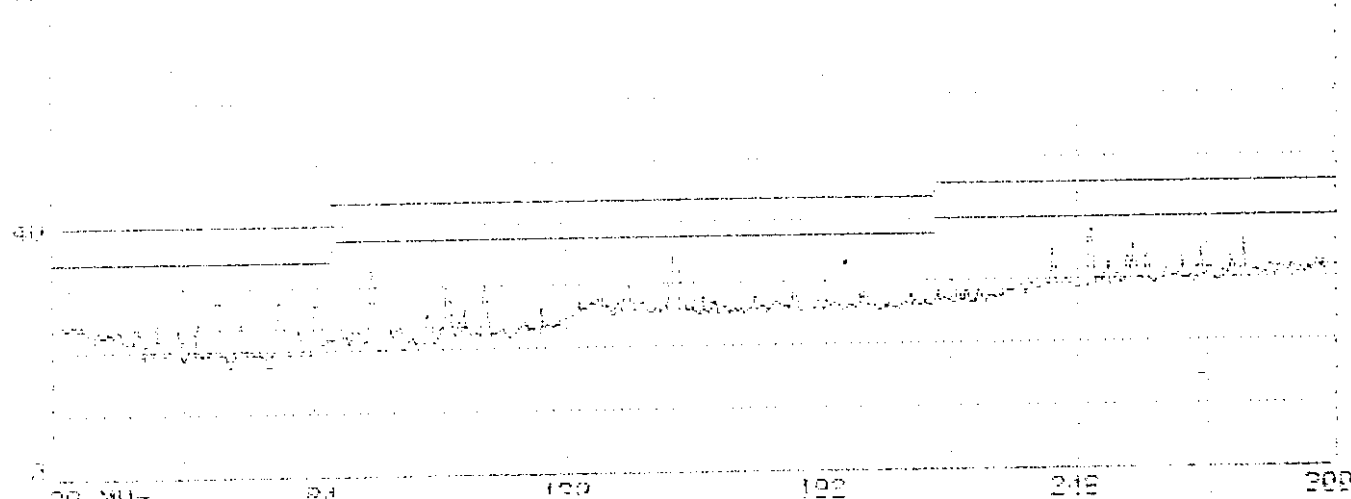


Limit : FCC CLASS-B 3m Probe: 850010000(1200)O/C HORIZONTAL
 EUT : MONITOR W/H UCST321432-4# Power : 120Vac/50Hz
 Margin: 6dB Standard: 0 Trace: 745, 0, 0, 0, 0
 Memo : 115KHz(1500X1200:92Hz) 1.8m 0-SUB

Page#: 748 SP File#: VIEWSONI E1 Date: 02-03-1999 Time: 19:58:19
 ABN/75 ANECHOIC CHAMBER TOSHIBA TOKIN EMC ENG. CORP.
 00

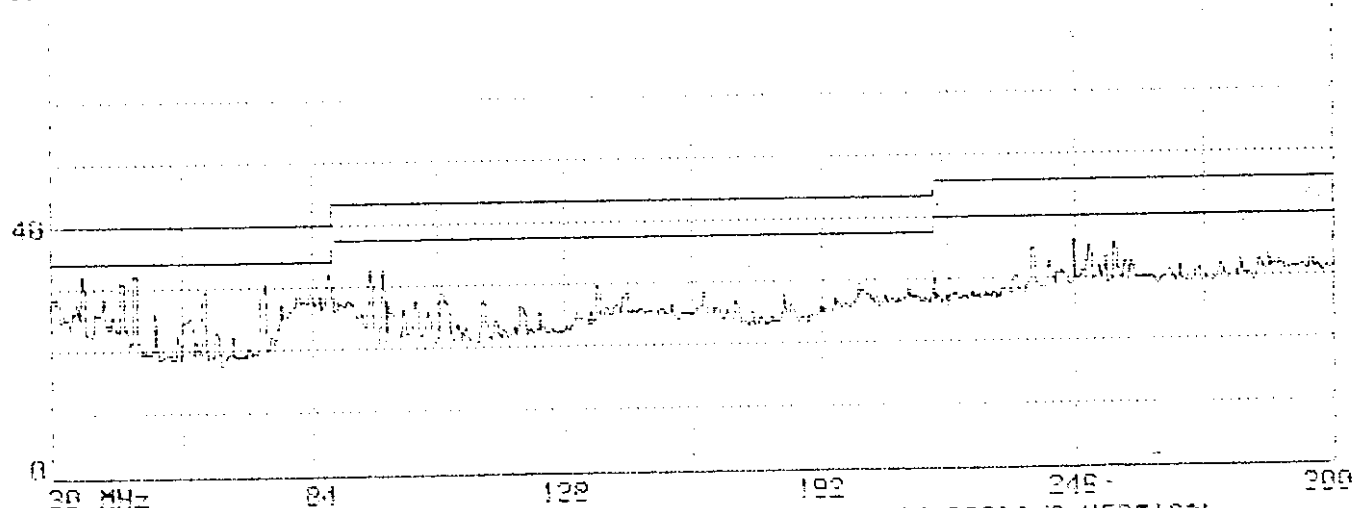


Limit : FCC CLASS-B 3m Probe: 850010000(1200)O/C VERTICAL
 EUT : MONITOR W/H UCST321432-4# Power : 120Vac/50Hz
 Margin: 6dB Standard: 0 Trace: 746, 0, 0, 0, 0
 Memo : 115KHz(1500X1200:92Hz) 1.8m 0-SUB

Page#: 743 SP File#: UIEUS01.F1 Date: 82-03-1989 Time: 19:40:37
 4200V/6 ANECHOIC CHAMBER TAIWAN TOKIN EMC ENG. CORP.
 30

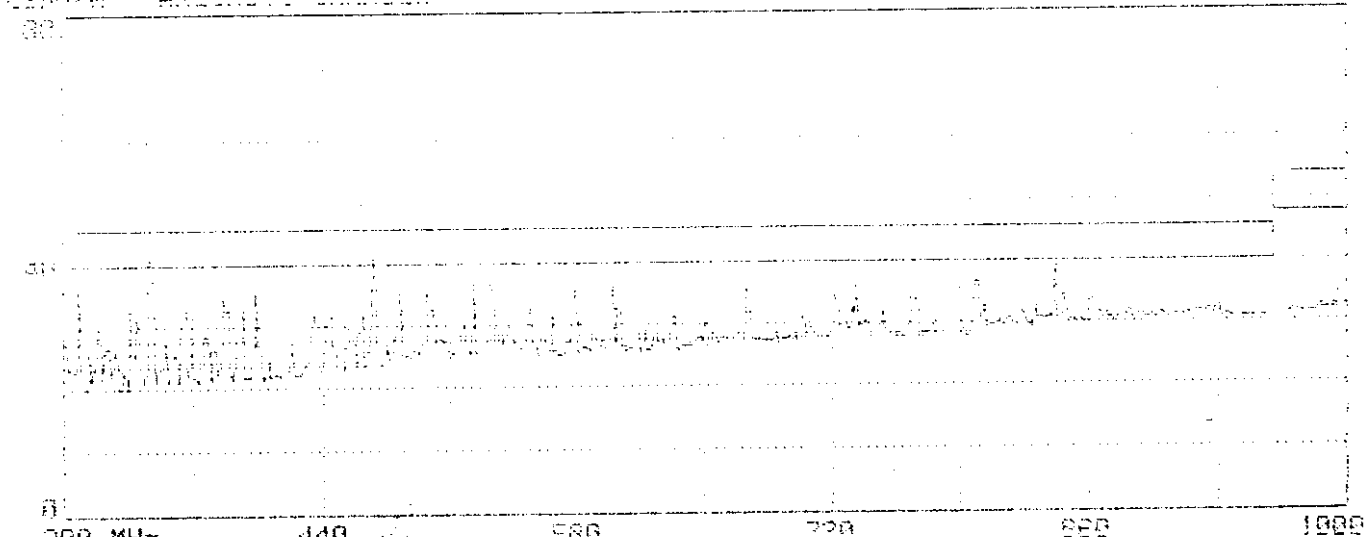


200 MHz 440 580 720 860 1000
 Limit : FCC CLASS-B 3m Probe: UHFLP 9109-A 0109 HORIZONTAL
 EUT : MONITOR M/N:UCDT3214S2-4# Power : 120Vac/60Hz
 Margin: 6dB Standard: 0 Trace: 743, 0, 0, 0, 0
 Memo : 115KHz(1600X1200:92Hz) 1.8m 0-SUB

Page#: 744 SP File#: UIEUS01.F1 Date: 82-03-1989 Time: 19:52:47
 4200V/6 ANECHOIC CHAMBER TAIWAN TOKIN EMC ENG. CORP.
 30

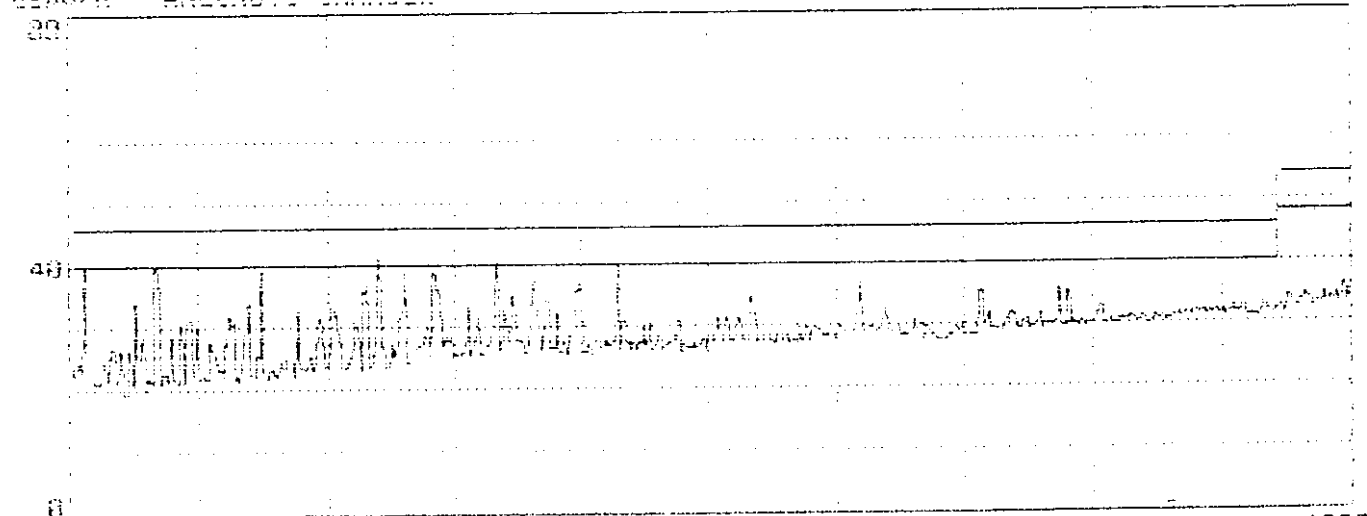


200 MHz 440 580 720 860 1000
 Limit : FCC CLASS-B 3m Probe: UHFLP 9109-A 0109 VERTICAL
 EUT : MONITOR M/N:UCDT3214S2-4# Power : 120Vac/60Hz
 Margin: 6dB Standard: 0 Trace: 744, 0, 0, 0, 0
 Memo : 115KHz(1600X1200:92Hz) 1.8m 0-SUB

Page#1: 747 SP File#1: VIEWSDN1.E1 Date: 02-03-1999 Time: 20:06:05
 4500V/m ANECHOIC CHAMBER TAIWAN TOKIM EMC ENG. CORP.
 001

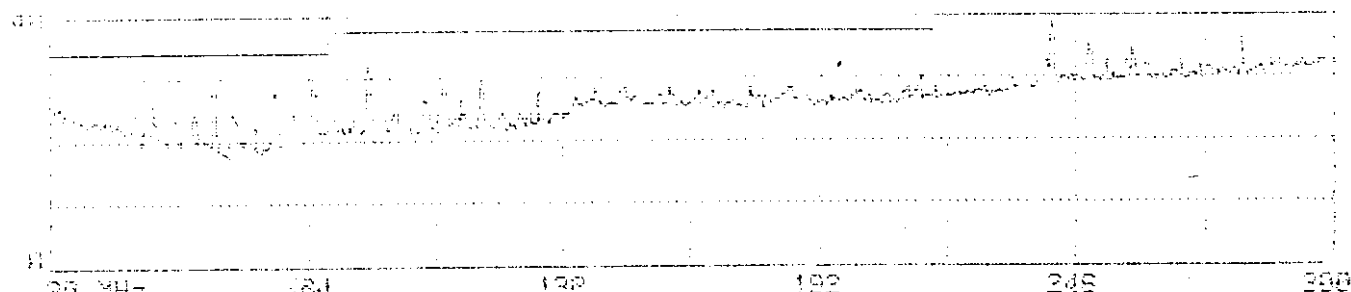

Limit : FCC CLASS-B 3m Probe: 900910680(1200)A/C HORIZONTAL
 EUT : MONITOR M/N:UCDT321432-4# Power: 120Vac/60Hz
 Margin: 6dB Standard: 0 Trace: 747, 0, 0, 0, 0
 Memo : 115KHz(1600X1200:92Hz) 3.0m D-SUB


Page#1: 748 SP File#1: VIEWSDN1.E1 Date: 02-03-1999 Time: 20:08:41
 4500V/m ANECHOIC CHAMBER TAIWAN TOKIM EMC ENG. CORP.
 001

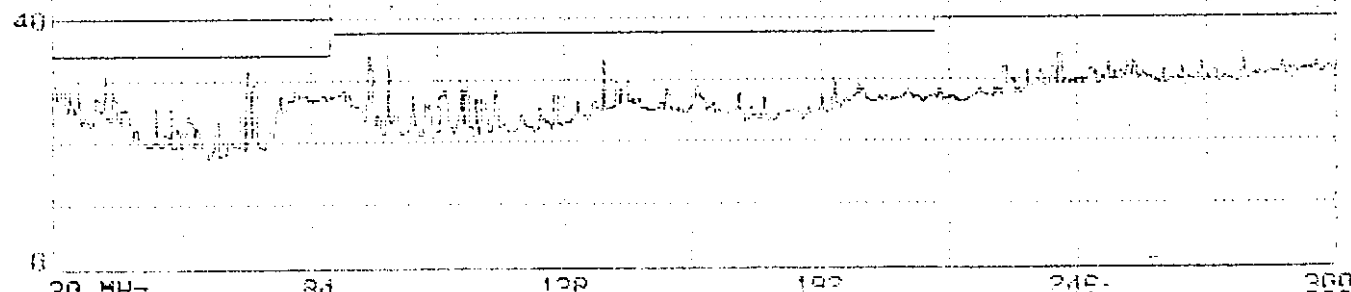

Limit : FCC CLASS-B 3m Probe: 900910680(1200)A/C VERTICAL
 EUT : MONITOR M/N:UCDT321432-4# Power: 120Vac/60Hz
 Margin: 6dB Standard: 0 Trace: 748, 0, 0, 0, 0
 Memo : 115KHz(1600X1200:92Hz) 3.0m D-SUB

Page#: 744 SP File#: VIEWSONI.E1 Date: 02-03-1999 Time: 20:13:34
 430MHz ANECHOIC CHAMBER TAIWAN TOKIN EMC ENG. CORP.


00

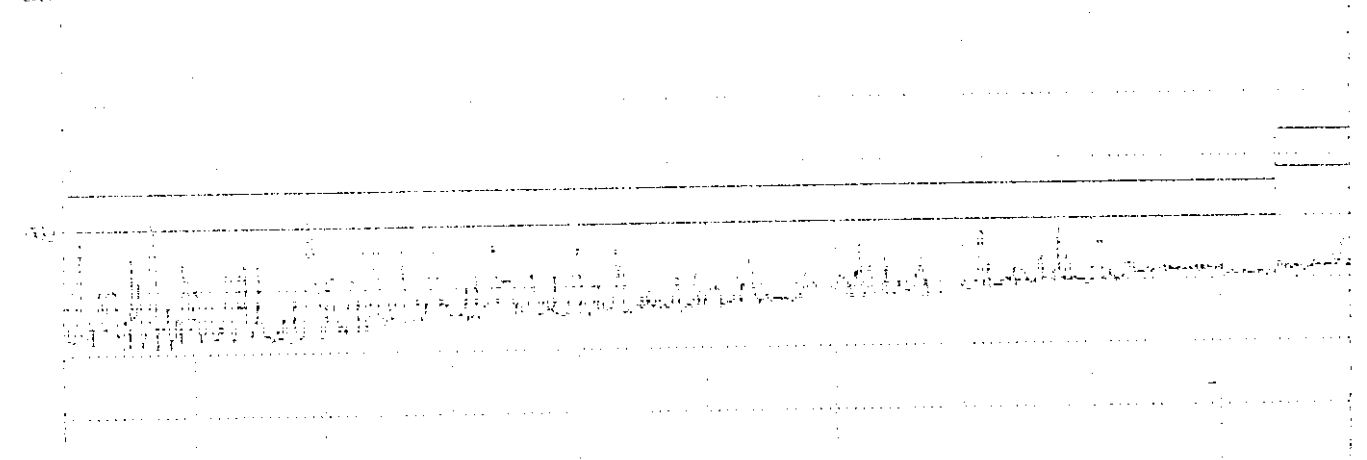

200 MHz 440 500 720 880 1000
 Limit : FCC CLASS-B 3m Proba: UNCLP 0100-A 0100 HORIZONTAL
 EUT : MONITOR M/N.UCDT321432-4* Power: 120Vac/60Hz
 Margin: 6dB Standard: 0 Trace: 749, 0, 0, 0, 0
 Memo : 115KHz(1600X1200:92Hz) 3.0m 0-SUB


Page#: 750 SP File#: VIEWSONI.E1 Date: 02-03-1999 Time: 20:15:33
 430MHz ANECHOIC CHAMBER TAIWAN TOKIN EMC ENG. CORP.

00

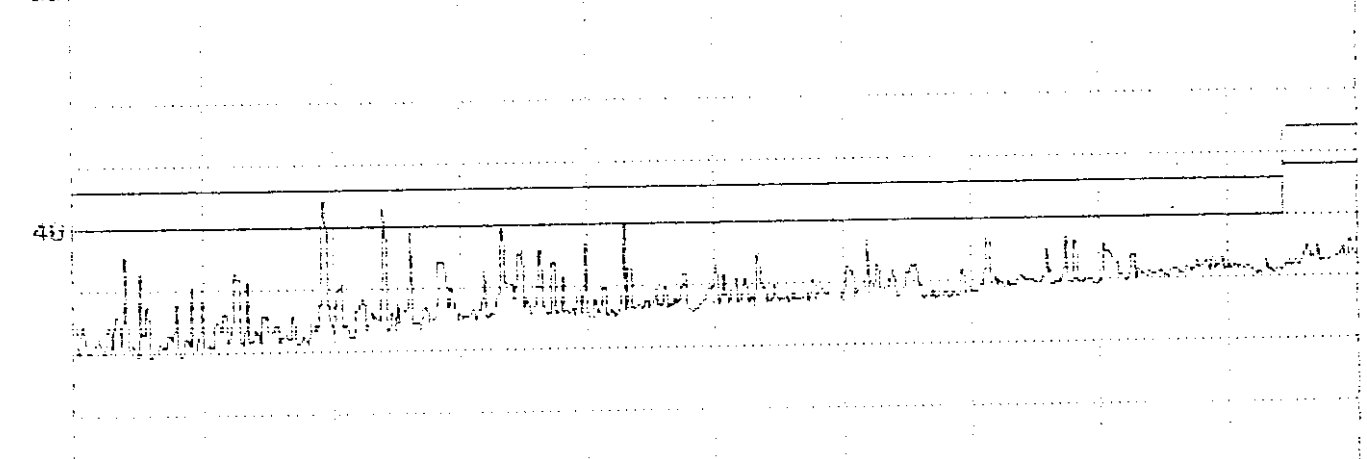


200 MHz 440 500 720 880 1000
 Limit : FCC CLASS-B 3m Proba: UNCLP 0100-A 0100 VERTICAL
 EUT : MONITOR M/N.UCDT321432-4* Power: 120Vac/60Hz
 Margin: 6dB Standard: 0 Trace: 750, 0, 0, 0, 0
 Memo : 115KHz(1600X1200:92Hz) 3.0m 0-SUB

Page#1: 735 SP File#1: MIFUSUNI.F1 Date: 02-03-1999 Time: 18:01:01
 49.017% ANECHOIC CHAMBER TAIWAN TORIN EMC ENG. CORP.
 00.

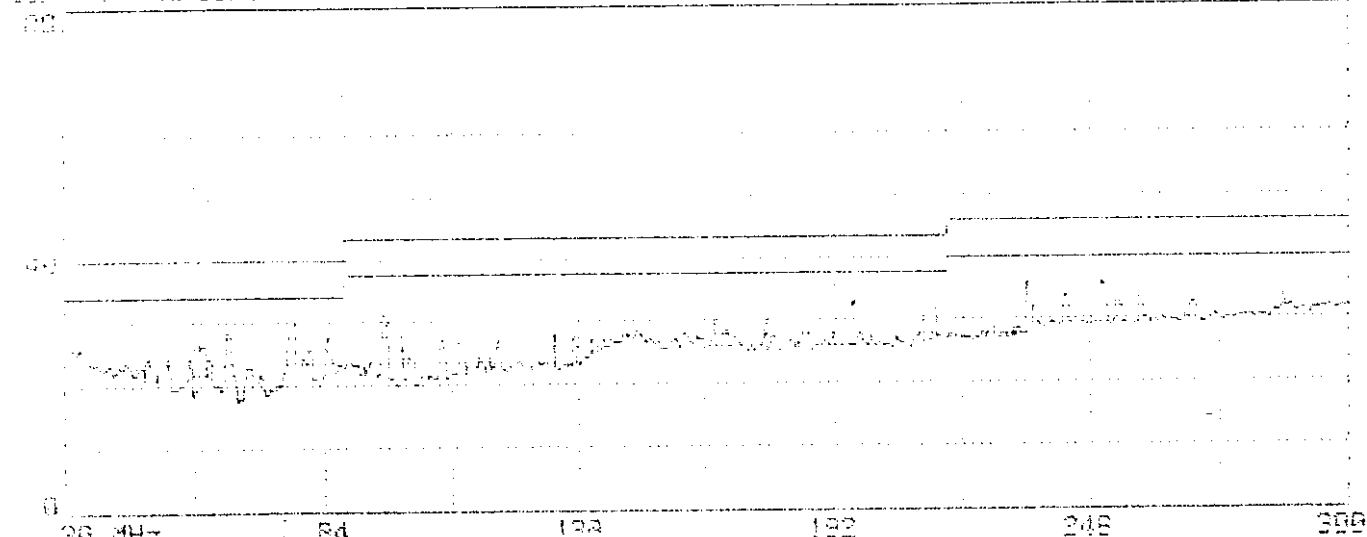


Limit : FCC CLASS-B 3m Probe: 85001060(1200)O/C HORIZONTAL
 EUT : MONITOR M/N:UCBT321492-4# Power: 120Vac/50Hz
 Margin: 6dB Standard: 0 Trace: 735, 0, 0, 0, 0
 Memo : 115KHz(1600X1200:92Hz) 1.8m BNC

Page#1: 736 SP File#1: MIFUSUNI.F1 Date: 02-03-1999 Time: 18:04:46
 49.017% ANECHOIC CHAMBER TAIWAN TORIN EMC ENG. CORP.
 00.

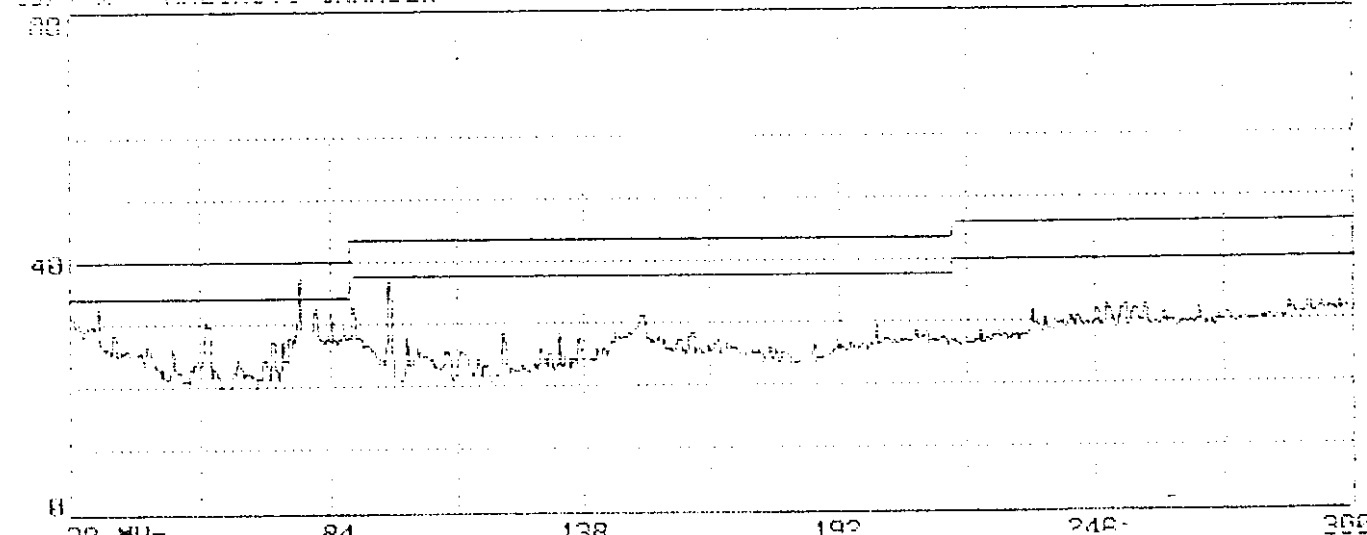


Limit : FCC CLASS-B 3m Probe: 85001060(1200)O/C VERTICAL
 EUT : MONITOR M/N:UCBT321492-4# Power: 120Vac/50Hz
 Margin: 6dB Standard: 0 Trace: 736, 0, 0, 0, 0
 Memo : 115KHz(1600X1200:92Hz) 1.8m BNC

Page#1: 737 SP File#1: VIEWSONI.E1 Date: 82-02-1989 Time: 19:02:33
 11.7MHz ANECHOIC CHAMBER TAIWAN TOKIN EMC ENG. CORP.
 80

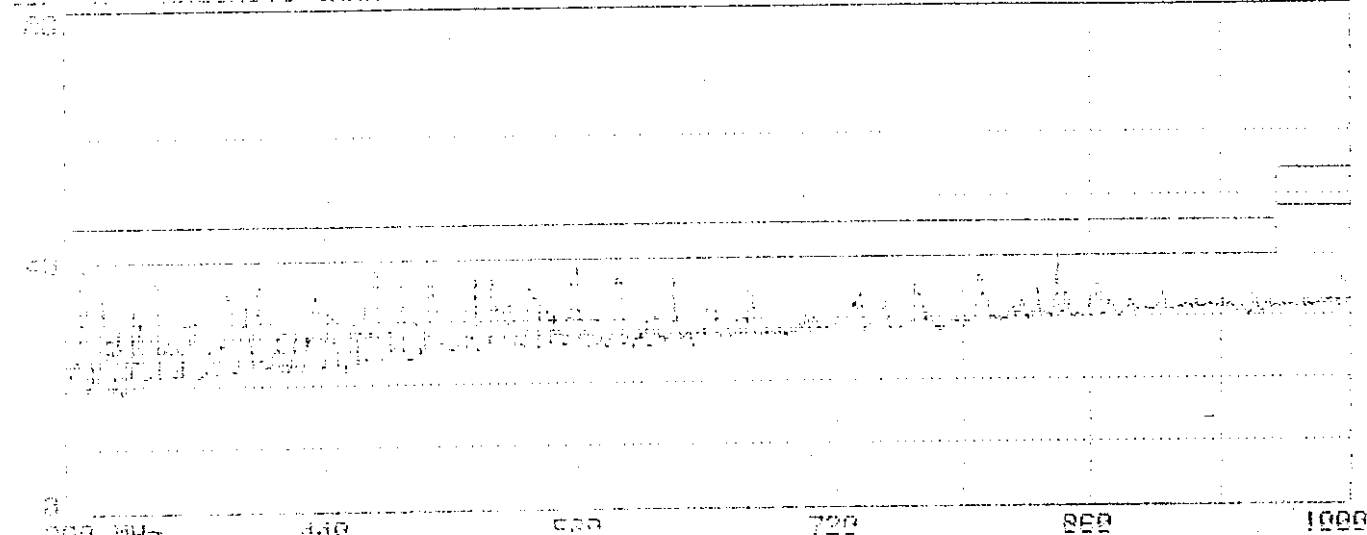


Limit : FCC CLASS-B 3m Probe: UNCLP S100-A 0139 HORIZONTAL
 EUT : MONITOR W/H:UCBT321432-4* Power: 120VAC/60Hz
 Margin: 6dB Standard: 0 Trace: 737, 0, 0, 0, 0
 Memo : 115KHz(1600X1200:92Hz) 1.8m BNC

Page#1: 738 SP File#1: VIEWSONI.E1 Date: 82-03-1989 Time: 19:04:31
 43MHz ANECHOIC CHAMBER TAIWAN TOKIN EMC ENG. CORP.

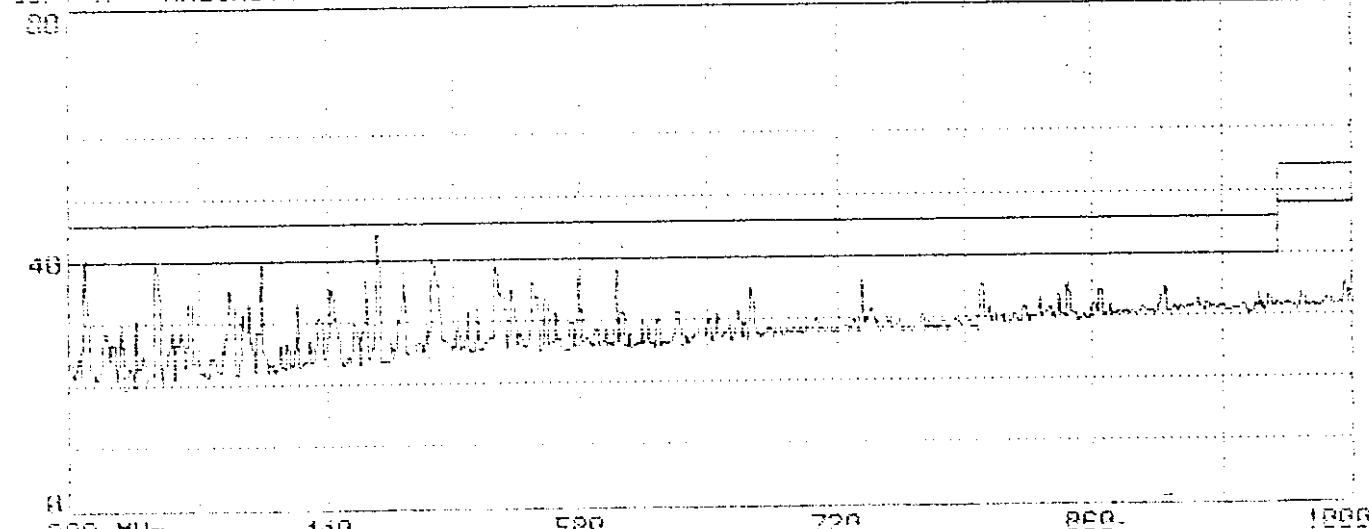


Limit : FCC CLASS-B 3m Probe: UNCLP S100-A 0139 VERTICAL
 EUT : MONITOR W/H:UCBT321432-4* Power: 120VAC/60Hz
 Margin: 6dB Standard: 0 Trace: 738, 0, 0, 0, 0
 Memo : 115KHz(1600X1200:92Hz) 1.8m BNC


Page#: 733 SP File#: VIEWSONI E1 Date: 02-11-1999 Time: 21:34:33
 dBm/Hz ANECHOIC CHAMBER TAIWAN TOKIN EMC ENG. CORP.

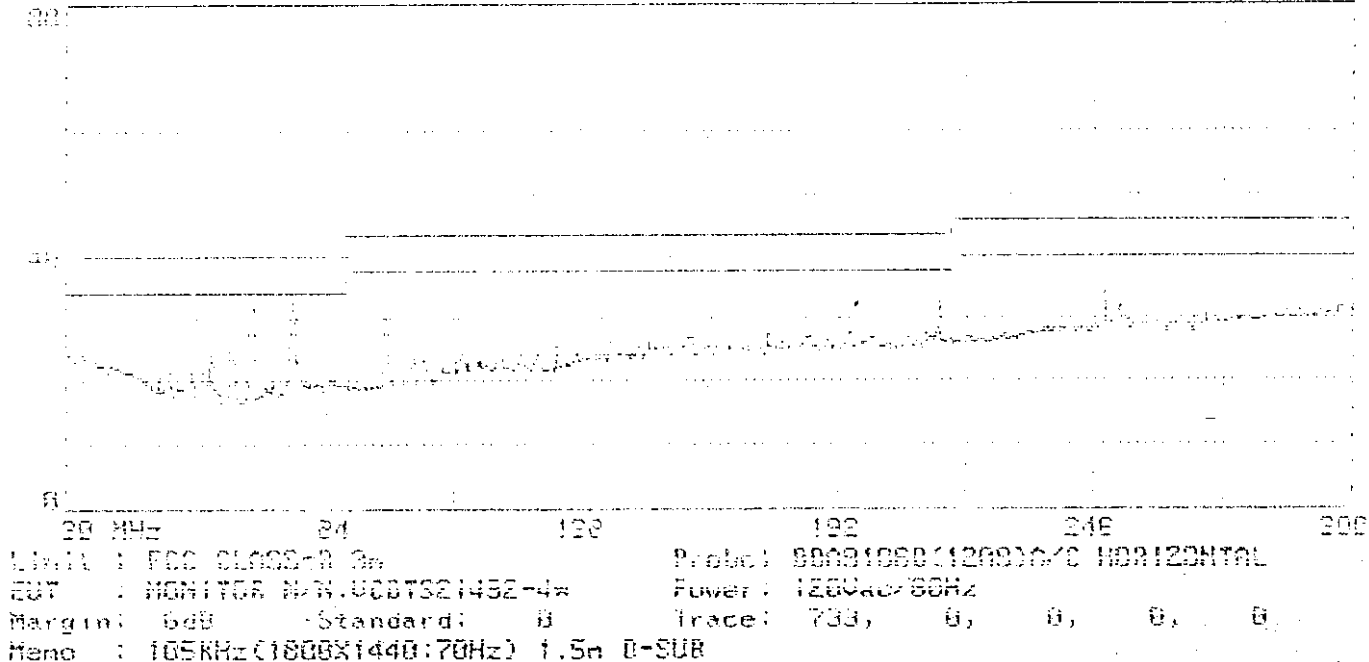


Page#: 734 SP File#: VIEWSONI E1 Date: 02-11-1999 Time: 21:36:44
 dBm/Hz ANECHOIC CHAMBER TAIWAN TOKIN EMC ENG. CORP.

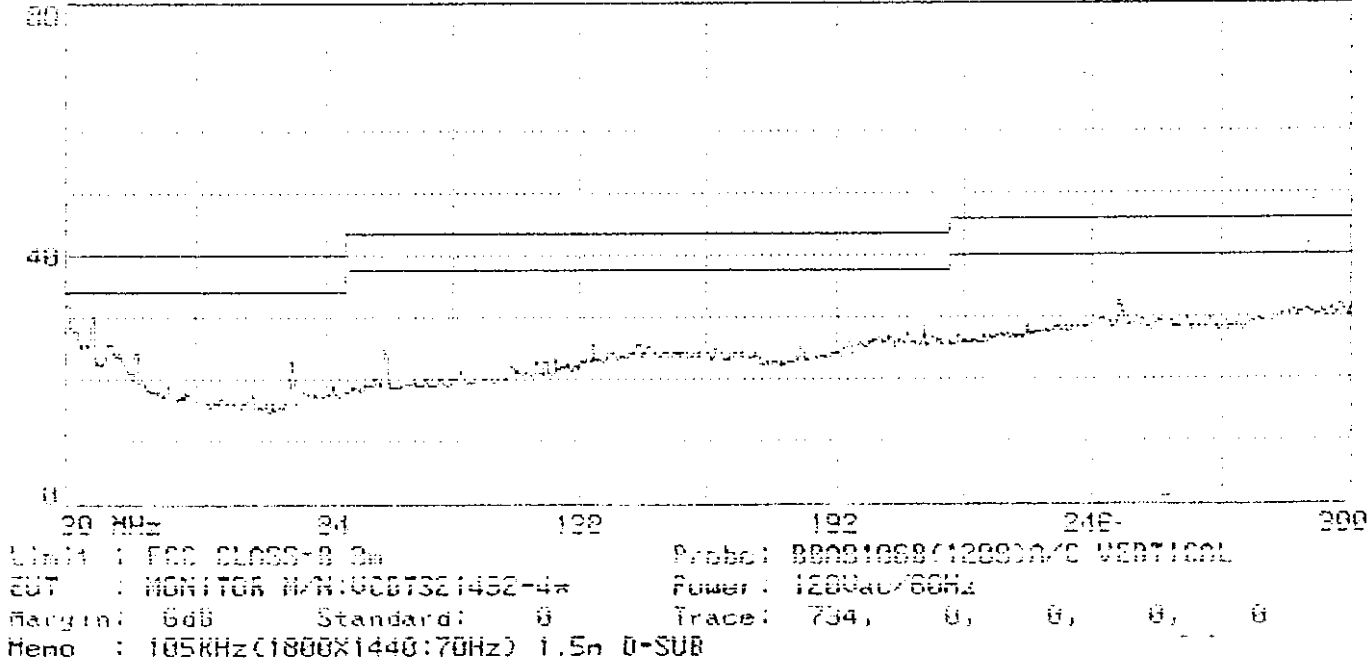


Page2: 791 SP File#: VIEWSONI.E1 Date: 02-11-1999 Time: 21:29:04
 450V/m ANECHOIC CHAMBER TAIWAN TOKIN EMC ENG. CORP.

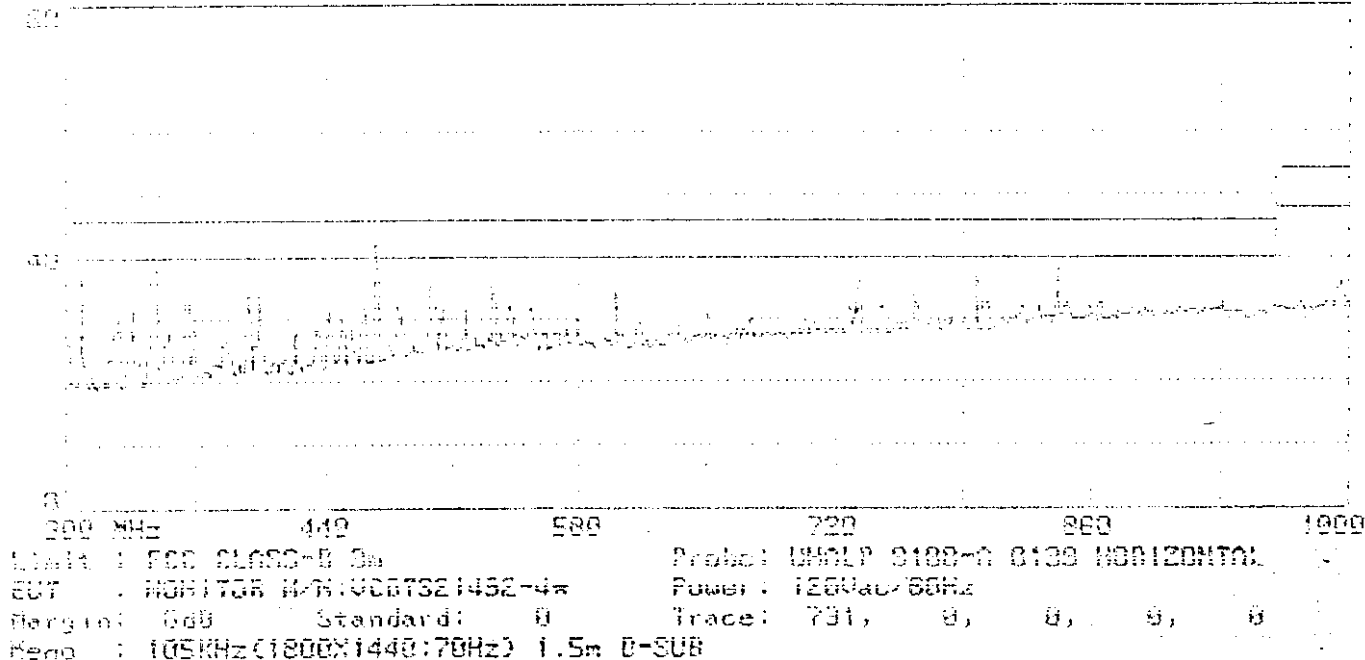


Page4: 792 SP File#: VIEWSONI.E1 Date: 02-11-1999 Time: 21:30:34
 450V/m ANECHOIC CHAMBER TAIWAN TOKIN EMC ENG. CORP.

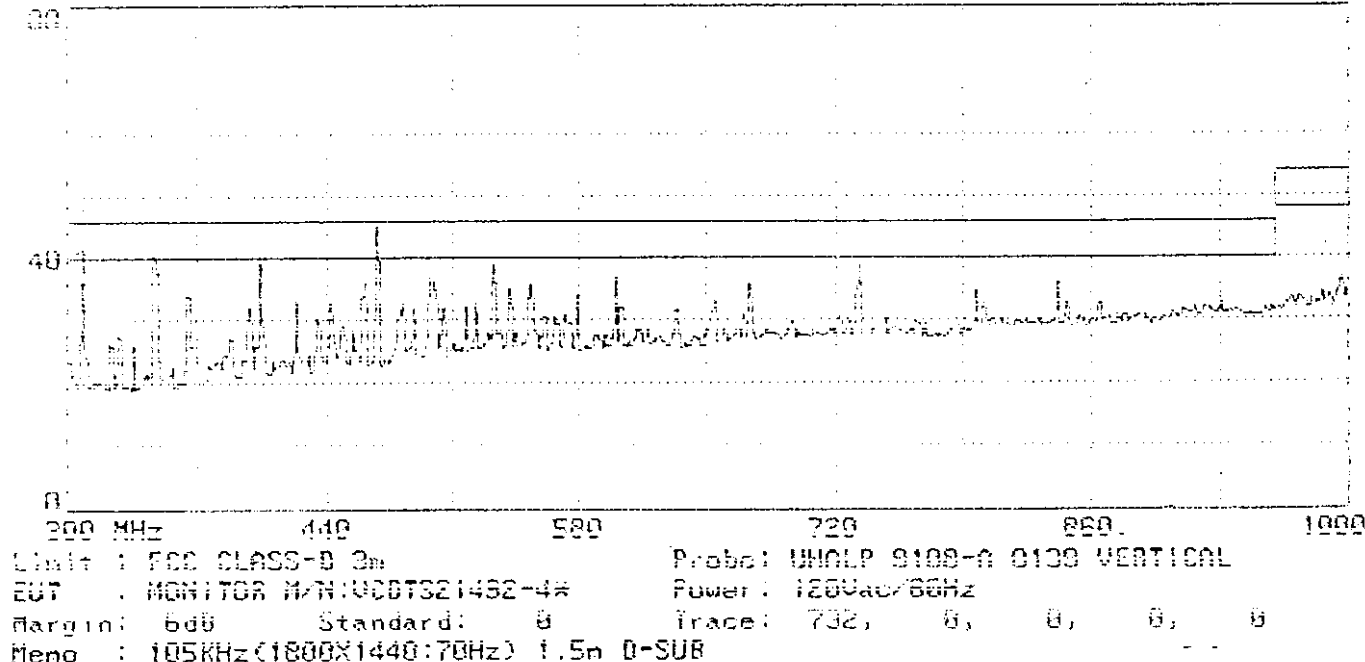


Page#1: 727 SP File#1: U1543001.E1 Date: 02-11-1999 Time: 21:18:48
 40dB/Hz ANECHOIC CHAMBER TAIWAN TORIN EMC ENG. CORP.

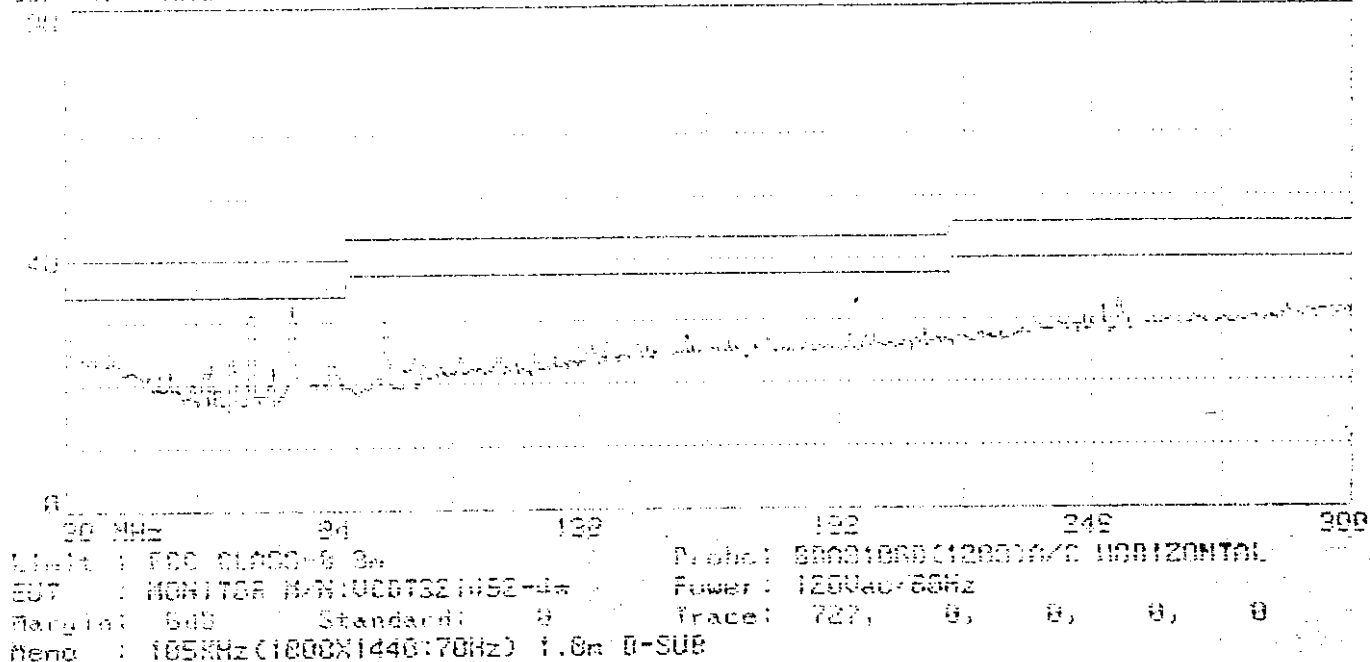


Page#1: 738 SP File#1: U1543001.E1 Date: 02-11-1999 Time: 21:21:03
 40dB/Hz ANECHOIC CHAMBER TAIWAN TORIN EMC ENG. CORP.

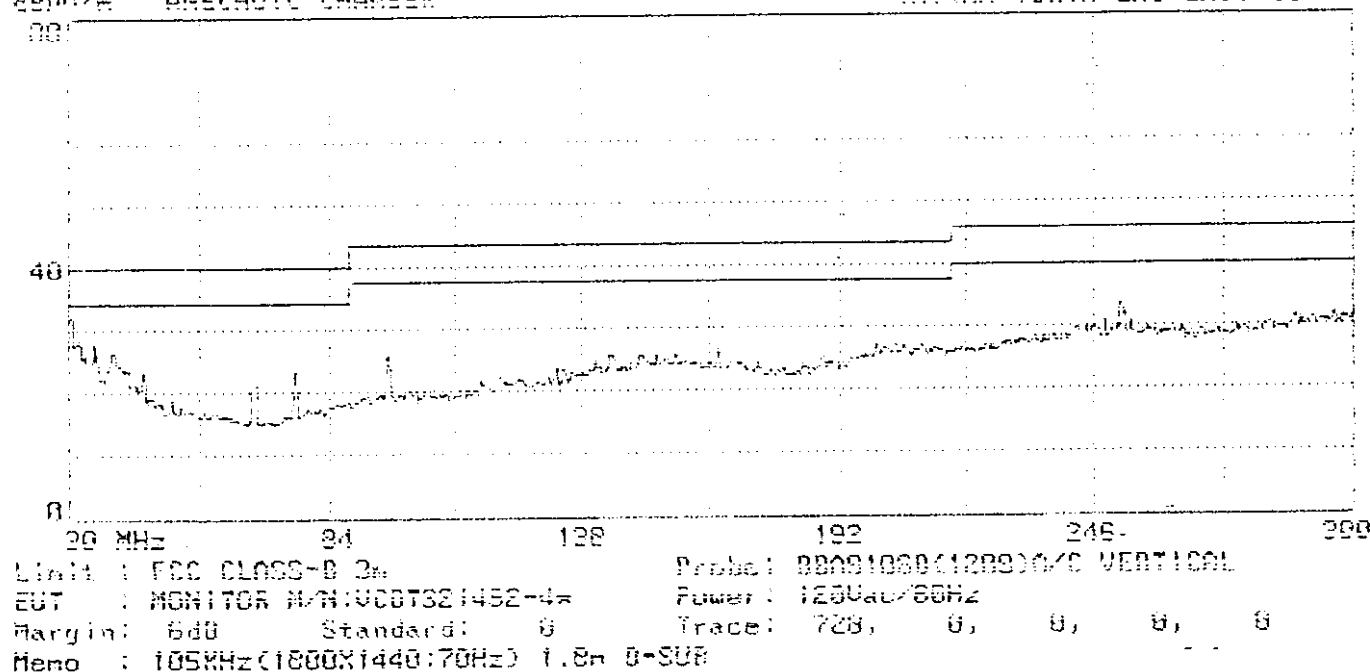


Page#: 729 SP File#: VIEWSONI.E1 Date: 02-11-1999 Time: 21:24:16
 49mV/m ANECHOIC CHAMBER TAIWAN TOKIN EMC ENG. CORP.

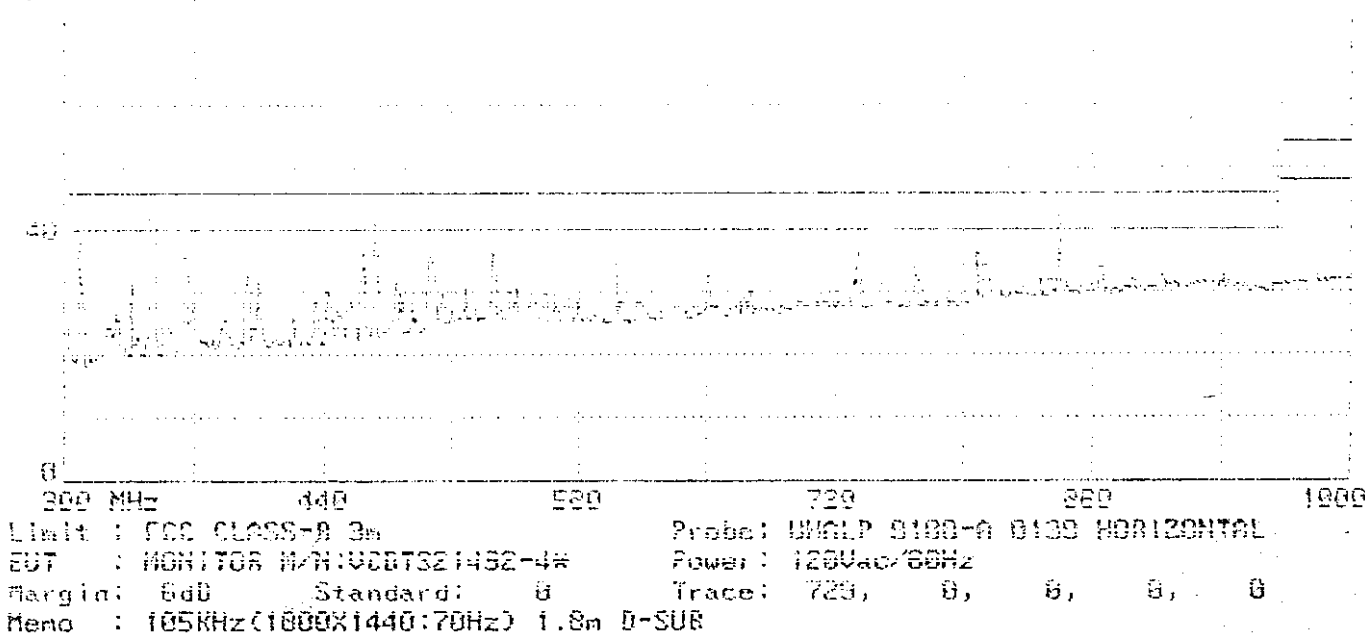

Page#: 730 SP File#: VIEWSONI.E1 Date: 02-11-1999 Time: 21:25:18
 49mV/m ANECHOIC CHAMBER TAIWAN TOKIN EMC ENG. CORP.

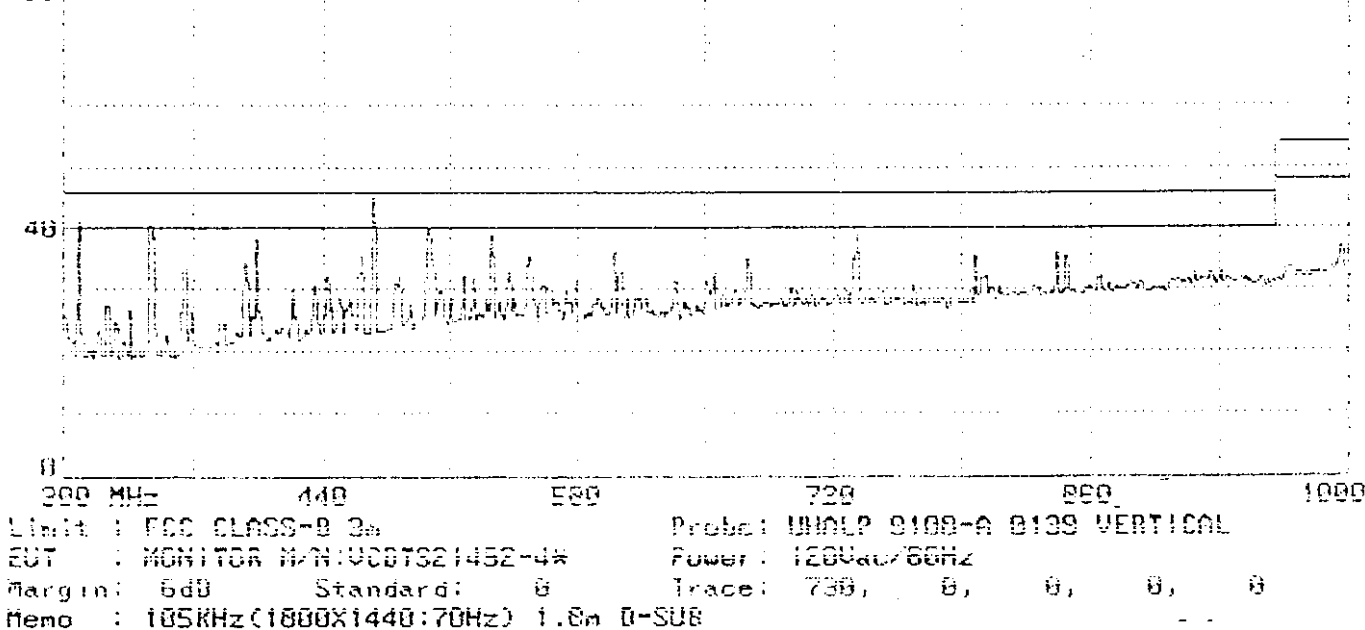


Page#: 725 SP File#: VIEWSONI.E1 Date: 02-11-1999 Time: 21:13:53
 40dB/m ANECHOIC CHAMBER TAIWAN TOKIN EMC ENG. CORP.

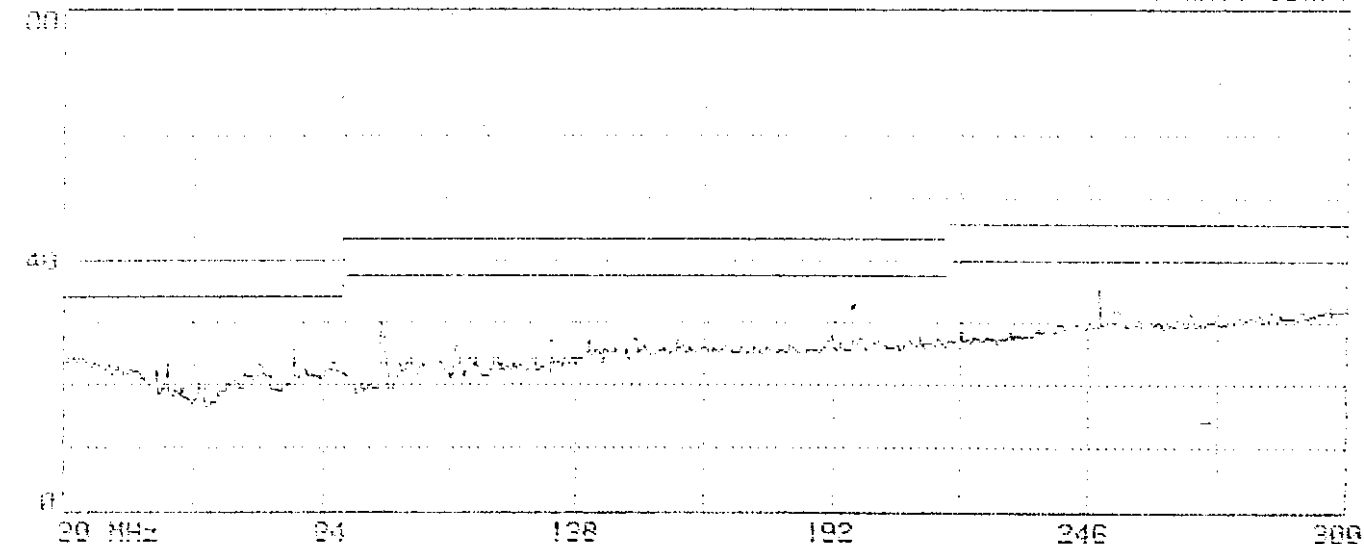


Limit : FCC CLASS-B 3m Probe: BBA9106B(1203)A/C HORIZONTAL
 EUT : MONITOR M/N:UCDT321432-4# Power: 120Vac/60Hz
 Margin: 6dB Standard: 0 Trace: 725, 0, 0, 0, 0
 Memo : 105KHz(1800X1440:70Hz) 3.0m D-SUB

Page#: 726 SP File#: VIEWSONI.E1 Date: 02-11-1999 Time: 21:14:18
 40dB/m ANECHOIC CHAMBER TAIWAN TOKIN EMC ENG. CORP.

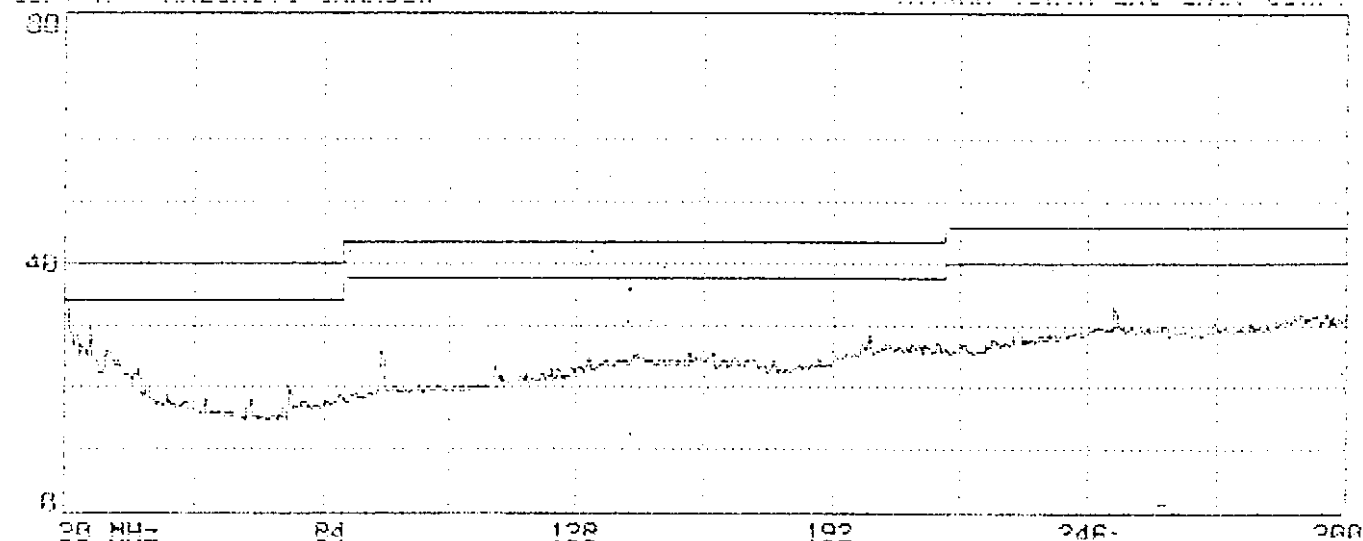


Limit : FCC CLASS-B 3m Probe: BBA9106B(1203)A/C VERTICAL
 EUT : MONITOR M/N:UCDT321432-4# Power: 120Vac/60Hz
 Margin: 6dB Standard: 0 Trace: 726, 0, 0, 0, 0
 Memo : 105KHz(1800X1440:70Hz) 3.0m D-SUB


Page#: 723 SP File#: U160501.E1 Date: 02-11-1999 Time: 21:05:15
 450074 ANECHOIC CHAMBER TAIWAN TOKIN EMC ENG. CORP.

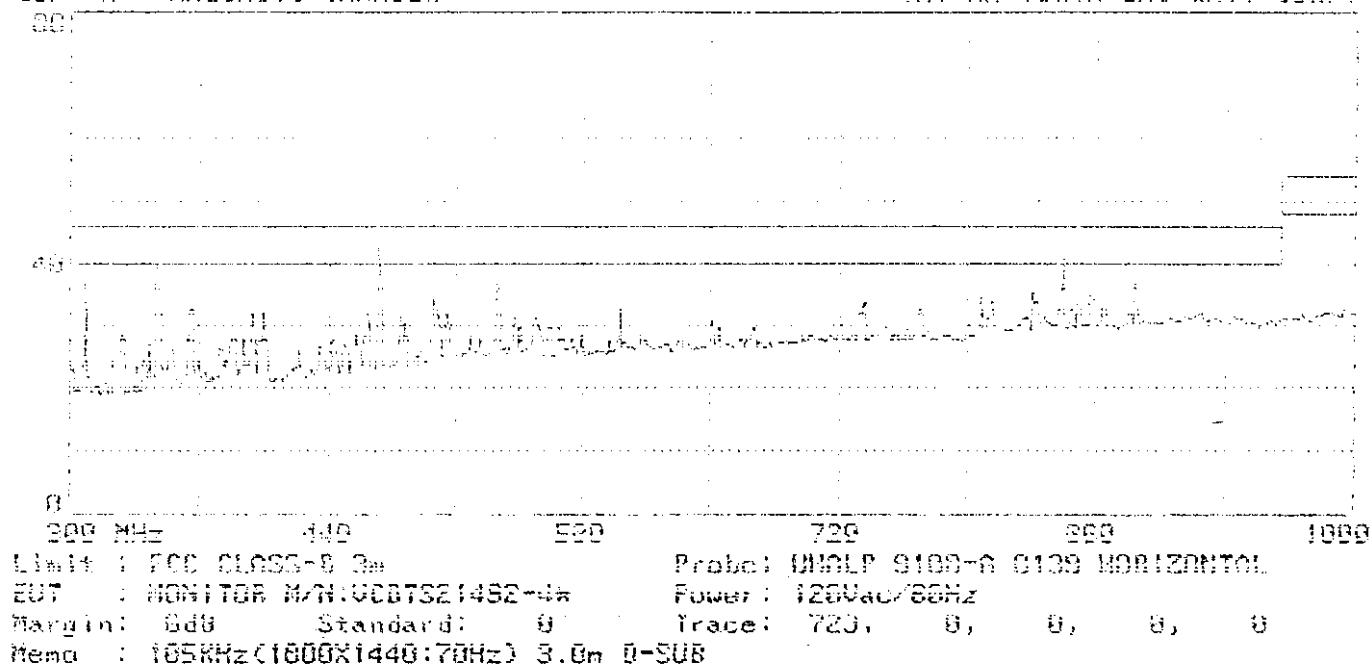

Page#: 724 SP File#: U160501.E1 Date: 02-11-1999 Time: 21:05:21
 450074 ANECHOIC CHAMBER TAIWAN TOKIN EMC ENG. CORP.

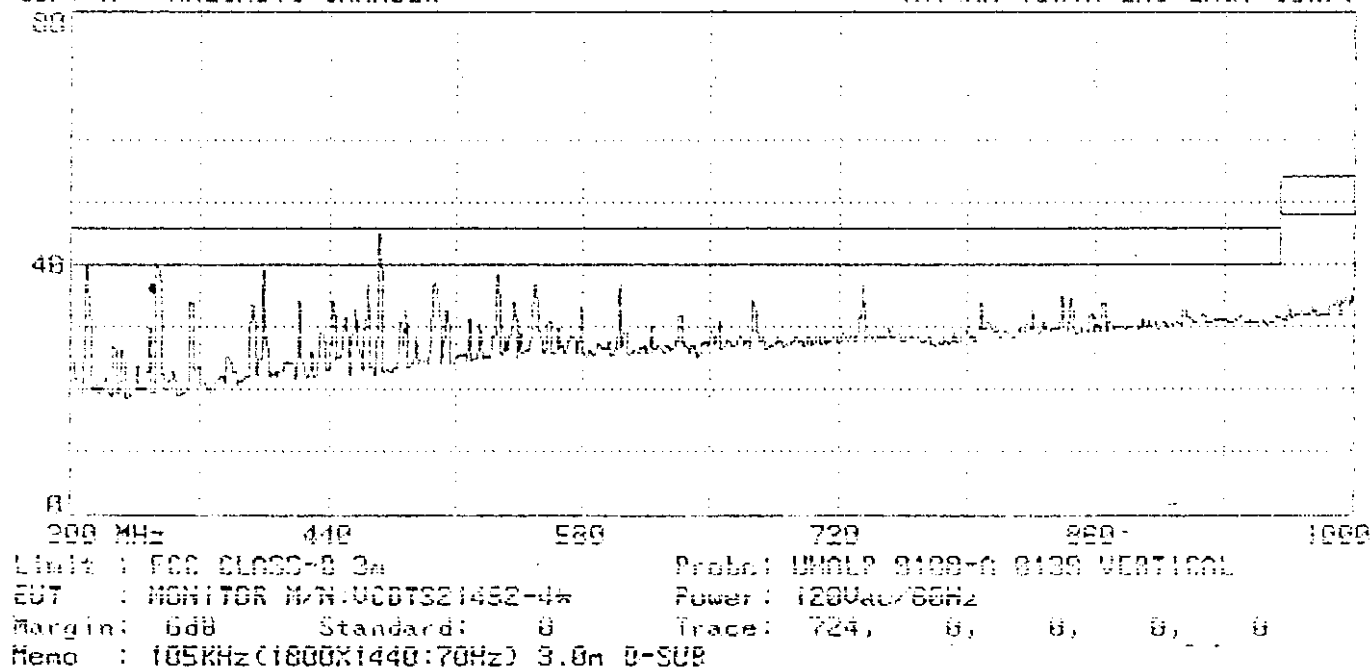


Page#: 719 SP File#: VIEWSONI.E1 Date: 02-11-1999 Time: 20:54:21
 1200V/μ ANECHOIC CHAMBER TAIWAN TOKIN EMC ENG. CORP.

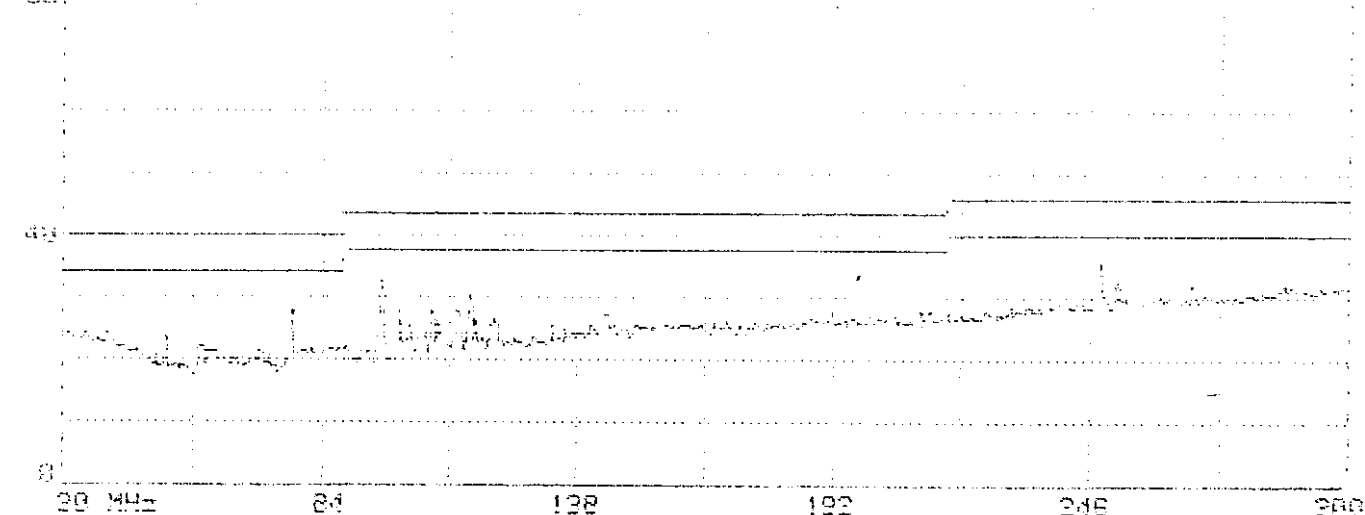


Limit : FCC CLASS-B 3m Probe: BB0910600(1209)0/C HORIZONTAL
 EUT : MONITOR M/N:UCBT321452-4* Power : 120Vac/60Hz
 Margin: 6dB Standard: 0 Trace: 719, 0, 0, 0, 0
 Memo : 105KHz(1800X1440:70Hz) 1.8m BNC

Page#: 720 SP File#: VIEWSONI.E1 Date: 02-11-1999 Time: 20:56:20
 4500V/μ ANECHOIC CHAMBER TAIWAN TOKIN EMC ENG. CORP.

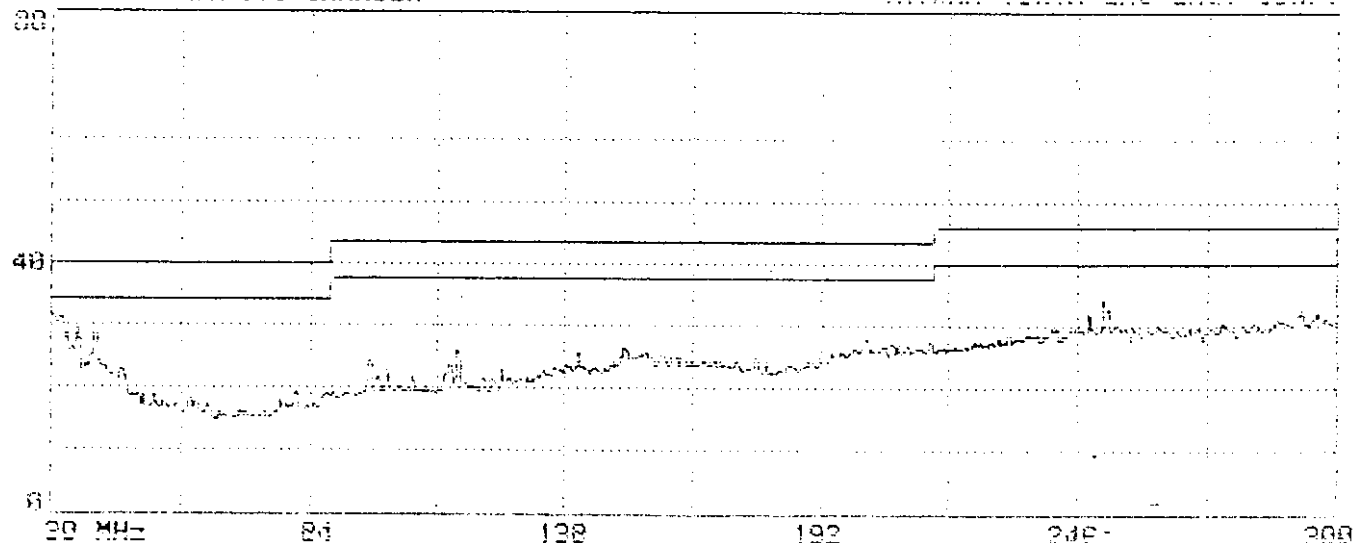

Limit : FCC CLASS-B 3m Probe: BB0910600(1289)0/C VERTICAL
 EUT : MONITOR M/N:UCBT321452-4* Power : 120Vac/60Hz
 Margin: 6dB Standard: 0 Trace: 720, 0, 0, 0, 0
 Memo : 105KHz(1800X1440:70Hz) 1.8m BNC

Page#: 721 SP File#: VIEWSONI.E1 Date: 02-11-1999 Time: 20:58:19
 4901/m ANECHOIC CHAMBER TAIWAN TOKIN EMC ENG. CORP.

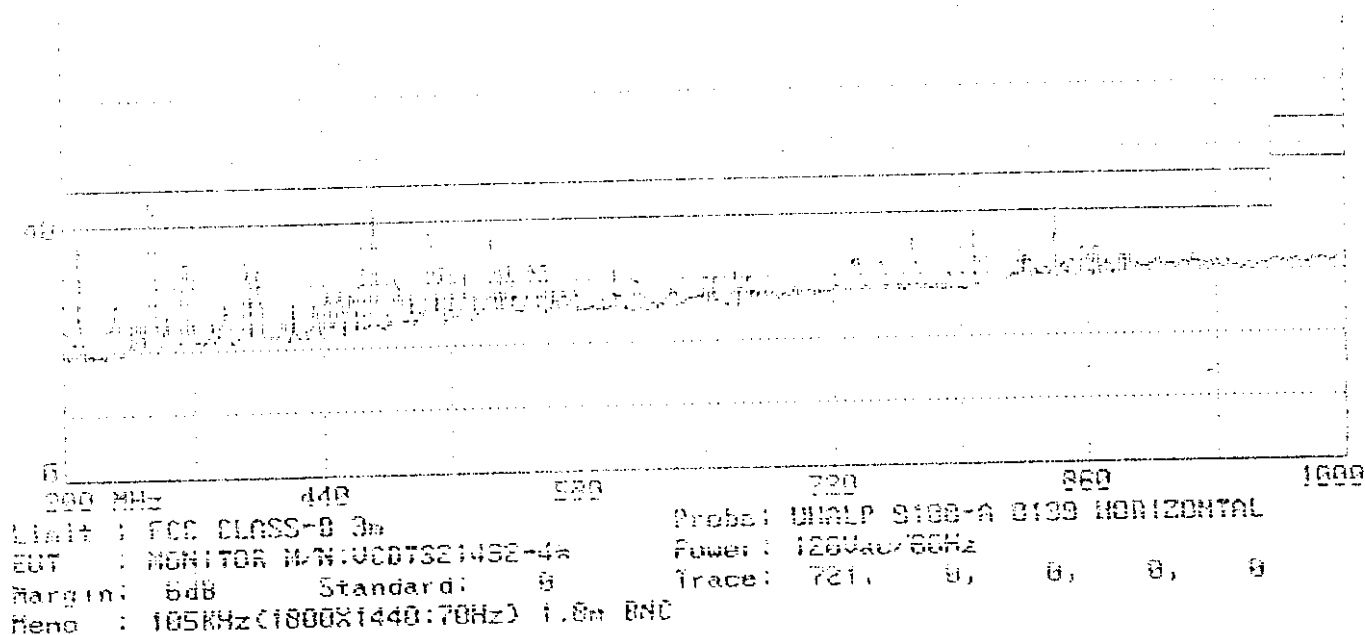

Page#: 722 SP File#: VIEWSONI.E1 Date: 02-11-1999 Time: 20:58:22
 4901/m ANECHOIC CHAMBER TAIWAN TOKIN EMC ENG. CORP.

