

# FCC TEST REPORT

## (Part 15, Subpart C)



Applicant:	Power Idea Technology (Shenzhen) Co., Ltd.
Address:	4th Floor, A Section, Languang Science&technology Building, No.7 Xinxi RD, Hi-Tech Industrial Park North, Nanshan District, ShenZhen, P.R.C.

Manufacturer or Supplier:	Power Idea Technology (Shenzhen) Co., Ltd.
Address:	4th Floor, A Section, Languang Science&technology Building, No.7 Xinxi RD, Hi-Tech Industrial Park North, Nanshan District, ShenZhen, P.R.C.
Product:	Smart Phone
Brand Name:	RugGear
Marketing name :	RG880
FCC ID:	ZLE-RG880
Date of tests:	Dec. 20, 2023 ~Mar. 20, 2024

The tests have been carried out according to the requirements of the following standard:

- ☒ **FCC Part 15, Subpart C, Section 15.247**
- ☒ **ANSI C63.10-2020**

**CONCLUSION: The submitted sample was found to COMPLY with the test requirement**

Prepared by Hanwen Xu Engineer / Mobile Department	Approved by Peibo Sun Manager / Mobile Department
	
Date: Mar. 20, 2024	Date: Mar. 20, 2024

This report is governed by, and incorporates by reference, the Conditions of Testing as posted at the date of issuance of this report at <http://www.bureauveritas.com/home/about-us/our-business/cps/about-us/terms-conditions/> and is intended for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. Measurement uncertainty is only provided upon request for accredited tests. Statements of conformity are based on simple acceptance criteria without taking measurement uncertainty into account, unless otherwise requested in writing. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence or if you require measurement uncertainty; provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents.

## TABLE OF CONTENTS

<b>RELEASE CONTROL RECORD .....</b>	<b>6</b>
<b>1 SUMMARY OF TEST RESULTS.....</b>	<b>7</b>
1.1 MEASUREMENT UNCERTAINTY .....	8
<b>2 GENERAL INFORMATION .....</b>	<b>9</b>
2.1 GENERAL DESCRIPTION OF EUT .....	9
2.2 DESCRIPTION OF TEST MODES .....	12
2.2.1 CONFIGURATION OF SYSTEM UNDER TEST .....	13
2.2.2 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL.....	13
2.3 DUTY CYCLE OF TEST SIGNAL .....	17
2.4 GENERAL DESCRIPTION OF APPLIED STANDARDS .....	18
2.5 DESCRIPTION OF SUPPORT UNITS .....	18
<b>3 TEST TYPES AND RESULTS.....</b>	<b>19</b>
3.1 CONDUCTED EMISSION MEASUREMENT .....	19
3.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT .....	19
3.1.2 TEST INSTRUMENTS.....	19
3.1.3 TEST PROCEDURES .....	20
3.1.4 DEVIATION FROM TEST STANDARD .....	20
3.1.5 TEST SETUP .....	21
3.1.6 EUT OPERATING CONDITIONS .....	21
3.1.7 TEST RESULTS .....	22
3.2 RADIATED EMISSION MEASUREMENT .....	24
3.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT .....	24
3.2.2 TEST INSTRUMENTS.....	25
3.2.3 TEST PROCEDURES .....	27
3.2.4 DEVIATION FROM TEST STANDARD .....	27
3.2.5 TEST SETUP .....	28
3.2.6 EUT OPERATING CONDITIONS .....	29
3.2.7 TEST RESULTS .....	30
3.3 6 DB BANDWIDTH MEASUREMENT .....	134
3.3.1 LIMITS OF 6DB BANDWIDTH MEASUREMENT .....	134
3.3.2 TEST INSTRUMENTS.....	134
3.3.3 TEST PROCEDURE.....	135
3.3.4 DEVIATION FROM TEST STANDARD .....	135



3.3.5	TEST SETUP .....	135
3.3.6	EUT OPERATING CONDITIONS .....	135
3.3.7	TEST RESULTS .....	136
3.4	CONDUCTED OUTPUT POWER.....	137
3.4.1	LIMITS OF CONDUCTED OUTPUT POWER MEASUREMENT .....	137
3.4.2	TEST SETUP .....	137
3.4.3	TEST INSTRUMENTS.....	137
3.4.4	TEST PROCEDURES .....	137
3.4.5	DEVIATION FROM TEST STANDARD .....	137
3.4.6	EUT OPERATING CONDITIONS .....	137
3.4.7	TEST RESULTS .....	138
3.4.7.1	MAXIMUM PEAK OUTPUT POWER .....	138
3.4.7.2	AVERAGE OUTPUT POWER (FOR REFERENCE).....	139
3.5	POWER SPECTRAL DENSITY MEASUREMENT .....	140
3.5.1	LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT .....	140
3.5.2	TEST SETUP .....	140
3.5.3	TEST INSTRUMENTS.....	140
3.5.4	TEST PROCEDURE.....	140
3.5.5	DEVIATION FROM TEST STANDARD .....	140
3.5.6	EUT OPERATING CONDITION .....	140
3.5.7	TEST RESULTS .....	141
3.6	OUT OF BAND EMISSION MEASUREMENT .....	142
3.6.1	LIMITS OF OUT OF BAND EMISSION MEASUREMENT .....	142
3.6.2	TEST SETUP .....	142
3.6.3	TEST INSTRUMENTS.....	142
3.6.4	TEST PROCEDURE.....	142
3.6.5	DEVIATION FROM TEST STANDARD .....	143
3.6.6	EUT OPERATING CONDITION .....	143
3.6.7	TEST RESULTS .....	143
3.7	ANTENNA REQUIREMENTS.....	144
3.7.1	STANDARD APPLICABLE .....	144
3.7.2	ANTENNA CONNECTED CONSTRUCTION .....	144
3.7.3	ANTENNA GAIN .....	144
4	<b>PHOTOGRAPHS OF THE TEST CONFIGURATION .....</b>	<b>145</b>
5	<b>MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB</b>	<b>146</b>



<b>6</b>	<b>APPENDIX 1:</b>	<b>147</b>
	DTS BANDWIDTH	147
	TEST RESULT	147
	TEST GRAPHS	148
	OCCUPIED CHANNEL BANDWIDTH	156
	TEST RESULT	156
	TEST GRAPHS	157
	MAXIMUM CONDUCTED OUTPUT POWER	165
	TEST RESULT PEAK	165
	TEST RESULT AVERAGE	166
	MAXIMUM POWER SPECTRAL DENSITY	167
	TEST RESULT	167
	TEST GRAPHS	168
	BAND EDGE MEASUREMENTS	178
	TEST RESULT	178
	TEST GRAPHS	179
	CONDUCTED SPURIOUS EMISSION	185
	TEST RESULT	185
	TEST GRAPHS	187
	DUTY CYCLE	195
	TEST RESULT	195
	TEST GRAPHS	196
<b>7</b>	<b>APPENDIX 2:BLE</b>	<b>200</b>
	DTS BANDWIDTH	200
	TEST RESULT	200
	TEST GRAPHS	201
	OCCUPIED CHANNEL BANDWIDTH	207
	TEST RESULT	207
	TEST GRAPHS	208
	MAXIMUM CONDUCTED OUTPUT POWER	214
	TEST RESULT PEAK	214
	TEST RESULT AVERAGE	214
	MAXIMUM POWER SPECTRAL DENSITY	215
	TEST RESULT	215
	TEST GRAPHS	216
	BAND EDGE MEASUREMENTS	222



**Test Report No.: PSU-QSU2312200110RF08**

TEST RESULT .....	222
TEST GRAPHS.....	223
CONDUCTED SPURIOUS EMISSION.....	227
TEST RESULT .....	227
TEST GRAPHS.....	229
DUTY CYCLE .....	242
TEST RESULT .....	242
TEST GRAPHS.....	243



Test Report No.: PSU-QSU2312200110RF08

## RELEASE CONTROL RECORD

ISSUE NO.	REASON FOR CHANGE	DATE ISSUED
PSU-QSU2312200110RF08	Original release	Mar. 20, 2024



## 1 SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: FCC PART 15, SUBPART C (SECTION 15.247)		
STANDARD SECTION	TEST TYPE AND LIMIT	RESULT
15.207	AC Power Conducted Emission	Compliance
15.205 15.209	Radiated Emissions	Compliance
15.247(d)	Out of band Emission Measurement	Compliance
15.247(a)(2)	6dB bandwidth	Compliance
15.247(b)	Conducted Output power	Compliance
15.247(e)	Power Spectral Density	Compliance
15.203	Antenna Requirement	Compliance

Note : 1.Except RSE, other data please refer to Appendix 1 (for WIFI-2.4G) and Appendix 2 (for BLE).

### \*Test Lab Information Reference

#### Lab A:

Huarui 7Layers High Technology (Suzhou) Co., Ltd.

#### Lab Address:

Tower N, Innovation Center, 88 Zhuyi Road, High-tech District, Suzhou City, Anhui Province

**Accredited Test Lab Cert 6613.01**


The FCC Site Registration No. is 434559; The Designation No. is CN1325.

## 1.1 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

MEASUREMENT	UNCERTAINTY
AC Power Conducted emissions	$\pm 2.70\text{dB}$
Radiated emissions (9KHz~30MHz)	$\pm 2.68\text{dB}$
Radiated emissions (30MHz~1GHz)	$\pm 4.98\text{dB}$
Radiated emissions (1GHz ~6GHz)	$\pm 4.70\text{dB}$
Radiated emissions (6GHz ~18GHz)	$\pm 4.60\text{dB}$
Radiated emissions (18GHz ~40GHz)	$\pm 4.12\text{dB}$
Conducted emissions	$\pm 4.01\text{dB}$
Occupied Channel Bandwidth	$\pm 43.58\text{KHz}$
Conducted Output power	$\pm 2.06\text{dB}$
Power Spectral Density	$\pm 0.85\text{ dB}$

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of  $k = 2$ .

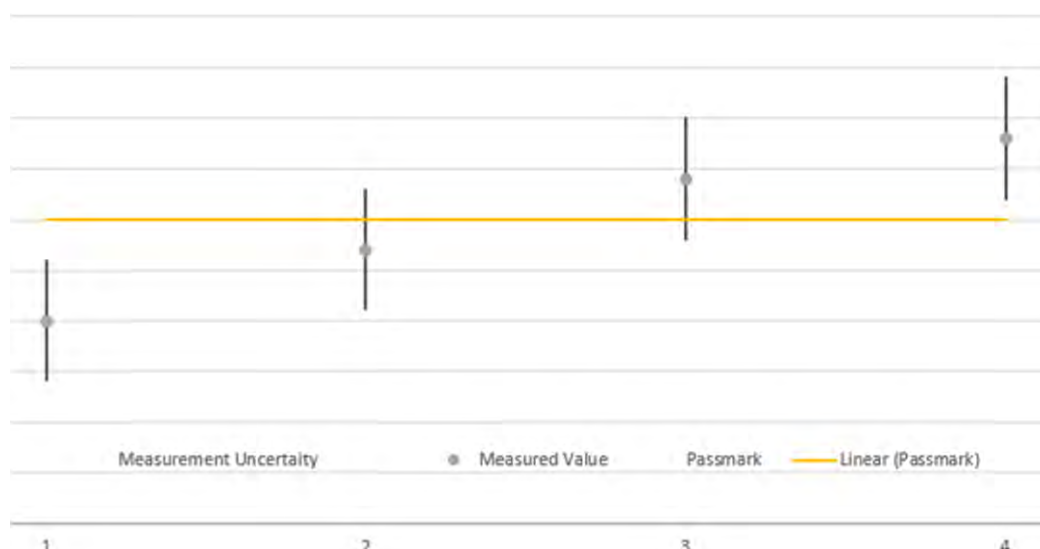

The verdicts in this test report are given according the above diagram:

Case	Measured Value	Uncertainty Range	Verdict
1	below pass mark	below pass mark	Passed
2	below pass mark	within pass mark	Passed
3	above pass mark	within pass mark	Failed
4	above pass mark	above pass mark	Failed

That means, the laboratory applies, as decision rule (see ISO/IEC 17025:2017), the so-called shared risk principle.





## 2 GENERAL INFORMATION

### 2.1 GENERAL DESCRIPTION OF EUT

<b>PRODUCT*</b>	Smart Phone
<b>BRAND NAME*</b>	RugGear
<b>MODEL NAME*</b>	PSM03G
<b>MARKETING NAME*</b>	RG880
<b>NOMINAL VOLTAGE*</b>	5.0Vdc/ 9.0Vdc/ 12.0Vdc(Adapter) 3.85Vdc (Battery)
<b>MODULATION</b>	DSSS, OFDM, GFSK
<b>TRANSMISSION RATE</b>	802.11b: 11/ 5.5/ 2.0 / 1.0 Mbps 802.11g: 54/ 48/ 36 / 24 / 18 / 9/ 6 Mbps 802.11n20: up to 72.2 Mbps 802.11n40: up to 150 Mbps 802.11ac20: up to 86.7Mbps 802.11ac40: up to 200 Mbps BT_LE: 0.125 Mbps /0.5 Mbps /1 Mbps/2 Mbps
<b>OPERATING FREQUENCY</b>	2412-2462MHz for 11b/g/n/ac(HT20/40) 2402-2480MHz for BT-LE(GFSK)
<b>MAX. OUTPUT POWER</b>	WLAN: 122.74mW (Maximum) BT-LE: 7.59mW (Maximum)
<b>ANTENNA TYPE*</b>	PIFA Antenna with 1.8dBi gain
<b>HW VERSION*</b>	MP619_MB_V1.02_PCB
<b>SW VERSION*</b>	RG880_EEA_00.00_1_20240305
<b>I/O PORTS*</b>	Refer to user's manual
<b>CABLE SUPPLIED*</b>	USB cable: non-shielded cable, with w/o ferrite core, 1.0 meter

**NOTE:**

1. \*Since the above data and/or information is provided by the client relevant results or conclusions of this report are only made for these data and/or information, Test Lab is not responsible for the authenticity, integrity and results of the data and information and/or the validity of the conclusion.
2. For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.
3. The EUT incorporates a SISO function. Physically, the EUT provides one transmitter and one receiver.

MODULATION MODE	TX/RX FUNCTION
802.11b	1TX /1RX
802.11g	1TX /1RX
802.11n /ac(20MHz)	1TX /1RX
802.11n/ac (40MHz)	1TX /1RX
BT_LE(1MHz)	1TX /1RX
BT_LE(2MHz)	1TX /1RX
BT_LE(S2)	1TX /1RX
BT_LE(S8)	1TX /1RX

4. For the test results, the EUT had been tested with all conditions. But only the worst case was shown in test report.
5. Antenna gain and EUT conducted cable loss are provided by the customer, and the laboratory will record the results based on these items that involve these two parameters.
6. **List of Accessory:**

ACCESSORIES	BRAND	MANUFACTURER	MODEL	SPECIFICATION
CPU	QUALCOMM	N/A	SM6225	N/A
eMMC 1 (=ROM 1)	SAMSUNG	N/A	KM2L9001CM-B518	N/A
eMMC 2 (=ROM 2)	Hynix	N/A	H9QT0GECN6X145R	N/A
RAM 1	N/A	N/A	N/A	N/A
RAM 2	N/A	N/A	N/A	N/A
BT/WLAN Module	N/A	N/A	N/A	N/A
NFC chipset	NXP	N/A	N/A	N/A
Battery	N/A	N/A	BL450AGP	Power Rating: 4.4V 4500mAh

**Test Report No.: PSU-QSU2312200110RF08**

Adapter	N/A	SHENZHEN MERRYKING ELECTRONICS CO., LTD	MK-Q181US	I/P: 100-240Vac, 50/60Hz, 0.5A, O/P:5.0V 3.0A or 9.0V 2.0A or 12.0V 1.5A
USB Cable	N/A	Huizhou Huating Technology Co., Ltd	USB1.0	Signal Line,1.0meter



## 2.2 DESCRIPTION OF TEST MODES

11 channels are provided for 802.11b, 802.11g and 802.11n/ac(HT20):

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
1	2412 MHz	7	2442 MHz
2	2417 MHz	8	2447 MHz
3	2422 MHz	9	2452 MHz
4	2427 MHz	10	2457 MHz
5	2432 MHz	11	2462 MHz
6	2437 MHz		

7 channels are provided for 802.11n/ac (HT40):

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
3	2422 MHz	7	2442 MHz
4	2427 MHz	8	2447 MHz
5	2432 MHz	9	2452 MHz
6	2437 MHz		

40 channels are provided for BT-LE (GFSK):

CHANNEL	FREQ. (MHZ)	CHANNEL	FREQ. (MHZ)	CHANNEL	FREQ. (MHZ)	CHANNEL	FREQ. (MHZ)
0	2402	10	2422	20	2442	30	2462
1	2404	11	2424	21	2444	31	2464
2	2406	12	2426	22	2446	32	2466
3	2408	13	2428	23	2448	33	2468
4	2410	14	2430	24	2450	34	2470
5	2412	15	2432	25	2452	35	2472
6	2414	16	2434	26	2454	36	2474
7	2416	17	2436	27	2456	37	2476
8	2418	18	2438	28	2458	38	2478
9	2420	19	2440	29	2460	39	2480



## 2.2.1 CONFIGURATION OF SYSTEM UNDER TEST

Please see section 4 photographs of the test configuration for reference.

## 2.2.2 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, XYZ axis and antenna ports.  
The worst case was found when positioned on Y axis for radiated emission. Following test modes were selected for the final test, and the final worst case is marked in boldface and recorded in the report:

EUT CONFIGURE MODE	APPLICABLE TO				MODE
	RE<1G	RE≥1G	PLC	APCM	
-	√	√	√	√	-

Where **RE<1G**: Radiated Emission below 1GHz **RE≥1G**: Radiated Emission above 1GHz  
**PLC**: Power Line Conducted Emission **APCM**: Antenna Port Conducted Measurement

**NOTE**: No need to concern of Conducted Emission due to the EUT is powered by battery.

### RADIATED EMISSION TEST (BELOW 1GHz):

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ The following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION	DATA RATE (Mbps)
802.11b	1 to 11	6	OFDM	MCS0
BT-LE	1 to 38	19	GFSK	2.0

**RADIATED EMISSION TEST (ABOVE 1GHz):**

☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).

☒ The following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION	DATA RATE (Mbps)
802.11b	1 to 11	1, 6, 11	DSSS	1.0
802.11g	1 to 11	1, 6, 11	OFDM	6.0
802.11n/ac HT20	1 to 11	1, 6, 11	OFDM	MCS0
802.11n/ac HT40	3 to 9	3,6,9	OFDM	MCS0
BT-LE	0 to 39	0,19, 39	GFSK	0.125&0.5&1.0
BT-LE	1 to 38	1,19, 38	GFSK	2.0

**POWER LINE CONDUCTED EMISSION TEST**

☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).

☒ The following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION	DATA RATE (Mbps)
802.11ac 40	3 to 9	3	OFDM	MCS0

**BANDEDGE MEASUREMENT:**

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ The following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION	DATA RATE (Mbps)
802.11b	1 to 11	1, 6, 11	DSSS	1.0
802.11g	1 to 11	1, 6, 11	OFDM	6.0
802.11n/ac HT20	1 to 11	1, 6, 11	OFDM	MCS0
802.11n/ac HT40	3 to 9	3,6,9	OFDM	MCS0
BT-LE	0 to 39	0,19, 39	GFSK	0.125&0.5&1.0
BT-LE	1 to 38	1,19, 38	GFSK	2.0

**ANTENNA PORT CONDUCTED MEASUREMENT:**

- ☒ This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.
- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ The following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION	DATA RATE (Mbps)
802.11b	1 to 11	1, 6, 11	DSSS	1.0
802.11g	1 to 11	1, 6, 11	OFDM	6.0
802.11n/ac HT20	1 to 11	1, 6, 11	OFDM	MCS0
802.11n/ac HT40	3 to 9	3,6,9	OFDM	MCS0
BT-LE	0 to 39	0,19, 39	GFSK	0.125&0.5&1.0
BT-LE	1 to 38	1,19, 38	GFSK	2.0

**TEST CONDITION:**

APPLICABLE TO	ENVIRONMENTAL CONDITIONS	TEST VOLTAGE	TESTED BY
RE<1G	23deg. C, 70%RH	DC 5.0V/ 9.0V/ 12.0V By Adapter	Hanwen Xu
RE≥1G	23deg. C, 70%RH	DC 5.0V/ 9.0V/ 12.0V By Adapter	Hanwen Xu
PLC	25deg. C, 52%RH	DC 5.0V/ 9.0V/ 12.0V By Adapter	Hanwen Xu
APCM	25deg. C, 60%RH	DC 5.0V/ 9.0V/ 12.0V By Adapter	Hanwen Xu





## 2.3 DUTY CYCLE OF TEST SIGNAL

Please Refer to Appendix1/2 Of this test report.

### WORST-CASE DATA:

Measured Duty Cycle		
Mode		Duty Cycle [%]
		ANT0
WIFI 2.4GHz	11B	98.96
	11G	97.93
	11N20	97.79
	11N40	93.51
	11AC20	97.79
	11AC40	93.51
BT LE	BT4.0	86.94
	BT5.0	66.13
	BTS2	81.01
	BTS8	94.52

Note:

Duty cycle of test signal is < 98%, duty factor shall be considered.



## 2.4 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

**FCC Part 15, Subpart C, Section 15.247**

**KDB 558074 D01 DTS Meas Guidance v05r02**

**ANSI C63.10-2020**

Note :

1. All test items have been performed and recorded as per the above standards.
2. The EUT is also considered as a kind of computer peripheral, because the connection to computer is necessary for typical use. It has been verified to comply with the requirements of FCC Part 15, Subpart B, Class B (Certification). The test report has been issued separately.

## 2.5 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

NO.	PRODUCT	BRAND	MODEL NO.	SERIAL NO.	FCC ID
1	N/A	N/A	N/A	N/A	N/A

NO.	SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS
1	USB Line: Shielded, Detachable 1.0m;



### 3 TEST TYPES AND RESULTS

#### 3.1 CONDUCTED EMISSION MEASUREMENT

##### 3.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

FREQUENCY OF EMISSION (MHz)	CONDUCTED LIMIT (dBμV)	
	Quasi-peak	Average
0.15 ~ 0.5	66 to 56	56 to 46
0.5 ~ 5	56	46
5 ~ 30	60	50

- NOTE:**
1. The lower limit shall apply at the transition frequencies.
  2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.
  3. All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

##### 3.1.2 TEST INSTRUMENTS

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
EMI Test Receiver	Rohde&Schwarz	ESR3	102749	Feb.25,22	Feb.24,24
EMI Test Receiver	Rohde&Schwarz	ESR3	102749	Feb.24,24	Feb.23,26
ELEKTRA test software	Rohde&Schwarz	ELEKTRA	NA	N/A	N/A
LISN network	Rohde&Schwarz	ENV216	102640	Feb.17,22	Feb.16,24
LISN network	Rohde&Schwarz	ENV216	102640	Feb.16,24	Feb.15,26
CABLE	Rohde&Schwarz	W61.01	N/A	Apr.28,23	Apr.27,24
CABLE	Rohde&Schwarz	W601	N/A	Apr.28,23	Apr.27,24

**NOTE:**

1. The test was performed in CE shielded room.
2. The calibration interval of the above test instruments is 12/24 months and the calibrations are traceable to CEPREI/CHINA, GRGT/CHINA and NIM/CHINA.



### 3.1.3 TEST PROCEDURES

- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- c. The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit - 20dB) was not recorded.


**NOTE:** All modes of operation were investigated and the worst-case emissions are reported.

### 3.1.4 DEVIATION FROM TEST STANDARD

No deviation.



### 3.1.5 TEST SETUP

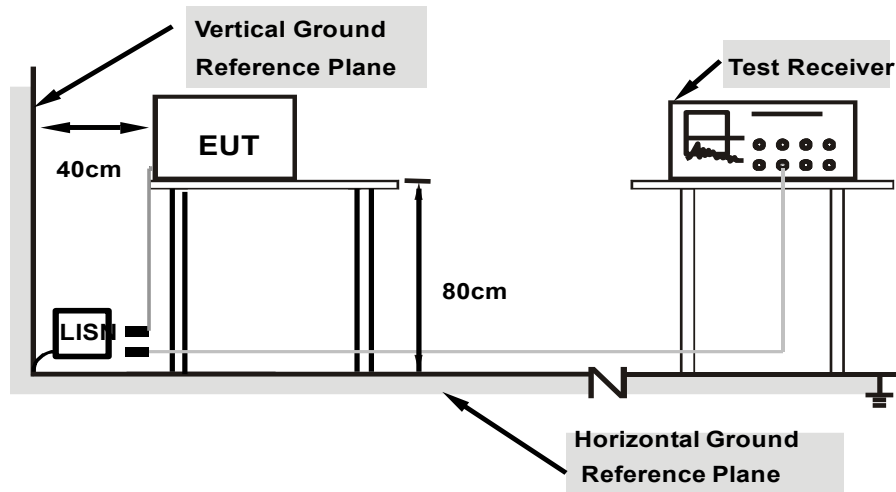

**Note:** 1.Support units were connected to second LISN.  
2.Both of LISNs (AMN) are 80 cm from EUT and at least 80  
from other units and other metal planes

For the actual test configuration, please refer to the attached file (Test Setup Photo).

### 3.1.6 EUT OPERATING CONDITIONS

- Turned on the power and connected of all equipment.
- EUT was operated according to the type used was description in manufacturer's specifications or the User's Manual.



## 3.1.7 TEST RESULTS

## CONDUCTED WORST-CASE DATA:

Frequency Range	150KHz ~ 30MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9 kHz
Input Power	120Vac, 60Hz	Environmental Conditions	26deg. C, 51%RH
Tested By	Hanwen Xu		

Rg	Frequency [MHz]	QPK Level [dBμV]	QPK Limit [dBμV]	QPK Margin [dB]	CAV Level [dBμV]	CAV: AVG Limit [dBμV]	CAV Margin [dB]	Correction [dB]	Line	Meas. BW [kHz]
1	0.155	51.84	65.75	13.91	36.56	55.75	19.19	12.52	L1	9.000
1	0.344	34.47	59.12	24.65	20.91	49.12	28.21	11.78	L1	9.000
1	0.803	29.25	56.00	26.75	21.51	46.00	24.49	11.74	L1	9.000
1	1.689	26.47	56.00	29.53	18.01	46.00	27.99	11.75	L1	9.000
1	6.059	29.89	60.00	30.11	18.21	50.00	31.79	11.80	L1	9.000
1	16.526	20.21	60.00	39.79	10.68	50.00	39.33	11.85	L1	9.000

REMARKS: 1. Q.P. and AV. are abbreviations of quasi-peak and average individually.


2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.

3. The emission levels of other frequencies were very low against the limit.

4. Margin value = Limit value - Emission level

5. Correction factor = Insertion loss + Cable loss

6. Emission Level = Correction Factor + Reading Value.

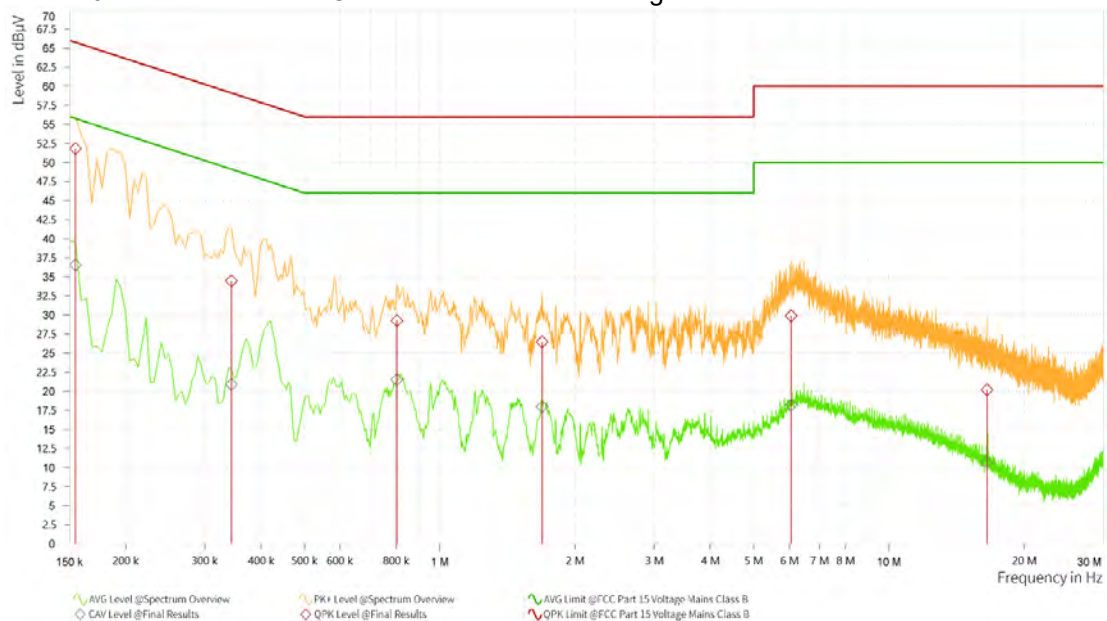




Frequency Range	150KHz ~ 30MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9 kHz
Input Power	120Vac, 60Hz	Environmental Conditions	26deg. C, 51%RH
Tested By	Hanwen Xu		

Rg	Frequency [MHz]	QPK Level [dBμV]	QPK Limit [dBμV]	QPK Margin [dB]	CAV Level [dBμV]	CAV: AVG Limit [dBμV]	CAV Margin [dB]	Correction [dB]	Line	Meas. BW [kHz]
1	0.164	45.43	65.28	19.85	29.63	55.28	25.65	12.18	N	9.000
1	0.416	46.58	57.54	10.96	40.48	47.54	7.06	12.81	N	9.000
1	1.005	39.03	56.00	16.97	32.70	46.00	13.30	12.73	N	9.000
1	2.585	35.67	56.00	20.33	28.37	46.00	17.63	12.74	N	9.000
1	5.654	32.60	60.00	27.40	25.74	50.00	24.26	12.76	N	9.000
1	11.904	29.12	60.00	30.88	22.82	50.00	27.18	12.80	N	9.000

- REMARKS:** 1. Q.P. and AV. are abbreviations of quasi-peak and average individually.  
2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.  
3. The emission levels of other frequencies were very low against the limit.  
4. Margin value = Limit value -Emission level  
5. Correction factor = Insertion loss + Cable loss  
6. Emission Level = Correction Factor + Reading Value.

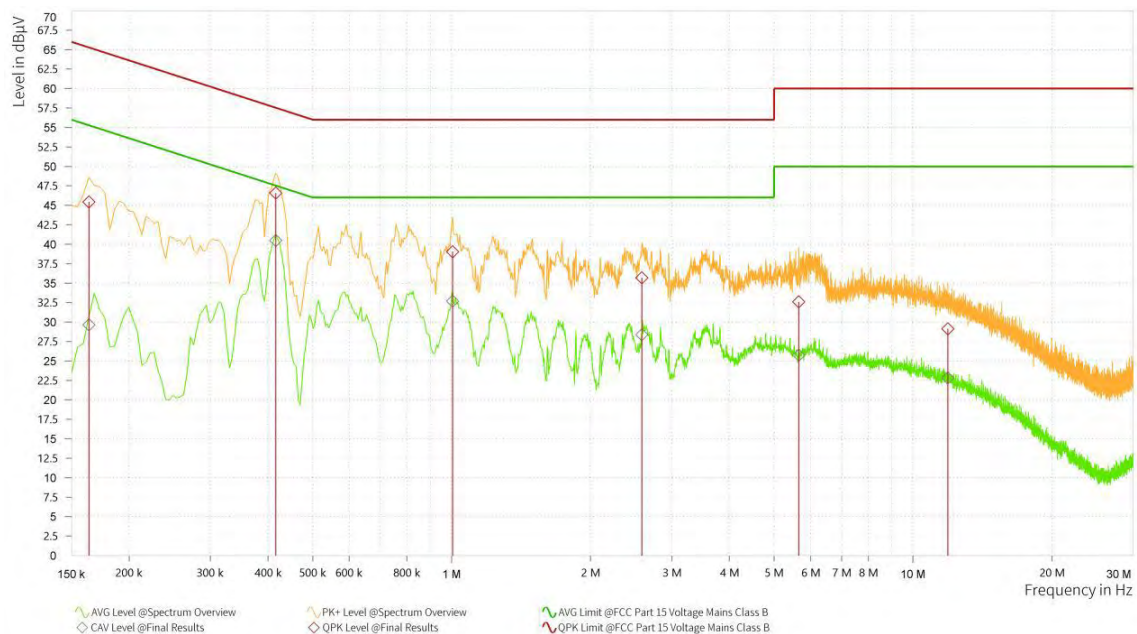



## 3.2 RADIATED EMISSION MEASUREMENT

### 3.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT

Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a).

FREQUENCIES (MHz)	FIELD STRENGTH (microvolts/meter)	MEASUREMENT DISTANCE (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

**NOTE:**

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.





## 3.2.2 TEST INSTRUMENTS

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
Pre-Amplifier	R&S	SCU18F1	100815	Aug.30,22	Aug.29,24
Pre-Amplifier	R&S	SCU08F1	101028	Sep.16,22	Sep.15,24
Signal Generator	R&S	SMB100A	182185	Feb.16,22	Feb.15,24
Signal Generator	R&S	SMB100A	182185	Feb.15,24	Feb.14,26
3m Fully-anechoic Chamber	TDK	9m*6m*6m	HRSW-SZ-EMC-01Chamber	Nov.25,22	Nov.24,25
3m Semi-anechoic Chamber	TDK	9m*6m*6m	HRSW-SZ-EMC-02Chamber	Nov.25,22	Nov.24,25
EMI TEST Receiver	R&S	ESW44	101973	Feb.25,22	Feb.24,24
EMI TEST Receiver	R&S	ESW44	101973	Feb.24,24	Feb.23,26
Bilog Antenna	SCHWARZBECK	VULB 9163	1264	Feb.28,22	Feb.27,24
Bilog Antenna	SCHWARZBECK	VULB 9163	1264	Feb.27,24	Feb.26,26
Horn Antenna	ETS-LINDGREN	3117	227836	Aug.22,22	Aug.21,24
Horn Antenna (18GHz-40GHz)	Steatite Q-par Antennas	QMS 00880	23486	Feb.23,22	Feb.22,24
Horn Antenna (18GHz-40GHz)	Steatite Q-par Antennas	QMS 00880	23486	Feb.22,24	Feb.21,26
Horn Antenna	Steatite Q-par Antennas	QMS 00208	23485	Aug.22,22	Aug.21,24
Loop Antenna	SCHWARZ	HFH2-Z2/Z2E	100976	Feb.23,22	Feb.22,24
Loop Antenna	SCHWARZ	HFH2-Z2/Z2E	100976	Feb.22,24	Feb.21,26
WIDEBAND RADIO COMMUNICATION TESTER	R&S	CMW500	169399	Jun.27,22	Jun.26,24
Test Software	ELEKTRA	ELEKTRA4.32	N/A	N/A	N/A
Open Switch and Control Unit	R&S	OSP220	101964	N/A	N/A
DC Source	HYELEC	HY3010B	551016	Aug.31,22	Aug.30,24
Hygrothermograph	DELI	20210528	SZ014	Sep.06,22	Sep.05,24
6DB attenuator	Tonscend Technology Co., Ltd	N/A	23062787	N/A	N/A
PC	LENOVO	E14	HRSW0024	N/A	N/A
TMC-AMI18843A(CABLE)	R&S	HF290-NMNM-7.00M	N/A	N/A	N/A



BUREAU  
VERITAS

**Test Report No.: PSU-QSU2312200110RF08**

TMC-AMI18843A(CABLE)	R&S	HF290-NMNM-4.00M	N/A	N/A	N/A
CABLE	R&S	W13.02	N/A	Apr.28,23	Apr.27,24
CABLE	R&S	W12.14	N/A	Apr.28,23	Apr.27,24

- NOTE:**
1. The calibration interval of the above test instruments is 12/ 24/ 36 months and the calibrations are traceable to CEPREI/CHINA, GRGT/CHINA and NIM/CHINA.
  2. The test was performed in 3m Chamber.
  3. The FCC Site Registration No. is 434559; The Designation No. is CN1325.

### 3.2.3 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 0.8 meters (for below 1GHz) / 1.5 meters (for above 1GHz) above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. During the test, each emission was maximized by: having the EUT continuously working, investigated all operating modes, rotated about all 3 axis (X, Y & Z) and considered typical configuration to obtain worst position, manipulating interconnecting cables, For battery operated equipment, the equipment tests shall be perform using fresh batteries. The turntable was rotated to maximize the emission level.

**Note:**

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 3MHz for RMS Average (Duty cycle < 98%) for Average detection (AV) at frequency above 1GHz, then the measurement results was added to a correction factor ( $10 \log(1/\text{duty cycle})$ ).
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 10Hz (Duty cycle  $\geq 98\%$ ) for Average detection (AV) at frequency above 1GHz.
5. All modes of operation were investigated and the worst-case emissions are reported.


### 3.2.4 DEVIATION FROM TEST STANDARD

No deviation




### 3.2.5 TEST SETUP

#### <Frequency Range 9KHz~30MHz >

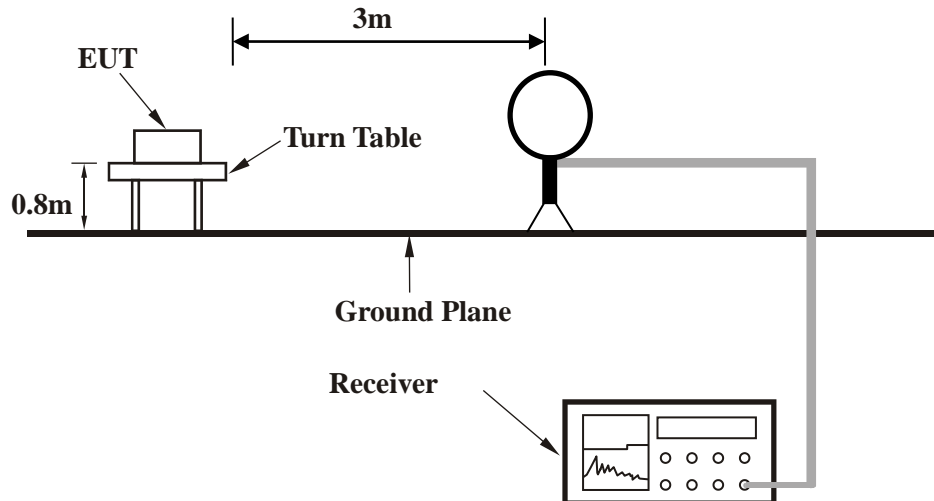


#### < Frequency Range 30MHz~1GHz >

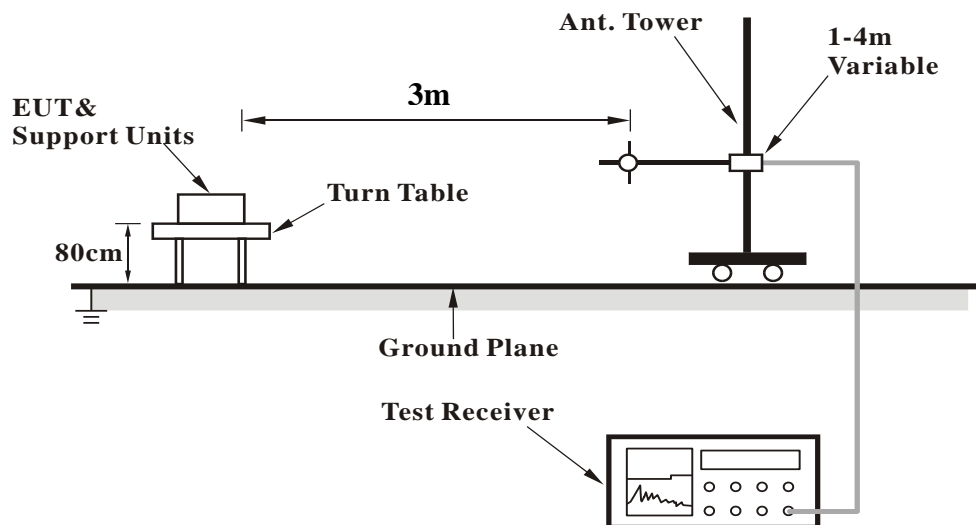



**<Frequency Range above 1GHz>**

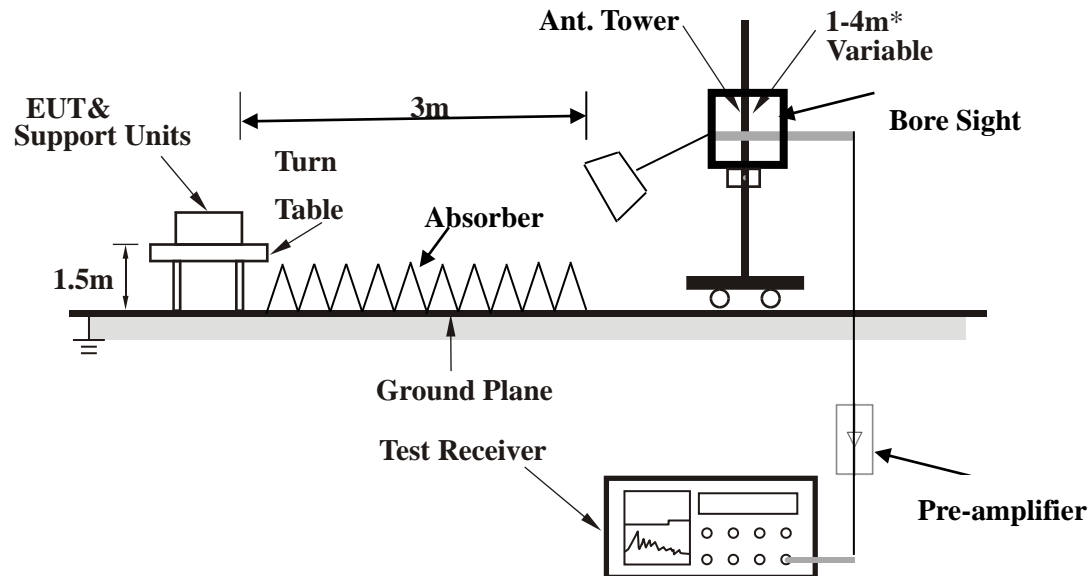

**Note:** Above 1G is a directional antenna

Depends on the EUT height and the antenna 3dB beamwidth both, refer to section 7.3 of CISPR 16-2-3.

For the actual test configuration, please refer to the attached file (Test Setup Photo).

### 3.2.6 EUT OPERATING CONDITIONS

- Set the EUT under full load condition and placed them on a testing table.
- Set the transmitter part of EUT under transmission condition continuously at specific channel frequency.
- The necessary accessories enable the EUT in full functions.



### 3.2.7 TEST RESULTS

NOTE : The 9K~30MHz amplitude of spurious emissions attenuated more than 20 dB below the permissible value is not required in the report.

#### BELOW 1GHz WORST-CASE DATA:

30 MHz – 1GHz data:

802.11b:


CHANNEL	TX Channel 6	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	30MHz ~ 1GHz		

#### ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
1	41.834	29.55	10.45	-7.76	H	359	2
1	86.503	30.99	9.01	-12.11	H	102.4	2
1	124.042	21.29	22.21	-11.63	H	358	1
1	239.520	20.46	25.54	-7.29	H	5	1
1	388.900	26.17	19.83	-3.46	H	358	1
1	573.152	27.84	18.16	-2.58	H	359.1	1

#### REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor  
Margin value = Limit value- Emission level.

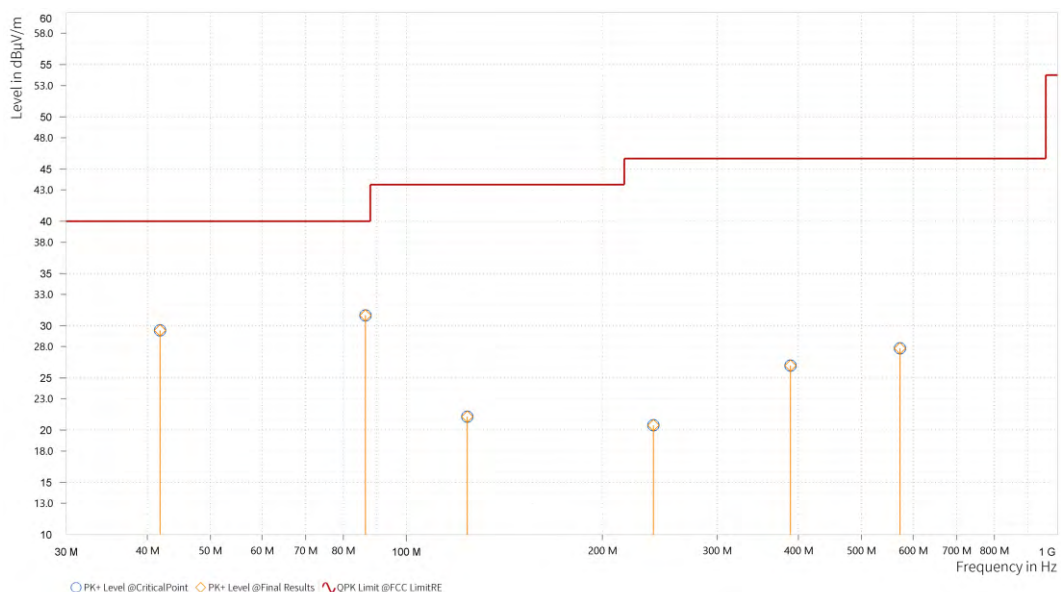



BUREAU  
VERITAS

Test Report No.: PSU-QSU2312200110RF08


CHANNEL	TX Channel 6	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	30MHz ~ 1GHz		

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
1	48.188	27.40	12.60	-7.44	V	0.9	2
1	73.262	22.37	17.63	-12.95	V	4.6	1
1	111.626	20.32	23.18	-9.54	V	0.9	2
1	163.715	18.44	25.06	-11.42	V	257.8	1
1	302.425	23.18	22.82	-5.59	V	257.8	1
1	504.670	25.91	20.09	-3.49	V	1	1

REMARKS:

- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor  
Margin value = Limit value- Emission level.

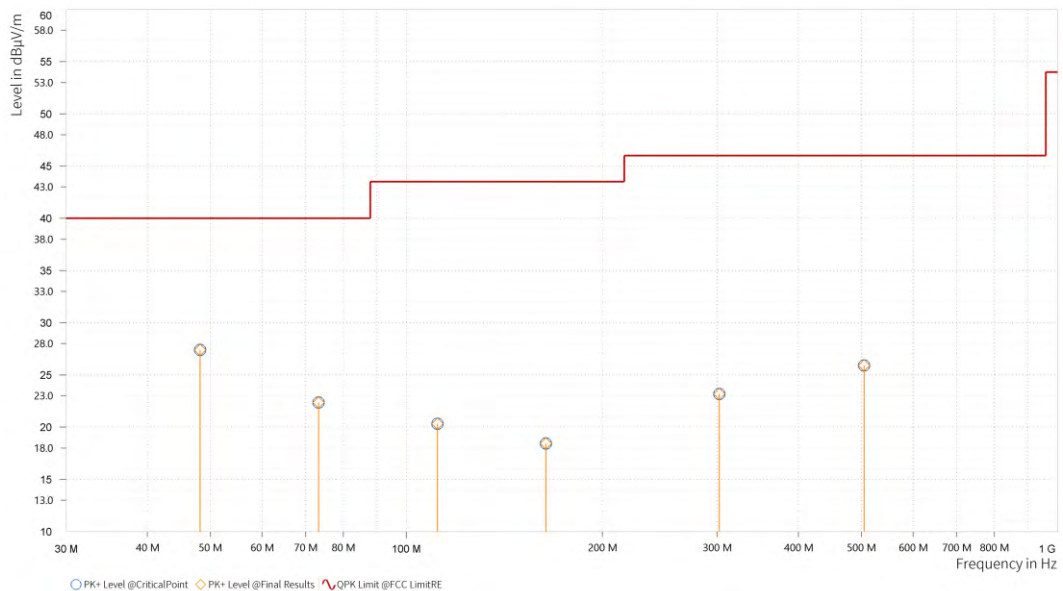



**ABOVE 1GHz WORST-CASE DATA:**

**Note:** 1. For radiated emissions testing , the full testing range of different modes have been scanned , only the worst case harmonic data is reported in the sheet.


2. All other emissions were greater than 20dB below the limit was not recorded

**802.11b:**

CHANNEL	TX Channel 1	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
1	2,384.500	48.00	74.00	26.00	7.08	H	217.3	2.00
1	2,390.000	52.84	74.00	21.16	7.08	H	217.3	2.00
1	2,411.000	105.01			7.17	H	217.3	2.00

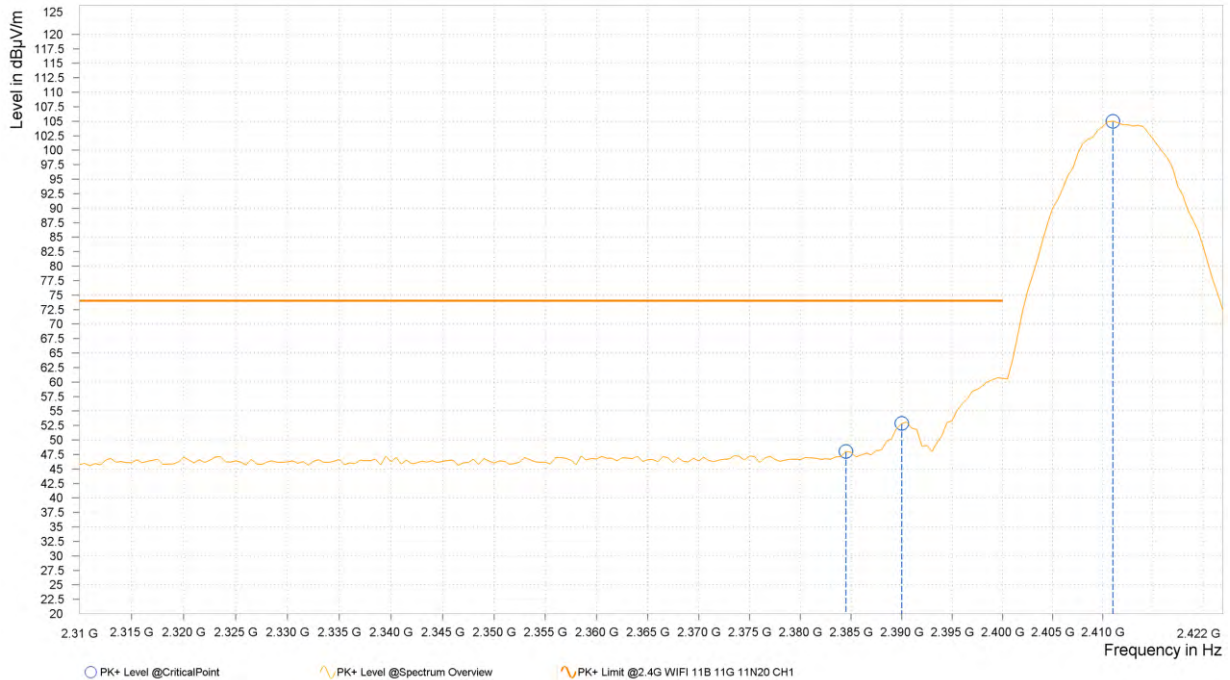






BUREAU  
VERITAS

Test Report No.: PSU-QSU2312200110RF08

Rg	Frequency [MHz]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
1	2,386.500	34.13	54.00	19.87	7.08	H	359	2.00
1	2,390.000	33.67	54.00	20.33	7.08	H	359	2.00
1	2,413.000	95.21			7.19	H	79.8	2.00

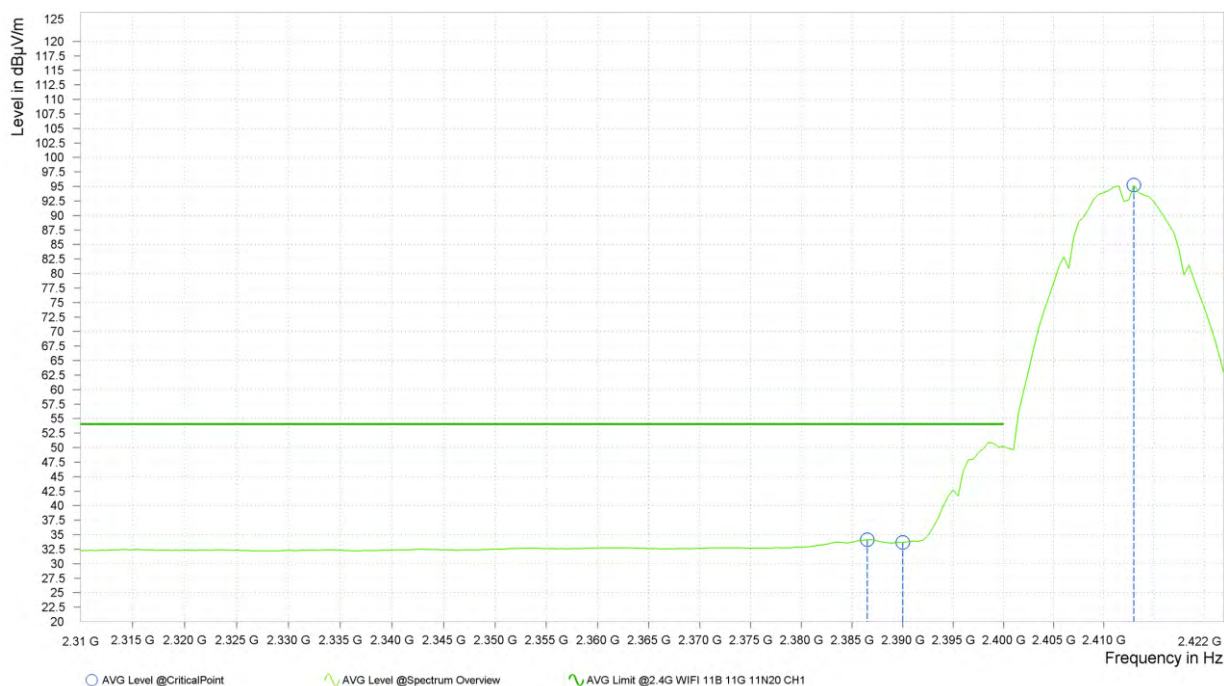




BUREAU  
VERITAS

Test Report No.: PSU-QSU2312200110RF08

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
1	2,389.000	47.84	74.00	26.16	7.08	V	216.8	1.00
1	2,390.000	48.18	74.00	25.82	7.08	V	359	2.00
1	2,411.000	99.85			7.17	V	145	1.00

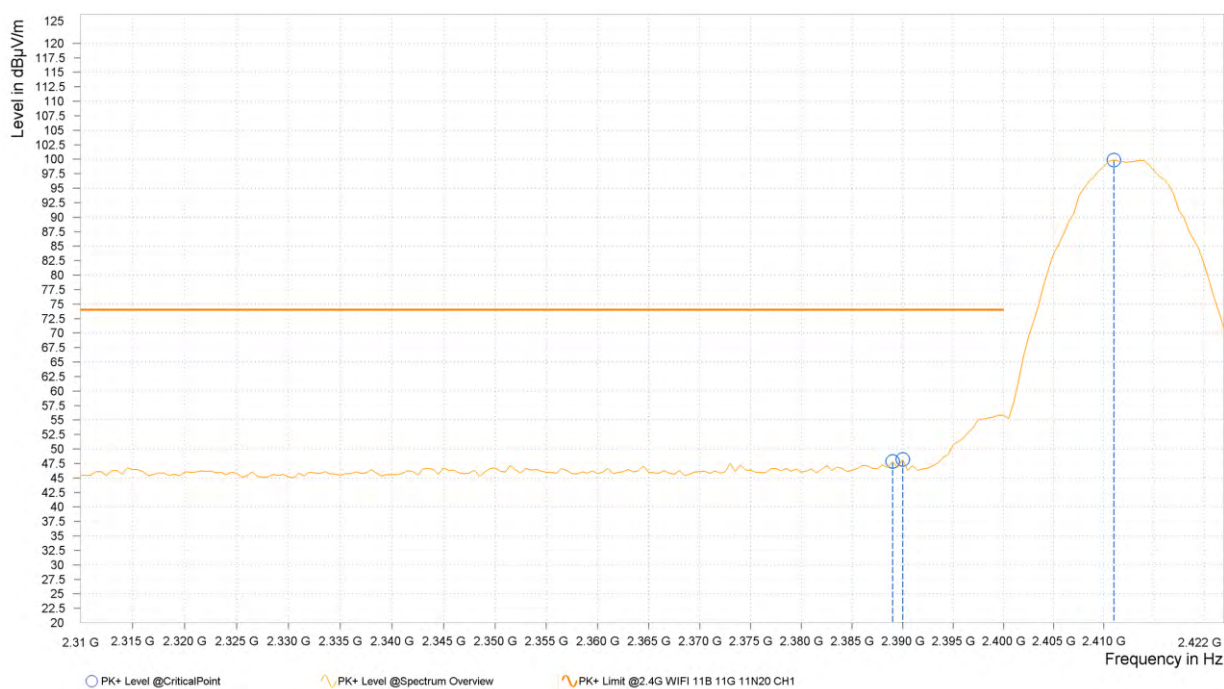



**BUREAU  
VERITAS**

**Test Report No.: PSU-QSU2312200110RF08**

Rg	Frequency [MHz]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
1	2,388.500	32.75	54.00	21.25	7.08	V	0.9	2.00
1	2,390.000	32.84	54.00	21.16	7.08	V	0.9	2.00
1	2,413.000	95.81			7.19	V	139.2	1.00



#### REMARKS:

- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor  
Margin value = Limit value- Emission level.
- 2412MHz: Fundamental frequency.




BUREAU  
VERITAS

Test Report No.: PSU-QSU2312200110RF08

CHANNEL	TX Channel 6	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M


Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	4,874.000	51.88	74.00	22.12	42.03	54.00	11.97	15.25	H	1	2.00
2	7,311.000	56.20	74.00	17.80	45.91	54.00	8.09	21.10	H	359	1.00

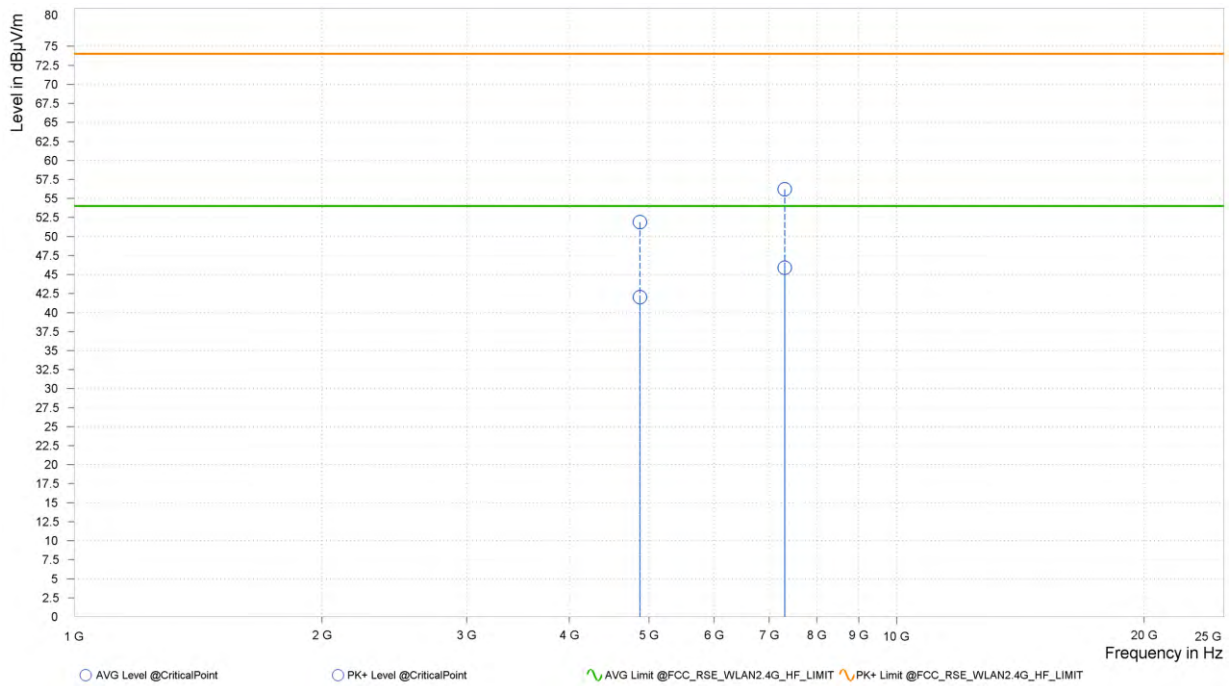



ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	4,874.000	51.69	74.00	22.31	42.65	54.00	11.35	15.25	V	90.2	1.00
2	7,311.000	58.65	74.00	15.35	46.03	54.00	7.97	21.10	V	0.9	2.00

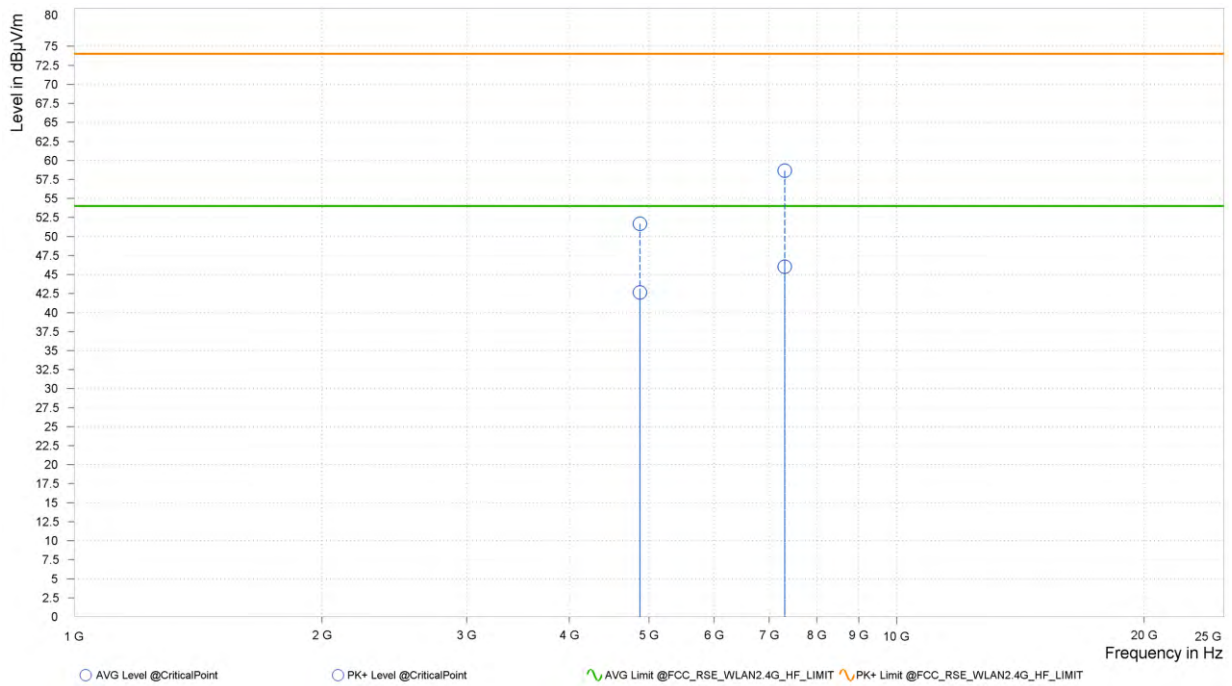

REMARKS:

- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor  
Margin value = Limit value- Emission level.
- 2437MHz: Fundamental frequency.






BUREAU  
VERITAS

Test Report No.: PSU-QSU2312200110RF08

CHANNEL	TX Channel 11	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

Rg	Frequency [MHz]	PK+ Level [dB $\mu$ V/m]	PK+ Limit [dB $\mu$ V/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	2,460.000	101.45			7.40	H	150.3	2.00
2	2,483.500	49.99	74.00	24.01	7.36	H	67.4	1.00
2	2,490.500	60.05	74.00	13.95	7.37	H	150.3	2.00

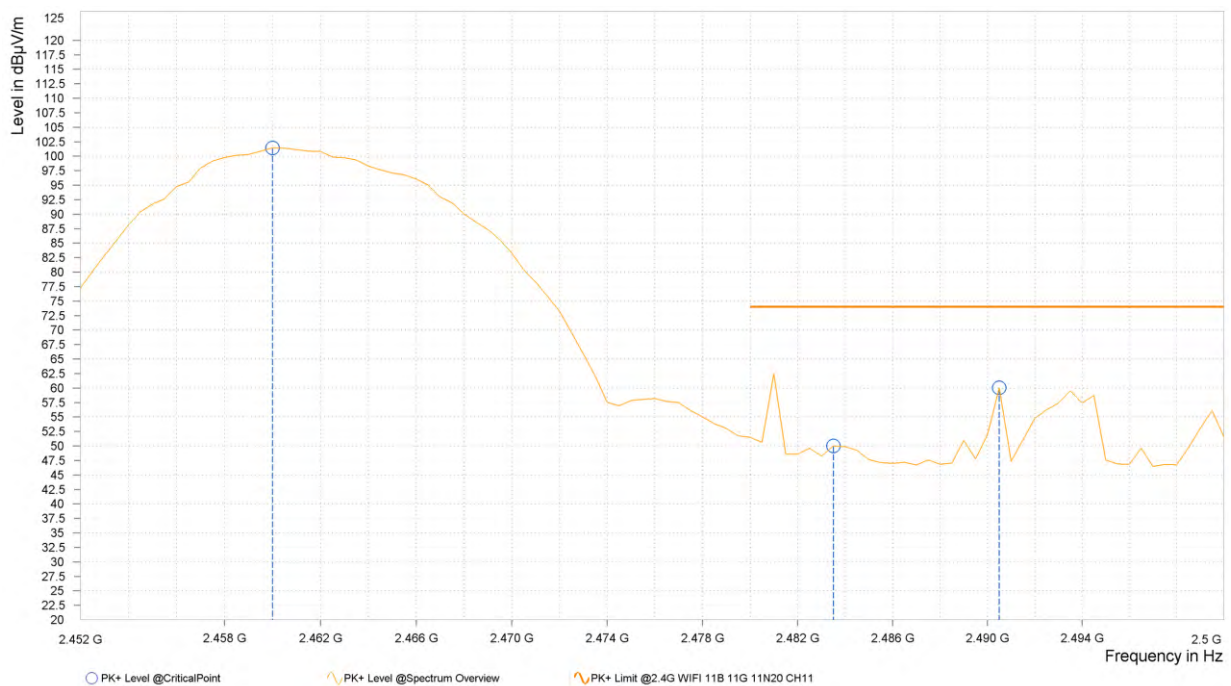




BUREAU  
VERITAS

Test Report No.: PSU-QSU2312200110RF08

Rg	Frequency [MHz]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	2,461.000	98.09			7.40	H	139.1	1.00
2	2,483.500	35.45	54.00	18.55	7.36	H	139.1	1.00
2	2,484.000	34.73	54.00	19.27	7.36	H	139.1	1.00

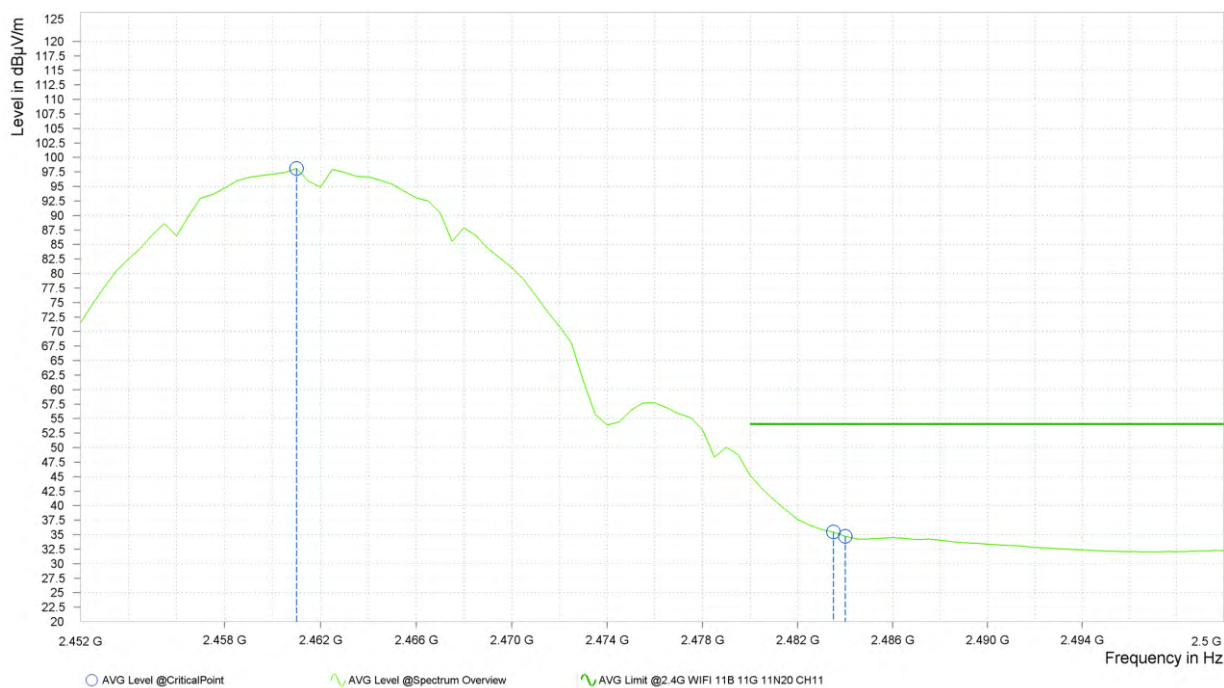




BUREAU  
VERITAS

Test Report No.: PSU-QSU2312200110RF08

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	2,460.500	97.78			7.40	V	220.8	2.00
2	2,483.500	46.98	74.00	27.02	7.36	V	4.9	1.00
2	2,491.500	56.50	74.00	17.50	7.37	V	68.6	1.00

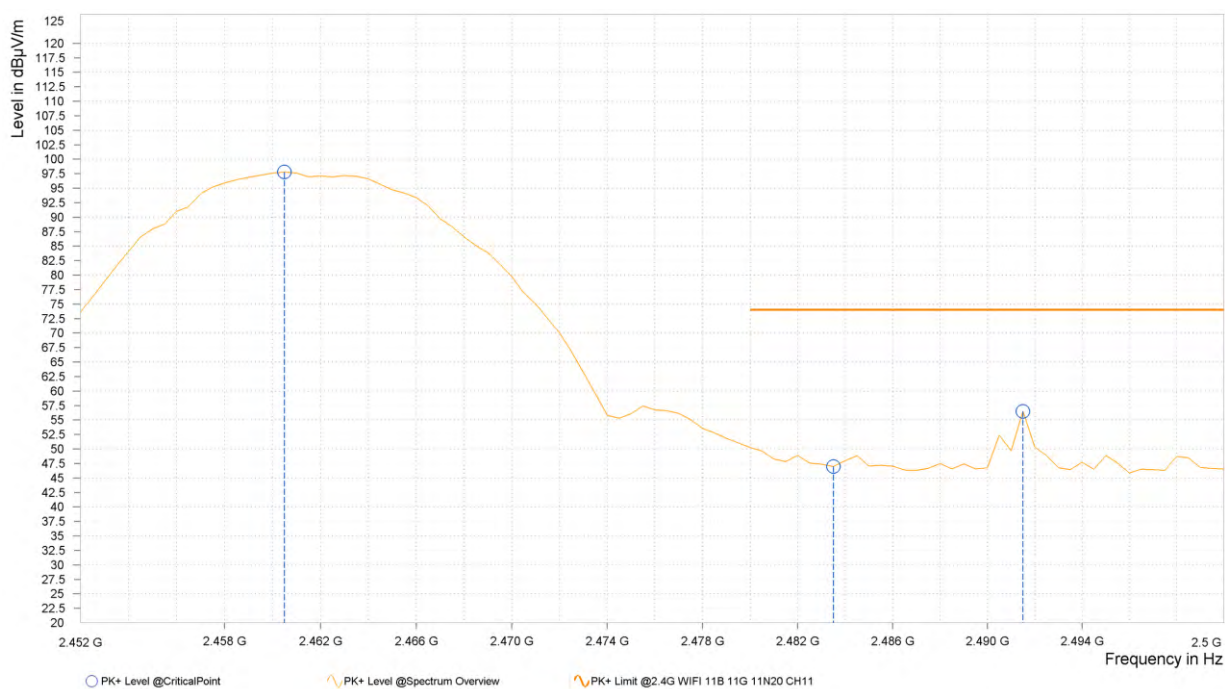






BUREAU  
VERITAS

Test Report No.: PSU-QSU2312200110RF08

Rg	Frequency [MHz]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	2,461.000	94.22			7.40	V	219.3	1.00
2	2,483.500	33.35	54.00	20.65	7.36	V	65.4	2.00
2	2,484.000	33.13	54.00	20.87	7.36	V	65.4	2.00

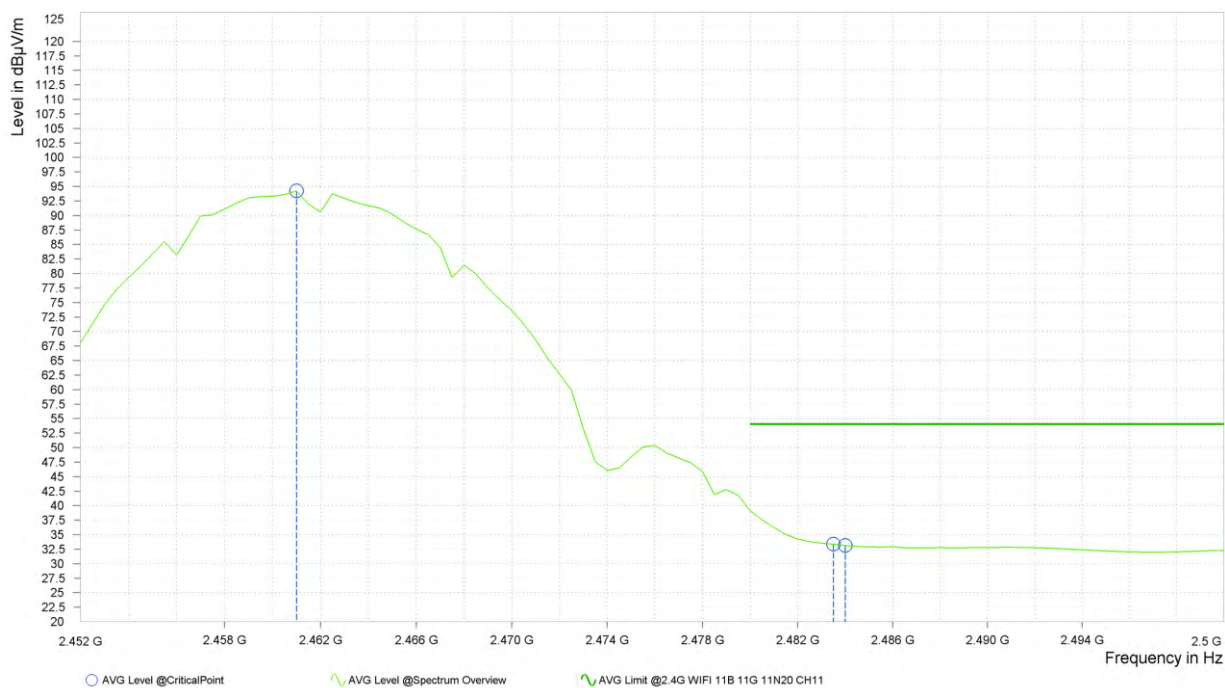

#### REMARKS:

- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor  
Margin value = Limit value- Emission level.
- 2462MHz: Fundamental frequency.



BUREAU  
VERITAS


Test Report No.: PSU-QSU2312200110RF08

802.11g

CHANNEL	TX Channel 1	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
1	2,389.500	57.99	74.00	16.01	7.08	H	220.9	2.00
1	2,390.000	59.65	74.00	14.35	7.08	H	220.9	2.00
1	2,409.500	105.75			7.15	H	220.9	2.00

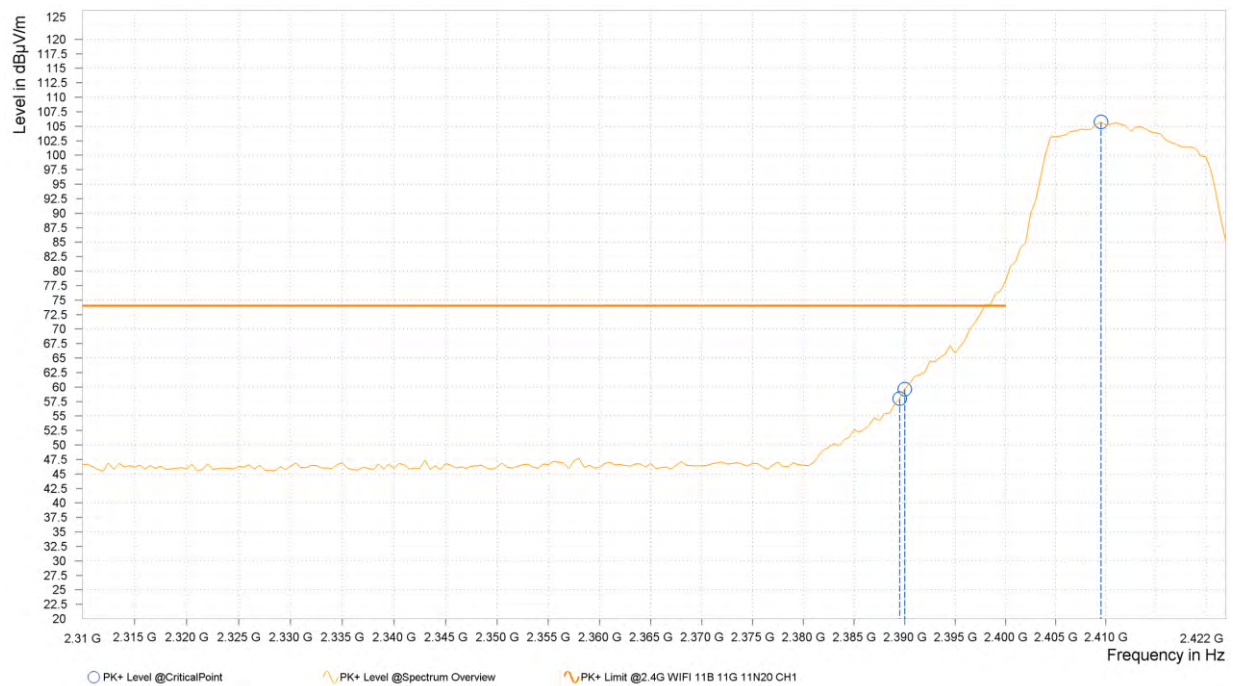




BUREAU  
VERITAS

Test Report No.: PSU-QSU2312200110RF08

Rg	Frequency [MHz]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
1	2,389.500	42.96	54.00	11.04	7.08	H	217.2	2.00
1	2,390.000	43.87	54.00	10.13	7.08	H	217.2	2.00
1	2,411.000	93.87			7.17	H	217.2	2.00

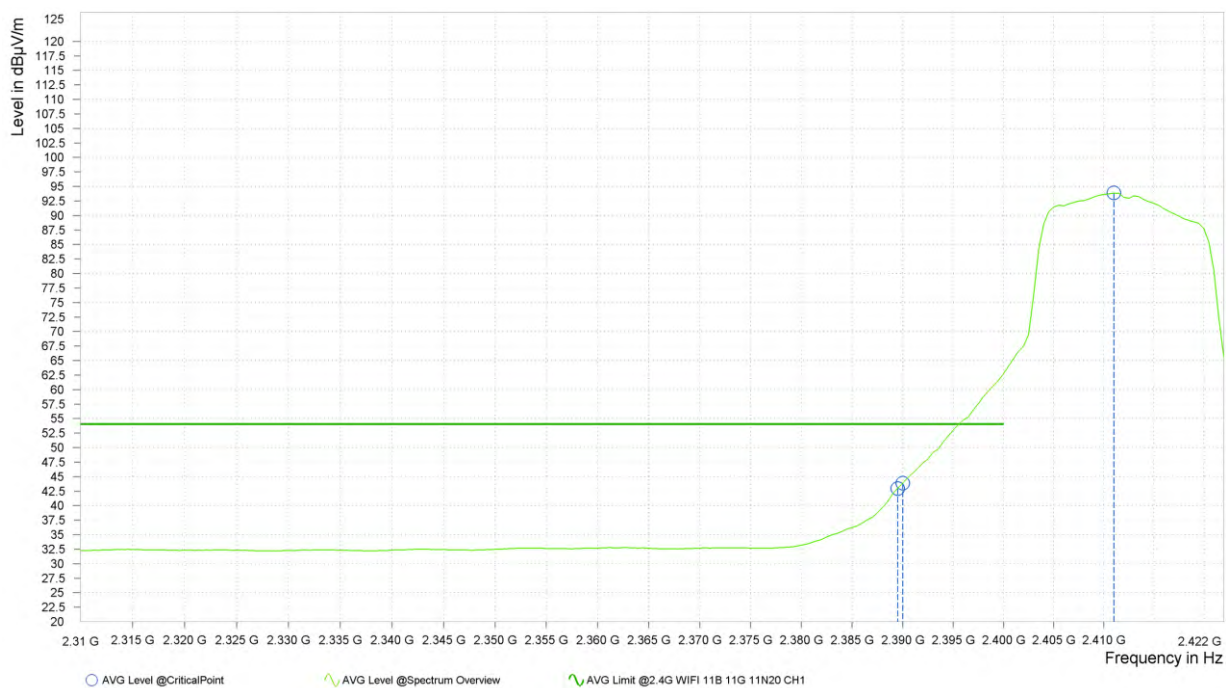




BUREAU  
VERITAS

Test Report No.: PSU-QSU2312200110RF08

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
1	2,389.500	53.88	74.00	20.12	7.08	V	0.9	2.00
1	2,390.000	55.94	74.00	18.06	7.08	V	0.9	2.00
1	2,409.500	98.76			7.15	V	215.7	1.00

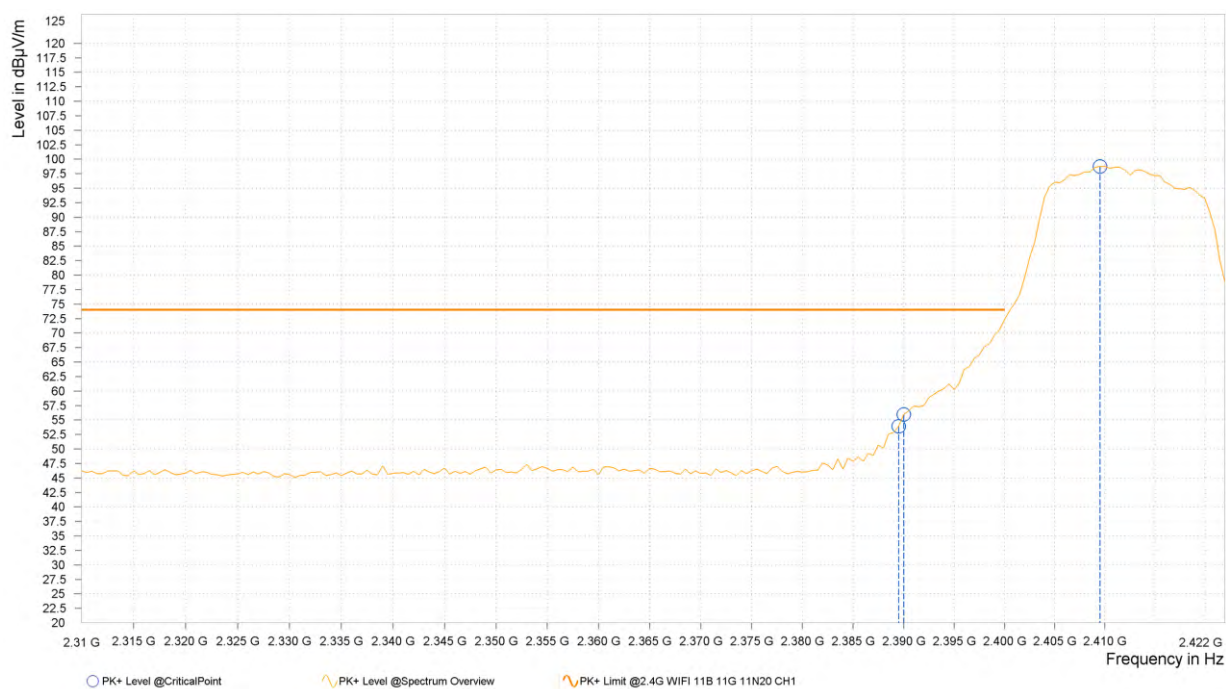




BUREAU  
VERITAS

Test Report No.: PSU-QSU2312200110RF08

Rg	Frequency [MHz]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
1	2,389.500	38.19	54.00	15.81	7.08	V	30.8	2.00
1	2,390.000	38.95	54.00	15.05	7.08	V	359	2.00
1	2,411.000	87.30			7.17	V	214.5	1.00

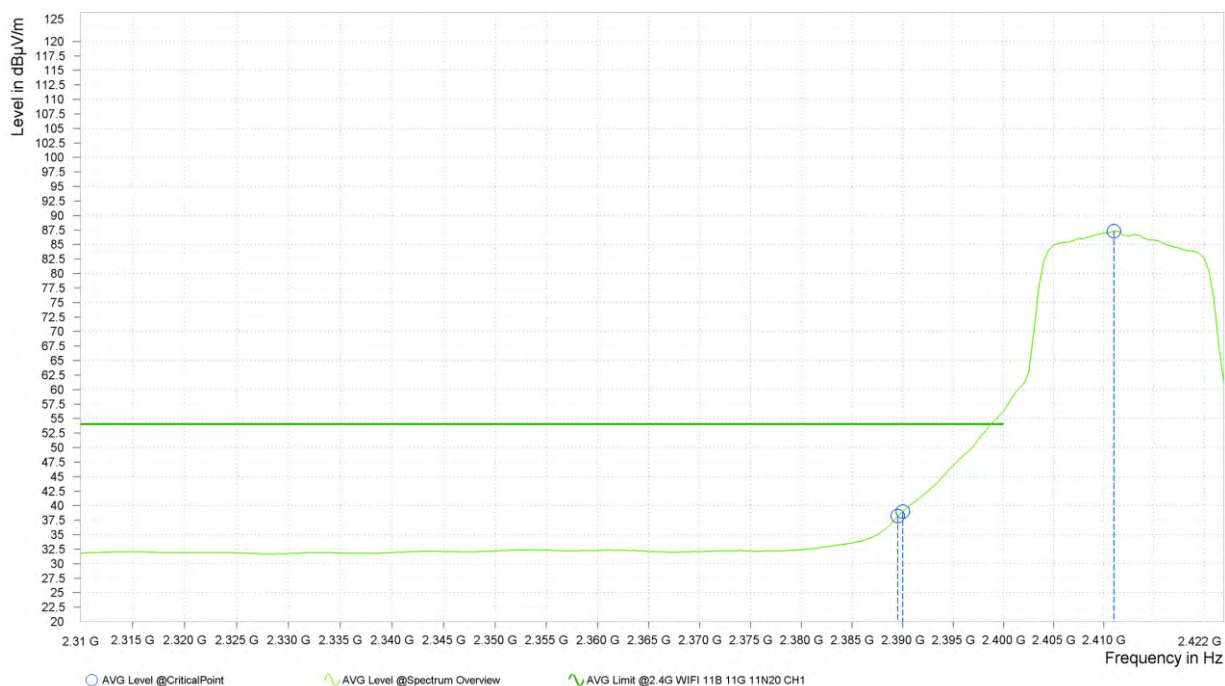

#### REMARKS:

- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor  
Margin value = Limit value- Emission level.
- 2412MHz: Fundamental frequency.






BUREAU  
VERITAS

Test Report No.: PSU-QSU2312200110RF08

CHANNEL	TX Channel 6	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	4,874.000	50.02	74.00	23.98	39.77	54.00	14.23	15.25	H	92.6	1.00
2	7,311.000	56.75	74.00	17.25	45.93	54.00	8.07	21.10	H	0.9	2.00

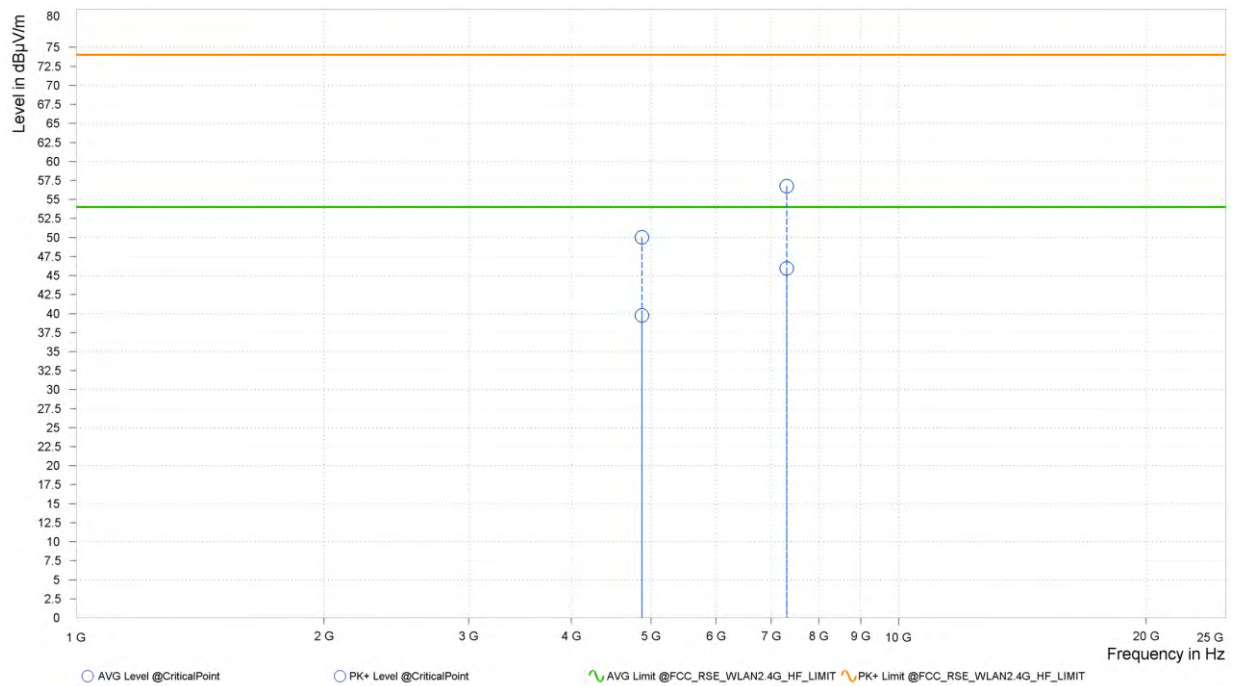




BUREAU  
VERITAS

Test Report No.: PSU-QSU2312200110RF08

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	4,874.000	51.23	74.00	22.77	39.84	54.00	14.16	15.25	V	359	2.00
2	7,311.000	56.90	74.00	17.10	45.85	54.00	8.15	21.10	V	343	1.00

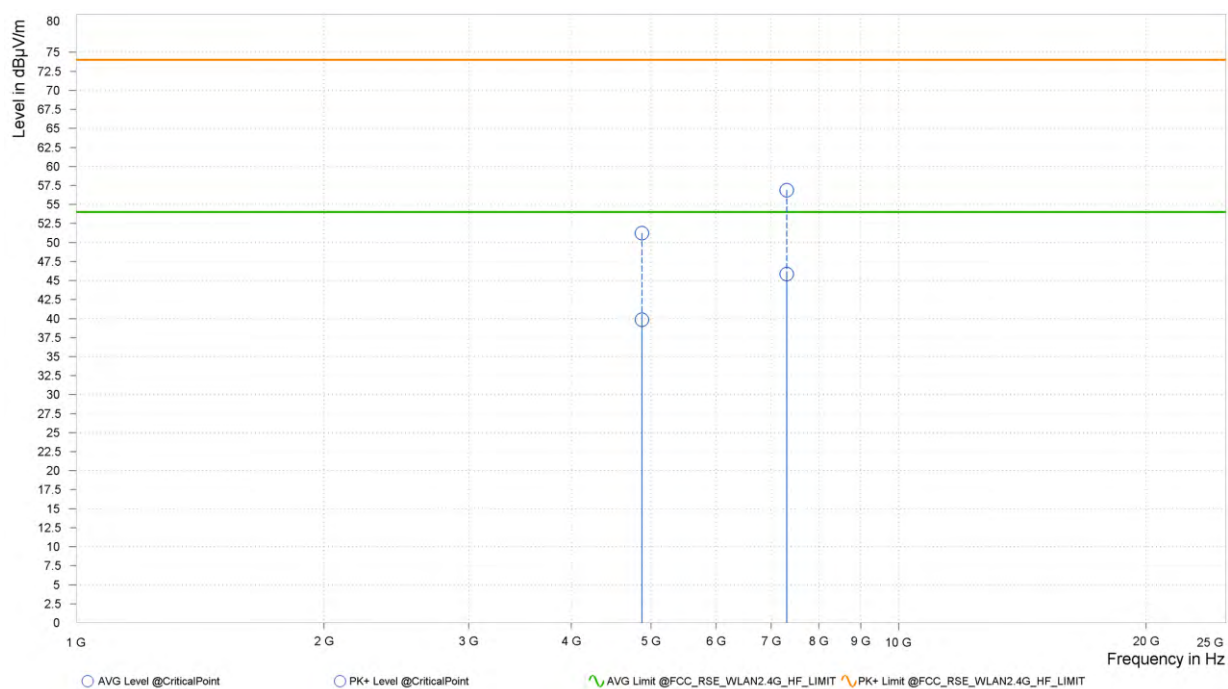

REMARKS:


1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor  
Margin value = Limit value- Emission level.
2. 2437MHz: Fundamental frequency.



CHANNEL	TX Channel 11	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	2,454.000	104.27			7.43	H	154.7	1.00
2	2,483.500	52.33	74.00	21.67	7.36	H	154.7	1.00
2	2,500.000	54.01	74.00	19.99	7.37	H	14.9	1.00

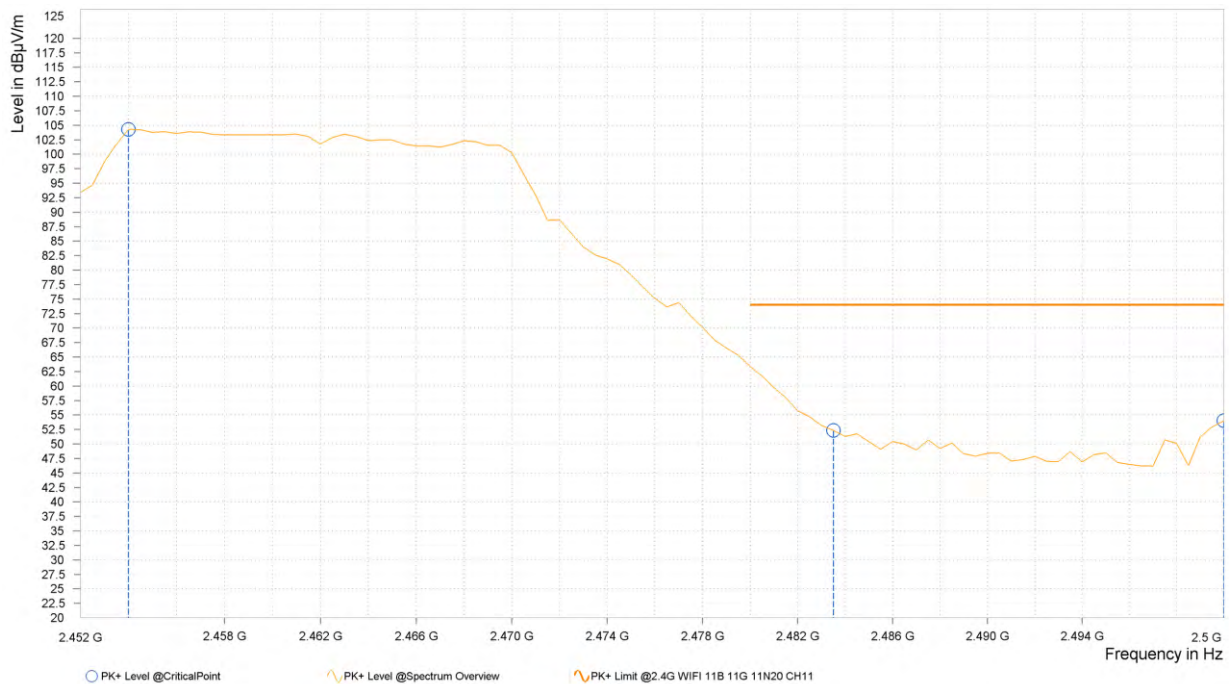






BUREAU  
VERITAS

Test Report No.: PSU-QSU2312200110RF08

Rg	Frequency [MHz]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	2,455.000	93.33			7.42	H	152.2	1.00
2	2,483.500	38.50	54.00	15.50	7.36	H	152.2	1.00
2	2,484.000	37.69	54.00	16.31	7.36	H	152.2	1.00

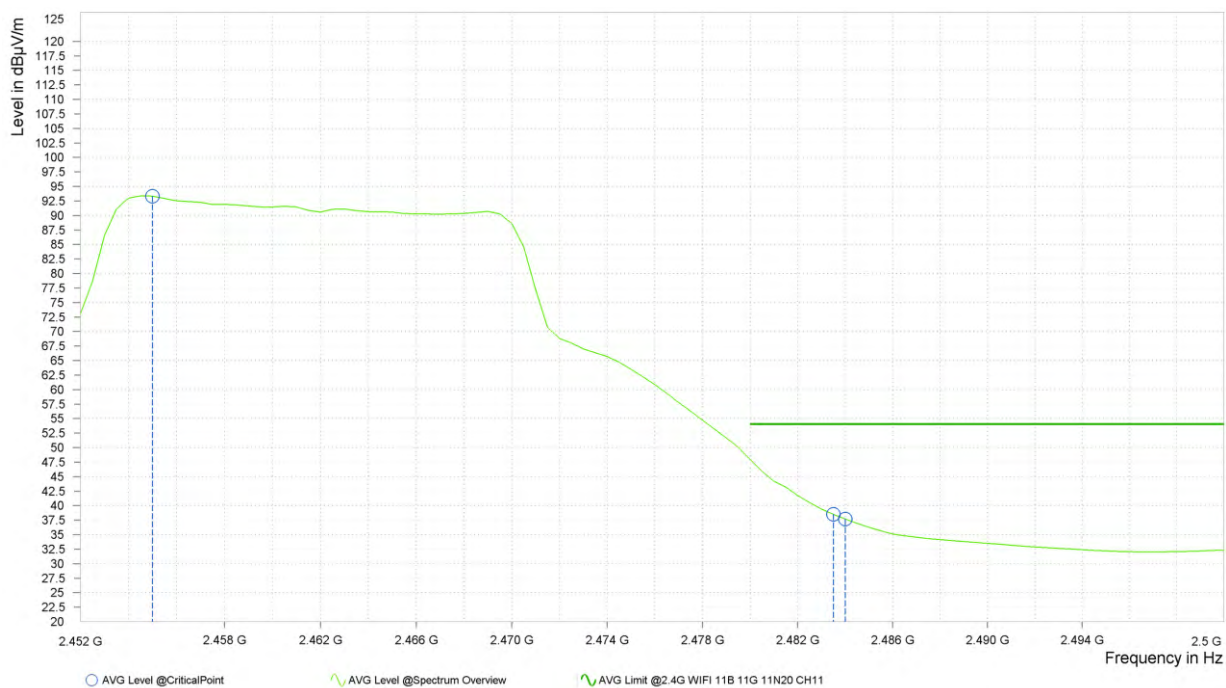




BUREAU  
VERITAS

Test Report No.: PSU-QSU2312200110RF08


ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

Rg	Frequency [MHz]	PK+ Level [dB $\mu$ V/m]	PK+ Limit [dB $\mu$ V/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	2,454.500	99.76			7.43	V	8.2	2.00
2	2,483.500	49.71	74.00	24.29	7.36	V	355	2.00
2	2,496.000	56.18	74.00	17.82	7.37	V	153.4	1.00

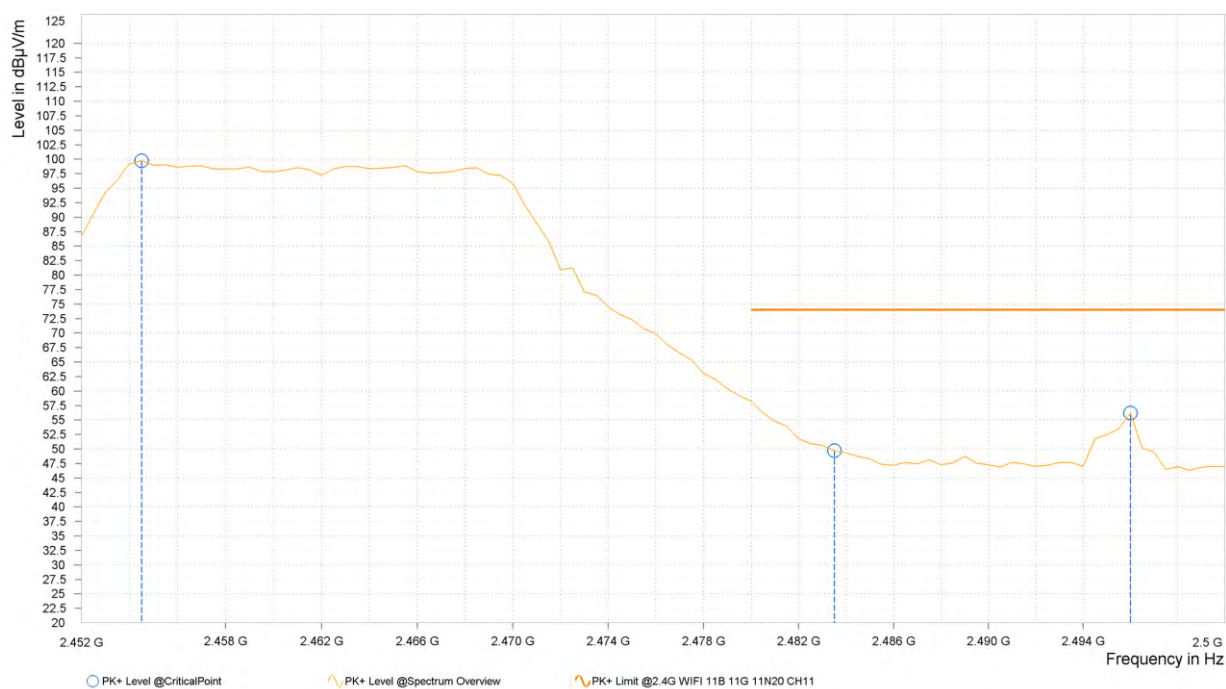



Rg	Frequency [MHz]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	2,454.500	88.12			7.43	V	8.2	2.00
2	2,483.500	35.23	54.00	18.77	7.36	V	287.4	1.00
2	2,484.000	34.80	54.00	19.20	7.36	V	287.4	1.00

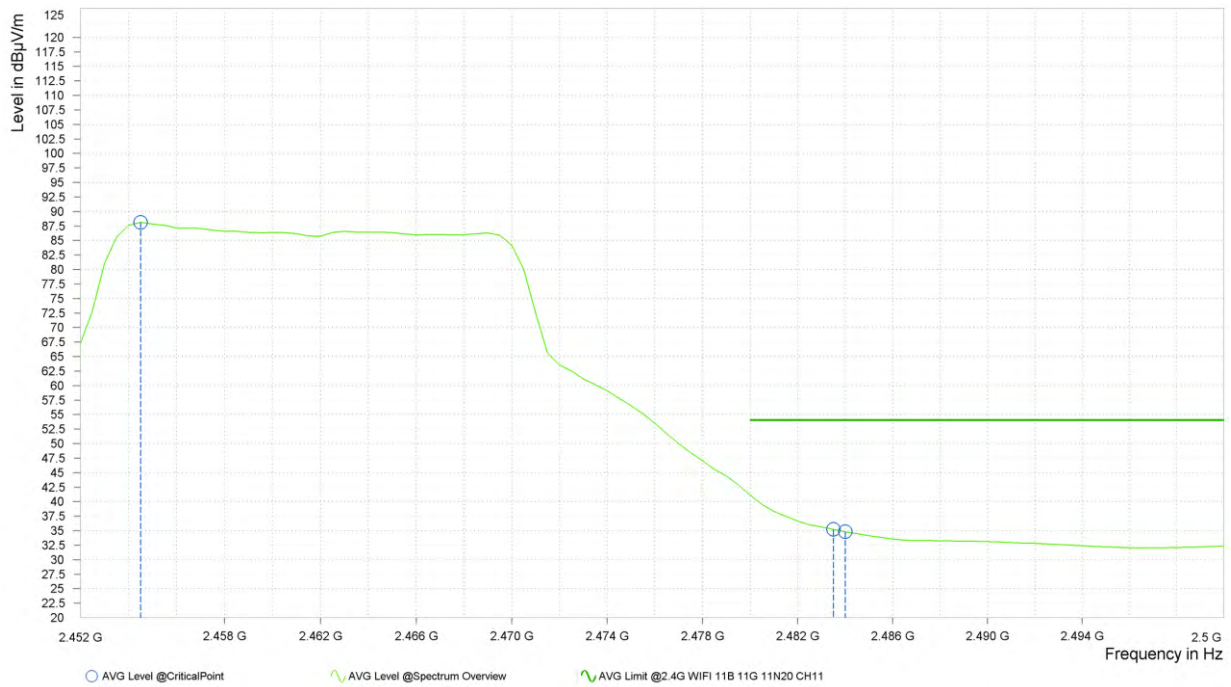**REMARKS:**

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor  
Margin value = Limit value- Emission level.
2. 2462MHz: Fundamental frequency.



BUREAU  
VERITAS


Test Report No.: PSU-QSU2312200110RF08

### 802.11n (20MHz)

CHANNEL	TX Channel 1	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

### ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
1	2,389.500	57.01	74.00	16.99	7.08	H	217.3	2.00
1	2,390.000	57.79	74.00	16.21	7.08	H	217.3	2.00
1	2,411.500	104.49			7.17	H	217.3	2.00

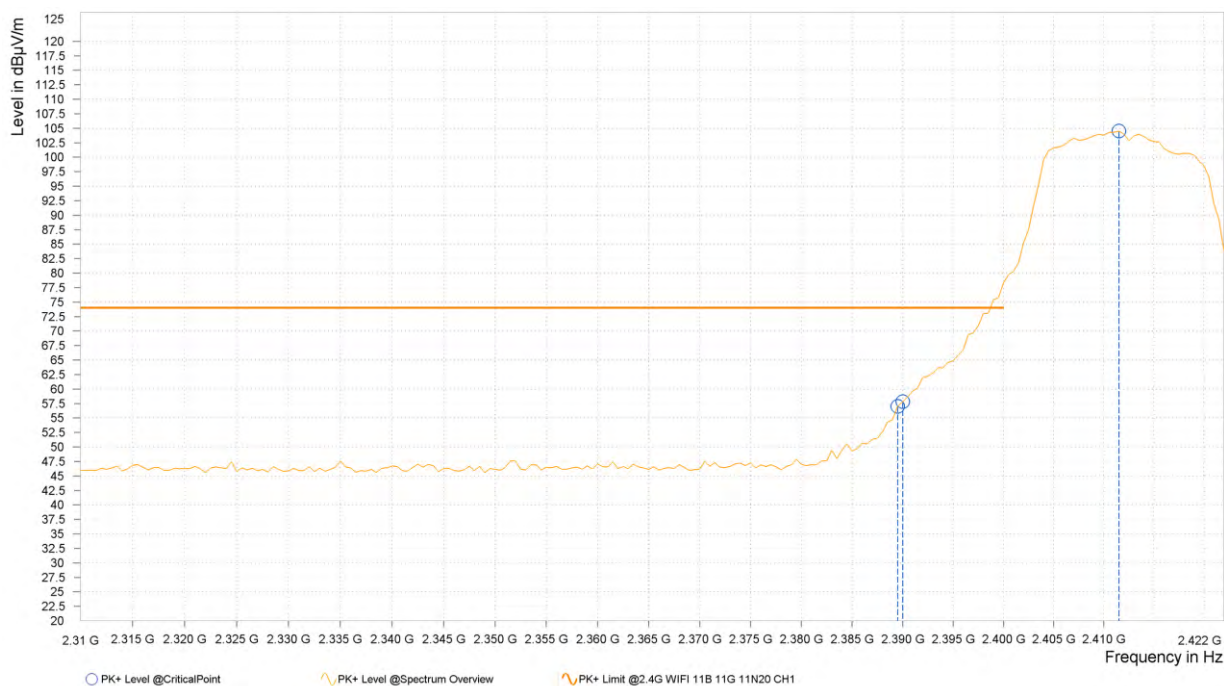




BUREAU  
VERITAS

Test Report No.: PSU-QSU2312200110RF08

Rg	Frequency [MHz]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
1	2,389.500	40.83	54.00	13.17	7.08	H	216.1	2.00
1	2,390.000	41.55	54.00	12.45	7.08	H	216.1	2.00
1	2,411.000	92.95			7.17	H	216.1	2.00

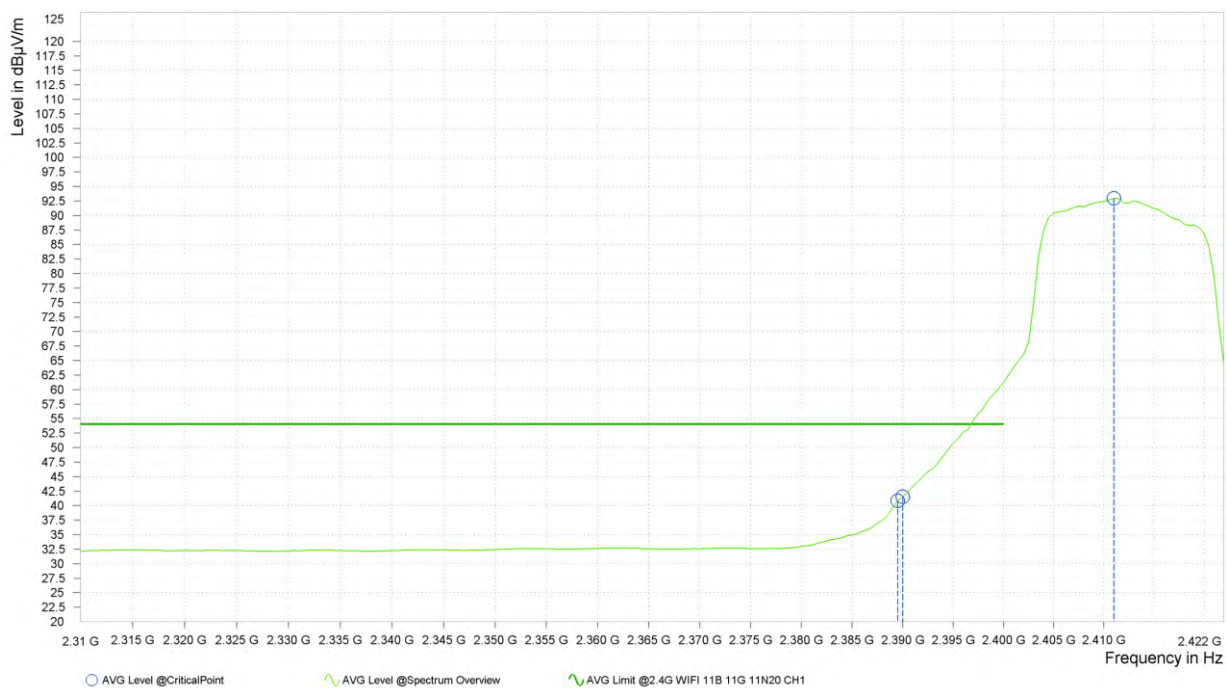






BUREAU  
VERITAS

Test Report No.: PSU-QSU2312200110RF08

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

Rg	Frequency [MHz]	PK+ Level [dB $\mu$ V/m]	PK+ Limit [dB $\mu$ V/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
1	2,389.500	51.59	74.00	22.41	7.08	V	66.6	2.00
1	2,390.000	52.87	74.00	21.13	7.08	V	0.9	2.00
1	2,411.500	96.89			7.17	V	153.4	1.00

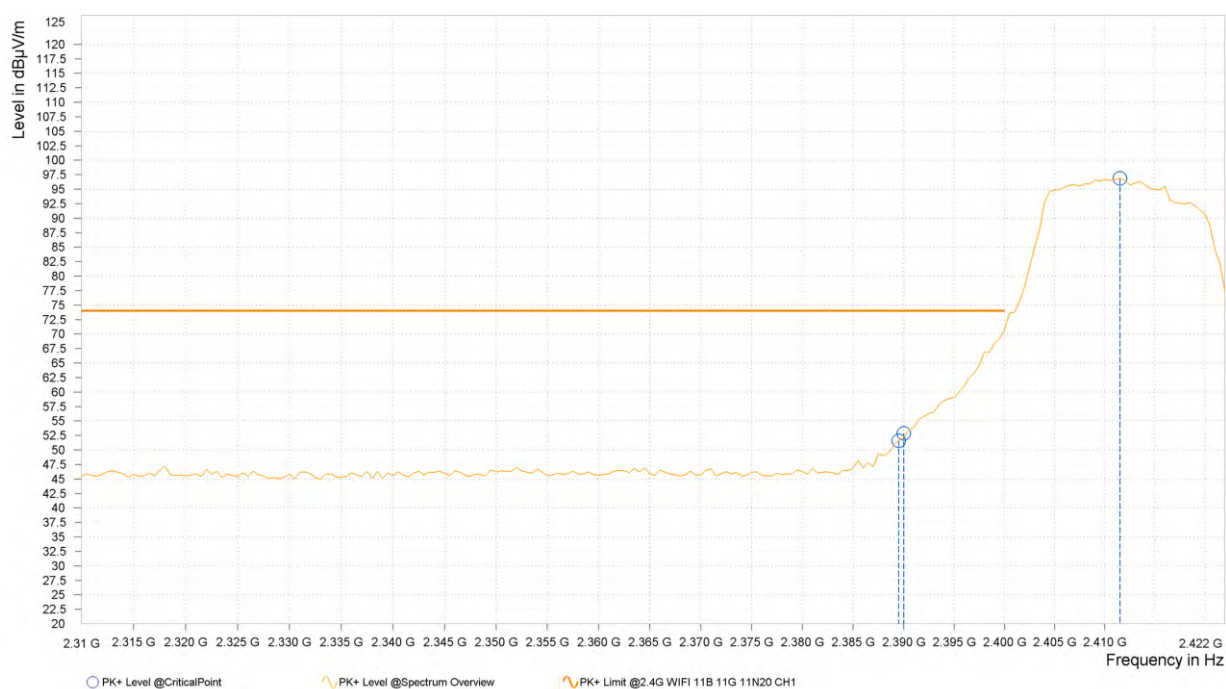




BUREAU  
VERITAS

Test Report No.: PSU-QSU2312200110RF08

Rg	Frequency [MHz]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
1	2,389.500	36.53	54.00	17.47	7.08	V	72.6	2.00
1	2,390.000	37.13	54.00	16.87	7.08	V	72.6	2.00
1	2,411.000	86.79			7.17	V	218.1	1.00

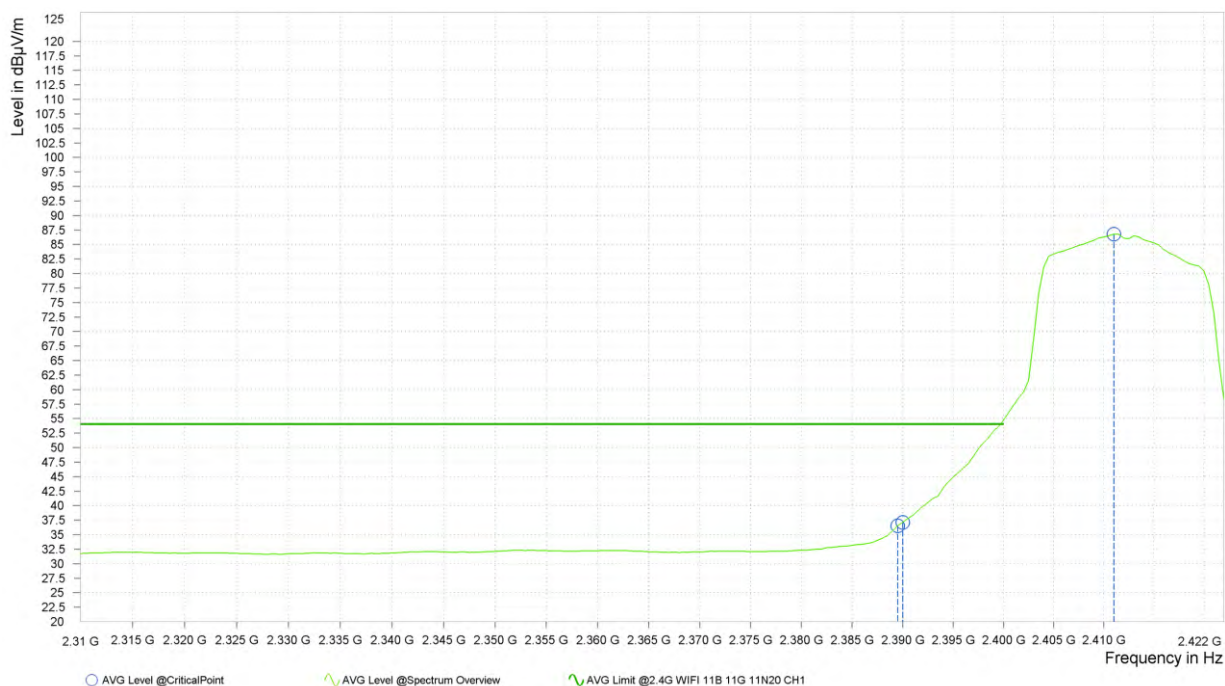

#### REMARKS:


- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor  
Margin value = Limit value- Emission level.
- 2412MHz: Fundamental frequency.



CHANNEL	TX Channel 6	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	4,874.000	50.50	74.00	23.50	39.69	54.00	14.31	15.25	H	356.1	2.00
2	7,311.000	55.74	74.00	18.26	46.02	54.00	7.98	21.10	H	356.1	2.00

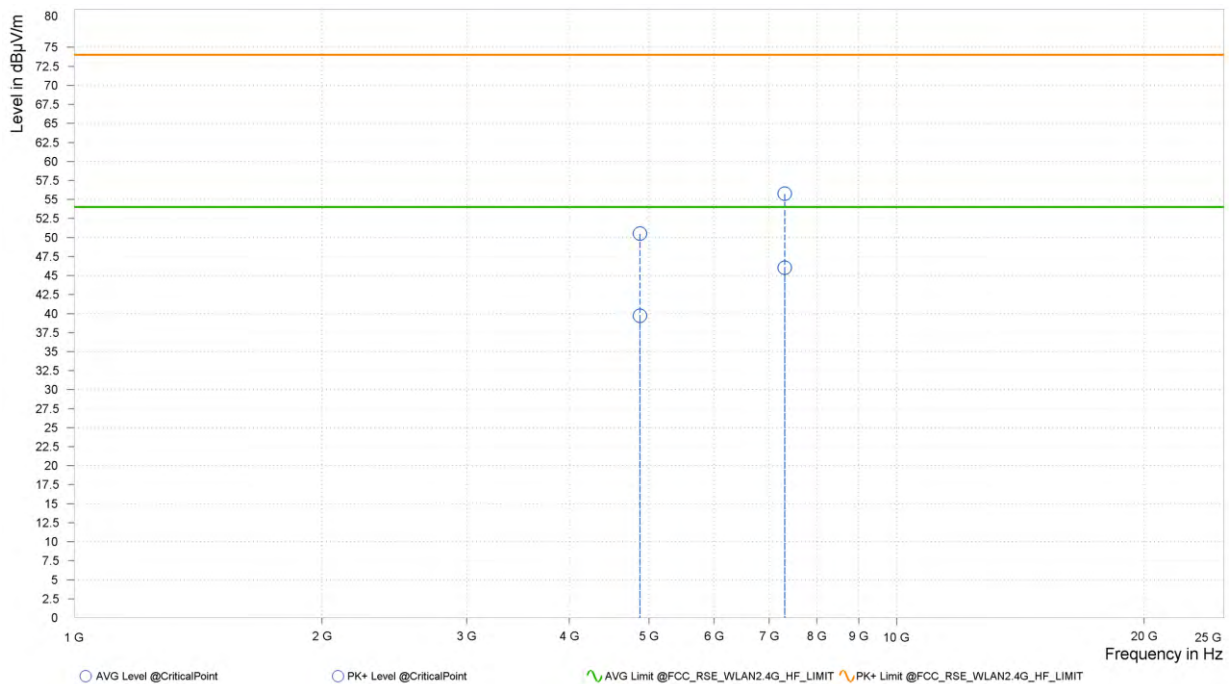






ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	4,874.000	49.83	74.00	24.17	39.79	54.00	14.21	15.25	V	91.4	2.00
2	7,311.000	57.17	74.00	16.83	45.65	54.00	8.35	21.10	V	359.1	2.00

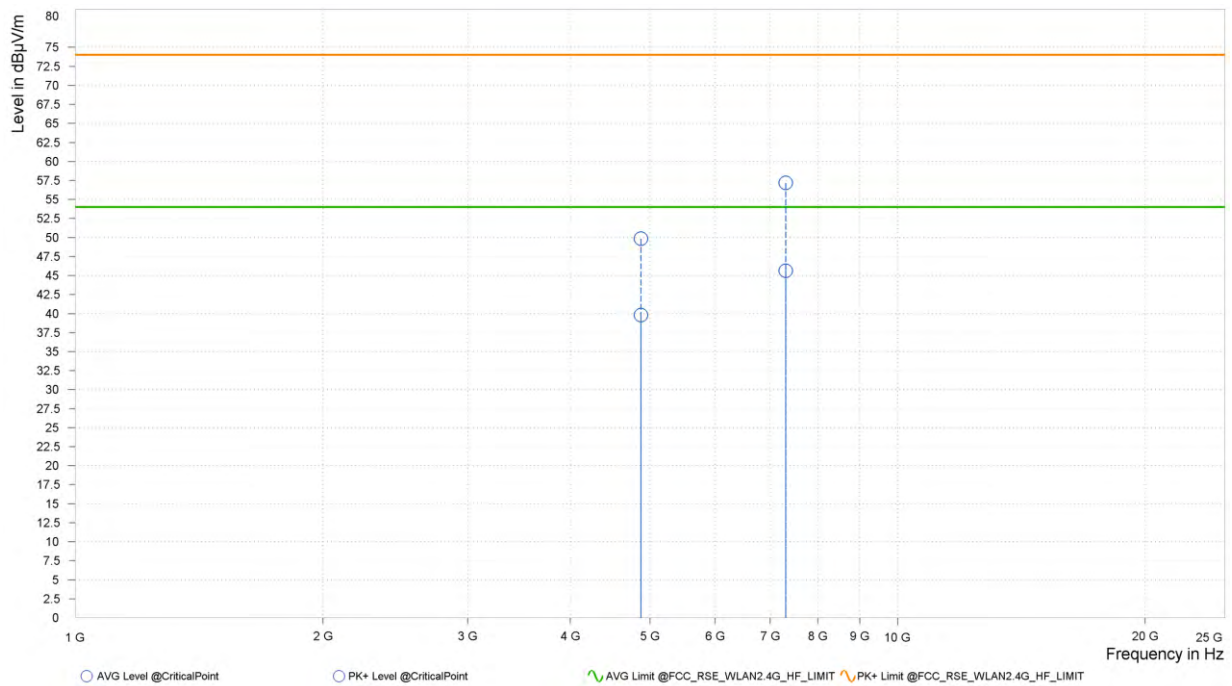

REMARKS:


- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor  
Margin value = Limit value–Emission level.
- 2437MHz: Fundamental frequency.



CHANNEL	TX Channel 11	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	2,454.500	102.40			7.43	H	143.2	2.00
2	2,483.500	48.83	74.00	25.17	7.36	H	4.9	1.00
2	2,498.500	59.03	74.00	14.97	7.37	H	71	1.00

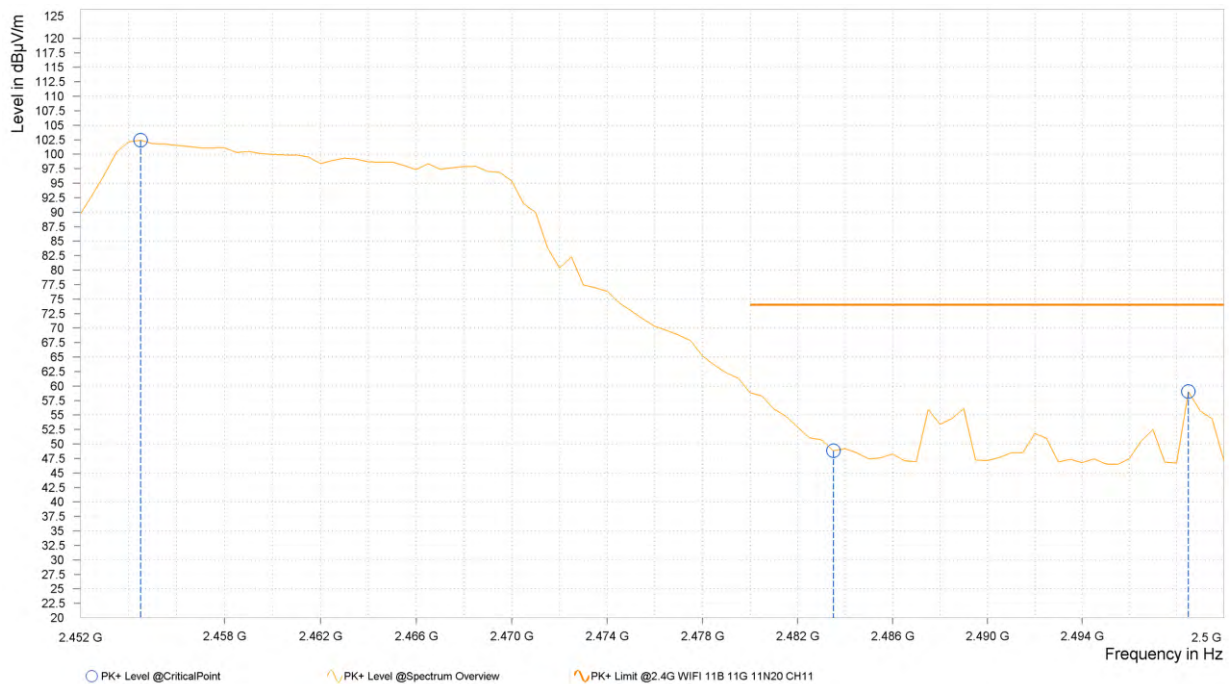




BUREAU  
VERITAS

Test Report No.: PSU-QSU2312200110RF08

Rg	Frequency [MHz]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	2,454.500	90.78			7.43	H	141.9	2.00
2	2,483.500	35.22	54.00	18.78	7.36	H	4.9	1.00
2	2,484.000	34.60	54.00	19.40	7.36	H	4.9	1.00

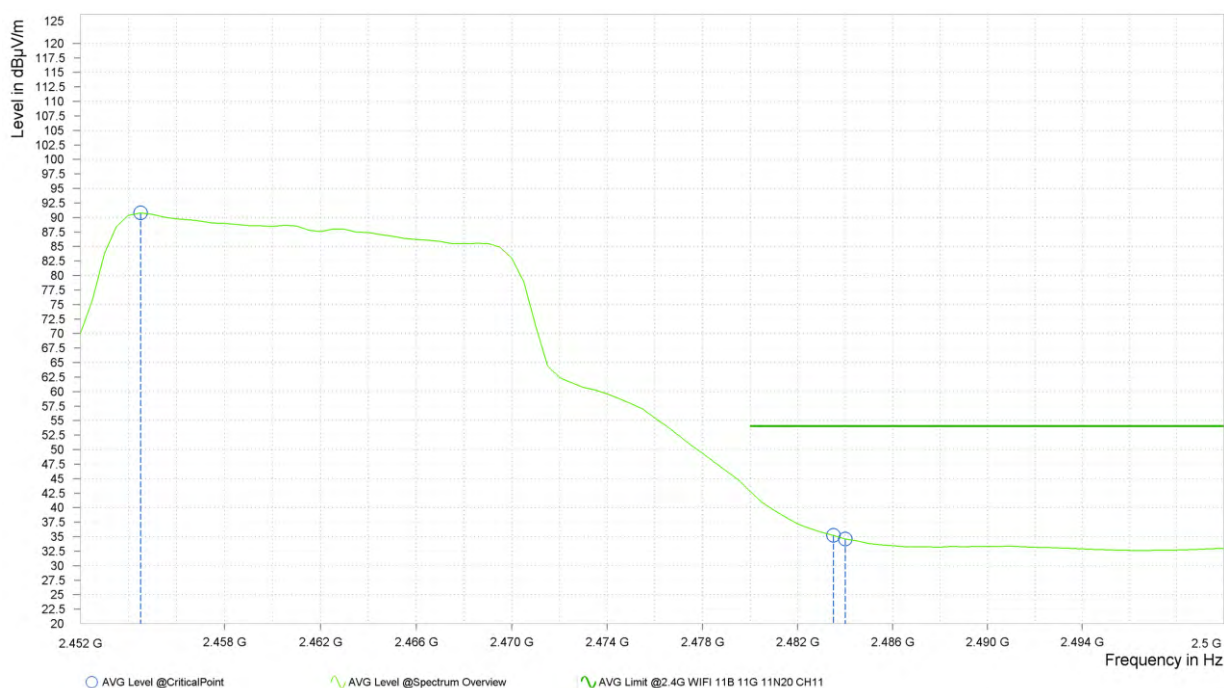




BUREAU  
VERITAS

Test Report No.: PSU-QSU2312200110RF08


ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	2,455.000	100.29			7.42	V	212.6	2.00
2	2,483.500	49.35	74.00	24.65	7.36	V	5.8	2.00
2	2,491.000	53.20	74.00	20.80	7.37	V	212.6	2.00

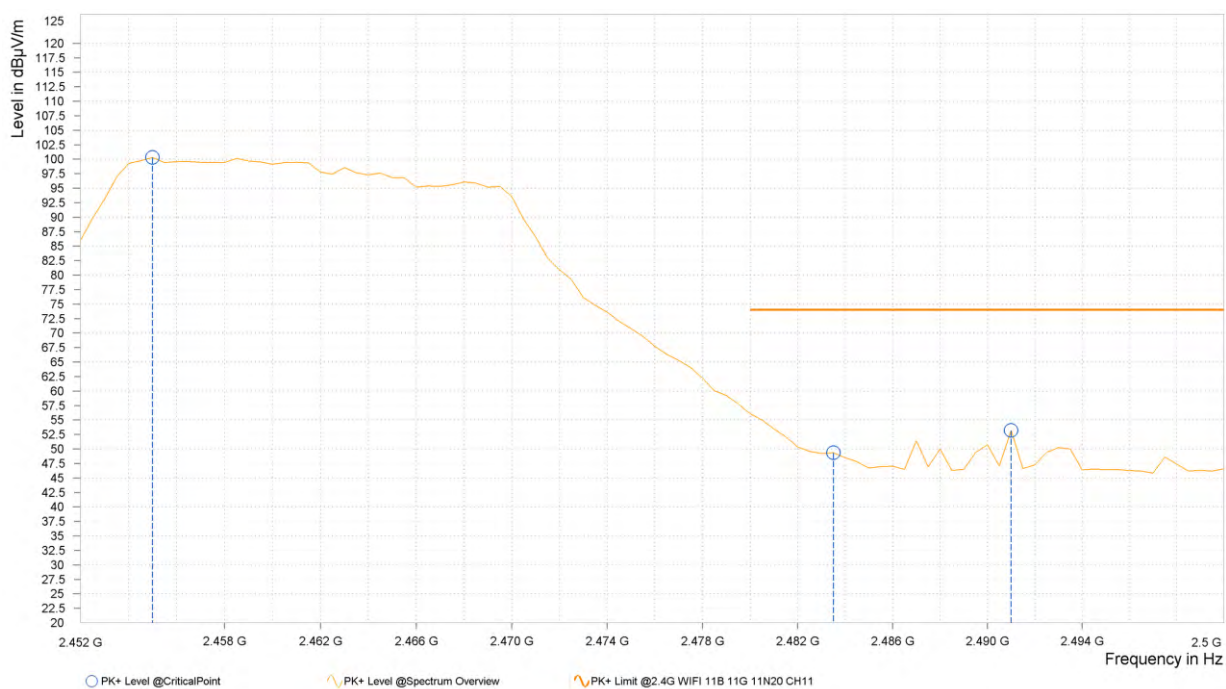



Rg	Frequency [MHz]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	2,460.500	87.16			7.40	V	216	2.00
2	2,483.500	34.32	54.00	19.68	7.36	V	355	2.00
2	2,484.000	33.95	54.00	20.05	7.36	V	355	2.00

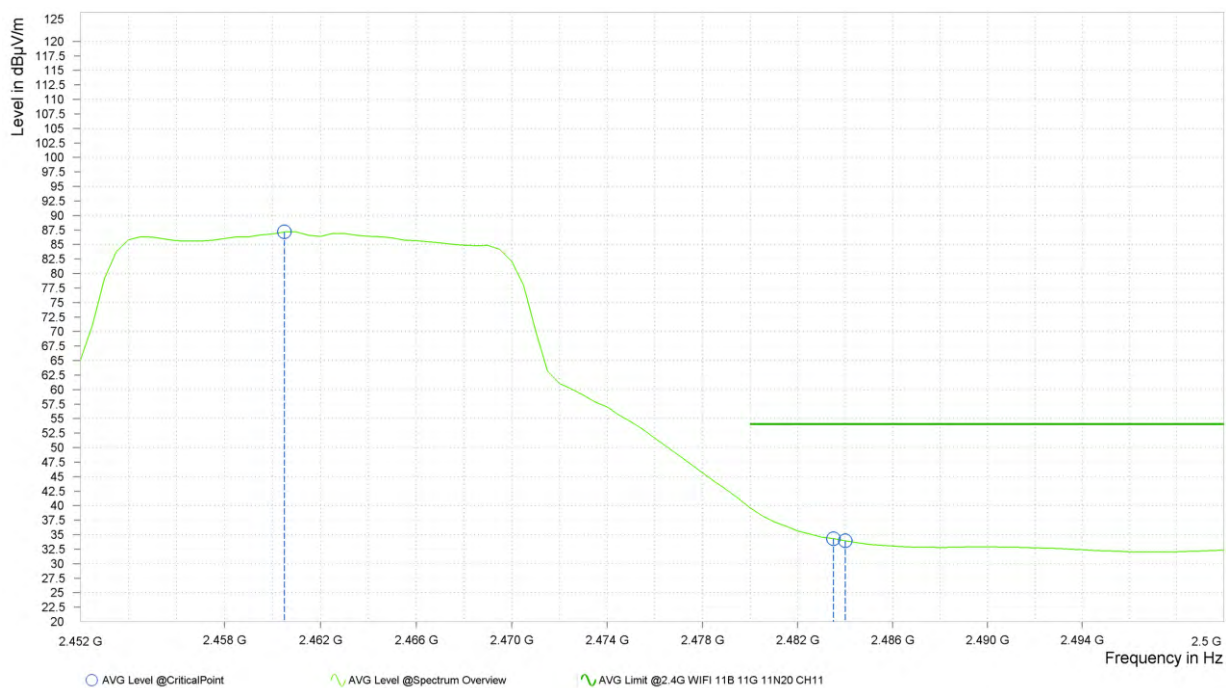

#### REMARKS:

- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor  
Margin value = Limit value–Emission level .
- 2462MHz: Fundamental frequency.





BUREAU  
VERITAS


Test Report No.: PSU-QSU2312200110RF08

802.11n (40MHz)

CHANNEL	TX Channel 3	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
3	2,388.500	70.00	74.00	4.00	7.08	H	72.2	1.00
3	2,390.000	68.21	74.00	5.79	7.08	H	214.9	2.00
3	2,410.500	103.67			7.16	H	72.2	1.00

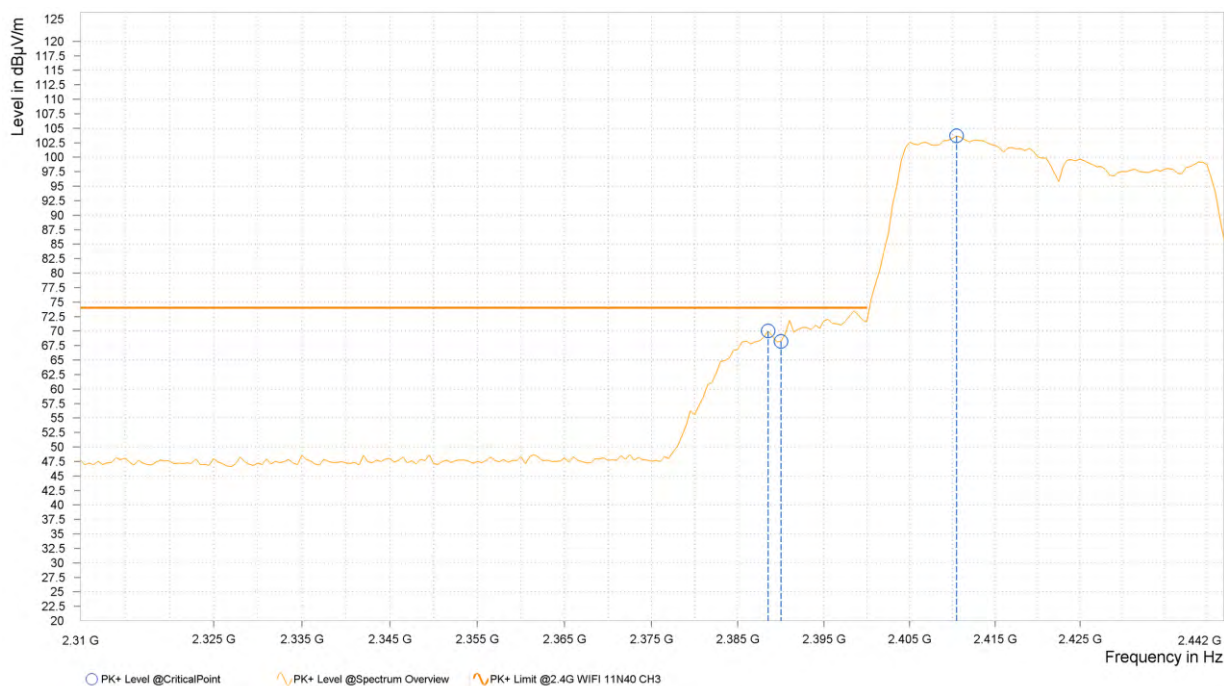




BUREAU  
VERITAS

Test Report No.: PSU-QSU2312200110RF08

Rg	Frequency [MHz]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
3	2,389.000	49.06	54.00	4.94	7.08	H	73.4	1.00
3	2,390.000	50.00	54.00	4.00	7.08	H	73.4	1.00
3	2,411.000	87.51			7.17	H	73.4	1.00

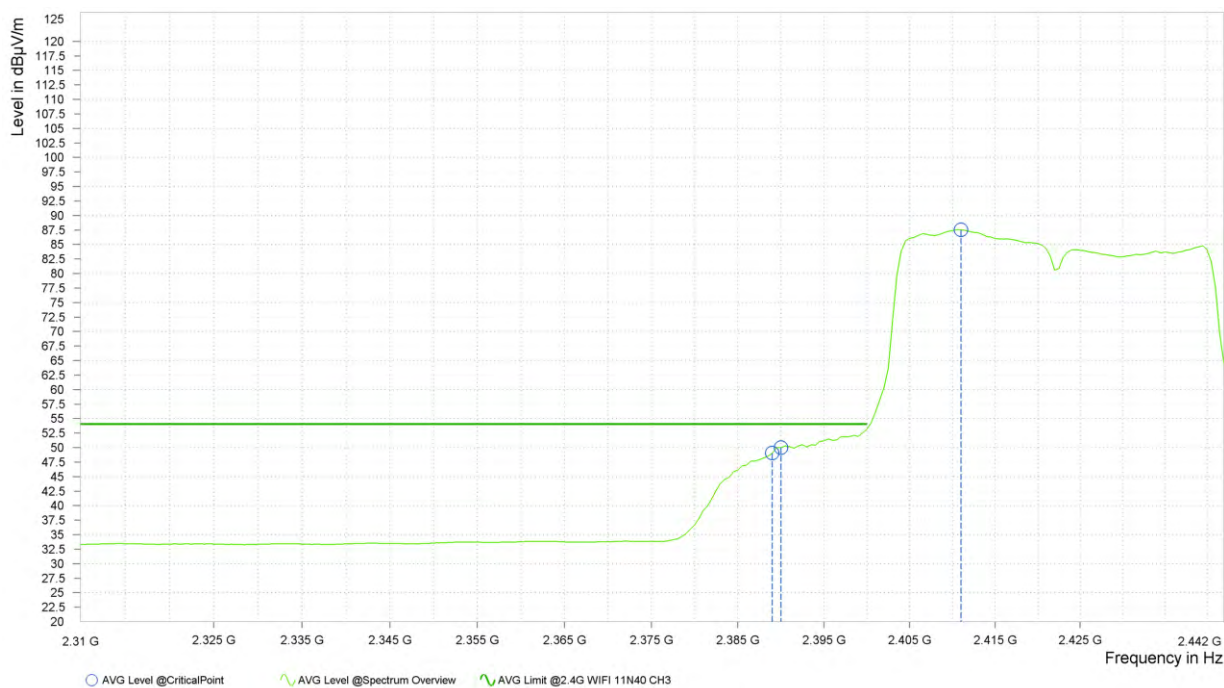




BUREAU  
VERITAS

Test Report No.: PSU-QSU2312200110RF08

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M


Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
3	2,388.500	64.90	74.00	9.10	7.08	V	145.1	1.00
3	2,390.000	65.02	74.00	8.98	7.08	V	145.1	1.00
3	2,410.500	96.58			7.16	V	219.2	1.00

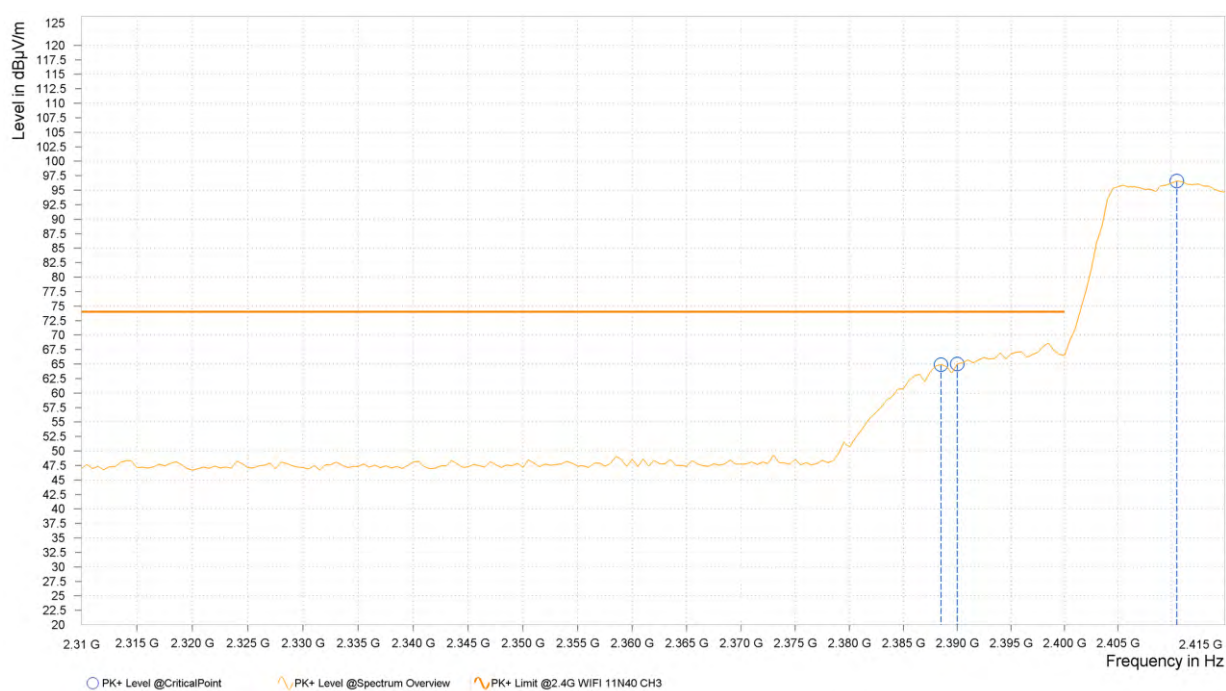





Rg	Frequency [MHz]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
3	2,389.000	44.71	54.00	9.29	7.08	V	70.2	2.00
3	2,390.000	45.24	54.00	8.76	7.08	V	70.2	2.00
3	2,411.000	80.51			7.17	V	160.7	1.00

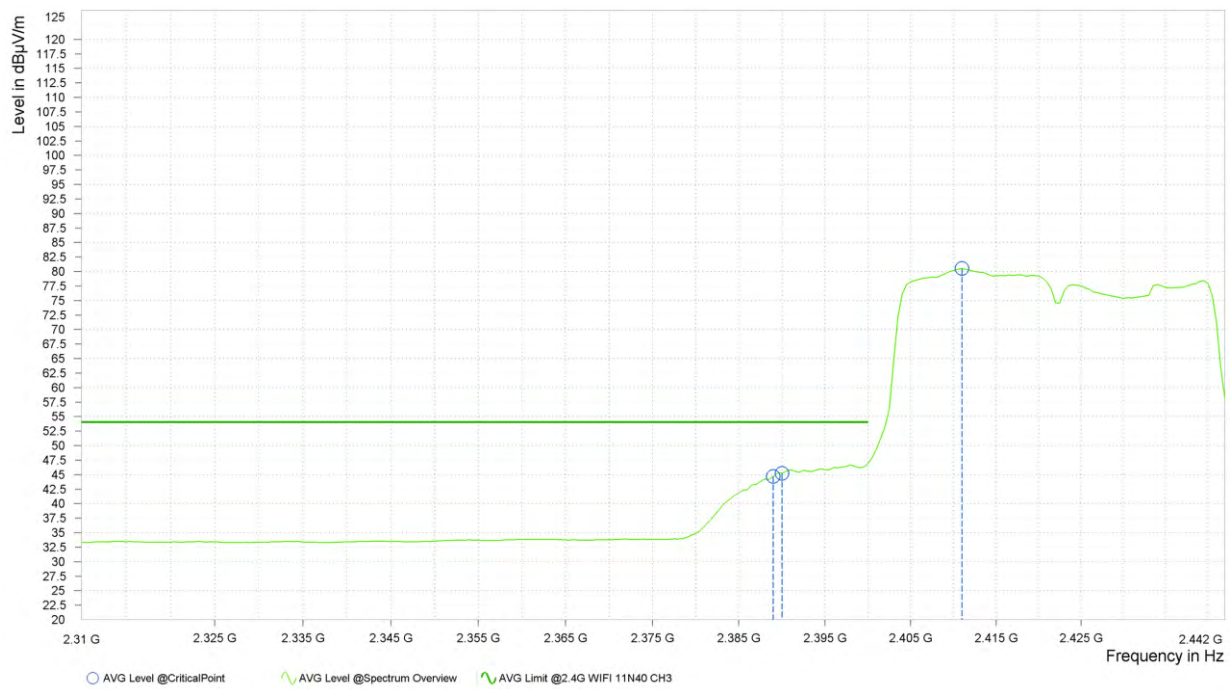

#### REMARKS:

- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor  
Margin value = Limit value–Emission level.
- 2422MHz: Fundamental frequency.




BUREAU  
VERITAS

Test Report No.: PSU-QSU2312200110RF08

CHANNEL	TX Channel 6	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	4,874.000	49.88	74.00	24.12	39.41	54.00	14.59	15.25	H	160.6	2.00
2	7,311.000	56.55	74.00	17.45	45.84	54.00	8.16	21.10	H	160.6	2.00

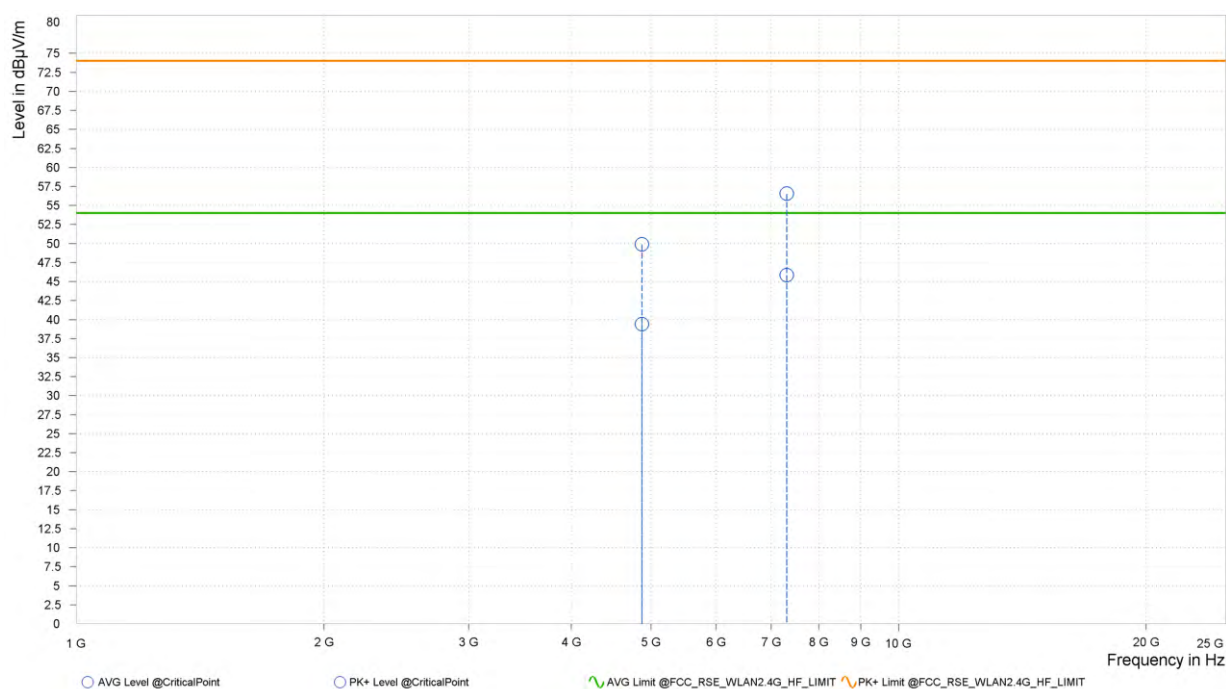




BUREAU  
VERITAS

Test Report No.: PSU-QSU2312200110RF08

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	4,874.000	50.88	74.00	23.12	39.83	54.00	14.17	15.25	V	359.1	2.00
2	7,311.000	57.58	74.00	16.42	45.68	54.00	8.32	21.10	V	359.1	2.00

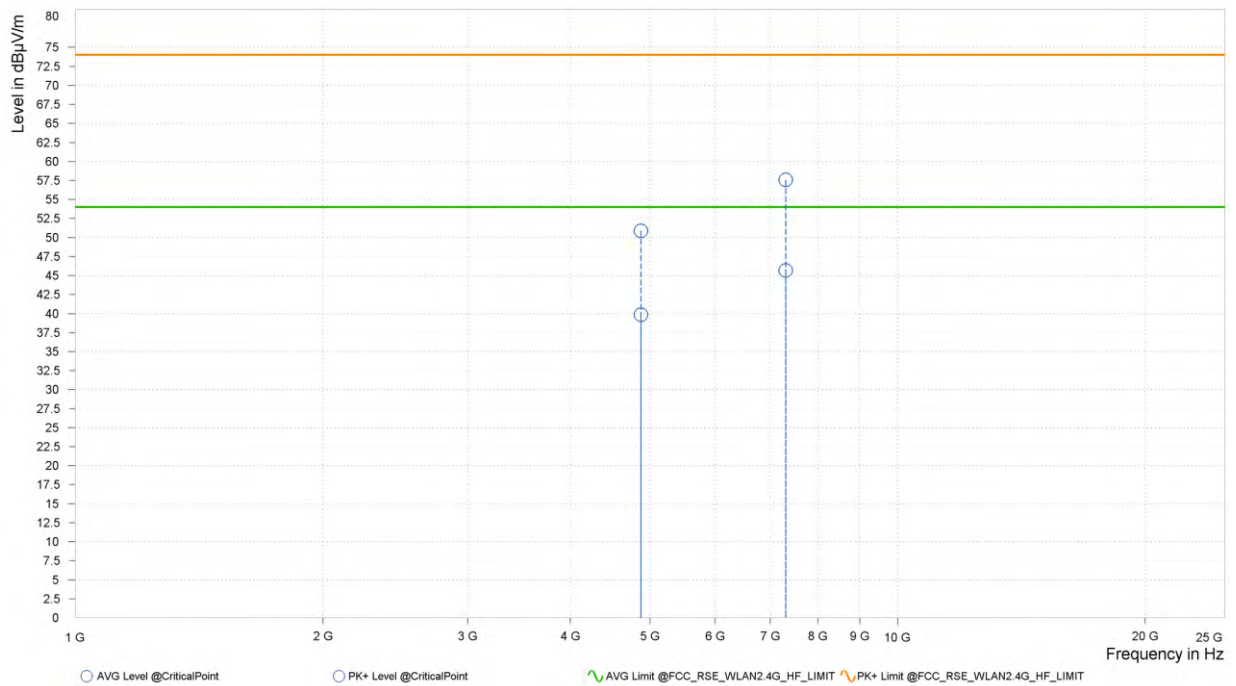

REMARKS:

- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor  
Margin value = Limit value–Emission level.
- 2437MHz: Fundamental frequency.




BUREAU  
VERITAS

Test Report No.: PSU-QSU2312200110RF08

CHANNEL	TX Channel 9	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
4	2,448.500	104.07			7.44	H	160.6	1.00
4	2,483.500	53.60	74.00	20.40	7.36	H	75.8	1.00
4	2,493.500	59.16	74.00	14.84	7.37	H	75.8	1.00

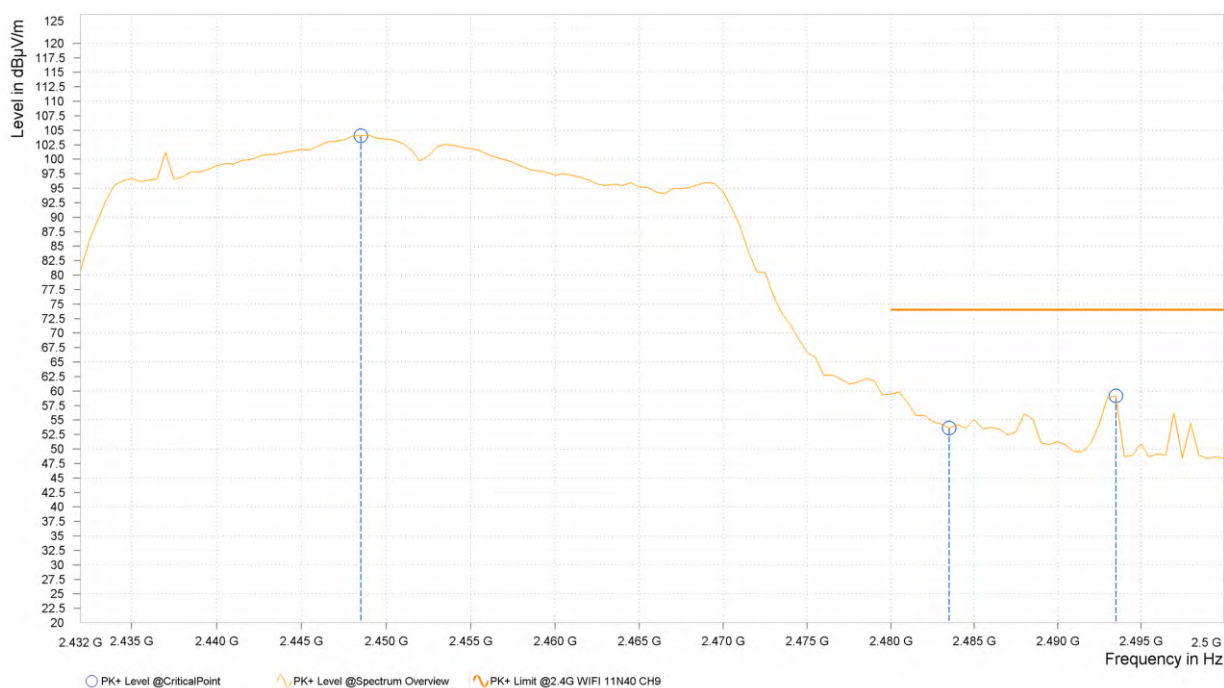




BUREAU  
VERITAS

Test Report No.: PSU-QSU2312200110RF08

Rg	Frequency [MHz]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
4	2,449.500	86.63			7.44	H	140.8	2.00
4	2,483.500	40.19	54.00	13.81	7.36	H	213.7	2.00
4	2,484.000	39.93	54.00	14.07	7.36	H	213.7	2.00

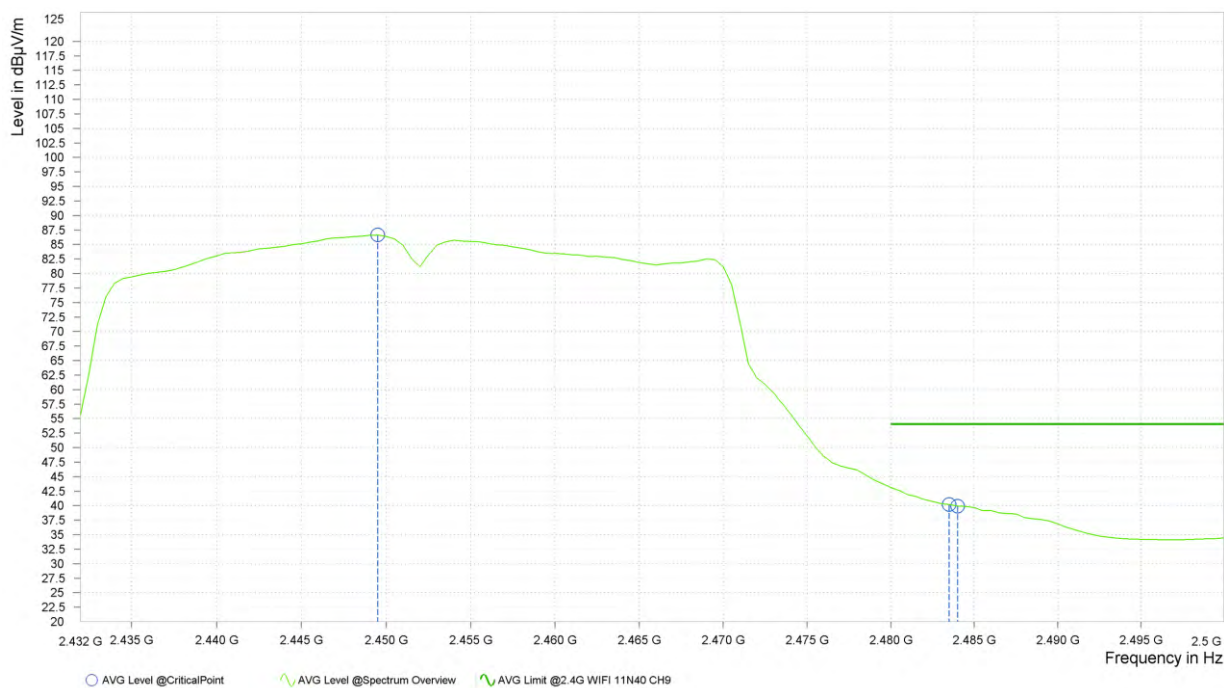




BUREAU  
VERITAS

Test Report No.: PSU-QSU2312200110RF08

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M


Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
4	2,448.500	99.48			7.44	V	213.7	2.00
4	2,483.500	51.65	74.00	22.35	7.36	V	66.6	2.00
4	2,484.500	51.79	74.00	22.21	7.36	V	66.6	2.00

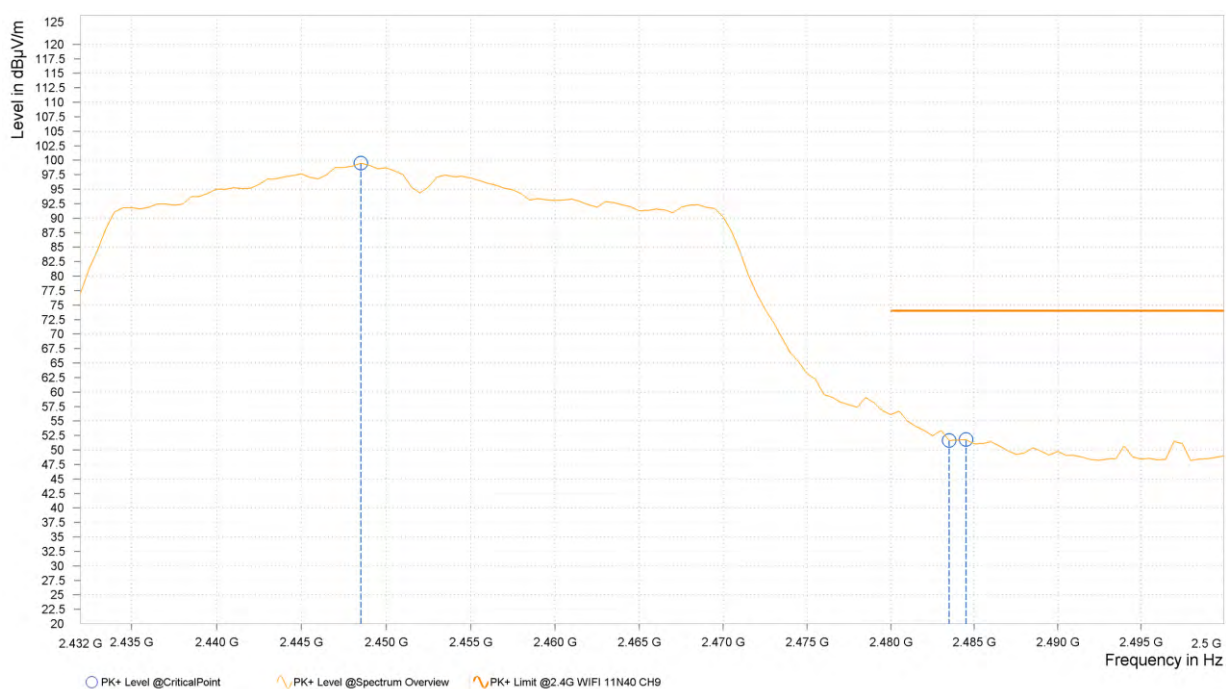





Rg	Frequency [MHz]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
4	2,450.000	85.71			7.44	V	27.2	2.00
4	2,483.500	38.12	54.00	15.88	7.36	V	355.1	2.00
4	2,484.000	37.76	54.00	16.24	7.36	V	355.1	2.00

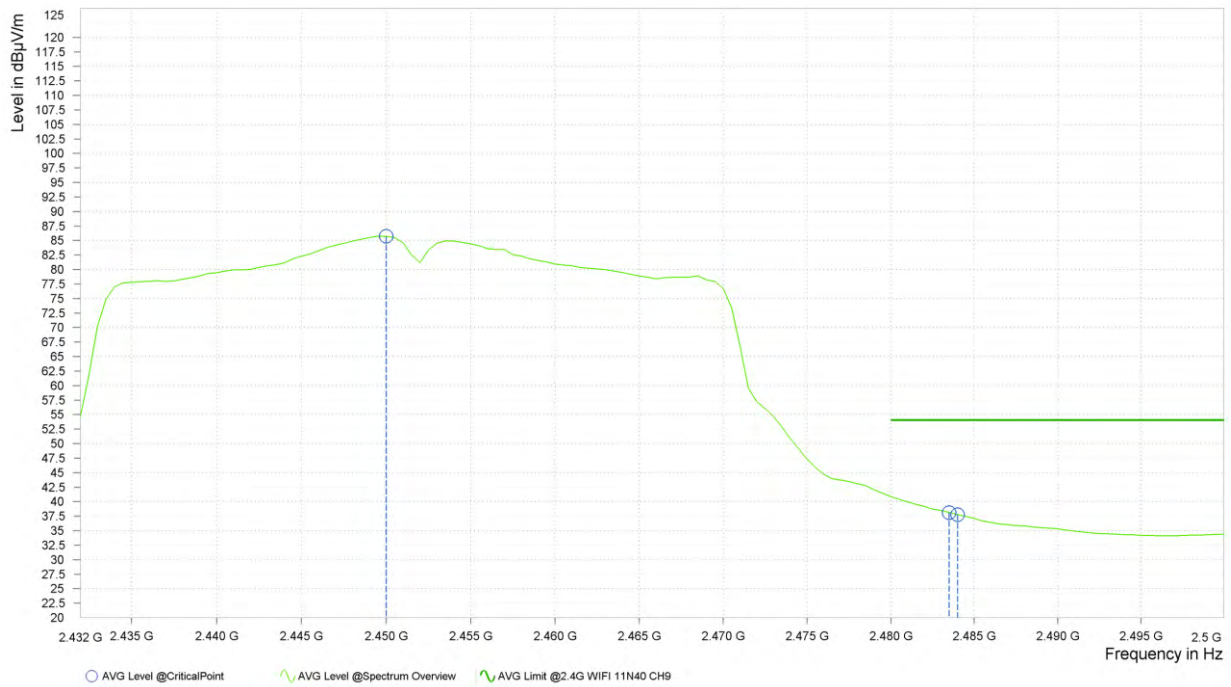

#### REMARKS:

- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor  
Margin value = Limit value–Emission level.
- 2452MHz: Fundamental frequency.



BUREAU  
VERITAS


Test Report No.: PSU-QSU2312200110RF08

802.11ac (20MHz)

CHANNEL	TX Channel 1	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

Rg	Frequency [MHz]	PK+ Level [dB $\mu$ V/m]	PK+ Limit [dB $\mu$ V/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
1	2,387.000	52.97	74.00	21.03	7.08	H	283	2.00
1	2,390.000	54.24	74.00	19.76	7.08	H	283	2.00
1	2,411.000	103.39			7.17	H	283	2.00

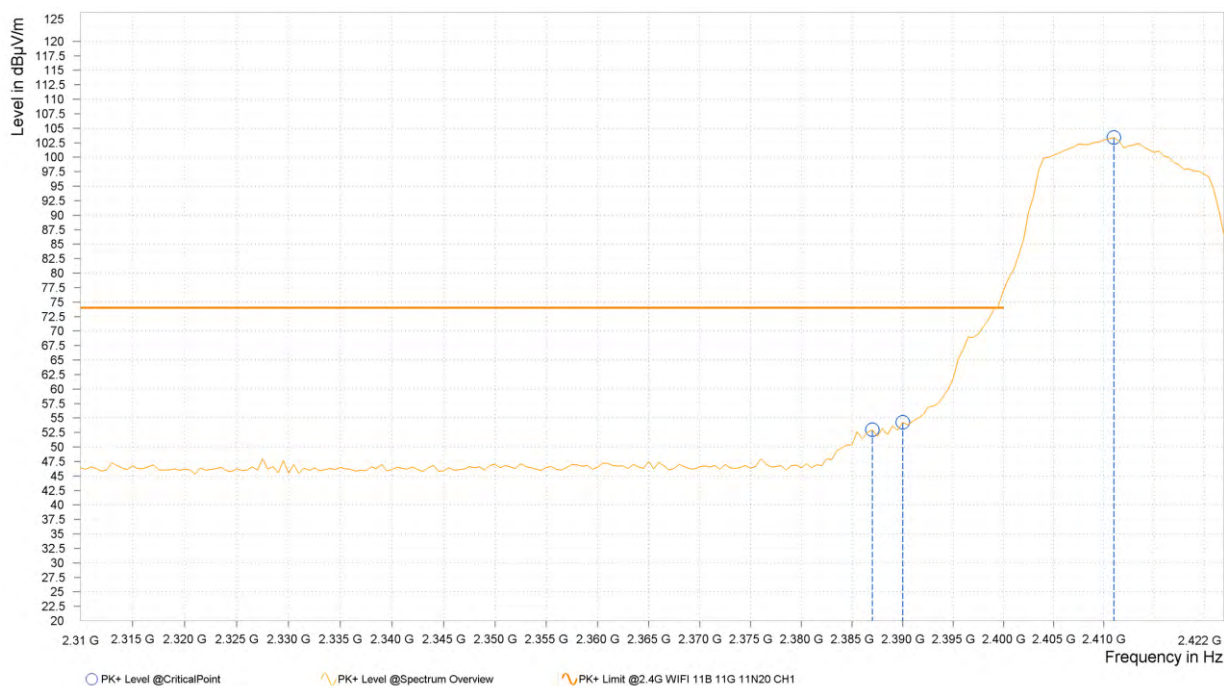






BUREAU  
VERITAS

Test Report No.: PSU-QSU2312200110RF08

Rg	Frequency [MHz]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
1	2,389.000	37.28	54.00	16.72	7.08	H	192.2	2.00
1	2,390.000	38.68	54.00	15.32	7.08	H	192.2	2.00
1	2,410.500	87.93			7.16	H	192.2	2.00

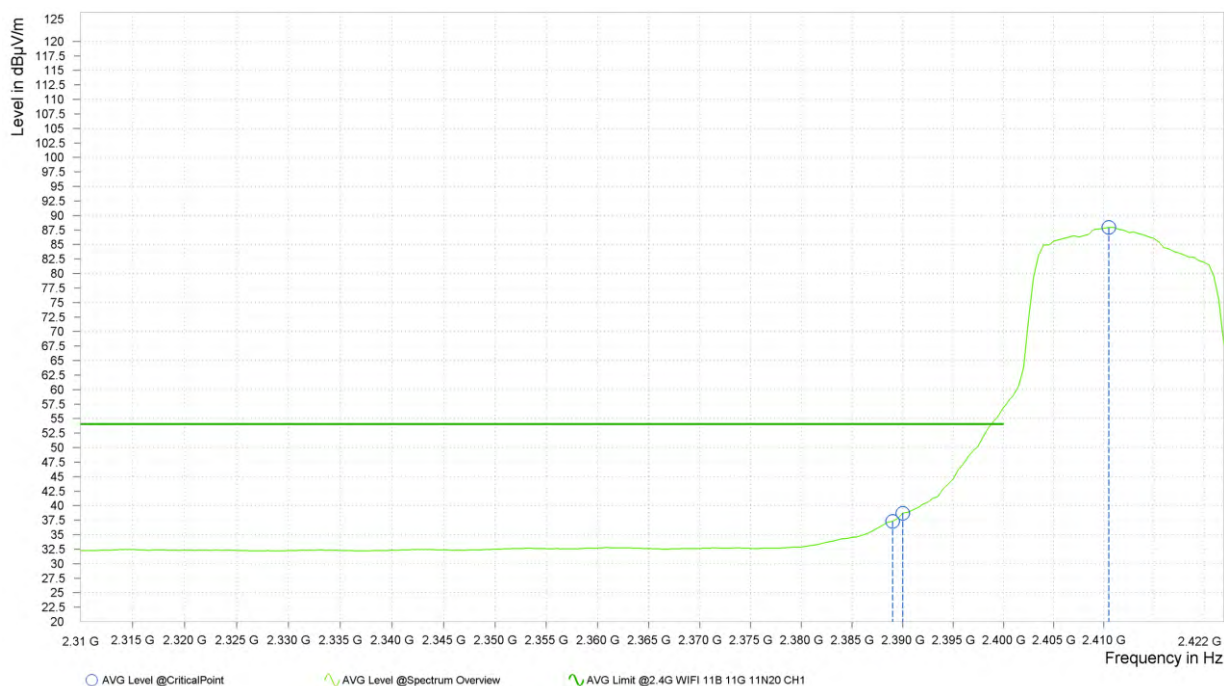




BUREAU  
VERITAS

Test Report No.: PSU-QSU2312200110RF08


ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
1	2,388.500	50.28	74.00	23.72	7.08	V	2.4	2.00
1	2,390.000	49.98	74.00	24.02	7.08	V	53.5	2.00
1	2,407.500	93.19			7.14	V	0.9	2.00

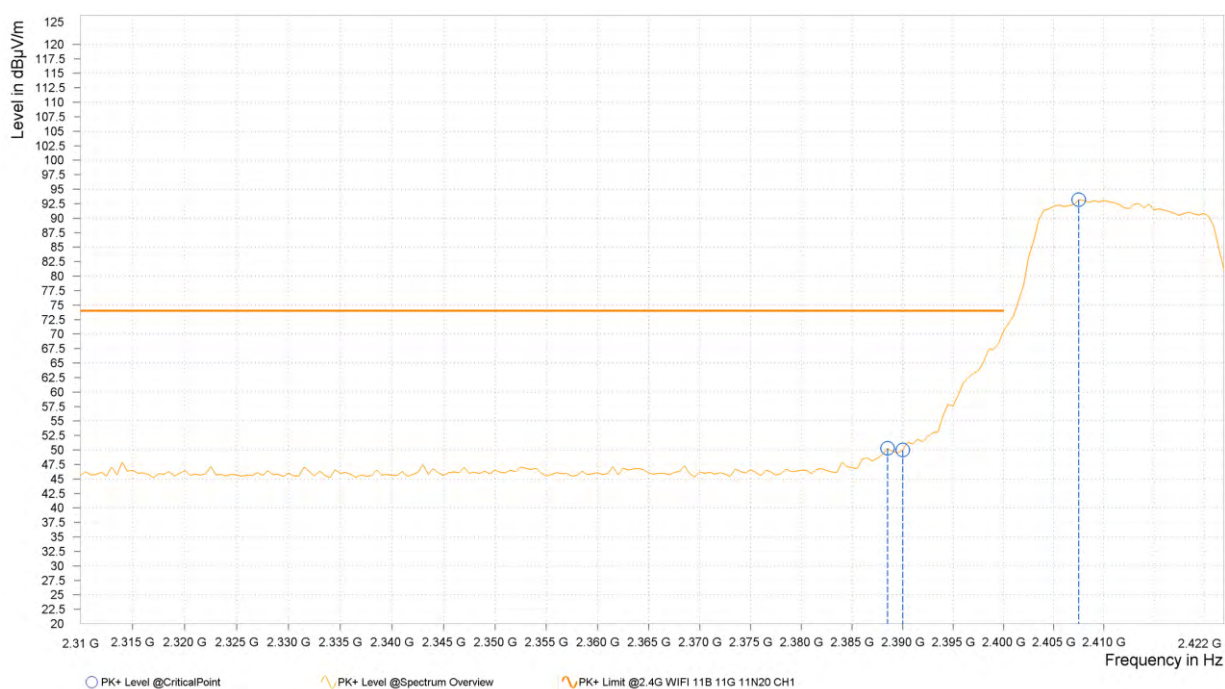



Rg	Frequency [MHz]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
1	2,389.000	35.28	54.00	18.72	7.08	V	60.6	2.00
1	2,390.000	35.91	54.00	18.09	7.08	V	60.6	2.00
1	2,410.500	84.38			7.16	V	150	1.00

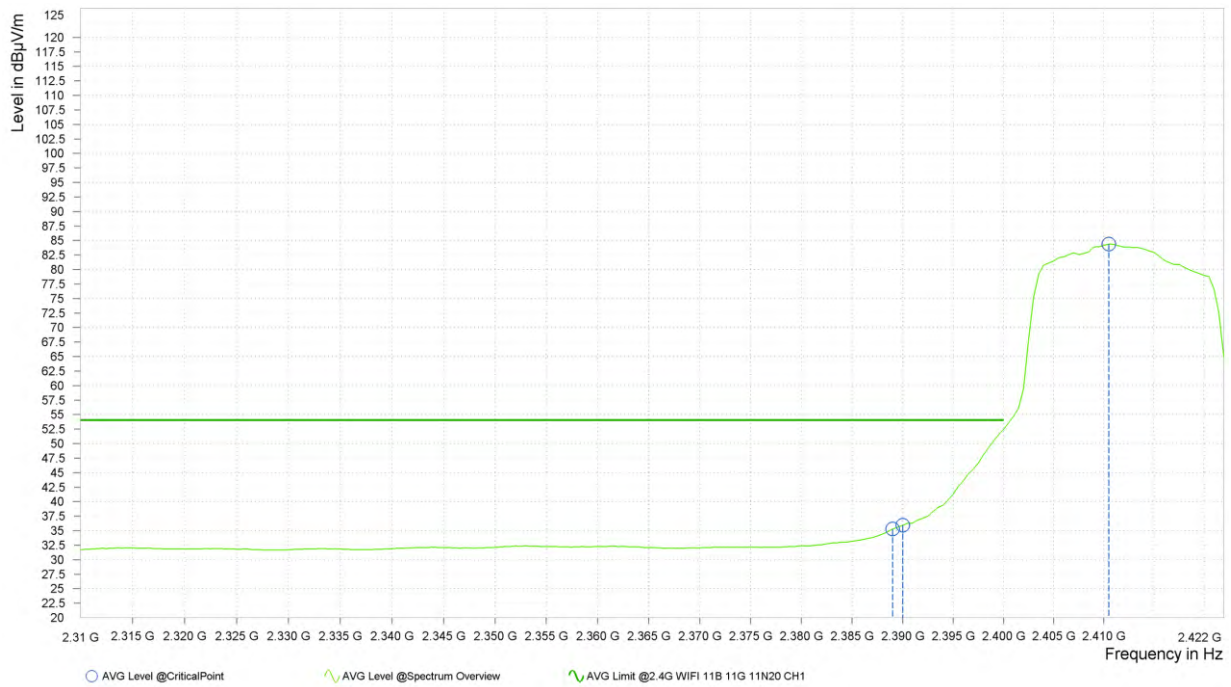

#### REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor  
Margin value = Limit value- Emission level.
2. 2412MHz: Fundamental frequency.




BUREAU  
VERITAS

Test Report No.: PSU-QSU2312200110RF08

CHANNEL	TX Channel 6	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	4,874.000	51.91	74.00	22.09	39.77	54.00	14.23	15.25	H	358.5	2.00
2	7,311.000	56.74	74.00	17.26	45.94	54.00	8.06	21.10	H	359.1	2.00

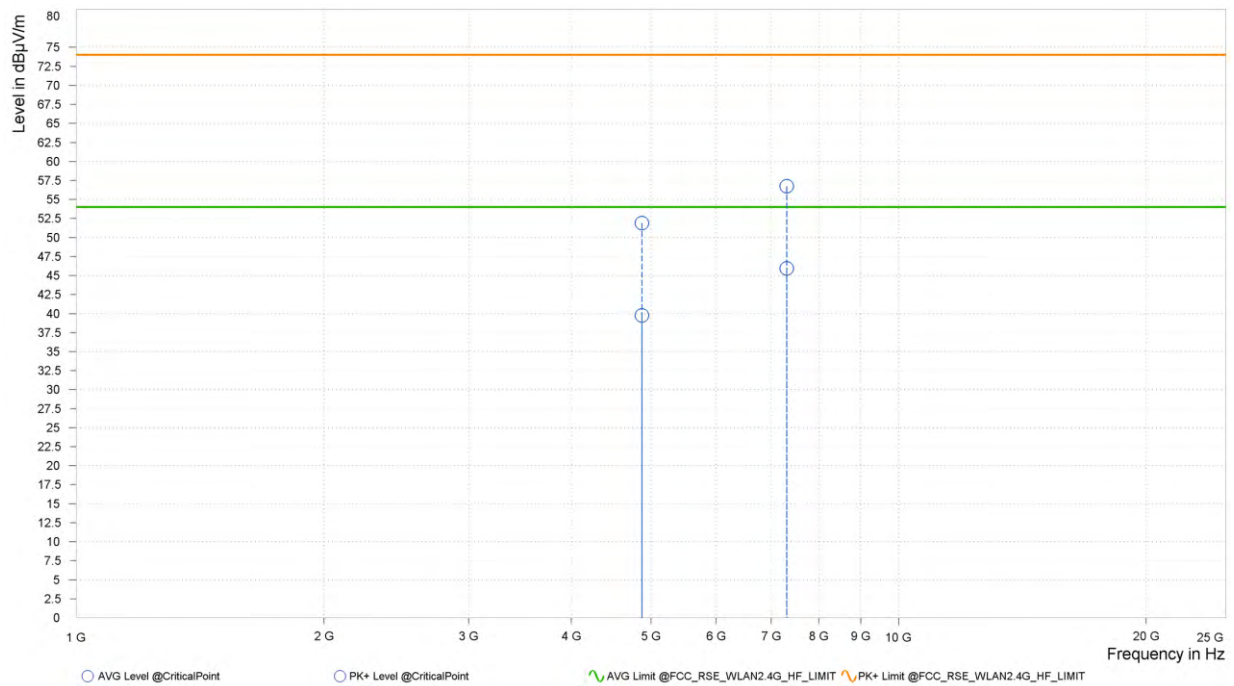




**BUREAU  
VERITAS**

Test Report No.: PSU-QSU2312200110RF08

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	4,874.000	51.83	74.00	22.17	39.95	54.00	14.05	15.25	V	359.1	2.00
2	7,311.000	56.91	74.00	17.09	45.90	54.00	8.10	21.10	V	90.2	2.00

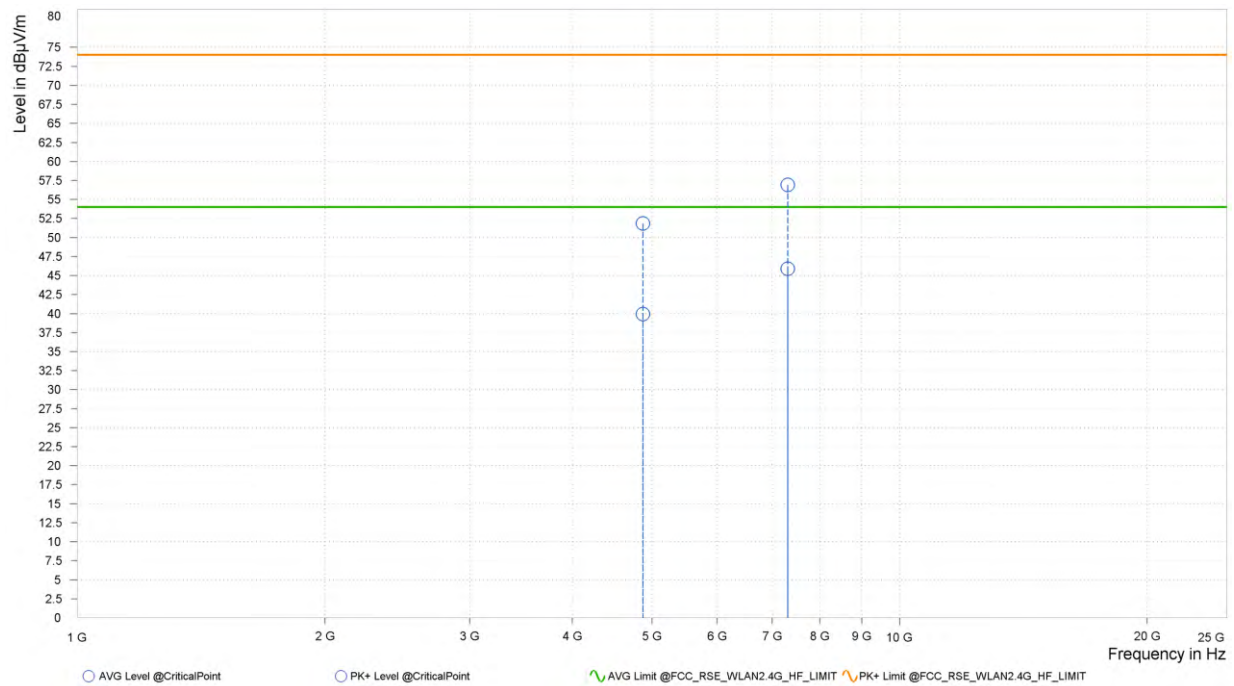

**REMARKS:**

- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor  
Margin value = Limit value–Emission level.
- 2437MHz: Fundamental frequency.






BUREAU  
VERITAS

Test Report No.: PSU-QSU2312200110RF08

CHANNEL	TX Channel 11	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	2,454.000	98.79			7.43	H	134.7	2.00
2	2,483.500	49.42	74.00	24.58	7.36	H	97.4	1.00
2	2,490.000	57.65	74.00	16.35	7.37	H	28	1.00

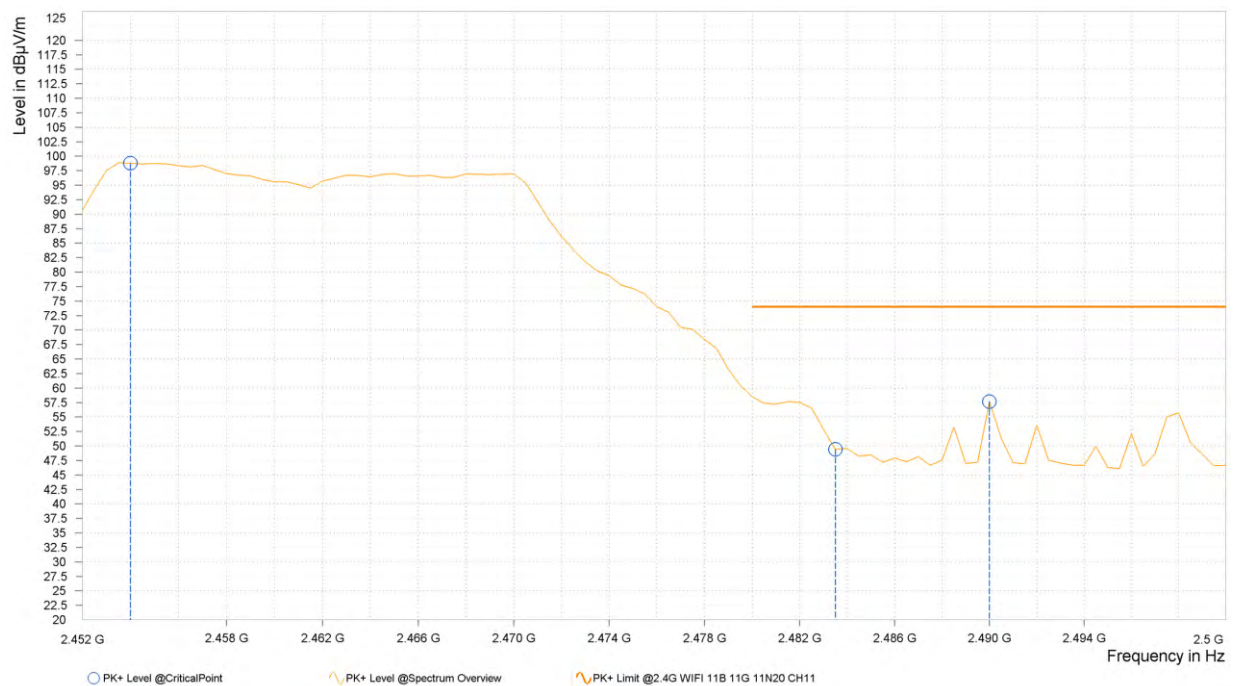




BUREAU  
VERITAS

Test Report No.: PSU-QSU2312200110RF08

Rg	Frequency [MHz]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	2,454.000	91.14			7.43	H	147.5	1.00
2	2,483.500	36.37	54.00	17.63	7.36	H	147.5	1.00
2	2,484.000	35.73	54.00	18.27	7.36	H	147.5	1.00

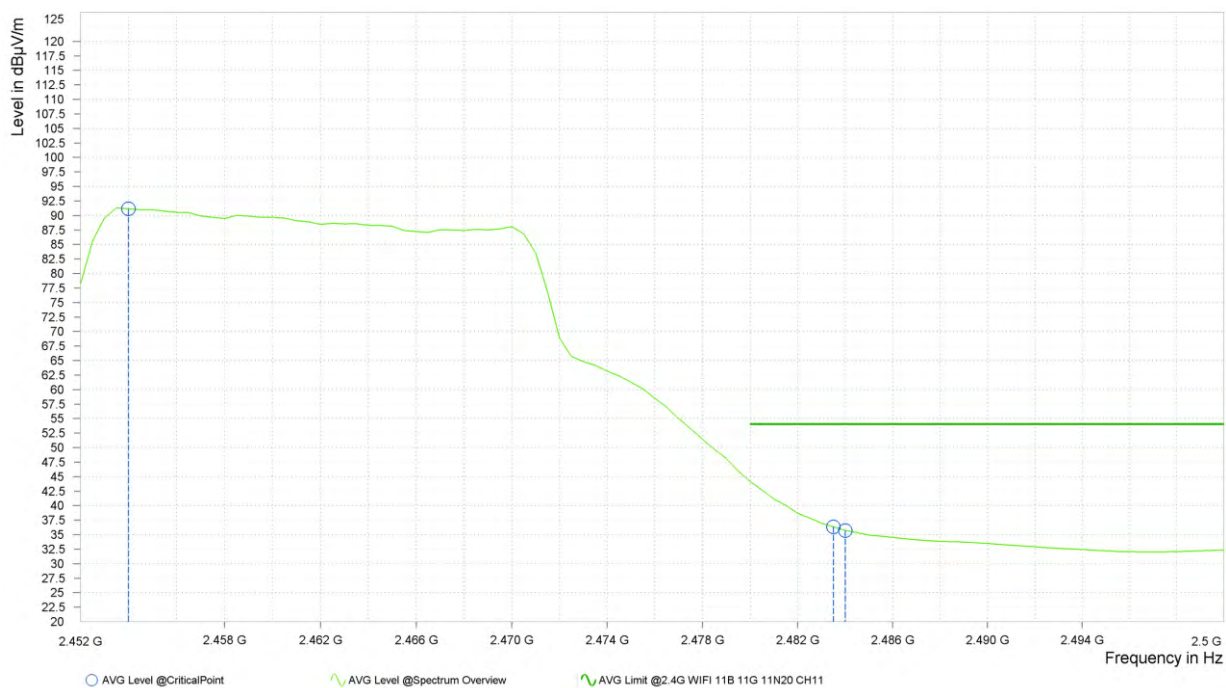






BUREAU  
VERITAS

Test Report No.: PSU-QSU2312200110RF08


ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	2,454.500	97.25			7.43	V	121.6	2.00
2	2,483.500	47.82	74.00	26.18	7.36	V	176.2	1.00
2	2,489.500	53.75	74.00	20.25	7.37	V	176.2	1.00

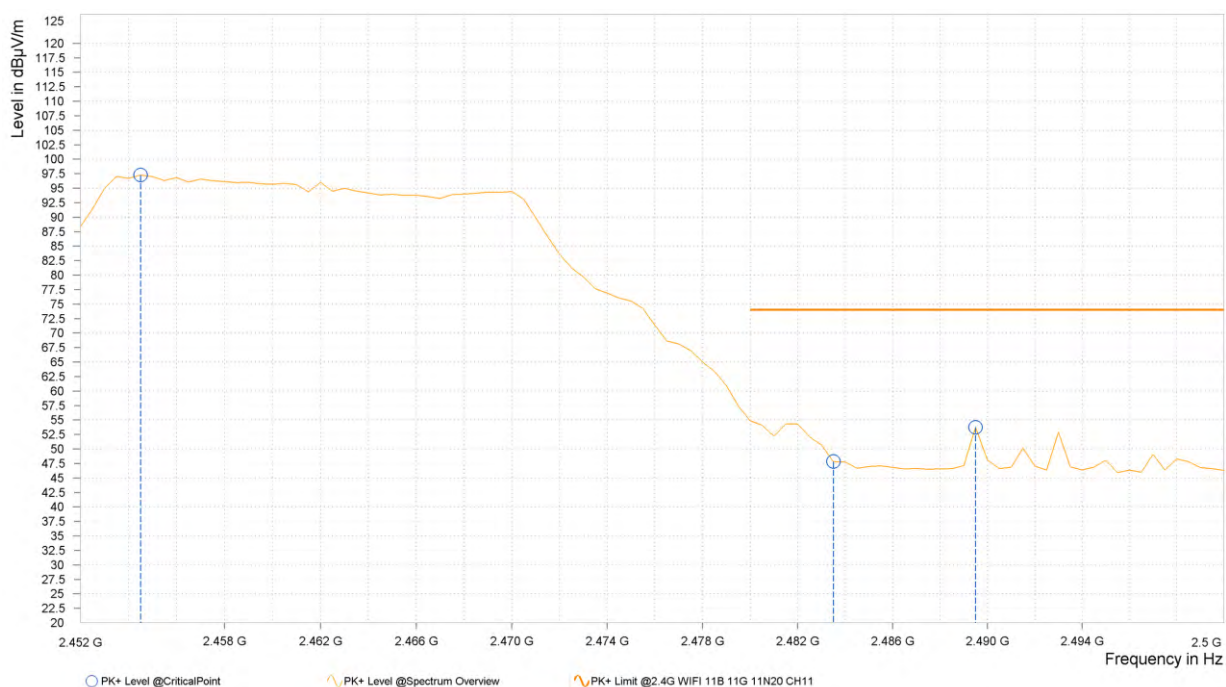



Rg	Frequency [MHz]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	2,454.000	85.12			7.43	V	11.3	2.00
2	2,483.500	34.23	54.00	19.77	7.36	V	286.6	2.00
2	2,484.000	33.86	54.00	20.14	7.36	V	286.6	2.00

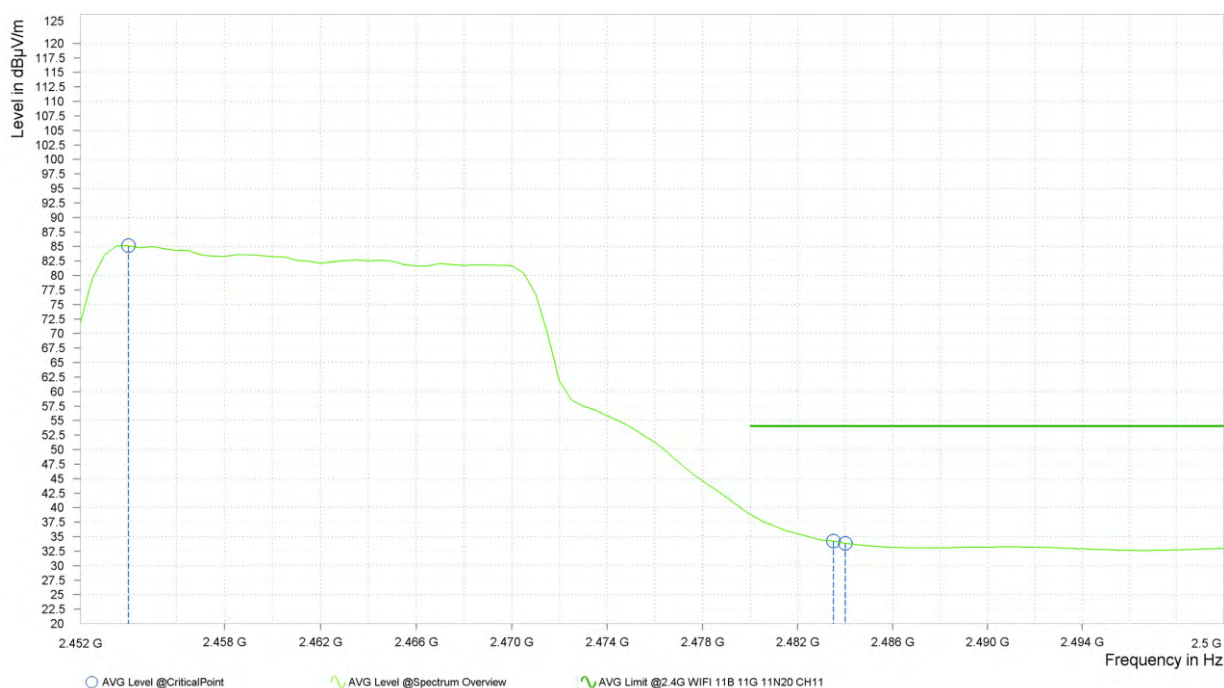

#### REMARKS:

- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor  
Margin value = Limit value–Emission level .
- 2462MHz: Fundamental frequency.



BUREAU  
VERITAS


Test Report No.: PSU-QSU2312200110RF08

802.11ac(40MHz)

CHANNEL	TX Channel 3	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)


ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
3	2,387.500	63.29	74.00	10.71	7.08	H	210.1	2.00
3	2,390.000	63.55	74.00	10.45	7.08	H	210.1	2.00
3	2,413.000	101.93			7.19	H	80.6	1.00

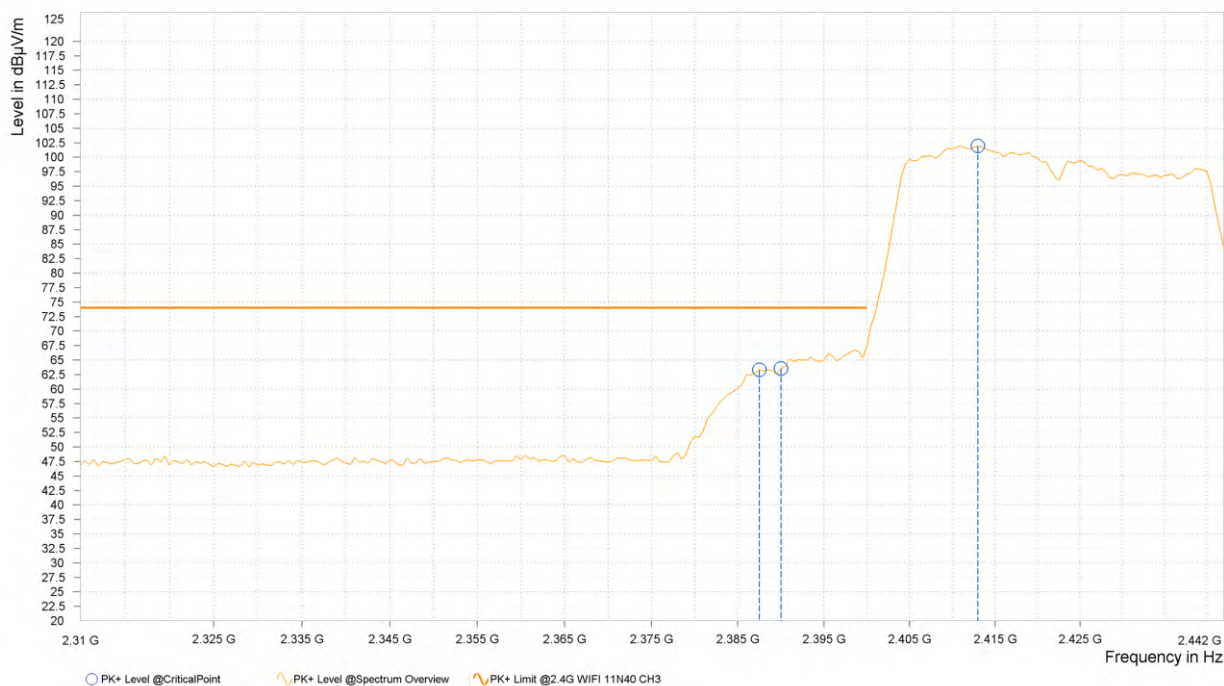



Rg	Frequency [MHz]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
3	2,389.000	49.84	54.00	4.16	7.08	H	75.8	1.00
3	2,390.000	50.45	54.00	3.55	7.08	H	75.8	1.00
3	2,411.000	87.40			7.17	H	75.8	1.00

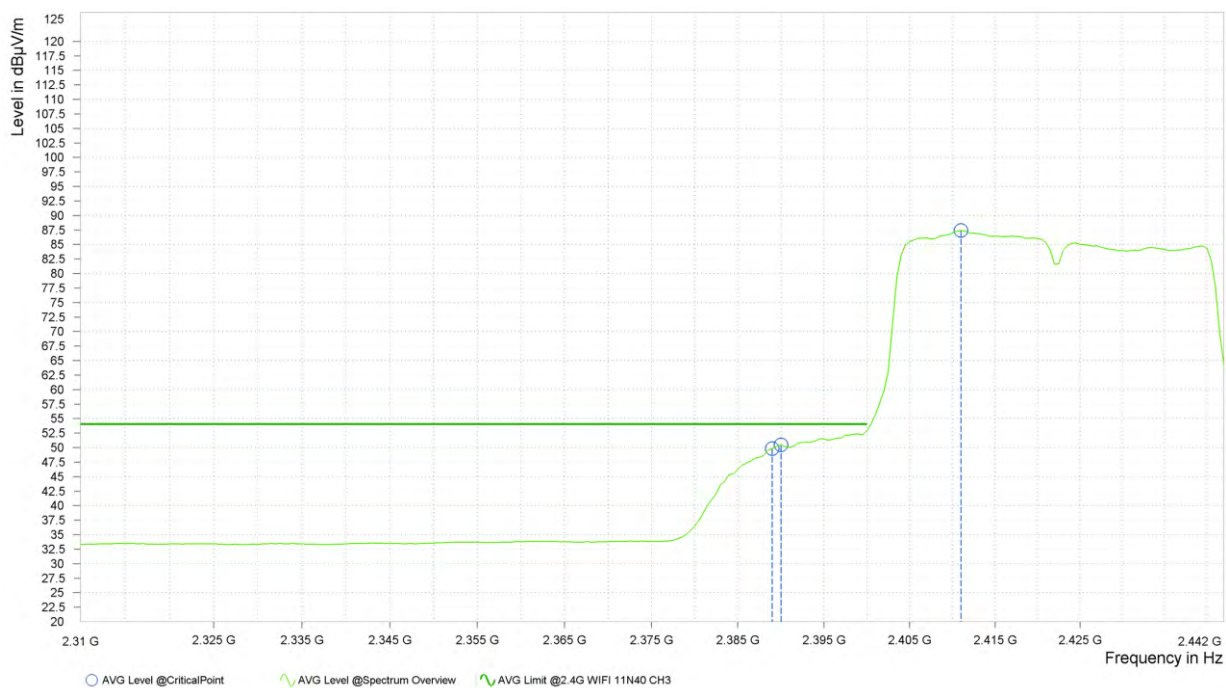



BUREAU  
VERITAS

Test Report No.: PSU-QSU2312200110RF08

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
3	2,388.000	58.78	74.00	15.22	7.08	V	57	2.00
3	2,390.000	59.19	74.00	14.81	7.08	V	359	2.00
3	2,413.500	92.66			7.19	V	5.6	1.00

