



Plot 7-67. Ant 1 Lower Band Edge (100MHz-1CC – QPSK Full RB)

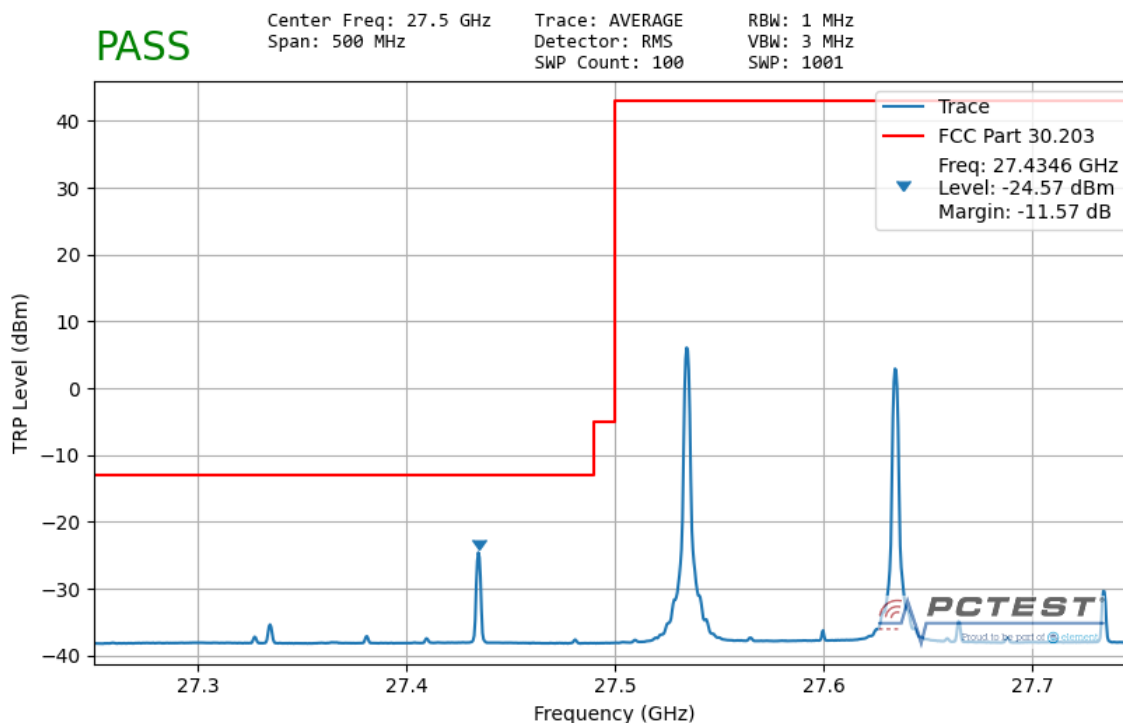


Plot 7-68. Ant 1 Lower Band Edge – TRP (100MHz-2CC – QPSK 1 RB)

FCC ID: A3LSMA426U	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1M2101040001-06-R1.A3L	Test Dates: 01/15/2021-02/24/2021	EUT Type: Portable Handset		Page 76 of 99

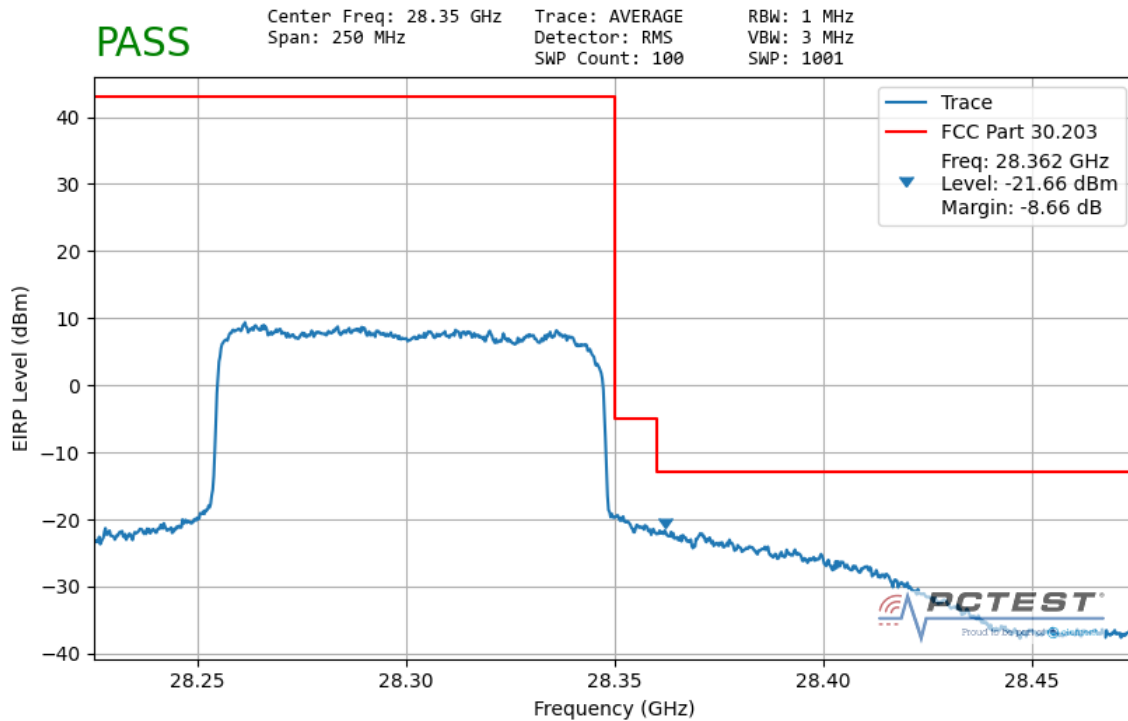


Plot 7-69. Ant 1 Upper Band Edge (100MHz-1CC – QPSK Full RB)

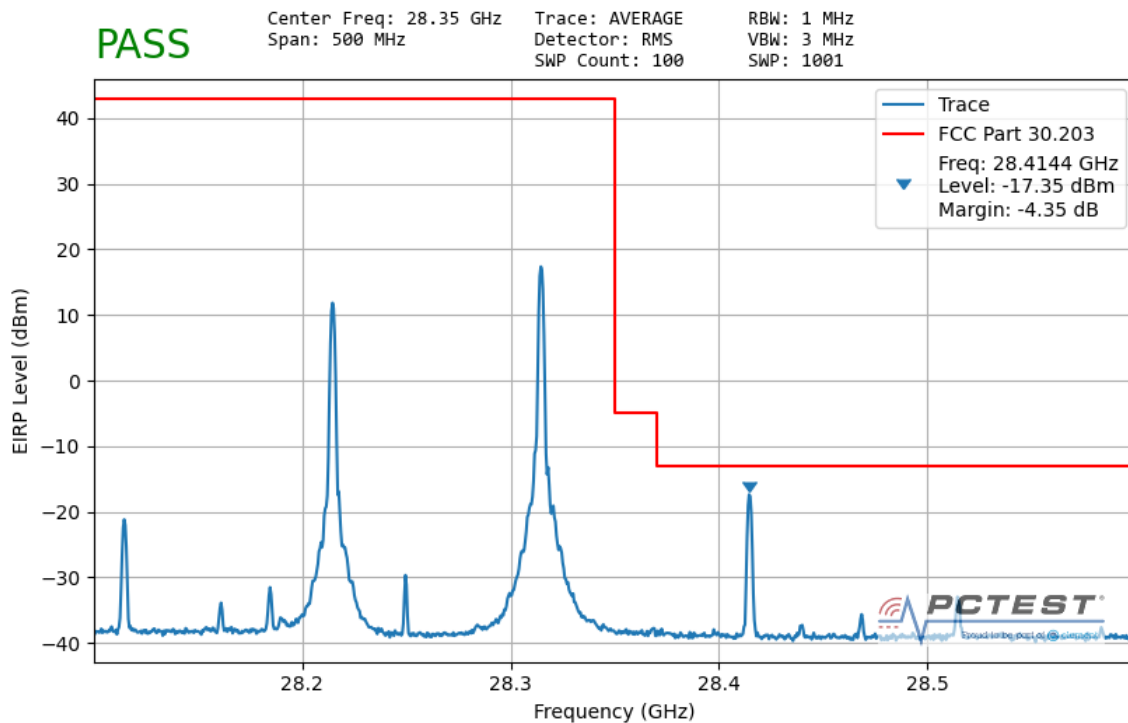


Plot 7-70. Ant 1 Upper Band Edge (100MHz-2CC – QPSK 1 RB)

FCC ID: A3LSMA426U	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1M2101040001-06-R1.A3L	Test Dates: 01/15/2021-02/24/2021	EUT Type: Portable Handset		Page 77 of 99

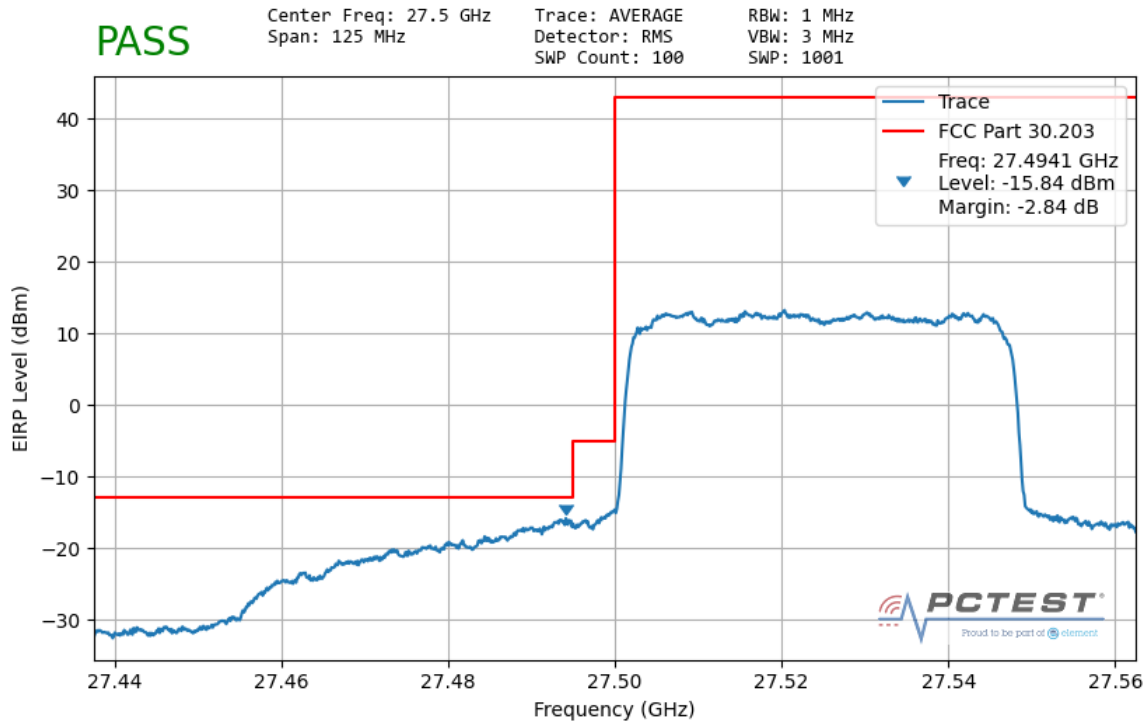


Plot 7-71. Ant 2 Lower Band Edge (50MHz-1CC – QPSK Full RB)

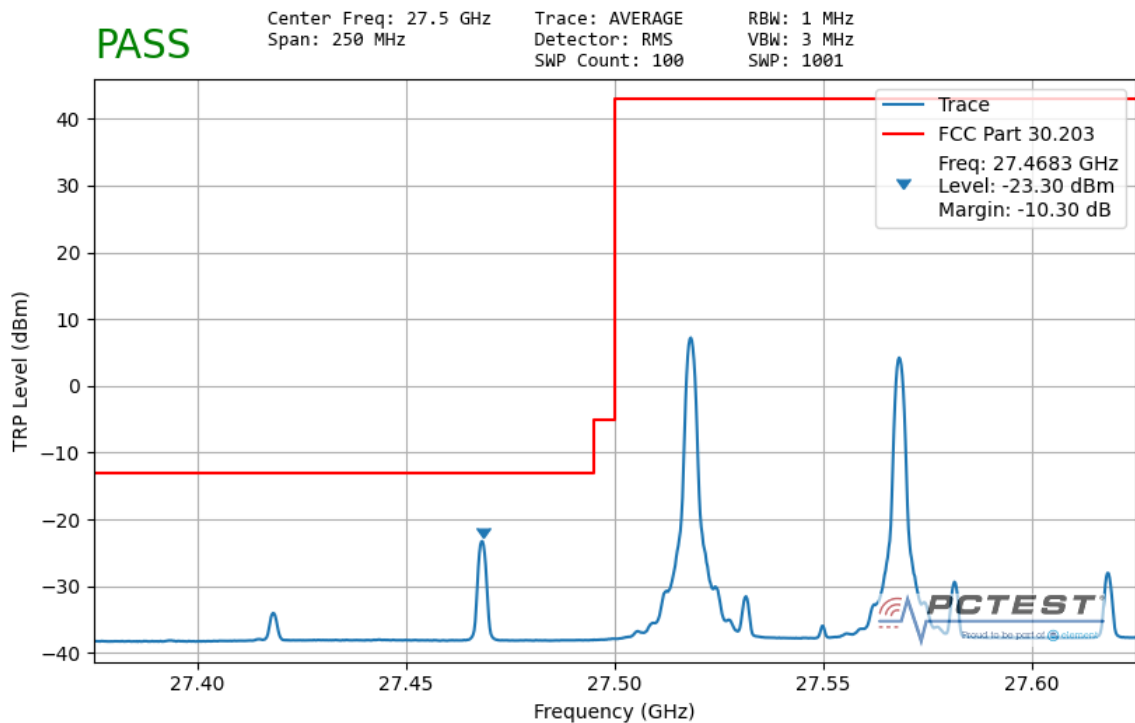


Plot 7-72. Ant 2 Lower Band Edge – TRP (50MHz-2CC – QPSK 1 RB)

FCC ID: A3LSMA426U	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1M2101040001-06-R1.A3L	Test Dates: 01/15/2021-02/24/2021	EUT Type: Portable Handset		Page 78 of 99

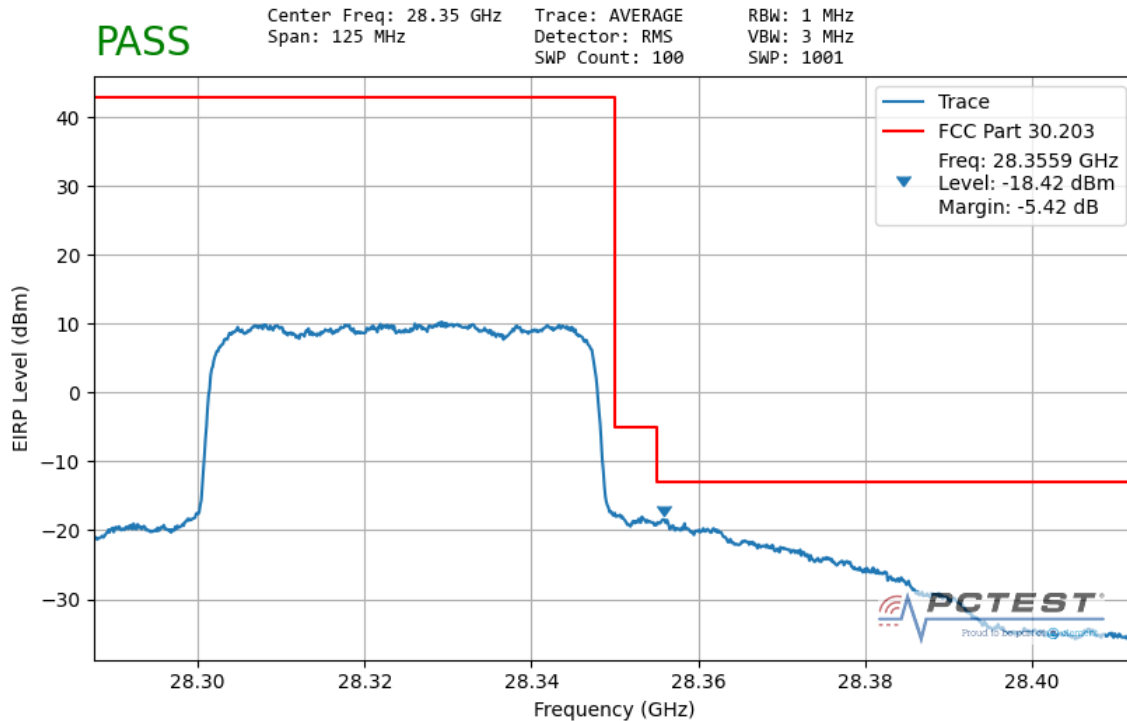


Plot 7-73. Ant 2 Upper Band Edge (50MHz-1CC – QPSK Full RB)

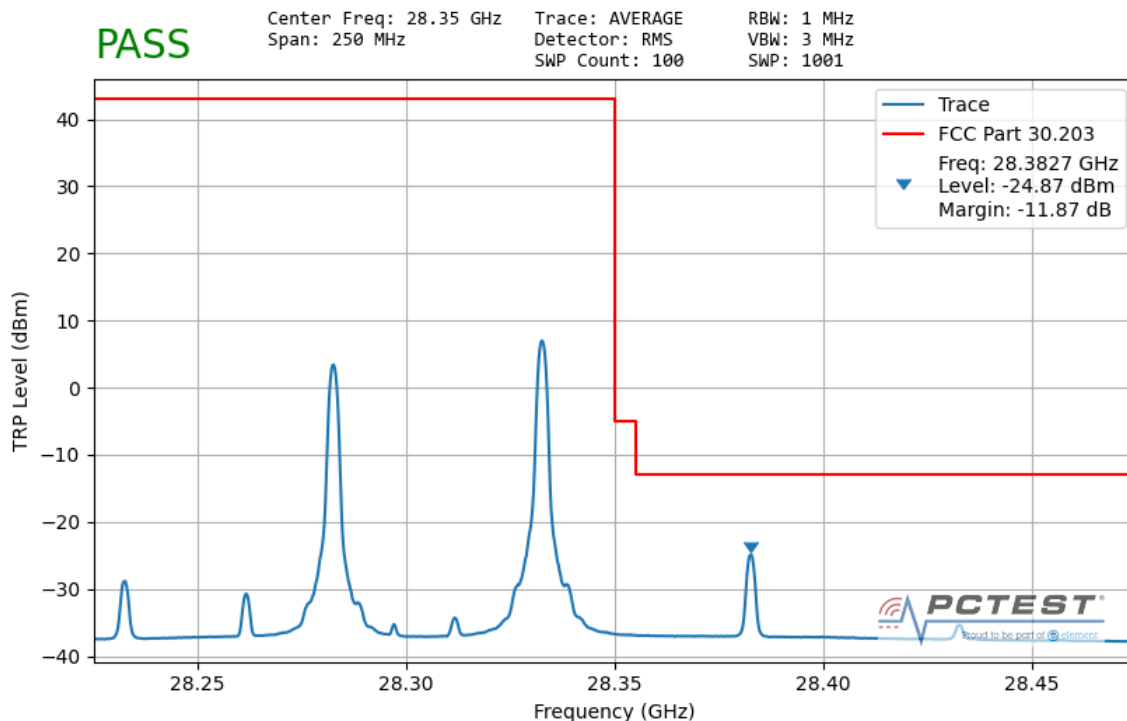


Plot 7-74. Ant 2 Upper Band Edge – TRP (50MHz-2CC – QPSK 1 RB)

FCC ID: A3LSMA426U	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1M2101040001-06-R1.A3L	Test Dates: 01/15/2021-02/24/2021	EUT Type: Portable Handset		Page 79 of 99

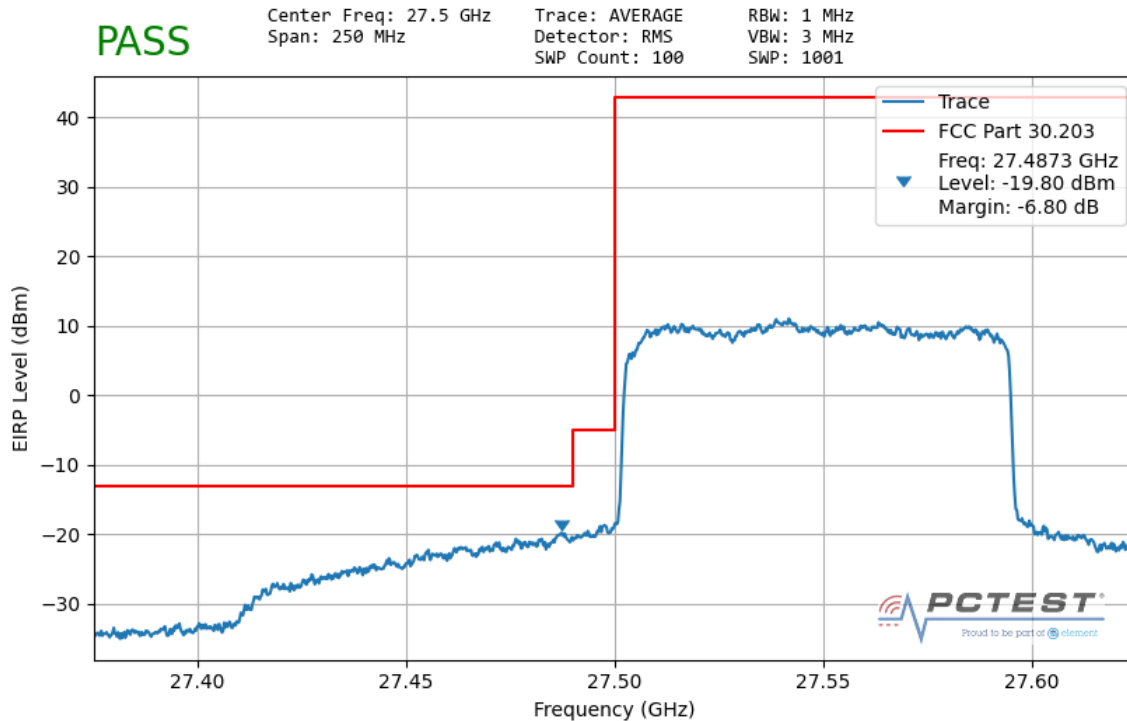


Plot 7-75. Ant 2 Lower Band Edge (100MHz-1CC – QPSK Full RB)

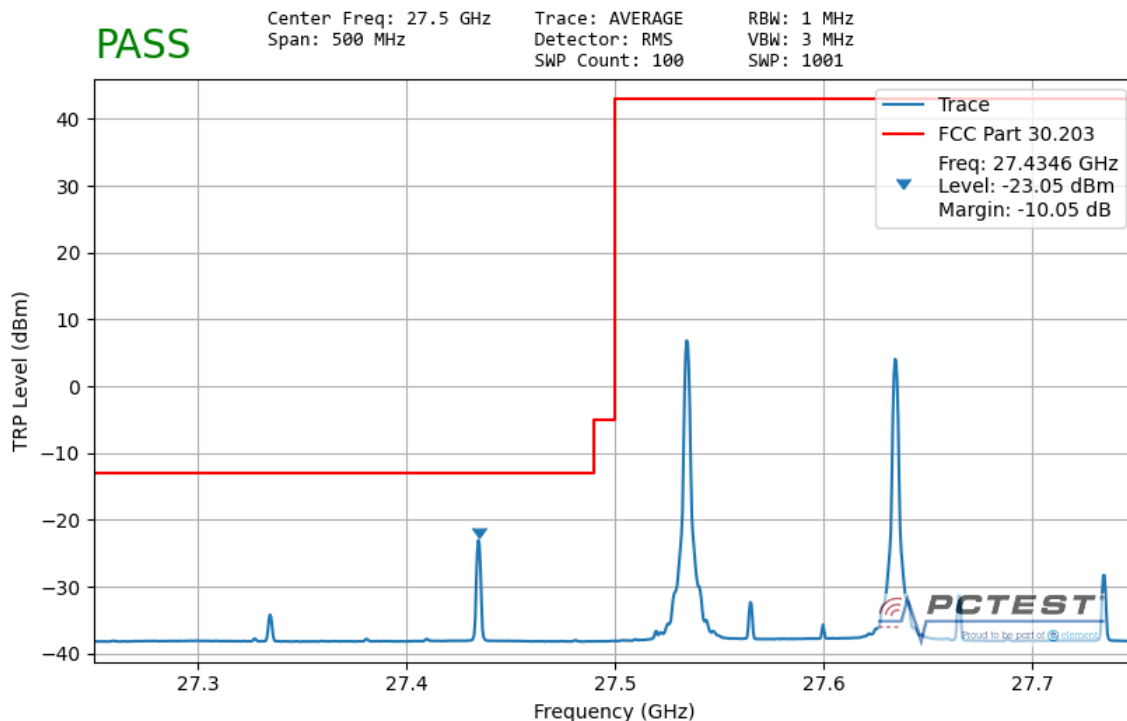


Plot 7-76. Ant 2 Lower Band Edge – TRP (100MHz-2CC – QPSK 1 RB)

FCC ID: A3LSMA426U	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1M2101040001-06-R1.A3L	Test Dates: 01/15/2021-02/24/2021	EUT Type: Portable Handset		Page 80 of 99

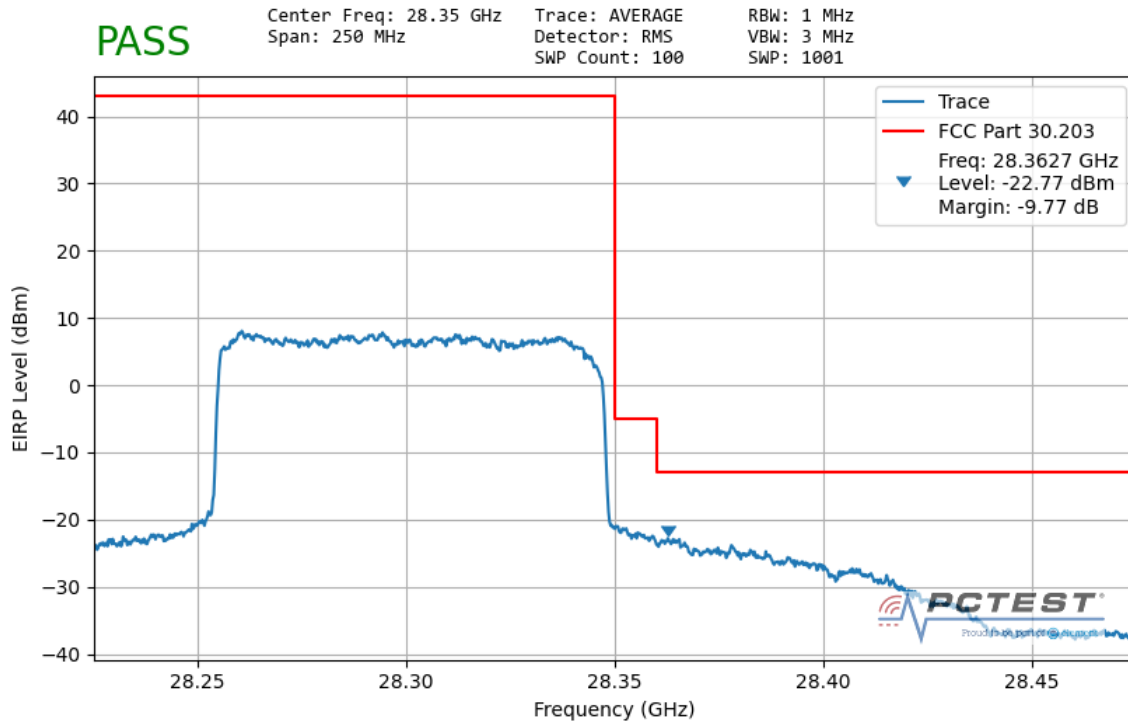


Plot 7-77. Ant 2 Upper Band Edge (100MHz-1CC – QPSK Full RB)

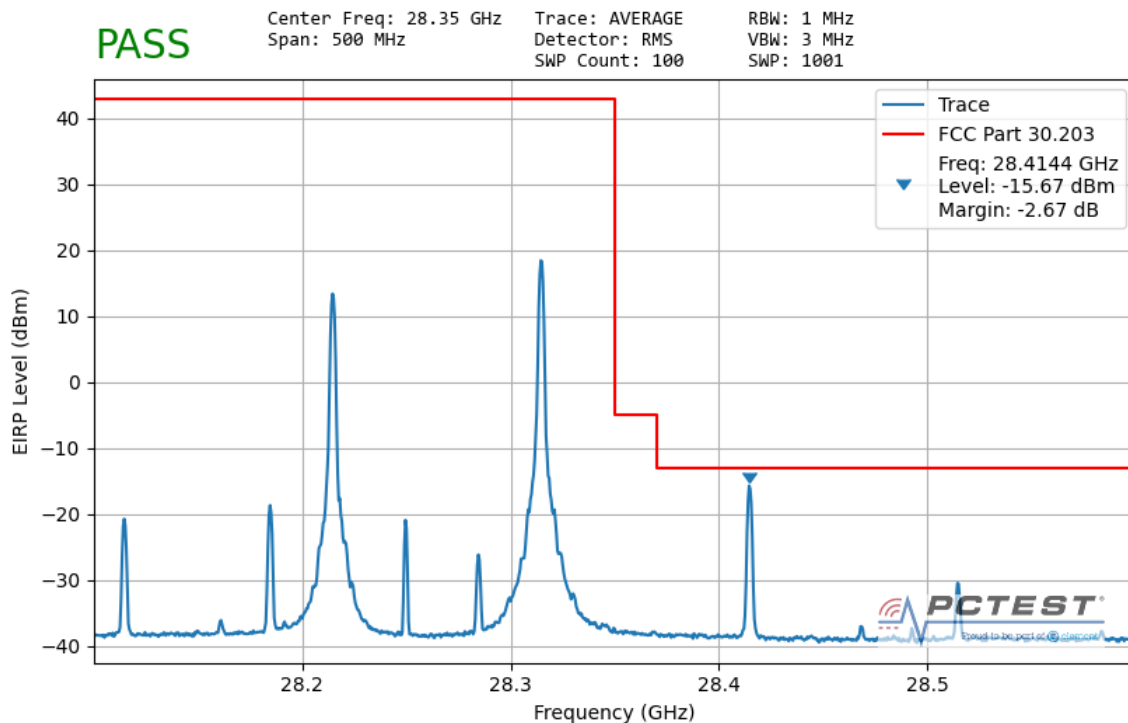


Plot 7-78. Ant 2 Upper Band Edge (100MHz-2CC – QPSK 1 RB)

FCC ID: A3LSMA426U	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1M2101040001-06-R1.A3L	Test Dates: 01/15/2021-02/24/2021	EUT Type: Portable Handset		Page 81 of 99

Band n260 – Worst Case

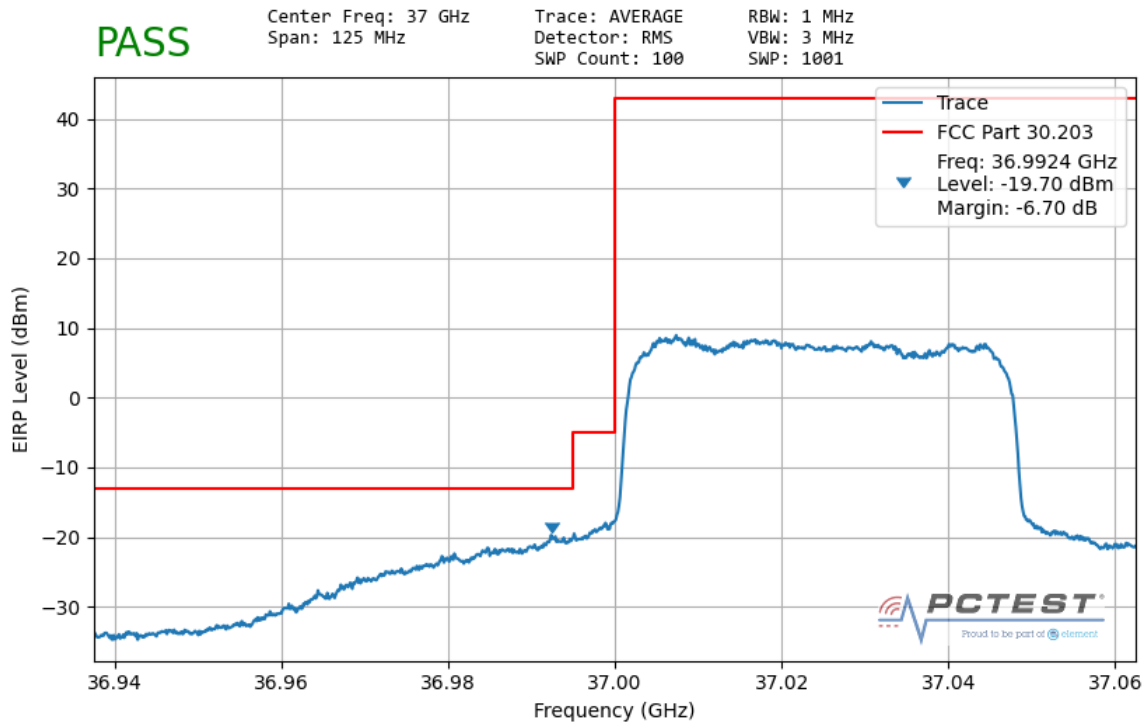


Plot 7-79. Ant 1 Lower Band Edge (50MHz-1CC – QPSK Full RB)

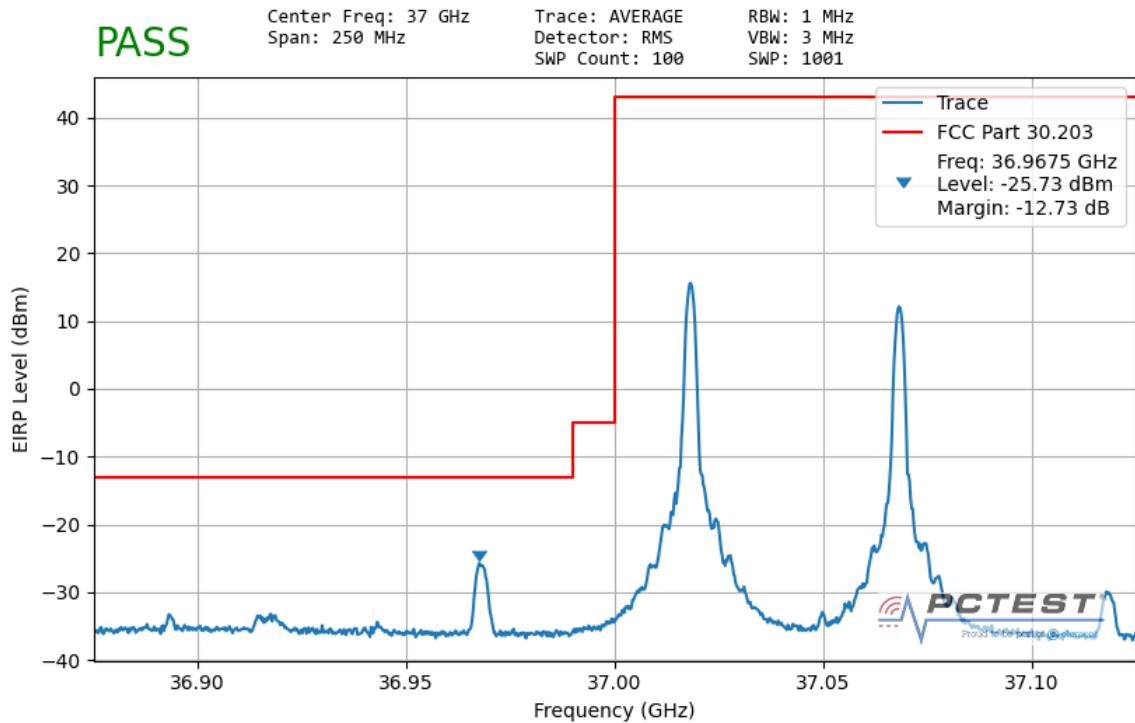


Plot 7-80. Ant 1 Lower Band Edge (50MHz-2CC – QPSK 1 RB)

FCC ID: A3LSMA426U	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1M2101040001-06-R1.A3L	Test Dates: 01/15/2021-02/24/2021	EUT Type: Portable Handset		Page 82 of 99

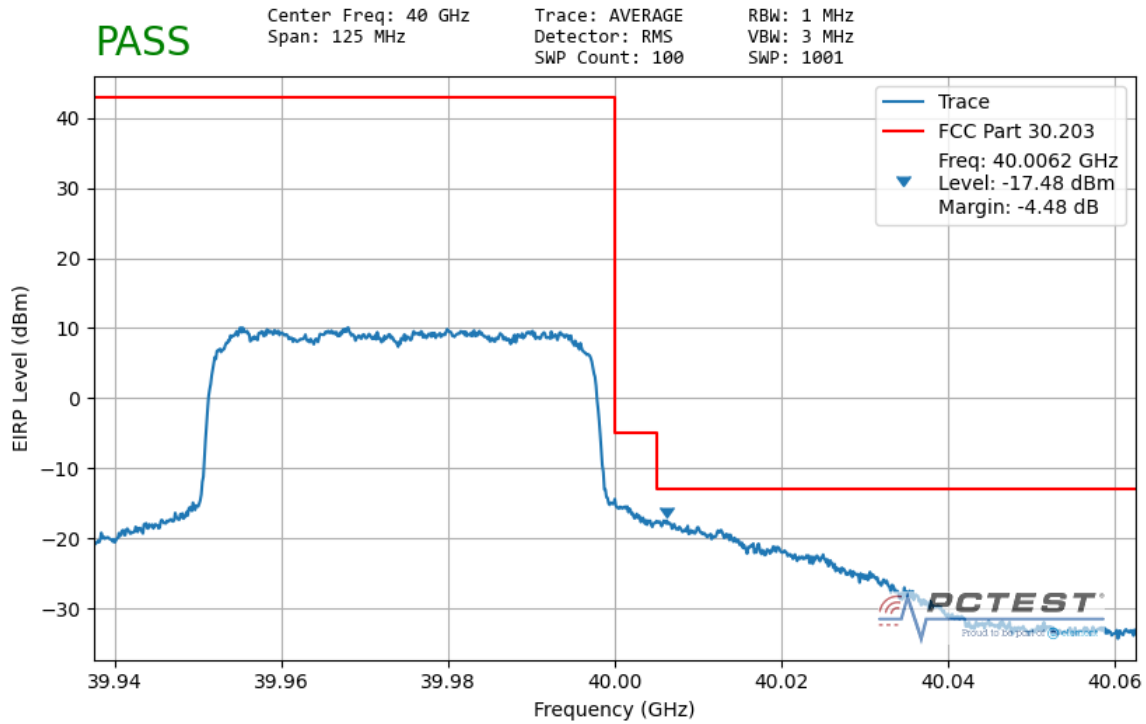


Plot 7-81. Ant 1 Upper Band Edge (50MHz-1CC – QPSK Full RB)

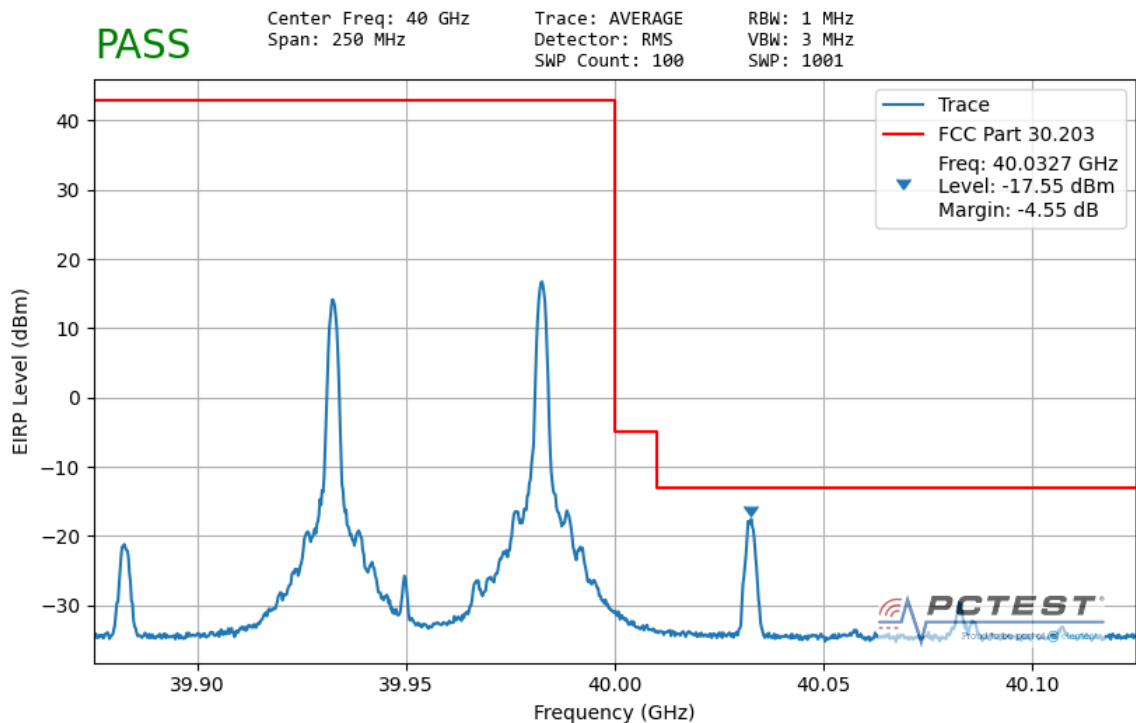


Plot 7-82. Ant 1 Upper Band Edge (50MHz-2CC – QPSK 1 RB)

FCC ID: A3LSMA426U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2101040001-06-R1.A3L	Test Dates: 01/15/2021-02/24/2021	EUT Type: Portable Handset		Page 83 of 99

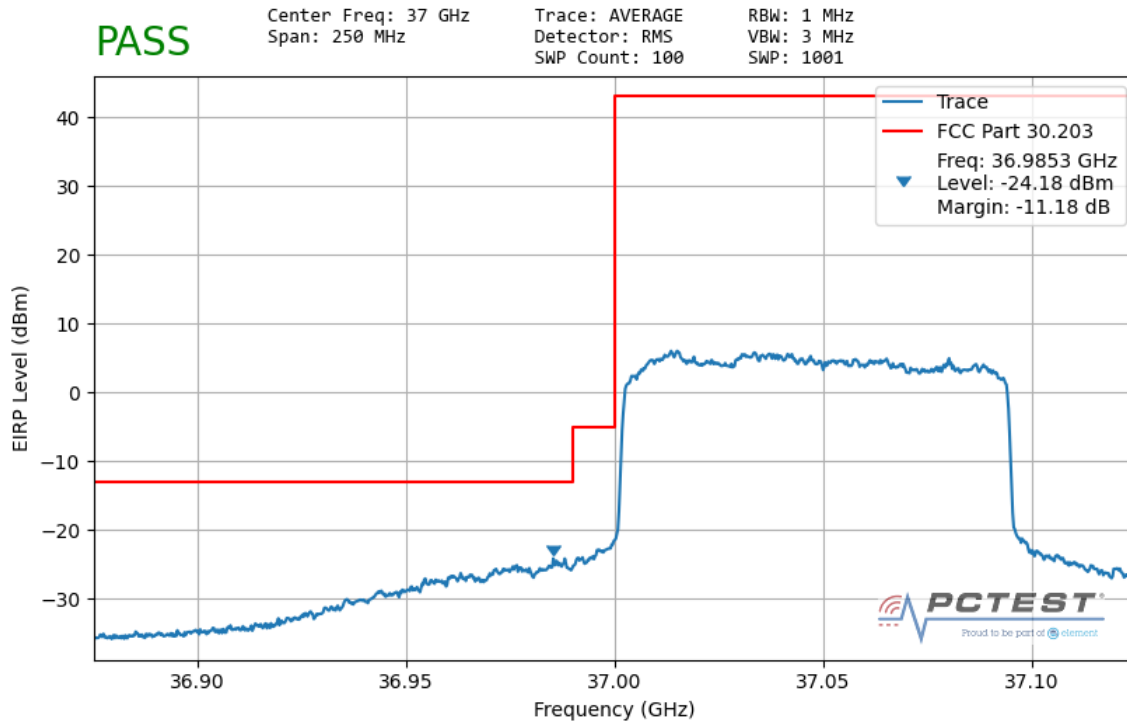


Plot 7-83. Ant 1 Lower Band Edge (100MHz-1CC – QPSK Full RB)

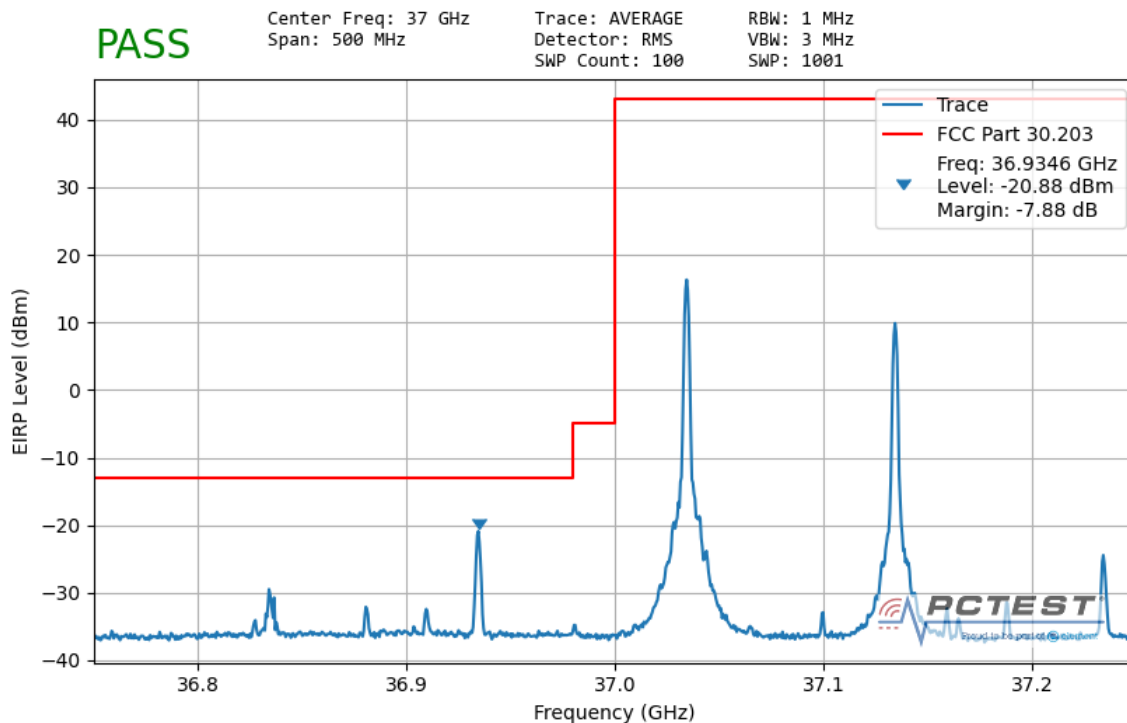


Plot 7-84. Ant 1 Lower Band Edge (100MHz-2CC – QPSK 1 RB)

FCC ID: A3LSMA426U	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1M2101040001-06-R1.A3L	Test Dates: 01/15/2021-02/24/2021	EUT Type: Portable Handset		Page 84 of 99

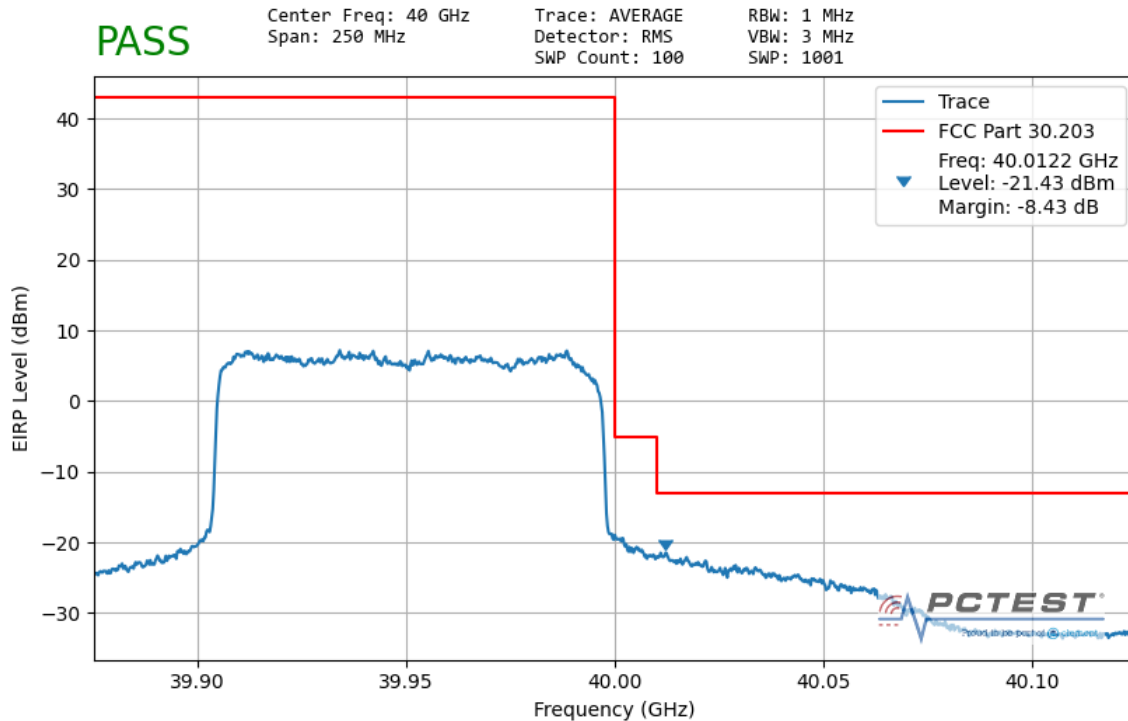


Plot 7-85. Ant 1 Upper Band Edge (100MHz-1CC – QPSK Full RB)

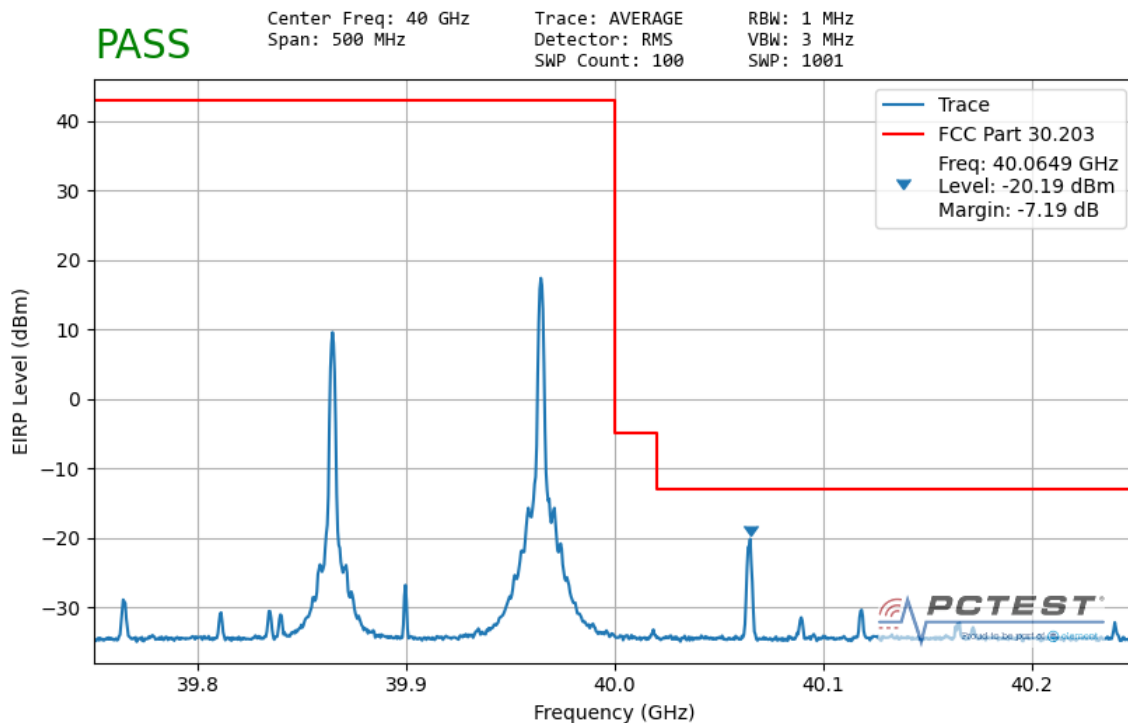


Plot 7-86. Ant 1 Upper Band Edge (100MHz-2CC – QPSK 1 RB)

FCC ID: A3LSMA426U	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1M2101040001-06-R1.A3L	Test Dates: 01/15/2021-02/24/2021	EUT Type: Portable Handset		Page 85 of 99

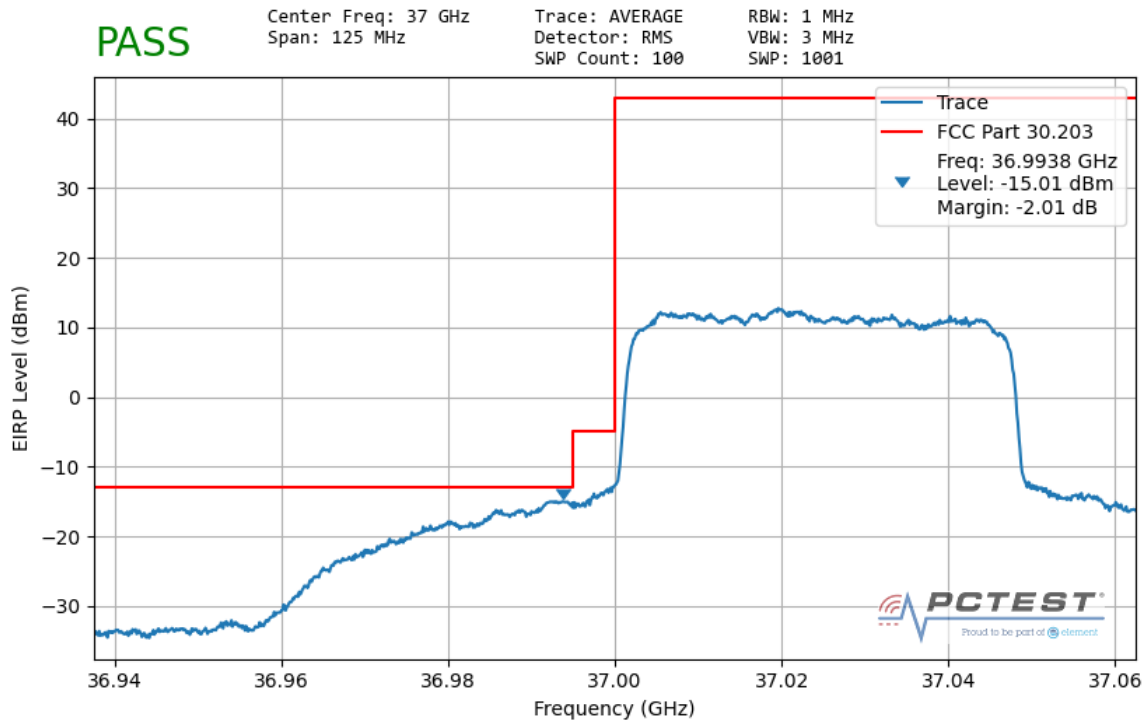


Plot 7-87. Ant 2 Lower Band Edge (50MHz-1CC – QPSK Full RB)

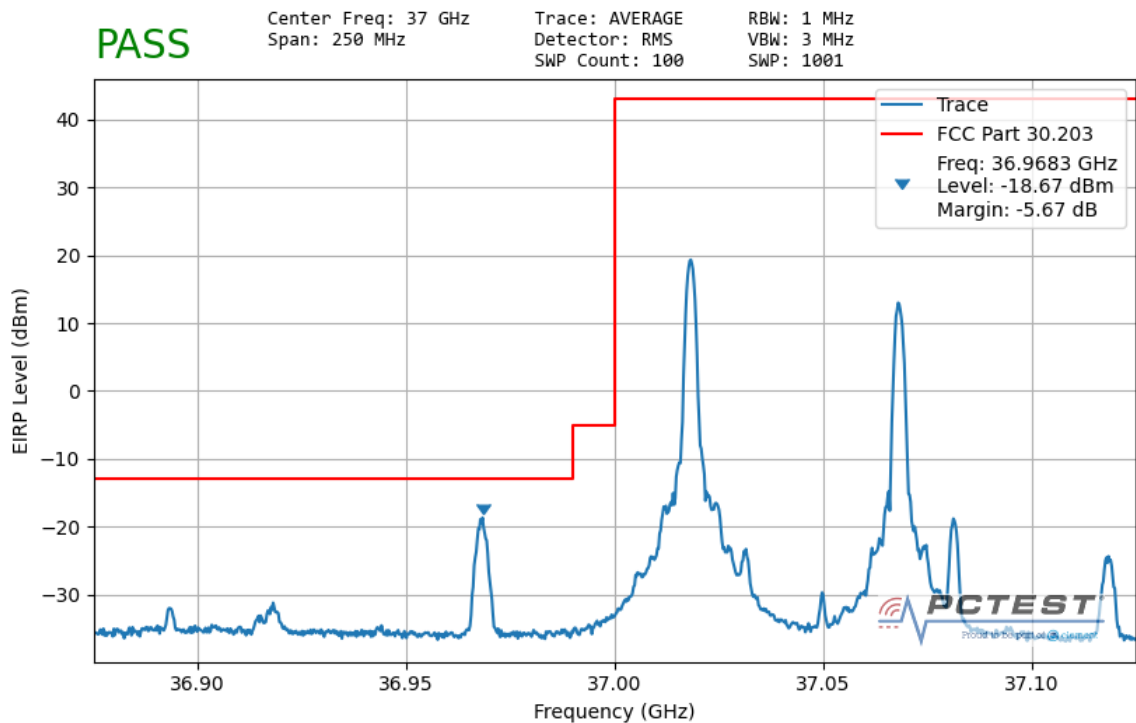


Plot 7-88. Ant 2 Lower Band Edge (50MHz-2CC – QPSK 1 RB)

FCC ID: A3LSMA426U	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1M2101040001-06-R1.A3L	Test Dates: 01/15/2021-02/24/2021	EUT Type: Portable Handset		Page 86 of 99

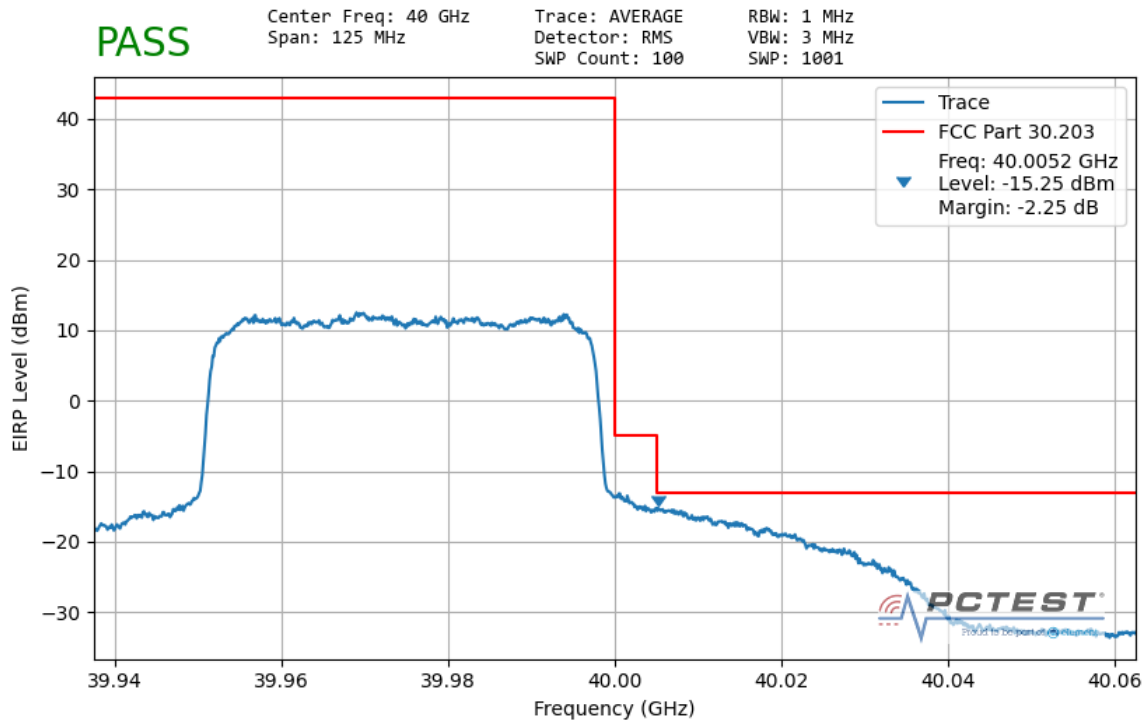


Plot 7-89. Ant 2 Upper Band Edge (50MHz-1CC – QPSK Full RB)

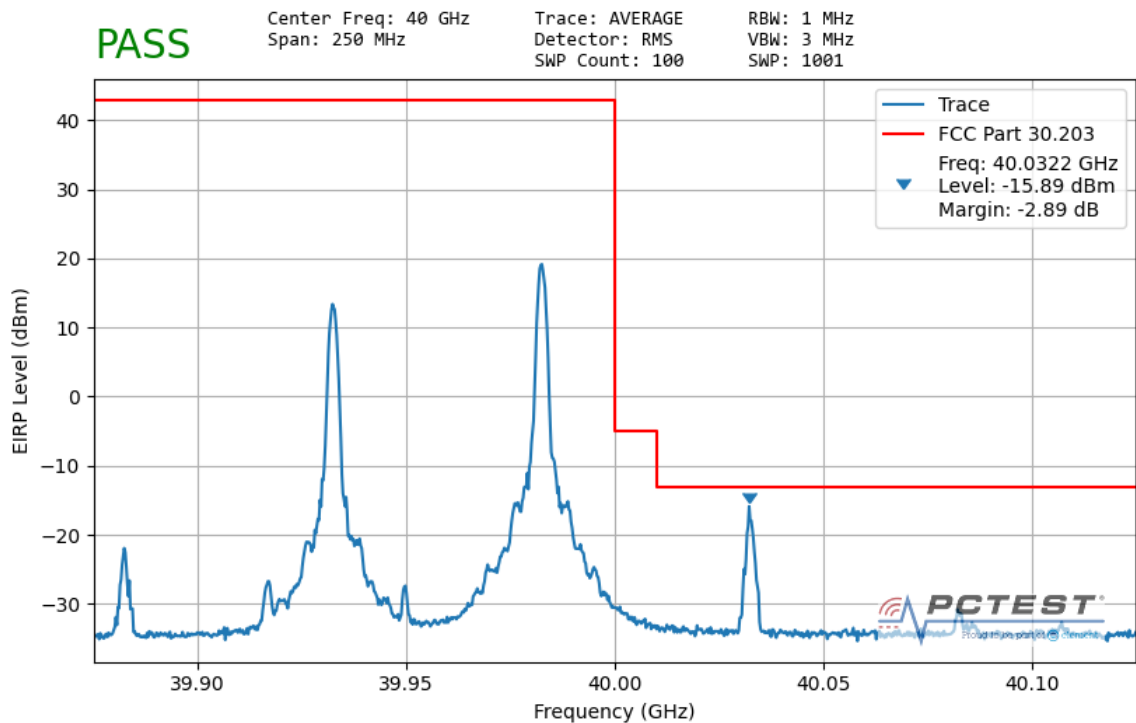


Plot 7-90. Ant 2 Upper Band Edge (50MHz-2CC – QPSK 1 RB)

FCC ID: A3LSMA426U	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1M2101040001-06-R1.A3L	Test Dates: 01/15/2021-02/24/2021	EUT Type: Portable Handset		Page 87 of 99

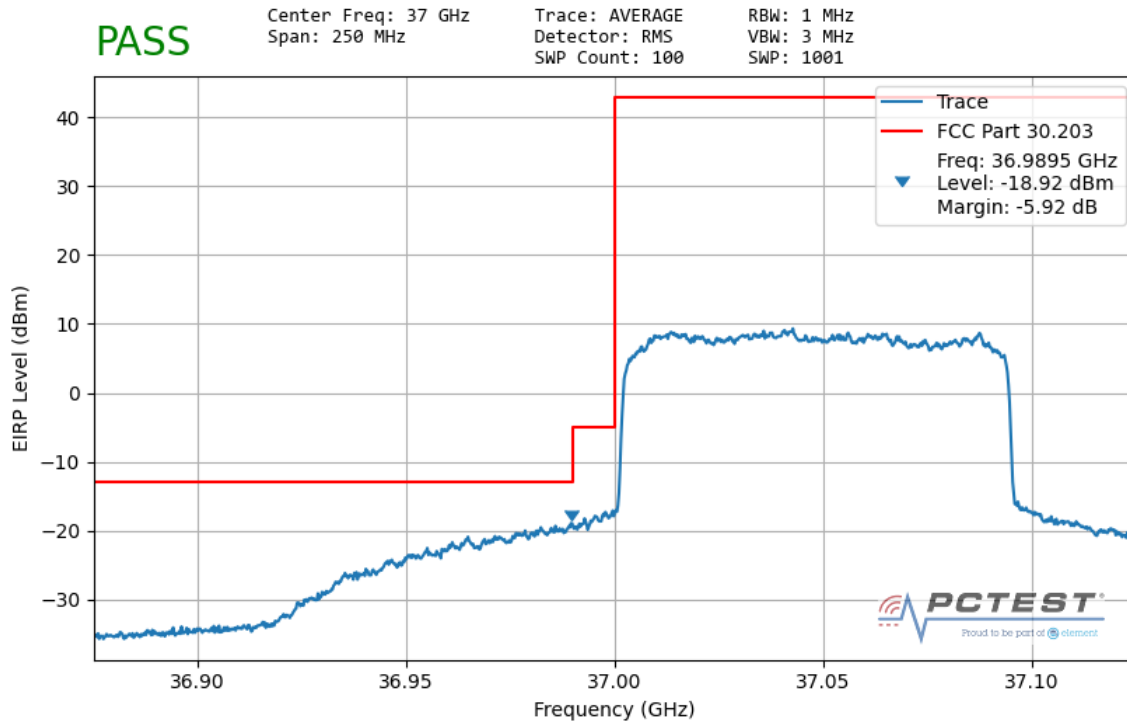


Plot 7-91. Ant 2 Lower Band Edge (100MHz-1CC – QPSK Full RB)

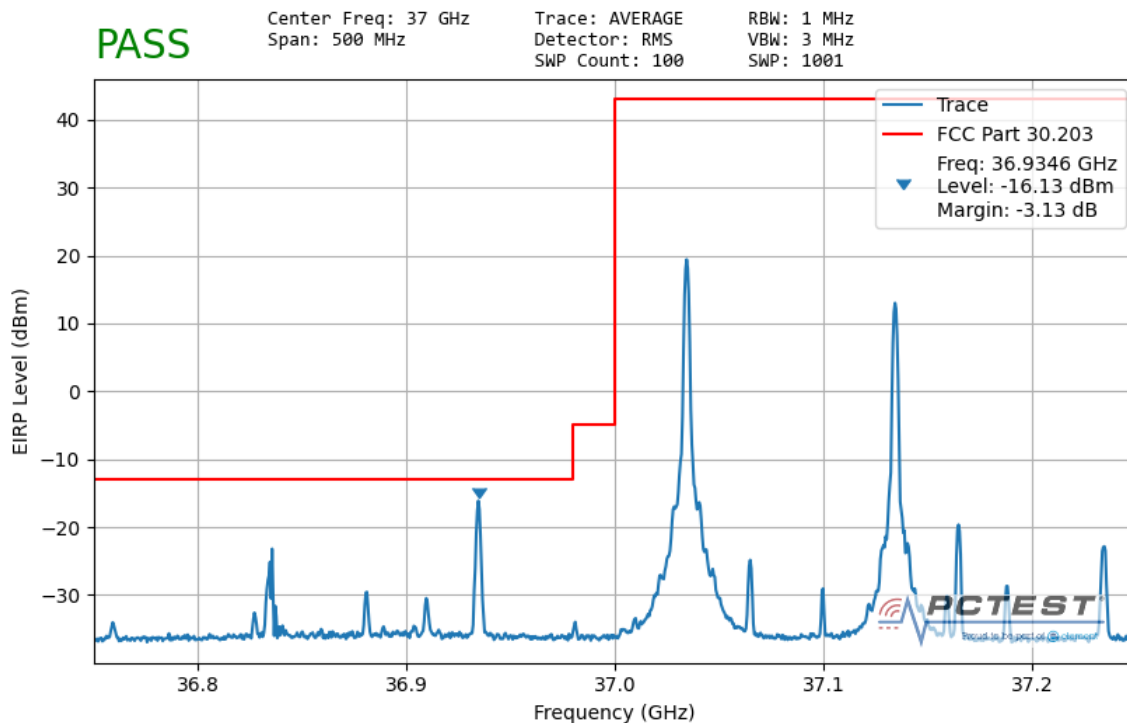


Plot 7-92. Ant 2 Lower Band Edge (100MHz-2CC – QPSK 1 RB)

FCC ID: A3LSMA426U	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1M2101040001-06-R1.A3L	Test Dates: 01/15/2021-02/24/2021	EUT Type: Portable Handset		Page 88 of 99

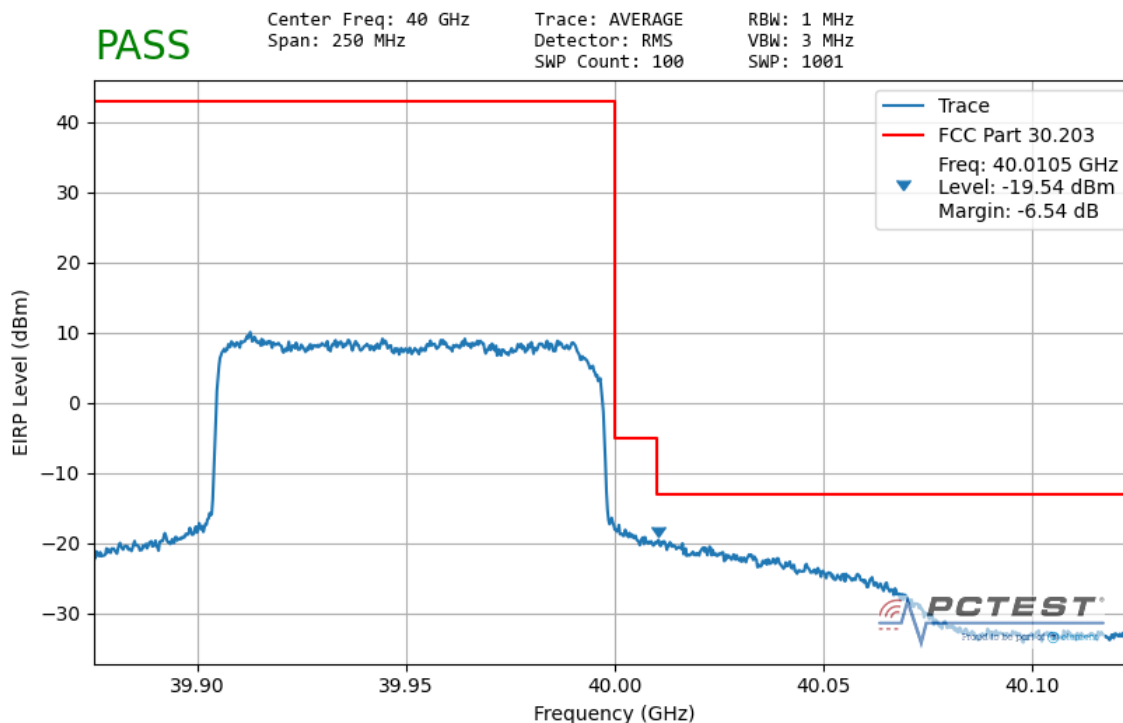

Plot 7-93. Ant 2 Upper Band Edge (100MHz-1CC – QPSK Full RB)

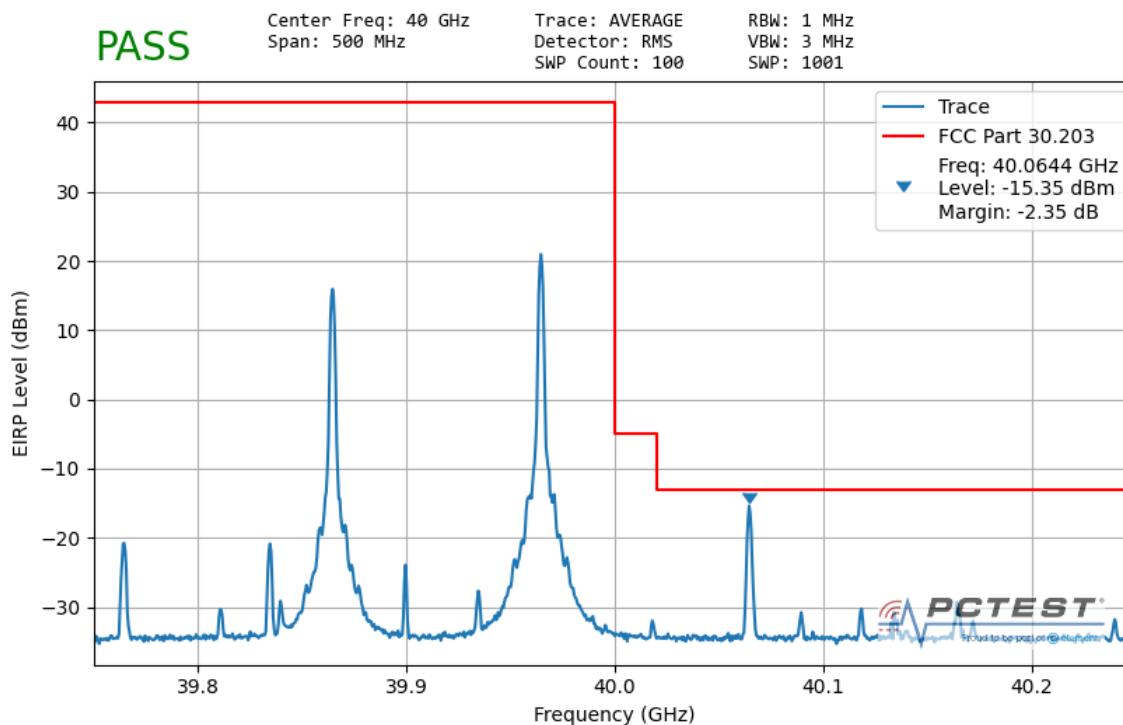

Plot 7-94. Ant 2 Upper Band Edge (100MHz-2CC – QPSK 1 RB)

FCC ID: A3LSMA426U	 Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2101040001-06-R1.A3L	Test Dates: 01/15/2021-02/24/2021	EUT Type: Portable Handset		Page 89 of 99

7.6 Frequency Stability / Temperature Variation

§2.1055

Test Overview and Limit

Frequency stability testing is performed in accordance with the guidelines of ANSI C63.26-2015. The frequency stability of the transmitter is measured by:

- a.) **Temperature:** The temperature is varied from -30°C to +50°C in 10°C increments using an environmental chamber.
- b.) **Primary Supply Voltage:** The primary supply voltage is varied from 85% to 115% of the nominal value for non hand-carried battery and AC powered equipment. For hand-carried, battery-powered equipment, primary supply voltage is reduced to the battery operating end point which shall be specified by the manufacturer.

Test Procedure Used

ANSI C63.5-2015 Section 5.6
KDB 842590 D01 v01r01 Section 4.5

Test Settings

1. The carrier frequency of the transmitter is measured at room temperature (20°C to provide a reference).
2. The equipment is turned on in a “standby” condition for fifteen minutes before applying power to the transmitter. Measurement of the carrier frequency of the transmitter is made within one minute after applying power to the transmitter.
3. Frequency measurements are made at 10°C intervals ranging from -30°C to +50°C. A period of at least one half-hour is provided to allow stabilization of the equipment at each temperature level.

Test Setup

The EUT was measured using horn antenna connected to a spectrum analyzer. The EUT was placed inside an environmental chamber. Using a foam plug, the horn antenna measured the frequency of the fundamental signal.

Test Notes

The Frequency Deviation column in the table below is the amount of deviation measured from the center frequency of the Reference measurement (first row).

FCC ID: A3LSMA426U	 PCTEST® Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2101040001-06-R1.A3L	Test Dates: 01/15/2021-02/24/2021	EUT Type: Portable Handset		Page 90 of 99

Frequency Stability Measurements (Band n261)

\$2.1055

OPERATING FREQUENCY: 27,924,960,000 Hz
CHANNEL: 2077915
REFERENCE VOLTAGE: 4.31 VDC

VOLTAGE (%)	POWER (VDC)	TEMP (°C)	FREQUENCY (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	4.31	+ 20 (Ref)	27,744,519,318	0	0.0000000
100 %		- 30	27,955,336,498	-210,817,180	-0.7549417
100 %		- 20	27,682,397,292	62,122,026	0.2224606
100 %		- 10	28,196,353,081	-451,833,763	-1.6180283
100 %		0	28,114,309,836	-369,790,518	-1.3242294
100 %		+ 10	27,989,806,398	-245,287,080	-0.8783793
100 %		+ 20	27,627,085,042	117,434,276	0.4205352
100 %		+ 30	27,640,717,639	103,801,679	0.3717165
100 %		+ 40	27,844,405,834	-99,886,516	-0.3576962
100 %		+ 50	28,100,868,938	-356,349,620	-1.2760972
BATT. ENDPOINT	3.51	+ 20	27,797,228,314	-52,708,996	-0.1887523

Table 7-55. Frequency Stability Data (n261)

Note:

Based on the results of the frequency stability test at the center channel the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency deviation noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

FCC ID: A3LSMA426U	 PCTEST Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2101040001-06-R1.A3L	Test Dates: 01/15/2021-02/24/2021	EUT Type: Portable Handset		Page 91 of 99

© 2021 PCTEST

All rights reserved. Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from PCTEST. If you have any questions about this international copyright or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact INFO@PCTEST.COM.

V1.0

Frequency Stability Measurements (Band n261)

\$2.1055

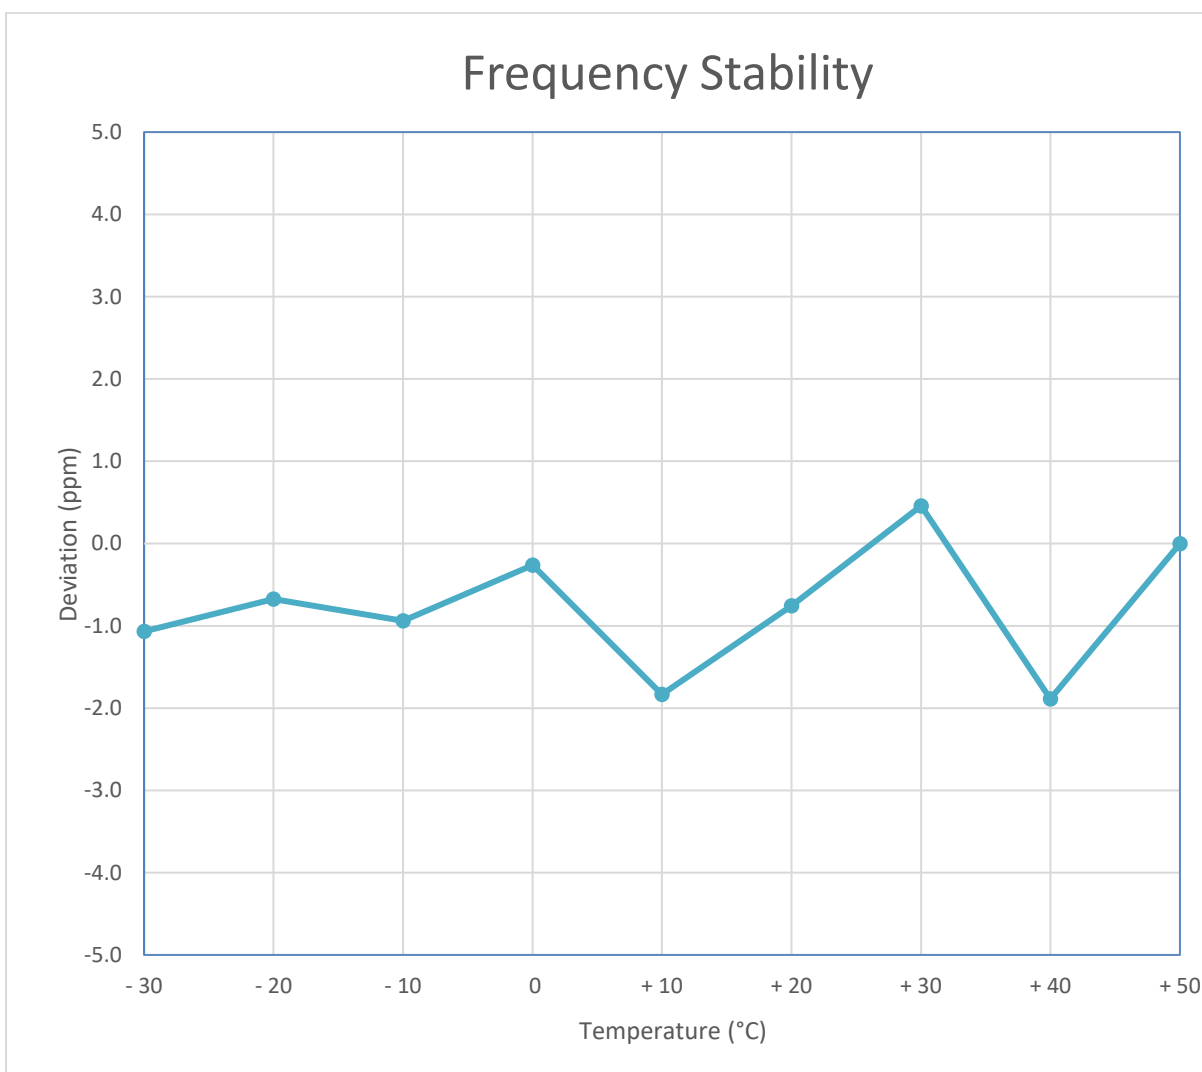


Figure 7-1. Frequency Stability Graph (n261)

FCC ID: A3LSMA426U	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1M2101040001-06-R1.A3L	Test Dates: 01/15/2021-02/24/2021	EUT Type: Portable Handset	Page 92 of 99	

Frequency Stability Measurements (Band n260)

\$2.1055

OPERATING FREQUENCY: 38,499,960,000 Hz
 CHANNEL: 2254165
 REFERENCE VOLTAGE: 4.31 VDC

VOLTAGE (%)	POWER (VDC)	TEMP (°C)	FREQUENCY (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	4.31	+ 20 (Ref)	38,323,272,366	0	0.0000000
100 %		- 30	38,490,019,937	-166,747,571	-0.4331110
100 %		- 20	38,624,873,995	-301,601,629	-0.7833817
100 %		- 10	38,314,343,932	8,928,434	0.0231908
100 %		0	38,280,557,945	42,714,421	0.1109467
100 %		+ 10	38,479,264,772	-155,992,406	-0.4051755
100 %		+ 20	38,388,428,301	-65,155,935	-0.1692364
100 %		+ 30	38,191,954,754	131,317,612	0.3410851
100 %		+ 40	38,194,281,608	128,990,758	0.3350413
100 %		+ 50	38,799,058,685	-475,786,319	-1.2358099
BATT. ENDPOINT	3.51	+ 20	38,697,326,784	-374,054,418	-0.9715709

Table 7-56. Frequency Stability Data (n260)

Note:

Based on the results of the frequency stability test at the center channel the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency deviation noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

FCC ID: A3LSMA426U	 PCTEST <small>Proud to be part of element</small>	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2101040001-06-R1.A3L	Test Dates: 01/15/2021-02/24/2021	EUT Type: Portable Handset		Page 93 of 99

Frequency Stability Measurements (Band n260)

§2.1055

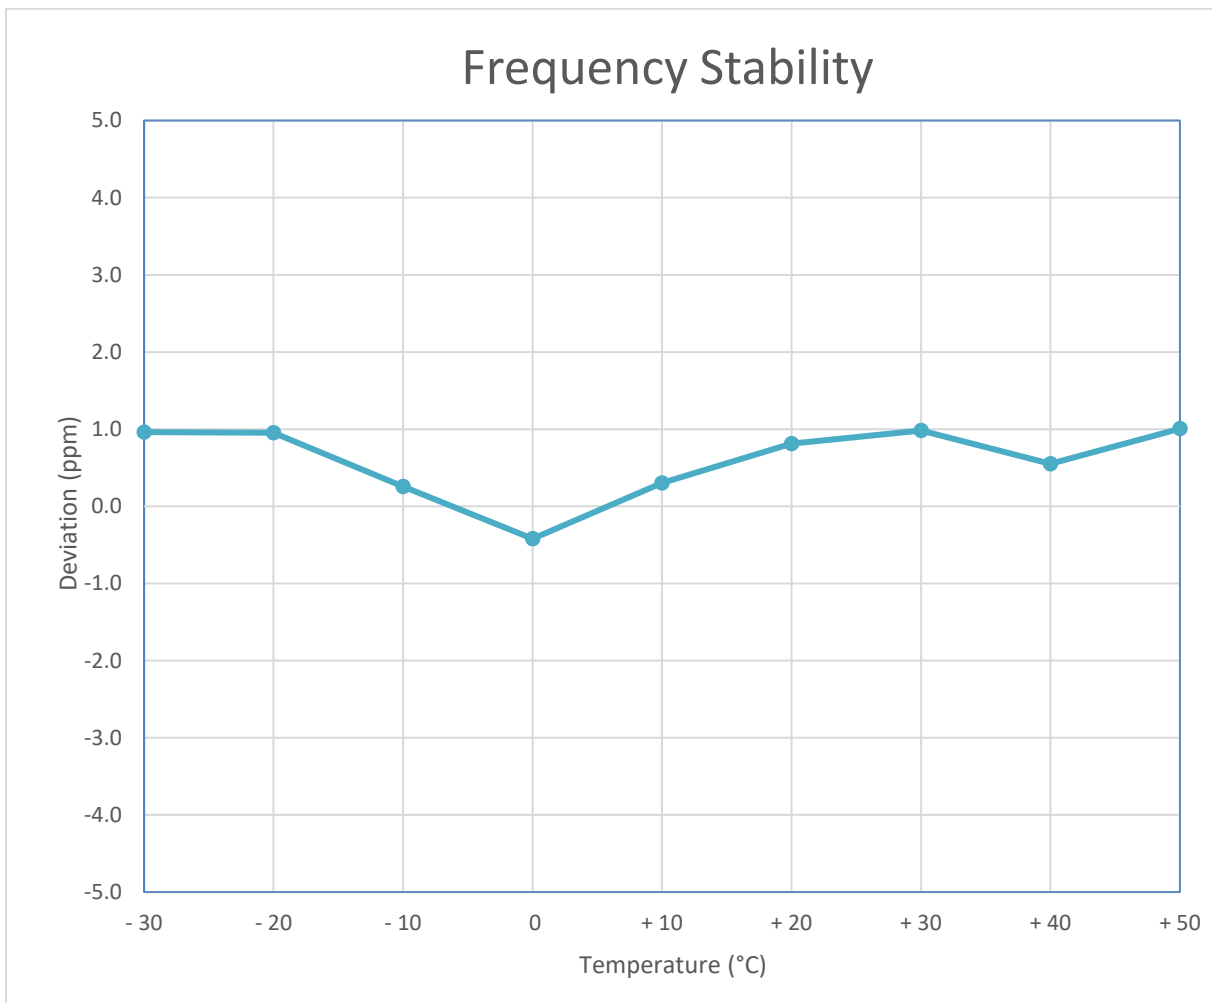


Figure 7-2. Frequency Stability Graph (n260)

FCC ID: A3LSMA426U	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1M2101040001-06-R1.A3L	Test Dates: 01/15/2021-02/24/2021	EUT Type: Portable Handset		Page 94 of 99

8.0 CONCLUSION

The data collected relate only to the item(s) tested and show that the **Samsung Portable Handset FCC ID: A3LSMA426U** complies with all the requirements of Part 30.

FCC ID: A3LSMA426U	 PCTEST [®] Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2101040001-06-R1.A3L	Test Dates: 01/15/2021-02/24/2021	EUT Type: Portable Handset		Page 95 of 99

9.0 APPENDIX A

9.1 VDI Mixer Verification Certificate



Virginia Diodes, Inc
979 2nd St. SE
Suite 309
Charlottesville, VA 22902
Phone: 434-297-3257
Fax: 434-297-3258

Certificate of Conformance

To: PCTEST Engineering Laboratory
7185 Oakland Mills Road
Columbia, MD 21046
United States


From: Virginia Diodes, Inc
979 2nd St. SE
Suite 309
Charlottesville, VA 22902

Packing List No: 202943
Shipping Date: 08/28/20

Today's Date: 08/28/20
PO Number: 200414.DP2

Quantity	Shipped	Unit	Description	Order-Job Number
1	EA	VDIWR19.0SAX-M-M4 WR19SAX-M-M4 / SN: SAX 679	20177A-01	

The VDI product(s) in this shipment meet(s) the guidelines for performance specifications established in accordance with the corresponding Purchase Order. Data presented in the User Guide, where applicable, has been obtained in accordance with VDI's Quality Management System. All instruments, used to obtain data, which require calibration have been calibrated with equipment traceable to the National Institute of Standards and Technology (NIST) and through NIST to the International System of Units (SI).


Authorized Signature
Virginia Diodes, Inc

Page 1 of 1

FCC ID: A3LSMA426U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2101040001-06-R1.A3L	Test Dates: 01/15/2021-02/24/2021	EUT Type: Portable Handset		Page 96 of 99



Virginia Diodes, Inc
979 2nd St. SE
Suite 309
Charlottesville, VA 22902
Phone: 434-297-3257
Fax: 434-297-3258

Certificate of Conformance

To: PCTEST Engineering Laboratory
7185 Oakland Mills Road
Columbia, MD 21046
United States

From: Virginia Diodes, Inc
979 2nd St. SE
Suite 309
Charlottesville, VA 22902

Packing List No: 202695
Shipping Date: 08/12/20

Today's Date: 08/14/20
PO Number: 200414.DP2

Quantity	Shipped	Unit	Description	Order-Job Number
1	EA	VDIWR12.0SAX-M-M6 S/N: SAX 680	20177B-01	

The VDI product(s) in this shipment meet(s) the guidelines for performance specifications established in accordance with the corresponding Purchase Order. Data presented in the User Guide, where applicable, has been obtained in accordance with VDI's Quality Management System. All instruments, used to obtain data, which require calibration have been calibrated with equipment traceable to the National Institute of Standards and Technology (NIST) and through NIST to the International System of Units (SI).

Authorized Signature
Virginia Diodes, Inc



Page 1 of 1

FCC ID: A3LSMA426U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2101040001-06-R1.A3L	Test Dates: 01/15/2021-02/24/2021	EUT Type: Portable Handset		Page 97 of 99



Virginia Diodes, Inc
979 2nd St. SE
Suite 309
Charlottesville, VA 22902
Phone: 434-297-3257
Fax: 434-297-3258

Certificate of Conformance

To: PCTEST Engineering Laboratory
7185 Oakland Mills Road
Columbia, MD 21046
United States


From: Virginia Diodes, Inc
979 2nd St. SE
Suite 309
Charlottesville, VA 22902

Packing List No: 203623
Shipping Date: 10/22/20

Today's Date: 10/22/20
PO Number: 200414.DP2

Quantity	Shipped	Unit	Description	Order-Job Number
1		EA	VDIWR8.0SAX-M-M9 S/N: SAX 681	20177C-01

The VDI product(s) in this shipment meet(s) the guidelines for performance specifications established in accordance with the corresponding Purchase Order. Data presented in the User Guide, where applicable, has been obtained in accordance with VDI's Quality Management System. All instruments, used to obtain data, which require calibration have been calibrated with equipment traceable to the National Institute of Standards and Technology (NIST) and through NIST to the International System of Units (SI).



 Authorized Signature
 Virginia Diodes, Inc

Page 1 of 1

FCC ID: A3LSMA426U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2101040001-06-R1.A3L	Test Dates: 01/15/2021-02/24/2021	EUT Type: Portable Handset		Page 98 of 99



Virginia Diodes, Inc
979 2nd St. SE
Suite 309
Charlottesville, VA 22902
Phone: 434-297-3257
Fax: 434-297-3258

Certificate of Conformance

To: PCTEST Engineering Laboratory
7185 Oakland Mills Road
Columbia, MD 21046
United States


From: Virginia Diodes, Inc
979 2nd St. SE
Suite 309
Charlottesville, VA 22902

Packing List No: 203281
Shipping Date: 09/24/20

Today's Date: 09/24/20
PO Number: 200414.DP2

Quantity	Shipped	Unit	Description	Order-Job Number
1	EA	VDIWR5.1SAX-M-M18	WR5.1SAX-M-M18 - Mini Spectrum Analyzer Extension Module; SN: SAX 682.	20177D-01

The VDI product(s) in this shipment meet(s) the guidelines for performance specifications established in accordance with the corresponding Purchase Order. Data presented in the User Guide, where applicable, has been obtained in accordance with VDI's Quality Management System. All instruments, used to obtain data, which require calibration have been calibrated with equipment traceable to the National Institute of Standards and Technology (NIST) and through NIST to the International System of Units (SI).


Authorized Signature
Virginia Diodes, Inc

Page 1 of 1

FCC ID: A3LSMA426U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2101040001-06-R1.A3L	Test Dates: 01/15/2021-02/24/2021	EUT Type: Portable Handset		Page 99 of 99