


Video collaboration bar EXPAND VISION 3T | EXPAND VISION 3 Model: EWBT1 with VISION-RC01T | VISION-RC01 Model SCBT24

Specifications | Technische Daten | Caractéristiques techniques | Specifiche | Especificaciones técnicas | Especificações | Technische specificaties | Προδιαγραφές | Specifikationer | Specifikationer | Tekniset tiedot | Specyfikacje | Технические характеристики | 技术参数 | 規格 | Özellikler | 仕様 | Spesifikasi | 기술 데이터

Video collaboration bar EXPAND VISION 3T | EXPAND VISION 3

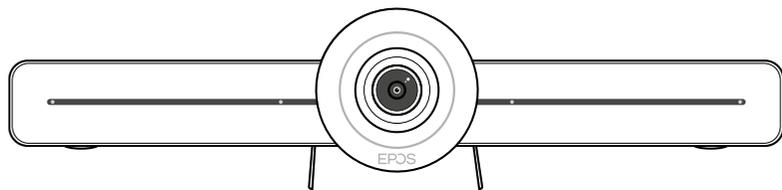

Dimensions (L x W x H)	283 x 70 x 62 mm / 11.14 x 2.76 x 2.44 in
Weight	620 g / 21.87 oz
Microphone type	Beamforming Digital MEMS Enhanced Omni microphones (4 microphones)
Microphone frequency response	150 – 7,500 Hz (USB / Bluetooth)
Connectors	HDMI socket, USB-A socket, USB-C® socket
Magnetic field strength	max 5.035 mT
Max. output power for EU compliance	Bluetooth: 9.97 dBm WiFi 2.4G: 19.59 dBm WiFi 5G*: 18.96 dBm
Frequency range	Bluetooth: 2402 – 2480 MHz WiFi 2.4G: 2412 – 2472 MHz for EU compliance WiFi 5G*: 5180 – 5240 MHz, 5260 – 5320 MHz, 5500 – 5700 MHz, 5745 – 5825 MHz
Bluetooth	version 5.0 / class 1
Range	up to 25 m (device dependent)

*Within all European Union countries, this device which operates at 5150 – 5350MHz is restricted to indoor use only.

Remote Controller VISION-RC 01T | VISION-RC 01




Dimensions (W x H x D)	22 x 16 x 6 mm / 0.87 x 0.63 x 0.24 in
Weight	2 g / 0.07 oz / 0.004 lbs
Range	up to 25 m (device dependent)
Bluetooth frequency range	2402 – 2480 MHz for EU compliance
Output power	max. 2.28 dBm
Power supply	2 x AAA Alkaline batteries

Trademarks

The Bluetooth® word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. and any use of such marks by DSEA A/S is under license. USB Type-C® and USB-C® are trademarks of USB Implementers Forum.

EXPAND SP 30T Bluetooth® speakerphone

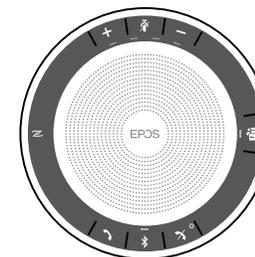

Dimensions (Ø x H)	120 x 37 mm / 4.72 x 1.47 in
Weight	314 g / 11.08 oz
Talk time	up to 18 hours
Charging time	approx. 3 h 20 min
Max. charging voltage	5 V / max. current 500 mA (computer) / 1300 mA (fast-charger)
Rechargeable battery (built-in)	Lithium Polymer / 3.7 V / 1110 mAh
Speaker type	Dynamic, neodymium magnet
Speaker frequency response	Communication mode (USB / Bluetooth) 150 – 7,500 Hz Music mode (USB / Bluetooth) 100 – 20,000 Hz
Microphone type	Digital MEMS
Microphone frequency response	150 – 7,500 Hz (USB / Bluetooth)
Connector	USB-C® plug
Bluetooth	version 5.0 / class 1
Range	up to 25 m (device dependent)
Output power	max. 10.6 dBm (EIRP)

Power supply unit EA 1019AVRS-050

Nominal input voltage	100 – 240 VAC
Nominal input current	max. 0.8 A
Mains frequency	50 – 60 Hz
Nominal output voltage	5.0 VDC
Nominal output current	3.0 A
Weight	approx. 126 g / 4.45 oz

General data

Temperature range	Operation: 0 °C to +40 °C / +32 °F to +104 °F Storage: -20 °C to +70 °C / -4 °F to +158 °F
Relative humidity	Operation: 10 to 80% Storage: 10 to 95%

In compliance with:

	EXPAND VISION 3T EXPAND VISION 3 (EWBT1)	VISION-RC 01T VISION-RC01 (SCBT24)	SP 30T (SCBT9)
USA	FCC ID: R3UEWBT1	FCC ID: R3USCBT24	FCC ID: R3USCBT9
Canada	IC: 2099D-EWBT1 CAN ICES-3(B)/NMB-3(B)	IC: 2099D-SCBT24	IC: 2099D-SCBT9 CAN ICES-3(B)/NMB-3(B)
Europe			
United Kingdom			
Australia/ New Zealand			
Singapore	<div style="border: 1px solid black; padding: 2px; display: inline-block;">Complies with IMDA Standards DA108496</div>		

Statements regarding FCC and Industry Canada

This device complies with Part 15 of the FCC rules and with Industry Canada license-exempt RSS standard(s). Operation is subjected to the following two conditions:

- 1) This device may not cause harmful interference, and
- 2) this device must accept any interference received, including interference that may cause undesired operation.

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation.

If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Caution: Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance 20 cm between the radiator and your body. This transmitter must not be co-located or operating in conjunction with any other antenna or transmitter.

The device for operation in the band 5150-5250 MHz is only for indoor use to reduce the potential for harmful interference to co-channel mobile satellite systems.

RF Radiation Exposure Information

The device complies with FCC and Innovation, Science and Economic Development Canada's RF radiation exposure limits set forth for uncontrolled environment. The product should be installed and operated with minimum distance of 20 cm between the radiator and your body. Use of other accessories not verified by the manufacturer may not ensure compliance with FCC and Innovation, Science and Economic Development Canada's RF exposure guidelines.

Further RF exposure reduction can be achieved if the product can be kept as far as possible from the user body or set the device to lower output power if such function is available.

The transmitters must not be co-located or operated in conjunction with any other antenna or transmitter.

L'émetteur/récepteur exempt de licence contenu dans le présent appareil est conforme aux CNR d'Innovation, Sciences et Développement économique Canada applicables aux appareils radio exempts de licence. L'exploitation est autorisée aux deux conditions suivantes :

- 1) L'appareil ne doit pas produire de brouillage;
- 2) L'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement.

Cet équipement est conforme aux limites d'exposition aux radiations IC CNR-102 établies pour un environnement non contrôlé. Cet équipement doit être installé et utilisé avec une distance minimale de 20 cm entre le radiateur et votre corps.

Le dispositif utilisé dans la bande 5150-5250 MHz est réservé à une utilisation en intérieur afin de réduire le risque de brouillage préjudiciable aux systèmes mobiles par satellite dans le même canal.

Information sur l'exposition aux radiofréquences

Cet équipement est conforme aux limites d'exposition aux rayonnements d'Innovation, Sciences et Développement économique Canada établies pour un environnement contrôlé / non contrôlé. Cette station de base/dongle doit être installé et utilisé avec un minimum de 20 cm de distance entre la source de rayonnement et votre corps.

L'utilisation d'autres accessoires non homologués par le fabricant remet en cause la conformité des normes imposées par la d'Innovation, Sciences et Développement économique Canada.

Une réduction supplémentaire de l'exposition aux RF peut être obtenue si le produit peut être maintenu aussi loin que possible du corps de l'utilisateur ou si l'appareil est réglé sur une puissance de sortie inférieure, si cette fonction est disponible.

Les transmetteurs ne doit pas être place au meme endroit ou utilise simultanement avec un autre transmetteur ou antenne.

Responsible party

Demant Sound USA, Inc.
Little Falls Drive, Wilmington 19800, New Castle, USA
Tel: +1 800-332-7439