

FCC RF Test Report

APPLICANT	:	TCL Communication Ltd.
EQUIPMENT	:	GSM/UMTS/LTE Mobile phone
BRAND NAME	:	TCL
MODEL NAME	:	T434D
FCC ID	:	2ACCJH180
STANDARD	:	FCC Part 15 Subpart C §15.247
CLASSIFICATION	:	(DTS) Digital Transmission System
TEST DATE(S)	:	Oct. 19, 2023 ~ Nov. 03, 2023

We, Sporton International Inc. (Shenzhen), would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

This report contains data that were produced under subcontract by Sporton International Inc. (Kunshan)

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. (Shenzhen), the test report shall not be reproduced except in full.

JasonJia

Approved by: Jason Jia



Sporton International Inc. (ShenZhen) 1/F, 2/F, Bldg 5, Shiling Industrial Zone, Xinwei Village, Xili, Nanshan, Shenzhen, 518055 People's Republic of China



TABLE OF CONTENTS

RE	/ISIO	N HISTORY	.3
SUI	MMAR	Y OF TEST RESULT	.4
1	GENE	ERAL DESCRIPTION	.5
	1.1	Applicant	.5
	1.2	Manufacturer	.5
	1.3	Product Feature of Equipment Under Test	.5
	1.4	Product Specification of Equipment Under Test	.5
	1.5	Modification of EUT	.6
	1.6	Testing Location	.6
	1.7	Test Software	.7
	1.8	Applicable Standards	.7
2	TEST	CONFIGURATION OF EQUIPMENT UNDER TEST	.8
	2.1	Carrier Frequency Channel	.8
	2.2	Test Mode	.9
	2.3	Connection Diagram of Test System	10
	2.4	Support Unit used in test configuration and system	11
	2.5	EUT Operation Test Setup	11
	2.6	Measurement Results Explanation Example	11
3	TEST	RESULT	12
	3.1	6dB and 99% Bandwidth Measurement	12
	3.2	Output Power Measurement	13
	3.3	Power Spectral Density Measurement	14
	3.4	Conducted Band Edges and Spurious Emission Measurement	15
	3.5	Radiated Band Edges and Spurious Emission Measurement	16
	3.6	AC Conducted Emission Measurement	20
	3.7	Antenna Requirements	22
4	LIST	OF MEASURING EQUIPMENT	23
5	MEAS	SUREMENT UNCERTAINTY	24
API	PENDI	X A. CONDUCTED TEST RESULTS	
API	PENDI	X B. AC CONDUCTED EMISSION TEST RESULT	
API	PENDI	X C. RADIATED SPURIOUS EMISSION	
API	PEND	X D. DUTY CYCLE PLOTS	

APPENDIX E. SETUP PHOTOGRAPHS



REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FR3O1004B	Rev. 01	Initial issue of report	Nov. 22, 2023



SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.1	15.247(a)(2)	6dB Bandwidth	≥ 0.5MHz	Pass	-
3.1	-	99% Bandwidth	-	Report only	-
3.2	15.247(b)(3)	Peak Output Power	≤ 30dBm	Pass	
3.3	15.247(e)	Power Spectral Density	≤ 8dBm/3kHz	Pass	-
3.4	15.247(d)	Conducted Band Edges and Spurious Emission	≤ 20dBc	Pass	-
3.5	15.247(d)	Radiated Band Edges and Spurious Emission	15.209(a) & 15.247(d)	Pass	Under limit 4.48 dB at 30.00 MHz
3.6	15.207	AC Conducted Emission	15.207(a)	Pass	Under limit 11.17 dB at 0.55 MHz
3.7	15.203 & 15.247(b)	Antenna Requirement	15.203 & 15.247(b)	Pass	-

Conformity Assessment Condition:

 The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacturer who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.

2. The measurement uncertainty please refer to each test result in the section "Measurement Uncertainty"

Disclaimer:

The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.



1 General Description

1.1 Applicant

TCL Communication Ltd.

5/F, Building 22E, 22 Science Park East Avenue, Hong Kong Science Park, Shatin, NT, Hong Kong

1.2 Manufacturer

TCL Communication Ltd.

5/F, Building 22E, 22 Science Park East Avenue, Hong Kong Science Park, Shatin, NT, Hong Kong

1.3 Product Feature of Equipment Under Test


Product Feature		
Equipment GSM/UMTS/LTE Mobile phone		
Brand Name	TCL	
Model Name	T434D	
FCC ID	2ACCJH180	
IMEI Code	Conducted: 016500000012634 Conduction: 016500000013301 Radiation: 016500000013442	
HW Version	02	
SW Version	6XS9	
EUT Stage	T Stage Identical Prototype	

Remark: The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

1.4 Product Specification of Equipment Under Test

Standards-related Product Specification		
Tx/Rx Frequency Range2402 MHz ~ 2480 MHz		
Number of Channels	40	
Carrier Frequency of Each Channel	40 Channel (37 hopping + 3 advertising channel)	
Maximum Output Dower to Antonno	BLE 1Mbps: 0.92 dBm (0.0012 W)	
Maximum Output Power to Antenna	BLE 2Mbps: 0.83 dBm (0.0012 W)	
99% Occupied Bandwidth	BLE 1Mbps: 1.027 MHz	
99% Occupied Baildwidth	BLE 2Mbps: 2.050 MHz	
Antenna Type / Gain	FPC Antenna type with gain -0.35 dBi	
Type of Modulation Bluetooth LE : GFSK		

Note: BLE 2Mbps does not support three primary advertising channels (CH00/CH12/CH39).





1.5 Modification of EUT

No modifications are made to the EUT during all test items.

1.6 Testing Location

Sporton International Inc. (Kunshan) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.02.

Test Firm	Sporton International Inc. (Kunshan)			
	No. 1098, Pengxi North Road, Kunshan Economic Development Zone			
Test Site Location	Jiangsu Province 215300 People's Republic of China			
TEL : +86-512-57900158				
	Sporton Site No.	FCC Designation No.	FCC Test Firm	
Test Site No.	Sporton Sile No.	FCC Designation No.	Registration No.	
	TH01-KS	CN1257	314309	

Note: Test data subcontracted: conducted test case in this report.

Sporton International Inc. (ShenZhen) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.01.

Test Firm	Sporton International Inc. (ShenZhen)				
Test Site Location	1/F, 2/F, Bldg 5, Shiling Industrial Zone, Xinwei Village, Xili, Nanshan, Shenzhen, 518055 People's Republic of China TEL: +86-755-86379589 FAX: +86-755-86379595				
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.		
	CO01-SZ CN1256 421272		421272		
Test Firm	Sporton International Inc. (ShenZhen)				
Test Site Location	101, 1st Floor, Block B, Building 1, No. 2, Tengfeng 4th Road, Fenghuang Community, Fuyong Street, Baoan District, Shenzhen City, Guangdong Province 518103 People's Republic of China TEL: +86-755-86066985				
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.		
	03CH04-SZ	CN1256	421272		



1.7 Test Software

ltem	Site	Manufacturer	Name	Version
1.	TH01-KS	Tonscend	JS1120-3 test system China_210602	3.3.10
2.	03CH04-SZ	AUDIX	E3	6.2009-8-24
3.	CO01-SZ	AUDIX	E3	6.120613b

1.8 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- 47 CFR Part 15 Subpart C §15.247
- FCC KDB 558074 D01 15.247 Meas Guidance v05r02
- ANSI C63.10-2013

Remark:

- 1. All test items were verified and recorded according to the standards and without any deviation during the test.
- 2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.



2 Test Configuration of Equipment Under Test

2.1 Carrier Frequency Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
	0	2402	21	2444
	1	2404	22	2446
	2	2406	23	2448
	3	2408	24	2450
	4	2410	25	2452
	5	2412	26	2454
	6	2414	27	2456
	7	2416	28	2458
	8	2418	29	2460
	9	2420	30	2462
2400-2483.5 MHz	10	2422	31	2464
	11	2424	32	2466
	12	2426	33	2468
	13	2428	34	2470
	14	2430	35	2472
	15	2432	36	2474
	16	2434	37	2476
	17	2436	38	2478
	18	2438	39	2480
	19	2440	-	-
	20	2442	-	-



2.2 Test Mode

- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (Y plane) were recorded in this report.
- b. AC power line Conducted Emission was tested under maximum output power.

The fellowing even and	the black of the strike is	منام مام معر بنم منا الم ا	a damaanatrata in aan	npliance with the standard.
The following summary	/ table is showing	1 all test modes to) demonstrate in con	nollance with the standard
The following cultural		y un toot mouoo tt		

	Summary table of Test Cases			
Test Item	Data Rate / Modulation			
Test item	Bluetooth – LE / GFSK			
	Mode 1: Bluetooth Tx CH00_2402 MHz_BLE 1Mbps			
	Mode 2: Bluetooth Tx CH19_2440 MHz_BLE 1Mbps			
Conducted	Mode 3: Bluetooth Tx CH39_2480 MHz_BLE 1Mbps			
TCs	Mode 4: Bluetooth Tx CH01_2404 MHz_BLE 2Mbps			
	Mode 5: Bluetooth Tx CH19_2440 MHz_BLE 2Mbps			
	Mode 6: Bluetooth Tx CH38_2478 MHz_BLE 2Mbps			
	Mode 1: Bluetooth Tx CH00_2402 MHz_BLE 1Mbps			
	Mode 2: Bluetooth Tx CH19_2440 MHz_BLE 1Mbps			
Radiated	Mode 3: Bluetooth Tx CH39_2480 MHz_BLE 1Mbps			
TCs	Mode 4: Bluetooth Tx CH01_2404 MHz_BLE 2Mbps			
	Mode 5: Bluetooth Tx CH19_2440 MHz_BLE 2Mbps			
	Mode 6: Bluetooth Tx CH38_2478 MHz_BLE 2Mbps			
AC				
Conducted	Mode 1: GSM 850 Idle + Bluetooth Link + Adapter 2 + USB Cable 2 + Battery 1 + Earphone			
Emission				
Remark: For F	Radiated Test Cases, The tests were performance with Adapter1 , Earphone and USB Cable1			

RSE Co-location


Bluetooth LE(2 Mbps) CH38_TX + LTE Band 41 link






2.3 Connection Diagram of Test System

AC Conducted Emission:

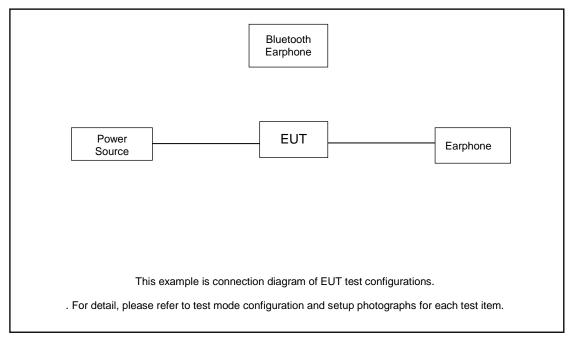

Radiated Emission:

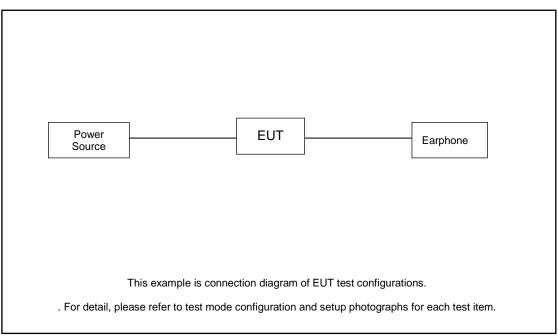



2.4	Support	Unit us	ed in tes	t configuration	and system
-----	---------	---------	-----------	-----------------	------------

ltem	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	Base Station(LTE)	Anritsu	MT8820C	N/A	N/A	Unshielded,1.8m
2.	Earphone	apple	DCAY1V-A900FZJW3-000	N/A	N/A	N/A
1.4	Bluetooth Earphone	Samsung	EO-MG900	PYAHS-107W	N/A	N/A
4.	WLAN AP	Dlink	DIR-820L	KA2IR820LA1	N/A	Unshielded,1.8m

2.5 EUT Operation Test Setup

For BLE function, the engineering test program was provided and enabled to make EUT continuous transmit.

For AC power line conducted emissions, the EUT was set to connect with the WLAN AP under large package sizes transmission.

2.6 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example :

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 1.86 dB and 10dB attenuator.

Offset(dB) = RF cable loss(dB) + attenuator factor(dB).

= 1.86 + 10 = 11.86 (dB)



3 Test Result

3.1 6dB and 99% Bandwidth Measurement

3.1.1 Limit of 6dB and 99% Bandwidth

The minimum 6 dB bandwidth shall be at least 500 kHz.


3.1.2 Measuring Instruments

The section 4.0 of List of Measuring Equipment of this test report is used for test.

3.1.3 Test Procedures

- 1. The testing follows ANSI C63.10-2013 clause 11.8
- 2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
- 3. Set to the maximum power setting and enable the EUT transmit continuously.
- Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. Set the Video bandwidth (VBW) = 300 kHz. In order to make an accurate measurement. The 6 dB bandwidth must be greater than 500 kHz.
- For 99% Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) is set 1% to 5% of the 99% OBW and the VBW is set to 3 times of the RBW.
- 6. Measure and record the results in the test report.

3.1.4 Test Setup



Spectrum Analyzer

3.1.5 Test Result of 6dB Bandwidth

Please refer to Appendix A.

3.1.6 Test Result of 99% Occupied Bandwidth



3.2 Output Power Measurement

3.2.1 Limit of Output Power

For systems using digital modulation in the 2400-2483.5MHz, the limit for peak output power is 30dBm. If transmitting antenna of directional gain greater than 6dBi is used, the peak output power from the intentional radiator shall be reduced below the above stated value by the amount in dB that the directional gain of the antenna exceeds 6 dBi. In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6 dBi.


3.2.2 Measuring Instruments

The section 4.0 of List of Measuring Equipment of this test report is used for test.

3.2.3 Test Procedures

- The testing follows the Measurement Procedure of ANSI C63.10-2013 clause 11.9.1.3 PKPM1 Peak power meter or ANSI C63.10-2013 clause 11.9.2.3.1 Method AVGPM method.
- 2. The RF output of EUT was connected to the power meter by RF cable and attenuator. The path loss was compensated to the results for each measurement.
- 3. Set to the maximum power setting and enable the EUT transmit continuously.
- 4. Measure the conducted output power and record the results in the test report.

3.2.4 Test Setup



3.2.5 Test Result of Peak Output Power



3.3 Power Spectral Density Measurement

3.3.1 Limit of Power Spectral Density

The peak power spectral density shall not be greater than 8dBm in any 3kHz band at any time interval of continuous transmission.


3.3.2 Measuring Instruments

The section 4.0 of List of Measuring Equipment of this test report is used for test.

3.3.3 Test Procedures

- 1. The testing follows Measurement Procedure of ANSI C63.10-2013 clause 11.10.2 Method PKPSD.
- 2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
- 3. Set to the maximum power setting and enable the EUT transmit continuously.
- Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 3 kHz.
 Video bandwidth VBW = 10 kHz In order to make an accurate measurement, set the span to 1.5 times DTS Channel Bandwidth. (6dB BW)
- 5. Detector = peak, Sweep time = auto couple, Trace mode = max hold, Allow trace to fully stabilize. Use the peak marker function to determine the maximum power level.
- 6. Measure and record the results in the test report.
- 7. The Measured power density (dBm)/ 100kHz is a reference level and used as 20dBc down limit line for Conducted Band Edges and Conducted Spurious Emission.

3.3.4 Test Setup



3.3.5 Test Result of Power Spectral Density



3.4 Conducted Band Edges and Spurious Emission Measurement

3.4.1 Limit of Conducted Band Edges and Spurious Emission

All harmonics/spurious must be at least 20 dB down from the highest emission level within the authorized band.


3.4.2 Measuring Instruments

The section 4.0 of List of Measuring Equipment of this test report is used for test.

3.4.3 Test Procedure

- 1. The testing follows ANSI C63.10-2013 clause 11.13
- 2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
- 3. Set to the maximum power setting and enable the EUT transmit continuously.
- 4. Set RBW = 100 kHz, VBW=300 kHz, Peak Detector. Unwanted Emissions measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz when maximum peak conducted output power procedure is used. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.
- 5. Measure and record the results in the test report.
- 6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

3.4.4 Test Setup



3.4.5 Test Result of Conducted Band Edges Plots

Please refer to Appendix A.

3.4.6 Test Result of Conducted Spurious Emission Plots



3.5 Radiated Band Edges and Spurious Emission Measurement

3.5.1 Limit of Radiated Band Edges and Spurious Emission

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. If the output power of this device was measured by spectrum analyzer, the attenuation under this paragraph shall be 30 dB instead of 20 dB. In addition, radiated emissions which fall in the restricted bands must also comply with the limits as below.

Frequency	Field Strength	Measurement Distance	
(MHz)	(microvolts/meter)	(meters)	
0.009 - 0.490	2400/F(kHz)	300	
0.490 – 1.705	24000/F(kHz)	30	
1.705 – 30.0	30	30	
30 – 88	100	3	
88 – 216	150	3	
216 - 960	200	3	
Above 960	500	3	

3.5.2 Measuring Instruments

The section 4.0 of List of Measuring Equipment of this test report is used for test.




3.5.3 Test Procedures


- 1. The testing follows ANSI C63.10-2013 clause 11.11 & 11.12
- 2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level.
- 3. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
- 4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
- 5. Corrected Reading: Antenna Factor + Cable Loss + Read Level Preamp Factor = Level
- 6. For testing below 1GHz, if the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then peak values of EUT will be reported, otherwise, the emissions will be repeated one by one using the CISPR quasi-peak method and reported.
- 7. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than peak limit (that means the emission level in average mode also complies with the limit in average mode), then peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
- 8. Use the following spectrum analyzer settings:
 - (1) Span shall wide enough to fully capture the emission being measured;
 - (2) Set RBW=100 kHz for f < 1 GHz; VBW ≥ RBW; Sweep = auto; Detector function = peak; Trace = max hold;
 - (3) Set RBW = 1 MHz, VBW= 3MHz for $f \ge 1$ GHz for peak measurement. For average measurement:
 - VBW = 10 Hz, when duty cycle is no less than 98 percent.
 - VBW ≥ 1/T, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.



3.5.4 Test Setup

For radiated emissions below 30MHz

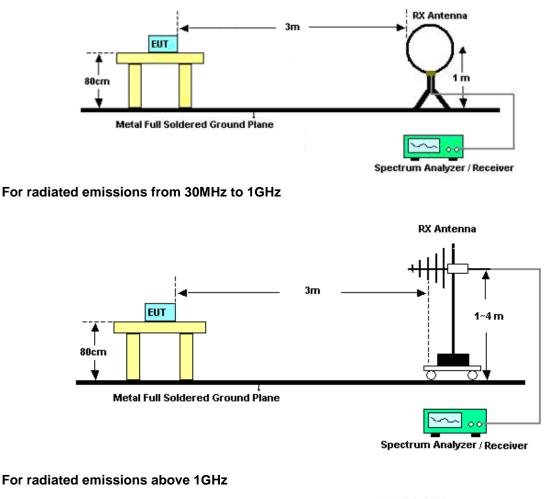

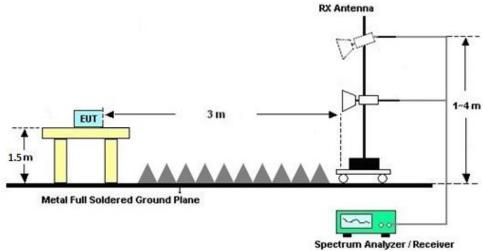

Sporton International Inc. (ShenZhen) TEL : +86-755-8637-9589 FAX : +86-755-8637-9595 FCC ID: 2ACCJH180



3.5.5 Test Results of Radiated Spurious Emissions (9 kHz ~ 30 MHz)

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is a comparison data of both open-field test site and semi-Anechoic chamber, and the result came out very similar.

3.5.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix C.

3.5.7 Duty Cycle

Please refer to Appendix D.

3.5.8 Test Result of Radiated Spurious Emission (30MHz ~ 10th Harmonic or 40GHz, whichever is lower)



3.6 AC Conducted Emission Measurement

3.6.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dBµV)		
Frequency of emission (MHZ)	Quasi-peak	Average	
0.15-0.5	66 to 56*	56 to 46*	
0.5-5	56	46	
5-30	60	50	

*Decreases with the logarithm of the frequency.

3.6.2 Measuring Instruments


The section 4.0 of List of Measuring Equipment of this test report is used for test.

3.6.3 Test Procedures

- 1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
- 2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
- 3. All the support units are connecting to the other LISN.
- 4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
- 5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
- 6. Both sides of AC line were checked for maximum conducted interference.
- 7. The frequency range from 150 kHz to 30 MHz was searched.
- Set the test-receiver system to Peak Detect Function and specified bandwidth (IF Bandwidth = 9kHz) with Maximum Hold Mode. Then measurement is also conducted by Average Detector and Quasi-Peak Detector Function respectively.



3.6.4 Test Setup

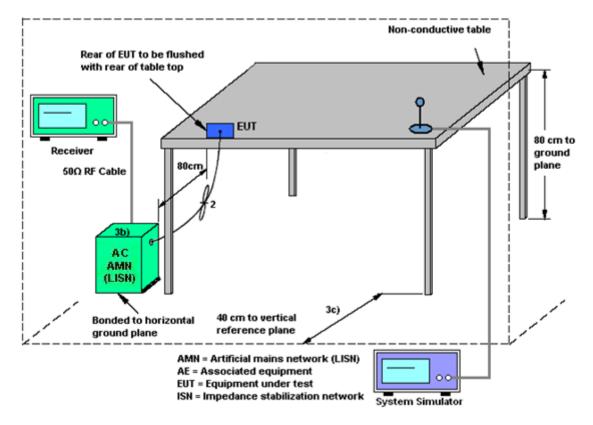

3.6.5 Test Result of AC Conducted Emission



3.7 Antenna Requirements

3.7.1 Standard Applicable

If directional gain of transmitting antennas is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the rule.

3.7.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.

3.7.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.



4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV40	101040	10Hz~40GHz	Oct. 11, 2023	Oct. 24, 2023	Oct. 10, 2024	Conducted (TH01-KS)
Pulse Power Senor	Anritsu	MA2411B	0917070	300MHz~40GH z	Jan. 05, 2023	Oct. 24, 2023	Jan. 04, 2024	Conducted (TH01-KS)
Power Meter	Anritsu	ML2495A	1005002	50MHz Bandwidth	Jan. 05, 2023	Oct. 24, 2023	Jan. 04, 2024	Conducted (TH01-KS)
EMI Receiver	R&S	ESR7	101630	9kHz~7GHz;	Jul. 06, 2023	Oct. 30, 2023	Jul. 05, 2024	Conduction (CO01-SZ)
AC LISN	R&S	ENV216	100063	9kHz~30MHz	Aug. 21, 2023	Oct. 30, 2023	Aug. 20, 2024	Conduction (CO01-SZ)
AC LISN (for auxiliary equipment)	EMCO	3816/2SH	00103892	9kHz~30MHz	Oct. 16, 2023	Oct. 30, 2023	Oct. 15, 2024	Conduction (CO01-SZ)
AC Power Source	Chroma	61602	616020000891	100Vac~250Vac	Jul. 07, 2023	Oct. 30, 2023	Jul. 06, 2024	Conduction (CO01-SZ)
EMI Test Receiver	R&S	ESR7	101404	9kHz~7GHz	Oct. 18, 2023	Oct. 19, 2023~ Nov. 03, 2023	Oct. 17, 2024	Radiation (03CH04-SZ)
EXA Spectrum Analyzer	KEYSIGHT	N9010A	MY55150213	10Hz~44GHz	Jul. 07, 2023	Oct. 19, 2023~ Nov. 03, 2023	Jul. 06, 2024	Radiation (03CH04-SZ)
Loop Antenna	R&S	HFH2-Z2	100354	9kHz~30MHz	Jun. 28, 2022	Oct. 19, 2023~ Nov. 03, 2023	Jun. 27, 2024	Radiation (03CH04-SZ)
Bilog Antenna	TeseQ	CBL6111D	41909	30MHz~1GHz	May. 14, 2023	Oct. 19, 2023~ Nov. 03, 2023	May. 13, 2024	Radiation (03CH04-SZ)
Double Ridge Horn Antenna	SCHWARZBE CK	BBHA9120D	9120D-1474	1GHz~18GHz	Jul. 07, 2023	Oct. 19, 2023~ Nov. 03, 2023	Jul. 06, 2024	Radiation (03CH04-SZ)
Horn Antenna	SCHWARZBE CK	BBHA9170	9170#679	15GHz~40GHz	Jul. 08, 2023	Oct. 19, 2023~ Nov. 03, 2023	Jul. 07, 2024	Radiation (03CH04-SZ)
Amplifier	Burgeon	BPA-530	102211	0.01Hz ~3000MHz	Oct. 18, 2023	Oct. 19, 2023~ Nov. 03, 2023	Oct. 17, 2024	Radiation (03CH04-SZ)
HF Amplifier	MITEQ	AMF-7D-0010 1800-30-10P- R	1943528	1GHz~18GHz	Oct. 18, 2023	Oct. 19, 2023~ Nov. 03, 2023	Oct. 17, 2024	Radiation (03CH04-SZ)
HF Amplifier	MITEQ	TTA1840-35- HG	1871923	18GHz~40GHz	Jul. 07, 2023	Oct. 19, 2023~ Nov. 03, 2023	Jul. 06, 2024	Radiation (03CH04-SZ)
Amplifier	Agilent Technologies	83017A	MY57280136	500MHz~26.5G Hz	Aug. 21, 2023	Oct. 19, 2023~ Nov. 03, 2023	Aug. 20, 2024	Radiation (03CH04-SZ)
AC Power Source	APC	AFV-S-600B	F119050019	N/A	Oct. 18, 2023	Oct. 19, 2023~ Nov. 03, 2023	Oct. 17, 2024	Radiation (03CH04-SZ)
Turn Table	EM	EM1000	N/A	0~360 degree	NCR	Oct. 19, 2023~ Nov. 03, 2023	NCR	Radiation (03CH04-SZ)
Antenna Mast	EM	EM1000	N/A	1 m~4 m	NCR	Oct. 19, 2023~ Nov. 03, 2023	NCR	Radiation (03CH04-SZ)

NCR: No Calibration Required



5 Measurement Uncertainty

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI 63.10-2013. All the measurement uncertainty value were shown with a coverage K=2 to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

Uncertainty of Conducted Measurement

Conducted Spurious Emission & Bandedge	±2.26 dB	
Occupied Channel Bandwidth	±0.1%	
Conducted Power	±0.46 dB	
Conducted Power Spectral Density	±0.88 dB	
Frequency	±0.4 Hz	

Uncertainty of AC Conducted Emission Measurement (0.15 MHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence	2.7 dB
of 95% (U = 2Uc(y))	2.7 08

Uncertainty of Radiated Emission Measurement (9 KHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence	5.1 dB
of 95% (U = 2Uc(y))	5.1 dB

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence	5.1 dB
of 95% (U = 2Uc(y))	5.1 dB

Uncertainty of Radiated Emission Measurement (1 GHz ~ 18 GHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	4.8 dB
--	--------

Uncertainty of Radiated Emission Measurement (18 GHz ~ 40 GHz)

Measuring Uncertainty for a Level of Confidence	5.1 dB
of 95% (U = 2Uc(y))	5.1 dB

----- THE END ------



Appendix A. Conducted Test Results



Ambient Condition: <u>25</u> °C, <u>45</u> %RH

 Test Date:
 2023.10.24
 Test Engineer:
 Albert shi


DTS Bandwidth

Test Result


TestMode	Freq(MHz)	DTS BW [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
	2402	0.68	2401.66	2402.34	0.5	PASS
BLE_1M	2440	0.68	2439.66	2440.34	0.5	PASS
	2480	0.68	2479.66	2480.34	0.5	PASS
BLE_2M	2404	1.16	2403.43	2404.58	0.5	PASS
	2440	1.16	2439.43	2440.58	0.5	PASS
	2478	1.16	2477.42	2478.59	0.5	PASS



Test Graphs

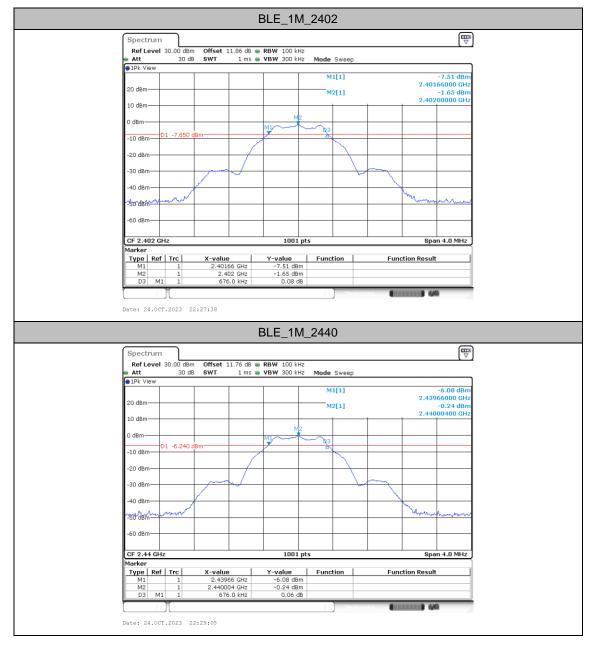



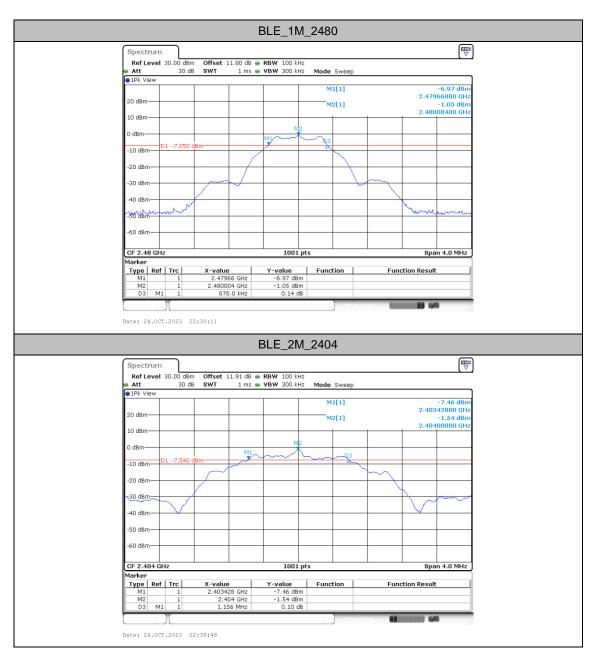








Occupied Channel Bandwidth

Test Result

TestMode	Freq(MHz)	OCB [MHz]	FL[MHz]	FH[MHz]
BLE_1M	2402	1.027	2401.4925	2402.5195
	2440	1.027	2439.4925	2440.5195
	2480	1.027	2479.4925	2480.5195
BLE_2M	2404	2.05	2402.9890	2405.0390
	2440	2.046	2438.9890	2441.0350
	2478	2.046	2476.9890	2479.0350




Test Graphs

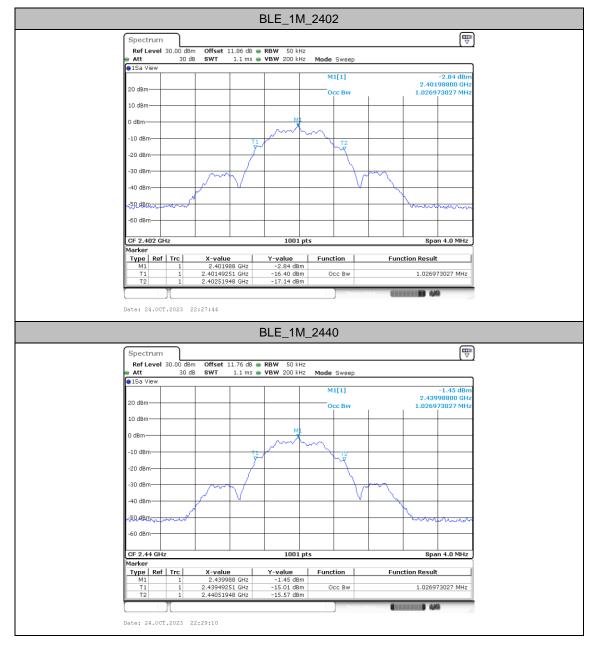







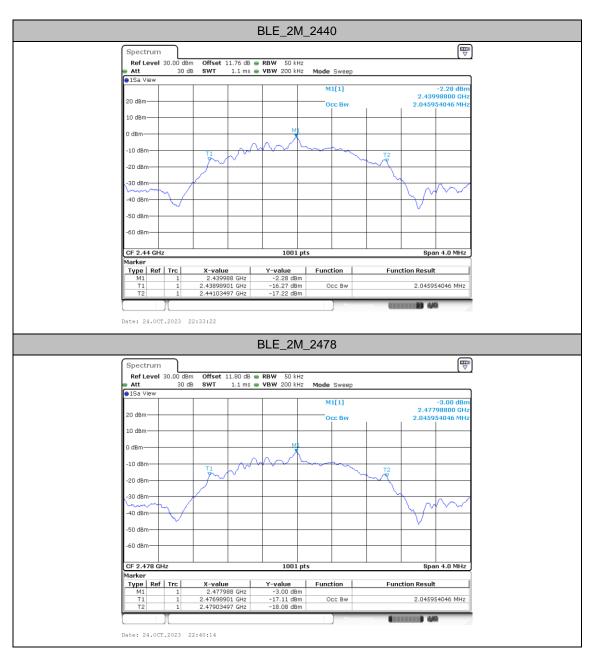



Maximum conducted output power

Test Result Peak

TestMode	CH.	Peak Conducted Power (dBm)	Conducted Power Limit	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit	Pass/Fail
BLE1M	00	-0.43	30.00	-0.35	-0.78	36.00	Pass
	19	0.92	30.00	-0.35	0.57	36.00	Pass
	39	0.04	30.00	-0.35	-0.31	36.00	Pass
BLE2M	01	-0.48	30.00	-0.35	-0.83	36.00	Pass
	19	0.83	30.00	-0.35	0.48	36.00	Pass
	38	-0.04	30.00	-0.35	-0.39	36.00	Pass




Maximum power spectral density

Test Result


TestMode	Freq(MHz)	Result[dBm/3kHz]	Limit[dBm/3kHz]	Verdict
BLE_1M	2402	-16.05	≤8.00	PASS
	2440	-14.66	≤8.00	PASS
	2480	-15.48	≤8.00	PASS
BLE_2M	2404	-18.42	≤8.00	PASS
	2440	-17.16	≤8.00	PASS
	2478	-17.98	≤8.00	PASS




Test Graphs

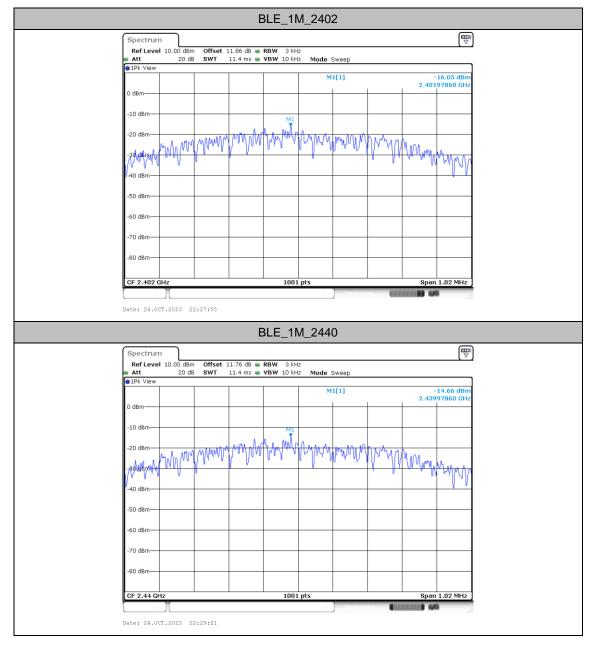



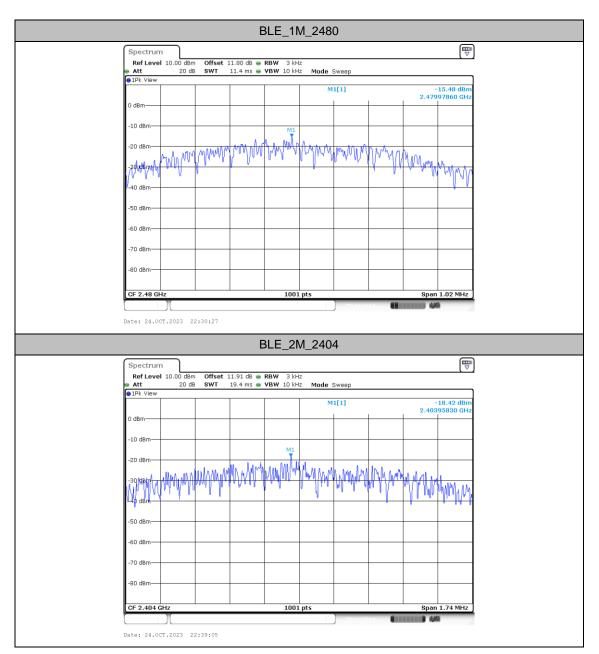



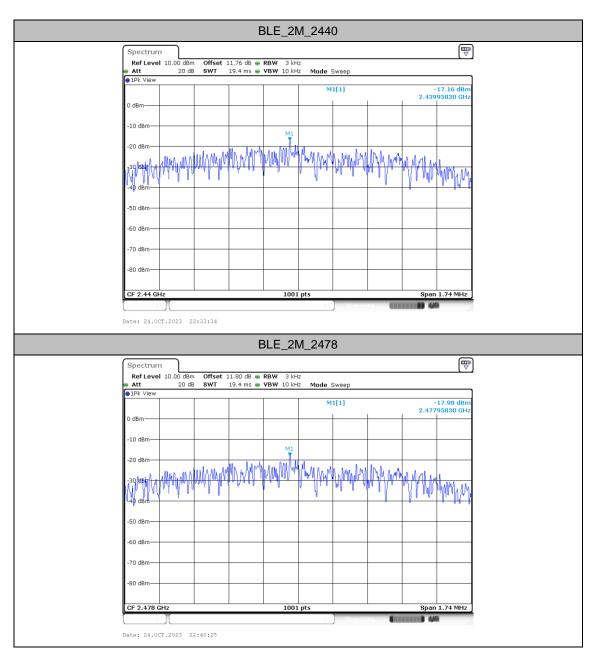




Reference level measurement

Test Result


TestMode	Freq(MHz)	Max.Point[MHz]	Result[dBm/100KHz]
	2402	2402.00	-1.64
BLE_1M	2440	2440.00	-0.26
	2480	2480.00	-1.07
	2404	2404.00	-1.53
BLE_2M	2440	2440.00	-0.33
	2478	2478.00	-1.06




Test Graphs

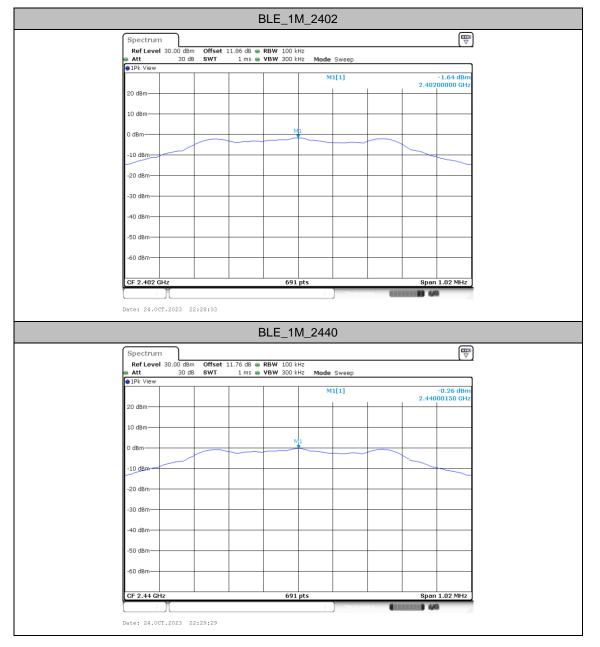



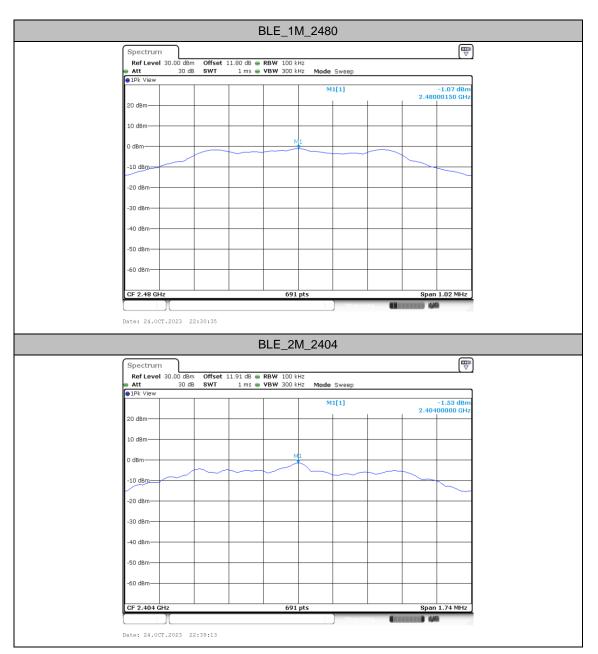



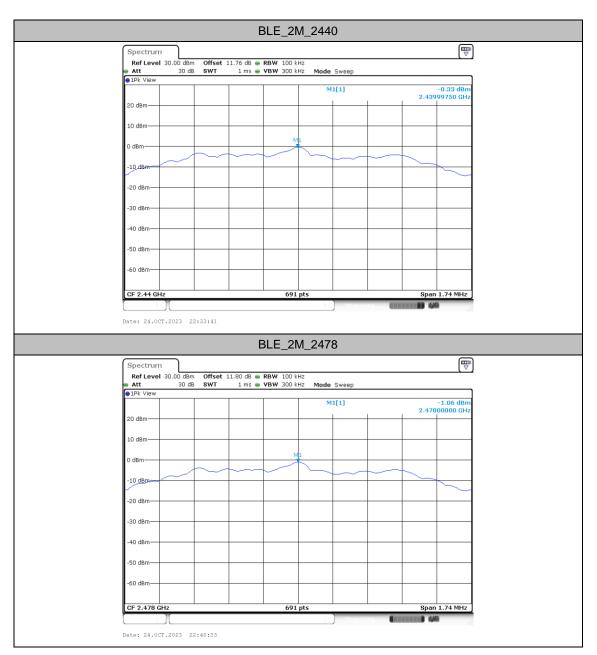




Band edge measurements

Test Result


TootModo	TestMode ChName	Freq	RefLevel	Result	Limit	Vardiat
TESTINOUE	Chiname	(MHz)	[dBm/100KHz]	[dBm/100KHz]	[dBm/100KHz]	Verdict PASS PASS PASS
BLE 1M	Low	2402	-1.64	-45.24	≤-21.64	PASS
DLC_1W	High	2480	-1.07	-45.31	≤-21.07	PASS
	Low	2404	-1.53	-45.6	≤-21.53	PASS
BLE_2M	High	2478	-1.06	-45.33	≤-21.06	PASS



Test Graphs

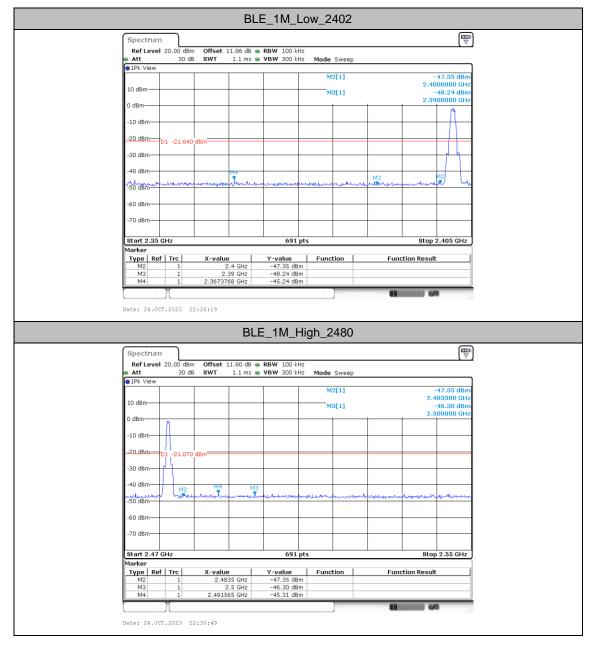



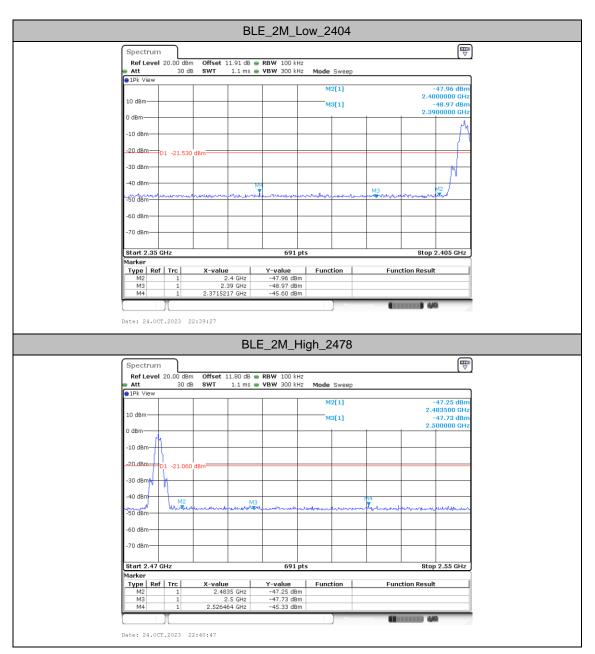




Conducted Spurious Emission

Test Result


TootModo		FreqRange	RefLevel	Result	Limit	Verdict	
TestMode	Freq(MHz)	[MHz]	[MHz] [dBm/100KHz] [d		[dBm/100KHz]	veruici	
	2402	30~1000	-1.64	-56.1	≤-21.64	PASS	
	2402	1000~26500	-1.64	-47.88	≤-21.64	PASS	
	2440	30~1000	-0.26	-56.72	≤-20.26	PASS	
BLE_1M	2440	1000~26500	-0.26	-47.5	≤-20.26	PASS	
	2480	30~1000	-1.07	-56.59	≤-21.07	PASS	
	2400	1000~26500	-1.07	-47.75	≤-21.07	PASS	
	2404	30~1000	-1.53	-56.75	≤-21.53	PASS	
	2404	1000~26500	-1.53	-47.71	≤-21.53	PASS	
BLE 2M	2440	30~1000	-0.33	-56.9	≤-20.33	PASS	
DLC_2IVI	2440	1000~26500	-0.33	-48.08	≤-20.33	PASS	
	2478	30~1000	-1.06	-56.91	≤-21.06	PASS	
	2410	1000~26500	-1.06	-48.12	≤-21.06	PASS	




Test Graphs

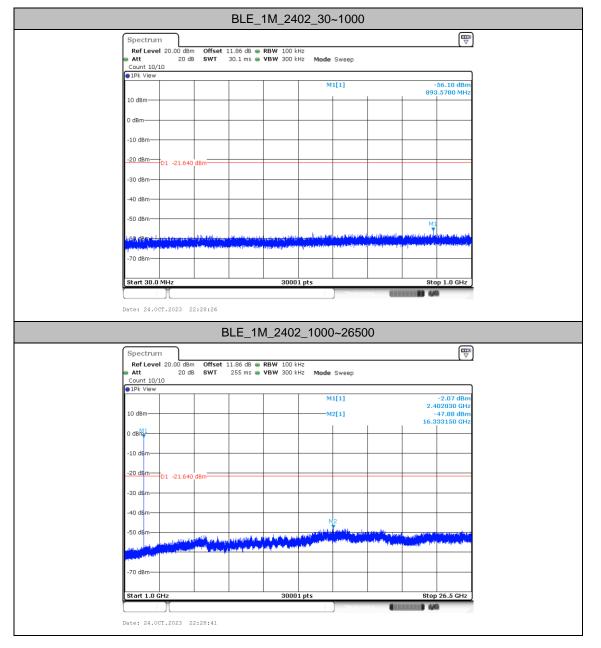




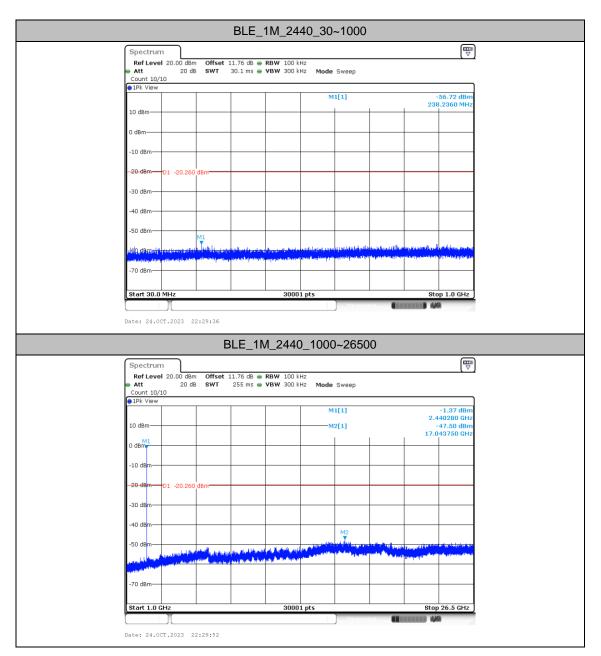




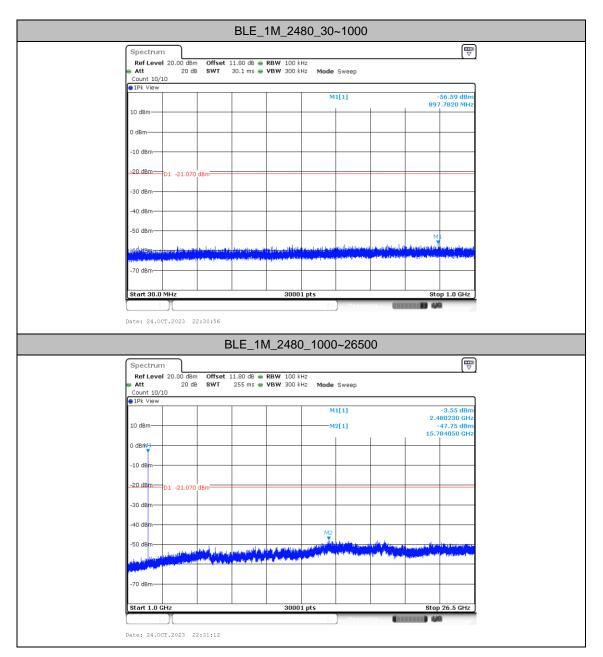




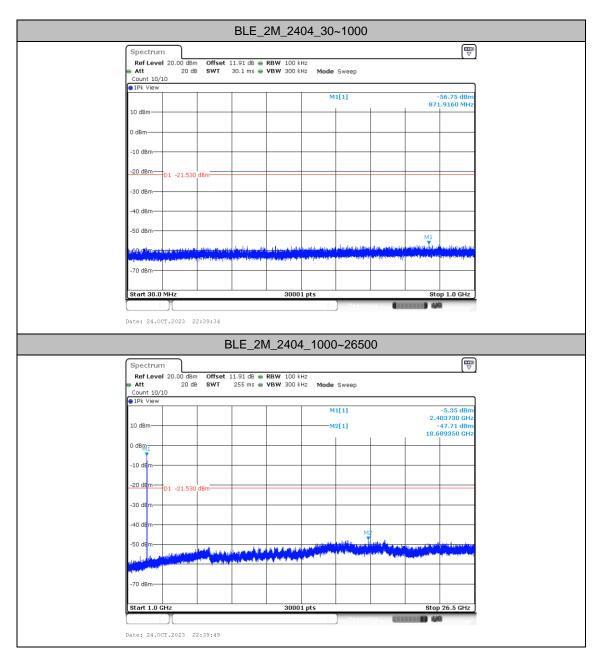



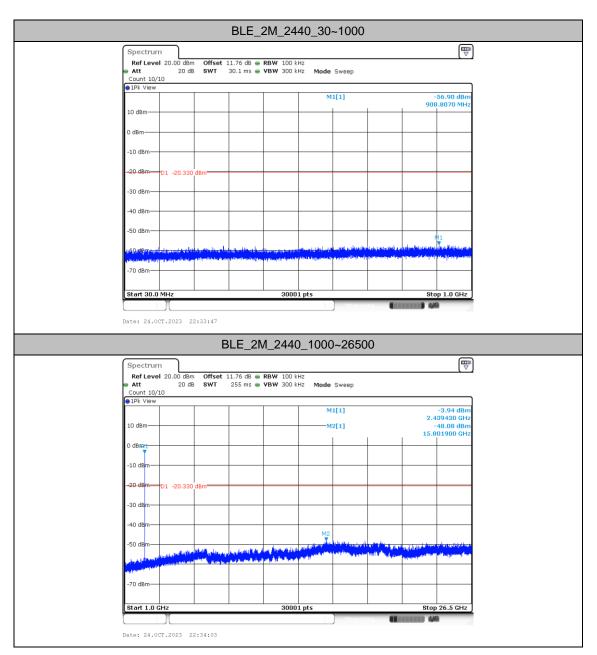



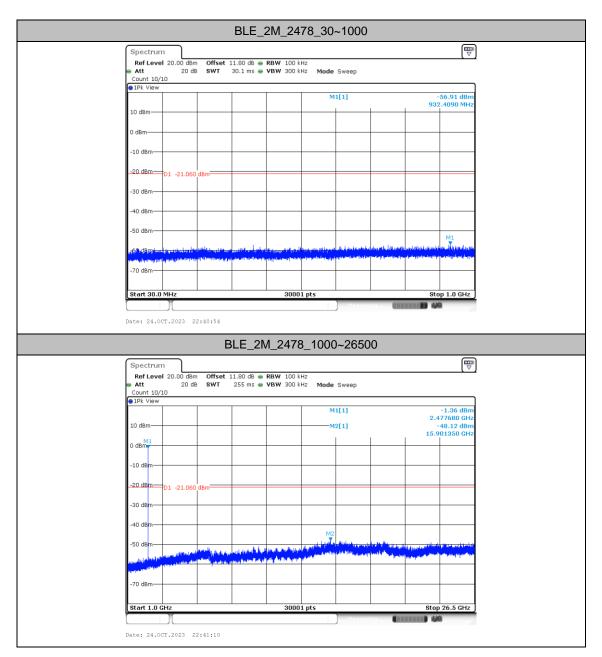




Appendix B. AC Conducted Emission Test Results

Tost Engineer						Tem	peratu	re :	22~24°C
Fest Engineer :	Lily Qiu					Rela	ative Hu	imidity :	44~50%
Test Voltage :	120Vac / 60Hz Phase :				Line				
Remark :	All emiss	sions no	ot reporte	ed here a	are more	e than 10	dB be	ow the pre	escribed limit
100 ^L	_evel (dBuV)							Date: 2023-	10-30
100									
90-									
80-									
70									
70	~~								
60-								FCC 150	<u>_QP</u>
50	14 Martin							FCC 15C	AVG
	6	here is a	b						
40	8	"WWW		24		_			tuba -
	3	· ' '	ə və Mantava	² WWWWWWWWWWWWWWWWWWWWWWWWWWWWWWWWWWWW	W. WWW.	A way	hu day and the state	WARRANT NAME	· · · · · · · · · · · · · · · · · · ·
30					a and a bar and	a, tan Mita		<u>n</u> · · ·	
	7 7			1					
20									
10									
0	0.15	0.5	1		2	5	10	20	30
0 ^L).15	0.5	1		2 ency (MHz)	-	10	20	30
0 <mark>(</mark> Site).15 : CO01-S		1		_	-	10	20	30
Site		Z		Frequ	ency (MHz)	-	10	20] 30
Site	: CO01-S	Z		Frequ	ency (MHz)	-	10	20] 30
Site	: CO01-S	Z		Frequ	ency (MHz)	-	10	20] 30
Site	: CO01-S	Z	SN_20230	Frequ	ency (MHz) NE		10 10 Cable	20] 30
Site	: CO01-S on: FCC 15	SZ SC_QP LI	SN_20230	Frequ 420_L LII Limit	ency (MHz) NE Read		Cable	20 Remark] 30
Site	: COOL-S on: FCC 15 Freq	GZ GC_QP LI Level	SN_20230 Over Limit	Frequ 420_L LII Limit Line	Read Level	LISN Factor	Cable Loss]
Site	: CO01-S on: FCC 15	SZ SC_QP LI	SN_20230 Over Limit	Frequ 420_L LII Limit Line	Read Level	LISN	Cable]
Site Conditio	: COO1-5 on: FCC 15 Freq MHz	SZ GC_QP LI Level dBuV	SN_20230 Over Limit dB	Frequ 420_L LII Limit Line dBuV	Read Level dBuV	LISN Factor dB	Cable Loss dB	Remark]
Site Conditio 1	: COO1-S on: FCC 15 Freq MHz 0.16	C_QP LI Level dBuV 42.81	SN_20230 Over Limit dB -12.88	Frequ 420_L LI Limit Line dBuV 55.69	Read Level dBuV 22.20	LISN Factor dB 10.47	Cable Loss dB 10.14	Remark]
Site Conditio	: C001-5 on: FCC 15 Freq MHz 0.16 0.16	52 50_QP LI Level dBuV 42.81 50.71	SN_20230 Over Limit dB -12.88 -14.98	Frequ 420_L LI Limit Line dBuV 55.69 65.69	Read Level dBuV 22.20 30.10	LISN Factor dB 10.47 10.47	Cable Loss dB 10.14 10.14	Remark Average QP]
Site Conditio 	: CO01-S on: FCC 15 Freq MHz 0.16 0.16 0.19	22 C_QP LI dBuV 42.81 50.71 33.18	Over Limit 	Frequ 420_L LII Limit dBuV 55.69 65.69 54.02	Read Level 22.20 30.10 12.60	LISN Factor dB 10.47 10.47 10.43	Cable Loss dB 10.14 10.14 10.15	Remark Average QP Average]
Site Conditio 	: CO01-S on: FCC 15 Freq MHz 0.16 0.16 0.19 0.19	22 C_QP LI dBuV 42.81 50.71 33.18 48.18	SN_20230 Over Limit dB -12.88 -14.98	Frequ 420_L LII Limit 	Read Level dBuV 22.20 30.10	LISN Factor dB 10.47 10.47 10.43	Cable Loss dB 10.14 10.14 10.15 10.15	Remark Average QP Average]
Site Conditio 	: C001-5 on: FCC 15 Freq MHz 0.16 0.16 0.19 0.19 0.24	5Z 5C_QP LI: Level dBuV 42.81 50.71 33.18 48.18 25.14	Over Limit dB -12.88 -14.98 -20.84 -15.84 -27.03	Frequ 420_L LII Limit 	Read Level dBuV 22.20 30.10 12.60 27.60 4.60	LISN Factor dB 10.47 10.43 10.43 10.43 10.39	Cable Loss dB 10.14 10.14 10.15 10.15 10.15	Remark Average QP Average QP Average	
Site Conditio — 1 2 3 4 5	: CO01-5 on: FCC 15 Freq MHz 0.16 0.16 0.19 0.19 0.24 0.24	5Z 5C_QP LI: Level dBuV 42.81 50.71 33.18 48.18 25.14 43.04	Over Limit dB -12.88 -14.98 -20.84 -15.84 -27.03	Frequ 420_L LII Limit Line dBuV 55.69 65.69 54.02 64.02 52.17 62.17	Read Level dBuV 22.20 30.10 12.60 27.60 4.60	LISN Factor dB 10.47 10.43 10.43 10.43 10.39	Cable Loss dB 10.14 10.14 10.15 10.15 10.15 10.15	Remark Average QP Average QP Average]
Site Conditio 	: C001-5 on: FCC 15 Freq MHz 0.16 0.16 0.19 0.19 0.24 0.24 0.29	22 C_QP LI dBuV 42.81 50.71 33.18 48.18 25.14 43.04 24.53	Over Limit 	Frequ 420_L LII Limit Line dBuV 55.69 65.69 54.02 64.02 52.17 62.17	Read Level dBuV 22.20 30.10 12.60 27.60 4.60 22.50 4.01	LISN Factor dB 10.47 10.43 10.43 10.43 10.39 10.39	Cable Loss dB 10.14 10.15 10.15 10.15 10.15 10.15	Remark Average QP Average QP Average QP Average	
Site Conditio 	: C001-S on: FCC 15 Freq MHz 0.16 0.16 0.19 0.24 0.24 0.24 0.29 0.29	22 C_QP LI dBuV 42.81 50.71 33.18 48.18 25.14 43.04 24.53 39.13	Over Limit dB -12.88 -14.98 -20.84 -15.84 -27.03 -19.13 -25.93 -21.33	Frequ 420_L LII Limit Line dBuV 55.69 65.69 54.02 64.02 52.17 62.17 50.46	Read Level dBuV 22.20 30.10 12.60 27.60 4.60 22.50 4.01 18.61	LISN Factor dB 10.47 10.43 10.43 10.39 10.39 10.37 10.37	Cable Loss dB 10.14 10.15 10.15 10.15 10.15 10.15 10.15	Remark Average QP Average QP Average QP Average]
Site Conditio 1 2 3 4 5 6 7 8	: C001-S on: FCC 15 Freq MHz 0.16 0.16 0.19 0.24 0.24 0.24 0.29 0.29 0.55	22 C_QP LI dBuV 42.81 50.71 33.18 48.18 25.14 43.04 24.53 39.13 34.83	Over Limit dB -12.88 -14.98 -20.84 -15.84 -27.03 -19.13 -25.93 -21.33 -11.17	Frequ 420_L LII Limit Line dBuV 55.69 65.69 54.02 64.02 52.17 62.17 50.46 60.46	Read Level dBuV 22.20 30.10 12.60 27.60 4.60 22.50 4.01 18.61 14.40	LISN Factor dB 10.47 10.43 10.43 10.39 10.39 10.37 10.37	Cable Loss dB 10.14 10.15 10.15 10.15 10.15 10.15 10.15 10.15 10.15	Remark Average QP Average QP Average QP Average QP Average]
Site Conditio 1 2 3 4 5 6 7 8 9 *	: C001-S on: FCC 15 Freq MHz 0.16 0.16 0.19 0.24 0.24 0.29 0.29 0.25 0.55	5Z GC_QP LI dBuV 42.81 50.71 33.18 48.18 25.14 43.04 24.53 39.13 34.83 40.73	Over Limit dB -12.88 -14.98 -20.84 -15.84 -27.03 -19.13 -25.93 -21.33 -11.17	Frequ 420_L LII Limit Line dBuV 55.69 65.69 54.02 64.02 52.17 62.17 50.46 60.46 46.00 56.00	Read Level dBuV 22.20 30.10 12.60 27.60 4.60 22.50 4.01 18.61 14.40	LISN Factor dB 10.47 10.43 10.43 10.39 10.39 10.37 10.37 10.27	Cable Loss dB 10.14 10.15 10.15 10.15 10.15 10.15 10.15 10.15 10.16 10.16	Remark Average QP Average QP Average QP Average QP Average	



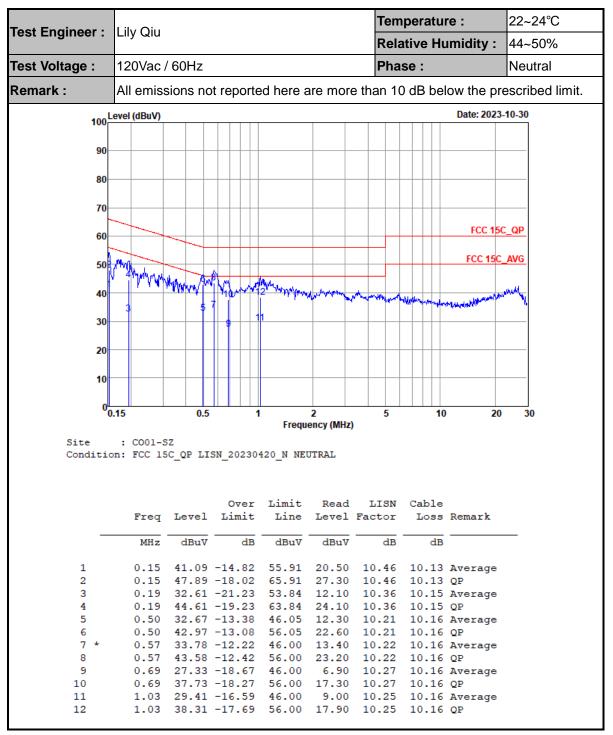

Note:

- 1. Level(dB μ V) = Read Level(dB μ V) + LISN Factor(dB) + Cable Loss(dB)
- 2. Over Limit(dB) = Level(dBµV) Limit Line(dBµV)



Appendix C. Radiated Spurious Emission Test Data

Test Engineer :	Wenbo Xiao	Relative Humidity :	48~49%
Test Engineer .		Temperature :	24~25 ℃

Radiated Spurious Emission Test Modes

Mode	Band (MHz)	Antenna	Modulation	Channel	Frequency	Data Rate	RU	Remark
Mode 1	2400-2483.5	2	Bluetooth-LE	00	2402	1Mbps	-	-
Mode 2	2400-2483.5	2	Bluetooth-LE	19	2440	1Mbps	-	-
Mode 3	2400-2483.5	2	Bluetooth-LE	39	2480	1Mbps	-	-
Mode 4	2400-2483.5	2	Bluetooth-LE	01	2404	2Mbps	-	-
Mode 5	2400-2483.5	2	Bluetooth-LE	38	2480	2Mbps	-	-
Mode 6	2400-2483.5	2	Bluetooth-LE	38	2478	2Mbps	-	LF

Summary of each worse mode

Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	Remark
1	Bluetooth-LE	00	2363.91	37.32	54.00	-16.68	V	AVERAGE	Pass	Band Edge
1	Bluetooth-LE	00	4804.00	41.23	74.00	-32.77	Н	Peak	Pass	Harmonic
2	Bluetooth-LE	19	-	-	-	-	-	-	-	Band Edge
2	Bluetooth-LE	19	7320.00	43.98	74.00	-30.02	V	Peak	Pass	Harmonic
3	Bluetooth-LE	39	2486.08	37.91	54.00	-16.09	Н	AVERAGE	Pass	Band Edge
3	Bluetooth-LE	39	7440.00	44.38	74.00	-29.62	Н	Peak	Pass	Harmonic
4	Bluetooth-LE	01	2379.09	39.07	54.00	-14.93	Н	AVERAGE	Pass	Band Edge
4	Bluetooth-LE	01	-	-	-	-	-	-	-	Harmonic
5	Bluetooth-LE	38	2484.49	39.54	54.00	-14.46	Н	AVERAGE	Pass	Band Edge
5	Bluetooth-LE	38	7434	44.36	74	-29.64	Н	Peak	Pass	Harmonic
6	Bluetooth-LE	38	30.00	35.52	40.00	-4.48	V	Peak	Pass	LF



<Co-Location>


BLE_Ch38 + LTE Band 41 Link (Band Edge @ 3m)

WIFI	Note	Frequency	Level	Margin	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
Ant.					Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
		(MHz)	(dBµV/m)	(dB)	(dBµV/m)	(dBµV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
	*	2478	95	-	-	89.9	33.54	5.46	33.9	119	143	Р	Н
	*	2478	93.89	-	-	88.79	33.54	5.46	33.9	119	143	Α	Н
		2486.2	46.58	-27.42	74	41.46	33.56	5.46	33.9	119	143	Р	Н
Co-location		2488.04	38.79	-15.21	54	33.66	33.57	5.46	33.9	119	143	Α	Н
CO-IOCATION	*	2478	92.95	-	-	87.85	33.54	5.46	33.9	302	99	Р	V
	*	2478	91.46	-	-	86.36	33.54	5.46	33.9	302	99	Α	V
		2488.96	46.09	-27.91	74	40.96	33.57	5.46	33.9	302	99	Р	V
		2489.04	38.51	-15.49	54	33.38	33.57	5.46	33.9	302	99	Α	V
Remark		lo other spui All results are			ak and Aver	age limit	line.						


BLE_Ch38 + LTE Band 41 Link (Harmonic @ 3m)

WIFI Ant.	Note	Frequency	Level	Margin Limit	Limit Line	Read Level	Antenna Factor	Path Loss	Preamp Factor	Ant Pos	Table Pos	Peak Avg.	
2		(MHz)	(dBµV/m)	(dB)	(dBµV/m)	(dBµV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
		4956	43.83	-30.17	74	64.03	36.17	8.53	64.9	-	-	Р	Н
Co-location		7434	43.96	-30.04	74	62.7	35.95	10.17	64.86	-	-	Ρ	Н
CO-IOCALION		4956	44.34	-29.66	74	64.54	36.17	8.53	64.9	-	-	Р	V
		7434	44.25	-29.75	74	62.99	35.95	10.17	64.86	-	-	Ρ	V
Remark	1 No other spurious found												




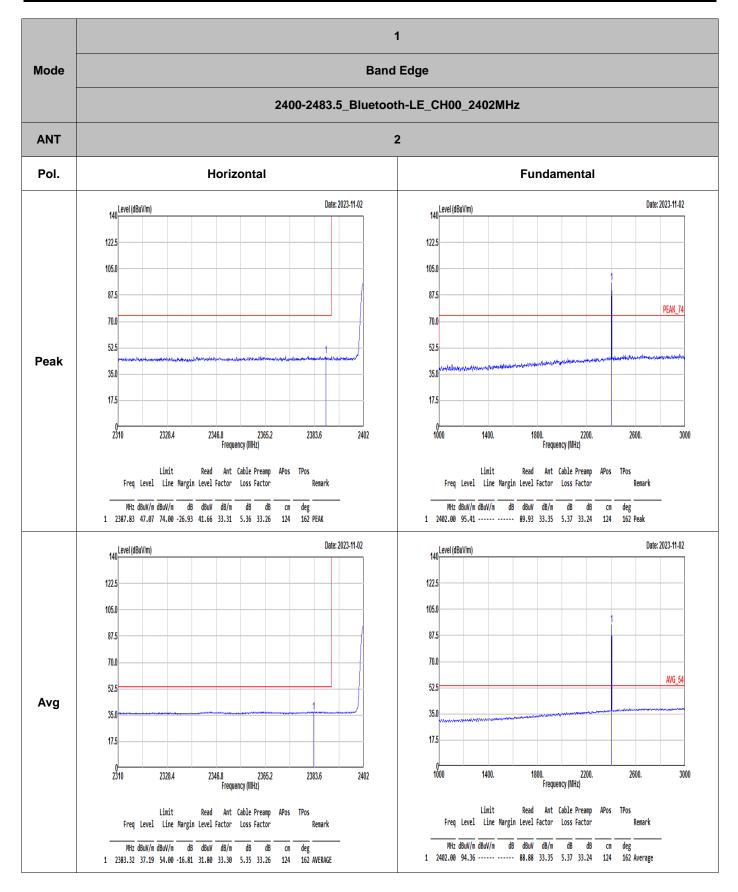




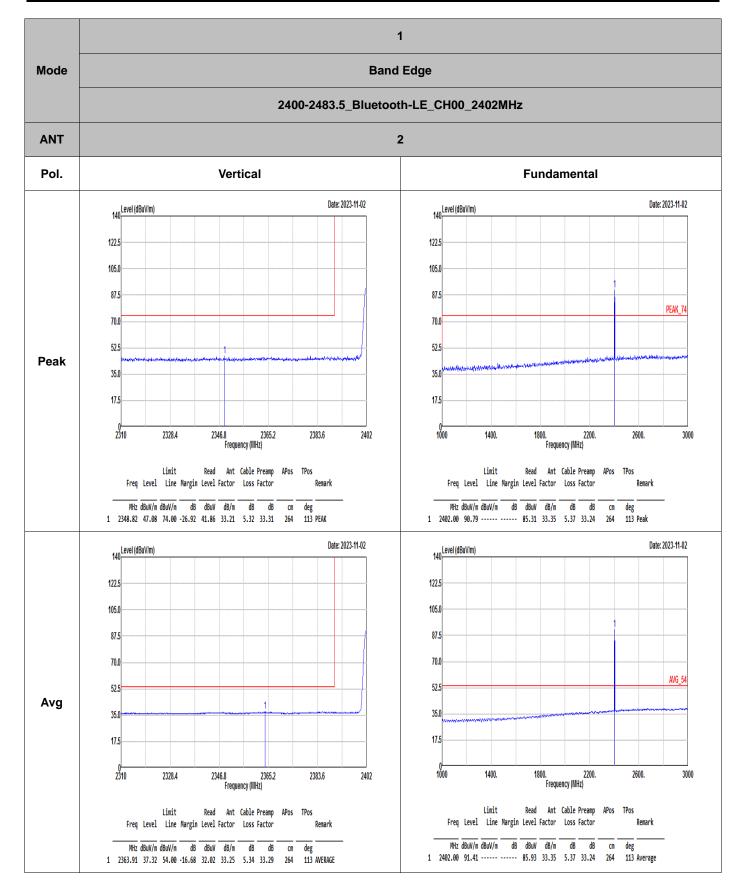




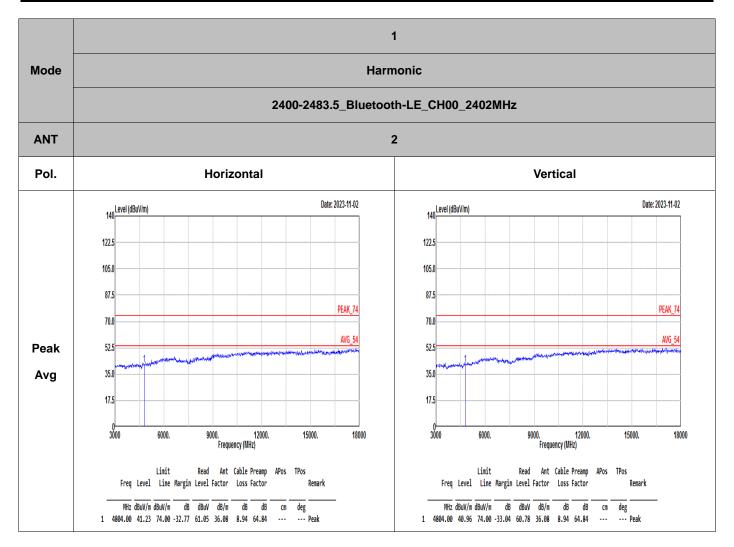




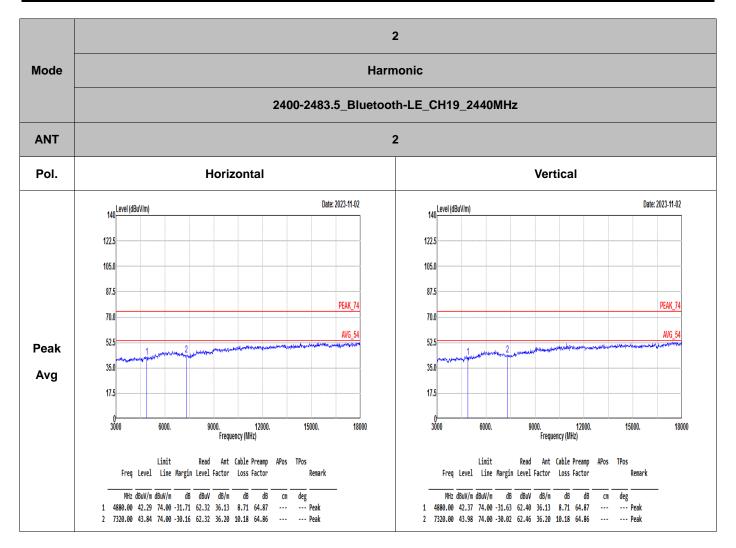




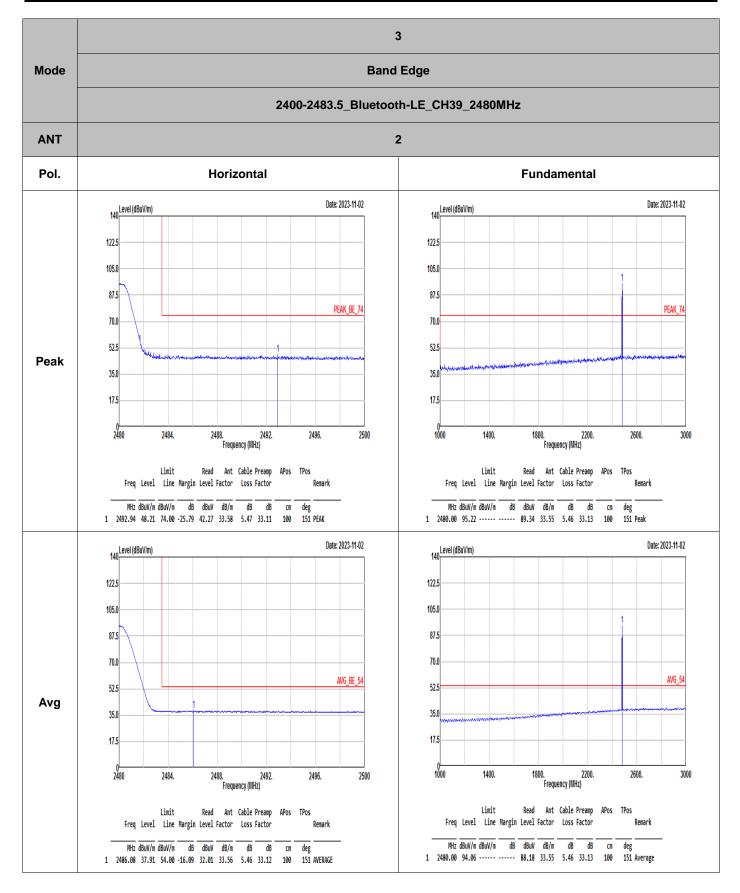




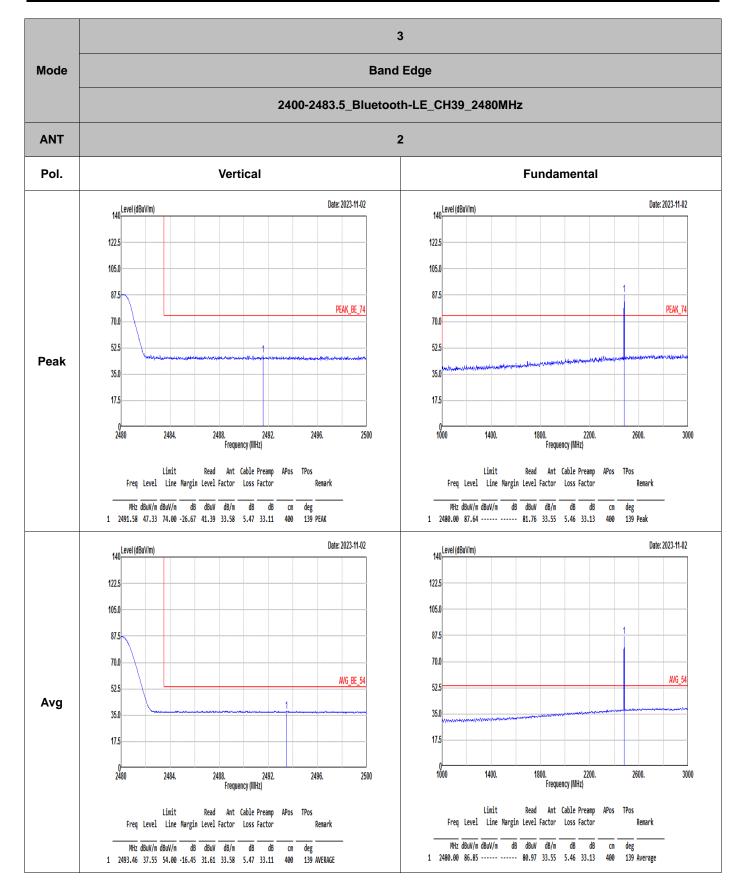




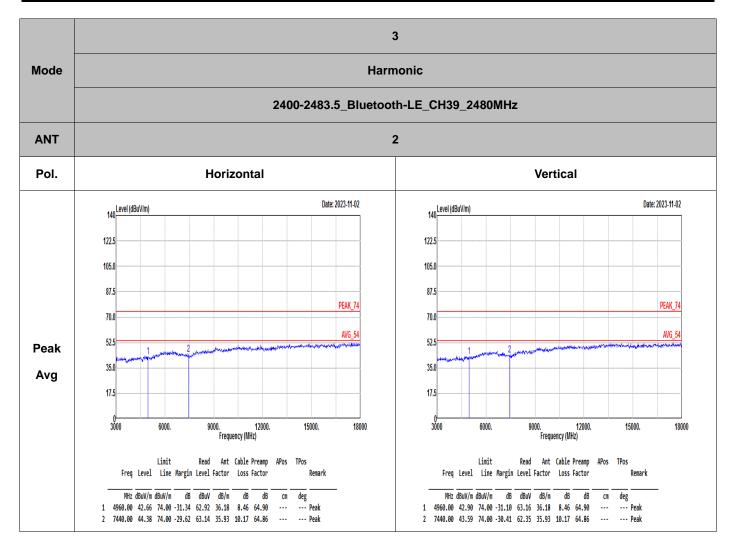




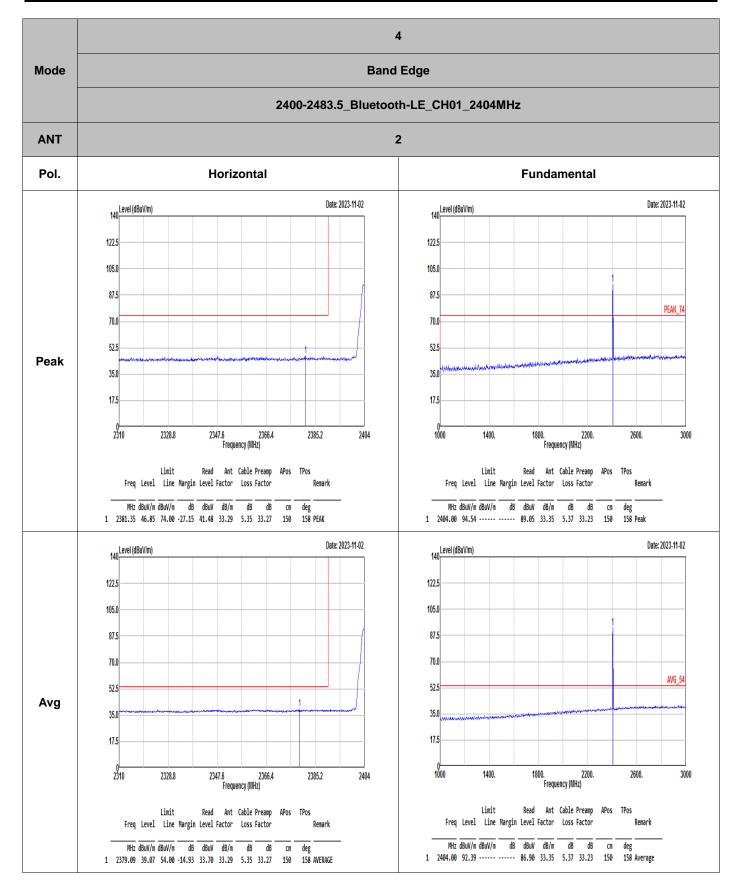




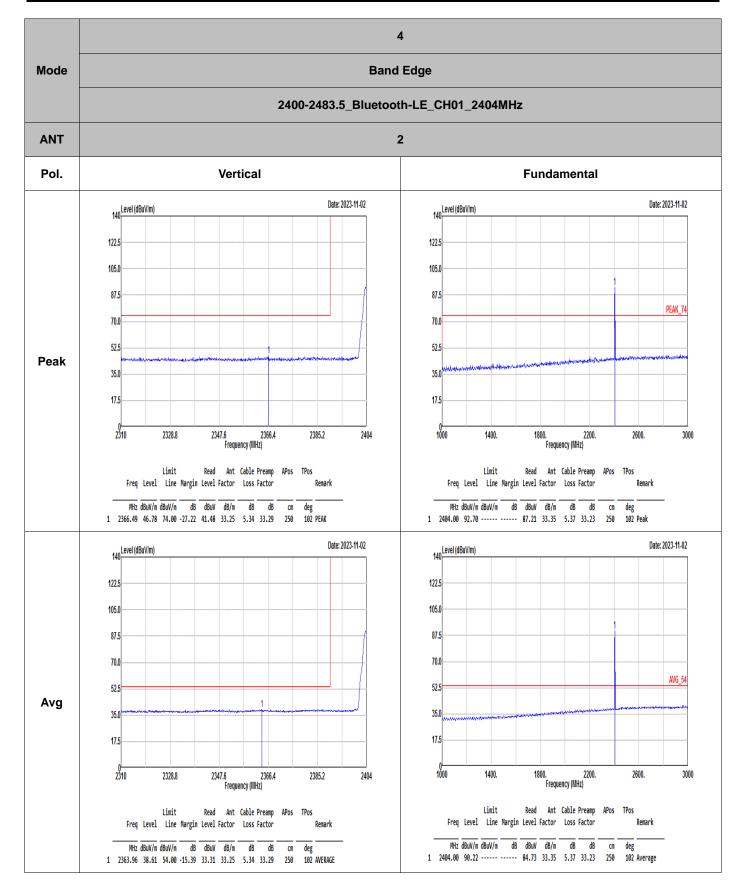



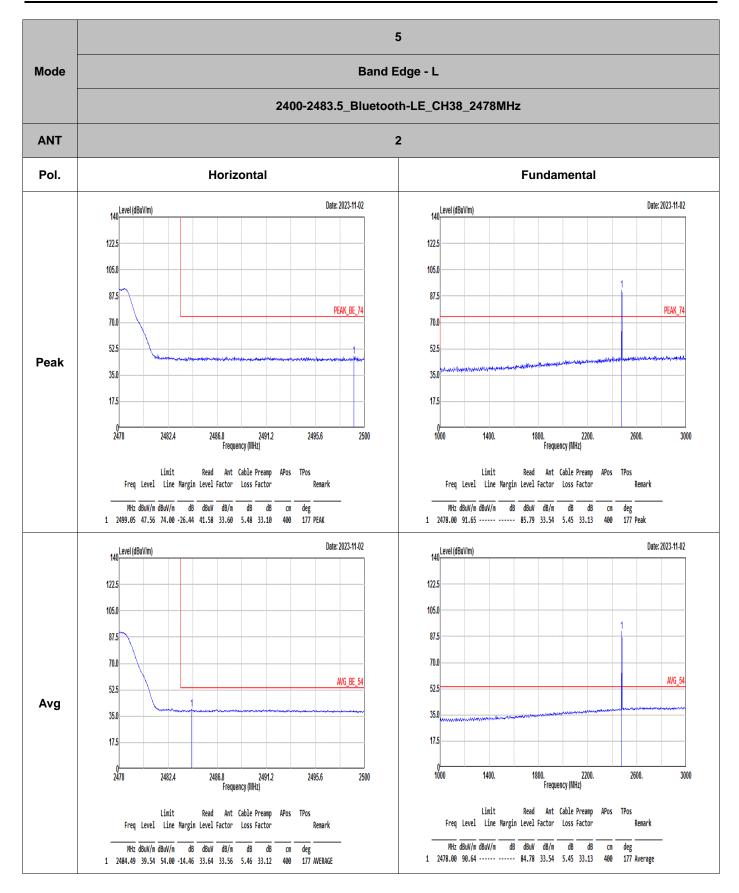




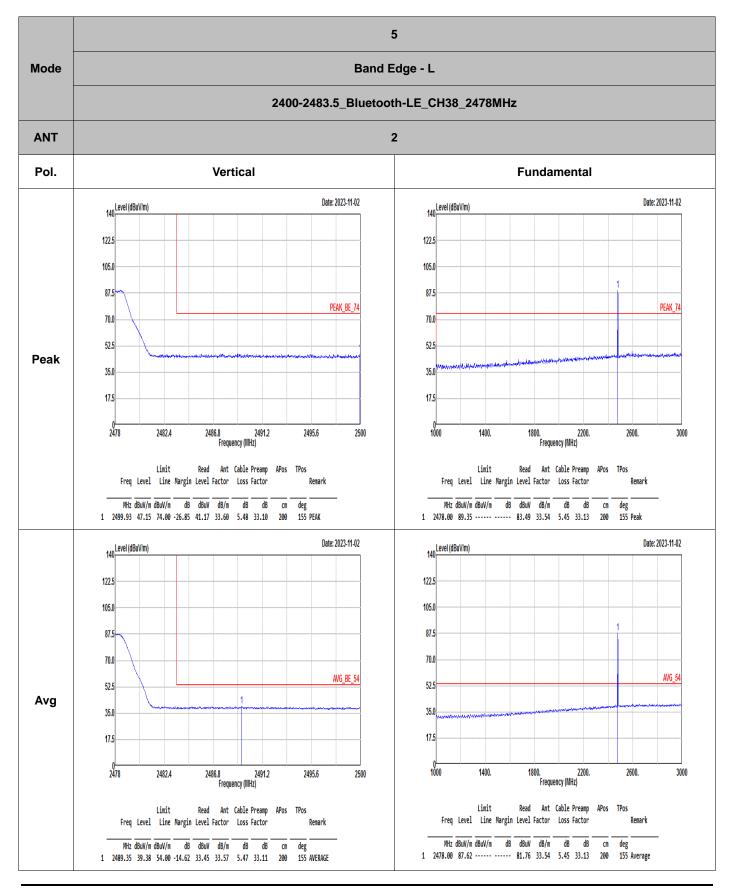


Sporton International Inc. (ShenZhen) TEL : +86-755-8637-9589 FAX : +86-755-8637-9595 FCC ID: 2ACCJH180 Page Number : C13 of C18



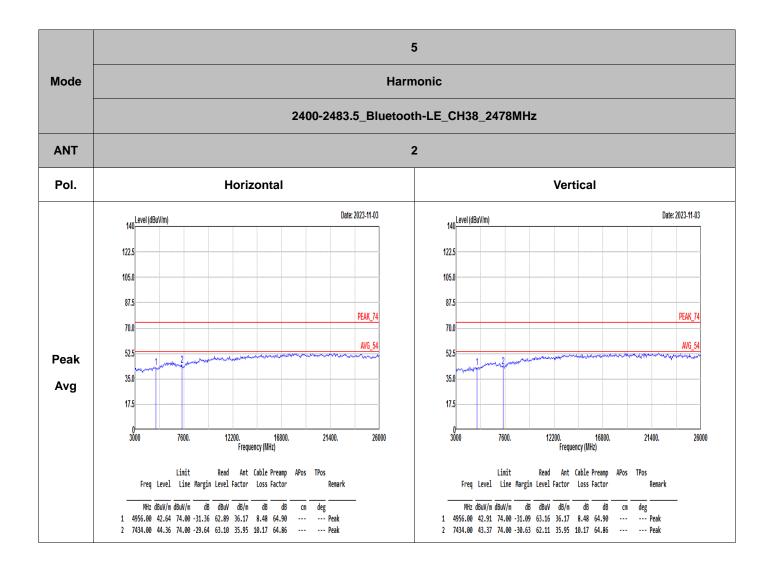




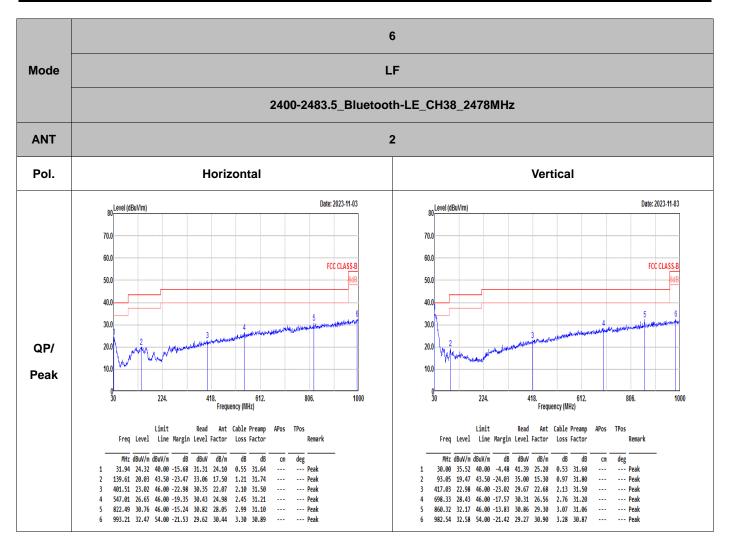




<Co-Location>

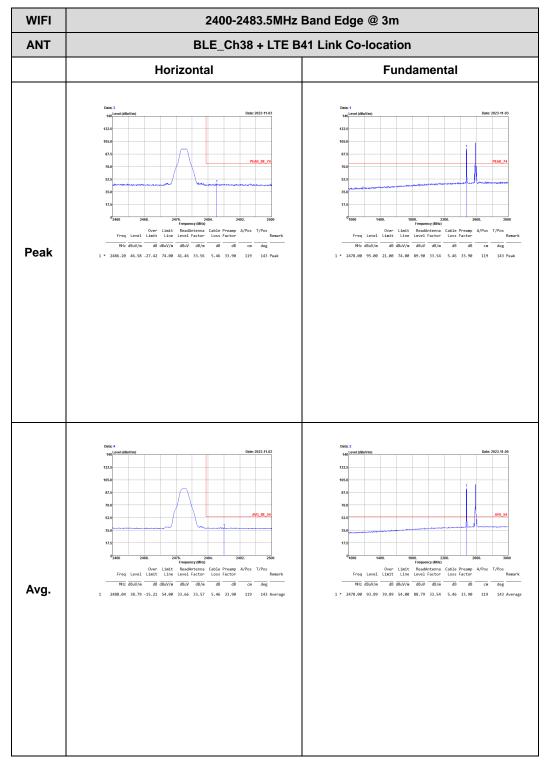


BLE_Ch38 + LTE Band 41 Link (Band Edge @ 3m)



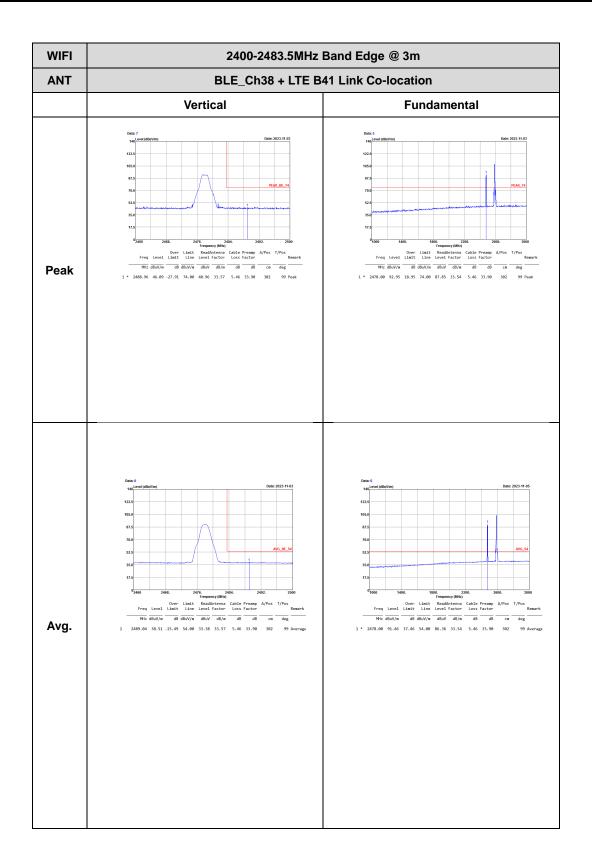



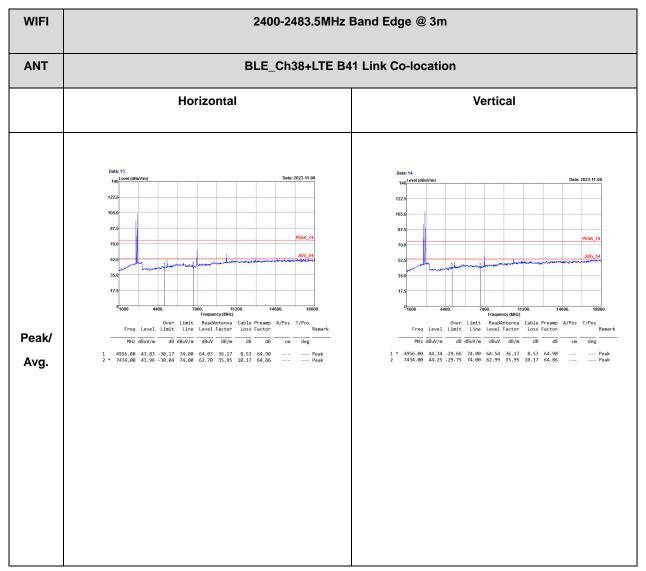

BLE_Ch38 + LTE Band 41 Link (Harmonic @ 3m)


Note: the highest signals over limit are BLE + LTE Band 41 co-location fundamental signals.



Appendix D. Duty Cycle Plots


Band	Duty Cycle(%)	T(ms)	1/T(kHz)	VBW Setting
Bluetooth LE 1Mbps	61.11	0.383	2.614	3KHz
Bluetooth LE 2Mbps	31.48	0.197	5.074	10KHZ

Bluetooth LE 1Mbps

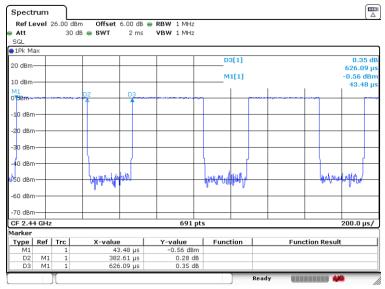

Date: 19.0CT.2023 13:50:44

Bluetooth LE 2Mbps

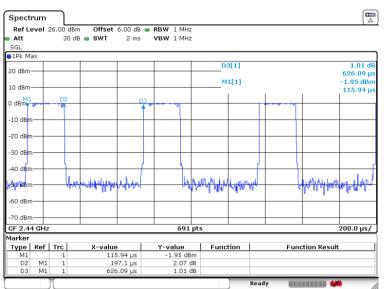

Date: 19.0CT.2023 13:52:03