



Report No.: FCC 1909104-01 File Reference No.: 2019-09-21

Applicant: Shenzhen Jingwah Information Technology Co., Ltd.

Product: Wireless Bluetooth Headset

Model No.: BKH600

Trademark: Brookstone

Test Standards: FCC Part 15.247

Test Result:

It is herewith confirmed and found to comply with the

requirements set up by ANSI C63.10, FCC Part 15.247 for

the evaluation of electromagnetic compatibility

Approved By

Jack Chung

Jack Chung

Manager

Dated: September 21, 2019

Results appearing herein relate only to the sample tested

The technical reports is issued errors and omissions exempt and is subject to withdrawal at

SHENZHEN TIMEWAY TESTING LABORATORIES

Zone C, 1st Floor, Block B, Jun Xiang Da Building, Zhongshan Park Road West, Tong Le Village, Nanshan District, Shenzhen, China

Tel (755) 83448688, Fax (755) 83442996, E-Mail:info@timeway-lab.com

Report No.: FCC1909104-01 Page 2 of 50

Date: 2019-09-21



Special Statement:

The testing quality ability of our laboratory meet with "Quality Law of People's Republic of China" Clause 19.

The testing quality system of our laboratory meet with ISO/IEC-17025 requirements, which is approved by CNAL. This approval result is accepted by MRA of APLAC.

Our test facility is recognized, certified, or accredited by the following organizations:

CNAS-LAB Code: L2292

The EMC Laboratory has been assessed and in compliance with CNAS-CL01 accreditation criteria for testing Laboratories (identical to ISO/IEC 17025:2005 General Requirements) for the Competence of testing Laboratories.

FCC-Registration No.: 744189

The EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications commission. The acceptance letter from the FCC is maintained in our files. Registration No.: 744189.

Industry Canada (IC) —Registration No.:5205A

The EMC Laboratory has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 5205A.

A2LA (Certification Number:5013.01)

The EMC Laboratory has been accredited by the American Association for Laboratory Accreditation (A2LA). Certification Number:5013.01

Page 3 of 50

Report No.: FCC1909104-01

Date: 2019-09-21



Test Report Conclusion

Content

1.0	General Details	4
1.1	Test Lab Details.	4
1.2	Applicant Details	4
1.3	Description of EUT	4
1.4	Submitted Sample	4
1.5	Test Duration.	5
1.6	Test Uncertainty.	5
1.7	Test By	5
2.0	List of Measurement Equipment	6
3.0	Technical Details	7
3.1	Summary of Test Results	7
3.2	Test Standards.	7
4.0	EUT Modification.	7
5.0	Power Line Conducted Emission Test.	8
5.1	Schematics of the Test.	8
5.2	Test Method and Test Procedure.	8
5.3	Configuration of the EUT	8
5.4	EUT Operating Condition.	9
5.5	Conducted Emission Limit.	9
5.6	Test Result.	9
6.0	Radiated Emission test	12
5.1	Test Method and Test Procedure.	12
5.2	Configuration of the EUT	12
6.3	EUT Operation Condition.	12
6.4	Radiated Emission Limit	13
7.0	6dB Bandwidth Measurement Bandwidth	22
8.0	Maximum Peak Output Power	27
9.0	Power Spectral Density Measurement.	29
10.0	Out of Band Measurement	34
11.0	Antenna Requirement.	41
12.0	FCC ID Label.	42
13.0	Photo of Test Setup and EUT View.	43

Date: 2019-09-21



1.0 General Details

1.1 Test Lab Details

Name: SHENZHEN TIMEWAY TESTING LABORATORIES.

Address: Zone C, 1st Floor, Block B, Jun Xiang Da Building, Zhongshan Park Road West, Tong Le

Village, Nanshan District, Shenzhen, China

Telephone: (755) 83448688 Fax: (755) 83442996

1.2 Applicant Details

Applicant: Shenzhen Jingwah Information Technology Co., Ltd.

Address: 6F, Bldg.4, Jinghua Square, No. 168, Zhenzhong Rd., Fuqiang Community, Huaqiangbei,

Futian District, Shenzhen

Telephone: 0755-84688843 Fax: 0755-83976520

1.3 Description of EUT

Product: Wireless Bluetooth Headset

Manufacturer: Shenzhen Jingwah Information Technology Co., Ltd.

Address: 6F, Bldg.4, Jinghua Square, No. 168, Zhenzhong Rd., Fuqiang Community,

Huaqiangbei, Futian District, Shenzhen

Brand Name: Brookstone

Additional Brand Name: N/A

Model Number: BKH600

Additional Model Number: N/A

Type of Modulation GFSK (Bluetooth BLE)

Frequency range 2402-2480MHz
Frequency Selection By software

Channel Number 40

Rating: Internal Li-ion battery: DC3.7V, 50mAh

Software Version: v2.19

Hardware Version: jh01–20180807-R (for right headset); jh01–20180807-L (for left headset)

1.4 Submitted Sample: 2 Samples

1.5 Test Duration

2019-09-16 to 2019-09-20

1.6 Test Uncertainty

Conducted Emissions Uncertainty =3.6dB

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Report No.: FCC1909104-01 Page 5 of 50

Date: 2019-09-21



Radiated Emissions below 1GHz Uncertainty =4.7dB Radiated Emissions above 1GHz Uncertainty =6.0dB Conducted Power Uncertainty =6.0dB Occupied Channel Bandwidth Uncertainty =5%

1.7 Test Engineer

The sample tested by

Print Name: Terry Tang

Terry lang

Page 6 of 51

Report No.: FCC1909104-01

Date: 2019-09-21



2.0 Test Equipment					
Instrument Type	Manufacturer	Model	Serial No.	Date of Cal.	Due Date
ESPI Test Receiver	R&S	ESPI 3	100379	2019-06-21	2020-06-20
TWO Line-V-NETW	R&S	EZH3-Z5	100294	2019-06-21	2020-06-20
TWO Line-V-NETW	R&S	EZH3-Z5	100253	2019-06-21	2020-06-20
Impuls-Begrenzer	R&S	ESH3-Z2	100281	2019-06-21	2020-06-20
Loop Antenna	EMCO	6507	00078608	2019-06-21	2020-06-20
Spectrum	R&S	FSIQ26	100292	2019-06-21	2020-06-20
Horn Antenna	A-INFO	LB-180400-KF	J211060660	2019-06-21	2020-06-20
Horn Antenna	R&S	BBHA 9120D	9120D-631	2018-07-09	2021-07-08
Power meter	Anritsu	ML2487A	6K00003613	2019-08-22	2020-08-21
Power sensor	Anritsu	MA2491A	32263	2019-08-22	2020-08-21
Bilog Antenna	Schwarebeck	VULB9163	9163/340	2018-07-04	2021-07-03
9*6*6 Anechoic			N/A	2018-02-07	2021-02-06
EMI Test Receiver	RS	ESVB	826156/011	2019-06-21	2020-06-20
EMI Test Receiver	RS	ESH3	860904/006	2019-06-21	2020-06-20
Spectrum	HP/Agilent	ESA-L1500A	US37451154	2019-06-21	2020-06-20
Spectrum	HP/Agilent	E4407B	MY50441392	2019-06-21	2020-06-20
Spectrum	RS	FSP	1164.4391.38	2019-01-20	2020-01-19
RF Cable	Zhengdi	ZT26-NJ-NJ-8 M/FA		2019-06-21	2020-06-20
RF Cable	Zhengdi	7m		2019-06-21	2020-06-20
RF Switch	EM	EMSW18	060391	2019-06-21	2020-06-20
Pre-Amplifier	Schwarebeck	BBV9743	#218	2019-06-21	2020-06-20
Pre-Amplifier	HP/Agilent	8449B	3008A00160	2019-06-21	2020-06-20
LISN	SCHAFFNER	NNB42	00012	2019-01-08	2020-01-07

Report No.: FCC1909104-01

Date: 2019-09-21



3.0 **Technical Details**

3.1 **Summary of test results**

Standard	Test Type	Result	Notes
FCC Part 15, Paragraph 15.107 & 15.207	Conducted Emission Test	PASS	Complies
FCC Part 15 Subpart C Paragraph 15.247(a)(2) Limit	Spectrum bandwidth of a Orthogonal Frequency Division Multiplex System Limit: 6dB bandwidth>500kHz	PASS	Complies
FCC Part 15, Paragraph 15.247(b)	Maximum peak output power Limit: max. 30dBm	PASS	Complies
FCC Part 15, Paragraph 15.109,15.205 & 15.209	Transmitter Radiated Emission Limit: Table 15.209	PASS	Complies
FCC Part 15, Paragraph 15.247(e)	Power Spectral Density Limit: max. 8dBm	PASS	Complies
FCC Part 15, Paragraph 15.247(d)	Out of Band Emission and Restricted Band Radiation Limit: 20dB less than peak value of fundamental frequency Restricted band limit: Table 15.209	PASS	Complies

3.2 **Test Standards**

FCC Part 15 Subpart & Subpart C, Paragraph 15.247

EUT Modification 4.0

No modification by SHENZHEN TIMEWAY TESTING LABORATORIES.

Page 8 of 50


Report No.: FCC1909104-01

Date: 2019-09-21



5.Power Line Conducted Emission Test

5.1 Schematics of the test

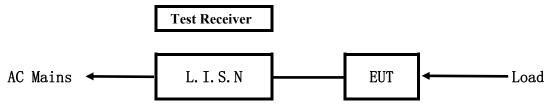


EUT: Equipment Under Test

5.2 Test Method and test Procedure

The EUT was tested according to ANSI C63.10-2013. The Frequency spectrum From 0.15 MHz to 30MHz was investigated. The LISN used was 50 ohm/50 uH as specified by section 5.1 of ANSI C63.10 -2013.

Test Voltage: 120V~, 60Hz Block diagram of Test setup

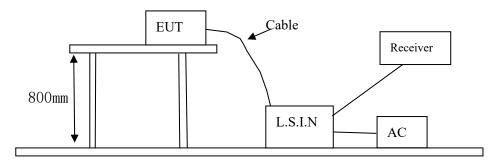

5.3 Configuration of The EUT

The EUT was configured according to ANSI C63.10-2013. All interface ports were connected to the appropriate peripherals. All peripherals and cables are listed below.

A. EUT

Device		Manufacturer		FCC ID
Wireless Blue	tooth Headset	Shenzhen Jingwah Information Technology Co., Ltd.	BKH600	RBD-BKH600

Report No.: FCC1909104-01 Page 9 of 50

Date: 2019-09-21



B. Internal Device

Device	Manufacturer	Model	Rating

C. Peripherals

Device	Manufacturer	Model	Rating
Power Supply	h.TV	S012BES0500200	Input: 100-240V~, 50/60Hz, 0.5A;
			Output: DC5V, 2A

5.4 EUT Operating Condition

Operating condition is according to ANSI C63.10-2013.

- A Setup the EUT and simulators as shown on follow
- B Enable AF signal and confirm EUT active to normal condition

5.5 Power line conducted Emission Limit according to Paragraph 15.207 and 15.107

Frequency	Class A Lim	its (dB µ V)	Class B Limits (dB µ V)			
(MHz)	Quasi-peak Level	Average Level	Quasi-peak Level	Average Level		
$0.15 \sim 0.50$	79.0	66.0	66.0~56.0*	56.0~46.0*		
$0.50 \sim 5.00$	73.0	60.0	56.0	46.0		
5.00 ~ 30.00	73.0	60.0	60.0	50.0		

Notes:

- 1. *Decreasing linearly with logarithm of frequency.
- 2. The tighter limit shall apply at the transition frequencies

5.6 Test Results

The frequency spectrum from 0.15MHz to 30MHz was investigated. All reading are quasi-peak values with a resolution bandwidth of 9kHz.

Date: 2019-09-21



A: Conducted Emission on Live Terminal (150kHz to 30MHz)

EUT Operating Environment


Temperature: 26°C Humidity: 65%RH Atmospheric Pressure: 101 KPa

EUT set Condition: Keep Bluetooth Transmitting

Equipment Level: Class B

Results: PASS

Please refer to following diagram for individual

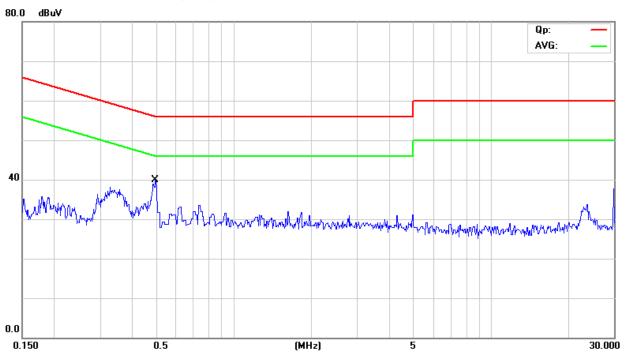

No. Mk.	Freq.			Measure- ment	Limit	Over		
	MHz	dBu∀	dB	dBu∀	dBu∀	dB	Detector	Comment
1 *	0.4931	20.00	9.77	29.77	56.12	-26.35	QP	
2	0.4931	-8.30	9.77	1.47	46.12	-44.65	AVG	

Date: 2019-09-21



B: Conducted Emission on Neutral Terminal (150kHz to 30MHz)

EUT Operating Environment


Temperature: 26°C Humidity: 65%RH Atmospheric Pressure: 101 KPa

EUT set Condition: Keep Bluetooth Transmitting

Equipment Level: Class B

Results: Pass

Please refer to following diagram for individual

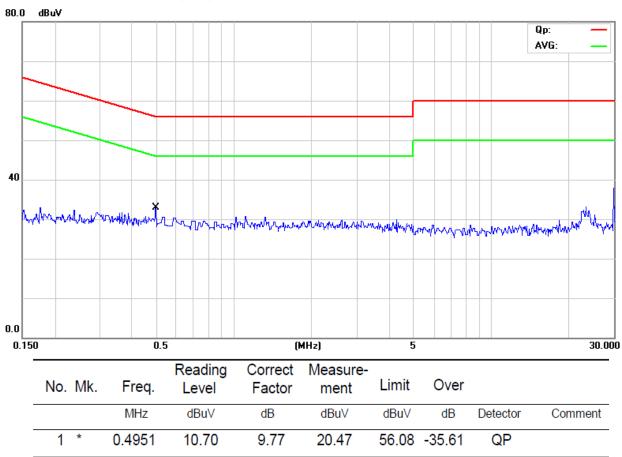

Note: the measured QP value less than the AV limit value.

Report No.: FCC1909104-01 Page 12 of 50


Date: 2019-09-21



6 Radiated Emission Test

- 6.1 Test Method and test Procedure:
- (1) The EUT was tested according to ANSI C63.10-2013. The radiated test was performed at Timeway EMC Laboratory. This site is on file with the FCC laboratory division, Registration No.744189
- (2) The EUT, peripherals were put on the turntable which table size is 1m x 1.5 m, table high 0.8 m. All set up is according to ANSI C63.10-2013.
- (3) The frequency spectrum from 30 MHz to 25 GHz was investigated. All readings from 30 MHz to 1 GHz are Quasi-peak values with a resolution bandwidth of 120 kHz. For measurement above 1GHz, peak values with RBW=1MHz VBW=3MHz and PK detector. AV value with RBW=1MHz, VBW=3MHz and RMS detector. Measurements were made at 3 meters.
- (4) The antenna high is varied from 1 m to 4 m high to find the maximum emission for each frequency.
- (5) Maximizing procedure was performed on the six (6) highest emissions to ensure EUT compliance is with all installation combinations. All data was recorded in the peak detection mode. Quasi-peak readings was performed only when an emission was found to be marginal (within -4 dB of specification limit), and are distinguished with a "QP" in the data table.
- (6) The antenna polarization: Vertical polarization and Horizontal polarization.

Block diagram of Test setup

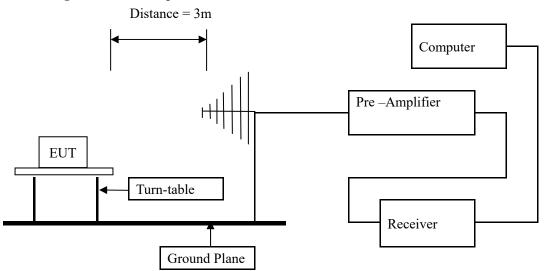

- 6.2 Configuration of The EUT

 Same as section 5.3 of this report
- 6.3 EUT Operating Condition
 Same as section 5.4 of this report.

The report refers only to the sample tested and does not apply to the bulk.

Report No.: FCC1909104-01 Page 13 of 50

Date: 2019-09-21



6.4 Radiated Emission Limit

All emission from a digital device, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strength specified below:

Frequencies in restricted band are complied to limit on Paragraph 15.209 and 15.109

		-
Frequency Range (MHz)	Distance (m)	Field strength (dB μ V/m)
30-88	3	40.0
88-216	3	43.5
216-960	3	46.0
Above 960	3	54.0

Note:

- 1. RF Voltage (dBuV) = 20 log RF Voltage (uV)
- 2. In the Above Table, the higher limit applies at the band edges.
- 3. Distance refers to the distance in meters between the measuring instrument antenna and the EUT

Page 14 of 50

Report No.: FCC1909104-01

Date: 2019-09-21



Test result

General Radiated Emission Data and Harmonics Radiated Emission Data


Radiated Emission In Horizontal (30MHz----1000MHz)

EUT set Condition: Keep Bluetooth Transmitting

Results: Pass

Test Figure:

FCC_FCC Part 15B Class B 30MHz-1GHz

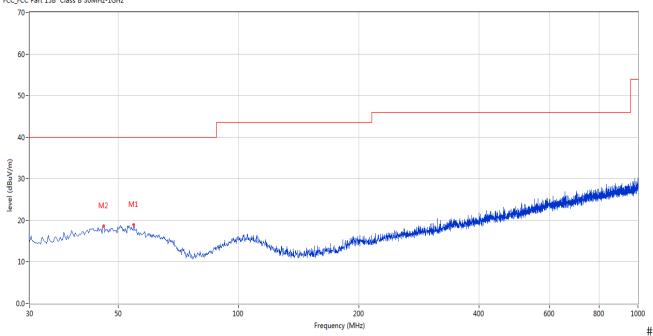

No.	Frequency	Results	Factor (dB)	Limit	Over Limit	Detector	Table	Height	ANT	Verdict
	(MHz)	(dBuV/m)		(dBuV/m)	(dB)		(o)	(cm)		
1	54.729	18.87	-11.72	40.0	-21.13	Peak	293.00	200	Н	Pass
2	46.001	18.57	-11.40	40.0	-21.43	Peak	89.00	100	Н	Pass

Report No.: FCC1909104-01 Page 15 of 50

Date: 2019-09-21



Test result

General Radiated Emission Data and Harmonics Radiated Emission Data


Radiated Emission In Vertical (30MHz----1000MHz)

EUT set Condition: Keep Transmitting

Results: Pass

Test Figure:

FCC_FCC Part 15B Class B 30MHz-1GHz

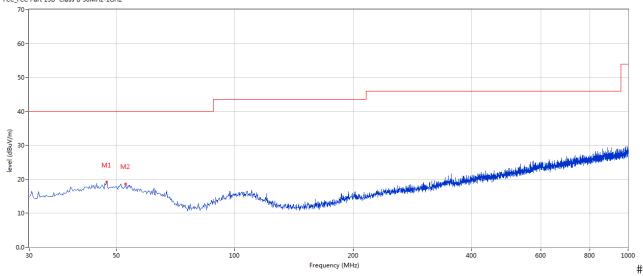

No.	Frequency	Results	Factor	Limit	Over Limit	Detector	Table (o)	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)			(cm)		
1	47.213	19.22	-11.41	40.0	-20.78	Peak	339.00	100	V	Pass
2	52.789	18.67	-11.48	40.0	-21.33	Peak	300.00	100	V	Pass

Report No.: FCC1909104-01 Page 16 of 50

Date: 2019-09-21




Test Figures above 1GHz:

Please refer to the following test plots for details:

Low Channel: Vertical

CE_FCC Part 15B Class B 1GHz-18GHz - 2

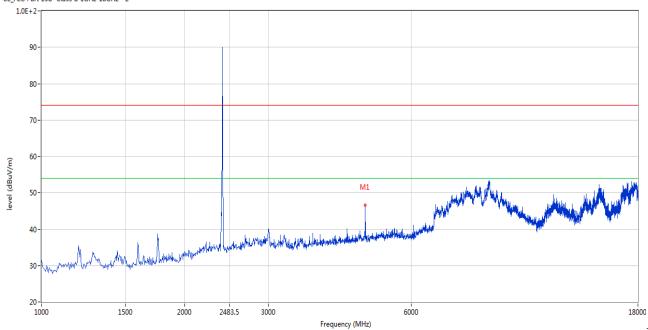


No.	Frequency	Results	Factor (dB)	Limit	Over Limit	Detector	Table	Height	ANT	Verdict
	(MHz)	(dBuV/m)		(dBuV/m)	(dB)		(o)	(cm)		
1	4802.799	46.53	3.12	54.0	-7.47	Peak	187.00	100	V	Pass

Report No.: FCC1909104-01 Page 17 of 50

Date: 2019-09-21



Low Channel: Horizontal

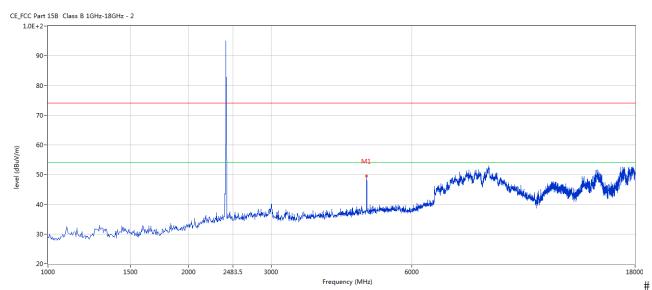


No.	Frequency	Results	Factor	Limit	Over Limit	Detector	Table (o)	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)			(cm)		
1	4802.799	49.46	3.12	54.0	-4.54	Peak	286.00	100	Н	Pass

Page 18 of 50 Report No.: FCC1909104-01

Date: 2019-09-21



Middle Channel: Vertical

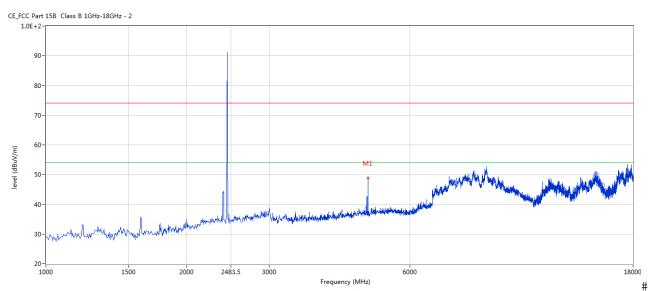


No.	Frequency	Results	Factor	Limit	Over Limit	Detector	Table (o)	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)			(cm)		
1	4879.280	48.89	3.20	54.0	-5.11	Peak	157.00	100	V	Pass

Page 19 of 50 Report No.: FCC1909104-01

Date: 2019-09-21



Middle Channel: Horizontal

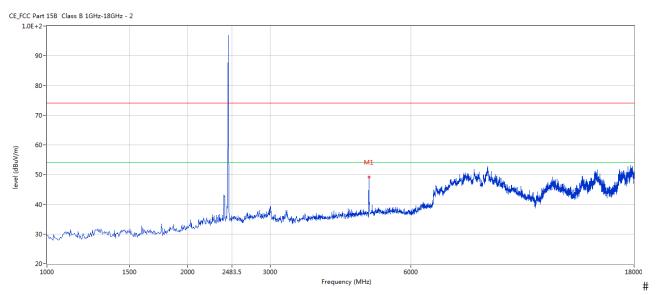


No.	Frequency	Results	Factor	Limit	Over Limit	Detector	Table (o)	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)			(cm)		
1	4879.280	49.25	3.20	54.0	-4.75	Peak	281.00	100	Н	Pass

Page 20 of 50 Report No.: FCC1909104-01

Date: 2019-09-21



High Channel: Vertical

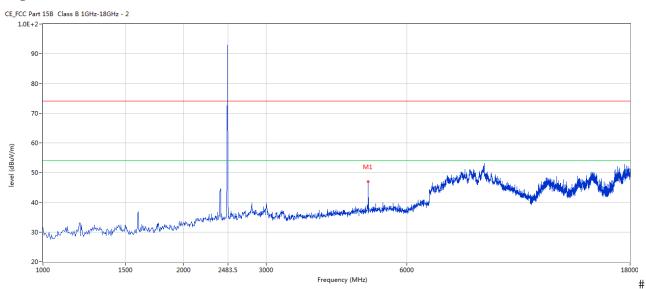

No.	Frequency	Results	Factor	Limit	Over Limit	Detector	Table (o)	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)			(cm)		
1	4960.010	47.99	3.36	54.0	-6.01	Peak	360.00	100	V	Pass


Page 21 of 50

Report No.: FCC1909104-01

Date: 2019-09-21



High Channel: Horizontal

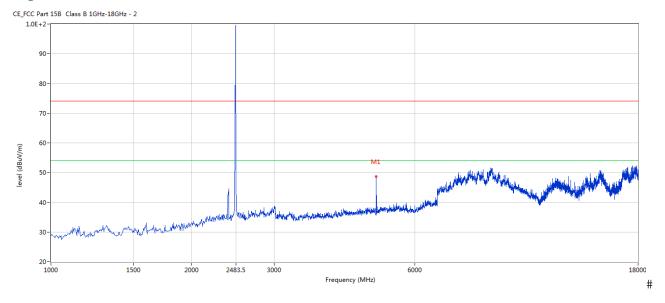

No.	Frequency	Results	Factor	Limit	Over Limit	Detector	Table (o)	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)			(cm)		
1	4960.010	48.70	3.36	54.0	-5.30	Peak	280.00	100	Н	Pass

#

Note: 1. Level = Reading + AF + Cable - Preamp

- 2. For the radiated emissions above 18G, it is the floor noise.
- 3. The measured PK value less than the AV limit, no necessary to take down the AV measurement result.

Page 22 of 50


Report No.: FCC1909104-01

Date: 2019-09-21



7.0 6dB Bandwidth Measurement

7.1 Test Setup



7.2 Limits of 6dB Bandwidth Measurement

The minimum of 6dB Bandwidth Measurement is >500 kHz

7.3 Test Procedure

- 1. Set resolution bandwidth (RBW) = 100 kHz
- 2. Set the video bandwidth (VBW) \geq 3 x RBW.
- 3. Detector = Peak.
- 4. Trace mode = \max hold.
- 5. Sweep = auto couple.
- 6. Allow the trace to stabilize.
- 7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

7.4 Test Result

Page 23 of 50 Report No.: FCC1909104-01

Date: 2019-09-21



6dB BW

ab b · ·								
EUT	Wire	less Blueto	ooth Headset	Model		BKH600		
Mode]	Keep Trans	Input Voltag	e	DC3.7V			
Temperati	ıre	24 deg	Humidity		56% RH			
Channel				andwidth Hz)	Minimum Limit (kHz)		Pass/ Fail	
Low	ow 2402		709			0.5	Pass	
Middle	ddle 2440		691			0.5	Pass	
High	High 2480		691			0.5	Pass	

Page 24 of 50


Report No.: FCC1909104-01

Date: 2019-09-21



Test Figure:

1. Condition: Low Channel

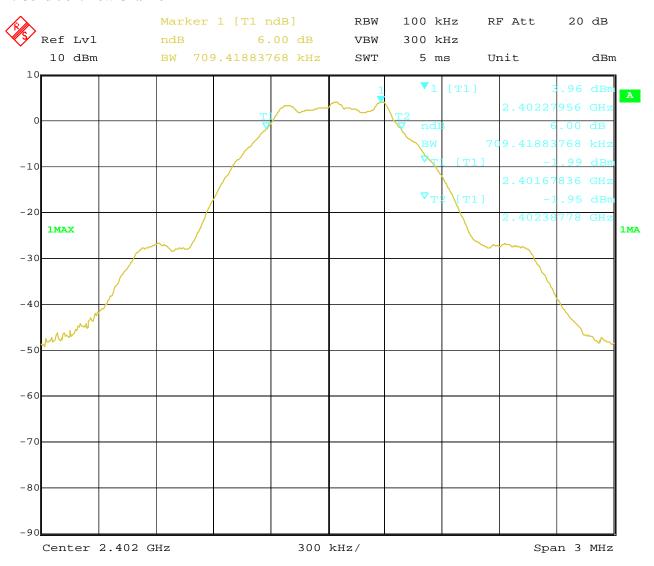

Date: 18.SEP.2019 14:38:16


Page 25 of 50

Report No.: FCC1909104-01

Date: 2019-09-21



2. Condition: Middle Channel

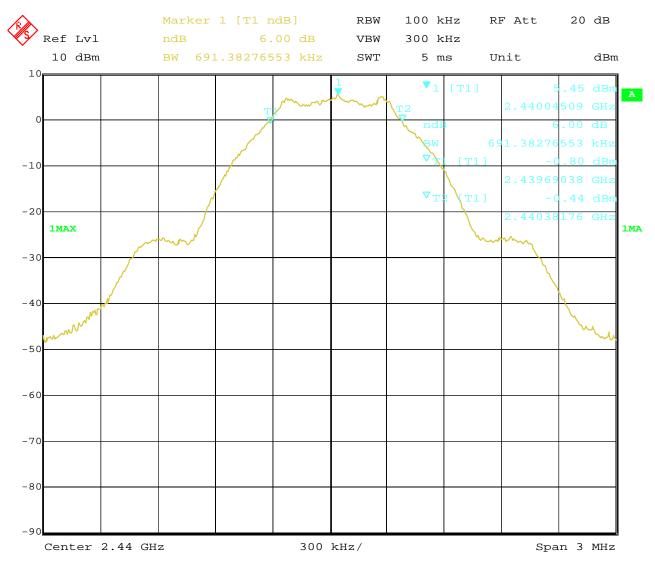


Date: 18.SEP.2019 14:40:13

Report No.: FCC1909104-01 Page 26 of 50

Date: 2019-09-21



3. High Channel

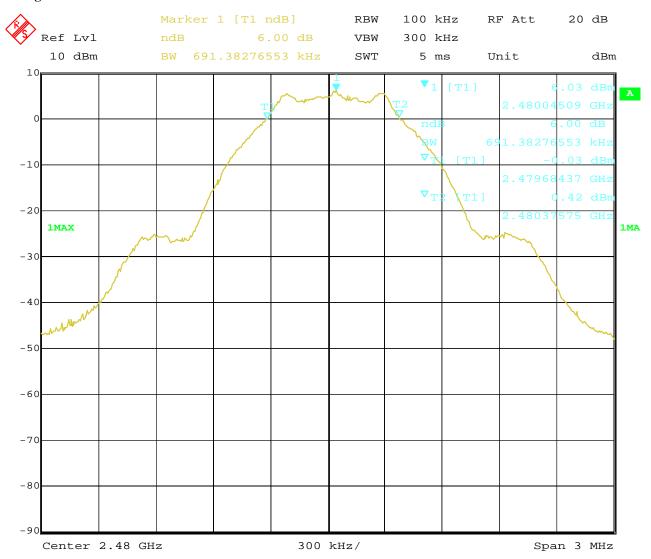

Date: 18.SEP.2019 14:43:24

Report No.: FCC1909104-01


Date: 2019-09-21



Page 27 of 50

8. Maximum Output Power

8.1 Test Setup



8.2 Limits of Maximum Output Power

The Maximum Output Power Measurement is 30dBm.

8.3 Test Procedure

The RF power output was measured with a Power meter connected to the RF Antenna connector (conducted measurement) while EUT was operating in transmit mode at the appropriate centre frequency.

Note: the Peak power were measured.

Report No.: FCC1909104-01 Page 28 of 50

Date: 2019-09-21



8.4Test Results

EUT	EUT Wireless Bluetoot		th Headset	Model		BKH60	0
Mode		Keep Transmitting		Input Voltage	DC3.7V		
Temperature		24 deg. C,		Humidity	56% RH		
Channel	Channel Frequency		Max	Max. Power Output (dBm)			Pass/ Fail
Chamer		(MHz)		Peak			
Low		2402	5.47			30	Pass
Middle	2440			6.21		30	Pass
High	High 2480		6.68		30	Pass	

Note: 1. the result basic equation calculation as follow:

Max. Power Output = Power Reading + Cable loss + Attenuator


Report No.: FCC1909104-01 Page 29 of 50

Date: 2019-09-21



9. Power Spectral Density Measurement

9.1 Test Setup



9.2 Limits of Power Spectral Density Measurement

The Maximum Power Spectral Density Measurement is 8dBm.

9.3 Test Procedure

- 1. Use this procedure when the maximum peak conducted output power in the fundamental emission is used to demonstrate compliance.
- 2. Set the RBW = 10 kHz.
- 3. Set the VBW \geq 30 kHz.
- 4. Set the span to 1.5 times the DTS channel bandwidth.
- 5. Detector = peak.
- 6. Sweep time = auto couple.
- 7. Trace mode = max hold.
- 8. Allow trace to fully stabilize.
- 9. Use the peak marker function to determine the maximum amplitude level.
- 10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.
- 11. The resulting peak PSD level must be ≤ 8 dBm.

Page 30 of 50 Report No.: FCC1909104-01

Date: 2019-09-21



9.4Test Result

EUT		Wireles	ss Bluetooth	Headset	Model	ВІ	KH600
Mode		Keep Transmitting			Input	DC3.7V	
					Voltage		
Temperature			24 deg. C,	C, Humidity		56	5% RH
Channel	Re	Power ading Bm)	Cable Loss (dB)	Final Po	wer Spectral ty (dBm)	Maximum Limit (dBm)	Pass/ Fail
Low	Low -5.06		0.2	-	-4.86	8	Pass
Middle	-5.37		0.2	-5.17		8	Pass
High	-,	3.29	0.2	-	-3.09	8	Pass

Note: The result basic equation calculation as follow:

Peak Power Output = Peak Power Reading + Cable loss

Page 31 of 50


Report No.: FCC1909104-01

Date: 2019-09-21



Test Figure:

1. Condition: Low Channel

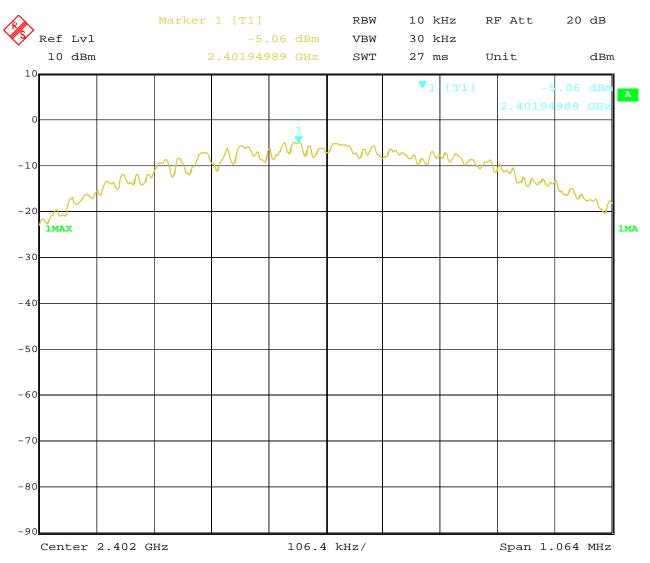

Date: 18.SEP.2019 14:49:58


Page 32 of 50

Report No.: FCC1909104-01

Date: 2019-09-21



2. Condition: Middle Channel

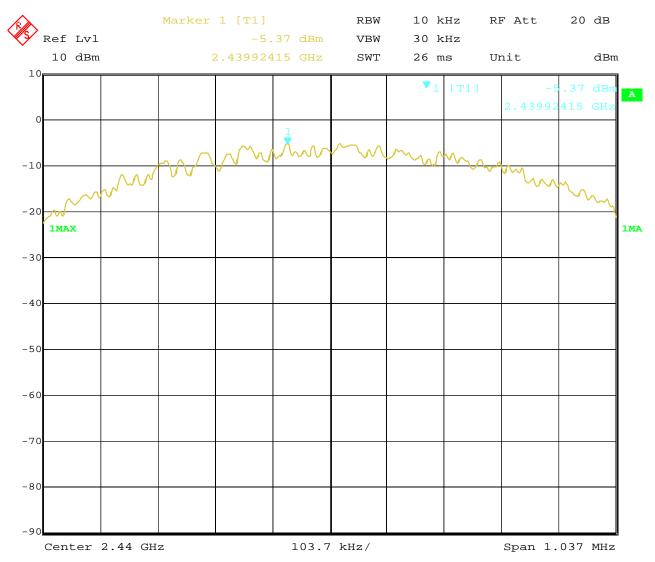


Date: 18.SEP.2019 14:51:19

Report No.: FCC1909104-01 Page 33 of 50

Date: 2019-09-21



3. High Channel

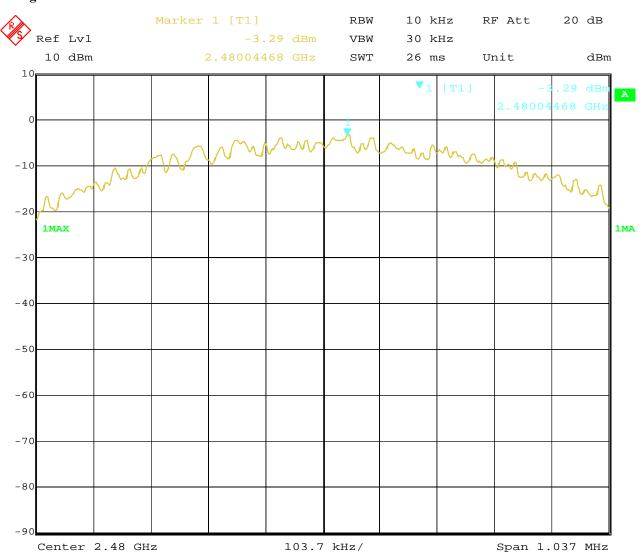

Date: 18.SEP.2019 14:54:12


Report No.: FCC1909104-01 Page 34 of 50

Date: 2019-09-21



10 Out of Band Measurement

10.1 Test Setup for band edge



The restricted band requirement based on radiated emission test; please see the clause 6 for the test setup

10.2 Limits of Out of Band Emissions Measurement

- 1. Below –20dB of the highest emission level of operating band (in 100kHz Resolution Bandwidth).
- 2. Fall in the restricted bands listed in section 15.205. The maximum permitted average field strength is listed in section 15.209.

10.3 Test Procedure

For signals in the restricted bands above and below the 2.4-2.483GHz allocated band a measurement was made of Radiated emission test. (Peak values with RBW=1MHz, VBW=3MHz and PK detector. AV value with RBW=1MHz, VBW=3MHz and RMS detector)

For bandage test, the spectrum set as follows: RBW=100 kHz, VBW=300 kHz. A conducted measurement used

10.4 Test Result

Please see next pages

Note: 1. For band-edge measurement, the frequency from 30MHz-25GHz was tested. And It met the FCC rule.

Page 35 of 50

Report No.: FCC1909104-01


Date: 2019-09-21



10.4 Band-edge Measurement

EUT	Wireless Bluetooth Headset	Model	BKH600
Mode	Keep Transmitting	Input Voltage	DC3.7V
Temperature	24 deg. C,	Humidity	56% RH
Test Result:	Pass	Detector	PK

Test Figure:

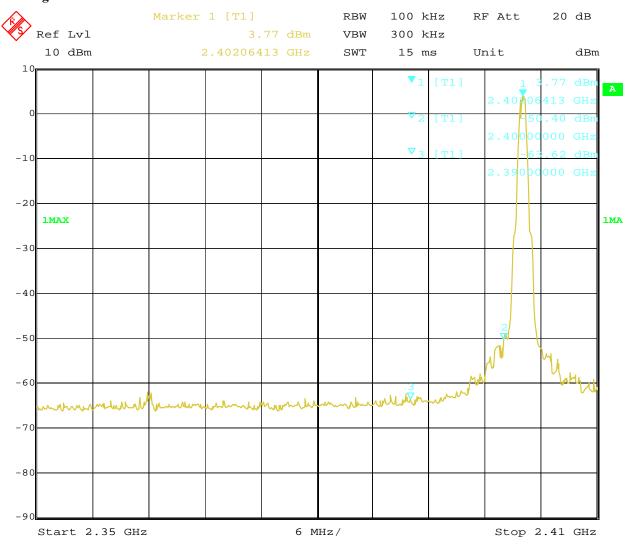

Date: 18.SEP.2019 14:57:46

Note: The Max. FS in Restrict Band are measured in conventional method.

Page 36 of 50

Report No.: FCC1909104-01


Date: 2019-09-21



10.4 Band-edge Measurement

EUT	Wireless Bluetooth Headset	Model	BKH600
Mode	Keeping Transmitting	Input Voltage	DC3.7V
Temperature	24 deg. C,	Humidity	56% RH
Test Result:	Pass	Detector	PK

Test Figure:

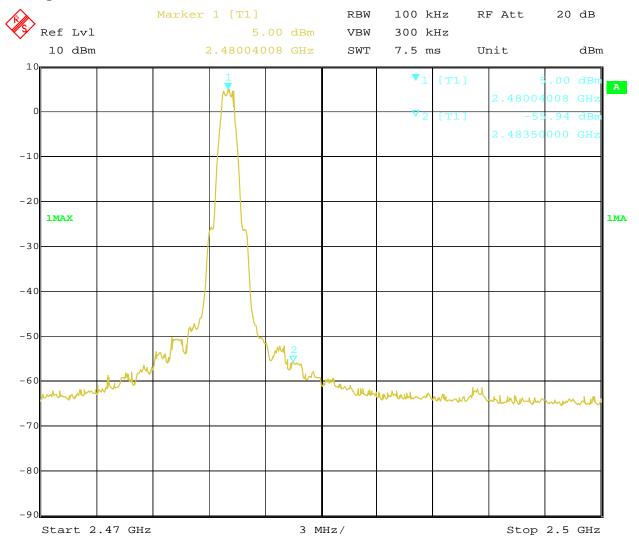

Date: 18.SEP.2019 14:56:15

Note: The Max. FS in Restrict Band are measured in conventional method.


Report No.: FCC1909104-01 Page 37 of 50

Date: 2019-09-21



10.4 Restrict Band Measurement

EUT	Wireless Bluetooth Headset	Model	BKH600
Mode	Keep Transmitting	Input Voltage	DC3.7V
Temperature	24 deg. C,	Humidity	56% RH
Test Result:	Pass		

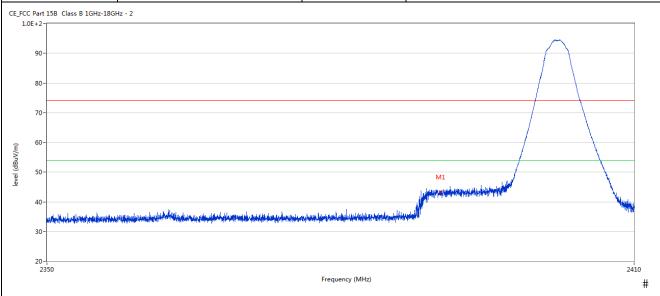

No.	Frequency	Results	Factor	Limit	Over Limit	Detector	Table (o)	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)			(cm)		
1	2390	43.34	-3.53	54.0	-10.66	Peak	56.00	100	Н	Pass
			•			•	•		•	

Report No.: FCC1909104-01 Page 38 of 50

Date: 2019-09-21



10.4 Restrict Band Measurement

EUT Wi Mode		Wireless	Blueto	oth Headset	t	Model		I	3KH600		
		Kee	Keep Transmitting		Inp	Input Voltage		DC3.7V			
Te	emperature		24 deg. C,		I	Humidity		56% RH			
T	est Result:		Pass								
	Part 15B Class B 1GHz-18	GHz - 2					·				
1.0E	+2-										
	90-										
	80-								$/\!\!\!\!/$		
									/		
	70-										
Ê	60-							/		,	
level (dBuV/m)	50-										
eve	30-						M1	Will be well the state of the s			
	20-				5 0					2410	
					Frequency (M	lHZ)					
_	1_	T T.				T	T	T	T	T.,	
No.	Frequency		Factor	Limit	Over Limit	Detector	Table (o)	Height	ANT	Verdict	
	(MHz)	·	(dB)	(dBuV/m)	(dB)			(cm)			
1	2390	44.12	-3.53	54.0	-9.88	Peak	0.00	100	V	Pass	


Page 39 of 50 Report No.: FCC1909104-01

Date: 2019-09-21



10.4 Restrict Band Measurement

EUT	Wireless Bluetooth Headset	Model	BKH600
Mode	Keep Transmitting	Input Voltage	DC3.7V
Temperature	24 deg. C,	Humidity	56% RH
Test Result:	Pass		

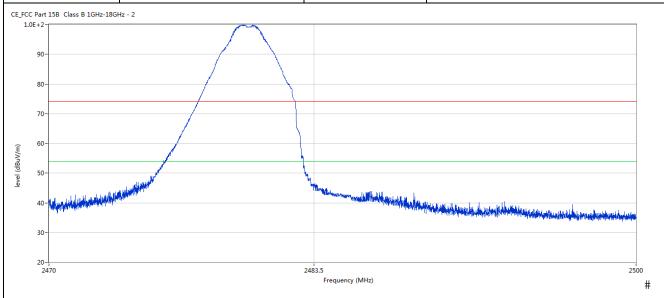

No.	Frequency	Results	Factor	Limit	Over Limit	Detector	Table (o)	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)			(cm)		
1	2483.5	46.39	-3.57	54.0	-7.61	Peak	283.00	100	Н	Pass

Page 40 of 50

Report No.: FCC1909104-01

Date: 2019-09-21



10.4 Restrict Band Measurement

	EUT	Wireless	Bluetoo	th Headset	Mode	1	BKH600					
Mode		Keep Transmitting			Input Voltage	tage	DC3.7V					
Te	mperature	24 deg. C,			Humidity	ty	56% RH					
Te	est Result:		Pass									
E_FCC P	art 15B Class B 1GHz-18	GHz - 2										
ç	30-											
7	70-				\							
(w//w	50 -											
level (dBuV/m)	50-											
	10-	Lugarete a ja terlingt in the state of the s					ang de langh bet der die Agent het werd gerijke de	مهاونها والمادة والمعادمة	oth de plate de la company	d _{er} denide fild platfild yn it deilang.		
2	20-					2483.5 2500						
	24/0				Frequency (N	MHz)				2300		
No.	Frequency	Results	Factor	Limit	Over Limit	Detector	Table (o)	Height	ANT	Verdict		
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)			(cm)				
	2483.5	43.38	-3.57	54.0	-10.62	Peak	360.00	100	V	Pass		

Note: The measured PK value less than the AV limit, no necessary to take down the AV measurement result.

Date: 2019-09-21



Page 41 of 50

11.0 Antenna Requirement

11.1 Standard Applicable

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to FCC 47 CFR Section 15.247 (b), if transmitter antennas of directional gain greater than 6 dBi are used, the power shall be reduced by the mount in dB that the directional gain of the antenna exceeds 6 dBi.

11.2 Antenna Connected construction

Integral antenna used. The gain of the antennas is -1.65dBi.

Report No.: FCC1909104-01 Page 42 of 50

Date: 2019-09-21




12.0 FCC ID Label

FCC ID: RBD-BKH600

The label must not be a stick-on paper label. The label on these products must be permanently affixed to the product and readily visible at the time of purchase and must last the expected lifetime of the equipment not be readily detachable.

Mark Location:

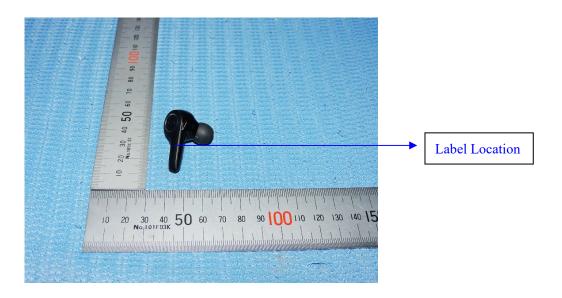

Page 43 of 50


Report No.: FCC1909104-01

Date: 2019-09-21



13.0 **Photo of testing**

Conducted Emission Test Setup:

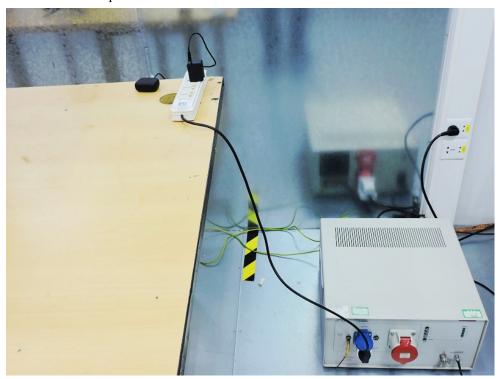


Page 44 of 50


Report No.: FCC1909104-01

Date: 2019-09-21



Radiated Emission Test Setup:

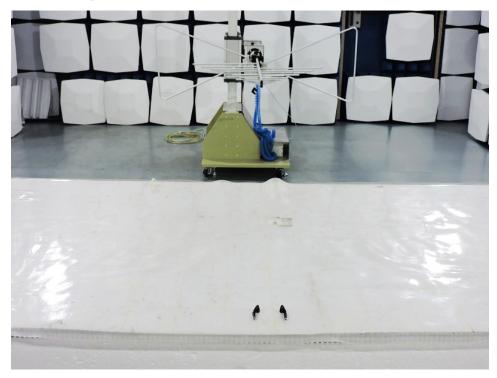

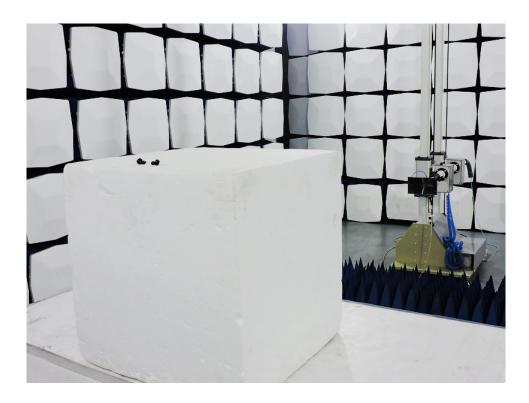

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to

adopt any other remedies which may be appropriate.

Date: 2019-09-21



Photographs - EUT





The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to

adopt any other remedies which may be appropriate.

Date: 2019-09-21



Photographs - EUT



Page 47 of 50

Report No.: FCC1909104-01

Date: 2019-09-21



Photographs - EUT



The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to

adopt any other remedies which may be appropriate.

Date: 2019-09-21




Photographs - EUT




Date: 2019-09-21



Photographs - EUT

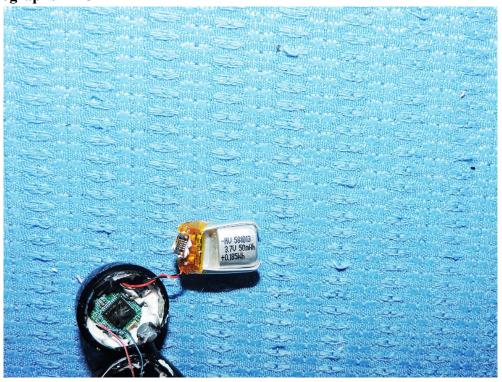

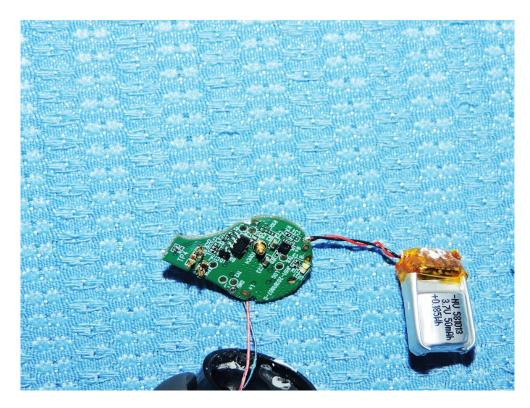

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any

discussion of correspondence with any third party concerning the contents of the report.


In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES, reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Report No.: FCC1909104-01 Page 50 of 50

Date: 2019-09-21



Photographs - EUT

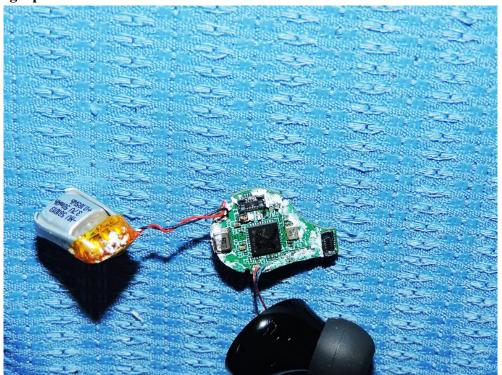

End of the report