

FCC PART 15 SUBPART C TEST REPORT**FCC PART 15 SUBPART E 15.407****Report Reference No..... : MK23122510P01-R01****FCC ID..... : 2AKLL-ADM5**Compiled by
(position+printed name+signature)..: Engineer/ Cindy Zheng

Cindy Zheng

Supervised by
(position+printed name+signature)..: Manager/Haley Wen

Haley Wen

Approved by
(position+printed name+signature)..: RF Manager/ Vivian Jiang

Vivian Jiang

Date of issue.....: January 16, 2024

Testing Laboratory Name..... : BSL Testing Co., Ltd.Address.....: 1/F, Building B, Xinshidai GR Park, Shiyan Street, Bao'an District,
Shenzhen, Guangdong, 518052, People's Republic of China**Applicant's name..... : Zhejiang Flashforge 3D Technology CO., Ltd.**

Address.....: No. 518, Xianyuan Road, Jinhua, Zhejiang, China

Test specification..... :**FCC CFR Title 47 Part 15 Subpart C Section 15.407**Standard.....: **ANSI C63.10:2013****KDB 789033 D02 v02r01****BSL Testing Co., Ltd. All rights reserved.**

This publication may be reproduced in whole or in part for non-commercial purposes as long as the BSL Testing Co., Ltd. is acknowledged as copyright owner and source of the material. BSL Testing Co., Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

Test item description..... : 3D PrinterTrade Mark.....:  **FLASHFORGE®**

Manufacturer.....: Zhejiang Flashforge 3D Technology CO., Ltd.

Model/Type reference.....: Adventurer 5M

Listed Models: N/A

Modulation Type.....: OFDM

Operation Frequency.....: From 5180MHz-5240MHz, 5745MHz-5825MHz

Rating.....: AC 100-120/220-240V, 50-60Hz, 350W

Result.....: **PASS**



TEST REPORT

Equipment under Test : **3D Printer**

Model /Type : Adventurer 5M

Series Model No. : N/A

Model Declaration : N/A

Applicant : **Zhejiang Flashforge 3D Technology CO., Ltd.**

Address : No. 518, Xianyuan Road, Jinhua, Zhejiang, China

Manufacturer : **Zhejiang Flashforge 3D Technology CO., Ltd.**

Address : No. 518, Xianyuan Road, Jinhua, Zhejiang, China

Test Result:	PASS
---------------------	-------------

The test report merely corresponds to the test sample.
It is not permitted to copy extracts of these test result without the written permission of the test laboratory.

Contents

1 TEST STANDARDS	4
2 SUMMARY	5
2.1 General Remarks.....	5
2.2 Product Description.....	5
2.3 Equipment Under Test.....	5
2.4 Short description of the Equipment under Test (EUT).....	6
2.5 EUT operation mode.....	6
2.6 Block Diagram of Test Setup.....	6
2.7 Related Submittal(s) / Grant (s).....	6
2.8 Modifications.....	6
3 TEST ENVIRONMENT	7
3.1 Address of the test laboratory.....	7
3.2 Test Facility.....	7
3.3 Environmental conditions.....	7
3.4 Test Description.....	8
3.5 Statement of the measurement uncertainty.....	8
3.6 Equipments Used during the Test.....	9
4 TEST CONDITIONS AND RESULTS	11
4.1 AC Power Conducted Emission.....	11
4.2 Radiated Emission.....	20
4.3 Maximum Peak Conducted Output Power.....	33
4.4 Power Spectral Density.....	36
4.5 Emission Bandwidth (26dBm Bandwidth).....	43
4.6 Minimum Emission Bandwidth (6dBm Bandwidth).....	47
4.7 Out of Band Emissions.....	51
4.8 SPURIOUS RF CONDUCTED EMISSIONS.....	56
4.9 Frequency Stability.....	62
4.10 Antenna Requiremen.....	64
5 TEST SETUP PHOTOS OF THE EUT	65
6 PHOTOS OF THE EUT	66



1 TEST STANDARDS

The tests were performed according to following standards:

[CC Rules Part 15 Subpart E](#)—Unlicensed National Information Infrastructure Devices

[ANSI C63.10-2013](#): American National Standard for Testing Unlicensed Wireless Devices

[KDB789033 D02](#): General UNII Test Procedures New Rules v02r01

2 SUMMARY

2.1 General Remarks

Date of receipt of test sample	:	December 25, 2023
Testing commenced on	:	December 25, 2023
Testing concluded on	:	January 15, 2024

2.2 Product Description

Product Name:	3D Printer			
Model/Type reference:	Adventurer 5M			
Power supply:	AC 100-120/220-240V,50-60Hz, 350W			
Adapter information	N/A			
testing sample ID:	MK23122510P01-R01-1# (Engineer sample), MK23122510P01-R01-2# (Normal sample)			
Hardware version:	V1.0			
Software version:	V1.0			
WIFI :				
Supported type:	20MHz system	40MHz system	80MHz system	160MHz system
	802.11a 802.11n 802.11ac	802.11n 802.11ac	802.11ac	N/A
Modulation:	5180MHz-5240MHz 5745MHz-5825MHz	5190MHz-5230MHz 5755MHz-5795MHz	5210MHz 5775MHz	N/A
Operation frequency:	OFDM	OFDM	OFDM	N/A
Channel number:	9	4	2	N/A
Channel separation:	20MHz	40MHz	80MHz	N/A
Antenna type:	FPC antenna			
Data Rate:	802.11a: 6,9,12,18,24,36,48, 54Mbps; 802.11n(HT20/HT40):MCS0-MCS7; 802.11ac(HT20): Ncc1 MCS0-Ncc1 MCS8 802.11ac(HT40/HT80):MCS0-MCS9			
Antenna gain:	4.9 dBi			

2.3 Equipment Under Test

Power supply system utilised

Power supply voltage	:	☐ 230V / 50 Hz	☐ 120V / 60Hz
		☐ 5 V DC	☐ 24 V DC
		☒ Other (specified in blank below) AC 100-120/220-240V	

2.4 Short description of the Equipment under Test (EUT)

This is 3D Printer.

For more details, refer to the user's manual of the EUT.

2.5 EUT operation mode

The Applicant provides communication tools software (AT command) to control the EUT for staying in continuous transmitting (Duty Cycle more than 98%) and receiving mode for testing.


All test performed at the low, middle and high of operational frequency range of each mode.

Operation Frequency List WIFI on 5G Band:

Operating band	20MHz		40MHz		80MHz	
	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
U-NII 1 (5150MHz-5250MHz)	36	5180	38	5190	42	5210
	40	5200				
	44	5220	46	5230		
	48	5240				
U-NII 3 (5725MHz-5850MHz)	149	5745	151	5755	155	5775
	153	5765				
	157	5785	159	5795		
	161	5805				
	165	5825				

Note: The line display in grey is those Channels/Frequencies select to test in this report for each operation mode.

2.6 Block Diagram of Test Setup

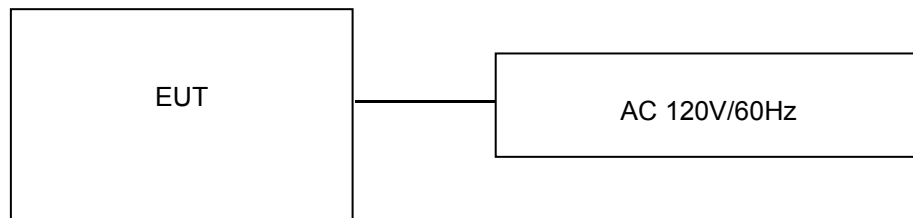

2.7 Related Submittal(s) / Grant (s)

This submittal(s) (test report) is intended for filing to comply with Section 15.407 of the FCC Part 15, Subpart E Rules.

2.8 Modifications

No modifications were implemented to meet testing criteria.

3 TEST ENVIRONMENT

3.1 Address of the test laboratory

BSL Testing Co., Ltd.

1/F, Building B, Xinshidai GR Park, Shiyan Street, Bao'an District, Shenzhen, Guangdong, 518052, People's Republic of China

3.2 Test Facility

FCC-Registration No.: 562200 Designation Number: CN1338

BSL Testing Co.,Ltd. has been listed on the US Federal Communications Commission list of test facilities recognized to perform electromagnetic emissions measurements.

Industry Canada Registration Number. Is: 11093A CAB identifier: CN0019

The Laboratory has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing.

A2LA-Lab Cert. No.: 4707.01

BSL Testing Co.,Ltd. has been listed by American Association for Laboratory Accreditation to perform electromagnetic emission measurement.

The 3m-Semi anechoic test site fulfils CISPR 16-1-4 according to ANSI C63.10 and CISPR 16-1-4:2010.

3.3 Environmental conditions

During the measurement the environmental conditions were within the listed ranges:

Radiated Emission:

Temperature:	25 ° C
Humidity:	45 %
Atmospheric pressure:	950-1050mbar

Conducted testing:

Temperature:	25 ° C
Humidity:	44 %
Atmospheric pressure:	950-1050mbar

AC Power Conducted Emission

Temperature:	24 ° C
Humidity:	44 %
Atmospheric pressure:	950-1050mbar

3.4 Test Description

FCC Requirement		
FCC Part 15.207	AC Power Conducted Emission	PASS
FCC Part 15.407(a)	Emission Bandwidth(26dBm Bandwidth)	PASS ^{Note1}
FCC Part 15.407(e)	Minimum Emission Bandwidth(6dBm Bandwidth)	PASS ^{Note2}
FCC Part 15.407(a)	Maximum Conducted Output Power	PASS
FCC Part 15.407(a)	Peak Power Spectral Density	PASS
FCC Part 15.407(g)	Frequency Stability	PASS
FCC Part 15.407(b)	Undesirable emission	PASS
FCC Part 15.407(b)/15.205/15.209	Radiated Emissions	PASS
15.407(b)(1)/ 15.407(b)(2) 15.407(b)(3)/ 15.407(b)(4)	Band Edge	PASS
15.407(b)	Spurious Emissions at Antenna Terminals	PASS
FCC Part 15.407(h)	Dynamic Frequency Selection	N/A ^{Note 3}
FCC Part 15.203/15.247(b)	Antenna Requirement	PASS
FCC Part 15.407(c)	Automatically discontinue transmission	PASS ^{Note4}

Note 1: Apply to U-NII 1, U-NII 2A, and U-NII 2C band.

Note 2: Apply to U-NII 3 band only.

Note 3: This device not work in DFS band.

Note 4: While the EUT is not transmitting any information, the EUT can automatically discontinue transmission and become standby mode for power saving. The EUT can detect the controlling signal of ASK message transmitting from remote device and verify whether it shall resend or discontinue transmission. (Manufacturer declare)

Data Rate Used:

Preliminary tests were performed in different data rate to find the worst radiated emission. The data rate shown in the table below is the worst-case rate with respect to the specific test item. Investigation has been done on all the possible configurations for searching the worst cases. The following table is a list of the test modes shown in this test report.

Test Items	Mode	Data Rate
Maximum Conducted Output Power Power Spectral Density Emission Bandwidth(26dBm Bandwidth) Minimum Emission Bandwidth(6dBm Bandwidth) Undesirable emission Frequency Stability	11a/OFDM	6 Mbps
	11n(20MHz),11ac(20MHz)/OFDM	7.2 Mbps
	11n(40MHz),11ac(40MHz)/OFDM	15.0Mbps
	11ac(80MHz)/OFDM	65.0Mbps

3.5 Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. to TR-100028-01 "Electromagnetic compatibility and Radio spectrum Matters (ERM);Uncertainties in the measurement of mobile radio equipment characteristics; Part 1" and TR-100028-02 "Electromagnetic compatibility and Radio spectrum Matters (ERM);Uncertainties in the measurement of mobile radio equipment characteristics; Part 2 " and is documented in the BSL Testing Co., Ltd.quality system acc. to DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Hereafter the best measurement capability for BSL Testing Co., Ltd.

Test	Range	Measurement Uncertainty	Notes
Radiated Emission	30~1000MHz	4.06 dB	(1)
Radiated Emission	1~18GHz	5.14 dB	(1)
Radiated Emission	18-40GHz	5.38 dB	(1)
Conducted Disturbance	0.15~30MHz	2.14 dB	(1)

(1) This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

3.6 Equipments Used during the Test

Conducted Emission					
Test Equipment	Manufacturer	Model	Serial No.	Date of Cal.	Due Date
Shielding Room	ZhongYu Electron	7.3(L)x3.1(W)x2.9(H)	BSL252	2023-10-28	2024-10-27
EMI Test Receiver	R&S	ESCI 7	BSL552	2023-10-28	2024-10-27
Coaxial Switch	ANRITSU CORP	MP59B	BSL225	2023-10-28	2024-10-27
ENV216 2-L-V-NETZNACHB.DE	ROHDE&SCHWARZ	ENV216	BSL226	2023-10-28	2024-10-27
Coaxial Cable	BSL	N/A	BSL227	N/A	N/A
EMI Test Software	AUDIX	E3	N/A	N/A	N/A
Thermo meter	KTJ	TA328	BSL233	2023-10-28	2024-10-27
Absorbing clamp	Elektronik-Feinmechanik	MDS21	BSL229	2023-10-28	2024-10-27
LISN	R&S	ENV216	308	2023-10-28	2024-10-27
LISN	R&S	ENV216	314	2023-10-28	2024-10-27

Radiation Test equipment					
Test Equipment	Manufacturer	Model	Serial No.	Date of Cal.	Due Date
3m Semi- Anechoic Chamber	ZhongYu Electron	9.2(L)*6.2(W)* 6.4(H)	BSL250	2023-10-28	2024-10-27
Control Room	ZhongYu Electron	6.2(L)*2.5(W)* 2.4(H)	BSL251	N/A	N/A
EMI Test Receiver	Rohde & Schwarz	ESU26	BSL203	2023-10-28	2024-10-27
BiConiLog Antenna	SCHWARZBECK MESS-ELEKTRONIK	VULB9163	BSL214	2023-10-28	2024-10-27
Double -ridged waveguide horn	SCHWARZBECK MESS-ELEKTRONIK	BBHA 9120 D	BSL208	2023-10-28	2024-10-27
Horn Antenna	ETS-LINDGREN	3160	BSL217	2023-10-28	2024-10-27
EMI Test Software	AUDIX	E3	N/A	N/A	N/A
Coaxial Cable	BSL	N/A	BSL213	2023-10-28	2024-10-27
Coaxial Cable	BSL	N/A	BSL211	2023-10-28	2024-10-27
Coaxial cable	BSL	N/A	BSL210	2023-10-28	2024-10-27
Coaxial Cable	BSL	N/A	BSL212	2023-10-28	2024-10-27
Amplifier(100kHz-3GHz)	HP	8347A	BSL204	2023-10-28	2024-10-27
Amplifier(2GHz-20GHz)	HP	84722A	BSL206	2023-10-28	2024-10-27
Amplifier (18-26GHz)	Rohde & Schwarz	AFS33-18002 650-30-8P-44	BSL218	2023-10-28	2024-10-27


Band filter	Amindeon	82346	BSL219	2023-10-28	2024-10-27
Power Meter	Anritsu	ML2495A	BSL540	2023-10-28	2024-10-27
Power Sensor	Anritsu	MA2411B	BSL541	2023-10-28	2024-10-27
Wideband Radio Communication Tester	Rohde & Schwarz	CMW500	BSL575	2023-10-28	2024-10-27
Splitter	Agilent	11636B	BSL237	2023-10-28	2024-10-27
Loop Antenna	ZHINAN	ZN30900A	BSL534	2023-10-28	2024-10-27
Breitband hornantenne	SCHWARZBECK	BBHA 9170	BSL579	2023-10-28	2024-10-27
Amplifier	TDK	PA-02-02	BSL574	2023-10-28	2024-10-27
Amplifier	TDK	PA-02-03	BSL576	2023-10-28	2024-10-27
PSA Series Spectrum Analyzer	Rohde & Schwarz	FSP	BSL578	2023-10-28	2024-10-27

RF Conducted Test:					
Test Equipment	Manufacturer	Model	Serial No.	Date of Cal.	Due Date
MXA Signal Analyzer	Agilent	N9020A	BSL566	2023-10-28	2024-10-27
EMI Test Receiver	R&S	ESCI 7	BSL552	2023-10-28	2024-10-27
Spectrum Analyzer	Agilent	E4440A	BSL533	2023-10-28	2024-10-27
MXG vector Signal Generator	Agilent	N5182A	BSL567	2023-10-28	2024-10-27
ESG Analog Signal Generator	Agilent	E4428C	BSL568	2023-10-28	2024-10-27
USB RF Power Sensor	DARE	RPR3006W	BSL569	2023-10-28	2024-10-27
RF Switch Box	Shongyi	RFSW3003328	BSL571	2023-10-28	2024-10-27
Programmable Constant Temp & Humi Test Chamber	WEWON	WHTH-150L-40-880	BSL572	2023-10-28	2024-10-27

4 TEST CONDITIONS AND RESULTS

4.1 AC Power Conducted Emission

TEST CONFIGURATION

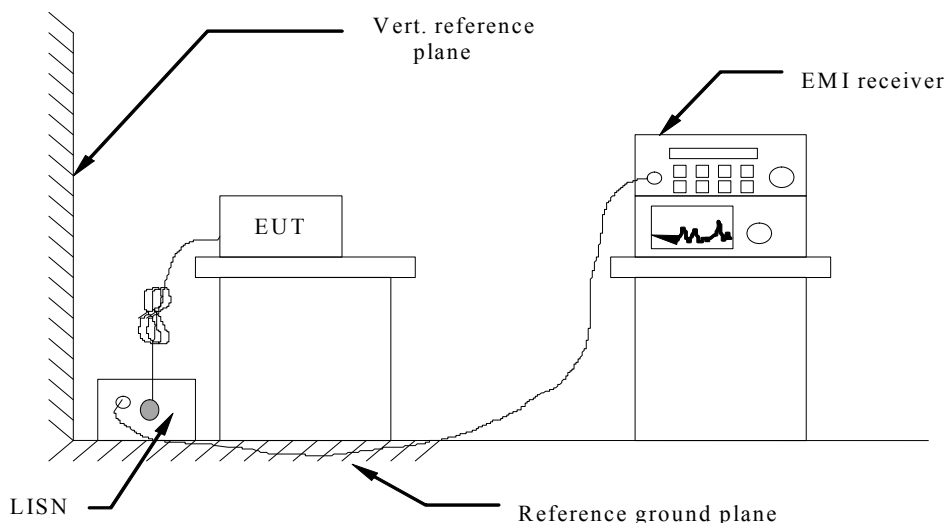

TEST PROCEDURE

- 1 The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. The EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.10-2013.
- 2 Support equipment, if needed, was placed as per ANSI C63.10-2013
- 3 All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10-2013
- 4 The EUT received power from adapter, the adapter received AC120V/60Hz and AC 240V/60Hz power through a Line Impedance Stabilization Network (LISN) which supplied power source and was grounded to the ground plane.
- 5 All support equipments received AC power from a second LISN, if any.
- 6 The EUT test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
- 7 Analyzer / Receiver scanned from 150 KHz to 30MHz for emissions in each of the test modes.
- 8 During the above scans, the emissions were maximized by cable manipulation.

AC Power Conducted Emission Limit


For intentional device, according to § 15.207(a) AC Power Conducted Emission Limits is as following :

Frequency range (MHz)	Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

* Decreases with the logarithm of the frequency.

TEST RESULTS

Power supply:	AC120V/60Hz	Polarization	L
Built-in power supply:	A-350FKD-24P-00	Test Mode:	TX(5.2G)

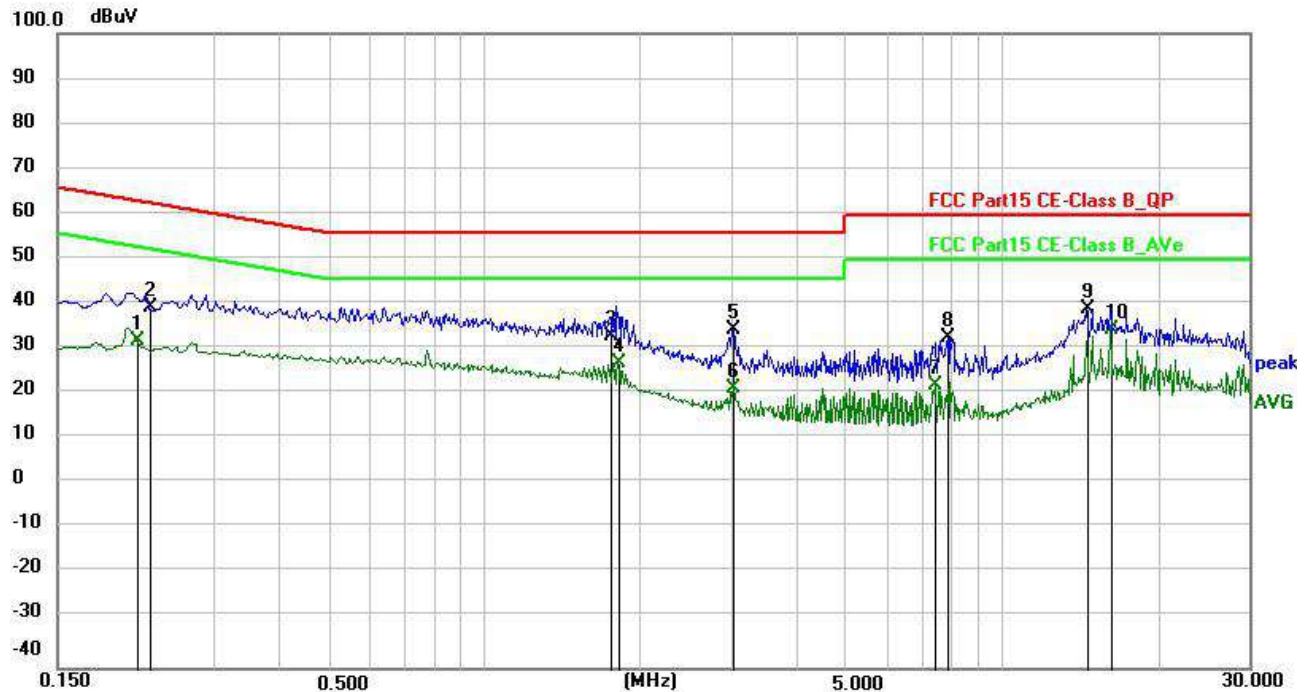


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB)	Level (dBμV)	Limit (dBμV)	Margin (dB)	Detector	P/F
1	0.2128	15.51	16.72	32.23	53.10	-20.87	AVG	P
2	0.2256	22.94	16.72	39.66	62.61	-22.95	QP	P
3	1.7700	16.85	16.52	33.37	56.00	-22.63	QP	P
4	1.8150	11.02	16.51	27.53	46.00	-18.47	AVG	P
5	3.0255	18.52	16.34	34.86	56.00	-21.14	QP	P
6	3.0255	5.30	16.34	21.64	46.00	-24.36	AVG	P
7	7.4085	5.93	16.60	22.53	50.00	-27.47	AVG	P
8	7.8855	16.26	16.71	32.97	60.00	-27.03	QP	P
9	14.5770	20.68	18.49	39.17	60.00	-20.83	QP	P
10 *	16.2060	15.66	18.95	34.61	50.00	-15.39	AVG	P

Note:1). Level (dBμV)= Reading (dBμV)+ Factor (dB)

2). Factor (dB)=insertion loss of LISN (dB) + Cable loss (dB)

3). Margin(dB) = Limit (dBμV) - Level (dBμV)

Power supply:	AC120V/60Hz	Polarization	N
Built-in power supply:	A-350FKD-24P-00	Test Mode:	TX(5.2G)

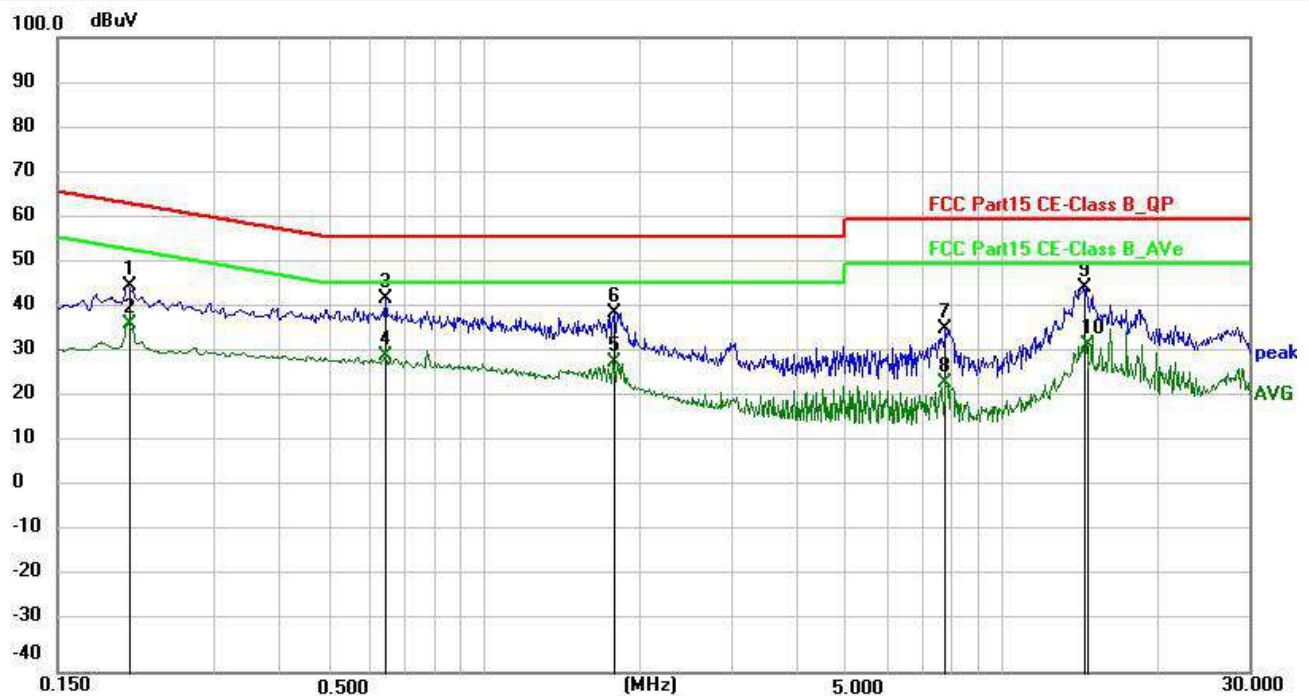


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F
1	0.2040	27.76	17.53	45.29	63.45	-18.16	QP	P
2	0.2040	19.35	17.53	36.88	53.45	-16.57	AVG	P
3 *	0.6450	25.07	17.51	42.58	56.00	-13.42	QP	P
4	0.6450	12.46	17.51	29.97	46.00	-16.03	AVG	P
5	1.7790	10.89	17.48	28.37	46.00	-17.63	AVG	P
6	1.7835	21.94	17.48	39.42	56.00	-16.58	QP	P
7	7.8090	17.88	17.83	35.71	60.00	-24.29	QP	P
8	7.8090	6.01	17.83	23.84	50.00	-26.16	AVG	P
9	14.3880	26.17	18.81	44.98	60.00	-15.02	QP	P
10	14.5680	13.35	18.84	32.19	50.00	-17.81	AVG	P

Note:1). Level (dBμV)= Reading (dBμV)+ Factor (dB)

2). Factor (dB)=insertion loss of LISN (dB) + Cable loss (dB)

3). Margin(dB) = Limit (dBμV) - Level (dBμV)

Power supply:	AC 120V/60Hz	Polarization	L
Built-in power supply:	A-350FKD-24P-00	Test Mode:	TX(5.8G)

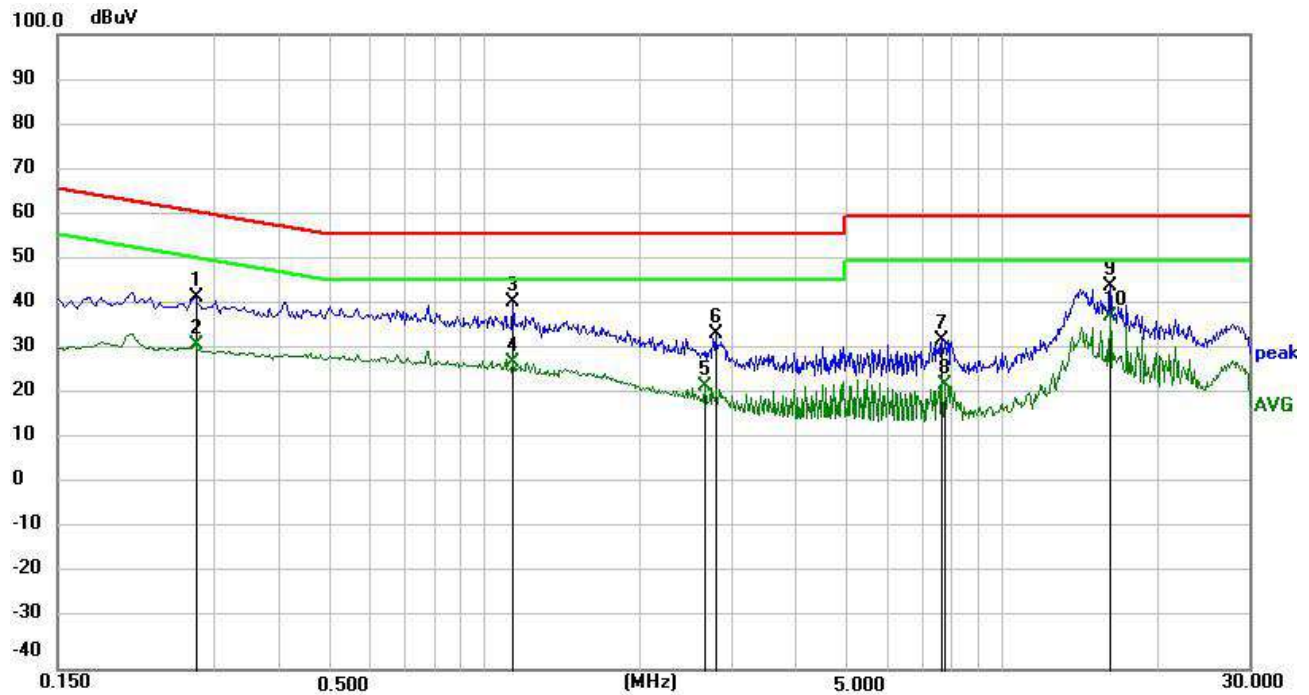


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F
1	0.2760	24.43	17.52	41.95	60.94	-18.99	QP	P
2	0.2760	14.09	17.52	31.61	50.94	-19.33	AVG	P
3	1.1400	23.43	17.50	40.93	56.00	-15.07	QP	P
4	1.1400	10.31	17.50	27.81	46.00	-18.19	AVG	P
5	2.6700	4.93	17.45	22.38	46.00	-23.62	AVG	P
6	2.8050	16.60	17.44	34.04	56.00	-21.96	QP	P
7	7.6650	14.96	17.81	32.77	60.00	-27.23	QP	P
8	7.8090	4.89	17.83	22.72	50.00	-27.28	AVG	P
9	16.1565	25.33	19.06	44.39	60.00	-15.61	QP	P
10 *	16.1565	18.91	19.06	37.97	50.00	-12.03	AVG	P

Note:1).Level (dBuV)= Reading (dBuV)+ Factor (dB)

2). Factor (dB)=insertion loss of LISN (dB) + Cable loss (dB)

3). Margin(dB) = Limit (dBuV) - Level (dBuV)

Power supply:	AC 120V/60Hz	Polarization	N
Built-in power supply:	A-350FKD-24P-00	Test Mode:	TX(5.8G)

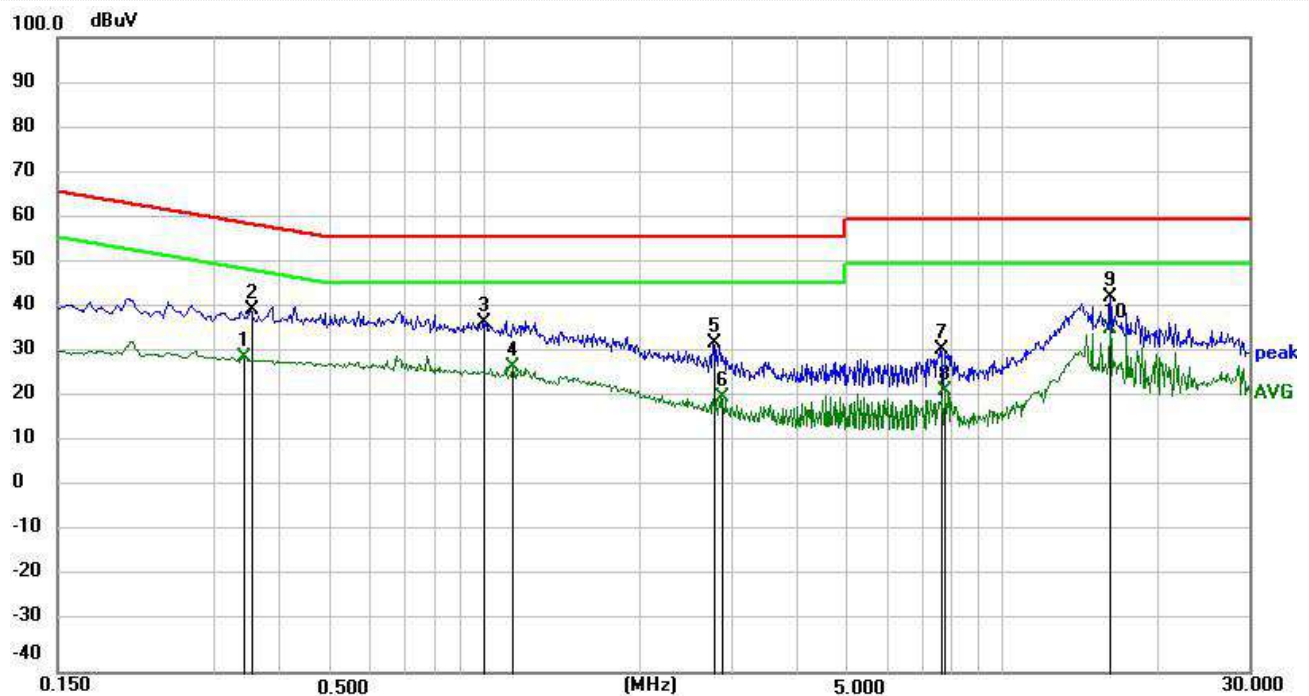


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB)	Level (dBμV)	Limit (dBμV)	Margin (dB)	Detector	P/F
1	0.3435	12.93	16.70	29.63	49.12	-19.49	AVG	P
2	0.3525	23.17	16.70	39.87	58.90	-19.03	QP	P
3	0.9960	20.73	16.62	37.35	56.00	-18.65	QP	P
4	1.1400	10.79	16.60	27.39	46.00	-18.61	AVG	P
5	2.7735	16.10	16.37	32.47	56.00	-23.53	QP	P
6	2.8815	4.47	16.36	20.83	46.00	-25.17	AVG	P
7	7.6065	14.44	16.65	31.09	60.00	-28.91	QP	P
8	7.8090	5.43	16.69	22.12	50.00	-27.88	AVG	P
9	16.1700	23.96	18.94	42.90	60.00	-17.10	QP	P
10 *	16.1700	16.85	18.94	35.79	50.00	-14.21	AVG	P

Note:1).Level (dBμV)= Reading (dBμV)+ Factor (dB)

2). Factor (dB)=insertion loss of LISN (dB) + Cable loss (dB)

3). Margin(dB) = Limit (dBμV) - Level (dBμV)

Power supply:	AC120V/60Hz	Polarization	L
Built-in power supply:	MS-TA460J240-350B0	Test Mode:	TX(5.2G)

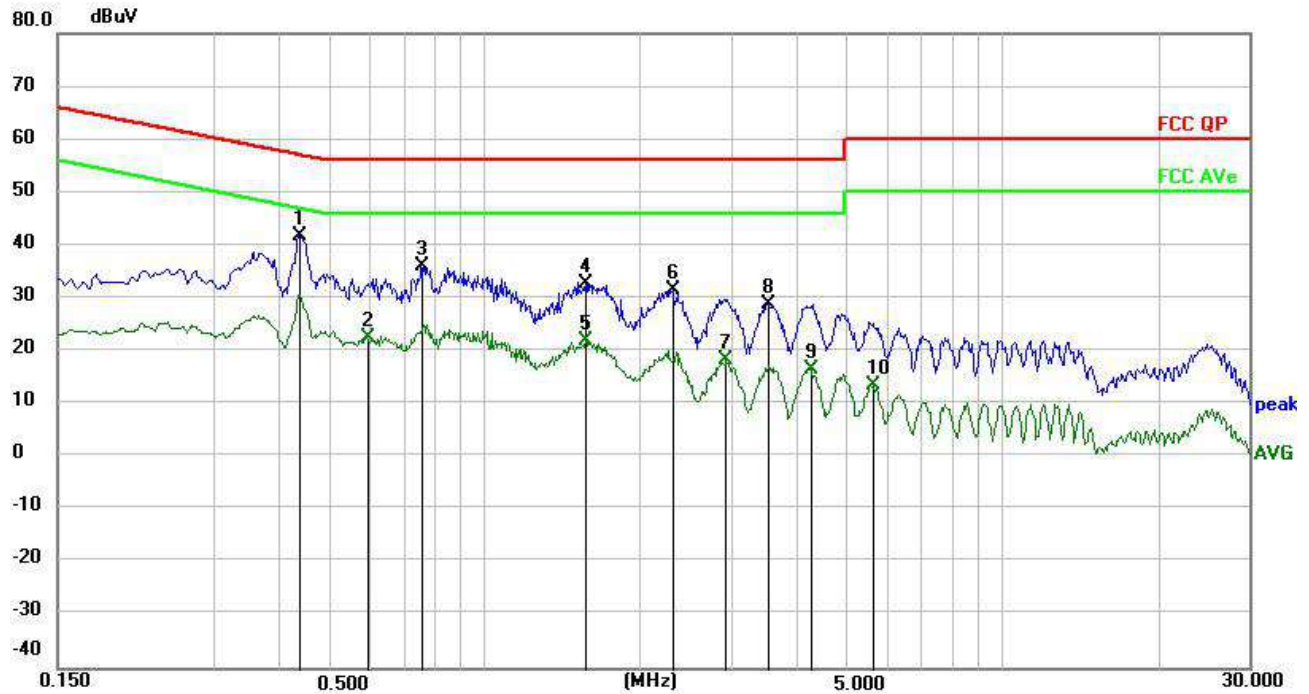


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F
1 *	0.4380	31.69	10.03	41.72	57.10	-15.38	QP	P
2	0.5910	12.46	10.03	22.49	46.00	-23.51	AVG	P
3	0.7575	26.10	10.04	36.14	56.00	-19.86	QP	P
4	1.5765	22.79	10.05	32.84	56.00	-23.16	QP	P
5	1.5765	11.83	10.05	21.88	46.00	-24.12	AVG	P
6	2.3100	21.43	10.05	31.48	56.00	-24.52	QP	P
7	2.9445	8.25	10.05	18.30	46.00	-27.70	AVG	P
8	3.5295	18.91	10.06	28.97	56.00	-27.03	QP	P
9	4.2900	6.62	10.08	16.70	46.00	-29.30	AVG	P
10	5.6445	3.39	10.10	13.49	50.00	-36.51	AVG	P

Note:1).Level (dBuV)= Reading (dBuV)+ Factor (dB)

2). Factor (dB)=insertion loss of LISN (dB) + Cable loss (dB)

3). Margin(dB) = Limit (dBuV) - Level (dBuV)

Power supply:	AC120V/60Hz	Polarization	N
Built-in power supply:	MS-TA460J240-350B0	Test Mode:	TX(5.2G)

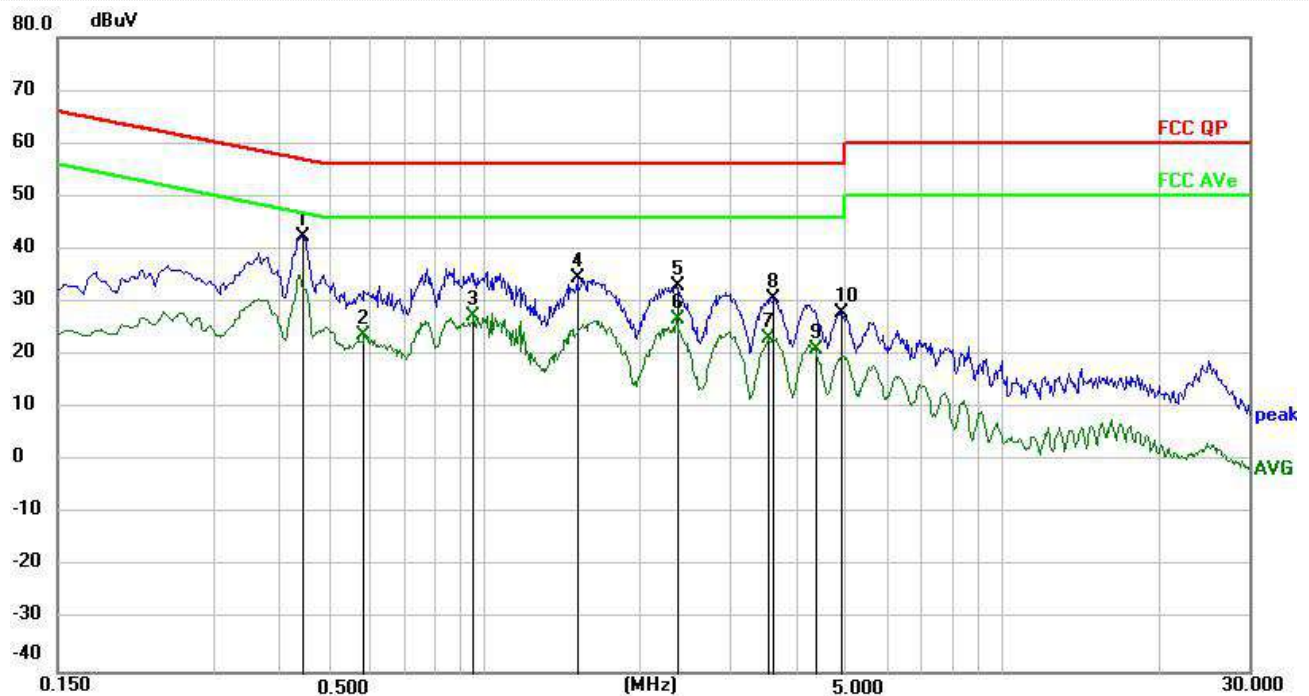


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F
1 *	0.4470	32.48	10.00	42.48	56.93	-14.45	QP	P
2	0.5865	13.65	10.00	23.65	46.00	-22.35	AVG	P
3	0.9555	17.46	10.01	27.47	46.00	-18.53	AVG	P
4	1.5135	24.50	10.02	34.52	56.00	-21.48	QP	P
5	2.3505	23.09	10.02	33.11	56.00	-22.89	QP	P
6	2.3505	16.62	10.02	26.64	46.00	-19.36	AVG	P
7	3.5430	13.24	10.03	23.27	46.00	-22.73	AVG	P
8	3.6330	20.75	10.03	30.78	56.00	-25.22	QP	P
9	4.3620	10.97	10.05	21.02	46.00	-24.98	AVG	P
10	4.9064	17.98	10.06	28.04	56.00	-27.96	QP	P

Note:1).Level (dBμV)= Reading (dBμV)+ Factor (dB)

2). Factor (dB)=insertion loss of LISN (dB) + Cable loss (dB)

3). Margin(dB) = Limit (dBμV) - Level (dBμV)

Power supply:	AC 120V/60Hz	Polarization	L
Built-in power supply:	MS-TA460J240-350B0	Test Mode:	TX(5.8G)

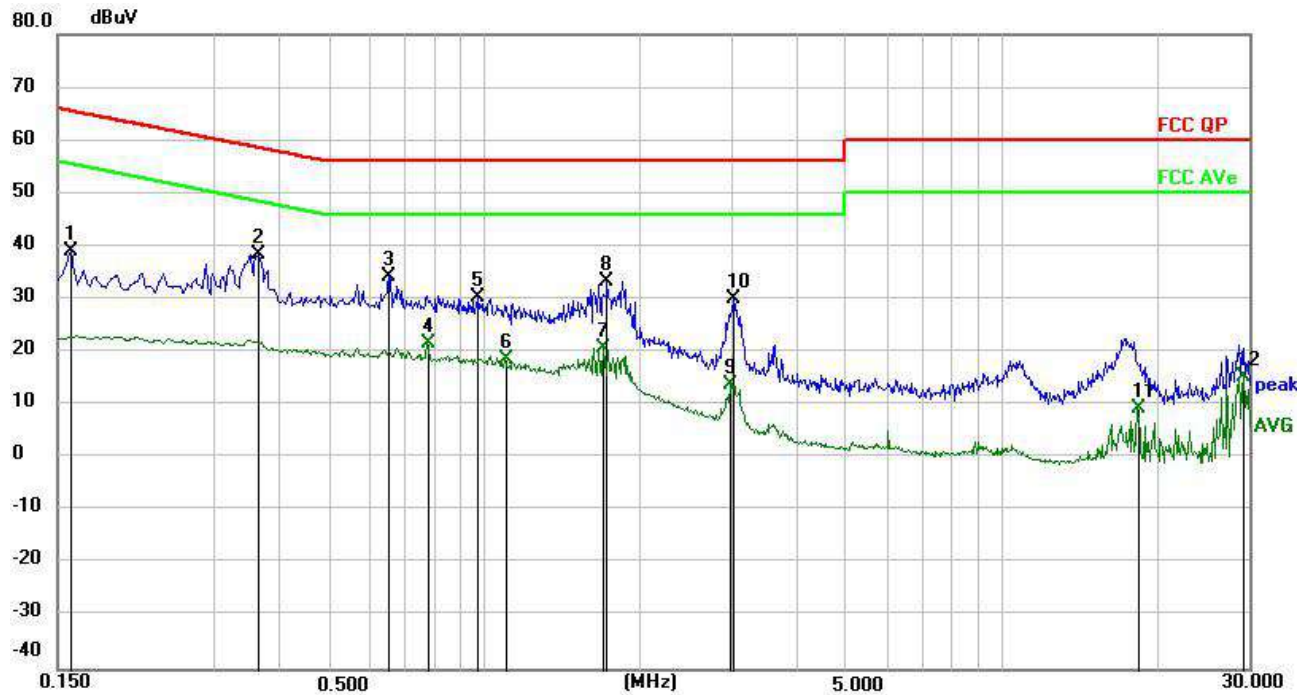


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB)	Level (dBμV)	Limit (dBμV)	Margin (dB)	Detector	P/F
1	0.1590	29.07	10.03	39.10	65.52	-26.42	QP	P
2 *	0.3659	28.36	10.03	38.39	58.59	-20.20	QP	P
3	0.6540	24.29	10.03	34.32	56.00	-21.68	QP	P
4	0.7753	11.65	10.04	21.69	46.00	-24.31	AVG	P
5	0.9778	20.30	10.04	30.34	56.00	-25.66	QP	P
6	1.0993	8.66	10.04	18.70	46.00	-27.30	AVG	P
7	1.7070	10.69	10.05	20.74	46.00	-25.26	AVG	P
8	1.7295	23.41	10.05	33.46	56.00	-22.54	QP	P
9	2.9805	3.78	10.05	13.83	46.00	-32.17	AVG	P
10	3.0344	20.09	10.05	30.14	56.00	-25.86	QP	P
11	18.2443	-0.77	10.15	9.38	50.00	-40.62	AVG	P
12	29.2378	5.39	10.08	15.47	50.00	-34.53	AVG	P

Note:1).Level (dBμV)= Reading (dBμV)+ Factor (dB)

2). Factor (dB)=insertion loss of LISN (dB) + Cable loss (dB)

3). Margin(dB) = Limit (dBμV) - Level (dBμV)

Power supply:	AC 120V/60Hz	Polarization	N
Built-in power supply:	MS-TA460J240-350B0	Test Mode:	TX(5.8G)

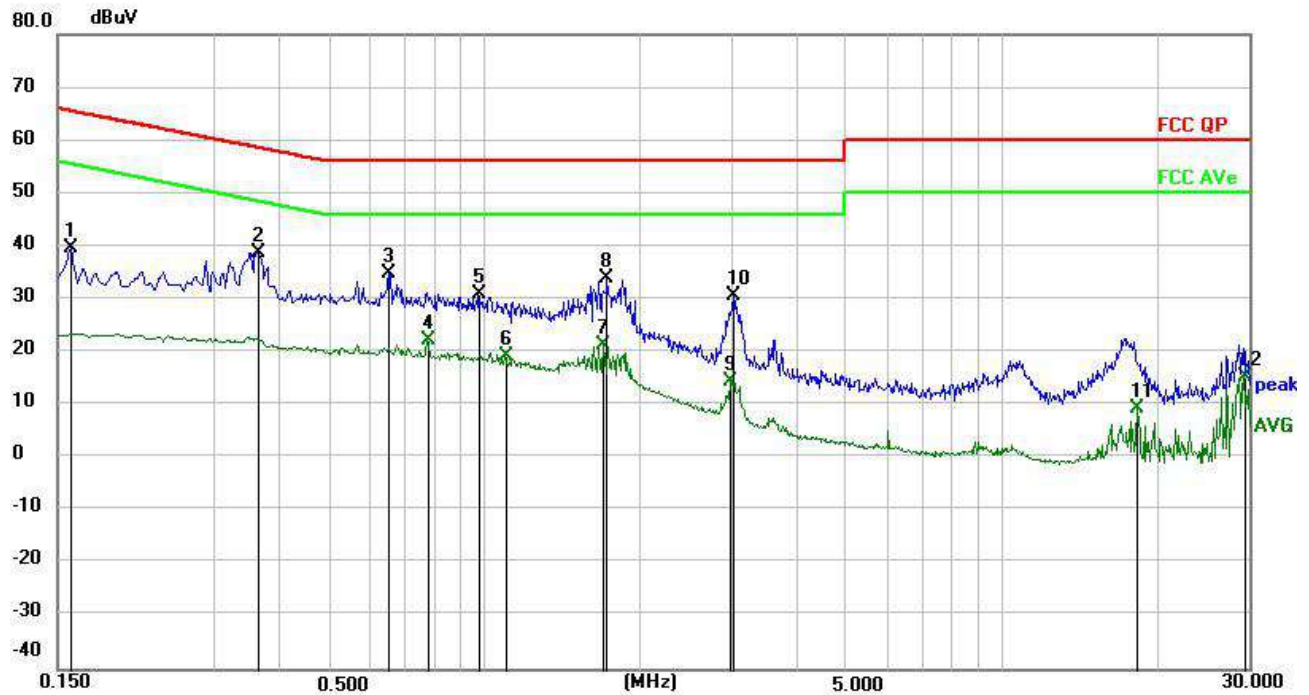

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F
1	0.1590	29.57	10.03	39.60	65.52	-25.92	QP	P
2 *	0.3659	28.86	10.03	38.89	58.59	-19.70	QP	P
3	0.6540	24.79	10.03	34.82	56.00	-21.18	QP	P
4	0.7754	12.15	10.04	22.19	46.00	-23.81	AVG	P
5	0.9779	20.80	10.04	30.84	56.00	-25.16	QP	P
6	1.0994	9.16	10.04	19.20	46.00	-26.80	AVG	P
7	1.7070	11.19	10.05	21.24	46.00	-24.76	AVG	P
8	1.7295	23.91	10.05	33.96	56.00	-22.04	QP	P
9	2.9805	4.28	10.05	14.33	46.00	-31.67	AVG	P
10	3.0344	20.59	10.05	30.64	56.00	-25.36	QP	P
11	18.2443	-0.77	10.15	9.38	50.00	-40.62	AVG	P
12	29.2379	5.39	10.08	15.47	50.00	-34.53	AVG	P

Note:1).Level (dBuV)= Reading (dBuV)+ Factor (dB)

2). Factor (dB)=insertion loss of LISN (dB) + Cable loss (dB)

3). Margin(dB) = Limit (dBuV) - Level (dBuV)

4.2 Radiated Emission

Limit

The maximum emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:

- (1) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (2) For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (3) For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (4) For transmitters operating in the 5.725-5.85 GHz band: All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

Undesirable emission limits

Requirement	Limit(EIRP)	Limit (Field strength at 3m) ^{Note1}
15.407(b)(1)	PK:-27(dBm/MHz)	PK:68.2(dBμV/m)
15.407(b)(2)		
15.407(b)(3)		
15.407(b)(4)		

Note1: The following formula is used to convert the equipment isotropic radiated power (eirp) to field strength:

$$E = \frac{1000000\sqrt{30P}}{3} \mu\text{V/m, where P is the eirp (Watts)}$$


- (5) Unwanted emissions below 1 GHz must comply with the general field strength limits set forth in §15.209
- (6) In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a)

Radiated emission limits


Frequency (MHz)	Distance (Meters)	Radiated (dBμV/m)	Radiated (μV/m)
0.009-0.49	3	20log(2400/F(KHz))+40log(300/3)	2400/F(KHz)
0.49-1.705	3	20log(24000/F(KHz))+ 40log(30/3)	24000/F(KHz)
1.705-30	3	20log(30)+ 40log(30/3)	30
30-88	3	40.0	100
88-216	3	43.5	150
216-960	3	46.0	200
Above 960	3	54.0	500

TEST CONFIGURATION


(A) Radiated Emission Test Set-Up, Frequency Below 30MHz

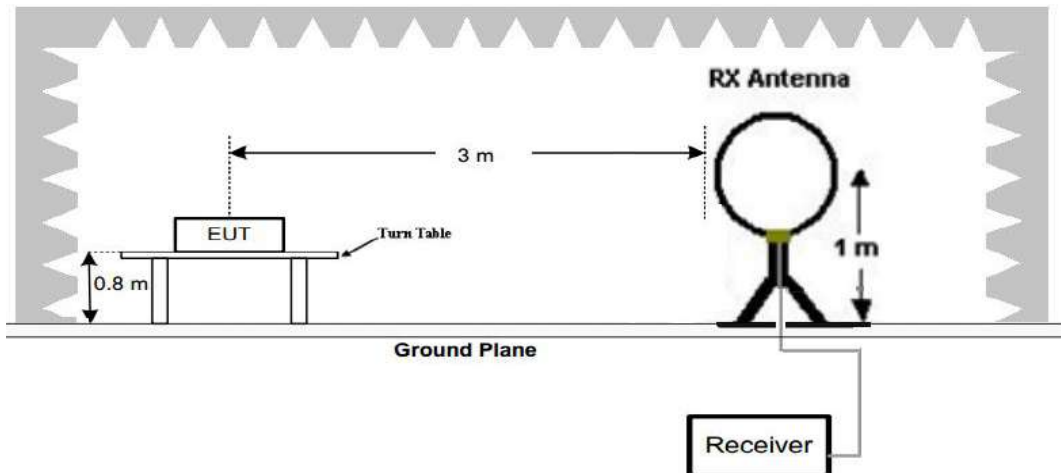

(B) Radiated Emission Test Set-Up, Frequency below 1000MHz

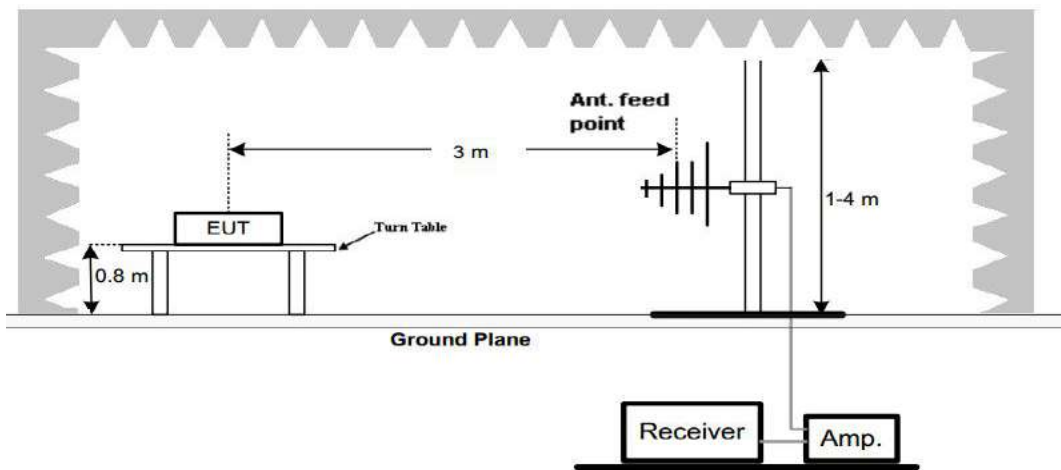

(C) Radiated Emission Test Set-Up, Frequency above 1000MHz

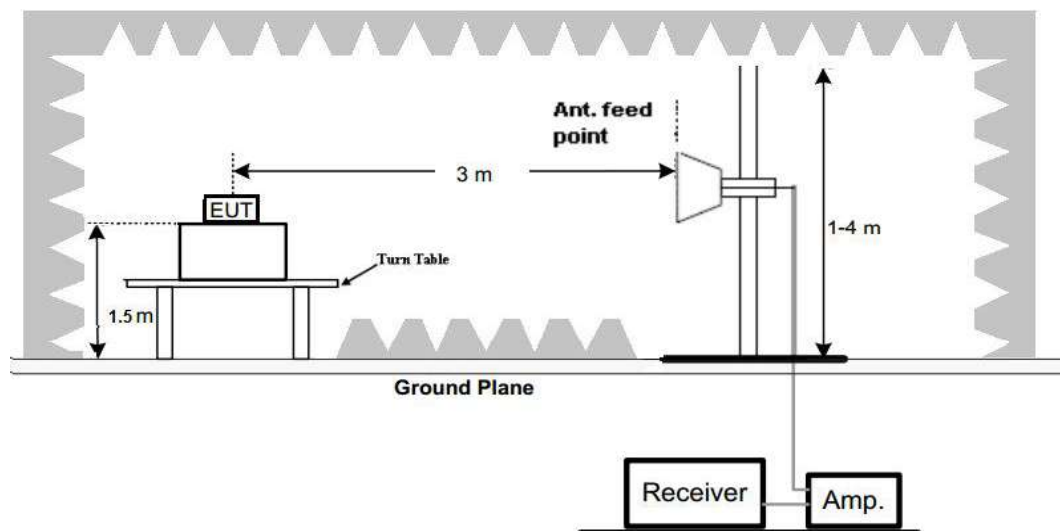

TEST PROCEDURE

- Below 1GHz measurement the EUT is placed on a turntable which is 0.8m above ground plane, and above 1GHz measurement EUT was placed on a low permittivity and low loss tangent turn table which is 1.5m above ground plane.
- Maximum procedure was performed by raising the receiving antenna from 1m to 4m and rotating the turn table from 0° to 360° to acquire the highest emissions from EUT
- And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
- Repeat above procedures until all frequency measurements have been completed.
- Radiated emission test frequency band from 9KHz to 40GHz.
- The distance between test antenna and EUT as following table states:

Test Frequency range	Test Antenna Type	Test Distance
9KHz-30MHz	Active Loop Antenna	3
30MHz-1GHz	Bilog Antenna	3
1GHz-18GHz	Horn Antenna	3
18GHz-25GHz	Horn Antenna	1

- Setting test receiver/spectrum as following table states:

Test Frequency range	Test Receiver/Spectrum Setting	Detector
9KHz-150KHz	RBW=200Hz/VBW=3KHz, Sweep time=Auto	QP
150KHz-30MHz	RBW=9KHz/VBW=100KHz, Sweep time=Auto	QP
30MHz-1GHz	RBW=120KHz/VBW=1000KHz, Sweep time=Auto	QP
1GHz-40GHz	Peak Value: RBW=1MHz/VBW=3MHz, Sweep time=Auto Average Value: RBW=1MHz/VBW=10Hz, Sweep time=Auto	Peak


TEST RESULTS


Between 9KHz – 30MHz

The emission from 9 kHz to 30MHz was pre-tested and found the result was 20dB lower than the limit, and according to 15.31(o) & RSS-Gen 6.13, the test result no need to reported.


For 30MHz-1GHz


Temperature:	25°C	Relative Humidity:	54%
Pressure:	101 kPa	Test Voltage:	AC 120V/60Hz
Test Mode:	TX(5.2G)		
Built-in power supply:	A-350FKD-24P-00		

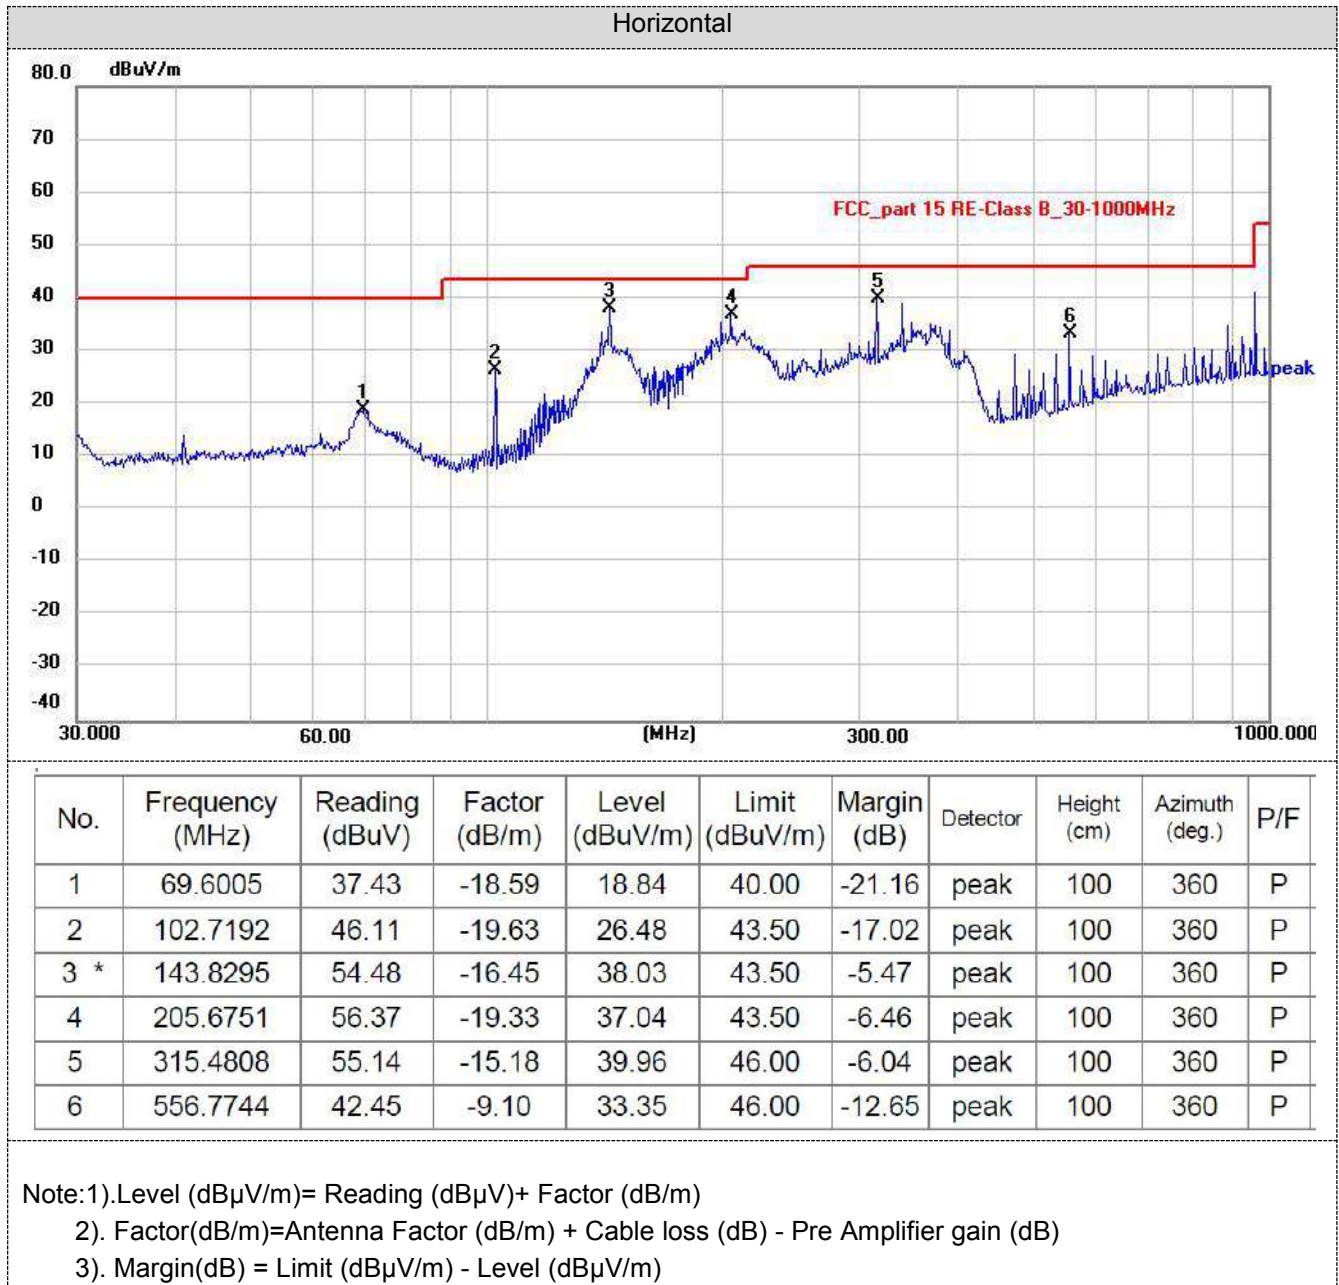

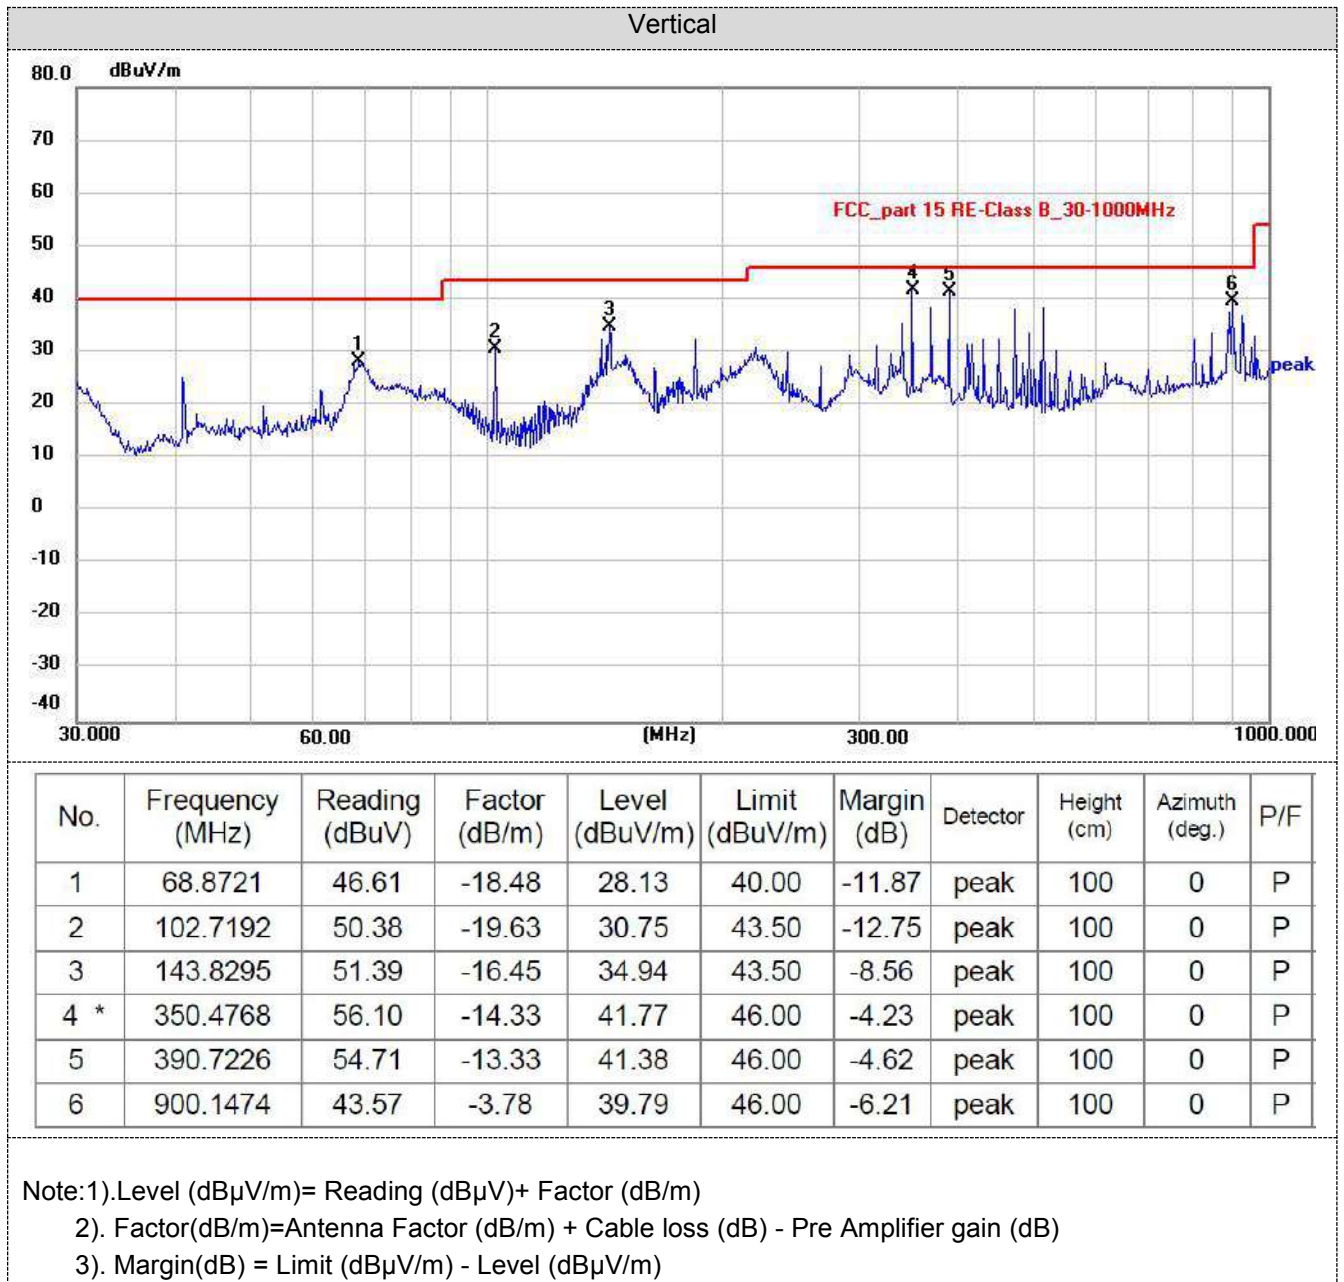



Temperature:	25℃	Relative Humidity:	54%
Pressure:	101 kPa	Test Voltage:	AC 120V/60Hz
Test Mode:	TX(5.8G)		
Built-in power supply:	A-350FKD-24P-00		

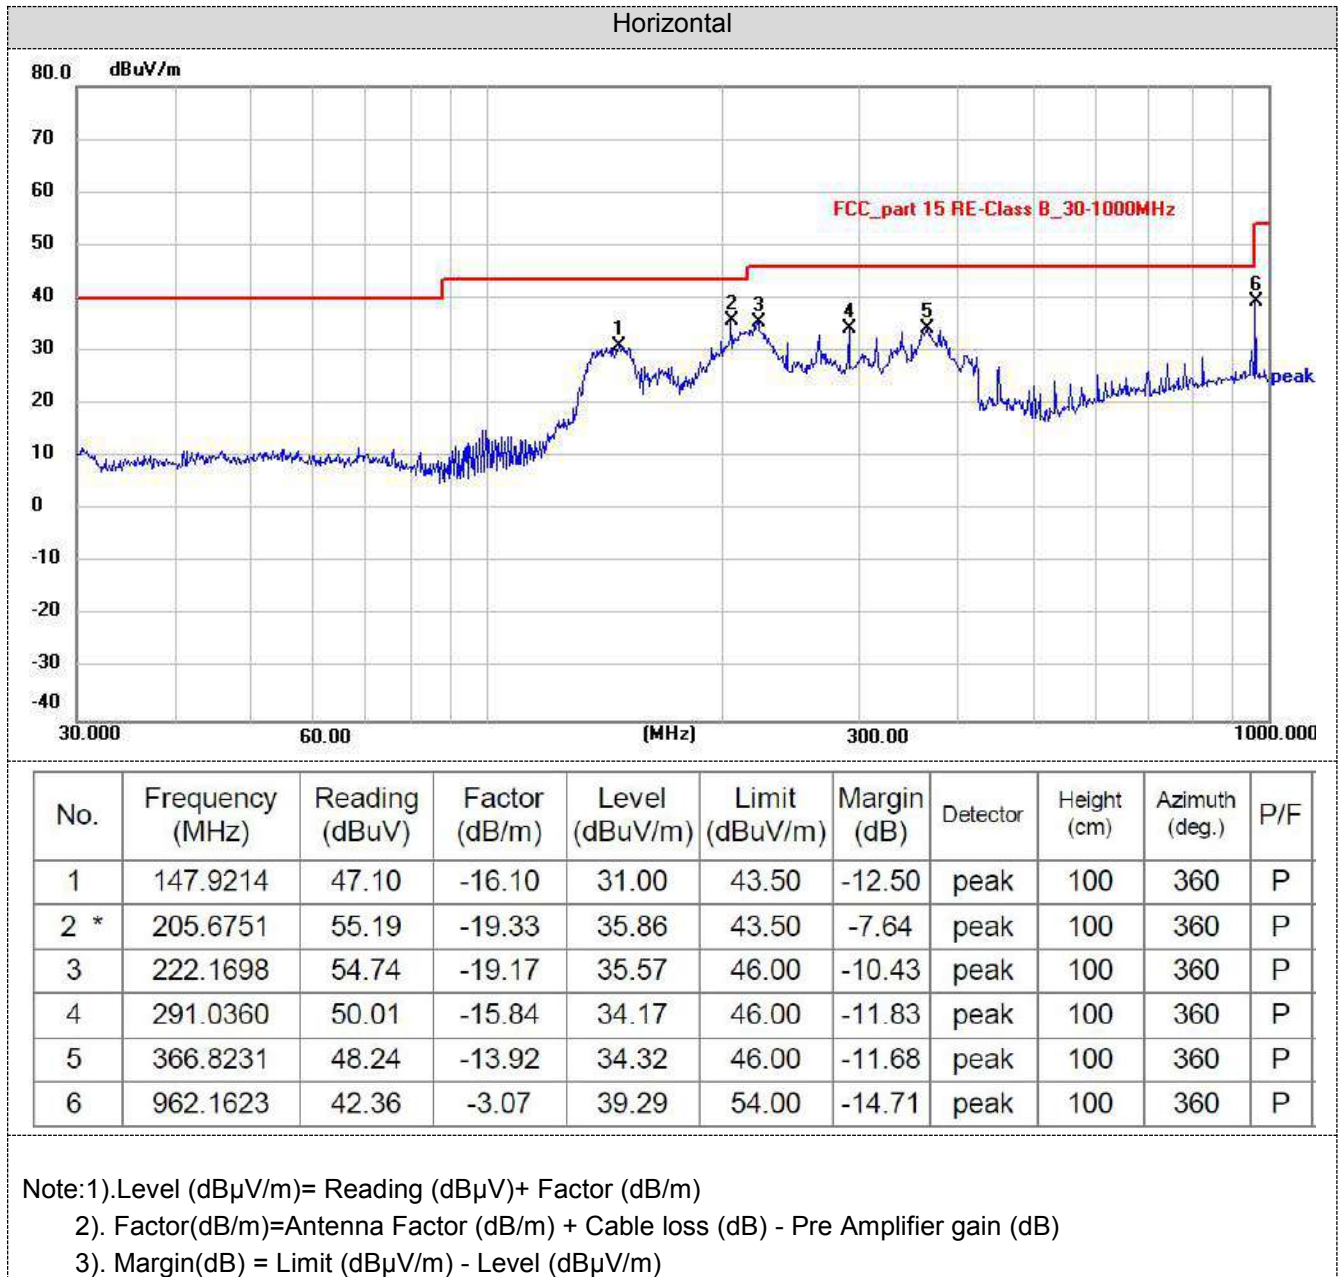

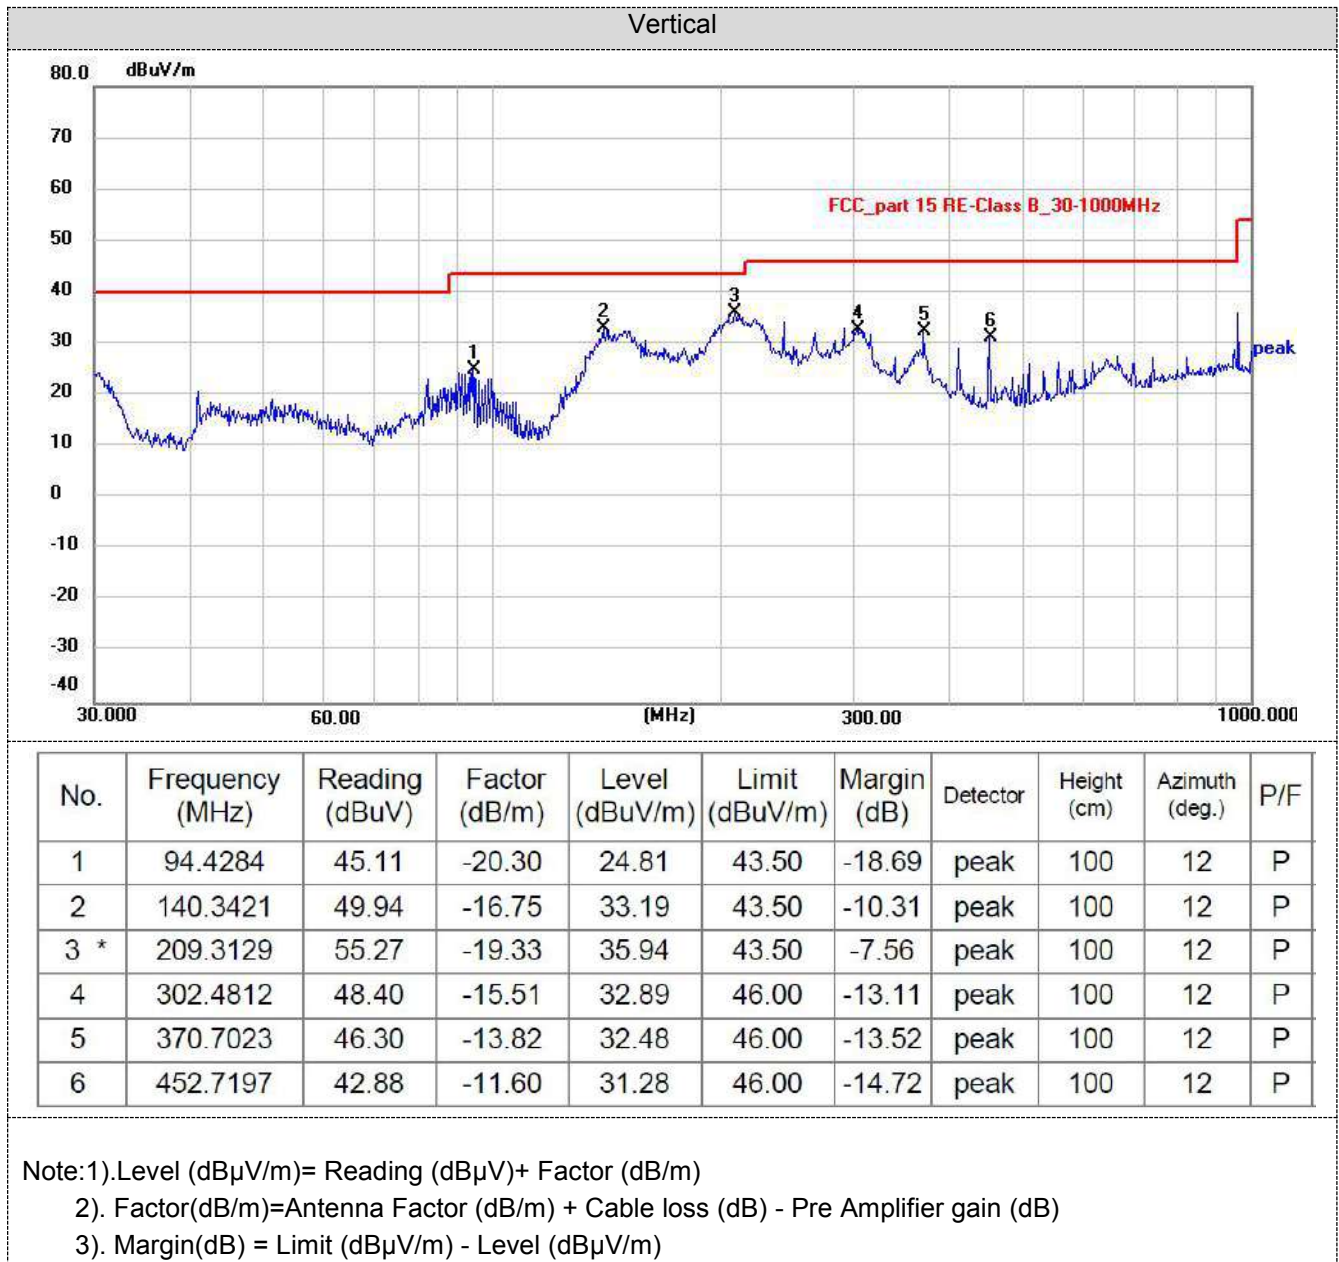



Temperature:	25°C	Relative Humidity:	54%
Pressure:	101 kPa	Test Voltage:	AC 120V/60Hz
Test Mode:	TX(5.2G)		
Built-in power supply:	MS-TA460J240-350B0		

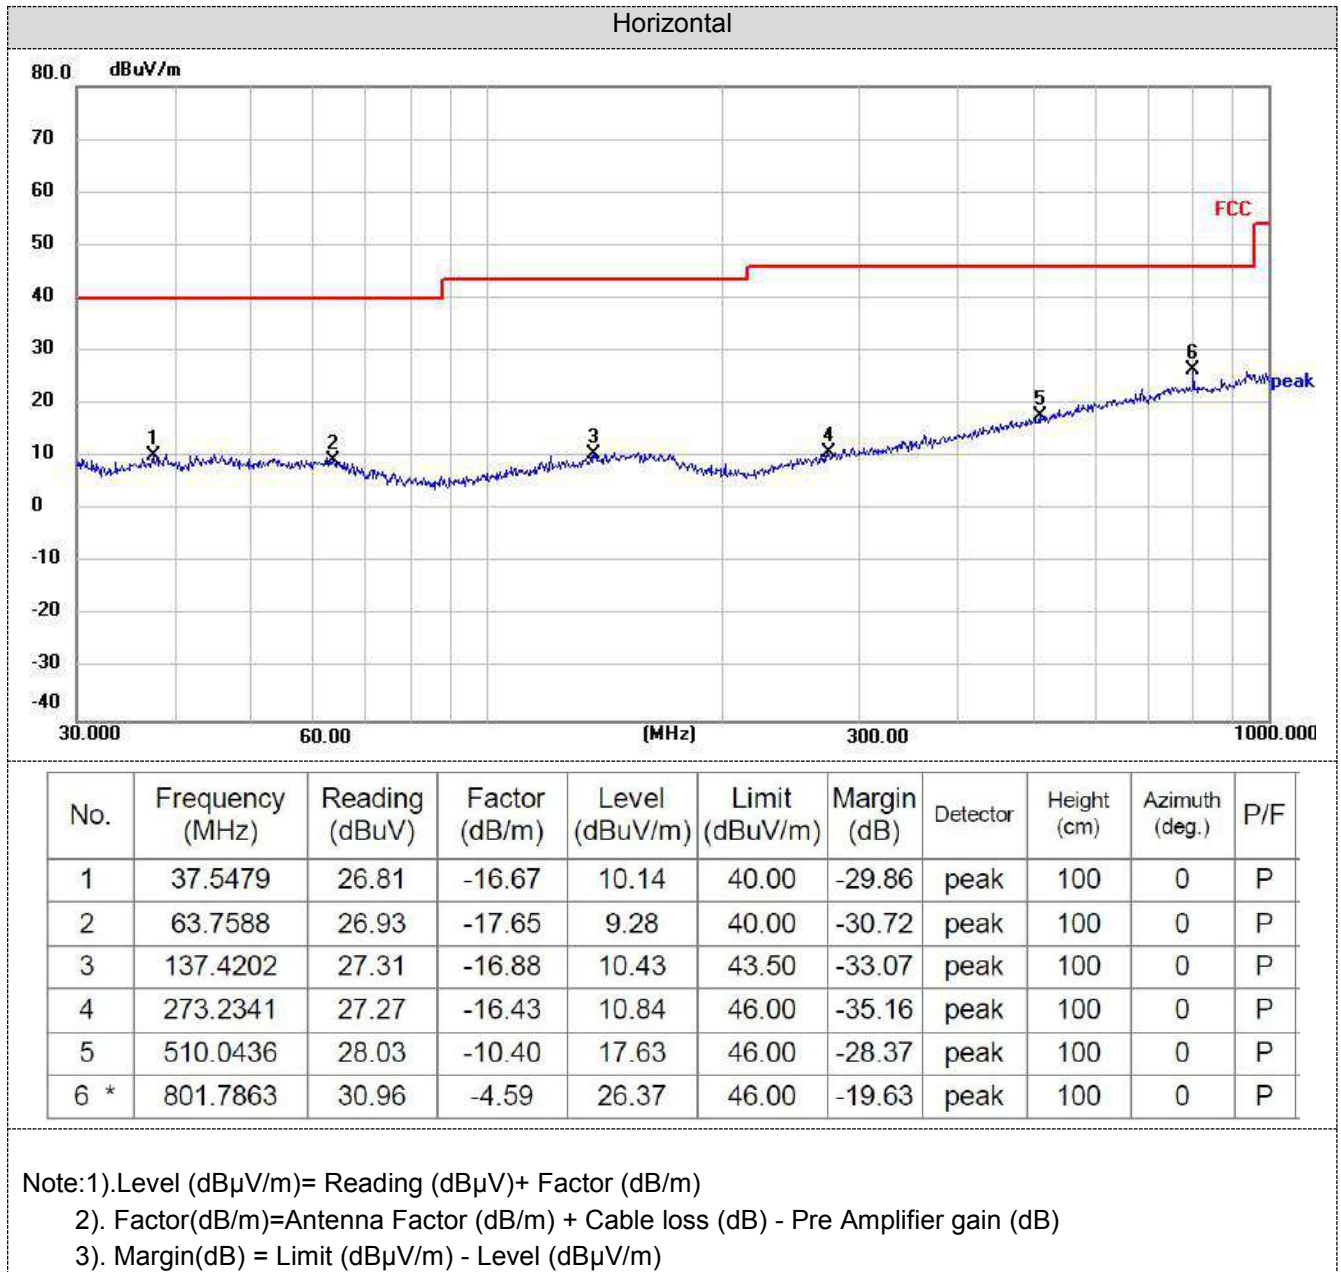

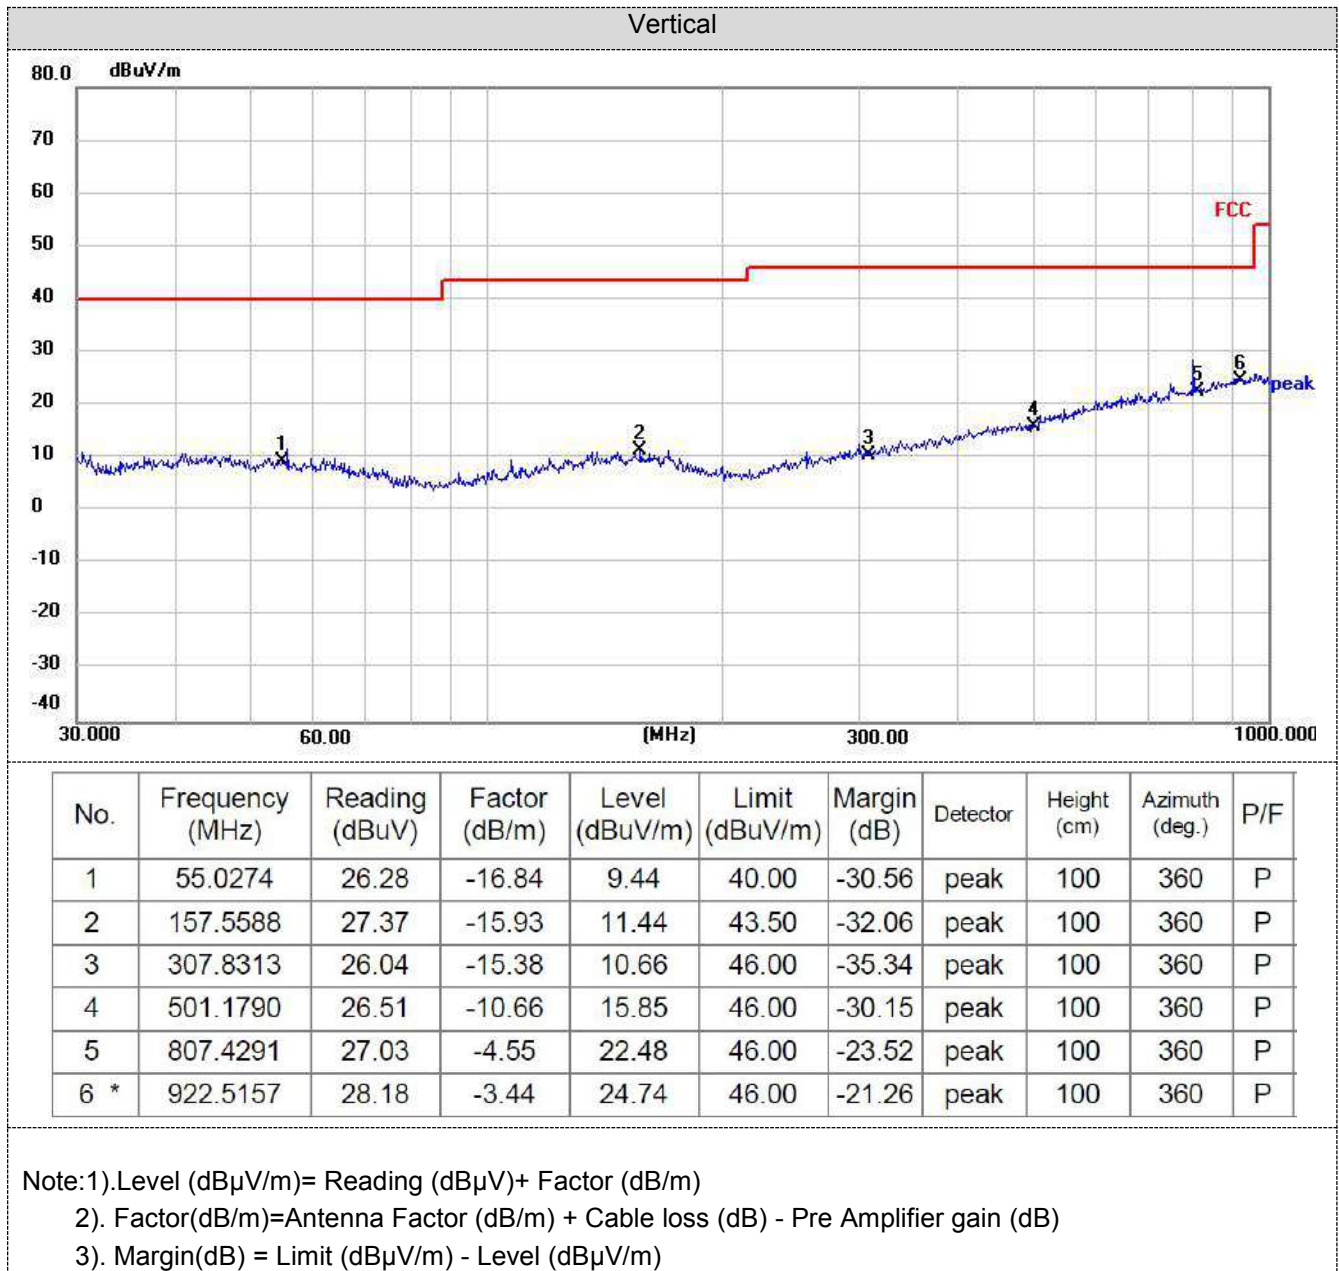

Temperature:	25°C	Relative Humidity:	54%
Pressure:	101 kPa	Test Voltage:	AC 120V/60Hz
Test Mode:	TX(5.8G)		
Built-in power supply:	MS-TA460J240-350B0		

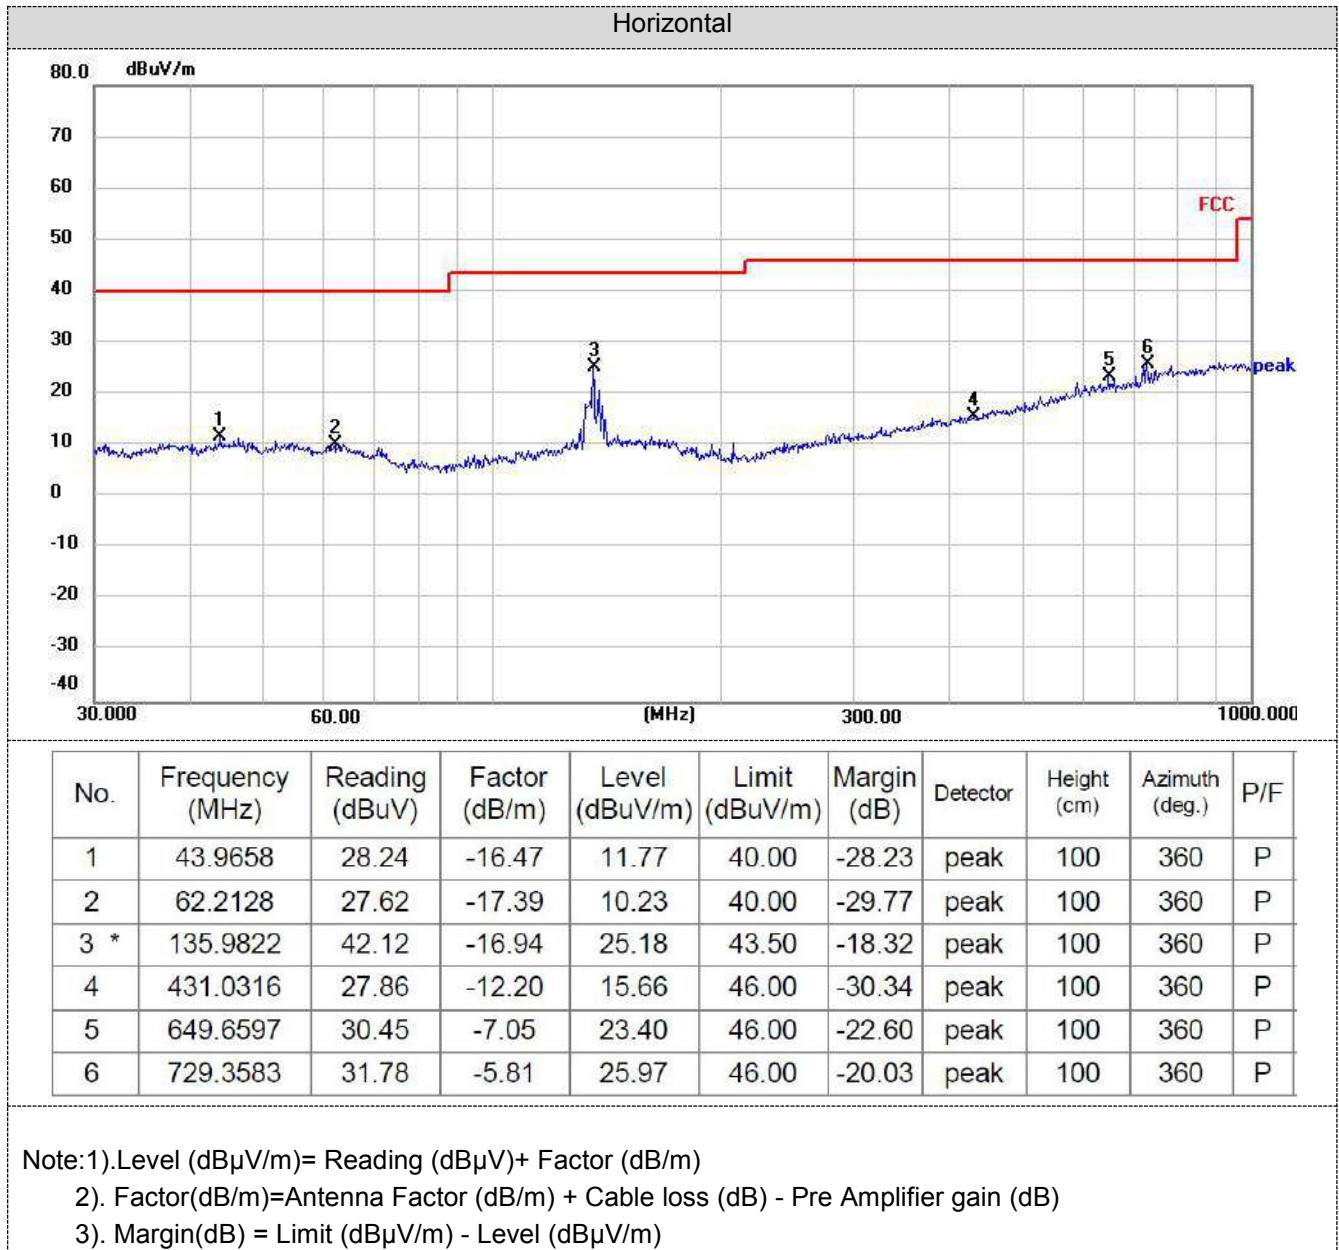

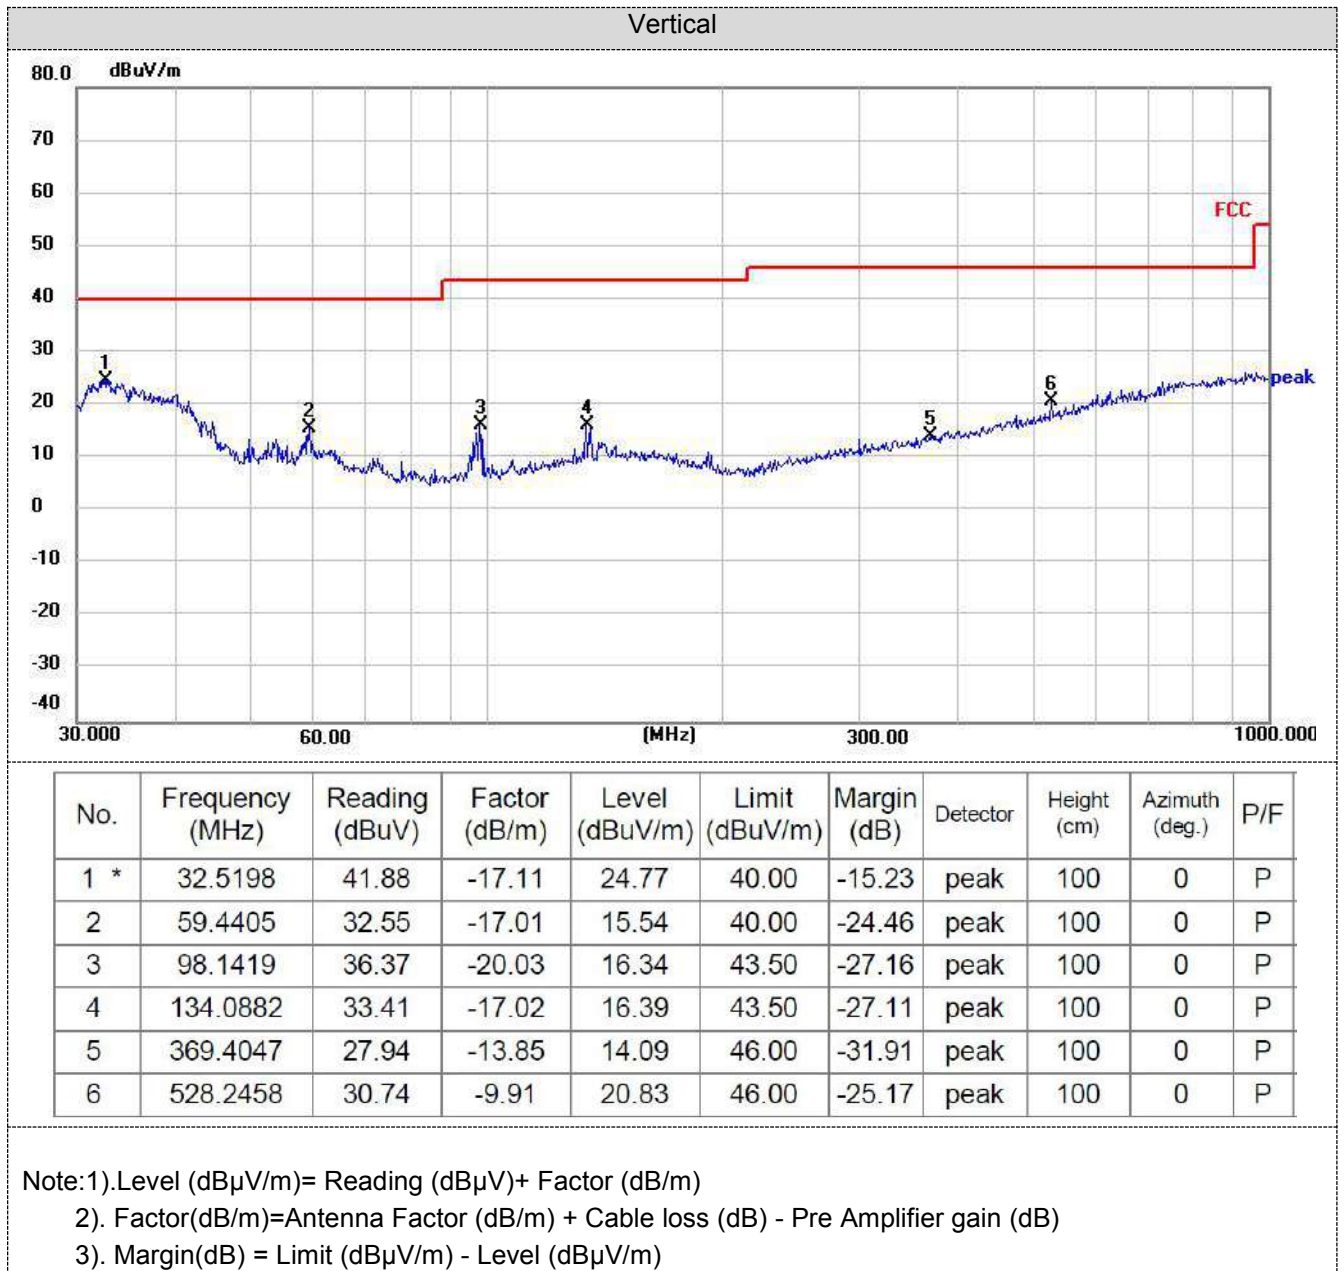

For 1GHz to 40GHz

Note: All 802.11a/n/ac (HT20), 802.11n/ac (HT40) and 802.11ac (HT80) modes have been tested for above 1GHz test, only the worst case 802.11a(HT20) was recorded.

U-NII 1 & 802.11a Mode (above 1GHz)

Tested Channel	Frequency (MHz)	Emission Limit (dBuV/m)	Detector Mode	ANT Pol	Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
36 5158MHz	5150.00	53.20	PK	H	68.20	15.00	50.21	32.40	5.11	34.52	2.99
	5150.00	43.67	AV	H	54.00	10.33	40.68	32.40	5.11	34.52	2.99
	10360.00	42.31	PK	H	68.20	25.89	35.15	36.51	5.86	35.21	7.16
	--	--	--	--	--	--	--	--	--	--	--
40 5200MHz	10400.00	42.54	PK	H	68.20	25.66	35.25	36.58	5.96	35.25	7.29
	--	--	--	--	--	--	--	--	--	--	--
48 5240MHz	5350.50	44.28	PK	H	68.20	23.92	41.24	32.45	5.22	34.63	3.04
	10480.00	43.59	PK	H	68.20	24.61	36.24	36.68	6.21	35.54	7.35
	--	--	--	--	--	--	--	--	--	--	--

Tested Channel	Frequency (MHz)	Emission Limit (dBuV/m)	Detector Mode	ANT Pol	Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
36 5158MHz	5150.00	53.23	PK	V	68.20	14.97	50.24	32.40	5.11	34.52	2.99
	5150.00	43.64	AV	V	54.00	10.36	40.65	32.40	5.11	34.52	2.99
	10360.00	42.61	PK	V	68.20	25.59	35.45	36.51	5.86	35.21	7.16
	--	--	--	--	--	--	--	--	--	--	--
40 5200MHz	10400.00	42.74	PK	V	68.20	25.46	35.45	36.58	5.96	35.25	7.29
	--	--	--	--	--	--	--	--	--	--	--
48 5240MHz	5350.50	48.36	PK	V	68.20	19.84	45.32	32.45	5.22	34.63	3.04
	10480.00	47.56	PK	V	68.20	20.64	40.21	36.68	6.21	35.54	7.35
	--	--	--	--	--	--	--	--	--	--	--

U-NII 3 & 802.11a Mode (above 1GHz)

Tested Channel	Frequency (MHz)	Emission Limit (dBuV/m)	Detector Mode	ANT Pol	Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
149 5745MHz	5720.00	55.05	PK	H	68.20	13.15	50.25	34.21	5.11	34.52	4.80
	5720.00	45.16	AV	H	54.00	8.84	40.36	34.21	5.11	34.52	4.80
	11490.00	44.85	PK	H	68.20	23.35	35.85	38.35	5.86	35.21	9.00
	--	--	--	--	--	--	--	--	--	--	--
157 5785MHz	11570.00	44.78	PK	H	68.20	23.42	35.46	38.61	5.96	35.25	9.32
	--	--	--	--	--	--	--	--	--	--	--
165 5825MHz	5855.00	45.39	PK	H	68.20	22.81	40.24	34.56	5.22	34.63	5.15
	11650.00	45.07	PK	H	68.20	23.13	35.62	38.78	6.21	35.54	9.45
	--	--	--	--	--	--	--	--	--	--	--

Tested Channel	Frequency (MHz)	Emission Limit (dBuV/m)	Detector Mode	ANT Pol	Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
149 5745MHz	5720.00	55.43	PK	V	68.20	12.77	50.63	34.21	5.11	34.52	4.80
	5720.00	45.05	AV	V	54.00	8.95	40.25	34.21	5.11	34.52	4.80
	11490.00	49.25	PK	V	68.20	18.95	40.25	38.35	5.86	35.21	9.00
	--	--	--	--	--	--	--	--	--	--	--
157 5785MHz	11570.00	48.94	PK	V	68.20	19.26	39.62	38.61	5.96	35.25	9.32
	--	--	--	--	--	--	--	--	--	--	--
165 5825MHz	5855.00	50.78	PK	V	68.20	17.42	45.63	34.56	5.22	34.63	5.15
	11650.00	49.97	PK	V	68.20	18.23	40.52	38.78	6.21	35.54	9.45
	--	--	--	--	--	--	--	--	--	--	--

REMARKS:

1. Emission level (dBuV/m) =Raw Value (dBuV)+Correction Factor (dB/m)
2. Correction Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
3. Margin value = Limit value- Emission level.
4. -- Mean the other emission levels were very low against the limit.
5. RBW1MHz VBW3MHz Peak detector is for PK value; RBW 1MHz VBW10Hz Peak detector is for AV value.
6. Worst case data at 6Mbps at IEEE 802.11a; MCS0 at IEEE 802.11n HT20, IEEE 802.11n HT40, IEEE 802.11ac VHT20 ,IEEE 802.11ac VHT40 and IEEE 802.11ac VHT80;

4.3 Maximum Peak Conducted Output Power

Limit

For the band 5.15-5.25 GHz.

(i) For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi.

(ii) For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi.

(iii) For fixed point-to-point access points operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W.

(iv) For client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi.

For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26 dB emission bandwidth in megahertz.

For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1W

Test Procedure

Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the power sensor.

Test Configuration



Test Results**U-NII 1**

Type	Channel	Output power (dBm)	Limit (dBm)	Result
802.11a	36	3.425	23.98	Pass
	40	3.845		
	48	3.961		
802.11n(HT20)	36	2.564	23.98	Pass
	40	2.854		
	48	2.964		
802.11n(HT40)	38	-2.564	23.98	Pass
	46	-1.024		
802.11ac(HT20)	36	1.423	23.98	Pass
	40	1.214		
	48	0.896		
802.11ac(HT40)	38	-3.456	23.98	Pass
	46	-5.124		
802.11ac(HT80)	42	-3.456	23.98	Pass

U-NII 3

Type	Channel	Output power (dBm)	Limit (dBm)	Result
802.11a	149	0.564	30.00	Pass
	157	1.241		
	165	1.658		
802.11n(HT20)	149	2.456	30.00	Pass
	157	3.458		
	165	3.965		
802.11n(HT40)	151	-2.412	30.00	Pass
	159	-2.015		
802.11ac(HT20)	149	1.124	30.00	Pass
	157	1.856		
	165	2.142		
802.11ac(HT40)	151	-2.125	30.00	Pass
	159	-2.564		
802.11ac(HT80)	155	-3.152	30.00	Pass

Note:

- 1) Measured output power at difference data rate for each mode and recorded worst case for each mode.
- 2) Test results including cable loss.
- 3) Worst case data at 54Mbps at IEEE 802.11a; MCS7 at IEEE 802.11n(HT20); MCS7 at IEEE 802.11n(HT40); Ncc1 MCS8 at IEEE 802.11ac(HT20); MCS7 at IEEE 802.11ac(HT40); MCS9 at IEEE 802.11ac(HT80);

4.4 Power Spectral Density

Limit

(1) For the band 5.15 - 5.25 GHz.

(i) For an outdoor access point operating in the band 5.15 - 5.25 GHz, the maximum power spectral density shall not exceed 17 dBm in any 1 MHz band. ^{note1}

(ii) For an indoor access point operating in the band 5.15 - 5.25 GHz, the maximum power spectral density shall not exceed 17 dBm in any 1 MHz band. ^{note1}

(iii) For fixed point-to-point access points operating in the band 5.15 - 5.25 GHz, transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi.

(iv) For mobile and portable client devices in the 5.15 - 5.25 GHz band, the maximum power spectral density shall not exceed 11 dBm in any 1 MHz band. ^{note1}

(2) For the 5.25 - 5.35 GHz and 5.47 - 5.725 GHz bands, the peak power spectral density shall not exceed 11 dBm in any 1 MHz band. ^{note1}

(3) For the band 5.725 - 5.85 GHz, the maximum power spectral density shall not exceed 30 dBm in any 500 kHz band. ^{note1, note2}

Note1: If transmitting antennas of directional gain greater than 6 dBi are used, the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Note2: Fixed point - to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information.

transmission.

Test Procedure

1. Use this procedure when the maximum peak conducted output power in the fundamental emission is used to demonstrate compliance.
2. Set the RBW = 1MHz for U-NII 1, U-NII 2A, U-NII C band and 510KHz for U-NII 3 band.
3. Set the VBW $\geq 3 \times$ RBW.
4. Set the span to encompass the entire EBW.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum power level.

Test Configuration




Test Results

Type	Bands	Channel	Power Spectral Density (dBm/MHz)	Limit (dBm/MHz)	Result
802.11a	U-NII 1	36	-3.528	11	Pass
		40	-2.397		
		48	-2.323		
802.11n (HT20)	U-NII 1	36	-4.336		
		40	-2.601		
		48	-3.877		
802.11n (HT40)	U-NII 1	38	-8.083		
		46	-5.723		
802.11ac (HT20)	U-NII 1	36	-4.197		
		40	-2.495		
		48	-3.700		
802.11ac (HT40)	U-NII 1	38	-9.140		
		46	-9.085		
802.11ac (HT80)	U-NII 1	42	-10.811		

Type	Bands	Channel	Power Spectral Density (dBm/500KHz)	Limit (dBm/500KHz)	Result
802.11a	U-NII 3	149	-7.210	30	Pass
		157	-5.278		
		165	-4.995		
802.11n (HT20)	U-NII 3	149	-5.941		
		157	-3.875		
		165	-2.972		
802.11n (HT40)	U-NII 3	151	-10.319		
		159	-9.888		
802.11ac (HT20)	U-NII 3	149	-5.862		
		157	-4.129		
		165	-2.719		
802.11ac (HT40)	U-NII 3	151	-8.830		
		159	-9.746		
802.11ac (HT80)	U-NII 3	155	-10.341		

Test plot as follows:

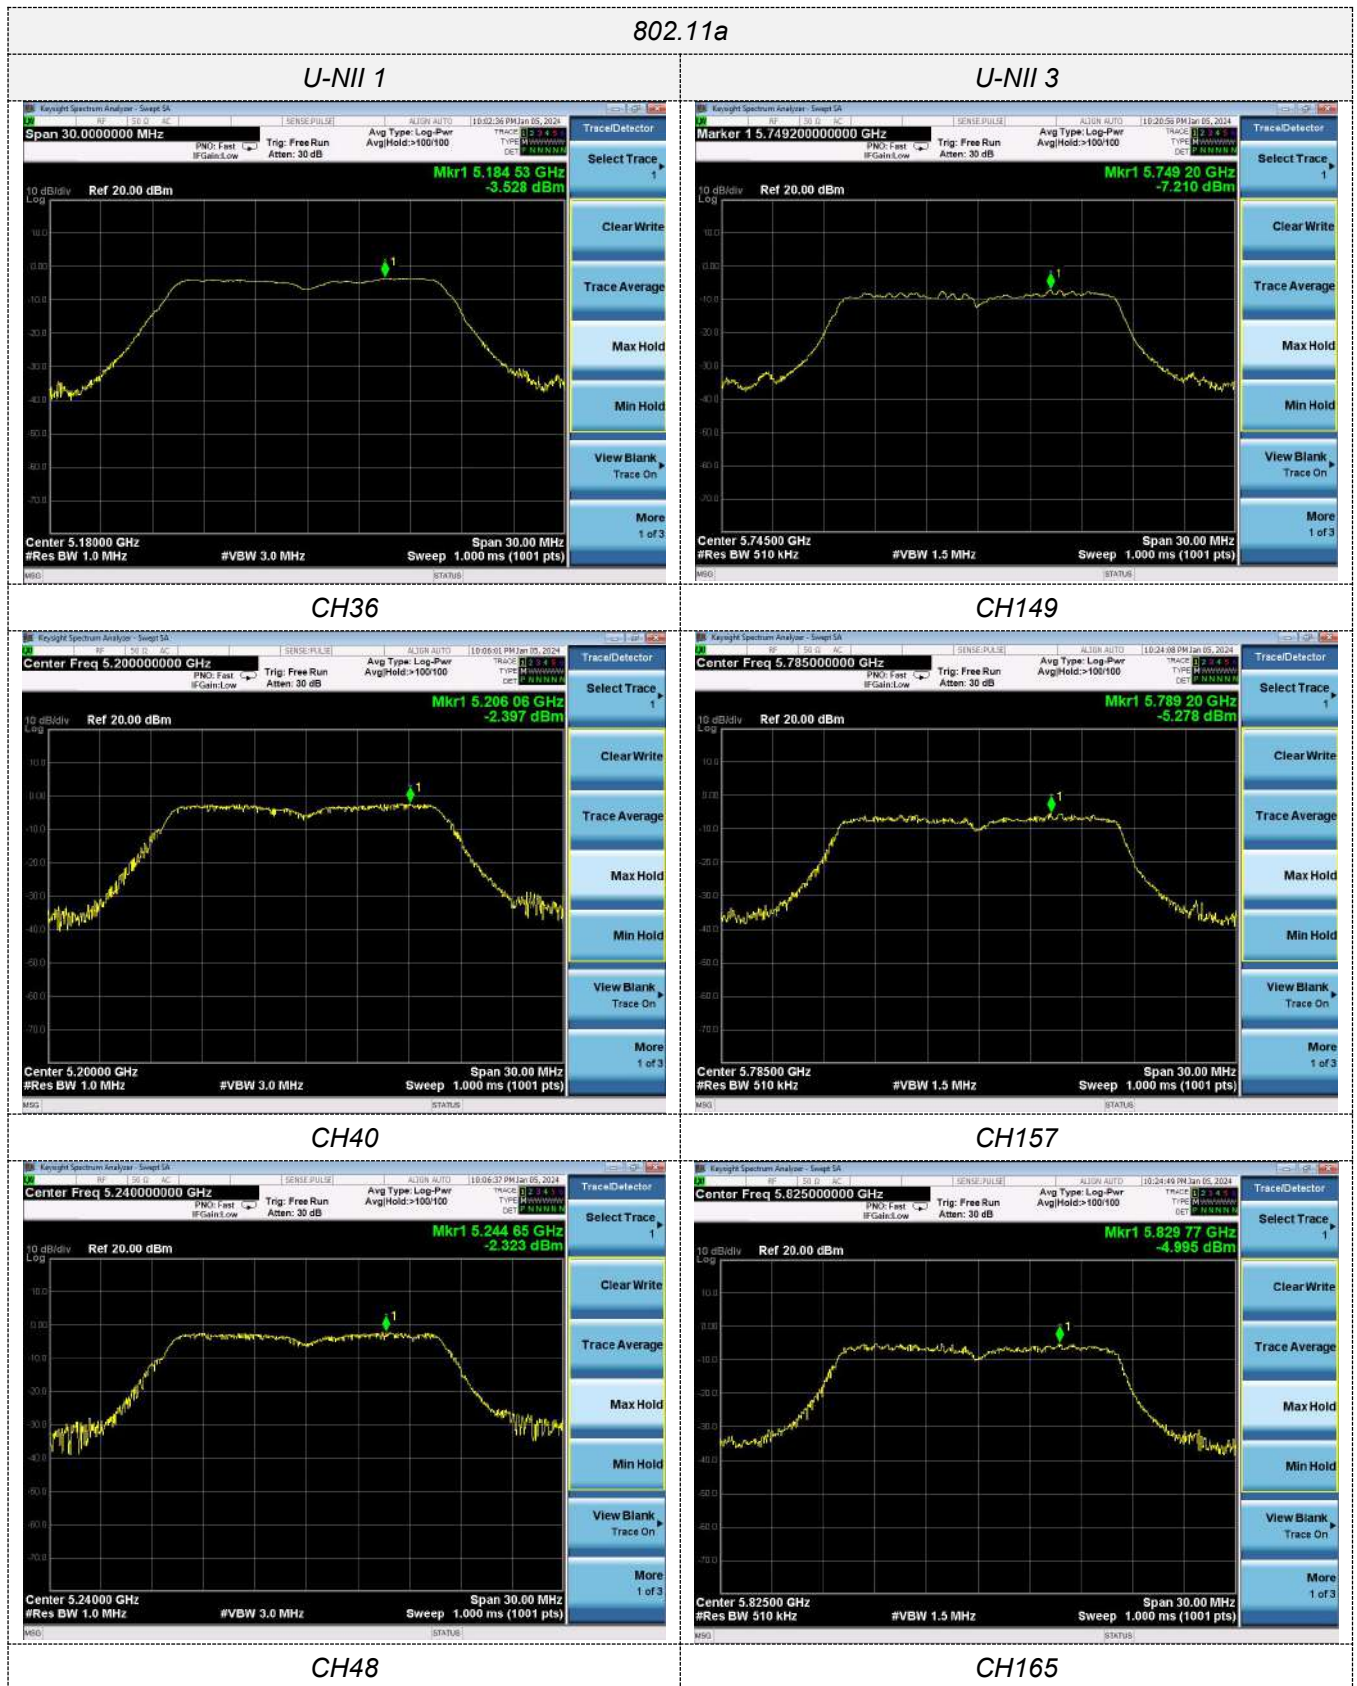


802.11n(HT20)

U-NII 1



U-NII 3

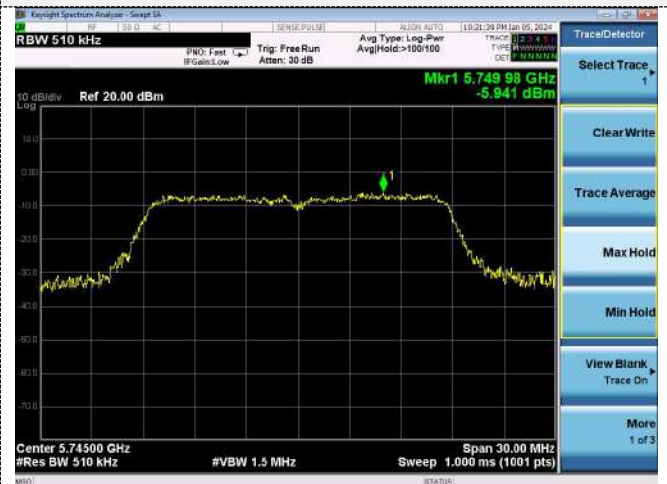

CH36




CH149



CH40



CH157

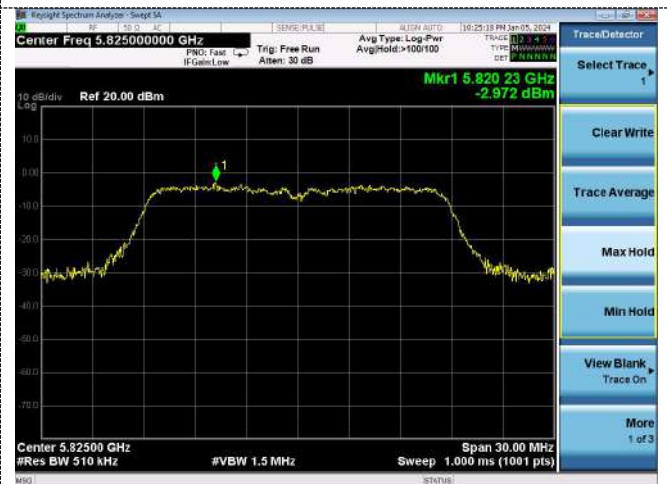


CH48


CH165

802.11n(HT40)

U-NII 1

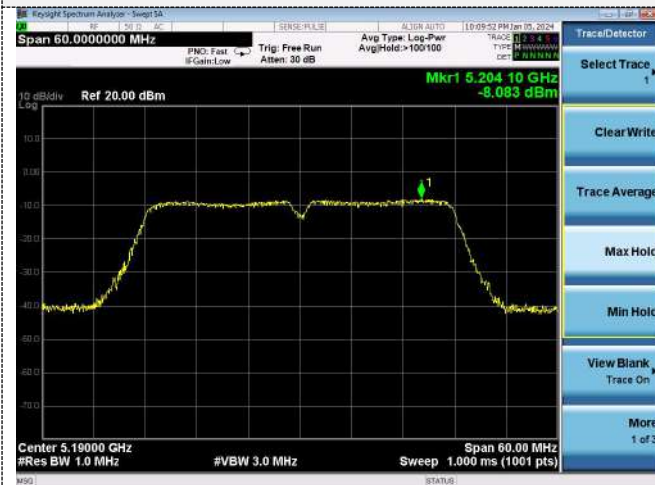


U-NII 3

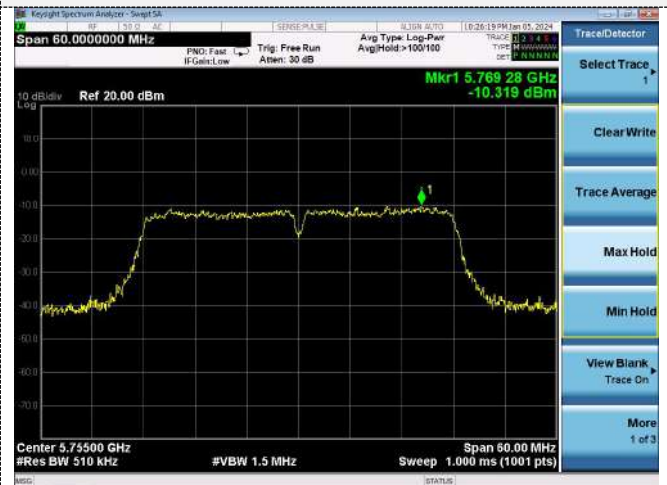

CH38



CH151

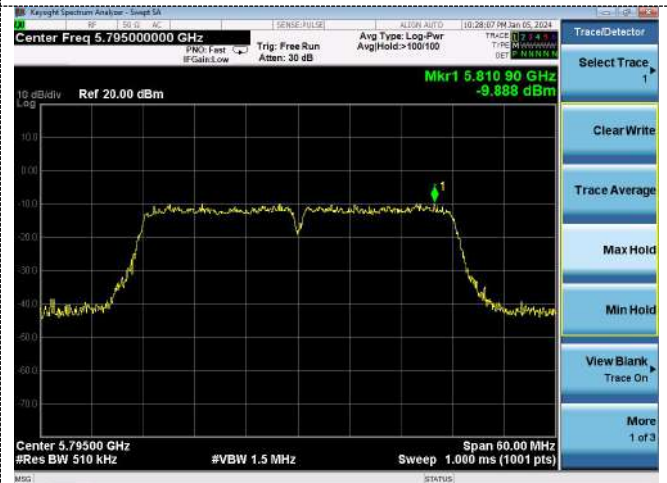


CH46

CH159

802.11ac(HT20)

U-NII 1

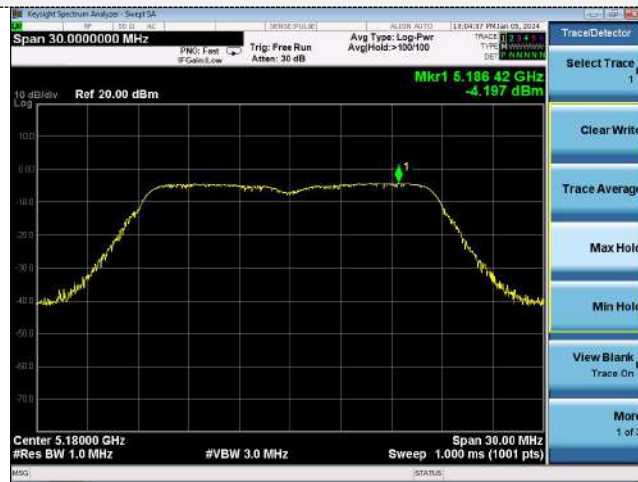

U-NII 3



CH36



CH149



CH40



CH157




CH48


CH165

802.11ac(HT40)


U-NII 1

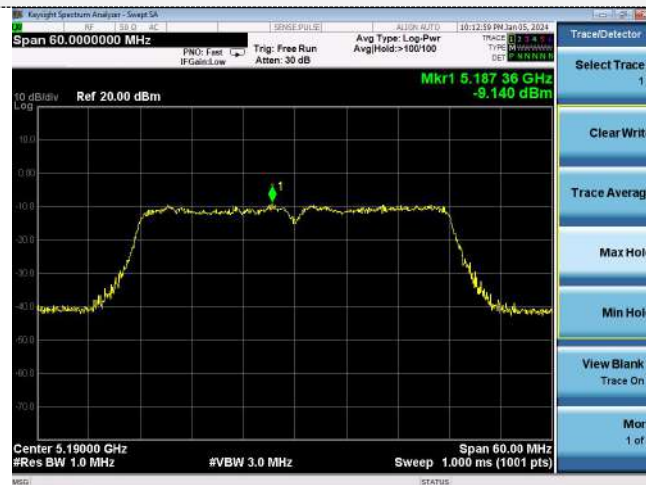


U-NII 3

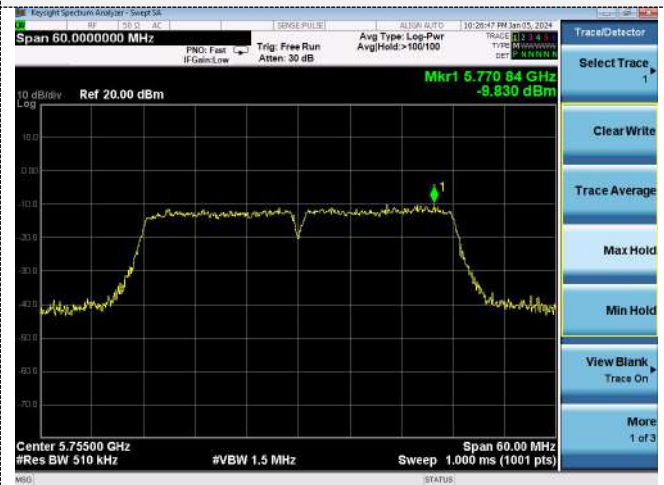

CH38

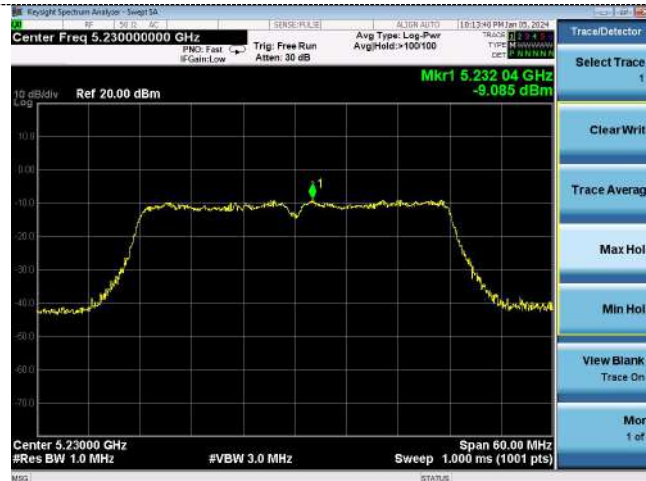

CH151

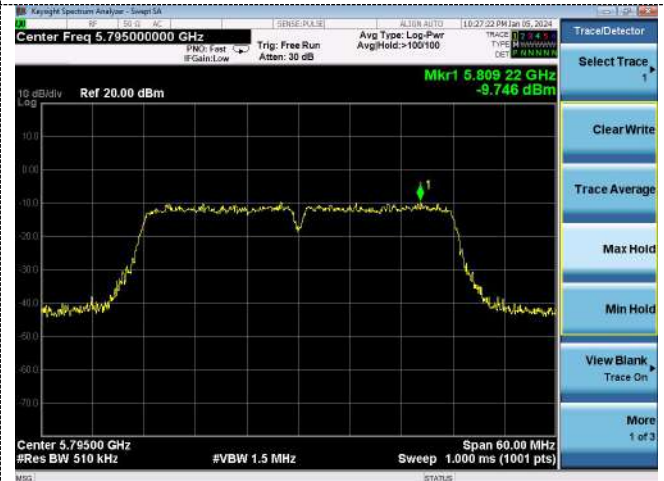


CH46


CH159

802.11ac(HT80)

U-NII 1

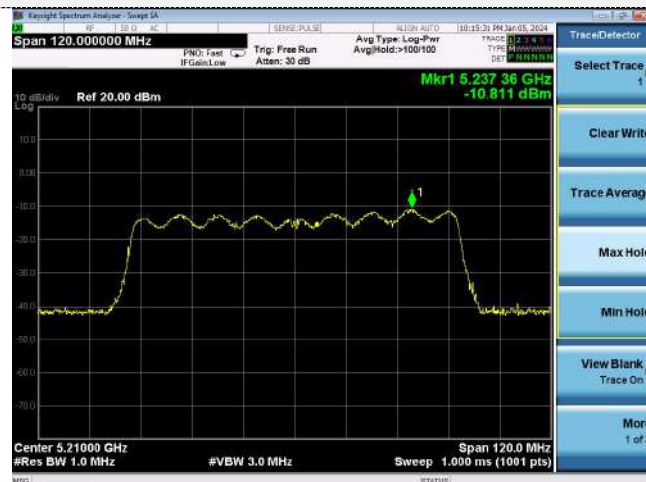

U-NII 3

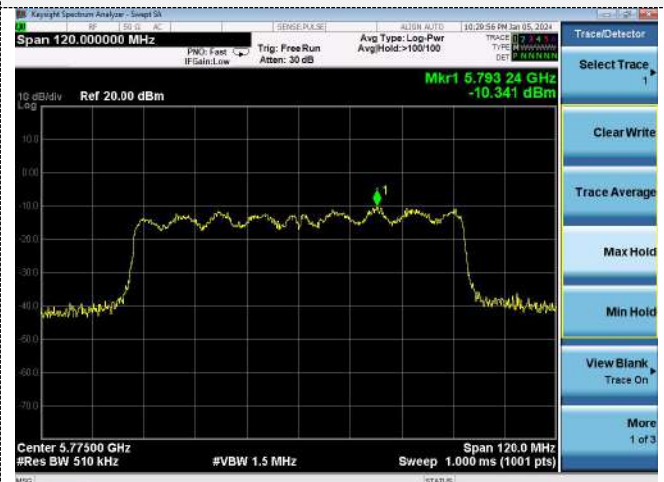

CH42

CH155

4.5 Emission Bandwidth (26dBm Bandwidth)

Limit

N/A

Test Procedure

1. Set resolution bandwidth (RBW) = approximately 1 % of the EBW.
2. Set the video bandwidth (VBW) > RBW.
3. Detector = Peak.
4. Trace mode = Max hold.
5. Measure the maximum width of the emission that is 26 dB down from the peak of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW / EBW ratio is approximately 1 %.

Test Configuration



Test Results


Type	Bands	Channel	26dB Bandwidth (MHz)	Limit (MHz)	Result
802.11a	U-NII 1	36	19.93	N/A	Pass
		40	20.46		
		48	21.74		
802.11n(HT20)	U-NII 1	36	20.82		
		40	20.71		
		48	20.67		
802.11n(HT40)	U-NII 1	38	39.79		
		46	40.29		
802.11ac(HT20)	U-NII 1	36	20.81		
		40	20.80		
		48	20.91		
802.11ac(HT40)	U-NII 1	38	40.05		
		46	39.96		
802.11ac(HT80)	U-NII 1	42	78.71		

Test plot as follows:


802.11a




802.11n(HT20)

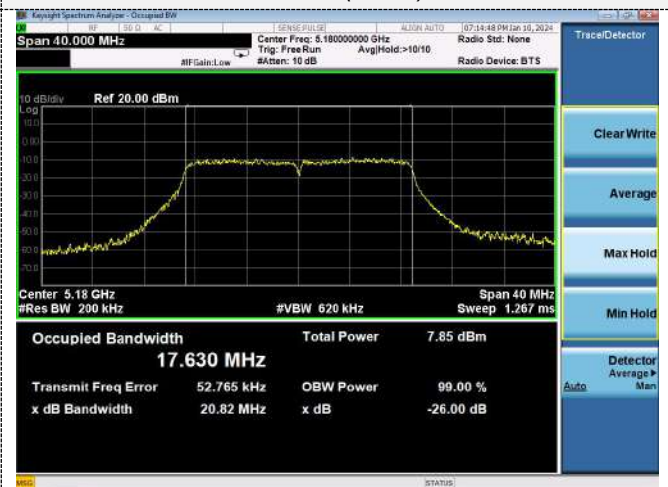

CH36

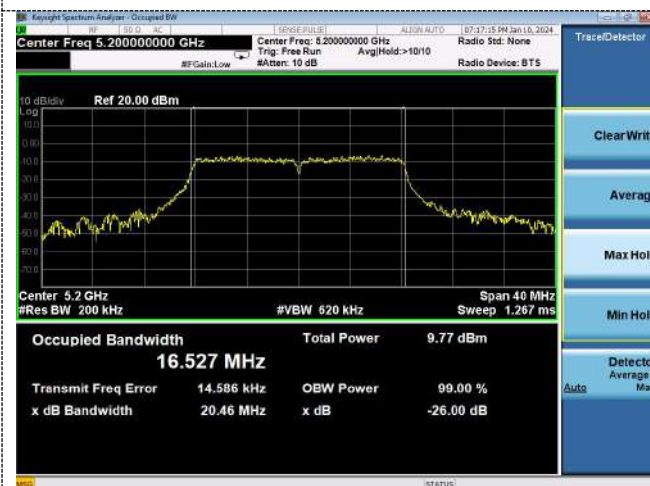

CH36

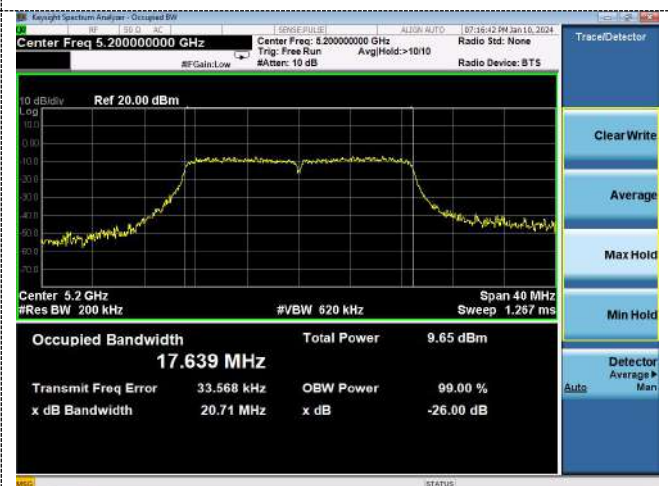

CH40



CH40




CH48




CH48



802.11n(HT40)

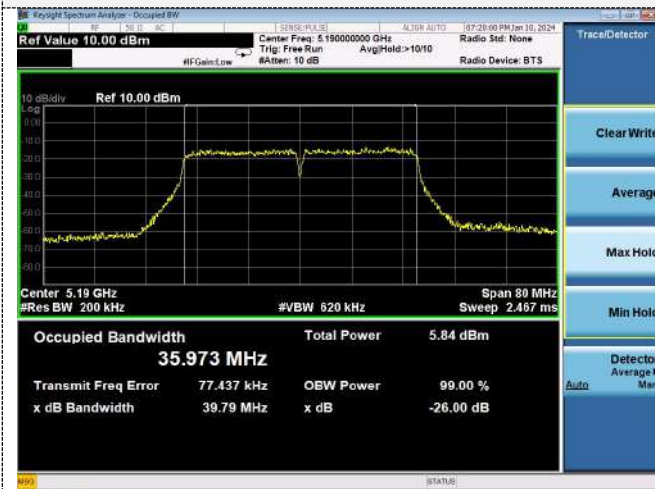


802.11ac(HT20)

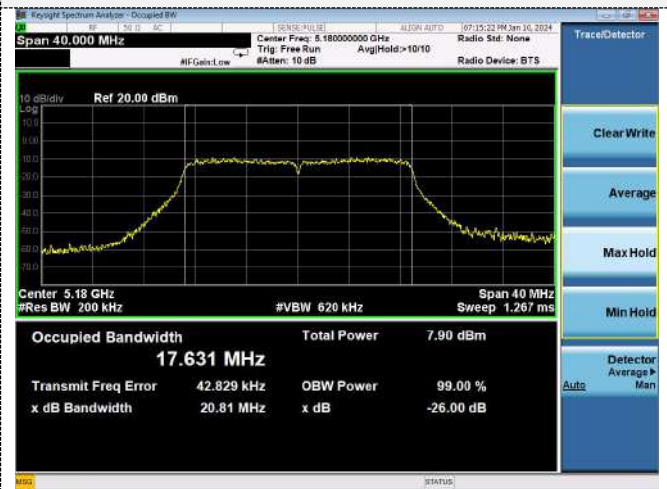

CH38



CH36

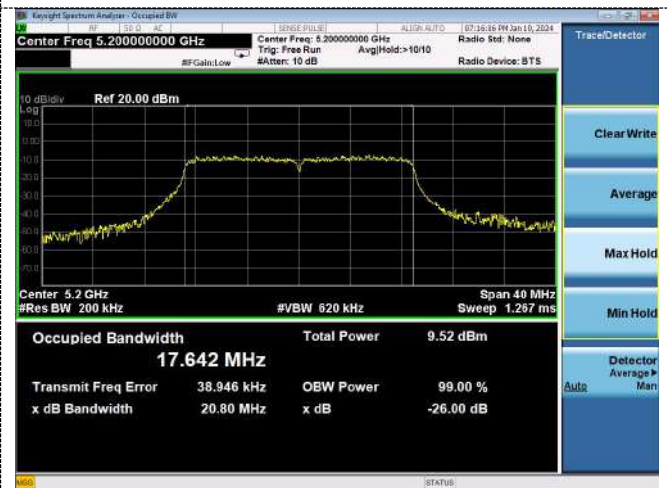


CH46




CH40

CH48

802.11ac(HT40)

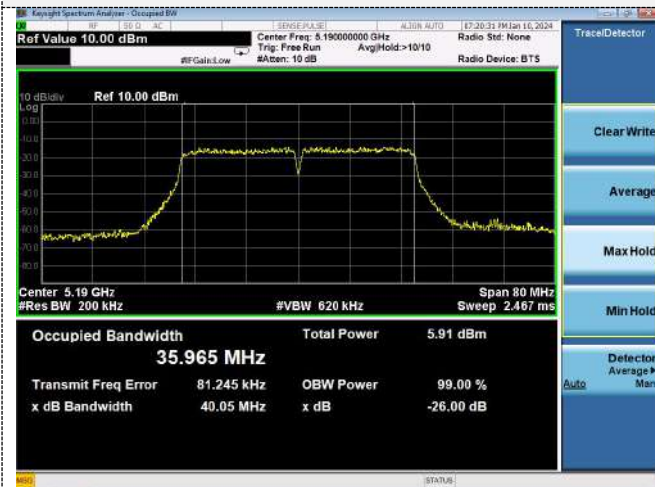

802.11ac(HT80)

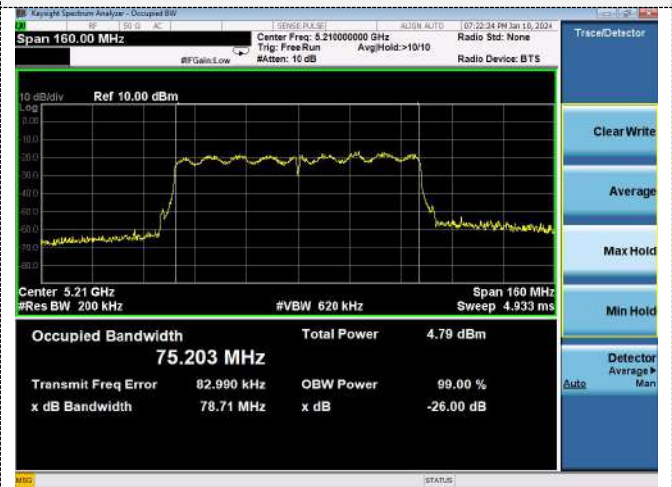

CH38



CH42

CH46

4.6 Minimum Emission Bandwidth (6dBm Bandwidth)

Limit

Within the 5.725-5.85 GHz band, the minimum 6 dB bandwidth of U-NII devices shall be at least 500 kHz.

Test Procedure

1. Set resolution bandwidth (RBW) = 100 kHz
2. Set the video bandwidth 3 x RBW.
3. Detector = Peak.
4. Trace mode = Max hold.
5. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.


Test Configuration



Test Results

Type	Bands	Channel	6dB Bandwidth (MHz)	Limit (KHz)	Result
802.11a	U-NII 3	149	16.50	≥500KHz	Pass
		157	16.54		
		165	16.51		
802.11n(HT20)	U-NII 3	149	17.69		
		157	17.67		
		165	17.72		
802.11n(HT40)	U-NII 3	151	36.44		
		159	36.44		
802.11ac(HT20)	U-NII 3	149	17.66		
		157	17.67		
		165	17.72		
802.11ac(HT40)	U-NII 3	151	36.42		
		159	36.43		
802.11ac(HT80)	U-NII 3	155	76.13		


Test plot as follows:

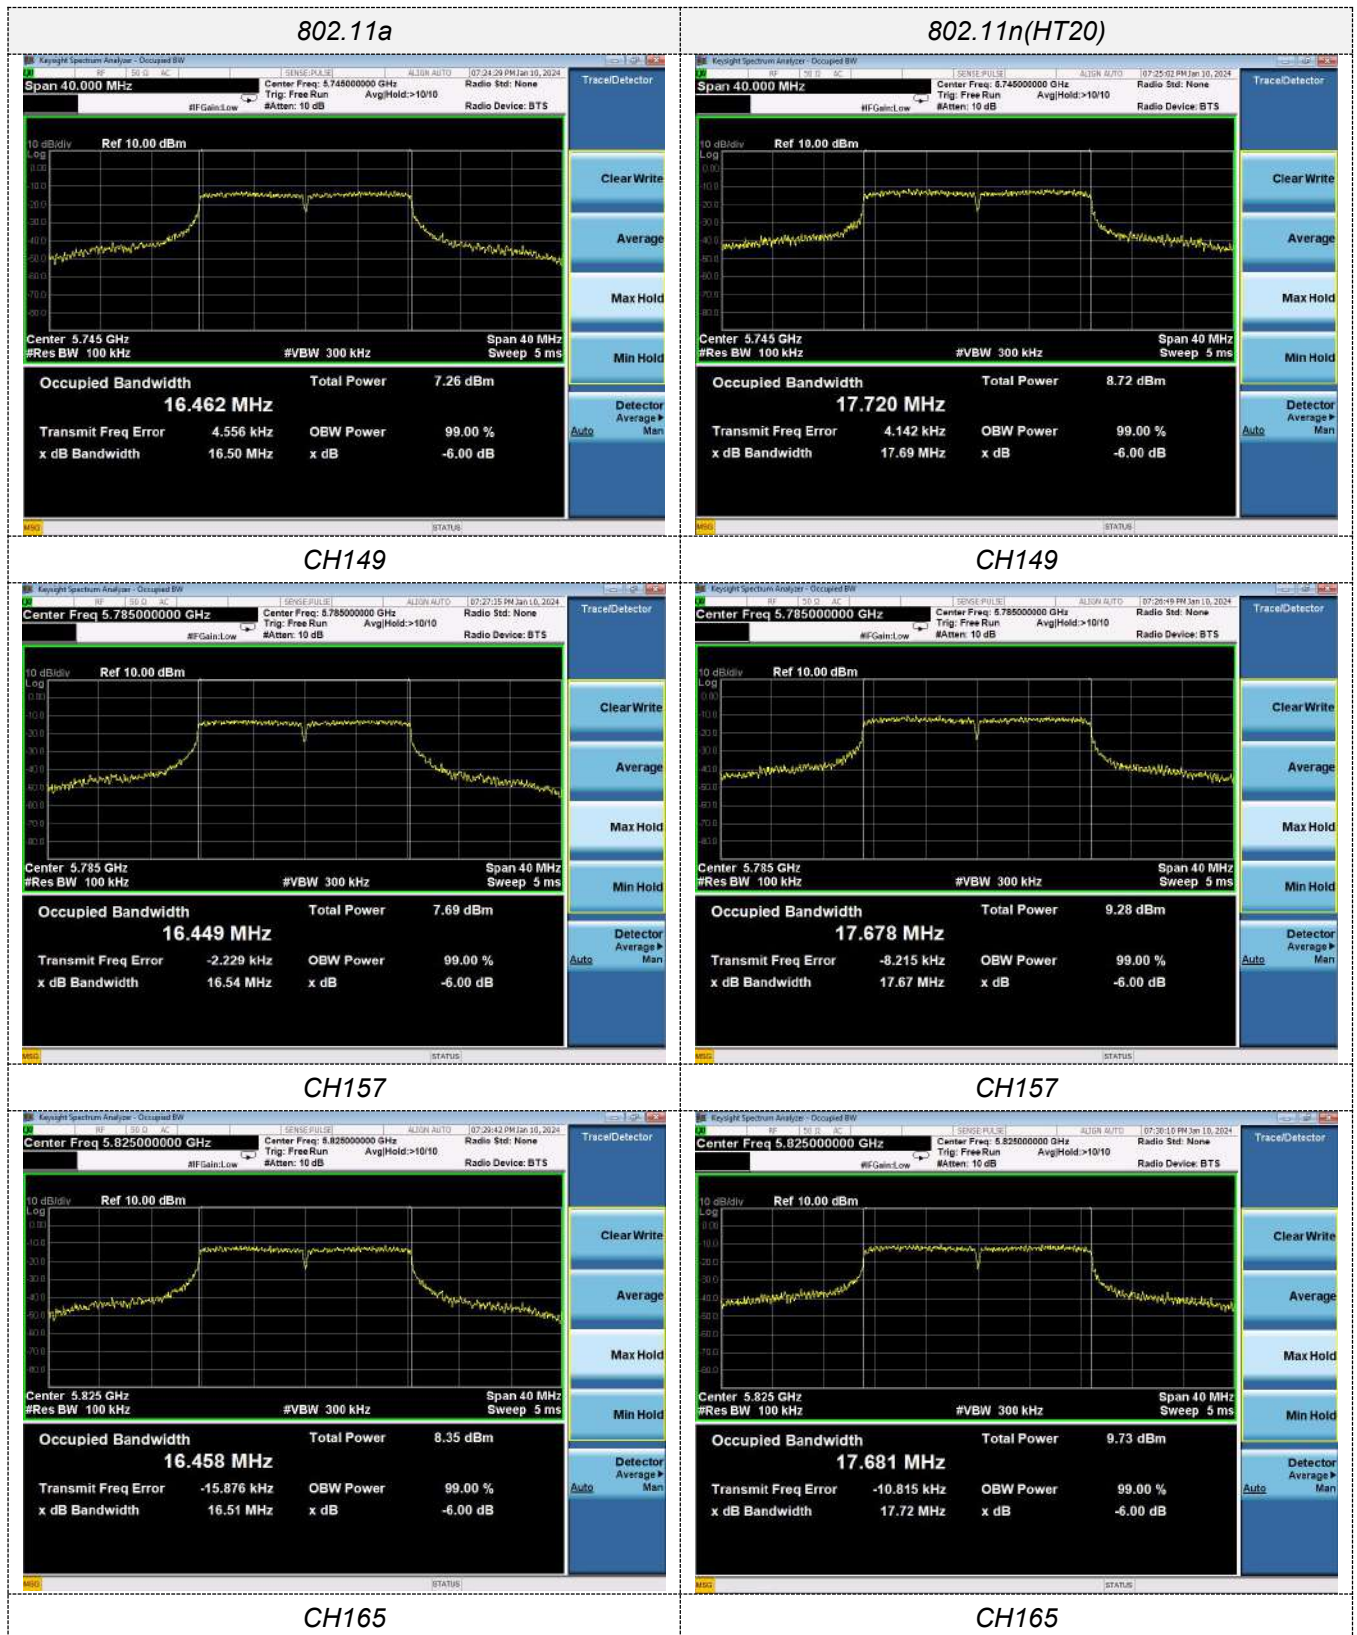


802.11n(HT40)




802.11ac(HT20)

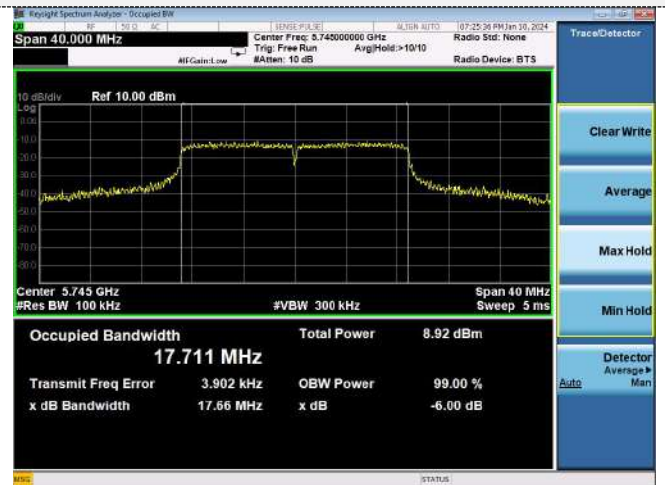

CH151

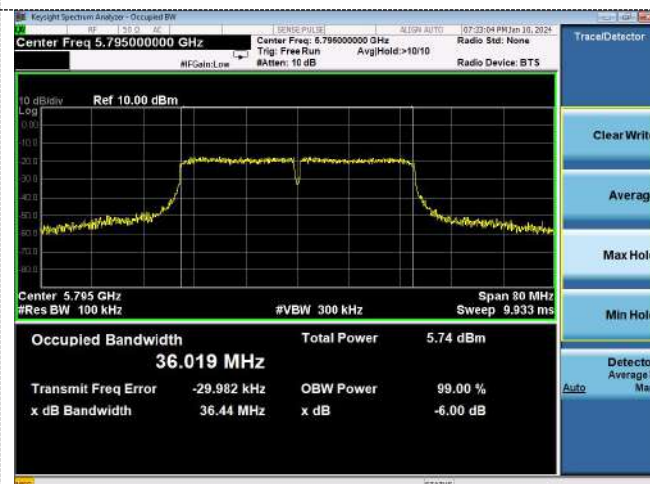


CH149

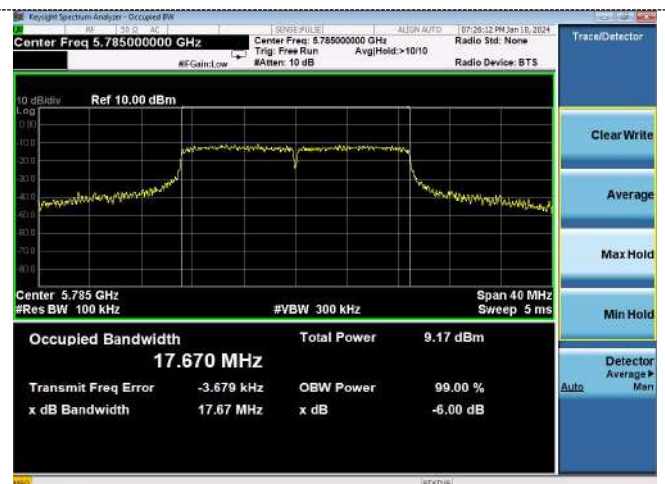

CH159




CH157

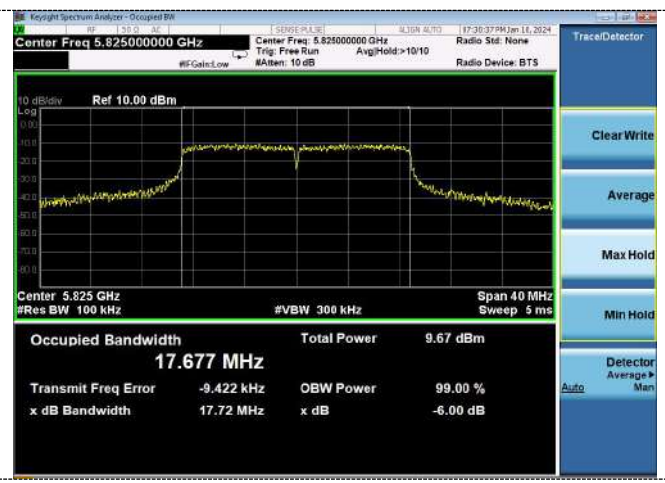


CH165


802.11ac(HT40)

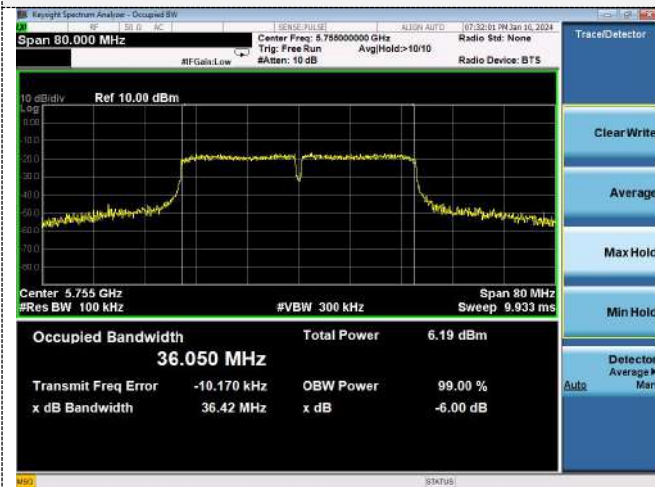

802.11ac(HT80)

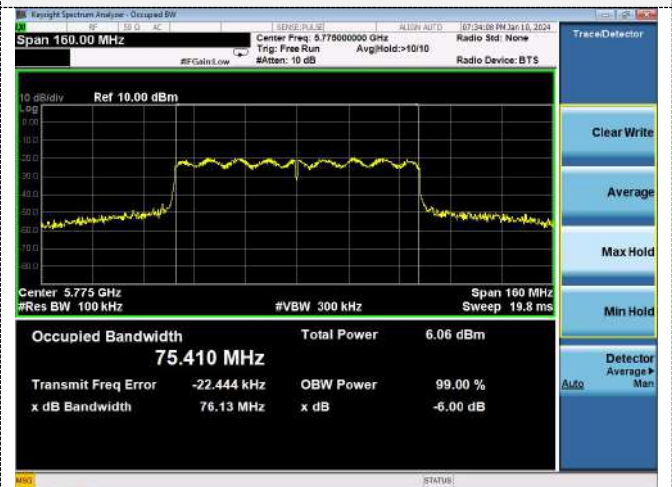

CH151

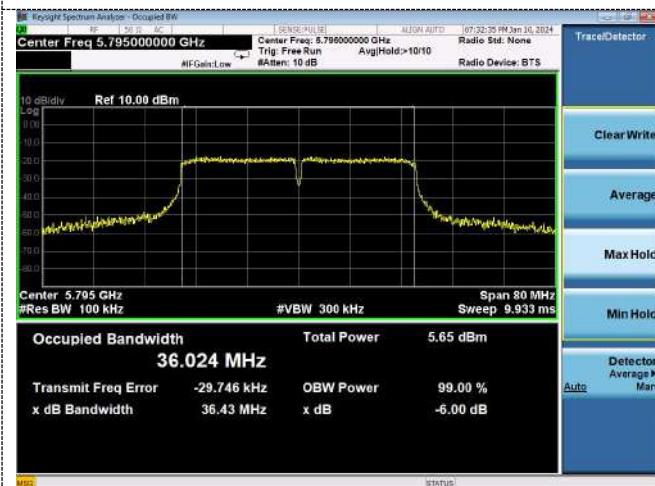

CH155

CH159

4.7 Out of Band Emissions

4.7.1 Applicable Standard

According to FCC §15.407(b)

Undesirable emission limits. Except as shown in paragraph (b)(7) of this section, the maximum emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:

(1) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

(2) For transmitters operating in the 5.725-5.850 GHz band: All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

4.7.2 Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW of spectrum analyzer to 1 MHz with a convenient frequency span.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

4.7.3 DEVIATION FROM STANDARD

No deviation.

4.7.4 TEST SETUP



4.7.5 EUT OPERATION CONDITIONS


The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

4.7.6 TEST RESULTS


Temperature:	26 °C	Relative Humidity:	54%
Pressure:	1012 hPa	Test Voltage :	AC 120V/60Hz

5.180~5.240 GHz

(802.11a) Band Edge, Left Side

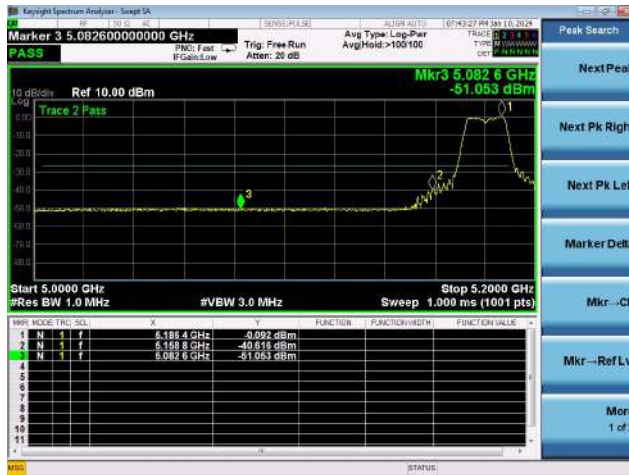


(802.11n20) Band Edge, Left Side

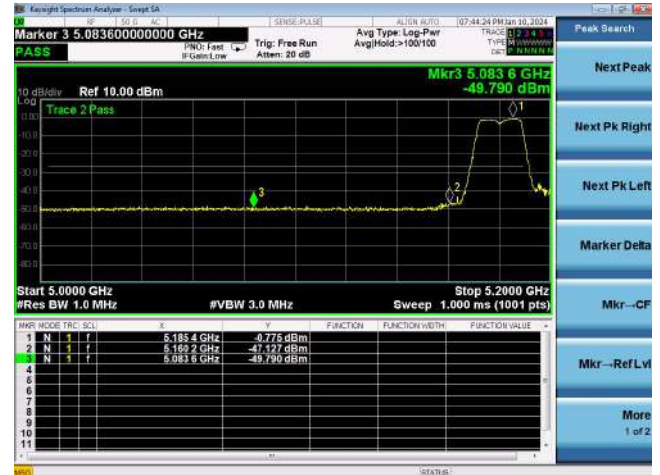

(802.11a) Band Edge, Right Side




(802.11n20) Band Edge, Right Side

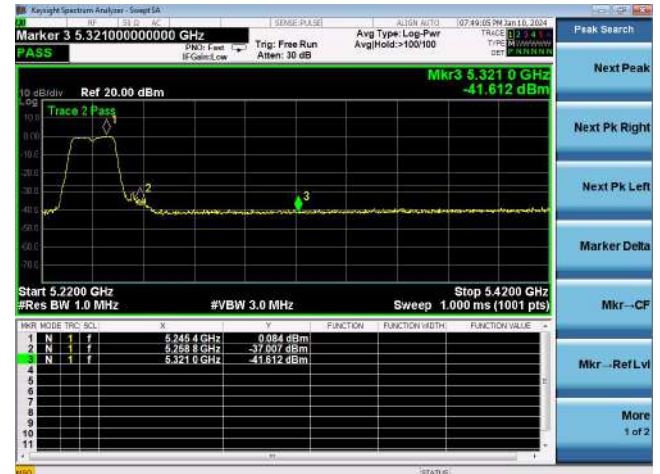


5.180~5.240 GHz


(802.11n40) Band Edge, Left Side

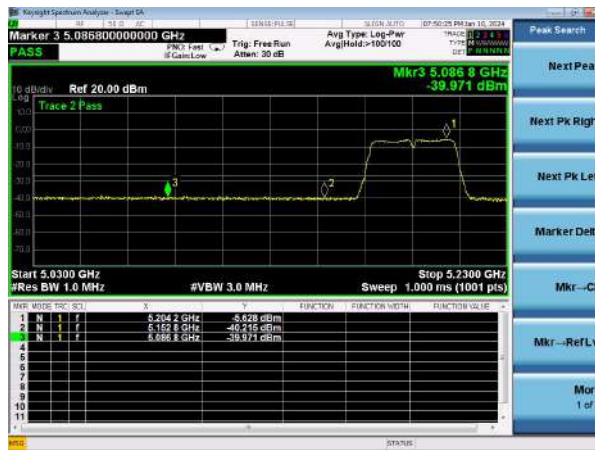

(802.11ac80) Band Edge

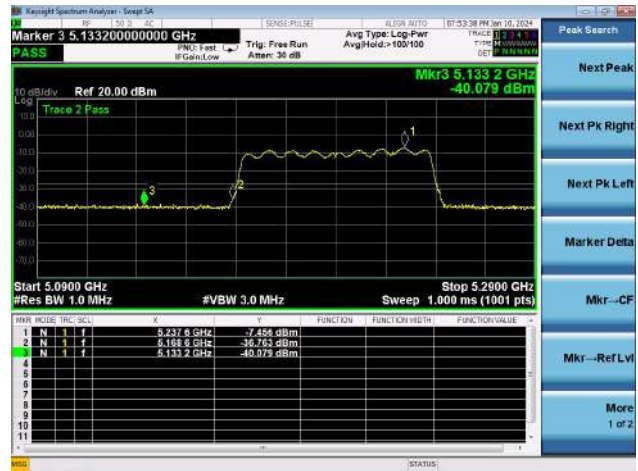


(802.11n40) Band Edge, Right Side

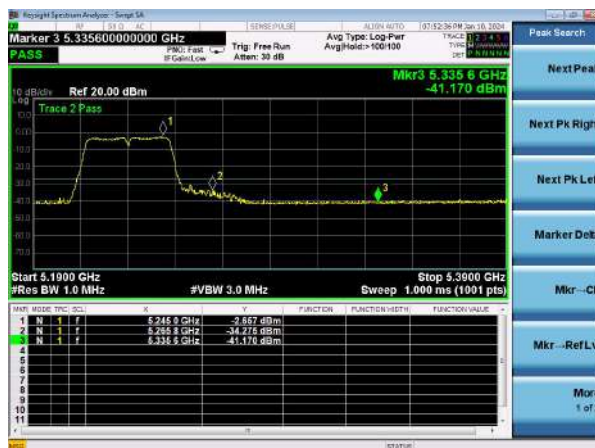

5.745~5.825 GHz


(802.11a) Band Edge, Left Side

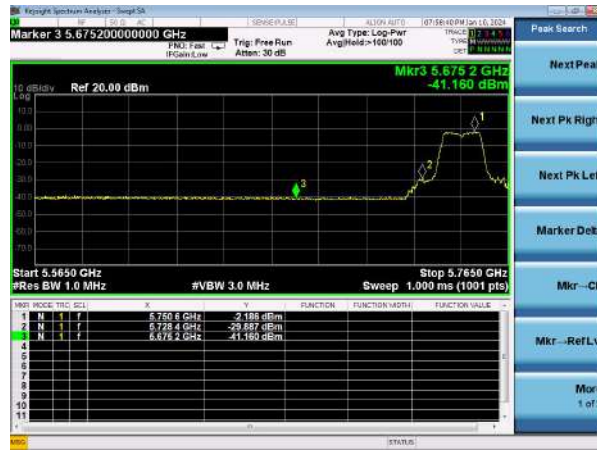

(802.11n20) Band Edge, Left Side



(802.11a) Band Edge, Right Side

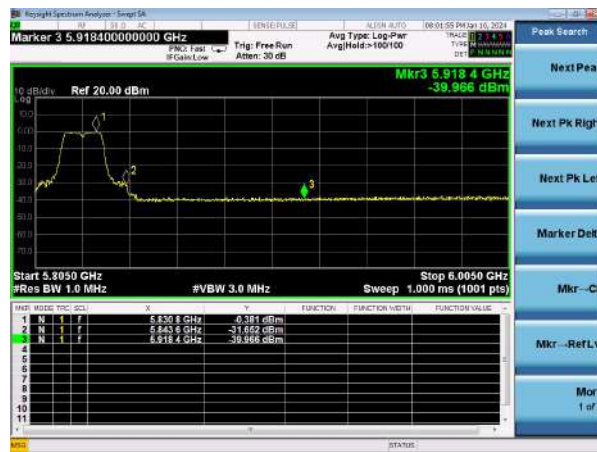

(802.11n20) Band Edge, Right Side



(802.11a) & 802.11n20 Band Edge, Left Side

Frequency(GHz)	Limit (dbm)	Rate (dBm/MHz)	Test Results(dbm) 802.11a	Test Results(dbm) 802.11n20
5.5650~5.6500	-27	0	-41.160	-40.912
5.6500~5.7000	-27~10.6	15.6	-41.160	-40.912
5.7000~5.7200	10.6~15.6	10	-29.887	-23.733
5.7200~5.7250	15.6~27	27	-29.887	-23.733
5.7250~5.7650	27	0	-2.186	-0.959

(802.11a) & 802.11n20 Band Edge, Right Side

Frequency(GHz)	Limit (dbm)	Rate (dBm/MHz)	Test Results(dbm) 802.11a	Test Results(dbm) 802.11n20
5.8050~5.8500	27	0	-0.381	0.759
5.8500~5.8550	27~15.6	27	-31.652	-25.725
5.8550~5.8750	15.6~10.6	10	-31.652	-25.725
5.8750~5.9250	10.6~27	10.6	-39.966	-39.884
5.9250~6.0050	-27	0	-39.966	-39.884

5.745~5.825 GHz


(802.11n40) Band Edge, Left Side



(802.11ac80) Band Edge



(802.11n40) Band Edge, Right Side

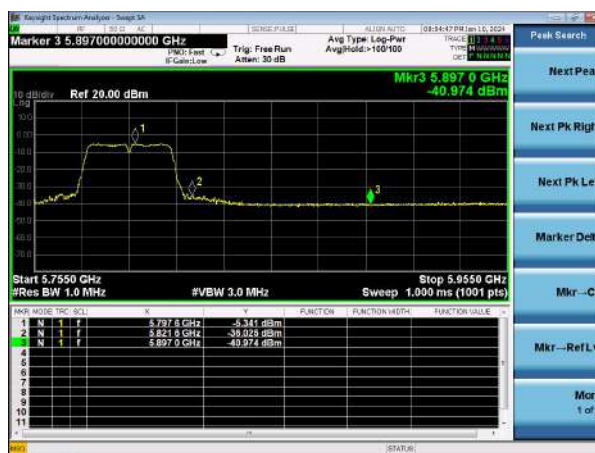

(802.11n40) Band Edge, Left Side

Frequency(GHz)	Limit (dbm)	Rate (dBm/MHz)	Test Results(dbm)
5.5950~5.6500	-27	0	-40.675
5.6500~5.7000	-27~10.6	15.6	-40.675
5.7000~5.7200	10.6~15.6	10	-31.121
5.7200~5.7250	15.6~27	27	-31.121
5.7250~5.7950	27	0	-5.654

(802.11n40) Band Edge, Right Side

Frequency(GHz)	Limit (dbm)	Rate (dBm/MHz)	Test Results(dbm)
5.7550~5.8500	27	0	-5.341
5.8500~5.8550	27~15.6	27	-36.025
5.8550~5.8750	15.6~10.6	10	-36.025
5.8750~5.9250	10.6~27	10.6	-40.974
5.9250~5.9550	-27	0	-40.974

(802.11ac80) Band Edge

Frequency(GHz)	Limit (dbm)	Rate (dBm/MHz)	Test Results(dbm)
5.6500~5.7000	-27~10.6	15.6	-38.339
5.7000~5.7200	10.6~15.6	10	-38.339
5.7200~5.7250	15.6~27	27	-33.199
5.7250~5.8500	27	0	-6.367
5.8500~5.8550	27~15.6	27	-38.339

4.8 SPURIOUS RF CONDUCTED EMISSIONS

4.8.1 Conformance Limit

Frequency Band (MHz)	Limit
5150 - 5250	Outside of the 5.15-5.35 GHz band: e.i.r.p. -27 dBm
5250 - 5350	Outside of the 5.15-5.35 GHz band: e.i.r.p. -27 dBm
5470 - 5725	Outside of the 5.47-5.725 GHz band: e.i.r.p. -27 dBm
5725 - 5850	All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

4.8.2 Measuring Instruments

The Measuring equipment is listed in the section 6.3 of this test report.

4.8.3 Test Setup



4.8.4 Test Procedure

The Spurious RF conducted emissions compliance of RF radiated emission should be measured by following the guidance in ANSI C63.10-2013 with respect to maximizing the emission by rotating the EUT, measuring the emission while the EUT is situated in three orthogonal planes (if appropriate), adjusting the measurement antenna height and polarization etc. Set RBW=1MHz and VBW= 3MHz to measure the peak field strength, and measure frequency range from 30MHz to 40GHz.

4.8.5 Test Results

Remark: The measurement frequency range is from 30MHz to the 10th harmonic of the fundamental frequency. The lowest, middle and highest channels are tested to verify the spurious emissions and band edge measurement data.

At 26.5GHz to 40GHz, the amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.


5.2G

Test Plot

802.11a on channel 36



802.11n20 on channel 36

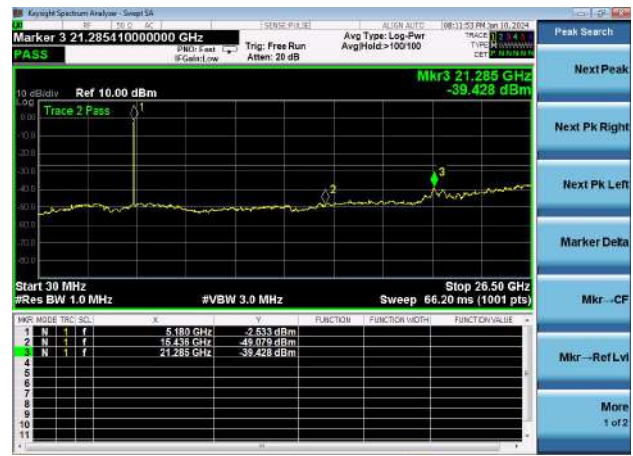


802.11a on channel 40



802.11n20 on channel 40



802.11a on channel 48

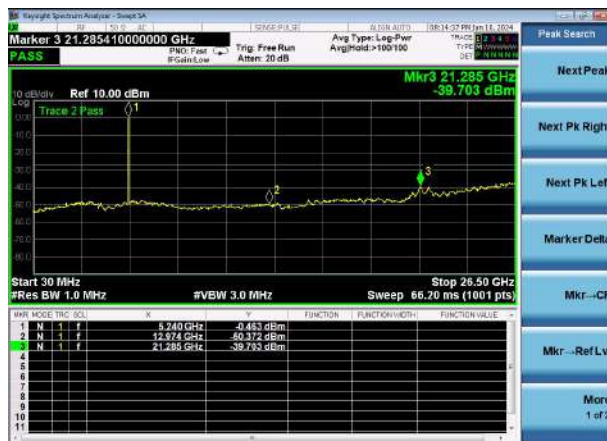


802.11n20 on channel 48



Test Plot

802.11n40 on channel 38

802.11n40 on channel 46

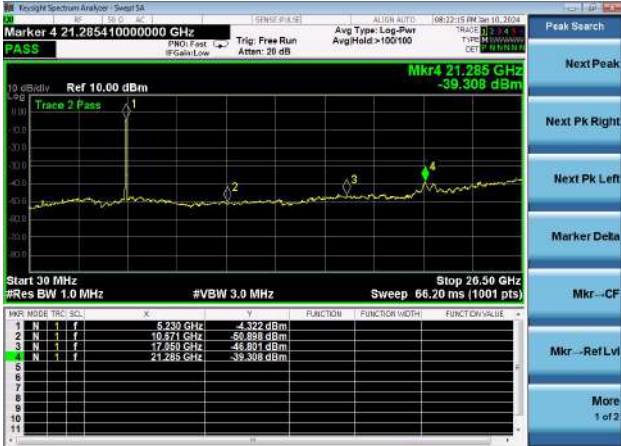


802.11ac80 on channel 42




5.8G
Test Plot

802.11a on channel 149

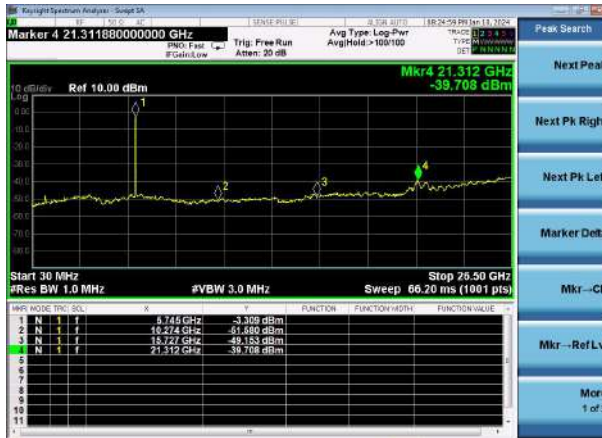

802.11n20 on channel 149

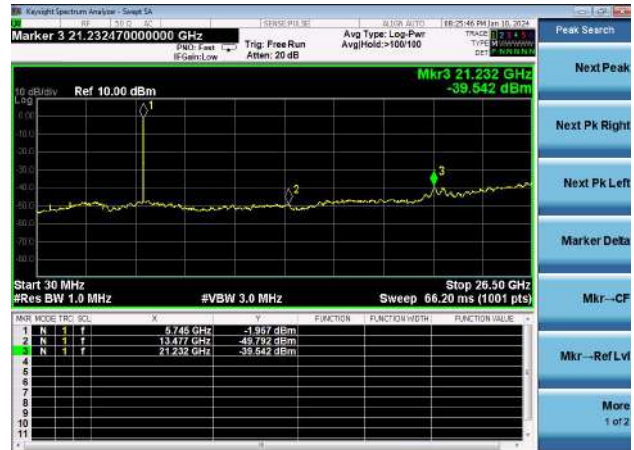

802.11a on channel 157




802.11n20 on channel 157



802.11a on channel 165



802.11n20 on channel 165

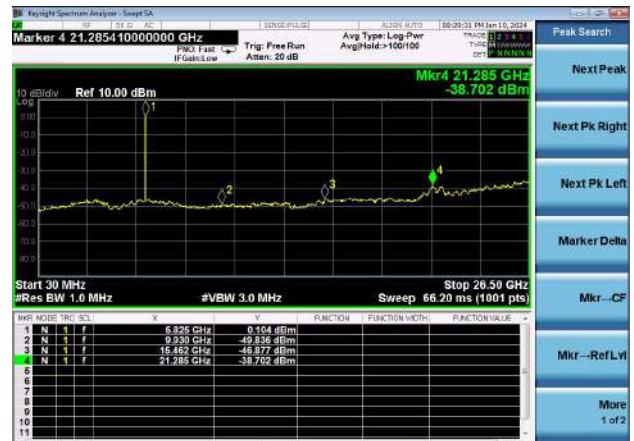


Test Plot

802.11n40 on channel 151



802.11n40 on channel 159

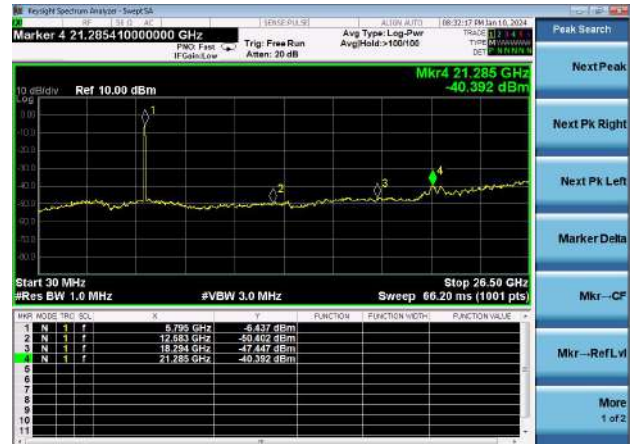

802.11ac80 on channel 155




Frequency (GHz)	Limit (dbm)	Rate (dBm/MHz)	Test Results(dbm) 802.11a on channel 149	Test Results(dbm) 802.11n20 on channel 149
0.030~5.7650	/	/	-51.580	-49.792
5.5650~5.6500	-27	0	-51.580	-49.792
5.6500~5.7000	-27~10.6	15.6	-51.580	-49.792
5.7000~5.7200	10.6~15.6	10	-51.580	-49.792
5.7200~5.7250	15.6~27	27	-49.153	-49.792
5.7250~5.7650	27	0	-3.309	-1.957
5.7650~26.5	/	/	-39.708	-39.542
Frequency (GHz)	Limit (dbm)	Rate (dBm/MHz)	Test Results(dbm) 802.11a on channel 157	Test Results(dbm) 802.11n20 on channel 157
0.030~5.7550	/	/	-49.975	-50.498
5.7550~5.8500	27	0	-2.297	-0.952
5.8500~5.8550	27~15.6	27	-38.162	-39.644
5.8550~5.8750	15.6~10.6	10	-38.162	-39.644
5.8750~5.9250	10.6~27	10.6	-38.162	-39.644
5.9250~5.9550	-27	0	-38.162	-39.644
5.9550~26.5	/	/	-38.162	-39.644
Frequency (GHz)	Limit (dbm)	Rate (dBm/MHz)	Test Results(dbm) 802.11a on channel 165	Test Results(dbm) 802.11n20 on channel 165
0.030~5.8050	/	/	-49.291	-49.836
5.8050~5.8500	27	0	-0.939	0.104
5.8500~5.8550	27~15.6	27	-40.278	-38.702
5.8550~5.8750	15.6~10.6	10	-40.278	-38.702
5.8750~5.9250	10.6~27	10.6	-40.278	-38.702
5.9250~6.0050	-27	0	-40.278	-38.702
6.0050~26.5	/	/	-40.278	-38.702
Frequency (GHz)	Limit (dbm)	Rate (dBm/MHz)	Test Results(dbm) 802.11n40 on channel 151	Test Results(dbm) 802.11n40 on channel 159
0.030~5.7550	/	/	-47.773	-50.402
5.7550~5.8500	27	0	-6.720	-6.437
5.8500~5.8550	27~15.6	27	-40.044	-40.392
5.8550~5.8750	15.6~10.6	10	-40.044	-40.392
5.8750~5.9250	10.6~27	10.6	-40.044	-40.392
5.9250~5.9550	-27	0	-40.044	-40.392
5.9550~26.5	/	/	-40.044	-40.392
Frequency (GHz)	Limit (dbm)	Rate (dBm/MHz)	Test Results(dbm) 802.11ac80 on channel 155	
0.030~5.6500	/	/	-39.838	
5.6500~5.7000	-27~10.6	15.6	-39.838	
5.7000~5.7200	10.6~15.6	10	-39.838	
5.7200~5.7250	15.6~27	27	-39.838	
5.7250~5.8500	27	0	-7.020	
5.8500~5.8550	27~15.6	27	-50.645	
5.8550~26.5	/	/	-50.645	

4.9 Frequency Stability

Limit

Manufacturers of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the users manual.

TEST CONFIGURATION

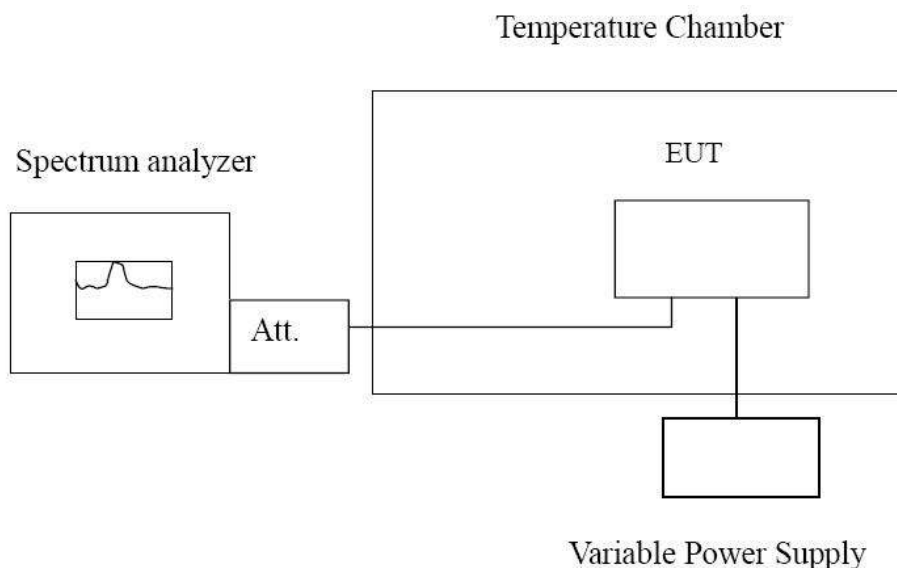

TEST PROCEDURE

Frequency Stability under Temperature Variations:

The equipment under test was connected to an external AC or DC power supply and input rated voltage. RF output was connected to a frequency counter or spectrum analyzer via feed through attenuators. The EUT was placed inside the temperature chamber. Set the spectrum analyzer RBW low enough to obtain the desired frequency resolution and measure EUT 25°C operating frequency as reference frequency. Turn EUT off and set the chamber temperature to -30°C. After the temperature stabilized for approximately 30 minutes recorded the frequency. Repeat step measure with 10°C increased per stage until the highest temperature of +50°C reached.

Frequency Stability under Voltage Variations:

Set chamber temperature to 25°C. Use a variable AC power supply / DC power source to power the EUT and set the voltage to rated voltage. Set the spectrum analyzer RBW low enough to obtain the desired frequency resolution and recorded the frequency.

Reduce the input voltage to specify extreme voltage variation ($\pm 15\%$) and endpoint, record the maximum frequency change.

Reference Frequency: 802.11ac channel=36 frequency=5180MHz					
Voltage (V)	Temperature (°C)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
120.0	-30	67.71	0.013	Within the band of operation	Pass
	-20	81.35	0.016		
	-10	104.13	0.020		
	0	82.95	0.016		
	10	93.44	0.018		
	20	48.27	0.009		
	30	71.92	0.014		
	40	77.52	0.015		
	50	82.22	0.016		
138.0	25	97.84	0.019	Within the band of operation	Pass
102.0	25	54.38	0.010		

Reference Frequency: 802.11ac channel=149 frequency=5745MHz					
Voltage (V)	Temperature (°C)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
120.0	-30	108.22	0.019	Within the band of operation	Pass
	-20	89.51	0.016		
	-10	49.27	0.009		
	0	62.58	0.011		
	10	56.98	0.010		
	20	51.16	0.009		
	30	52.57	0.009		
	40	84.92	0.015		
	50	109.91	0.019		
138.0	25	54.60	0.010	Within the band of operation	Pass
102.0	25	53.89	0.009		

4.10 Antenna Requiremen

Standard Applicable

For intentional device, according to FCC 47 CFR Section 15.203:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited

FCC CFR Title 47 Part 15 Subpart C Section 15.247(c) (1) (I):

(i) Systems operating in the 2400-2483.5 MHz band that is used exclusively for fixed. Point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6dBi.

Test Result:

The maximum gain of antenna is 4.9 dBi.

Remark:The antenna gain is provided by the customer, if the data provided by the customer is not accurate, BSL Testing Co., Ltd. does not assume any responsibility.

5 Test Setup Photos of the EUT

Reference to the appendix I for details.

6 Photos of the EUT

Reference to the appendix II for details.

******* End of Report *******