

# TEST REPORT

**Test Report No. :** UL-RPT-RP14705831-1116A

**Customer** : Raspberry Pi LTD

**Model No. / HVIN** : V2.0

**PMN** : Raspberry Pi 5

**FCC ID** : 2ABCB-RPI5

**ISED Certification No.** : IC: 20953-RPI5

**Technology** : WLAN

**Test Standard(s)** : FCC Parts 15.209(a) & 15.247  
Innovation, Science and Economic Development Canada  
RSS-247 Issue 2 February 2017  
RSS-Gen Issue 5 February 2021

**Test Laboratory** : UL International (UK) Ltd, Basingstoke, Hampshire, RG24 8AH,  
United Kingdom

1. This test report shall not be reproduced except in full, without the written approval of UL International (UK) Ltd.
2. The results in this report apply only to the sample(s) tested.
3. The sample tested is in compliance with the above standard(s).
4. The test results in this report are traceable to the national or international standards.
5. Version 4.0 supersedes all previous versions.

**Date of Issue:** 17 October 2023

**Checked by:**

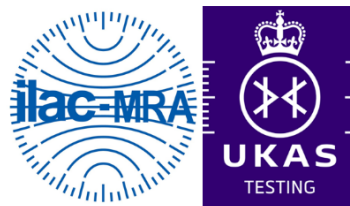


Ben Mercer  
Lead Project Engineer, Radio Laboratory

**Company Signatory:**



Sarah Williams  
RF Operations Leader, Radio Laboratory



5772

---

**UL International (UK) LTD**

Unit 1-3 Horizon, Kingsland Business Park, Wade Road, Basingstoke, Hampshire, RG24 8AH, UK  
Telephone: +44 (0)1256 312000

**Customer Information**

<b>Company Name:</b>	Raspberry Pi LTD
<b>Address:</b>	Maurice Wilkes Building, St. John's Innovation Park, Cambridge, CB4 0DS, United Kingdom

**Report Revision History**

<b>Version Number</b>	<b>Issue Date</b>	<b>Revision Details</b>	<b>Revised By</b>
1.0	13/09/2023	Initial Version	Ben Mercer
2.0	13/09/2023	Q values removed	Ben Mercer
3.0	13/10/2023	Admin update	Ben Mercer
4.0	17/10/2023	FVIN removed	Ben Mercer

**Table of Contents**

<b>Customer Information .....</b>	<b>2</b>
<b>Report Revision History .....</b>	<b>2</b>
<b>1 Attestation of Test Results .....</b>	<b>4</b>
1.1 Description of EUT .....	4
1.2 General Information .....	4
1.3 Summary of Test Results .....	5
1.4 Deviations from the Test Specification .....	5
<b>2 Summary of Testing .....</b>	<b>6</b>
2.1 Facilities and Accreditation .....	6
2.2 Methods and Procedures .....	6
2.3 Calibration and Uncertainty .....	7
2.4 Test and Measurement Equipment .....	8
<b>3 Equipment Under Test (EUT) .....</b>	<b>11</b>
3.1 Identification of Equipment Under Test (EUT) .....	11
3.2 Modifications Incorporated in the EUT .....	11
3.3 Additional Information Related to Testing .....	12
3.4 Description of Available Antennas .....	12
3.5 Description of Test Setup .....	13
<b>4 Antenna Port Test Results .....</b>	<b>17</b>
4.1 Transmitter 99% Occupied Bandwidth .....	17
4.2 Transmitter Minimum 6 dB Bandwidth .....	22
4.3 Transmitter Power Spectral Density .....	27
4.4 Transmitter Maximum (Average) Output Power .....	32
<b>5 Radiated Test Results .....</b>	<b>35</b>
5.1 Transmitter Radiated Emissions <1 GHz .....	35
5.2 Transmitter Radiated Emissions >1 GHz .....	37
5.3 Transmitter Band Edge Radiated Emissions .....	40

## **1 Attestation of Test Results**









### **1.1 Description of EUT**

The equipment under test was a single board computer with *Bluetooth*, 2.4 GHz WLAN and 5 GHz WLAN transceivers.

### **1.2 General Information**

<b>Specification Reference:</b>	47CFR15.247
<b>Specification Title:</b>	Code of Federal Regulations Volume 47 (Telecommunications): Part 15 Subpart C (Intentional Radiators) – Section 15.247
<b>Specification Reference:</b>	47CFR15.209
<b>Specification Title:</b>	Code of Federal Regulations Volume 47 (Telecommunications): Part 15 Subpart C (Intentional Radiators) – Section 15.209
<b>Specification Reference:</b>	RSS-Gen Issue 5 February 2021
<b>Specification Title:</b>	General Requirements for Compliance of Radio Apparatus
<b>Specification Reference:</b>	RSS-247 Issue 2 February 2017
<b>Specification Title:</b>	Digital Transmission Systems (DTSs), Frequency Hopping Systems (FHSs) and Licence-Exempt Local Area Network (LE-LAN) Devices
<b>Site Registration:</b>	FCC: 685609, ISEDC: 20903
<b>FCC Lab. Designation No.:</b>	UK2011
<b>ISEDC CABID:</b>	UK0001
<b>Location of Testing:</b>	Unit 3 Horizon, Wade Road, Kingsland Business Park, Basingstoke, Hampshire, G24 8AH, United Kingdom
<b>Test Dates:</b>	18 May 2023 to 07 August 2023

### **1.3 Summary of Test Results**

<b>FCC Reference (47CFR)</b>	<b>ISED Canada Reference</b>	<b>Measurement</b>	<b>Result</b>
N/A	RSS-Gen 6.7	Transmitter 99% Occupied Bandwidth	
Part 15.247(a)(2)	RSS-Gen 6.7 / RSS-247 5.2(a)	Transmitter Minimum 6 dB Bandwidth	
Part 15.247(b)(3)	RSS-Gen 6.12 / RSS-247 5.4(d)	Transmitter Maximum (Average) Output Power	
Part 15.247(e)	RSS-247 5.4(b)	Transmitter Power Spectral Density	
Part 15.247(d) & 15.209(a)	RSS-Gen 6.13 / RSS-247 5.5	Transmitter Radiated Emissions	
Part 15.247(d) & 15.209(a)	RSS-Gen 6.13 / RSS-247 5.5	Transmitter Band Edge Radiated Emissions	
<b>Key to Results</b>  = Complied  = Did not comply			

### **1.4 Deviations from the Test Specification**

For the measurements contained within this test report, there were no deviations from, additions to, or exclusions from the test specification identified above.

## **2 Summary of Testing**

### **2.1 Facilities and Accreditation**

The test site and measurement facilities used to collect data are located at Unit 3 Horizon, Wade Road, Kingsland Business Park, Basingstoke, Hampshire, RG24 8AH, United Kingdom. The following table identifies which facilities were utilised for radiated emission measurements documented in this report. Specific facilities are also identified in the test results sections.

Site 1	X
Site 2	-
Site 17	X

UL International (UK) Ltd is accredited by the United Kingdom Accreditation Service (UKAS). UKAS is one of the signatories to the International Laboratory Accreditation Co-operation (ILAC) Arrangement for the mutual recognition of test reports. The tests reported herein have been performed in accordance with its terms of accreditation.

### **2.2 Methods and Procedures**

<b>Reference:</b>	ANSI C63.10-2013
<b>Title:</b>	American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices
<b>Reference:</b>	KDB 558074 D01 15.247 Meas Guidance v05r02, April 2, 2019
<b>Title:</b>	Guidance for Compliance Measurements on Digital Transmission System, Frequency Hopping Spread Spectrum System, and Hybrid System Devices Operating Under Section 15.247 of the FCC Rules

## **2.3 Calibration and Uncertainty**

### **Measuring Instrument Calibration**

In accordance with UKAS requirements all the measurement equipment is on a calibration schedule. All equipment was within the calibration period on the date of testing.

### **Measurement Uncertainty & Decision Rule**

#### **Overview**

No measurement or test can ever be perfect and the imperfections give rise to error of measurement in the results. Consequently the result of a measurement is only an approximation to the value of the measurand (the specific quantity subject to measurement) and is only complete when accompanied by a statement of the uncertainty of the approximation.

The expression of uncertainty of a measurement result allows realistic comparison of results with reference values and limits given in specifications and standards.

#### **Decision Rule**

The decision rule applied is based upon the accuracy method criteria. The measurement uncertainty is met and the result is considered in conformance with the requirement criteria if the observed value is within the prescribed limit.

#### **Measurement Uncertainty**

The reported expanded uncertainties below are based on a standard uncertainty multiplied by an appropriate coverage factor such that a confidence level of approximately 95% is maintained. For the purposes of this document “approximately” is interpreted as meaning “effectively” or “for most practical purposes”.

Measurement Type	Range	Confidence Level (%)	Calculated Uncertainty
99% Occupied Bandwidth	2.4 GHz to 2.4835 GHz	95%	±3.92 %
Minimum 6 dB Bandwidth	2.4 GHz to 2.4835 GHz	95%	±4.59 %
Spectral Power Density	2.4 GHz to 2.4835 GHz	95%	±1.13 dB
Conducted Maximum Peak Output Power	2.4 GHz to 2.4835 GHz	95%	±0.58 dB
Radiated Spurious Emissions	9 kHz to 30 MHz	95%	±5.32 dB
Radiated Spurious Emissions	30 MHz to 1 GHz	95%	±3.30 dB
Radiated Spurious Emissions	1 GHz to 25 GHz	95%	±3.16 dB

The methods used to calculate the above uncertainties are in line with those recommended within the various measurement specifications. Where measurement specifications do not include guidelines for the evaluation of measurement uncertainty the published guidance of the appropriate accreditation body is followed.

## **2.4 Test and Measurement Equipment**

### **Test Equipment Used for Transmitter Conducted Tests**

Asset No.	Instrument	Manufacturer	Type No.	Serial No.	Date Calibration Due	Cal. Interval (Months)
M2071	Thermohygrometer	Testo	608-H1	45258132	08 Dec 2023	12
M231908	Signal Analyser	Keysight	N9020B	MY63430180	20 Dec 2023	12
A220120	Attenuator	Pasternack	PE7013-10	#1	Calibrated before use	-
M215596	Power Sensor	Boonton	RTP5008	11819	24 Mar 2024	12
231995	Switching Unit	Mini-Circuits	ZT-400	12211020020	Calibrated before use	-
E235134	Environmental Chamber	Espec	PU-1J	15020642	Calibrated before use	-
M226925	Thermometer	Fluke	52II	51980008WS	25 Oct 2023	12
M1725	Network Analyser	Keysight	E5071C	MY46316169	09 Nov 2023	12

### **Test Measurement Software/Firmware Used for Transmitter Conducted Tests**

Name	Version	Release Date
Phoenix	1.2.12	02/08/2023



**Test and Measurement Equipment (continued)****Test Equipment Used for Transmitter Radiated Emissions Tests**

Asset No.	Instrument	Manufacturer	Type No.	Serial No.	Date Calibration Due	Cal. Interval (Months)
M2003	Thermohygrometer	Testo	608-H1	45046641	09 Dec 2023	12
K0017	3m RSE Chamber	MVG Industries UK Ltd.	N/A	N/A	08 Nov 2023	12
M1995	Test Receiver	Rohde & Schwarz	ESU40	100428	02 Nov 2023	12
A2863	Pre-Amplifier	Keysight Technologies Inc	8449B	3008A02100	07 Nov 2023	12
A2889	Horn Antenna	Schwarzbeck	BBHA 9120 B	00653	02 Nov 2023	12
A2916	Attenuator	AtlanTecRF	AN18W5-10	832827#2	25 Jan 2024	12
A2914	High Pass Filter	AtlanTecRF	AFH-03000	2155	25 Jan 2024	12
A2890	Horn Antenna	Schwarzbeck	HWRD 750	014	02 Nov 2023	12
A223628	Pre-Amplifier	Atlantic Microwave	A-LNAKX-380116-S5S5	210837001	03 Nov 2023	12
A2947	High Pass Filter	AtlanTecRF	AFH-07000	1601900001	25 Jan 2024	12
A3036	Low Pass Filter	AtlanTecRF	AFL-02000	15062902848	25 Jan 2024	12
A3167	Pre-Amplifier	Com-Power	PAM-103	18020010	02 Nov 2023	12
A2148	Attenuator	Atlan TecRF	AN18-06	090202-06	06 Oct 2023	12
A490	Bi-Log Antenna	Chase EMC Ltd	CBL6111A	1590	06 Oct 2023	12
A2892	Horn Antenna	Schwarzbeck	BBHA 9170	9170-727	31 Oct 2023	12
A3265	Pre-Amplifier	Schwarzbeck	BBV 9721	9721-069	31 Oct 2023	12
K0001	3m RSE Chamber	MVG Industries UK Ltd.	N/A	N/A	05 Sep 2023	12
M2040	Thermohygrometer	Testo	608-H1	45124934	09 Dec 2023	12
M236226	Test Receiver	Rohde & Schwarz	ESW26	103134	21 Apr 2024	12
A3165	Magnetic Loop Antenna	ETS-Lindgren	6502	00224383	13 Apr 2024	12

**Test and Measurement Equipment (continued)****Test Equipment Used for Transmitter Band Edge Radiated Emissions**

<b>Asset No.</b>	<b>Instrument</b>	<b>Manufacturer</b>	<b>Type No.</b>	<b>Serial No.</b>	<b>Date Calibration Due</b>	<b>Cal. Interval (Months)</b>
M2003	Thermohygrometer	Testo	608-H1	45046641	09 Dec 2023	12
K0017	3m RSE Chamber	MVG Industries UK Ltd.	N/A	N/A	08 Nov 2023	12
M1995	Test Receiver	Rohde & Schwarz	ESU40	100428	02 Nov 2023	12
A2863	Pre-Amplifier	Keysight Technologies Inc	8449B	3008A02100	07 Nov 2023	12
A2889	Horn Antenna	Schwarzbeck	BBHA 9120 B	00653	02 Nov 2023	12
A2916	Attenuator	AtlanTecRF	AN18W5-10	832827#2	25 Jan 2024	12

### **3 Equipment Under Test (EUT)**

#### **3.1 Identification of Equipment Under Test (EUT)**

<b>Brand Name:</b>	Raspberry Pi
<b>Model Name or Number / HVIN:</b>	V2.0
<b>PMN:</b>	Raspberry Pi 5
<b>Test Sample Serial Number:</b>	C9 ( <i>Conducted sample #1</i> )
<b>Hardware Version:</b>	V2.0
<b>Software Version:</b>	V1.0
<b>FCC ID:</b>	2ABCB-RPI5
<b>ISED Canada Certification Number:</b>	IC: 20953-RPI5
<b>Date of Receipt:</b>	18 May 2023

<b>Brand Name:</b>	Raspberry Pi
<b>Model Name or Number / HVIN:</b>	V2.0
<b>PMN:</b>	Raspberry Pi 5
<b>Test Sample Serial Number:</b>	R29 ( <i>Radiated sample #1</i> )
<b>Hardware Version:</b>	V2.0
<b>Software Version:</b>	V1.0
<b>FCC ID:</b>	2ABCB-RPI5
<b>ISED Canada Certification Number:</b>	IC: 20953-RPI5
<b>Date of Receipt:</b>	17 May 2023

#### **3.2 Modifications Incorporated in the EUT**

No modifications were applied to the EUT during testing.

### 3.3 Additional Information Related to Testing

Technology Tested:	WLAN (IEEE 802.11b,g,n) / Digital Transmission System		
Type of Unit:	Transceiver		
Modulation Type:	DBPSK, DQPSK, BPSK, QPSK, 16QAM & 64QAM		
Data Rates:	802.11b	1, 2, 5.5 & 11 Mbps (SISO)	
	802.11g	6, 9, 12, 18, 24, 36, 48 & 54 Mbps (SISO)	
	802.11n HT20	MCS0 to MCS7 (SISO)	
	802.11n HT40	MCS0 to MCS7 (SISO)	
Power Supply Requirement(s):	Nominal	5.1 VDC via 120 VAC 60 Hz adaptor	
Maximum Conducted Output Power:	13.31 dBm		
Channel Spacing:	20 MHz		
Transmit Frequency Range:	2412 MHz to 2472 MHz		
Transmit Channels Tested:	Channel ID	Channel Number	Channel Frequency (MHz)
	Bottom	1	2412
	Middle	6	2437
	Top	11	2462
Channel Spacing:	40 MHz		
Transmit Frequency Range:	2422 MHz to 2452 MHz		
Transmit Channels Tested:	Channel ID	Channel Number	Channel Frequency (MHz)
	Bottom	3	2422
	Top	9	2452

### 3.4 Description of Available Antennas

The radio utilizes a integrated antenna, with the following maximum gain:

Frequency Range (MHz)	Antenna Gain (dBi)
2412 to 2462	3.50

### **3.5 Description of Test Setup**

#### **Support Equipment**

The following support equipment was used to exercise the EUT during testing:

<b>Description:</b>	AC to DC USB-C Power Supply
<b>Brand Name:</b>	Raspberry Pi
<b>Model Name or Number:</b>	KSA-15E-051300HK
<b>Serial Number:</b>	Not Marked or Stated

<b>Description:</b>	Docking Station
<b>Brand Name:</b>	Lenovo
<b>Model Name or Number:</b>	40AT
<b>Serial Number:</b>	ZAFOLGYW

<b>Description:</b>	USB-A Cables. Qty 4. 1.5m
<b>Brand Name:</b>	Not Marked or Stated
<b>Model Name or Number:</b>	Not Marked or Stated
<b>Serial Number:</b>	Not Marked or Stated

<b>Description:</b>	Mini HDMI to HDMI Cables. Qty 2. 1.5m
<b>Brand Name:</b>	Raspberry Pi
<b>Model Name or Number:</b>	Not Marked or Stated
<b>Serial Number:</b>	Not Marked or Stated

<b>Description:</b>	Ethernet Cable. 3m
<b>Brand Name:</b>	Not Marked or Stated
<b>Model Name or Number:</b>	Not Marked or Stated
<b>Serial Number:</b>	Not Marked or Stated

<b>Description:</b>	Laptop
<b>Brand Name:</b>	Lenovo
<b>Model Name or Number:</b>	L480
<b>Serial Number:</b>	PF1EJ3BY

## **Operating Modes**

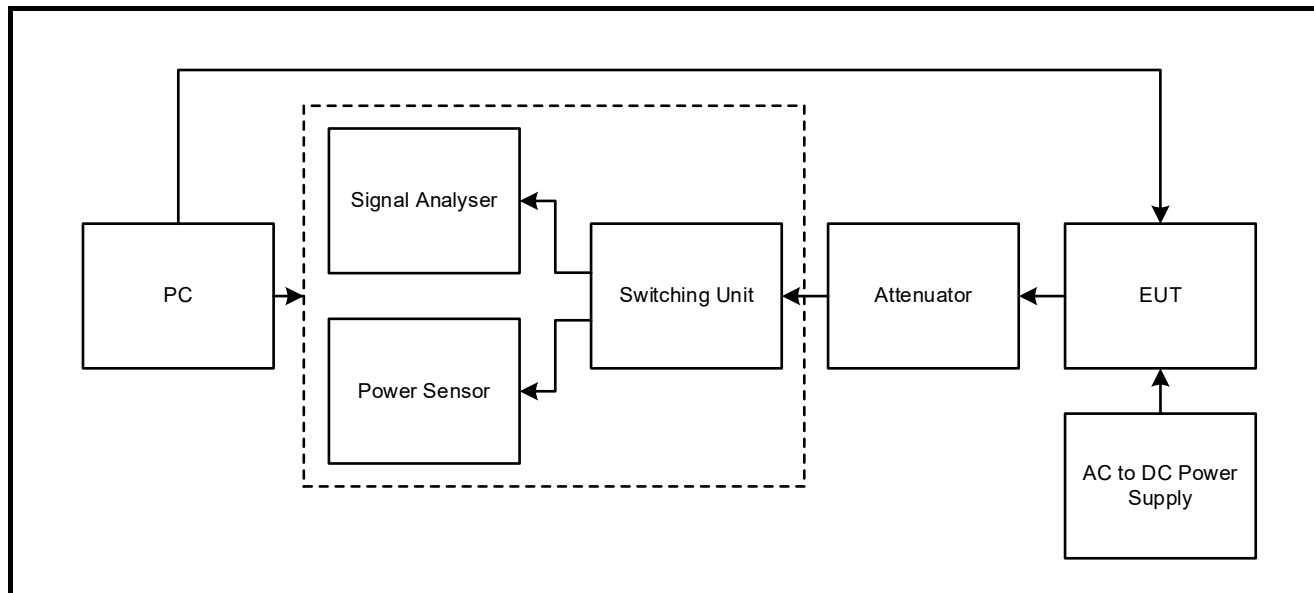
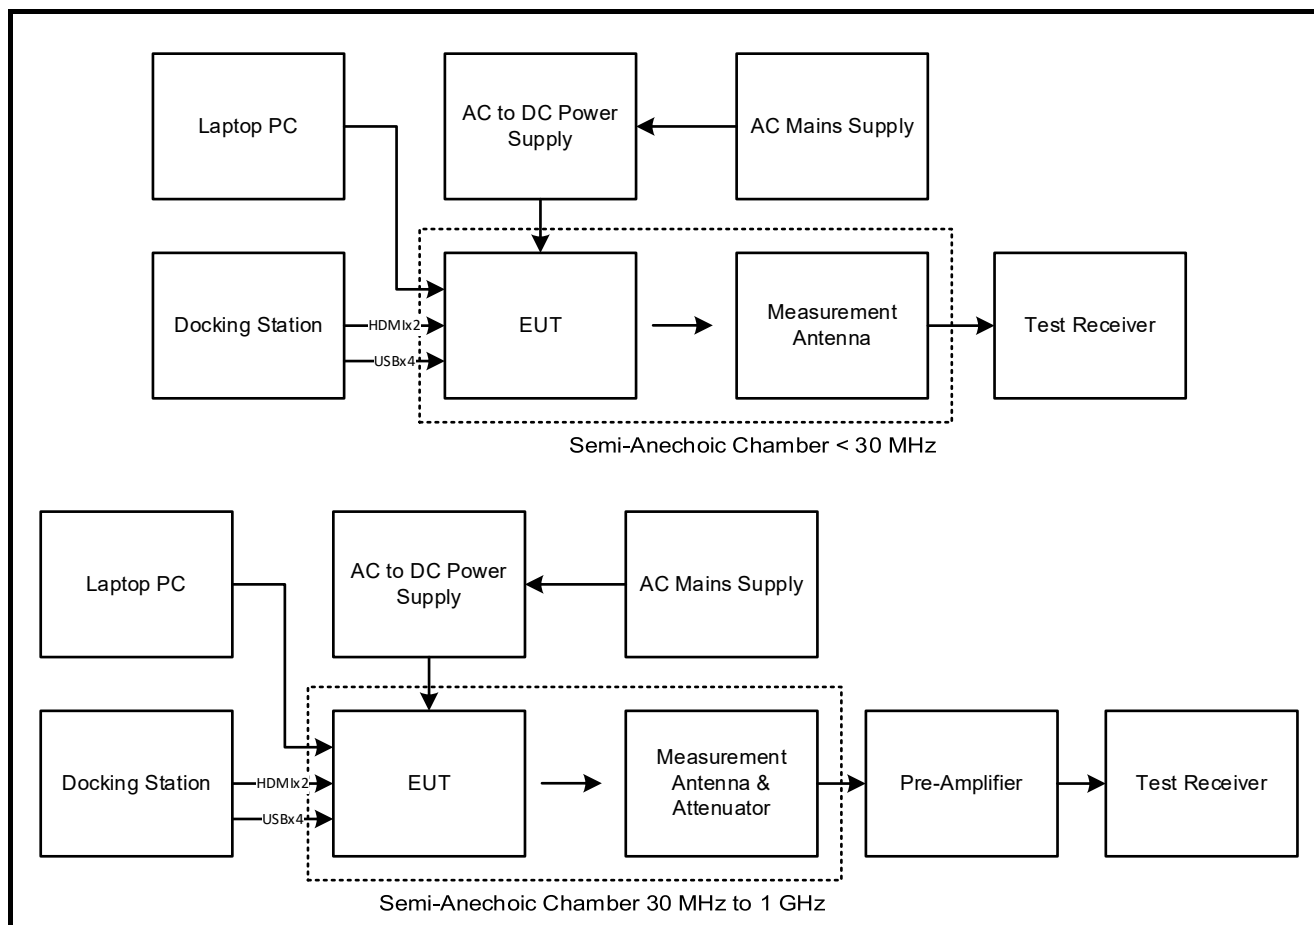
The EUT was tested in the following operating mode(s):


- Continuously transmitting with a modulated carrier at maximum power on the relevant channels as required using the supported data rates/modulation types.

## **Configuration and Peripherals**

The EUT was tested in the following configuration(s):

- The customer's test application and supplied instructions were used to place the EUT into WLAN test mode. The supplied commands were entered into the console menu on the EUT. Test commands stated in text file located on the /home/pi drive of the EUT were used to configure the EUT to enable a continuous transmission and to select the test channels and data rate as required.
- The customer declared the following data rates to be used for all measurements as:
  - 802.11b – SISO / 1 Mbps
  - 802.11g – SISO / 6 Mbps
  - 802.11n HT20 – SISO / MCS0
  - 802.11n HT40 – SISO / MCS0
- The customer supplied a U.FL RF cable with the EUT in order to perform conducted measurements. The additional path loss was included in any path loss calculations.
- The EUT was powered from an AC to DC USB-C Power Supply. The input was connected to a 120 VAC 60 Hz single phase mains supply.
- Transmitter radiated spurious emissions tests were performed with the EUT in the worst-case orientation with respect to emissions. The Ethernet port was terminated into a test laptop via an Ethernet cable. The test laptop was placed in the antechamber. The 2 HDMI ports and 4 USB ports were terminated into a docking station via HDMI and USB cables. The docking station was placed under the turntable.

**Test Setup Diagrams****Conducted Tests:****Test Setup for Transmitter Conducted Tests****Radiated Tests:****Test Setup for Transmitter Radiated Emissions**

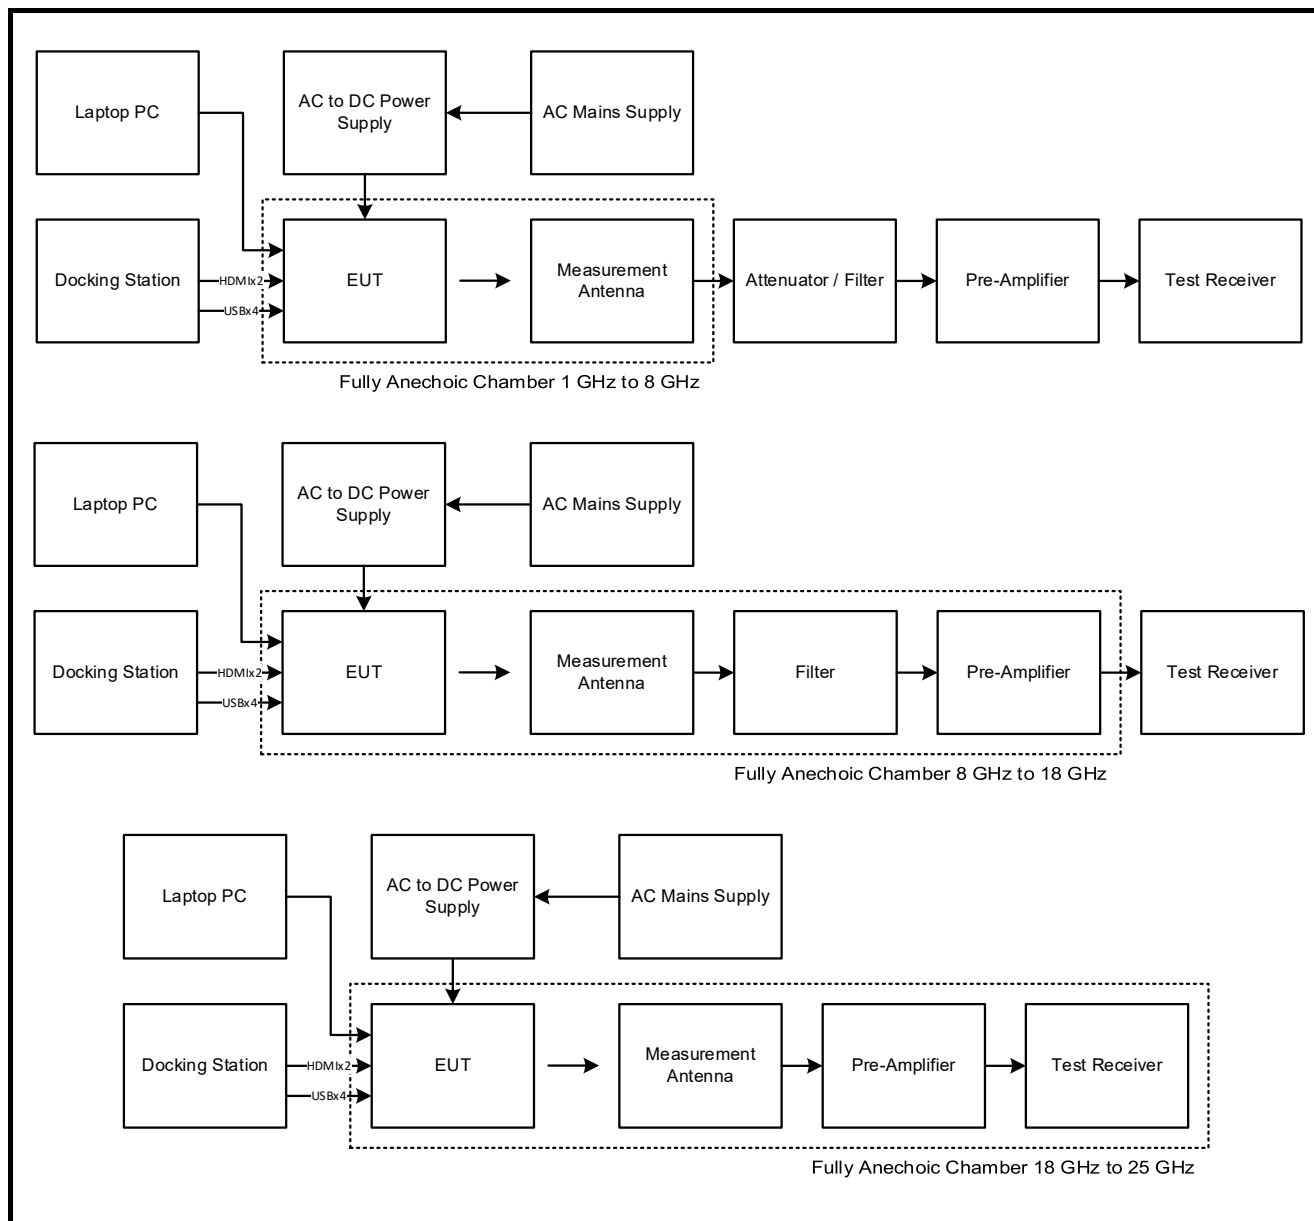**Test Setup for Transmitter Radiated Emissions (continued)**



## **4 Antenna Port Test Results**

### **4.1 Transmitter 99% Occupied Bandwidth**

#### **Test Summary:**

<b>Test Engineer:</b>	Luis Pazos Perez	<b>Test Date:</b>	03 August 2023
<b>Test Sample Serial Number:</b>	C9		

#### **Environmental Conditions:**

<b>Temperature (°C):</b>	23
<b>Relative Humidity (%):</b>	50

#### **Note(s):**

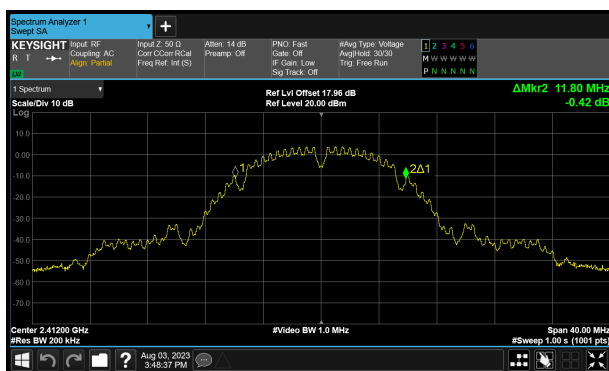
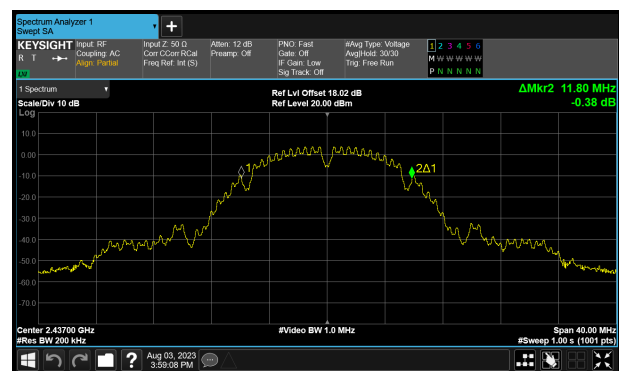
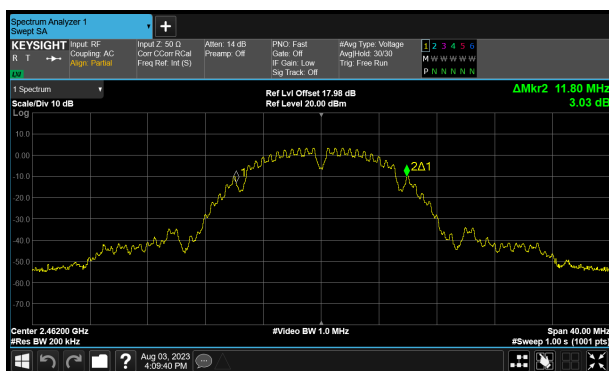
1. The 99% emission bandwidth was calculated by the test system using the raw trace data from the signal analyser. The resolution bandwidth was set in the range of 1% to 5% of the emission bandwidth and the video bandwidth set to 3 times the resolution bandwidth. The span was set to capture all products of the modulation process including emission skirts.
2. The test system was connected to the RF port on the EUT using suitable attenuation and RF cable.

**Transmitter 99% Emission Bandwidth (continued)****Results:**

<b>Frequency Range:</b>	2400-2483.5 MHz	<b>Band:</b>	2.4 GHz
<b>Limit Clause:</b>	RSS-Gen 6.7	<b>Test Method:</b>	C63.10 6.9.3

<b>Antenna Configuration:</b>	SISO	<b>Mode:</b>	802.11b
<b>Test Port:</b>	1 (P1)	<b>Modulation/Rate:</b>	1 Mbps (DBPSK)

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (kHz)
	1	2	3	4	
2412 (CH1)	11.800	-	-	-	-
2437 (CH6)	11.800	-	-	-	-
2462 (CH11)	11.800	-	-	-	-




**P1 (1) 2412 MHz (CH1) 99% Bandwidth****P1 (1) 2437 MHz (CH6) 99% Bandwidth****P1 (1) 2462 MHz (CH11) 99% Bandwidth**

**Transmitter 99% Emission Bandwidth (continued)**
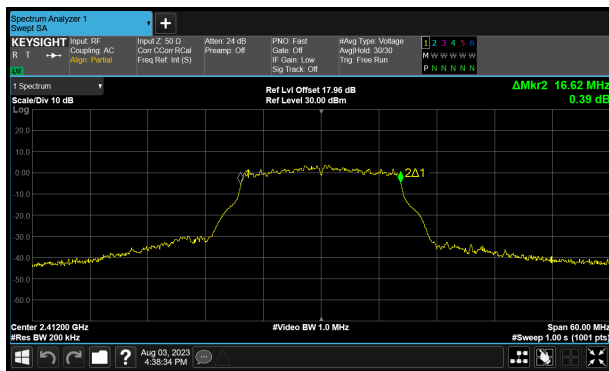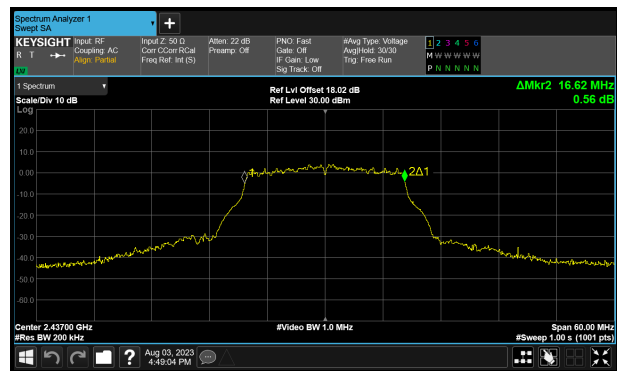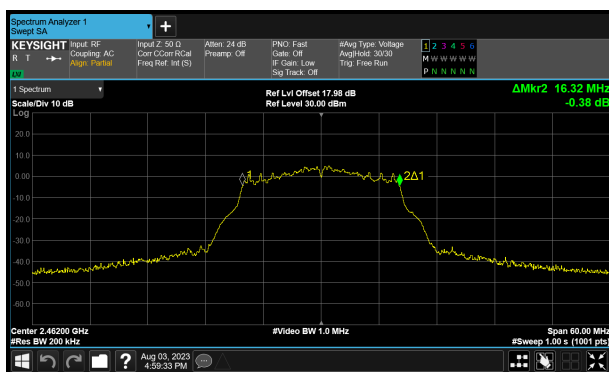
<b>Frequency Range:</b>	2400-2483.5 MHz	<b>Band:</b>	2.4 GHz
<b>Limit Clause:</b>	RSS-Gen 6.7	<b>Test Method:</b>	C63.10 6.9.3

<b>Antenna Configuration:</b>	SISO	<b>Mode:</b>	802.11g
<b>Test Port:</b>	1 (P1)	<b>Modulation/Rate:</b>	6 Mbps (BPSK)

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (kHz)
	1	2	3	4	
2412 (CH1)	16.620	-	-	-	-
2437 (CH6)	16.620	-	-	-	-
2462 (CH11)	16.320	-	-	-	-




**P1 (1) 2412 MHz (CH1) 99% Bandwidth****P1 (1) 2437 MHz (CH6) 99% Bandwidth****P1 (1) 2462 MHz (CH11) 99% Bandwidth**

**Transmitter 99% Emission Bandwidth (continued)**
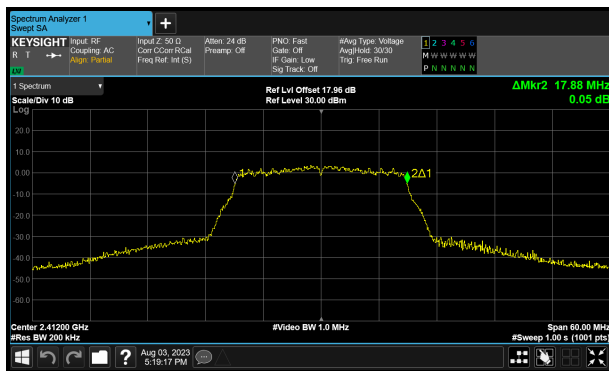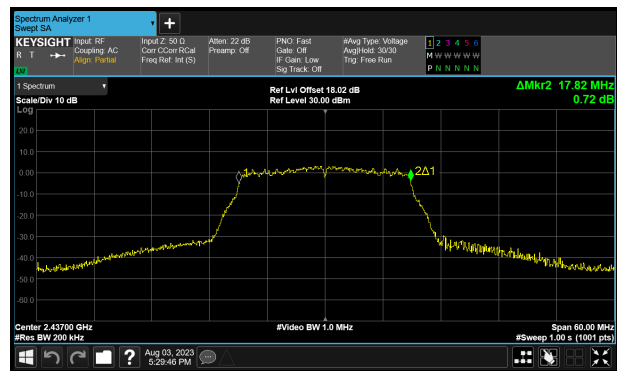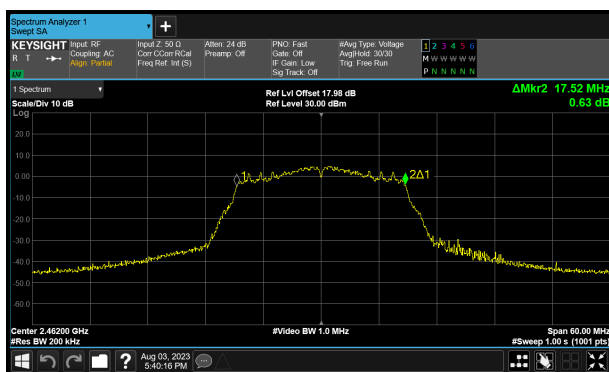
<b>Frequency Range:</b>	2400-2483.5 MHz	<b>Band:</b>	2.4 GHz
<b>Limit Clause:</b>	RSS-Gen 6.7	<b>Test Method:</b>	C63.10 6.9.3

<b>Antenna Configuration:</b>	SISO	<b>Mode:</b>	802.11n HT20
<b>Test Port:</b>	1 (P1)	<b>Modulation/Rate:</b>	MCS0 (BPSK)

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (kHz)
	1	2	3	4	
2412 (CH1)	17.880	-	-	-	-
2437 (CH6)	17.820	-	-	-	-
2462 (CH11)	17.520	-	-	-	-




**P1 (1) 2412 MHz (CH1) 99% Bandwidth****P1 (1) 2437 MHz (CH6) 99% Bandwidth****P1 (1) 2462 MHz (CH11) 99% Bandwidth**

**Transmitter 99% Emission Bandwidth (continued)**
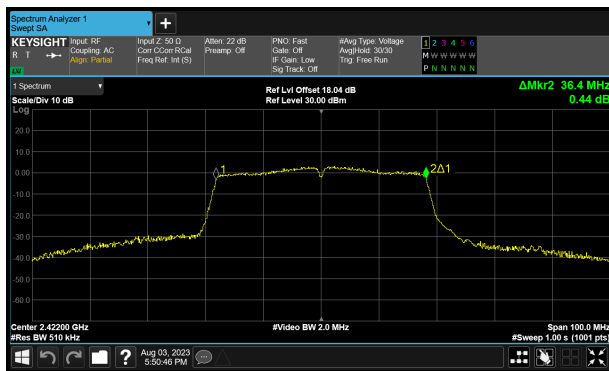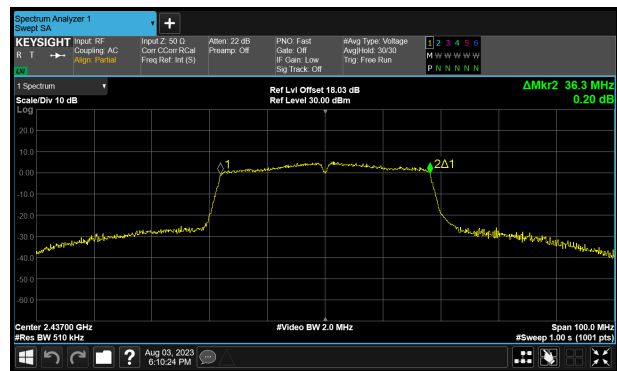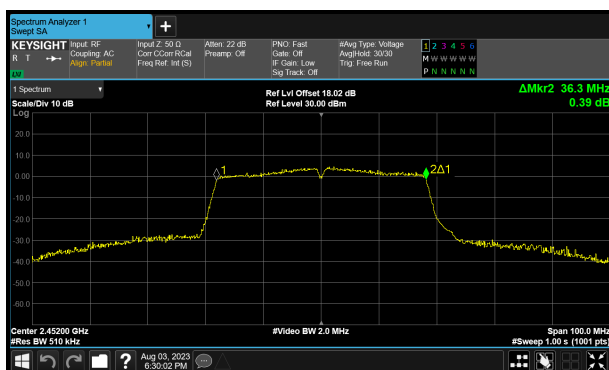
<b>Frequency Range:</b>	2400-2483.5 MHz	<b>Band:</b>	2.4 GHz
<b>Limit Clause:</b>	RSS-Gen 6.7	<b>Test Method:</b>	C63.10 6.9.3

<b>Antenna Configuration:</b>	SISO	<b>Mode:</b>	802.11n HT40
<b>Test Port:</b>	1 (P1)	<b>Modulation/Rate:</b>	MCS0 (BPSK)

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (kHz)
	1	2	3	4	
2422 (CH1)	36.400	-	-	-	-
2437 (CH4)	36.300	-	-	-	-
2452 (CH7)	36.300	-	-	-	-

**P1 (1) 2422 MHz (CH1) 99% Bandwidth****P1 (1) 2437 MHz (CH4) 99% Bandwidth****P1 (1) 2452 MHz (CH7) 99% Bandwidth**

## **4.2 Transmitter Minimum 6 dB Bandwidth**

### **Test Summary:**

<b>Test Engineer:</b>	Luis Pazos Perez	<b>Test Date:</b>	03 August 2023
<b>Test Sample Serial Number:</b>	C9		

### **Environmental Conditions:**

<b>Temperature (°C):</b>	23
<b>Relative Humidity (%):</b>	50

### **Note(s):**

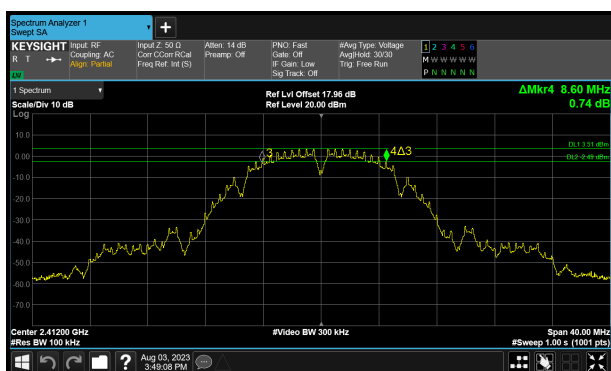
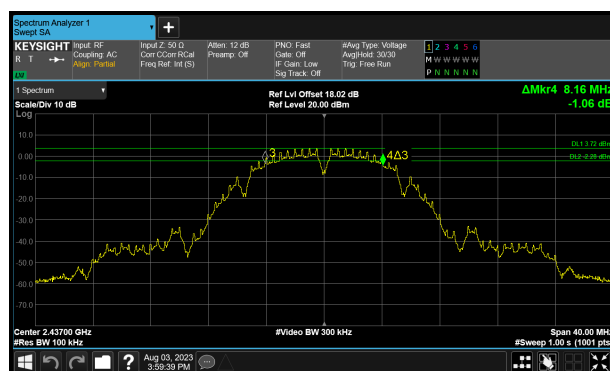
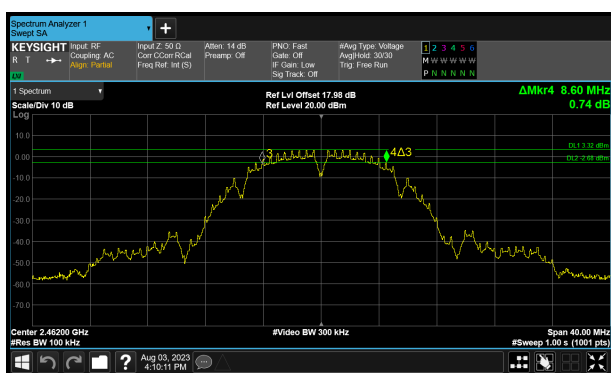
1. Measurements were performed in accordance with ANSI C63.10 Section 11.8.1 Option 1 measurement procedure. The test receiver resolution bandwidth was set to 100 kHz and video bandwidth 300 kHz. A peak detector was used, sweep time was set to auto and the trace mode was Max Hold. The DTS bandwidth was measured at 6 dB down from the peak of the signal
2. The test system was connected to the RF port on the EUT using suitable attenuation and RF cable.

**Transmitter Minimum 6 dB Bandwidth (continued)****Results:**

<b>Frequency Range:</b>	2400-2483.5 MHz	<b>Band:</b>	2.4 GHz
<b>Limit Clause:</b>	15.247 (a)(2) RSS-247 5.2(a)	<b>Test Method:</b>	C63.10 11.8.1

<b>Antenna Configuration:</b>	SISO	<b>Mode:</b>	802.11b
<b>Test Port:</b>	1 (P1)	<b>Modulation/Rate:</b>	1 Mbps (DBPSK)

Test Frequency (MHz)	6 dB Bandwidth (MHz)				Limit (kHz)
	1	2	3	4	
2412 (CH1)	8.600	-	-	-	>500
2437 (CH6)	8.160	-	-	-	>500
2462 (CH11)	8.600	-	-	-	>500




**P1 (1) 2412 MHz (CH1) 6 dB Bandwidth****P1 (1) 2437 MHz (CH6) 6 dB Bandwidth****P1 (1) 2462 MHz (CH11) 6 dB Bandwidth**

**Transmitter Minimum 6 dB Bandwidth (continued)**
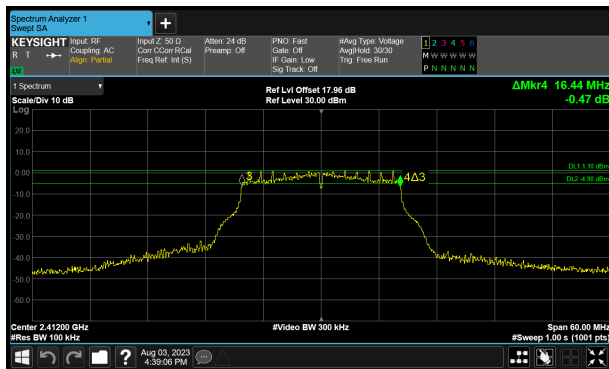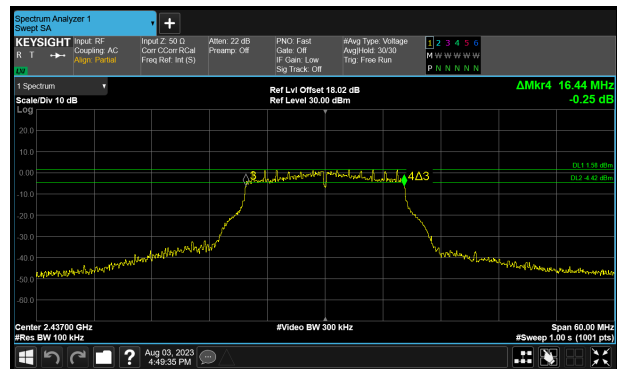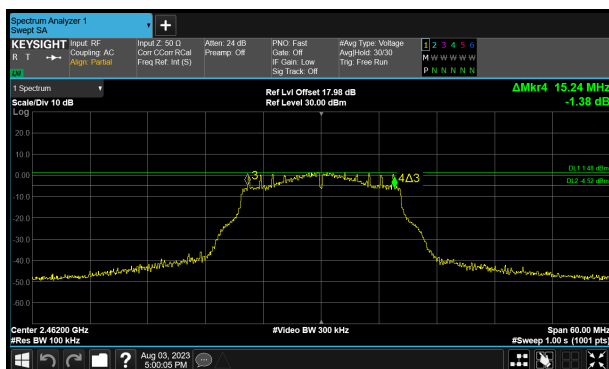
<b>Frequency Range:</b>	2400-2483.5 MHz	<b>Band:</b>	2.4 GHz
<b>Limit Clause:</b>	15.247 (a)(2) RSS-247 5.2(a)	<b>Test Method:</b>	C63.10 11.8.1

<b>Antenna Configuration:</b>	SISO	<b>Mode:</b>	802.11g
<b>Test Port:</b>	1 (P1)	<b>Modulation/Rate:</b>	6 Mbps (BPSK)

Test Frequency (MHz)	6 dB Bandwidth (MHz)				Limit (kHz)
	1	2	3	4	
2412 (CH1)	16.440	-	-	-	>500
2437 (CH6)	16.440	-	-	-	>500
2462 (CH11)	15.240	-	-	-	>500

**P1 (1) 2412 MHz (CH1) 6 dB Bandwidth****P1 (1) 2437 MHz (CH6) 6 dB Bandwidth****P1 (1) 2462 MHz (CH11) 6 dB Bandwidth**




**Transmitter Minimum 6 dB Bandwidth (continued)**
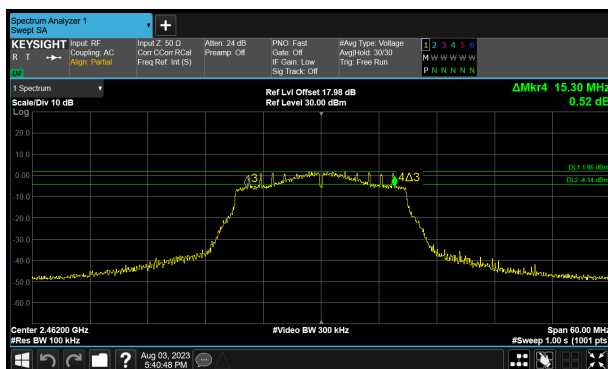
<b>Frequency Range:</b>	2400-2483.5 MHz	<b>Band:</b>	2.4 GHz
<b>Limit Clause:</b>	15.247 (a)(2) RSS-247 5.2(a)	<b>Test Method:</b>	C63.10 11.8.1

<b>Antenna Configuration:</b>	SISO	<b>Mode:</b>	802.11n HT20
<b>Test Port:</b>	1 (P1)	<b>Modulation/Rate:</b>	MCS0 (BPSK)

Test Frequency (MHz)	20 dB Bandwidth (MHz)				Limit (kHz)
	1	2	3	4	
2412 (CH1)	17.400	-	-	-	>500
2437 (CH6)	17.400	-	-	-	>500
2462 (CH11)	15.300	-	-	-	>500




**P1 (1) 2412 MHz (CH1) 6 dB Bandwidth****P1 (1) 2437 MHz (CH6) 6 dB Bandwidth****P1 (1) 2462 MHz (CH11) 6 dB Bandwidth**

**Transmitter Minimum 6 dB Bandwidth (continued)**
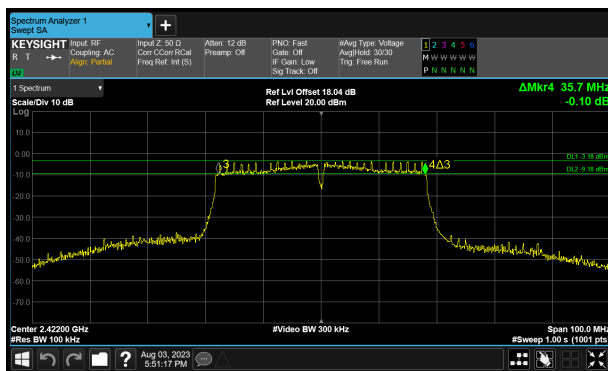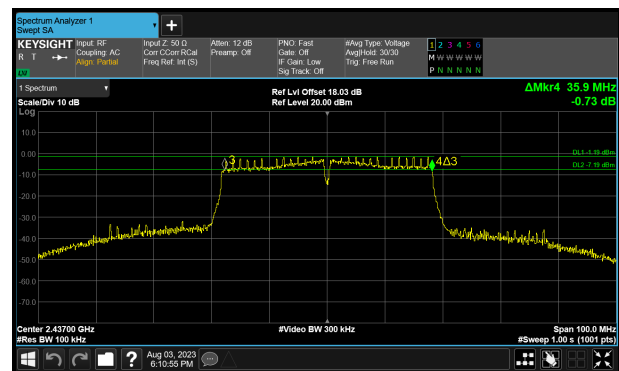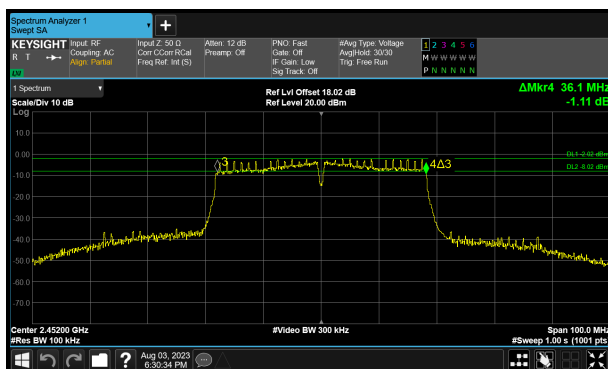
<b>Frequency Range:</b>	2400-2483.5 MHz	<b>Band:</b>	2.4 GHz
<b>Limit Clause:</b>	15.247 (a)(2) RSS-247 5.2(a)	<b>Test Method:</b>	C63.10 11.8.1

<b>Antenna Configuration:</b>	SISO	<b>Mode:</b>	802.11n HT40
<b>Test Port:</b>	1 (P1)	<b>Modulation/Rate:</b>	MCS0 (BPSK)

Test Frequency (MHz)	20 dB Bandwidth (MHz)				Limit (kHz)
	1	2	3	4	
2422 (CH1)	35.700	-	-	-	>500
2437 (CH4)	35.900	-	-	-	>500
2452 (CH7)	36.100	-	-	-	>500

**P1 (1) 2422 MHz (CH1) 6 dB Bandwidth****P1 (1) 2437 MHz (CH4) 6 dB Bandwidth****P1 (1) 2452 MHz (CH7) 6 dB Bandwidth**

### **4.3 Transmitter Power Spectral Density**

#### **Test Summary:**

<b>Test Engineer:</b>	Luis Pazos Perez	<b>Test Date:</b>	03 August 2023
<b>Test Sample Serial Number:</b>	C9		

#### **Environmental Conditions:**

<b>Temperature (°C):</b>	23
<b>Relative Humidity (%):</b>	53

#### **Note(s):**

1. Testing was performed in accordance with ANSI C63.10 Section 11.10.5 Method AVGPDS-2. The signal analyser resolution bandwidth was set to 3 kHz and video bandwidth 10 kHz. An RMS detector was used and sweep time set manually to perform trace averaging over 100 traces. The span was set greater than 1.5 times the 99% emission bandwidth. The highest peak of the measured signal was recorded. The calculated duty cycle correction was added to the measured level in order to compute the average power spectral density during the actual transmission time.
2. The test system was connected to the RF port on the EUT using suitable attenuation and RF cable. An RF level offset was entered on the signal analyser to compensate for the loss of the attenuator and RF cable.

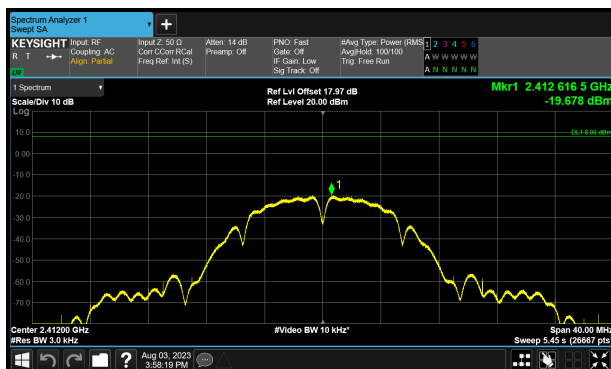
**Transmitter Power Spectral Density (continued)****Results:**

<b>Frequency Range:</b>	2400-2483.5 MHz	<b>Band:</b>	2.4 GHz
<b>Limit Clause:</b>	15.247 (e)) RSS-247 5.2 b)	<b>Test Method:</b>	C63.10 11.10.5
<b>Note:</b>	DCCF was added to the spectrum analyser reference level offset.		


<b>Antenna Configuration:</b>	SISO	<b>Mode:</b>	802.11b
<b>Test Port:</b>	1 (P1)	<b>Modulation/Rate:</b>	1 Mbps (DBPSK)

<b>Burst Tx</b>	Stability: < ±2%	Duty Cycle (%): 99.88	Period (ms): 12.432	Width (ms): 12.417
-----------------	------------------	-----------------------	---------------------	--------------------


Test Frequency (MHz)	PSD (dBm/3 kHz)					Limit (dBm/3 kHz)	Margin (dB)
	1	2	3	4	Σ		
2412 (CH1)	-19.68	-	-	-	-	8.00	27.68
2437 (CH6)	-19.65	-	-	-	-	8.00	27.65
2462 (CH11)	-19.77	-	-	-	-	8.00	27.77



P1 2412 MHz (CH1)

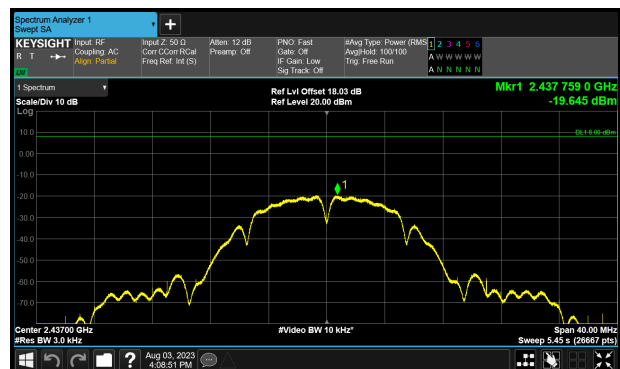

P1 2437 MHz (CH6)

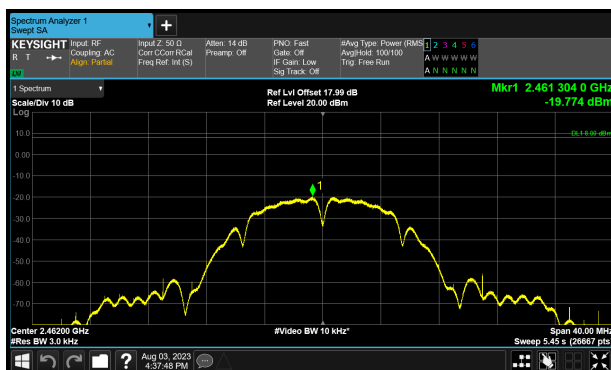

P1 2462 MHz (CH11)


**Transmitter Power Spectral Density (continued)**
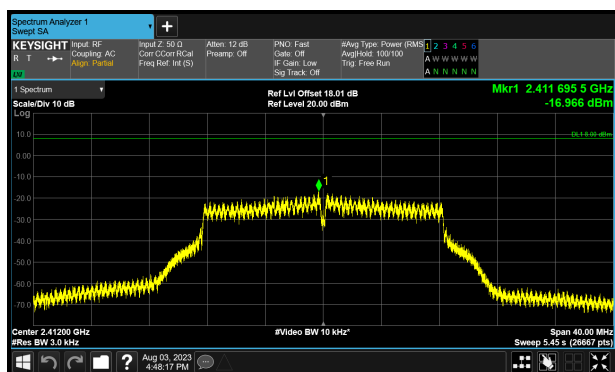
<b>Frequency Range:</b>	2400-2483.5 MHz	<b>Band:</b>	2.4 GHz
<b>Limit Clause:</b>	15.247 (e)) RSS-247 5.2 b)	<b>Test Method:</b>	C63.10 11.10.5
<b>Note:</b>	DCCF was added to the spectrum analyser reference level offset.		


<b>Antenna Configuration:</b>	SISO	<b>Mode:</b>	802.11g
<b>Test Port:</b>	1 (P1)	<b>Modulation/Rate:</b>	6 Mbps (BPSK)

<b>Burst Tx</b>	Stability: < ±2%	Duty Cycle (%): 98.96	Period (ms): 2.087	Width (ms): 2.065
-----------------	------------------	-----------------------	--------------------	-------------------


Test Frequency (MHz)	PSD (dBm/3 kHz)					Limit (dBm/3 kHz)	Margin (dB)
	1	2	3	4	Σ		
2412 (CH1)	-16.97	-	-	-	-	8.00	24.97
2437 (CH6)	-16.86	-	-	-	-	8.00	24.86
2462 (CH11)	-16.24	-	-	-	-	8.00	24.24



P1 2412 MHz (CH1)

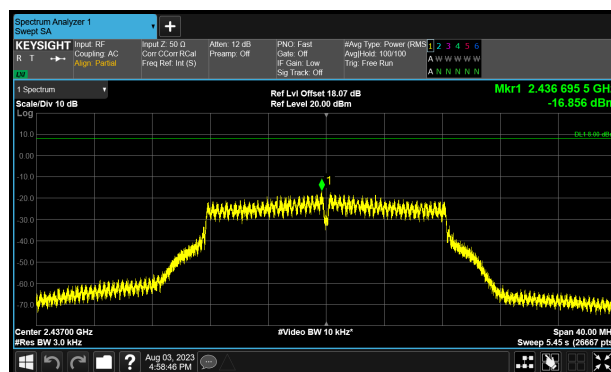

P1 2437 MHz (CH6)

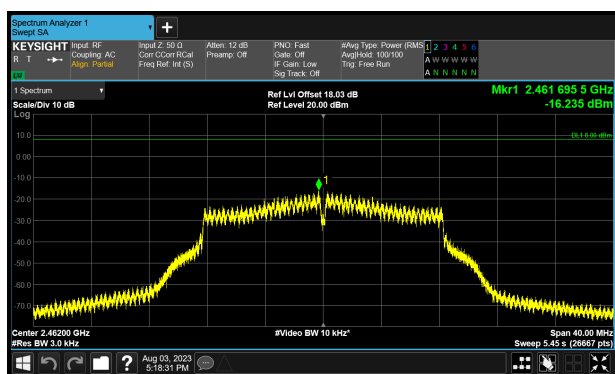

P1 2462 MHz (CH11)


**Transmitter Power Spectral Density (continued)**
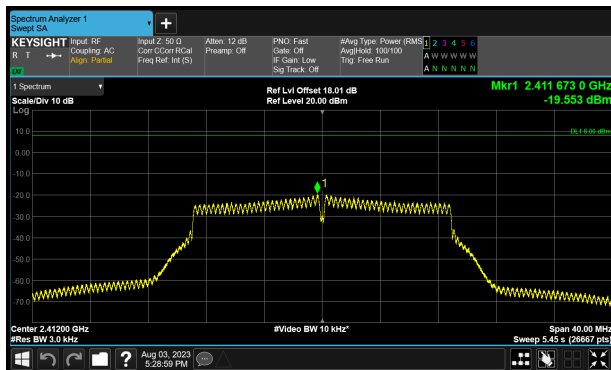
<b>Frequency Range:</b>	2400-2483.5 MHz	<b>Band:</b>	2.4 GHz
<b>Limit Clause:</b>	15.247 (e)) RSS-247 5.2 b)	<b>Test Method:</b>	C63.10 11.10.5
<b>Note:</b>	DCCF was added to the spectrum analyser reference level offset.		


<b>Antenna Configuration:</b>	SISO	<b>Mode:</b>	802.11n HT20
<b>Test Port:</b>	1 (P1)	<b>Modulation/Rate:</b>	MCS0 (BPSK)

<b>Burst Tx</b>	Stability: < ±2%	Duty Cycle (%): 98.89	Period (ms): 1.943	Width (ms): 1.921
-----------------	------------------	-----------------------	--------------------	-------------------


Test Frequency (MHz)	PSD (dBm/3 kHz)					Limit (dBm)	Margin (dB)
	1	2	3	4	Σ		
2412 (CH1)	-19.55	-	-	-	-	8.00	27.55
2437 (CH6)	-19.82	-	-	-	-	8.00	27.82
2462 (CH11)	-18.68	-	-	-	-	8.00	26.68



P1 2412 MHz (CH1)

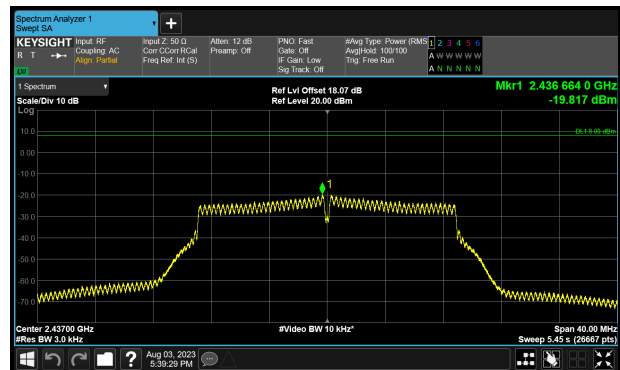

P1 2437 MHz (CH6)

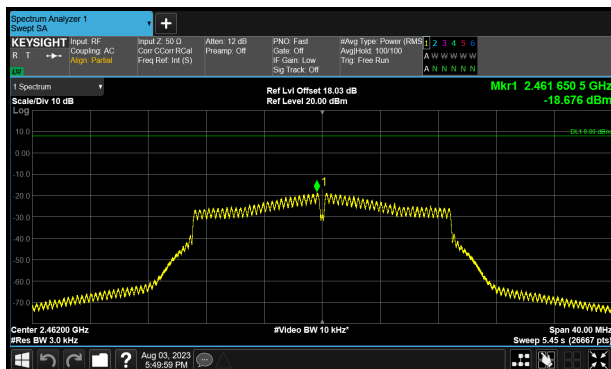

P1 2462 MHz (CH11)


**Transmitter Power Spectral Density (continued)**
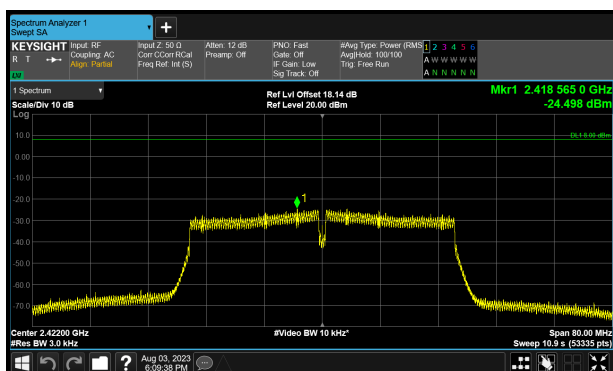
<b>Frequency Range:</b>	2400-2483.5 MHz	<b>Band:</b>	2.4 GHz
<b>Limit Clause:</b>	15.247 (e)) RSS-247 5.2 b)	<b>Test Method:</b>	C63.10 11.10.5
<b>Note:</b>	DCCF was added to the spectrum analyser reference level offset.		


<b>Antenna Configuration:</b>	SISO	<b>Mode:</b>	802.11n HT40
<b>Test Port:</b>	1 (P1)	<b>Modulation/Rate:</b>	MCS0 (BPSK)

<b>Burst Tx</b>	Stability: < ±2%	Duty Cycle (%): 97.82	Period (ms): 0.967	Width (ms): 0.945
-----------------	------------------	-----------------------	--------------------	-------------------


Test Frequency (MHz)	PSD (dBm/3 kHz)					Limit (dBm)	Margin (dB)
	1	2	3	4	$\Sigma$		
2422 (CH1)	-24.50	-	-	-	-	8.00	32.50
2437 (CH4)	-22.33	-	-	-	-	8.00	30.33
2452 (CH7)	-23.50	-	-	-	-	8.00	31.50



P1 2422 MHz (CH1)

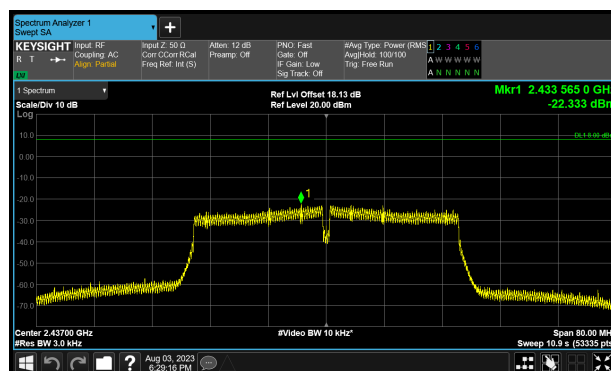

P1 2437 MHz (CH4)

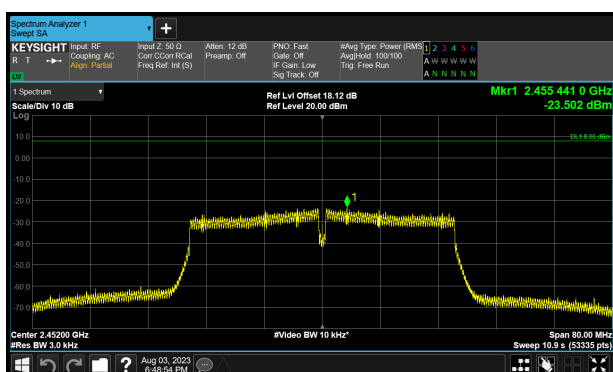

P1 2452 MHz (CH7)

**4.4 Transmitter Maximum (Average) Output Power****Test Summary:**

<b>Test Engineer:</b>	Luis Pazos Perez	<b>Test Date:</b>	03 August 2023
<b>Test Sample Serial Number:</b>	C9		

**Environmental Conditions:**

<b>Temperature (°C):</b>	23
<b>Relative Humidity (%):</b>	53

**Note(s):**

1. Testing was performed using a fast power sensor in accordance with ANSI C63.10 Clause 11.9.2.3.2; AVGPM-G method.
2. The test system was connected to the RF port on the EUT using suitable attenuation and RF cable. An RF level offset was entered on the test system to compensate for the loss of the attenuator and RF cable.



**Transmitter Maximum (Average) Output Power (continued)****Results:**

<b>Frequency Range:</b>	2400-2483.5 MHz	<b>Band:</b>	2.4 GHz
<b>Limit Clause:</b>	15.247 (b)(3) RSS-247 5.4 d)	<b>Test Method:</b>	C63.10 11.9.2.3.2

<b>Antenna Configuration:</b>	SISO	<b>Mode:</b>	802.11b
<b>Test Port:</b>	1 (P1)	<b>Modulation/Rate:</b>	1 Mbps (DBPSK)

<b>Burst Tx</b>	Stability: < $\pm 2\%$	Duty Cycle (%): 99.88	Period (ms): 12.432	Width (ms): 12.417
-----------------	------------------------	-----------------------	---------------------	--------------------

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)	Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	$\Sigma$						
2412 (CH1)	11.93	-	-	-	-	30.00	18.07	3.50	15.43	36.00	20.57
2437 (CH6)	12.17	-	-	-	-	30.00	17.83	3.50	15.67	36.00	20.33
2462 (CH11)	11.85	-	-	-	-	30.00	18.15	3.50	15.35	36.00	20.65

<b>Frequency Range:</b>	2400-2483.5 MHz	<b>Band:</b>	2.4 GHz
<b>Limit Clause:</b>	15.247 (b)(3) RSS-247 5.4 d)	<b>Test Method:</b>	C63.10 11.9.2.3.2

<b>Antenna Configuration:</b>	SISO	<b>Mode:</b>	802.11g
<b>Test Port:</b>	1 (P1)	<b>Modulation/Rate:</b>	6 Mbps (BPSK)

<b>Burst Tx</b>	Stability: < $\pm 2\%$	Duty Cycle (%): 98.96	Period (ms): 2.087	Width (ms): 2.065
-----------------	------------------------	-----------------------	--------------------	-------------------

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)	Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	$\Sigma$						
2412 (CH1)	12.80	-	-	-	-	30.00	17.20	3.50	16.30	36.00	19.70
2437 (CH6)	13.31	-	-	-	-	30.00	16.69	3.50	16.81	36.00	19.19
2462 (CH11)	13.02	-	-	-	-	30.00	16.98	3.50	16.52	36.00	19.48

**Transmitter Maximum (Average) Output Power (continued)**

<b>Frequency Range:</b>	2400-2483.5 MHz	<b>Band:</b>	2.4 GHz
<b>Limit Clause:</b>	15.247 (b)(3) RSS-247 5.4 d)	<b>Test Method:</b>	C63.10 11.9.2.3.2

<b>Antenna Configuration:</b>	SISO	<b>Mode:</b>	802.11n HT20
<b>Test Port:</b>	1 (P1)	<b>Modulation/Rate:</b>	MCS0 (BPSK)

<b>Burst Tx</b>	Stability: < ±2%	Duty Cycle (%): 98.89	Period (ms): 1.943	Width (ms): 1.921
-----------------	------------------	-----------------------	--------------------	-------------------

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)	Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ						
2412 (CH1)	12.80	-	-	-	-	30.00	17.20	3.50	16.30	36.00	19.70
2437 (CH6)	12.66	-	-	-	-	30.00	17.34	3.50	16.16	36.00	19.84
2462 (CH11)	13.16	-	-	-	-	30.00	16.84	3.50	16.66	36.00	19.34

<b>Frequency Range:</b>	2400-2483.5 MHz	<b>Band:</b>	2.4 GHz
<b>Limit Clause:</b>	15.247 (b)(3) RSS-247 5.4 d)	<b>Test Method:</b>	C63.10 11.9.2.3.2

<b>Antenna Configuration:</b>	SISO	<b>Mode:</b>	802.11n HT40
<b>Test Port:</b>	1 (P1)	<b>Modulation/Rate:</b>	MCS0 (BPSK)

<b>Burst Tx</b>	Stability: < ±2%	Duty Cycle (%): 97.82	Period (ms): 0.967	Width (ms): 0.945
-----------------	------------------	-----------------------	--------------------	-------------------

Test Frequency (MHz)	Maximum Conducted Output Power (dBm)					Limit (dBm)	Margin (dB)	Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	EIRP Margin (dB)
	1	2	3	4	Σ						
2412 (CH1)	10.87	-	-	-	-	30.00	19.13	3.50	14.37	36.00	21.63
2437 (CH6)	12.89	-	-	-	-	30.00	17.11	3.50	16.39	36.00	19.61
2462 (CH11)	12.07	-	-	-	-	30.00	17.93	3.50	15.57	36.00	20.43

## 5 Radiated Test Results

### 5.1 Transmitter Radiated Emissions <1 GHz

#### Test Summary:

Test Engineer:	Andrew Harding	Test Dates:	22 May 2023 to 02 June 2023
Test Sample Serial Number:	R29		

FCC Reference:	Parts 15.247(d) & 15.209(a)
ISED Canada Reference:	RSS-Gen 6.13 / RSS-247 5.5
Test Method Used:	ANSI C63.10 Sections 6.3, 6.4 and 6.5
Frequency Range	9 kHz to 1000 MHz

#### Environmental Conditions:

Temperature (°C):	23 to 24
Relative Humidity (%):	38 to 41

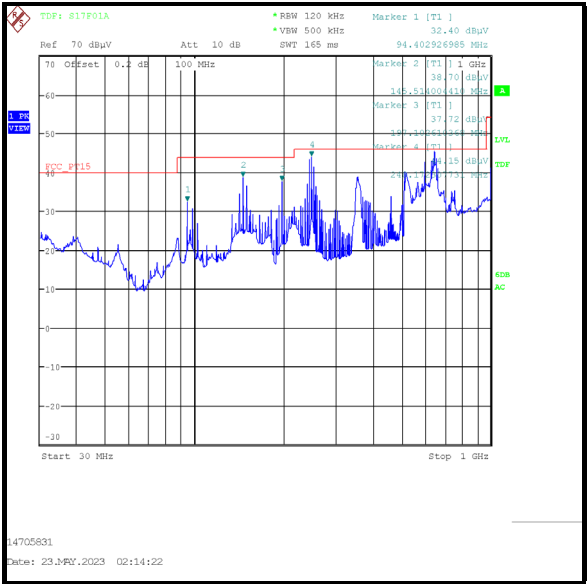
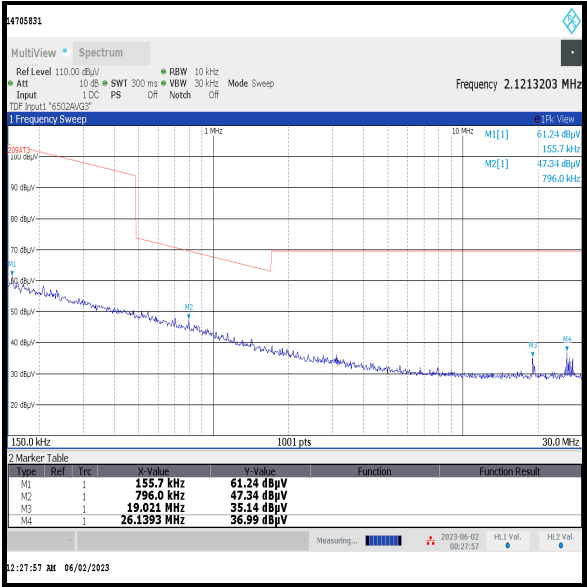
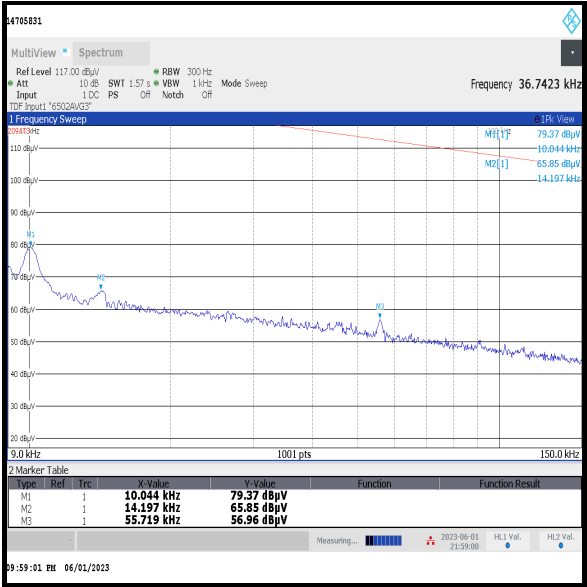
#### Note(s):

1. The final measured value, for the given emission, in the table below incorporates the calibrated antenna factor and cable loss.
2. The preliminary scans showed similar emission levels below 1 GHz, for each channel of operation. Therefore final radiated emissions measurements were performed with the EUT set to the middle channel only.
3. All other emissions shown on the pre-scan plots were investigated and found to be ambient, >20 dB below the applicable limit or below the measurement system noise floor and therefore not recorded.
4. Measurements below 1 GHz were performed in a semi-anechoic chamber (Asset Numbers K0017/K0001) at a distance of 3 metres. The EUT was placed at a height of 80 cm above the reference ground plane in the centre of the chamber turntable. Maximum emission levels were determined by height searching the measurement antenna over the range 1 metre to 4 metres.
5. The limits in CFR 47, Part 15, Subpart C, paragraph 15.209 (a), are identical to those in RSS-Gen Section 8.9, Table 6, since the measurements are performed in terms of magnetic field strength and converted to electric field strength levels (as reported in the table) using the free space impedance of  $377\Omega$ . For example, the measurement frequency X kHz resulted in a level of Y dB $\mu$ V/m, which is equivalent to  $Y - 51.5 = Z$  dB $\mu$ A/m, which has the same margin, W dB, to the corresponding RSS-Gen Table 6 limit as it has to the 15.209(a) limit.
6. Pre-scans were performed and markers placed on the highest measured levels. The test receiver was configured as follows: For 9 kHz to 150 kHz, the resolution bandwidth was set to 300 Hz and video bandwidth 1 kHz. A peak detector was used and trace mode was Max Hold. For 150 kHz to 30 MHz, the resolution bandwidth was set to 10 kHz and video bandwidth 30 kHz, trace mode was Max Hold. For 30 MHz to 1 GHz, the resolution bandwidth was set to 120 kHz and video bandwidth 500 kHz. A peak detector was used, sweep time was set to auto and trace mode was Max Hold.
7. Final measurements were performed on the marker frequencies and the results entered into the table below. The test receiver resolution bandwidth was set to 120 kHz, using a CISPR quasi-peak detector and span wide enough to see the whole emission.

Transmitter Radiated Emissions (continued)

Results: Middle Channel / Quasi-Peak

Frequency (MHz)	Antenna Polarity	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Result
247.940	Horizontal	42.5	46.0	3.5	Complied



Note: These plots are pre-scans for indication purposes only. For final measurements, see accompanying table.

## **5.2 Transmitter Radiated Emissions >1 GHz**

### **Test Summary:**

<b>Test Engineer:</b>	John Ferdinand & Andrew Harding	<b>Test Dates:</b>	22 May 2023 to 07 August 2023
<b>Test Sample Serial Number:</b>	R29		

<b>FCC Reference:</b>	Parts 15.247(d) & 15.209(a)
<b>ISED Canada Reference:</b>	RSS-Gen 6.13 & 8.9 / RSS-247 5.5
<b>Test Method Used:</b>	FCC KDB 558074 Sections 8.5 & 8.6 referencing ANSI C63.10 Sections 6.3, 6.6, 11.11, 11.12.2.4 & 11.12.2.5.2
<b>Frequency Range</b>	1 GHz to 25 GHz

### **Environmental Conditions:**

<b>Temperature (°C):</b>	22 to 24
<b>Relative Humidity (%):</b>	37 to 47

### **Note(s):**

1. The final measured value, for the given emission, in the table below incorporates the calibrated antenna factor and cable loss.
2. All other emissions shown on the pre-scan plot were investigated and found to be ambient or >20 dB below the appropriate limit or below the measurement system noise floor.
3. The emission shown approximately at 2437 MHz on the 1 GHz to 3 GHz plot is the EUT fundamental.
4. \*In accordance with ANSI C63.10 Section 6.6.4.3 (Note 1), if the peak measured value complies with the average limit, it is unnecessary to perform an average measurement.
5. Pre-scans above 1 GHz were performed in a fully anechoic chamber (Asset Number K0017) at a distance of 3 metres. The EUT was placed at a height of 1.5 metres above the test chamber floor in the centre of the chamber turntable. All measurement antennas were placed at a fixed height of 1.5 metres above the test chamber floor, in line with the EUT. Final measurements above 1 GHz were performed in a semi-anechoic chamber (Asset Number K0017) at a distance of 3 metres. The EUT was placed at a height of 1.5 m above the reference ground plane in the centre of the chamber turntable. Maximum emission levels were determined by height searching the measurement antenna over the range 1 metre to 4 metres.

**Transmitter Radiated Emissions (continued)****Results: Bottom Channel / Peak**

Frequency (MHz)	Antenna Polarity	Peak Level (dB $\mu$ V/m)	Peak Limit (dB $\mu$ V/m)	Margin (dB)	Result
3617.181	Horizontal	50.0	54.0*	4.0	Complied
18772.200	Horizontal	46.7	54.0*	7.3	Complied
19980.100	Horizontal	43.2	54.0*	10.8	Complied
20000.250	Horizontal	41.8	54.0*	12.2	Complied

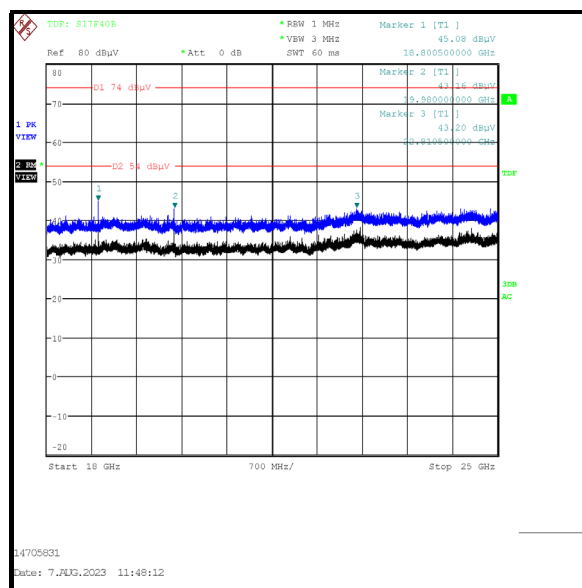
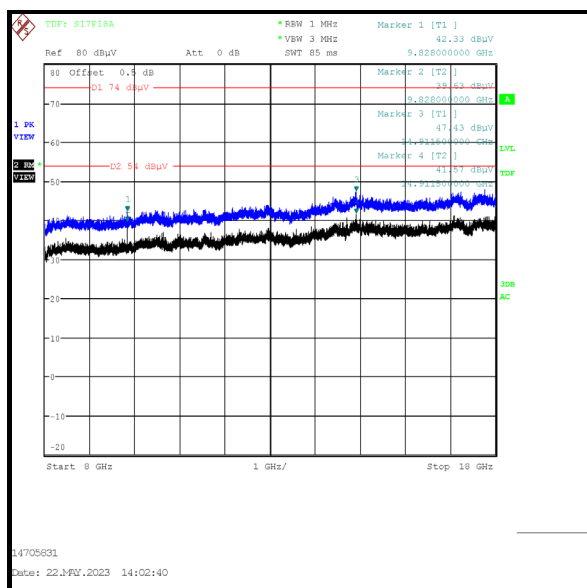
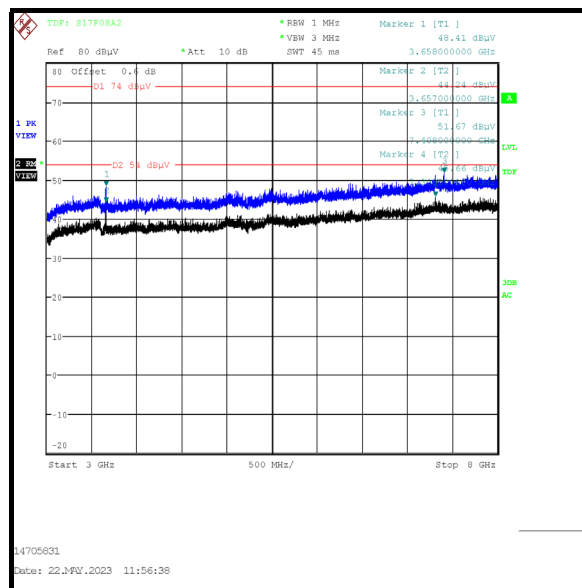
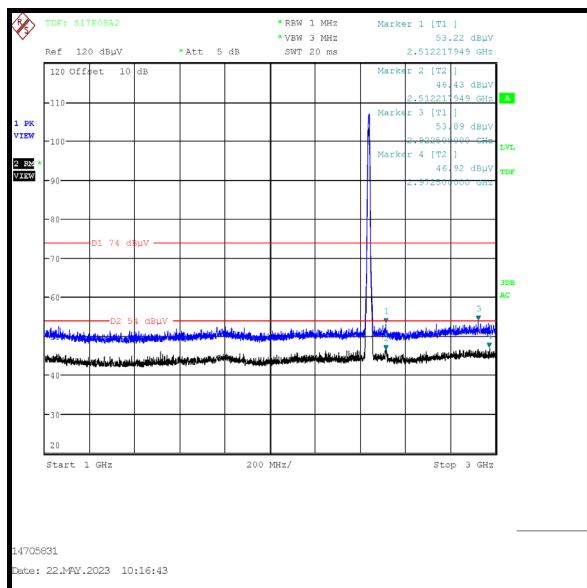
**Results: Middle Channel / Peak**

Frequency (MHz)	Antenna Polarity	Peak Level (dB $\mu$ V/m)	Peak Limit (dB $\mu$ V/m)	Margin (dB)	Result
3656.987	Horizontal	50.0	54.0*	4.0	Complied
18772.200	Horizontal	46.7	54.0*	7.3	Complied
19980.100	Horizontal	43.2	54.0*	10.8	Complied
20000.250	Horizontal	41.8	54.0*	12.2	Complied

**Results: Top Channel / Peak**

Frequency (MHz)	Antenna Polarity	Peak Level (dB $\mu$ V/m)	Peak Limit (dB $\mu$ V/m)	Margin (dB)	Result
3693.748	Horizontal	49.3	54.0*	4.7	Complied
18772.200	Horizontal	46.7	54.0*	7.3	Complied
19980.100	Horizontal	43.2	54.0*	10.8	Complied
20000.250	Horizontal	41.8	54.0*	12.2	Complied

### **Transmitter Radiated Emissions (continued)**



*Note: These plots are pre-scans for indication purposes only. For final measurements, see accompanying tables.*

### **5.3 Transmitter Band Edge Radiated Emissions**

#### **Test Summary:**

<b>Test Engineer:</b>	Jose Bayona	<b>Test Date:</b>	18 May 2023
<b>Test Sample Serial Number:</b>	R29		

<b>FCC Reference:</b>	Parts 15.247(d) & 15.209(a)
<b>ISED Canada Reference:</b>	RSS-Gen 6.13 / RSS-247 5.5
<b>Test Method Used:</b>	KDB 558074 Section 8.7 referencing ANSI C63.10 Sections 6.10, 11.11, 11.12 & 11.13

#### **Environmental Conditions:**

<b>Temperature (°C):</b>	24
<b>Relative Humidity (%):</b>	36

#### **Note(s):**

1. The final measured value, for the given emission, in the table below incorporates the calibrated antenna factor and cable loss.
2. The maximum conducted (average) output power was previously measured. In accordance with ANSI C63.10 Section 11.11.1(b), the lower band edge measurement should be performed with a peak detector and the -30 dBc limit applied.
3. As the lower band edge is adjacent to a non-restricted band, only peak measurements are required. In accordance with ANSI C63.10 Section 11.11.1, the test method in Section 11.3 was followed: the test receiver resolution bandwidth was set to 100 kHz and video bandwidth 300 kHz. A peak detector was used, sweep time was set to auto and trace mode was Max Hold. The test receiver was left to sweep for a sufficient length of time in order to maximise the carrier level and out-of-band emissions. A marker and corresponding reference level line were placed on the peak of the carrier. As the maximum conducted (average) output power was measured using an RMS detector in accordance with ANSI C63.10 Section 11.9.2.2.2 or 11.9.2.2.4 an out-of-band limit line was placed 30 dB (ANSI C63.10 Section 11.11.1(b)) below the peak level. A marker was placed on the band edge spot frequencies and a second marker placed on the highest emission level in the adjacent non-restricted band of operation (where a higher level emission was present). Marker frequencies and levels were recorded.
4. As the upper band edge is adjacent to a restricted band both peak and average measurements were recorded by placing a marker at the edge of the band. For peak measurements the test receiver resolution bandwidth was set to 1 MHz and the video bandwidth 3 MHz. A peak detector was used, sweep time was set to auto and trace mode was Max Hold. For average measurements the test receiver resolution bandwidth was set to 1 MHz and the video bandwidth 3 MHz. An RMS detector was used, sweep time was set to auto and trace mode was trace averaging over 300 sweeps. A marker was placed on the band edge spot frequencies and a second marker placed on the highest emission level in the adjacent restricted band of operation (where a higher level emission was present). Marker frequencies and levels were recorded.
5. There is a restricted band 10 MHz below the lower band edge. The test receiver was set up as follows: the RBW set to 1 MHz, the VBW set to 3 MHz, with the sweep time set to auto couple. Peak and average measurements were performed with their respective detectors. Markers were placed on the highest point on each trace.



**Transmitter Band Edge Radiated Emissions (continued)****Results: 802.11b / 20 MHz / SISO / 1 Mbps****Results: Lower Band Edge**

Frequency (MHz)	Level (dB $\mu$ V/m)	-30 dBc Limit (dB $\mu$ V/m)	Margin (dB)	Result
2399.519	55.2	73.2	18.0	Complied
2400	54.5	73.2	18.7	Complied

**Results: Upper Band Edge / Peak**

Frequency (MHz)	Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Result
2483.5	52.7	74.0	21.3	Complied
2501.561	55.5	74.0	18.5	Complied

**Results: Upper Band Edge / Average**

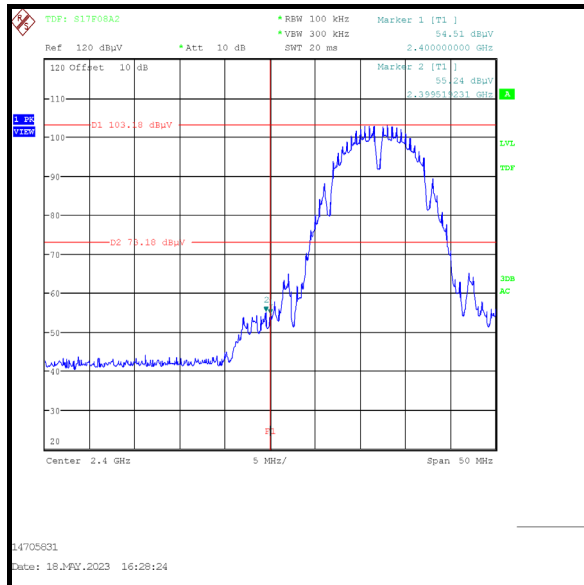
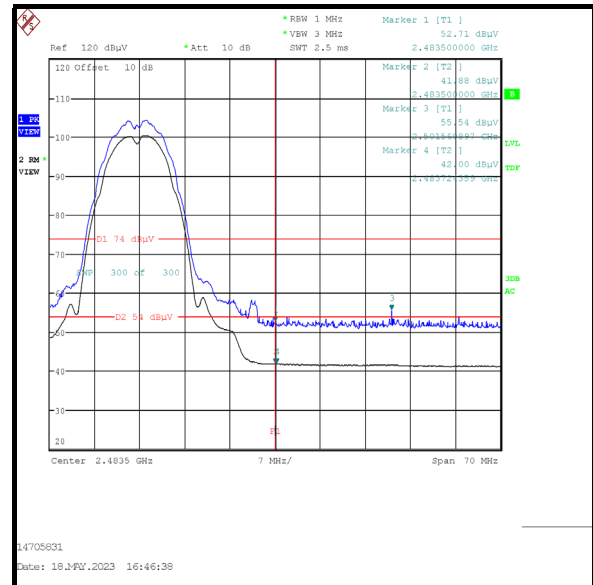
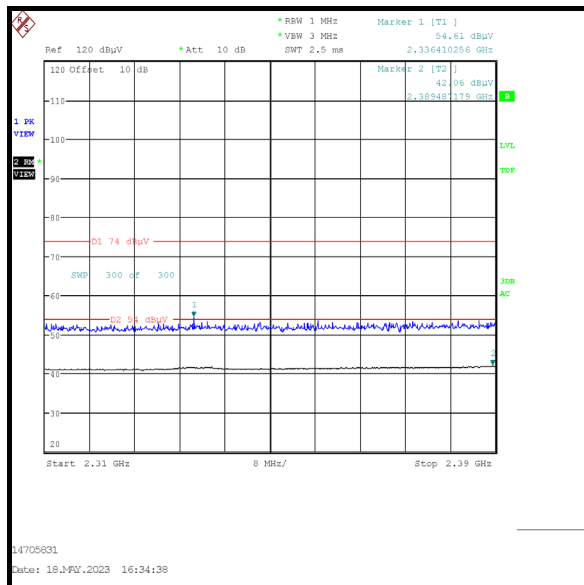
Frequency (MHz)	Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Result
2483.5	41.9	54.0	12.1	Complied
2483.724	42.0	54.0	12.0	Complied

**Results: 2310 MHz to 2390 MHz Restricted Band / Peak**

Frequency (MHz)	Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Result
2336.410	54.6	74.0	19.4	Complied

**Results: 2310 MHz to 2390 MHz Restricted Band / Average**

Frequency (MHz)	Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Result
2389.487	42.1	54.0	11.9	Complied

**Transmitter Band Edge Radiated Emissions (continued)****Results: 802.11b / 20 MHz / SISO / 1 Mbps****Lower Band Edge****Upper Band Edge****2310 MHz to 2390 MHz Restricted Band**

**Transmitter Band Edge Radiated Emissions (continued)****Results: 802.11g / 20 MHz / SISO / 6 Mbps****Results: Lower Band Edge**

Frequency (MHz)	Level (dB $\mu$ V/m)	-30 dBc Limit (dB $\mu$ V/m)	Margin (dB)	Result
2399.439	67.9	70.7	2.8	Complied
2400	65.6	70.7	5.1	Complied

**Results: Upper Band Edge / Peak**

Frequency (MHz)	Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Result
2483.5	62.8	74.0	11.2	Complied

**Results: Upper Band Edge / Average**

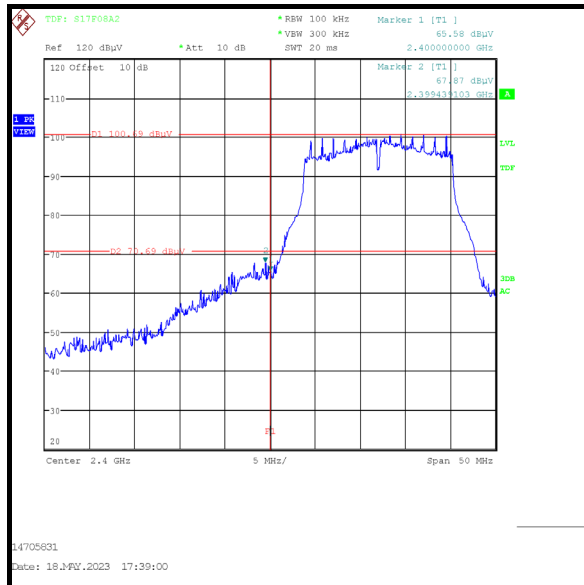
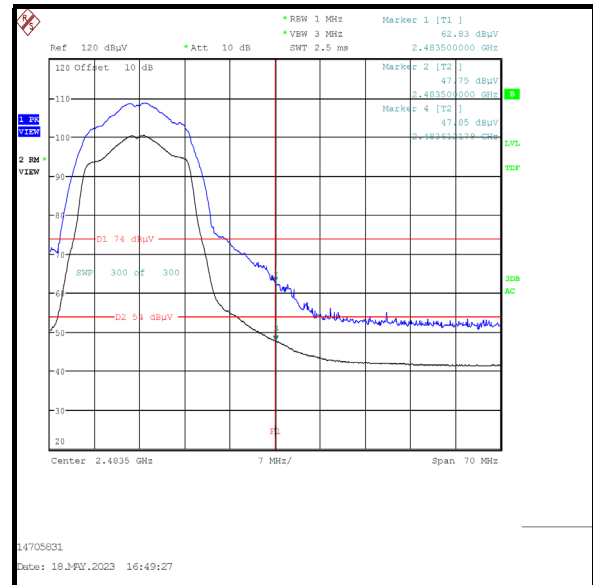
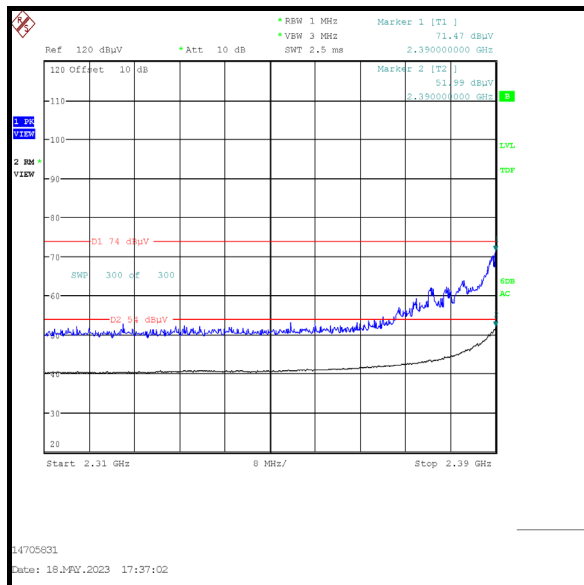
Frequency (MHz)	Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Result
2483.5	47.8	54.0	2.8	Complied
2483.612	47.9	54.0	5.1	Complied

**Results: 2310 MHz to 2390 MHz Restricted Band / Peak**

Frequency (MHz)	Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Result
2390.000	71.5	74.0	2.5	Complied

**Results: 2310 MHz to 2390 MHz Restricted Band / Average**

Frequency (MHz)	Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Result
2390.000	52.0	54.0	2.0	Complied

**Transmitter Band Edge Radiated Emissions (continued)****Results: 802.11g / 20 MHz / SISO / 6 Mbps****Lower Band Edge****Upper Band Edge****2310 MHz to 2390 MHz Restricted Band**

**Transmitter Band Edge Radiated Emissions (continued)****Results: 802.11n HT20 / SISO / MCS0****Results: Lower Band Edge**

Frequency (MHz)	Level (dB $\mu$ V/m)	-30 dBc Limit (dB $\mu$ V/m)	Margin (dB)	Result
2398.878	65.9	71.1	5.2	Complied
2400	64.4	71.1	6.7	Complied

**Results: Upper Band Edge / Peak**

Frequency (MHz)	Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Result
2483.5	69.4	74.0	4.6	Complied

**Results: Upper Band Edge / Average**

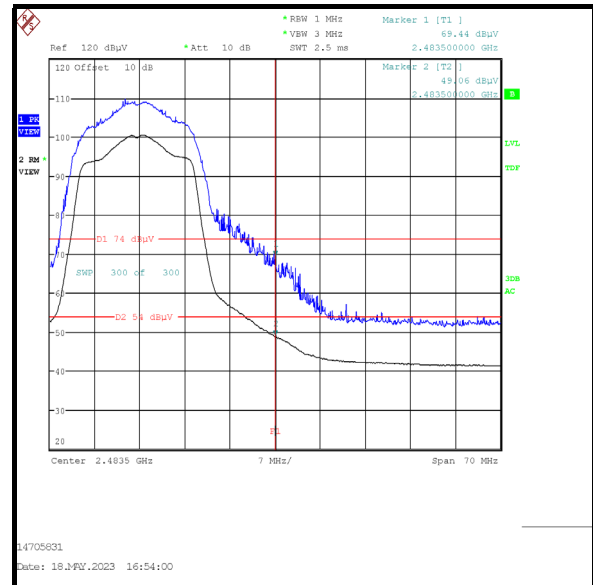
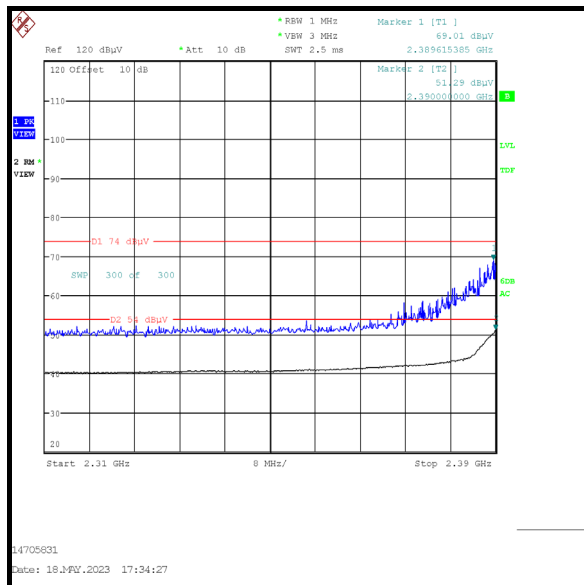
Frequency (MHz)	Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Result
2483.5	49.1	54.0	4.9	Complied

**Results: 2310 MHz to 2390 MHz Restricted Band / Peak**

Frequency (MHz)	Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Result
2389.615	69.0	74.0	5.0	Complied

**Results: 2310 MHz to 2390 MHz Restricted Band / Average**

Frequency (MHz)	Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Result
2390.000	51.3	54.0	2.7	Complied

**Transmitter Band Edge Radiated Emissions (continued)****Results: 802.11n HT20 / SISO / MCS0****Lower Band Edge****Upper Band Edge****2310 MHz to 2390 MHz Restricted Band**

**Transmitter Band Edge Radiated Emissions (continued)****Results: 802.11n HT40 / SISO / MCS0****Results: Lower Band Edge**

Frequency (MHz)	Level (dB $\mu$ V/m)	-30 dBc Limit (dB $\mu$ V/m)	Margin (dB)	Result
2396.971	63.4	65.8	2.4	Complied
2400	62.8	65.8	3.0	Complied

**Results: Upper Band Edge / Peak**

Frequency (MHz)	Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Result
2483.5	69.7	74.0	4.3	Complied
2484.029	66.1	74.0	7.9	Complied

**Results: Upper Band Edge / Average**

Frequency (MHz)	Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Result
2483.5	50.9	54.0	3.1	Complied

**Results: 2310 MHz to 2390 MHz Restricted Band / Peak**

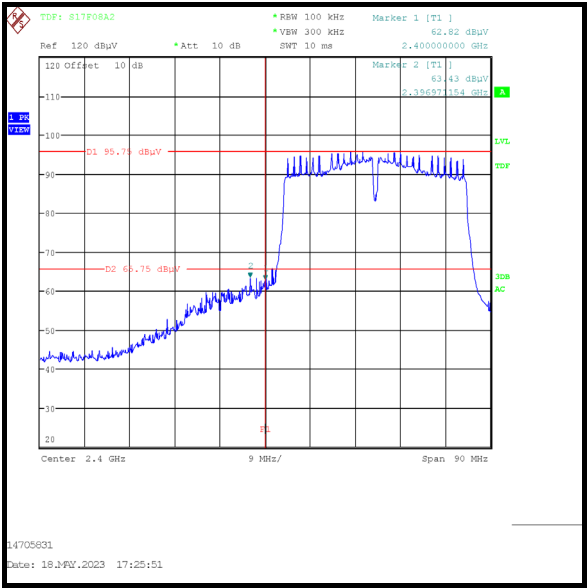
Frequency (MHz)	Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Result
2389.615	71.0	74.0	3.0	Complied

**Results: 2310 MHz to 2390 MHz Restricted Band / Average**


Frequency (MHz)	Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Result
2389.615	53.1	54.0	0.9	Complied

Transmitter Band Edge Radiated Emissions (continued)


Results: 802.11n HT40 / SISO / MCS0



Lower Band Edge

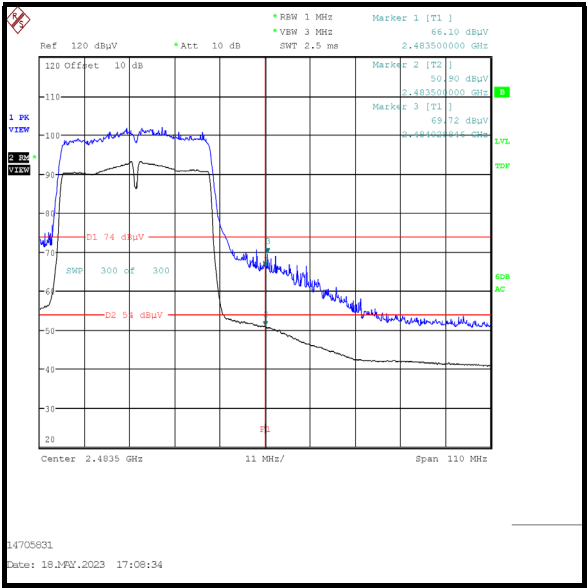

Upper Band Edge

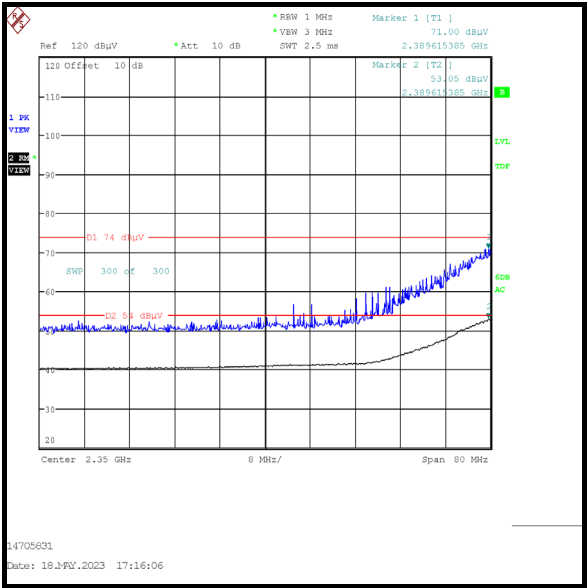

2310 MHz to 2390 MHz Restricted Band

--- END OF REPORT ---