



TEST REPORT

No. I17N00068-GSM

for

Power Idea Technology (Shenzhen) Co., Ltd.

TD-LTE digital mobile phone

Model Name: RG730

IC: 11113A-RG730

with

Hardware Version: 1.04

Software Version: RG730_US_25_V1.01_V02W_20161205

Issued Date: 2017-03-06

Note:

The test results in this test report relate only to the devices specified in this report. This report shall not be reproduced except in full without the written approval of CTTL.

Test Laboratory:

IC O.A.T.S listed: No.21856

CTTL, Telecommunication Technology Labs, Academy of Telecommunication Research, MIIT

No. 52, Huayuan North Road, Haidian District, Beijing, P. R. China 100191.

Tel: +86(0)10-62304633-2512, Fax: +86(0)10-62304633-2504

Email: ctl_terminals@catr.cn, website: www.chinattl.com



REPORT HISTORY

Report Number	Revision	Description	Issue Date
I17N00068-GSM	Rev.0	1st edition	2017-03-06

NOTE: All the original values of this report quoted directly from No.I17N00067.

CONTENTS

1. TEST LABORATORY	4
1.1. TESTING LOCATION	4
1.2. TESTING ENVIRONMENT	4
1.3. PROJECT DATA	4
1.4. SIGNATURE	4
2. CLIENT INFORMATION	5
2.1. APPLICANT INFORMATION	5
2.2. MANUFACTURER INFORMATION	5
3. EQUIPMENT UNDER TEST (EUT) AND ANCILLARY EQUIPMENT (AE)	6
3.1. ABOUT EUT	6
3.2. INTERNAL IDENTIFICATION OF EUT USED DURING THE TEST	6
3.3. INTERNAL IDENTIFICATION OF AE USED DURING THE TEST	6
3.4. GENERAL DESCRIPTION	6
4. REFERENCE DOCUMENTS	7
4.1. REFERENCE DOCUMENTS FOR TESTING	7
5. LABORATORY ENVIRONMENT	8
6. SUMMARY OF TEST RESULTS	9
7. TEST EQUIPMENTS UTILIZED	10
ANNEX A: MEASUREMENT RESULTS.....	11
A.1 OUTPUT POWER	11
A.2 EMISSION LIMIT.....	17
A.3 FREQUENCY STABILITY	22
A.4 OCCUPIED BANDWIDTH	25
A.5 EMISSION BANDWIDTH	37
A.6 BAND EDGE COMPLIANCE	49
A.7 CONDUCTED SPURIOUS EMISSION	56
A.8 PEAK-TO-AVERAGE POWER RATIO	72
A.9 RECEIVER RADIATION EMISSION	73

1. Test Laboratory

1.1. Testing Location

Company Name: CCTL ShenZhen, Telecommunication Technology Labs, Academy of
Telecommunication Research, MIIT
Address: TCL International E city No. 1001 Zhongshanyuan Road, Nanshan
District, Shenzhen, Guangdong, China
Postal Code: 518048
Telephone: +86(755)33322000
Fax: +86(755)33322000

1.2. Testing Environment

Normal Temperature: 15-35°C
Relative Humidity: 20-75%
Air pressure 980 - 1040 hPa

The climatic requirements above are general exclude the special requirements for dedicated test environments listed in section 5 and some specific test cases in other parts of this report.

1.3. Project data


Testing Start Date: 2017-01-19
Testing End Date: 2017-02-28

1.4. Signature



Lai Minghua

(Prepared this test report)



Yang Zi'an

(Reviewed this test report)



Zhang Bojun

Deputy Director of the laboratory
(Approved this test report)



2. Client Information

2.1. Applicant Information

Company Name: Power Idea Technology (Shenzhen) Co., Ltd.
4th Floor, A Section, Languang Science&technology Building, No.7
Address /Post: Xinxi RD, Hi-Tech Industrial Park North, Nanshan District, ShenZhen,
P.R.C.
Contact Person: alex.ma
Contact Email alex.ma@pwidea.com
Telephone: 0086-0755-86220211
Fax: /

2.2. Manufacturer Information

Company Name: Power Idea Technology (Shenzhen) Co., Ltd.
4th Floor, A Section, Languang Science&technology Building, No.7
Address /Post: Xinxi RD, Hi-Tech Industrial Park North, Nanshan District, ShenZhen,
P.R.C.
Contact Person: alex.ma
Contact Email alex.ma@pwidea.com
Telephone: 0086-0755-86220211
Fax: /

3. Equipment Under Test (EUT) and Ancillary Equipment (AE)

3.1. About EUT

Description	TD-LTE digital mobile phone
Model Name	RG730
IC	11113A-RG730
Antenna	Integrated
RF power setting in TEST SW	RG730_US_25_V1.01_V02W_20161205
Extreme vol. Limits	3.6VDC to 4.2VDC (nominal: 3.7VDC)
Extreme temp. Tolerance	-30°C to +50°C

Note: Components list, please refer to documents of the manufacturer; it is also included in the original test record of CTTL, Telecommunication Technology Labs, Academy of Telecommunication Research, MIIT

3.2. Internal Identification of EUT used during the test

EUT ID*	IMEI	HW Version	SW Version	Sample Arrival Date
S01	867453021949725	1.04	RG730_US_25_V1.0 1_V02W_20161205	2017-01-19

*EUT ID: is used to identify the test sample in the lab internally.

3.3. Internal Identification of AE used during the test

AE ID* Description

AE1	Battery
AE2	Charger

AE1

Model	Li-ion Rechargeable Battery
Manufacturer	Springpower Technology (Shenzhen) Co., LTD
Capacitance	3020mAh

AE2

Model	HKC0055010-2D
Manufacturer	SHENZHEN HUNTKEY ELECTRIC CO., LTD

*AE ID: is used to identify the test sample in the lab internally.

3.4. General Description

The Equipment Under Test (EUT) is a model TD-LTE mobile phone with integrated antenna. It consists of normal options: lithium battery, charger. Manual and specifications of the EUT were provided to fulfil the test.



4. Reference Documents

4.1. Reference Documents for testing

The following documents listed in this section are referred for testing.

Reference	Title	Version
RSS-Gen	RSS-Gen —General Requirements for Compliance of Radio Apparatus	Issue 4
RSS-132	Cellular Telephones Employing New Technologies Operating in the Bands 824-849 MHz and 869-894 MHz	Issue 3
RSS-133	2 GHz Personal Communications Services	Issue 6
ANSI/TIA-603-D	Land Mobile FM or PM Communications Equipment Measurement and Performance Standards	2010
ANSI C63.4	Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz	2014
KDB 971168 D01	Power Meas License Digital Systems	v02r02
ANSI C63.26	American National Standard of Procedures for Compliance Testing of Licensed Transmitters Used in Licensed Radio Service	2015

5. LABORATORY ENVIRONMENT

Control room / conducted chamber did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 35 °C
Relative humidity	Min. = 20 %, Max. = 80 %
Shielding effectiveness	> 110 dB
Electrical insulation	> 2 MΩ
Ground system resistance	< 0.5 Ω

Fully-anechoic chamber 2 (8.6 meters×6.1 meters×3.85 meters) did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 30 °C
Relative humidity	Min. = 35 %, Max. = 60 %
Shielding effectiveness	> 110 dB
Electrical insulation	> 2 MΩ
Ground system resistance	< 1 Ω
Site voltage standing-wave ratio (S_{VSWR})	Between 0 and 6 dB, from 1GHz to 18GHz
Uniformity of field strength	Between 0 and 6 dB, from 80 to 4000 MHz

Semi-anechoic chamber 2 / Fully-anechoic chamber 3 (10 meters×6.7 meters×6.15 meters) did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 30 °C
Relative humidity	Min. = 35 %, Max. = 60 %
Shielding effectiveness	> 100 dB
Electrical insulation	> 2 MΩ
Ground system resistance	< 0.5 Ω
Normalised site attenuation (NSA)	< ±3.5 dB, 3 m distance
Site voltage standing-wave ratio (S_{VSWR})	Between 0 and 6 dB, from 1GHz to 18GHz
Uniformity of field strength	Between 0 and 6 dB, from 80 to 3000 MHz

6. SUMMARY OF TEST RESULTS

GSM 850

Items	Test Name	Clause in IC rules RSS-Gen and RSS-132	Section in this report	Verdict
1	Output Power	4.4	A.1	P
2	Emission Limit	4.5	A.2	P
3	Frequency Stability	4.3	A.3	P
4	Occupied Bandwidth	4.1/4.6.1	A.4	P
5	Emission Bandwidth	4.6.1	A.5	P
6	Band Edge Compliance	4.5	A.6	P
7	Conducted Spurious Emission	4.5	A.7	P
8	peak-to-average power ratio	5.4	A.8	P

PCS 1900

Items	Test Name	Clause in IC rules RSS-Gen and RSS- 133	Section in this report	Verdict
1	Output Power	6.4	A.1	P
2	Emission Limit	6.5	A.2	P
3	Frequency Stability	6.3	A.3	P
4	Occupied Bandwidth	4.1/4.6.1	A.4	P
5	Emission Bandwidth	4.6.1	A.5	P
6	Band Edge Compliance	6.5	A.6	P
7	Conducted Spurious Emission	6.5	A.7	P
8	peak-to-average power ratio	6.4	A.8	P

Receiver Radiated Emission

Items	Test Name	Clause in IC rules		Section in this report	Verdict
		RSS-132	RSS-133		
9	Receiver Radiated Emissions	4.6	6.6	A.9	P

7. Test Equipments Utilized

NO.	Description	TYPE	Manufacture	series number	CAL DUE DATE
1	Test Receiver	ESR7	R&S	101675	2017-07-21
2	BiLog Antenna	VULB9163	Schwarzbeck	9163 330	2017-04-22
3	Horn Antenna	3117	ETS-Lindgren	00066585	2019-03-05
4	Antenna	SBA 9113	814	Schwarzbeck	/
5	Antenna	SBA 9112	302	Schwarzbeck	/
6	Antenna	3160-09	LM4750/00118388	ETS-Lindgren	2018.07.14
7	preamplifier	83017A	MY39501110	Agilent	/
8	Signal Generator	SMR40	R&S	100541	2017-06-27
9	Fully Anechoic Chamber	FACT5-2.0	ETS-Lindgren	4166	2018-05-13
10	Spectrum Analyzer	FSP40	R&S	100378	2017-12-15
11	Universal Radio Communication Tester	CMU200	R&S	114544	2017-09-09
12	Universal Radio Communication Tester	CMU200	R&S	123210	2017-12-25
13	Spectrum Analyzer	FSU	R&S	200679	2017-12-25
14	Temperature Chamber	SH-241	ESPECs	92007516	2017-11-29
15	DC Power Supply	U3606A	Agilent Technologies	MY50450012	2017-11-22

Test software

Item	Name	Vesion
Radiated	EMC32	Version 10.01.00

ANNEX A: MEASUREMENT RESULTS

A.1 OUTPUT POWER

A.1.1 Summary

During the process of testing, the EUT was controlled via Rhode & Schwarz Digital Radio Communication tester (CMU-200) to ensure max power transmission and proper modulation.

This result contains output power and EIRP measurements for the EUT. In all cases, output power is within the specified limits.

A.1.2 Conducted

A.1.2.1 Method of Measurements

The EUT was set up for the max output power with pseudo random data modulation.

These measurements were done at 3 frequencies, 1850.2 MHz, 1880.0MHz and 1909.8MHz for PCS1900 band; 824.4MHz, 836.6MHz and 848.8MHz for GSM850 band. (bottom, middle and top of operational frequency range).

GSM850

	Power step	Nominal Peak output power (dBm)
GSM	5	33dBm(2W)
GPRS	3	33dBm(2W)
EGPRS	6	27dBm(0.5W)

Measurement result

GSM(GMSK)

Frequency(MHz)	Power Step	Output power(dBm)
824.2	5	32.29
836.6	5	32.41
848.8	5	32.49

GPRS(GMSK, 1Slot)

Frequency(MHz)	Power Step	Output power(dBm)
824.2	3	32.27
836.6	3	32.38
848.8	3	32.48

EGPRS(8PSK, 1Slot)

Frequency(MHz)	Power Step	Output power(dBm)
824.2	6	26.56
836.6	6	26.68
848.8	6	26.75



PCS1900

	Power step	Nominal Peak output power (dBm)
GSM	0	30dBm(1W)
GPRS	3	30dBm(1W)
EGPRS	5	26dBm(0.4W)

Measurement result

GSM(GMSK)

Frequency(MHz)	Power Step	Output power(dBm)
1850.2	0	28.52
1880.0	0	28.76
1909.8	0	28.79

GPRS(GMSK, 1Slot)

Frequency(MHz)	Power Step	Output power(dBm)
1850.2	3	28.51
1880.0	3	28.77
1909.8	3	28.78

EGPRS(8PSK, 1Slot)

Frequency(MHz)	Power Step	Output power(dBm)
1850.2	5	25.02
1880.0	5	25.32
1909.8	5	25.36

A.1.3 Radiated


A.1.3.1 Description

This is the test for the maximum radiated power from the EUT.


A.1.3.2 Method of Measurement

The measurements procedures in TIA-603-D-2010 are used.

1. EUT was placed on a 1.5 meter high non-conductive stand at a 3 meter test distance from the receive antenna. A receiving antenna was placed on the antenna mast 3 meters from the EUT for emission measurements. The height of receiving antenna is 1.5m. The test setup refers to figure below. Detected emissions were maximized at each frequency by rotating the EUT through 360° and adjusting the receiving antenna polarization. The radiated emission measurements of all transmit frequencies in three channels (High, Middle, Low) were measured with peak detector.

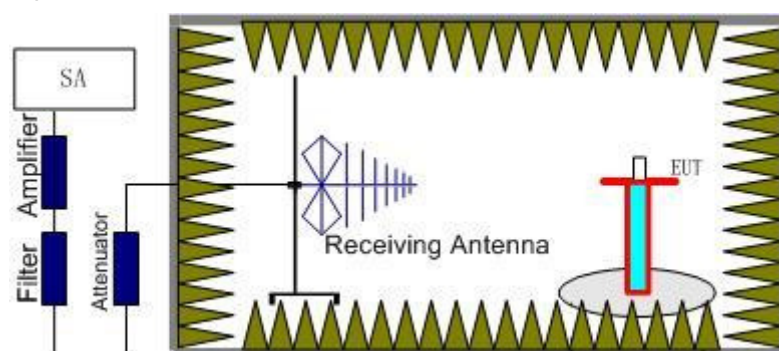

2. The EUT is then put into continuously transmitting mode at its maximum power level during the test. And the maximum value of the receiver should be recorded as (P_r).
3. The EUT shall be replaced by a substitution antenna. The test setup refers to figure below.

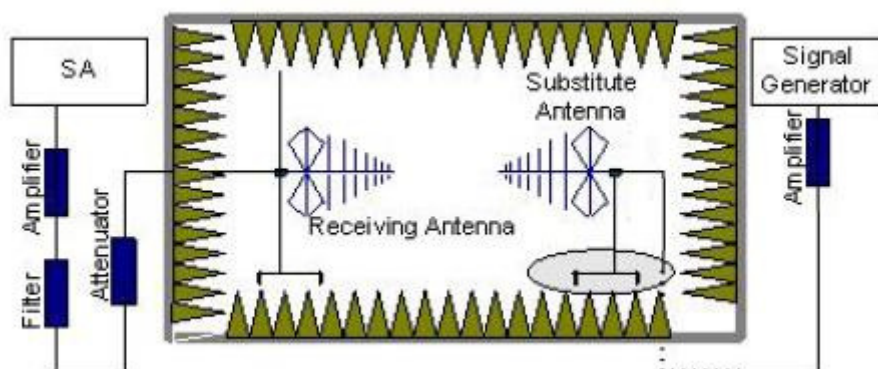

In the chamber, an substitution antenna for the frequency band of interest is placed at the reference point of the chamber. An RF Signal source for the frequency band of interest is connected to the substitution antenna with a cable that has been constructed to not interfere with the radiation pattern of the antenna. A power (P_{Mea}) is applied to the input of the substitution antenna, and adjust the level of the signal generator output until the value of the receiver reach the previously recorded (P_r). The power of signal source (P_{Mea}) is recorded. The test should be performed by rotating the test item and adjusting the receiving antenna polarization.

4. A amplifier should be connected to the Signal Source output port. And the cable should be

connect between the Amplifier and the Substitution Antenna.

The cable loss (P_{cl}), the Substitution Antenna Gain (G_a) and the Amplifier Gain (P_{Ag}) should be recorded after test.

The measurement results are obtained as described below:

$$\text{Power(EIRP)} = P_{\text{Mea}} - P_{\text{Ag}} - P_{\text{cl}} + G_a$$

5. This value is EIRP since the measurement is calibrated using an antenna of known gain (2.15 dBi) and known input power.
6. ERP can be calculated from EIRP by subtracting the gain of the dipole, $\text{ERP} = \text{EIRP} - 2.15\text{dBi}$.



GSM 850-ERP

Measurement result

GSM

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)+ P _{Ag} (dB)	G _a Antenna Gain(dB)	Correction (dB)	ERP(dBm)	Limit(dBm)	Polarization
824.20	-3.37	-33.60	0.28	2.15	28.36	40.61	H
836.60	-6.61	-33.50	0.25	2.15	24.99	40.61	H
848.80	-4.26	-33.50	0.21	2.15	27.30	40.61	H

GPRS

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)+ P _{Ag} (dB)	G _a Antenna Gain(dB)	Correction (dB)	ERP(dBm)	Limit(dBm)	Polarization
824.20	-5.42	-33.60	0.28	2.15	26.31	40.61	H
836.60	-6.93	-33.50	0.25	2.15	24.67	40.61	H
848.80	-5.04	-33.50	0.21	2.15	26.52	40.61	H

EGPRS-8PSK

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)+ P _{Ag} (dB)	G _a Antenna Gain(dB)	Correction (dB)	ERP(dBm)	Limit(dBm)	Polarization
824.20	-5.71	-33.60	0.28	2.15	26.02	40.61	H
836.60	-7.45	-33.50	0.25	2.15	24.15	40.61	H
848.80	-5.85	-33.50	0.21	2.15	25.71	40.61	H

Frequency: 824.20MHz

Peak ERP(dBm)=P_{Mea}(-3.37dBm)- (P_{cl}+P_{Ag}) (-33.60dB)+G_a(0.28dB)-2.15dB=28.36Bm

ANALYZER SETTINGS: RBW = VBW = 3MHz



PCS1900-EIRP

Measurement result

GSM

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)+ P _{Ag} (dB)	G _a Antenna Gain(dB)	EIRP(dBm)	Limit(dBm)	Polarization
1850.20	-5.93	-29.40	0.15	23.62	33.00	H
1880.00	-4.43	-29.30	0.25	25.12	33.00	H
1909.80	-4.29	-29.30	0.35	25.36	33.00	H

GPRS

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)+ P _{Ag} (dB)	G _a Antenna Gain(dB)	EIRP(dBm)	Limit(dBm)	Polarization
1850.20	-6.11	-29.40	0.15	23.44	33.00	H
1880.00	-4.29	-29.30	0.25	25.26	33.00	H
1909.80	-3.88	-29.30	0.35	25.77	33.00	H

EGPRS-8PSK

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)+ P _{Ag} (dB)	G _a Antenna Gain(dB)	EIRP(dBm)	Limit(dBm)	Polarization
1850.20	-7.09	-29.40	0.15	22.46	33.00	H
1880.00	-5.97	-29.30	0.25	23.58	33.00	H
1909.80	-5.91	-29.30	0.35	23.74	33.00	H

Frequency: 1909.80MHz

Peak EIRP(dBm)= P_{Mea}(-3.88dBm) - (P_{cl}+P_{Ag}) (-29.30dB)+G_a (0.35dB) =25.77dBm

ANALYZER SETTINGS: RBW = VBW = 3MHz

A.2 EMISSION LIMIT


A.2.1 Measurement Method

The measurement procedures in TIA-603-D-2010 are used.


The spectrum was scanned from 30 MHz to the 10th harmonic of the highest frequency generated within the equipment, which is the transmitted carrier that can be as high as 1910 MHz. The spectrum is scanned with the mobile station transmitting at carrier frequencies that pertain to low, mid and high channels of PCS1900 and GSM850.

The procedure of radiated spurious emissions is as follows:

1. EUT was placed on a 1.5 meter high non-conductive stand at a 3 meter test distance from the receive antenna. A receiving antenna was placed on the antenna mast 3 meters from the EUT for emission measurements. The height of receiving antenna is 1.5m. The test setup refers to figure below. Detected emissions were maximized at each frequency by rotating the EUT through 360° and adjusting the receiving antenna polarization. The radiated emission measurements of all non-harmonic and harmonics of the transmit frequency through the 10th harmonic were measured with peak detector.

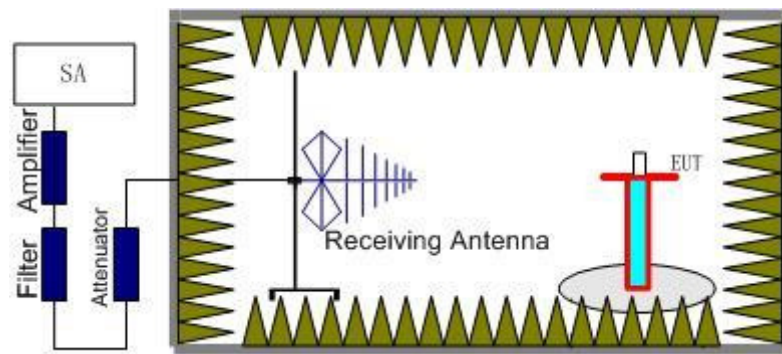

2. The EUT is then put into continuously transmitting mode at its maximum power level during the test. And the maximum value of the receiver should be recorded as (P_r).
3. The EUT shall be replaced by a substitution antenna. The test setup refers to figure below.

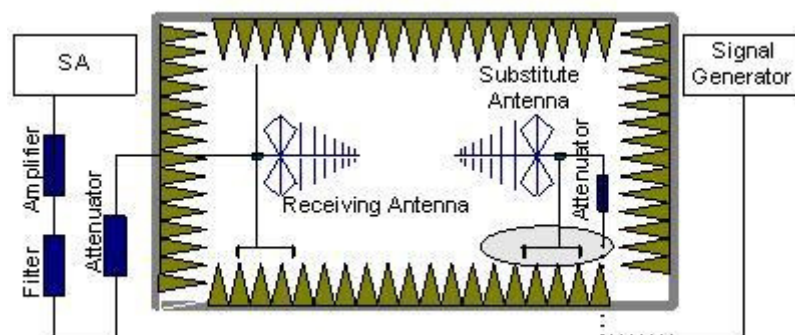

In the chamber, an substitution antenna for the frequency band of interest is placed at the reference point of the chamber. An RF Signal source for the frequency band of interest is connected to the substitution antenna with a cable that has been constructed to not interfere with the radiation pattern of the antenna. A power (P_{Mea}) is applied to the input of the substitution antenna, and adjust the level of the signal generator output until the value of the receiver reach the previously recorded (P_r). The power of signal source (P_{Mea}) is recorded. The

test should be performed by rotating the test item and adjusting the receiving antenna polarization.

4. The Path loss (P_{pl}) between the Signal Source with the Substitution Antenna and the Substitution Antenna Gain (G_a) should be recorded after test.

A amplifier should be connected in for the test.

The Path loss (P_{pl}) is the summation of the cable loss and the gain of the amplifier.

The measurement results are obtained as described below:

$$\text{Power(EIRP)} = P_{\text{Mea}} - P_{\text{pl}} + G_a$$

5. This value is EIRP since the measurement is calibrated using an antenna of known gain (2.15 dBi) and known input power.
6. ERP can be calculated from EIRP by subtracting the gain of the dipole, $\text{ERP} = \text{EIRP} - 2.15\text{dBi}$.

A.2.2 Measurement Limit

The specification that emissions shall be attenuated below the transmitter power (P) by at least $43 + 10 \log (P)$ dB, translates in the relevant power range (1 to 0.001 W) to -13 dBm. At 1 W the specified minimum attenuation becomes 43 dB and relative to a 30 dBm (1 W) carrier becomes a limit of -13 dBm. At 0.001 W (0 dBm) the minimum attenuation is 13 dB, which again yields a limit of -13 dBm. In this way a translation of the specification from relative to absolute terms is carried out.

A.2.3 Measurement Results

Radiated emissions measurements were made only at the upper, middle, and lower carrier frequencies of the PCS1900 band (1850.2 MHz, 1880 MHz and 1909.8 MHz) and GSM850 band (824.2MHz, 836.6MHz, 848.8MHz) . It was decided that measurements at these three carrier frequencies would be sufficient to demonstrate compliance with emissions limits because it was seen that all the significant spurs occur well outside the band and no radiation was seen from a carrier in one block of the PCS1900 ,GSM850 into any of the other blocks. The equipment must still, however, meet emissions requirements with the carrier at all frequencies over which it is capable of operating and it is the manufacturer's responsibility to verify this.

A.2.4 Measurement Results Table

Frequency	Channel	Frequency Range	Result
GSM 850MHz	Low	30MHz-10GHz	Pass
	Middle	30MHz-10GHz	Pass
	High	30MHz-10GHz	Pass
GSM 1900MHz	Low	30MHz-20GHz	Pass
	Middle	30MHz-10GHz	Pass
	High	30MHz-20GHz	Pass

A.2.5 Sweep Table

Working Frequency	Subrange (GHz)	RBW	VBW	Sweep time (s)
850MHz	0.03~1	100KHz	300KHz	10
	1-2	1 MHz	3 MHz	2
	2~5	1 MHz	3 MHz	3
	5~8	1 MHz	3 MHz	3
	8~10	1 MHz	3 MHz	3
1900MHz	0.03~1	100KHz	300KHz	10
	1-2	1 MHz	3 MHz	2
	2~5	1 MHz	3 MHz	3
	5~8	1 MHz	3 MHz	3
	8~11	1 MHz	3 MHz	3
	11~14	1 MHz	3 MHz	3
	14~18	1 MHz	3 MHz	3
	18~20	1 MHz	3 MHz	2

GSM Mode Channel 128/824.2MHz

Frequency(MHz)	P _{Mea} (dBm)	Path loss	Antenna Gain	Peak ERP(dBm)	Limit (dBm)	Polarization
7016.50	-40.95	1.80	-2.85	-47.75	-13.00	V
7640.00	-41.65	1.80	-2.58	-48.18	-13.00	H
8649.00	-42.58	2.00	-1.64	-48.37	-13.00	V
8976.50	-42.28	2.10	-1.58	-48.11	-13.00	H
9355.50	-42.18	2.10	-1.12	-47.55	-13.00	V
9593.50	-43.07	2.10	-0.92	-48.24	-13.00	H

GSM Mode Channel 190/836.6MHz

Frequency(MHz)	P _{Mea} (dBm)	Path loss	Antenna Gain	Peak ERP(dBm)	Limit (dBm)	Polarization
8115.00	-41.40	1.80	-2.15	-47.50	-13.00	V
8165.50	-41.24	1.80	-2.15	-47.34	-13.00	H
8583.50	-41.47	2.00	-1.77	-47.39	-13.00	H
8729.50	-41.71	2.00	-1.63	-47.49	-13.00	V
8791.00	-41.64	2.00	-1.63	-47.42	-13.00	V
9389.00	-41.94	2.10	-1.12	-47.31	-13.00	V

GSM Mode Channel 251/848.8MHz

Frequency(MHz)	P _{Mea} (dBm)	Path loss	Antenna Gain	Peak ERP(dBm)	Limit (dBm)	Polarization
7068.00	-40.62	1.80	-2.85	-47.42	-13.00	V
8072.00	-42.00	1.80	-2.18	-48.13	-13.00	V
8496.50	-42.24	1.80	-1.79	-47.98	-13.00	H
8606.50	-41.80	2.00	-1.64	-47.59	-13.00	H
8729.00	-41.87	2.00	-1.63	-47.65	-13.00	V
9411.50	-42.49	2.10	-0.86	-47.60	-13.00	V

GSM Mode Channel 512/1850.2MHz

Frequency(MHz)	P _{Mea} (dBm)	Path loss	Antenna Gain	Peak ERP(dBm)	Limit (dBm)	Polarization
16877.16	-34.23	2.90	-0.26	-37.39	-13.00	H
17305.03	-33.81	2.90	-0.98	-37.69	-13.00	H
17444.16	-33.51	3.20	-1.08	-37.79	-13.00	H
17622.66	-33.66	3.20	-1.01	-37.87	-13.00	H
17778.84	-33.19	3.20	-0.75	-37.14	-13.00	H
17917.31	-32.69	3.20	-0.64	-36.53	-13.00	H

GSM Mode Channel 661/1880.0MHz

Frequency(MHz)	P _{Mea} (dBm)	Path loss	Antenna Gain	Peak ERP(dBm)	Limit (dBm)	Polarization
16869.28	-33.97	2.90	-0.26	-37.13	-13.00	H
16953.28	-34.04	2.90	-0.50	-37.44	-13.00	H
17198.06	-33.19	2.90	-0.79	-36.88	-13.00	H
17452.03	-31.92	3.20	-1.08	-36.20	-13.00	H
17782.78	-32.35	3.20	-0.75	-36.30	-13.00	H
17923.88	-31.93	3.20	-0.64	-35.77	-13.00	H

GSM Mode Channel 810/1909.8MHz

Frequency(MHz)	P _{Mea} (dBm)	Path loss	Antenna Gain	Peak ERP(dBm)	Limit (dBm)	Polarization
16826.63	-33.01	2.90	-0.26	-36.17	-13.00	H
17263.69	-33.74	2.90	-1.01	-37.65	-13.00	H
17446.78	-33.38	3.20	-1.08	-37.66	-13.00	H
17594.44	-33.73	3.20	-0.81	-37.74	-13.00	H
17772.28	-33.34	3.20	-0.75	-37.29	-13.00	H
17858.25	-32.49	3.20	-0.84	-36.53	-13.00	H

A.3 FREQUENCY STABILITY

A.3.1 Method of Measurement

In order to measure the carrier frequency under the condition of AFC lock, it is necessary to make measurements with the EUT in a “call mode”. This is accomplished with the use of R&S CMU200 DIGITAL RADIO COMMUNICATION TESTER.

1. Measure the carrier frequency at room temperature.
2. Subject the EUT to overnight soak at -30°C.
3. With the EUT, powered via nominal voltage, connected to the CMU200 and in a simulated call on mid channel of PCS 1900 and GSM850, measure the carrier frequency. These measurements should be made within 2 minutes of Powering up the EUT, to prevent significant self-warming.
4. Repeat the above measurements at 10°C increments from -30°C to +50°C. Allow at least 1 1/2 hours at each temperature, unpowered, before making measurements.
5. Remeasure carrier frequency at room temperature with nominal voltage. Vary supply voltage from minimum voltage to maximum voltage, in 0.1Volt increments remeasuring carrier frequency at each voltage. Pause at nominal voltage for 1 1/2 hours unpowered, to allow any self-heating to stabilize, before continuing.
6. Subject the EUT to overnight soak at +50°C.
7. With the EUT, powered via nominal voltage, connected to the CMU200 and in a simulated call on the centre channel, measure the carrier frequency. These measurements should be made within 2 minutes of Powering up the EUT, to prevent significant self-warming.
8. Repeat the above measurements at 10 C increments from +50°C to -30°C. Allow at least 1 1/2 hours at each temperature, unpowered, before making measurements.
9. At all temperature levels hold the temperature to +/- 0.5°C during the measurement procedure.

A.3.2 Measurement Limit

A.3.2.1 For Hand carried battery powered equipment

According to the JTC standard the frequency stability of the carrier shall be accurate to within 0.1 ppm of the received frequency from the base station. The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block. This requires that the lower voltage for frequency stability testing be specified by the manufacturer. This transceiver is specified to operate with an input voltage of between 3.6VDC and 4.2VDC, with a nominal voltage of 3.7VDC. Operation above or below these voltage limits is prohibited by transceiver software in order to prevent improper operation as well as to protect components from overstress. These voltages represent a tolerance of -10 % and +12.5 %. For the purposes of measuring frequency stability these voltage limits are to be used.

A.3.2.2 For equipment powered by primary supply voltage

According to the JTC standard the frequency stability of the carrier shall be accurate to within 0.1 ppm of the received frequency from the base station. The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block. This requires varying primary supply voltage from 85 to 115 percent of the nominal value for other than hand carried battery equipment.

A.3.3 Measurement results

GSM 850

Frequency Error vs Voltage

Voltage(V)	Frequency error(Hz)	Frequency error(ppm)
3.6	-17	0.020
3.7	-9	0.011
4.2	-36	0.043

Frequency Error vs Temperature

temperature(°C)	Frequency error(Hz)	Frequency error(ppm)
-30	-8	0.010
-20	-2	0.002
-10	-14	0.017
0	2	0.002
10	-13	0.016
20	5	0.006
30	-9	0.011
40	-34	0.041
50	-7	0.008

EGPRS 850 - 8PSK

Frequency Error vs Voltage

Voltage(V)	Frequency error(Hz)	Frequency error(ppm)
3.6	1	0.001
3.7	-7	0.008
4.2	-32	0.038

Frequency Error vs Temperature

temperature(°C)	Frequency error(Hz)	Frequency error(ppm)
-30	-8	0.010
-20	-19	0.023
-10	-22	0.026
0	-6	0.007
10	-12	0.014
20	4	0.005
30	7	0.008
40	-26	0.031
50	-31	0.037



PCS 1900

Frequency Error vs Voltage

Voltage(V)	Frequency error(Hz)	Frequency error(ppm)
3.6	13	0.007
3.7	3	0.002
4.2	7	0.004

Frequency Error vs Temperature

temperature(°C)	Frequency error(Hz)	Frequency error(ppm)
-30	21	0.011
-20	18	0.010
-10	27	0.014
0	9	0.005
10	6	0.003
20	11	0.006
30	14	0.007
40	3	0.002
50	27	0.014

EGPRS 1900 - 8PSK

Frequency Error vs Voltage

Voltage(V)	Frequency error(Hz)	Frequency error(ppm)
3.6	32	0.017
3.7	10	0.005
4.2	8	0.004

Frequency Error vs Temperature

temperature(°C)	Frequency error(Hz)	Frequency error(ppm)
-30	25	0.013
-20	14	0.007
-10	7	0.004
0	3	0.002
10	6	0.003
20	11	0.006
30	19	0.010
40	26	0.014
50	33	0.018

A.4 OCCUPIED BANDWIDTH

Reference

IC: RSS-GEN 4.6.1

A.4.1 Occupied Bandwidth Results

Occupied bandwidth measurements are only provided for selected frequencies in order to reduce the amount of submitted data. Data were taken at the extreme and mid frequencies of the US Cellular/PCS frequency bands. The table below lists the measured 99% BW. Spectrum analyzer plots are included on the following pages.

The measurement method of IC is from RSS-GEN 4.6.1:


The transmitter shall be operated at its maximum carrier power measured under normal test conditions. The span of the analyzer shall be set to capture all products of the modulation process, including the emission skirts. The resolution bandwidth shall be set to as close to 1% of the selected span as is possible without being below 1%. The video bandwidth shall be set to 3 times the resolution bandwidth. Video averaging is not permitted. Where practical, a sampling detector shall be used given that a peak or peak hold may produce a wider bandwidth than actual. The trace data points are recovered and directly summed in linear terms. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5% of the total is reached and that frequency recorded. The process is repeated for the highest frequency data points. This frequency is recorded. The span between the two recorded frequencies is the occupied bandwidth.

GSM 850(99% BW)


Frequency(MHz)	Occupied Bandwidth (99% BW)(kHz)
824.2	243.59
836.6	246.79
848.8	245.19

GSM 850

Channel 128-Occupied Bandwidth (99% BW)

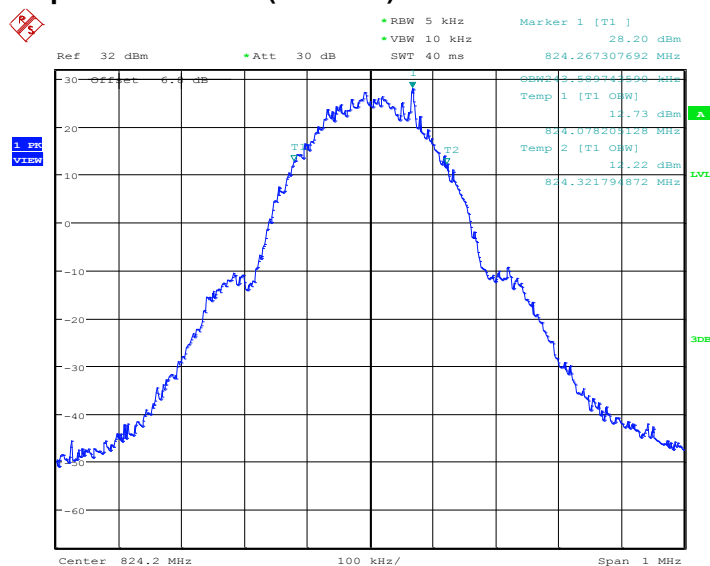


Channel 190-Occupied Bandwidth (99% BW)

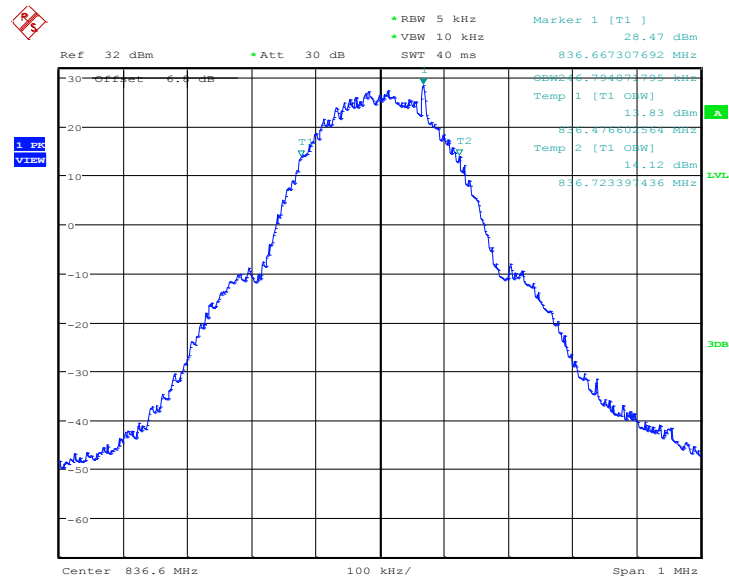

Date: 24.JAN.2017 09:54:34

Channel 251-Occupied Bandwidth (99% BW)

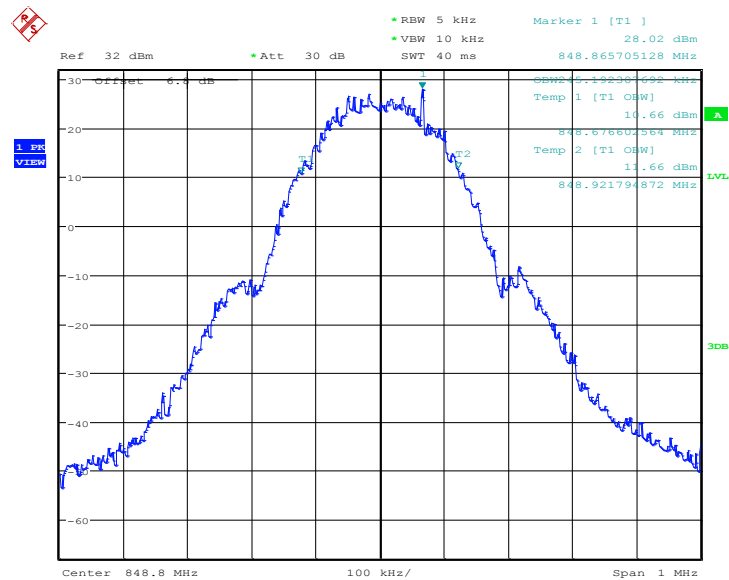


Date: 24.JAN.2017 09:49:36

GPRS 850(99% BW)

Frequency(MHz)	Occupied Bandwidth (99% BW)(kHz)
824.2	243.59
836.6	245.19
848.8	245.19


GPRS 850

Channel 128-Occupied Bandwidth (99% BW)

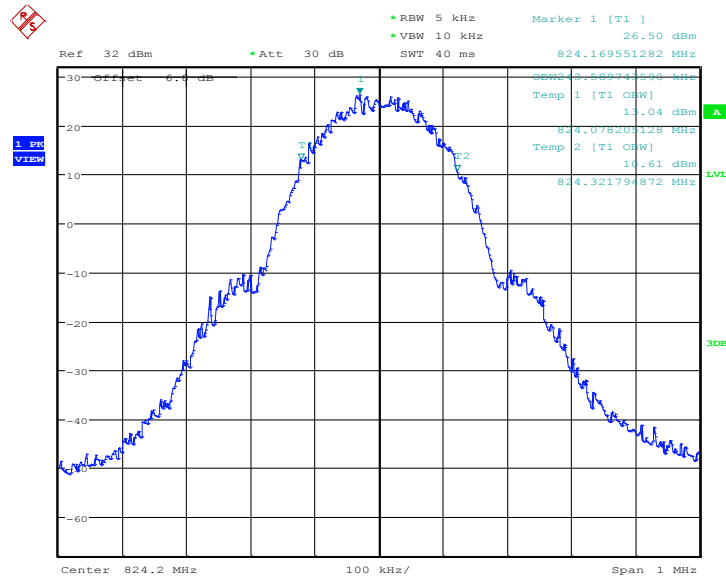

Date: 24.JAN.2017 09:27:57


Channel 190-Occupied Bandwidth (99% BW)

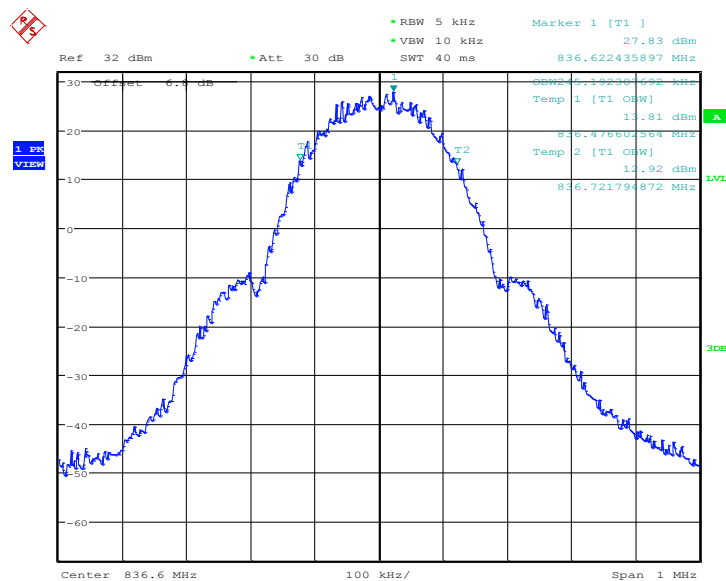

Date: 24.JAN.2017 09:29:40



Channel 251-Occupied Bandwidth (99% BW)

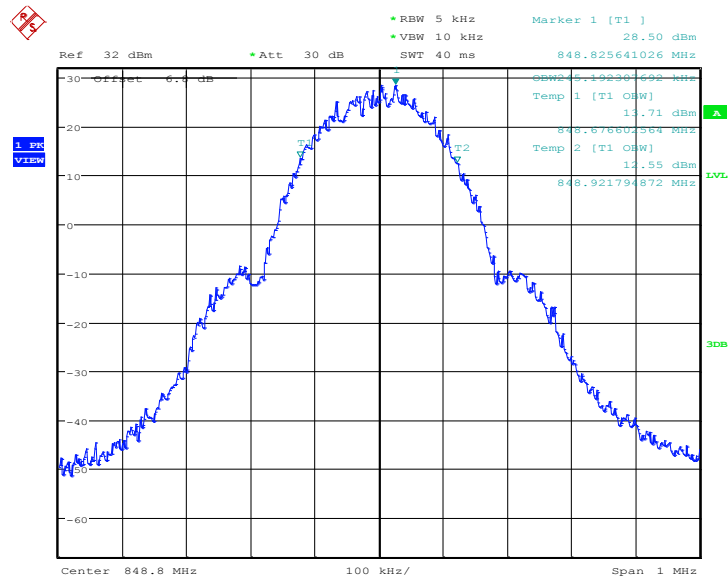


Date: 24.JAN.2017 09:34:23

EGPRS 850-8PSK(99% BW)

Frequency(MHz)	Occupied Bandwidth (99% BW)(kHz)
824.2	241.99
836.6	245.19
848.8	245.19


EGPRS 850-8PSK

Channel 128-Occupied Bandwidth (99% BW)

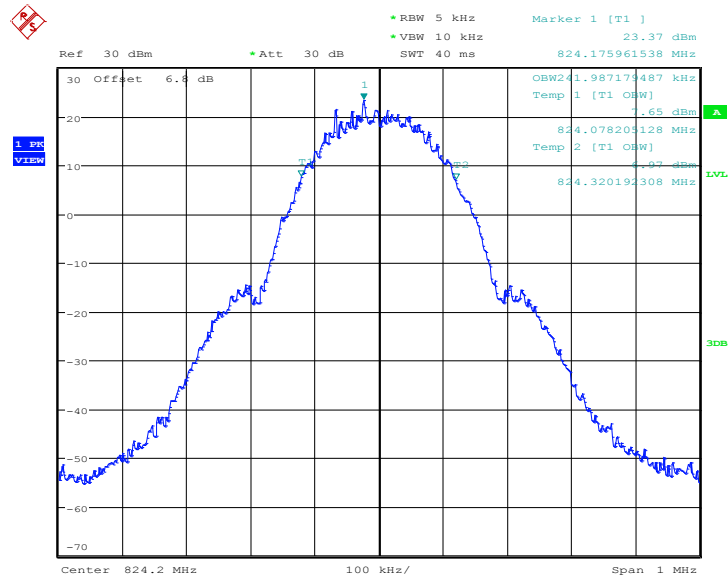

Date: 24.JAN.2017 09:20:50


Channel 190-Occupied Bandwidth (99% BW)

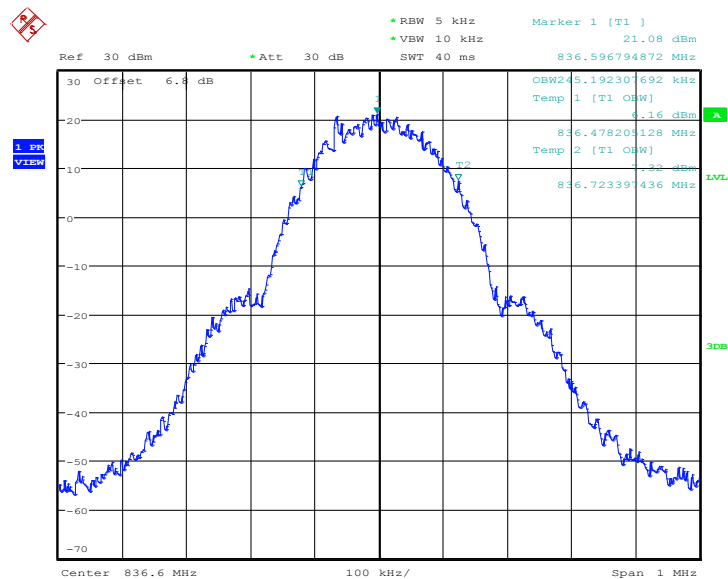


Date: 24.JAN.2017 09:19:25



Channel 251-Occupied Bandwidth (99% BW)

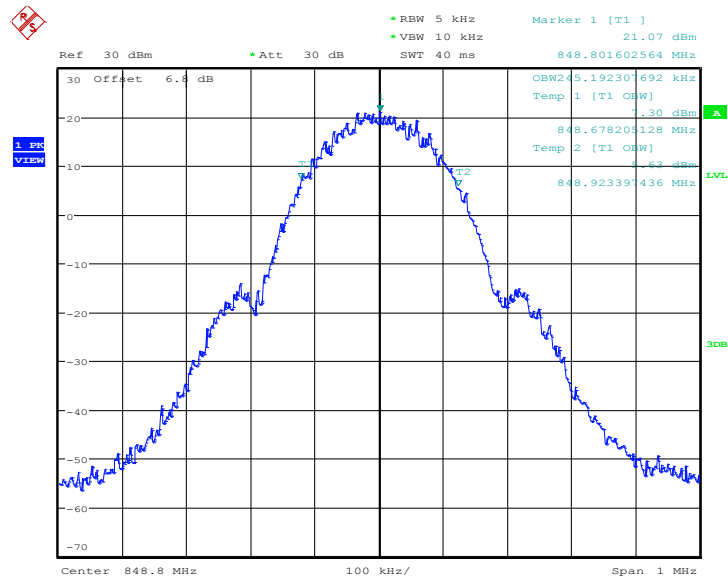

Date: 24.JAN.2017 09:16:01



Frequency(MHz)	Occupied Bandwidth (99% BW)(kHz)
1850.2	245.19
1880.0	243.59
1909.8	243.59

Ref 30 dBm Att 30 dB RBW 5 kHz VBW 10 kHz Marker 1 [T1] 24.16 dBm
SWT 40 ms 1.850187179 GHz

Offset 7.1 dB


1.850187179 GHz

1.850076603 GHz

1.850321795 GHz

Center 1.8502 GHz 100 kHz/ Span 1 MHz

Date: 24.JAN.2017 04:02:28

[illegible]

RBW 5 kHz
 VBW 10 kHz
 Marker 1 [T1]
 23.55 dBm
 Ref 30 dBm
 Att 30 dB
 SWT 40 ms
 1.909795192 GHz

1 dB
 10 dB
 20 dB
 30 dB
 40 dB
 50 dB
 60 dB
 70 dB

Center 1.9098 GHz
 100 kHz/
 Span 1 MHz

Offset 7.2 dB
 T1
 T2
 23.55 dBm
 1.909674205 GHz
 1.909921795 GHz

Date: 24.JAN.2017 04:07:50




GPRS 1900(99% BW)

Frequency(MHz)	Occupied Bandwidth (99% BW)(kHz)
1850.2	245.19
1880.0	245.19
1909.8	243.59


GPRS 1900

Channel 512-Occupied Bandwidth (99% BW)

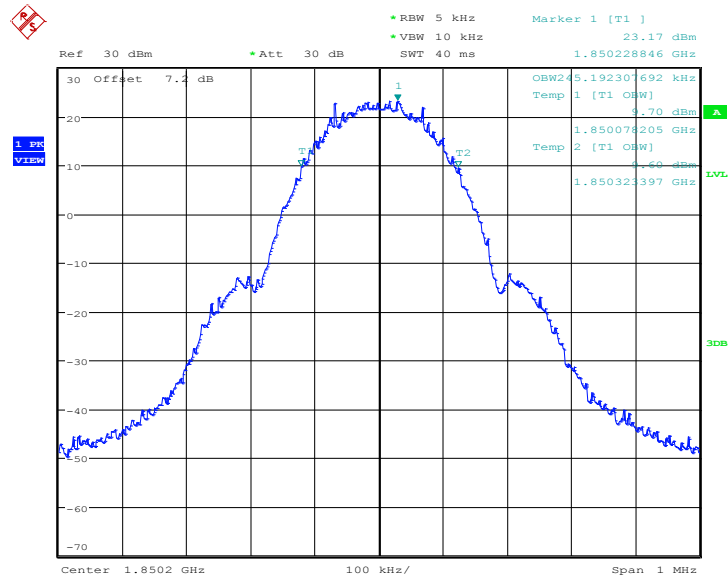


Date: 24.JAN.2017 04:49:01

Channel 661-Occupied Bandwidth (99% BW)

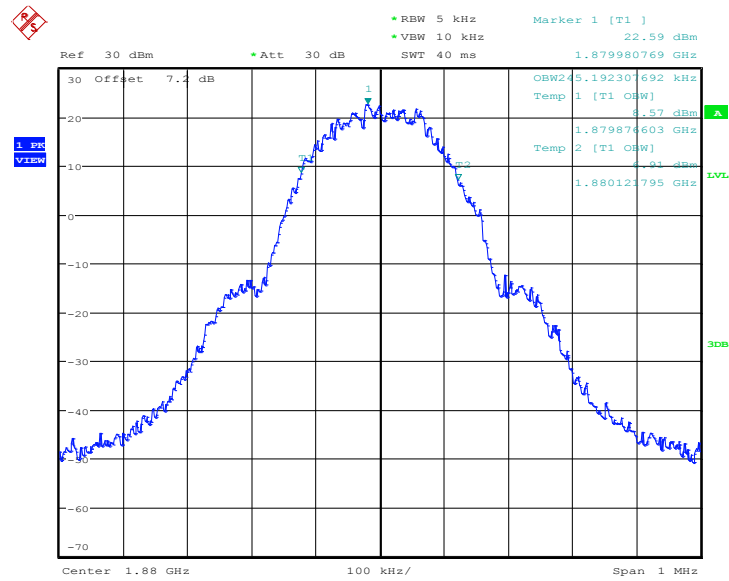

Date: 24.JAN.2017 04:44:04

Channel 810-Occupied Bandwidth (99% BW)

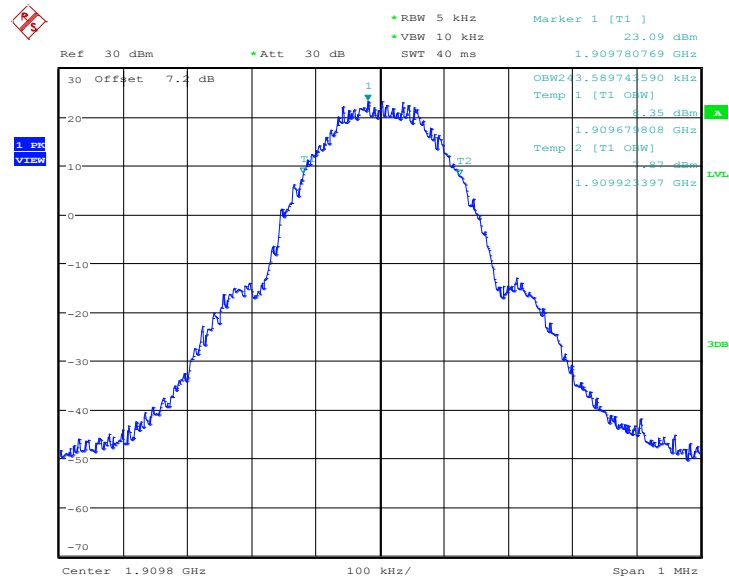


Date: 24.JAN.2017 04:43:26

EGPRS 1900-8PSK(99% BW)

Frequency(MHz)	Occupied Bandwidth (99% BW)(kHz)
1850.2	246.79
1880.0	248.40
1909.8	245.19


EGPRS 1900-8PSK

Channel 512-Occupied Bandwidth (99% BW)

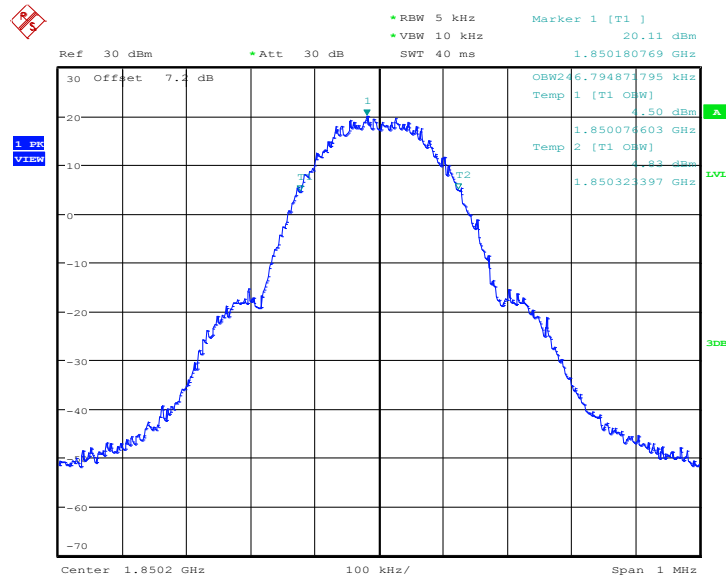


Date: 24.JAN.2017 04:52:53

Channel 661-Occupied Bandwidth (99% BW)

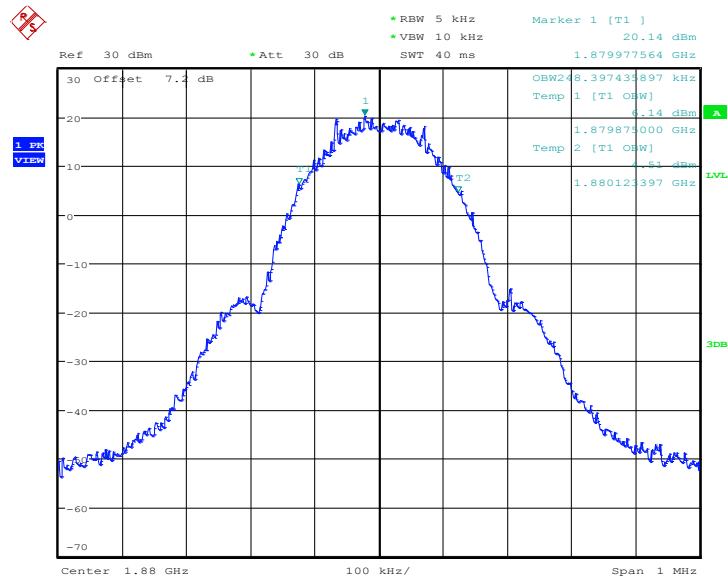


Date: 24.JAN.2017 04:55:17


Channel 810-Occupied Bandwidth (99% BW)

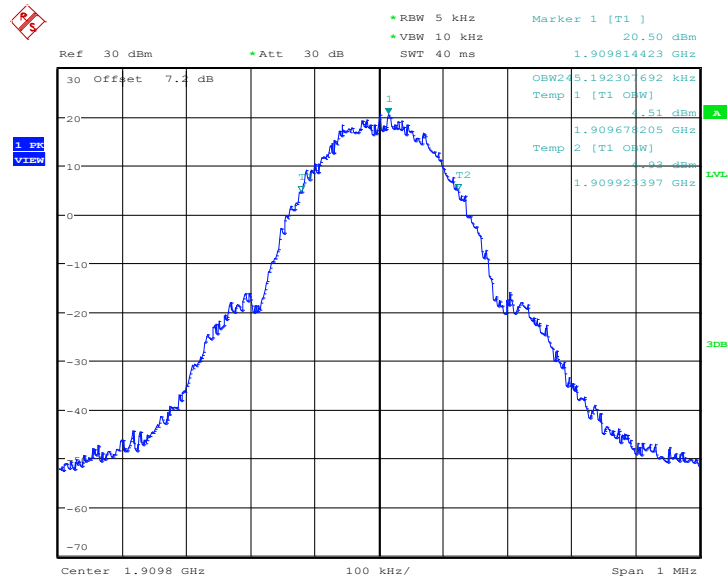

Date: 24.JAN.2017 04:56:20



Date: 24.JAN.2017 10:00:10



*RBW 5 kHz
 *VBW 10 kHz
 *Att 30 dB
 SWT 40 ms

Ref 32 dBm
 Marker 1 [T1]
 27.15 dBm
 836.638461538 MHz

1 SW
 View

30 dB
 20 dB
 10 dB
 0 dB
 -10 dB
 -20 dB
 -30 dB
 -40 dB
 -50 dB
 -60 dB

0 kHz
 100 kHz
 Span 1 MHz


BW 317.307692308 kHz
 Temp 1 [T1] dBm
 836.441346154 MHz
 Temp 2 [T1] dBm
 836.758653846 MHz

1 SW
 View

30 dB
 20 dB
 10 dB
 0 dB
 -10 dB
 -20 dB
 -30 dB
 -40 dB
 -50 dB
 -60 dB

0 kHz
 100 kHz
 Span 1 MHz

Channel 251-Emission Bandwidth (-26dB BW)

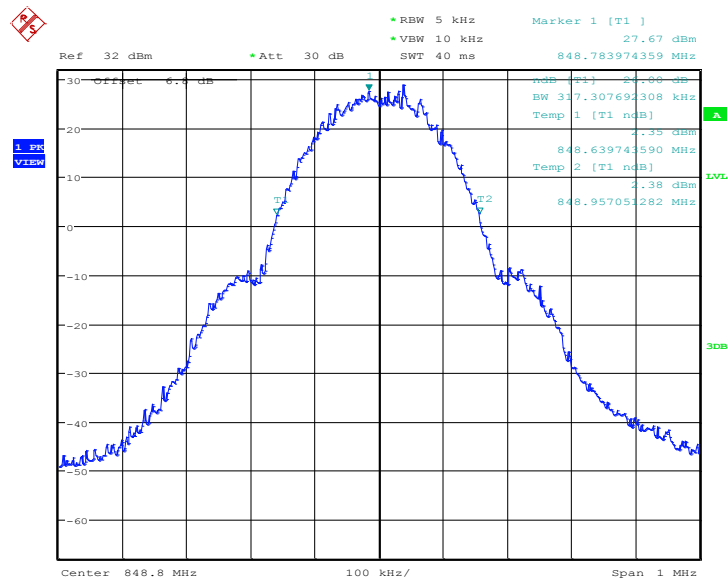


Date: 24.JAN.2017 09:50:51

GPRS 850(-26dB BW)

Frequency(MHz)	Emission Bandwidth (-26dB BW)(kHz)
824.2	318.91
836.6	318.91
848.8	318.91


GPRS 850

Channel 128-Emission Bandwidth (-26dB BW)

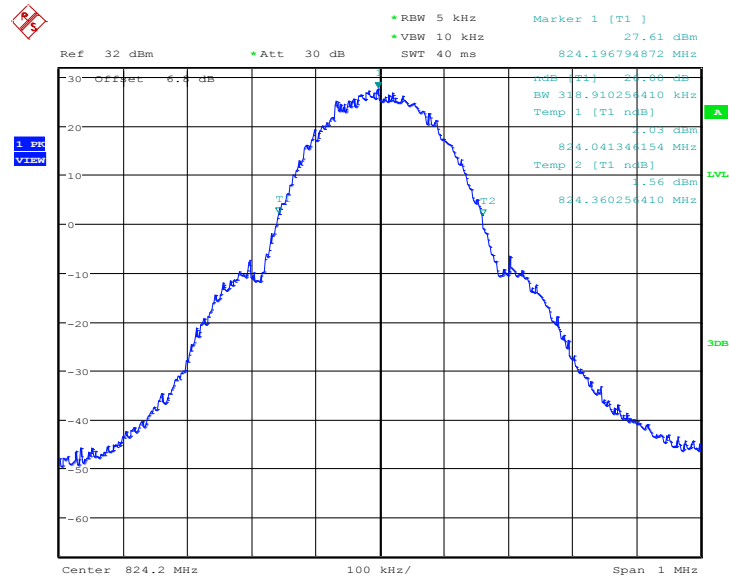


Date: 24.JAN.2017 09:26:45

Channel 190-Emission Bandwidth (-26dB BW)

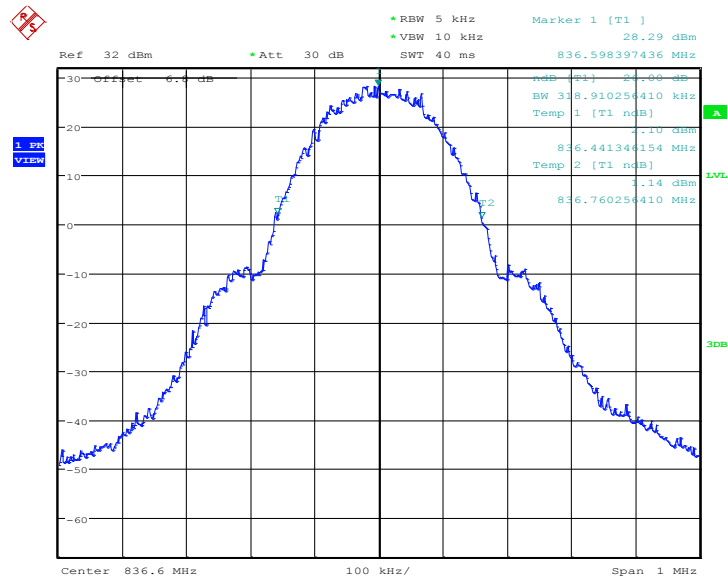

Date: 24.JAN.2017 09:32:05

Channel 251-Emission Bandwidth (-26dB BW)

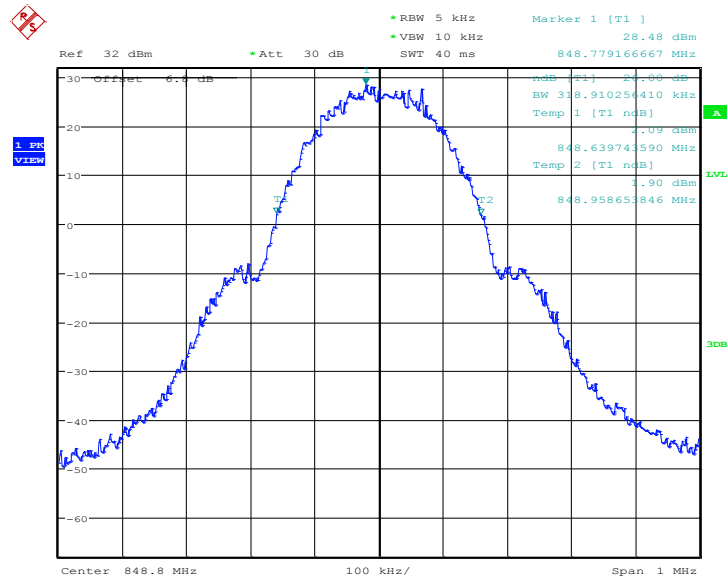


Date: 24.JAN.2017 09:33:44

EGPRS 850-8PSK(-26dB BW)

Frequency(MHz)	Emission Bandwidth (-26dB BW)(kHz)
824.2	317.31
836.6	317.31
848.8	317.31

EGPRS 850-8PSK


Channel 128-Emission Bandwidth (-26dB BW)

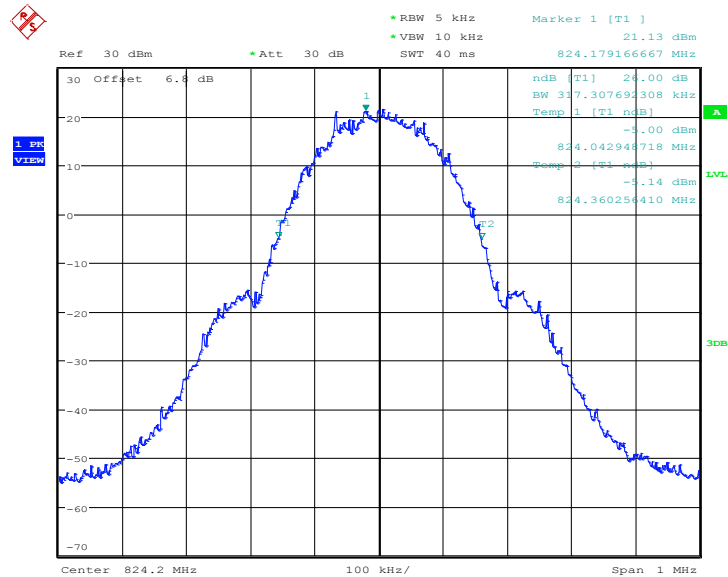

Date: 24.JAN.2017 09:22:06




Channel 190-Emission Bandwidth (-26dB BW)

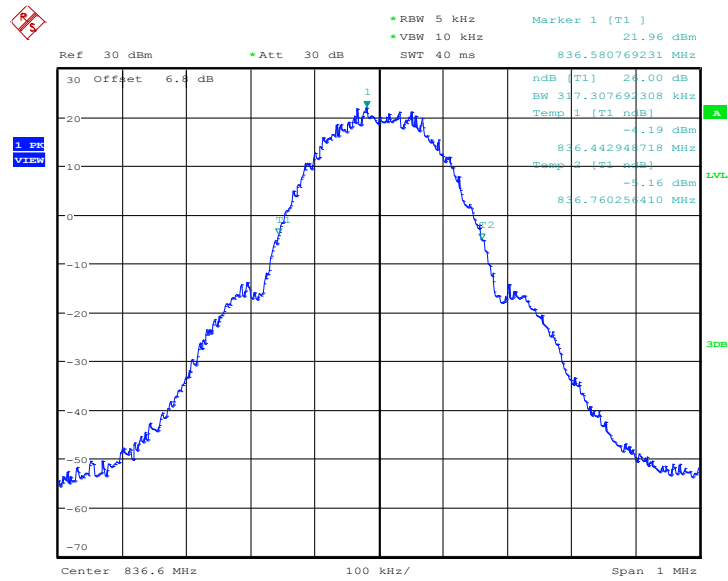

Date: 24.JAN.2017 09:18:49

Channel 251-Emission Bandwidth (-26dB BW)

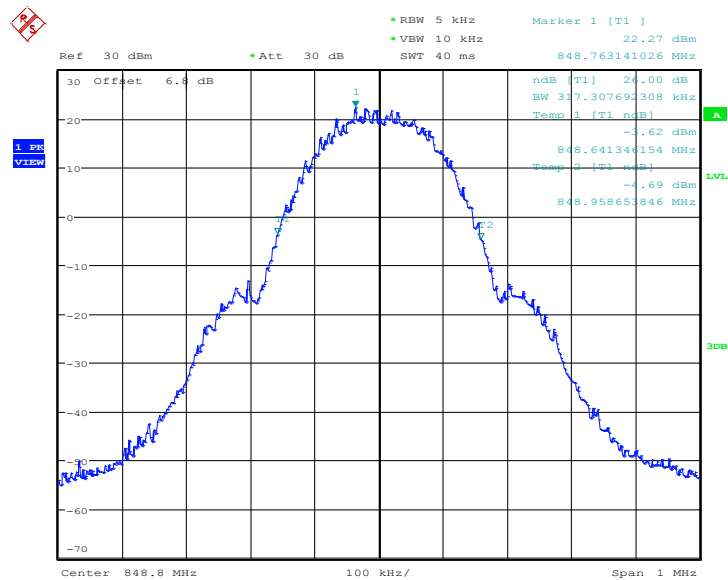

Date: 24.JAN.2017 09:17:28




PCS 1900(-26dB BW)

Frequency(MHz)	Emission Bandwidth (-26dB BW)(kHz)
1850.2	317.31
1880.0	317.31
1909.8	317.31

PCS 1900


Channel 512-Emission Bandwidth (-26dB BW)

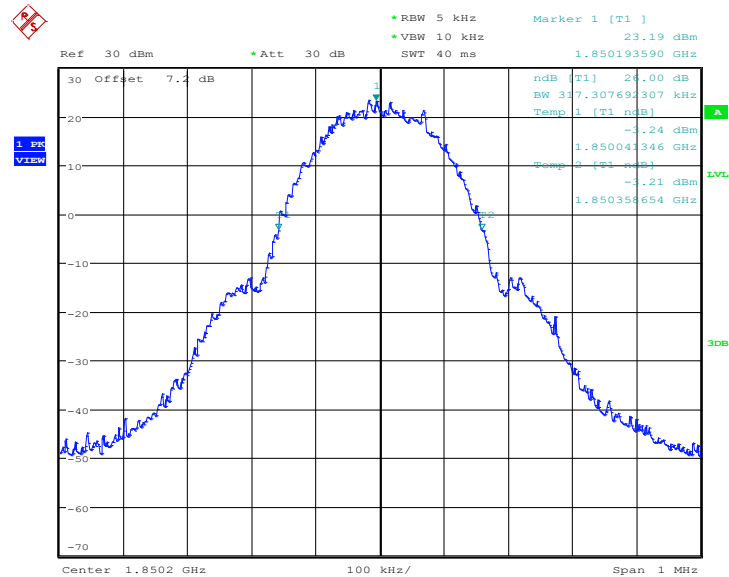

Date: 24.JAN.2017 04:03:35




Channel 661-Emission Bandwidth (-26dB BW)

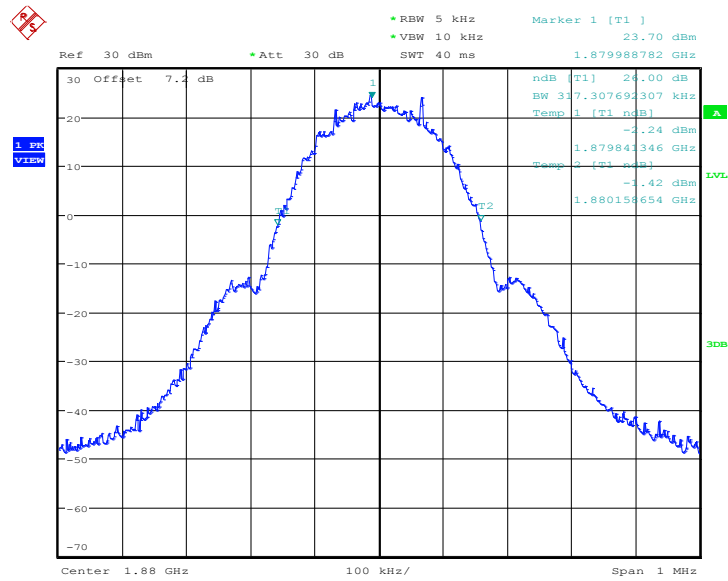

Date: 24.JAN.2017 04:05:23

Channel 810-Emission Bandwidth (-26dB BW)

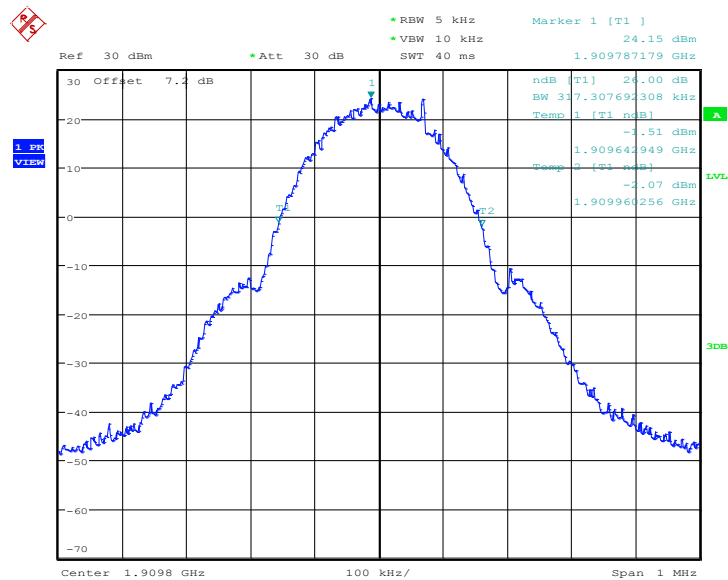

Date: 24.JAN.2017 04:09:59




GPRS 1900(-26dB BW)

Frequency(MHz)	Emission Bandwidth (-26dB BW)(kHz)
1850.2	317.31
1880.0	318.91
1909.8	320.51


GPRS 1900

Channel 512-Emission Bandwidth (-26dB BW)

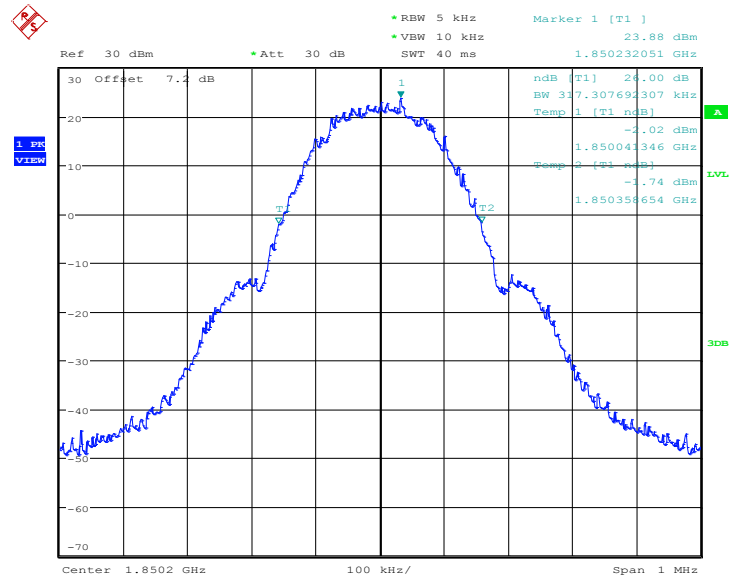


Date: 24.JAN.2017 04:46:55

Channel 661-Emission Bandwidth (-26dB BW)

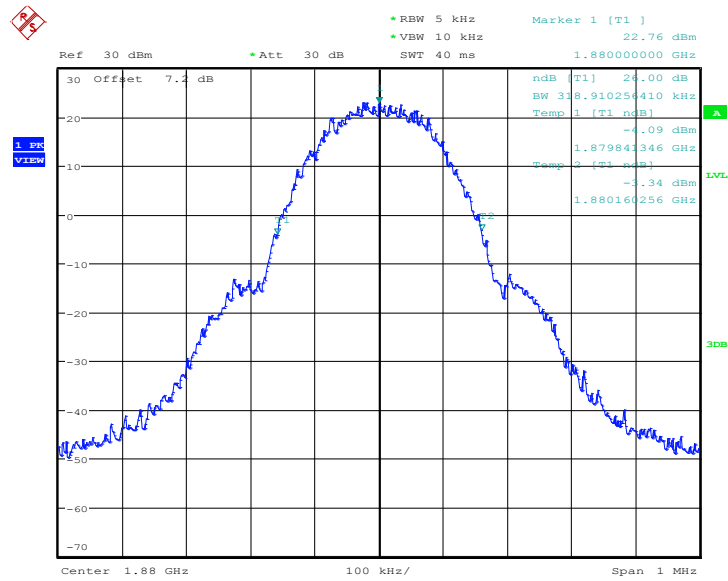

Date: 24.JAN.2017 04:44:58

Channel 810-Emission Bandwidth (-26dB BW)

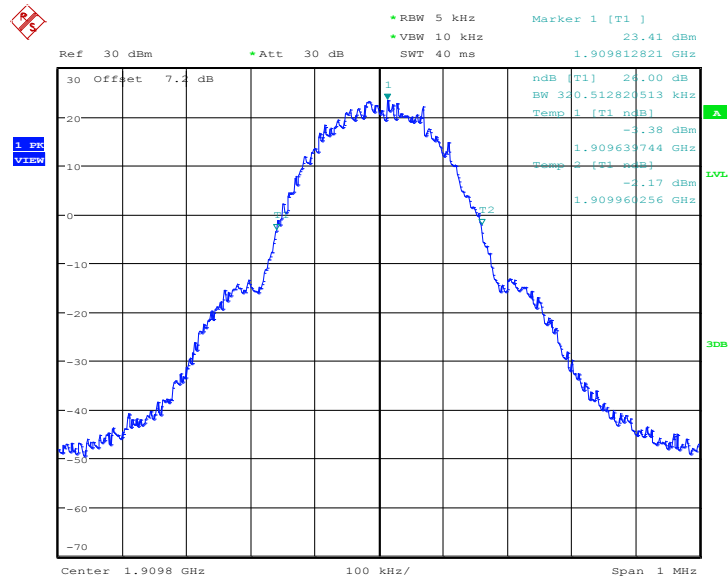


Date: 24.JAN.2017 04:42:48

EGPRS 1900-8PSK(-26dB BW)

Frequency(MHz)	Emission Bandwidth (-26dB BW)(kHz)
1850.2	317.31
1880.0	320.51
1909.8	317.31


EGPRS 1900-8PSK

Channel 512-Emission Bandwidth (-26dB BW)

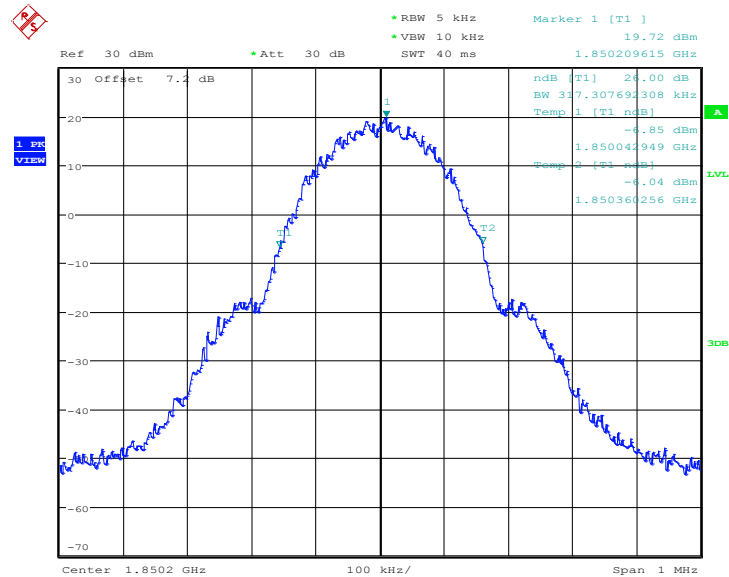


Date: 24.JAN.2017 04:53:35

Channel 661-Emission Bandwidth (-26dB BW)

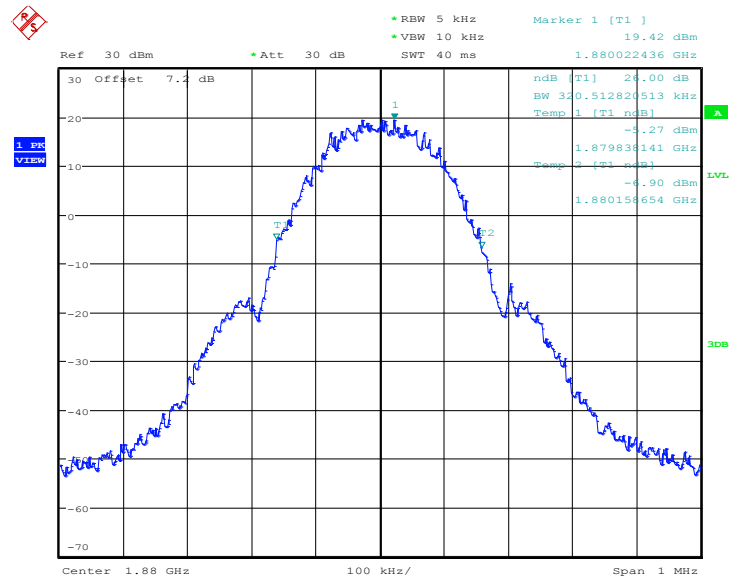

Date: 24.JAN.2017 04:54:18

Channel 810-Emission Bandwidth (-26dB BW)

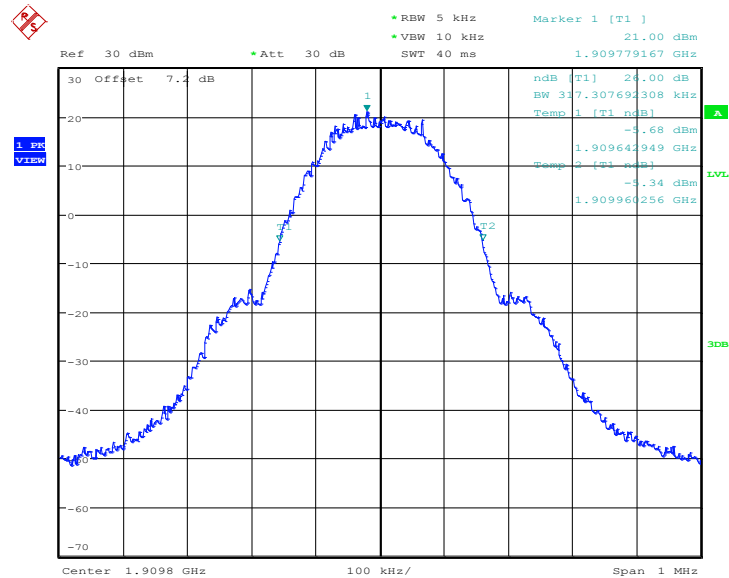

Date: 24.JAN.2017 04:58:59


A.6 BAND EDGE COMPLIANCE

Measurement limit

On any frequency outside frequency band of the US Cellular/PCS spectrum, the power of any emission shall be attenuated below the transmitter power (P, in Watts) by at least $43+10\log(P)$ dB. For all power levels +30 dBm to 0 dBm, this becomes a constant specification limit of -13 dBm. According to KDB 971168, a relaxation of the reference bandwidth is often provided for measurements within a specified frequency range at the edge of the authorized frequency block/band. This is often implemented by permitting the use of a narrower RBW (typically limited to a minimum RBW of 1% of the OBW) for measuring the out-of-band emissions without a requirement to integrate the result over the full reference bandwidth.

GSM 850


LOW BAND EDGE BLOCK-A (GSM850)-Channel 128

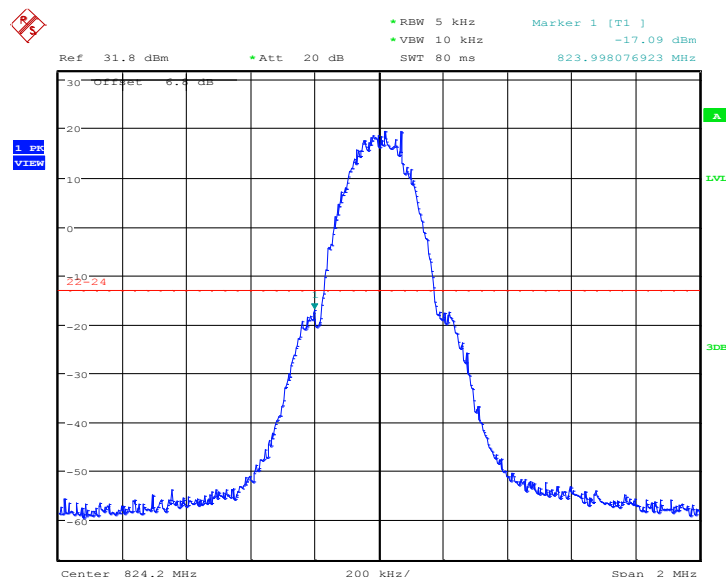

Date: 24.JAN.2017 09:45:32




HIGH BAND EDGE BLOCK-C (GSM850) –Channel 251

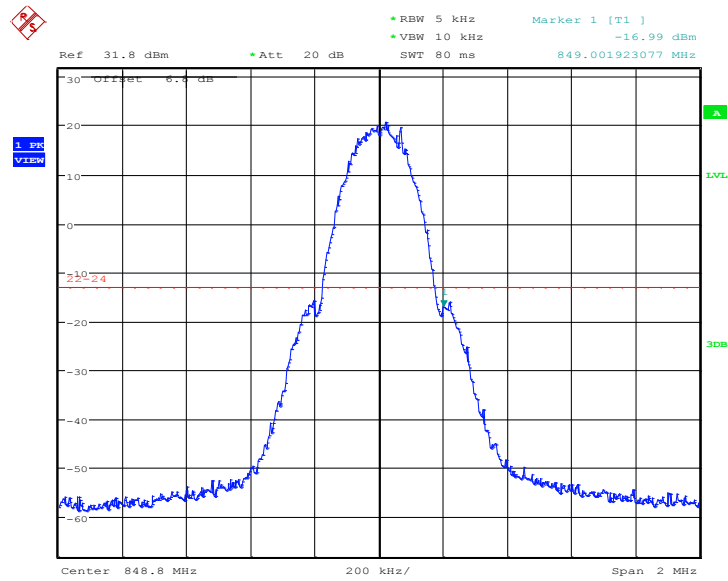


Date: 24.JAN.2017 09:48:23

GPRS 850 LOW BAND EDGE BLOCK-A (GSM850)-Channel 128

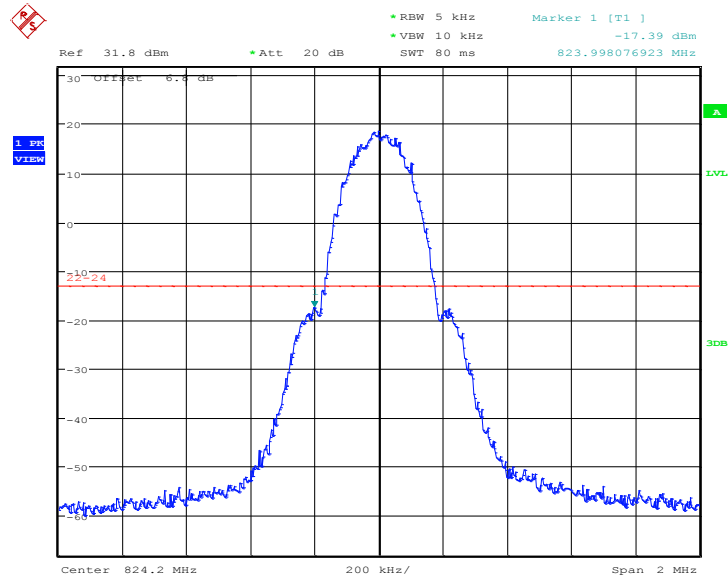

Date: 24.JAN.2017 09:39:32


HIGH BAND EDGE BLOCK-C (GSM850) -Channel 251

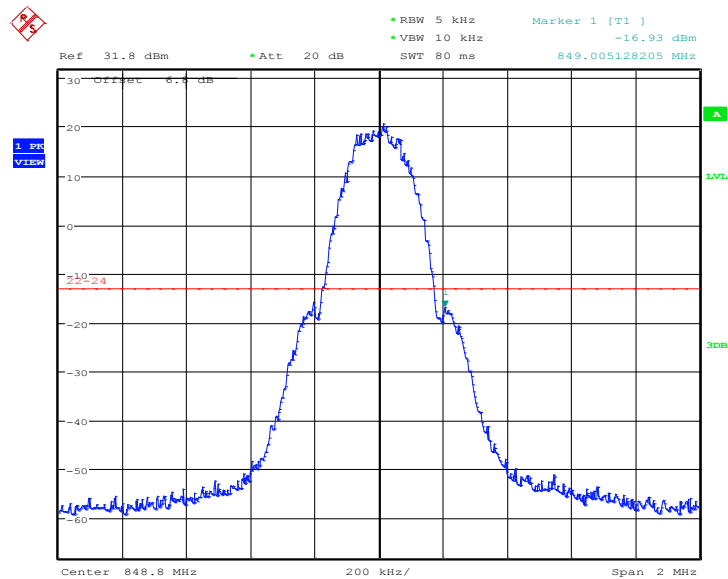

Date: 24.JAN.2017 09:37:51




EGPRS 850-8PSK LOW BAND EDGE BLOCK-A (GSM850)-Channel 128

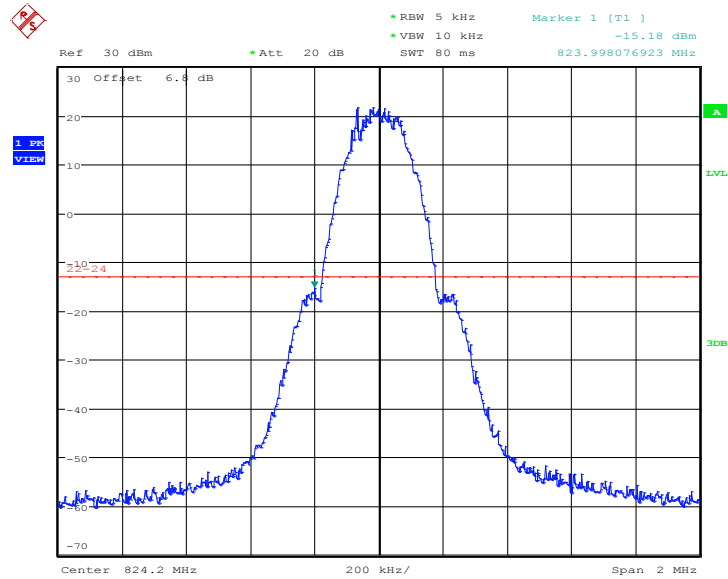


Date: 24.JAN.2017 09:13:08

HIGH BAND EDGE BLOCK-C (GSM850) -Channel 251

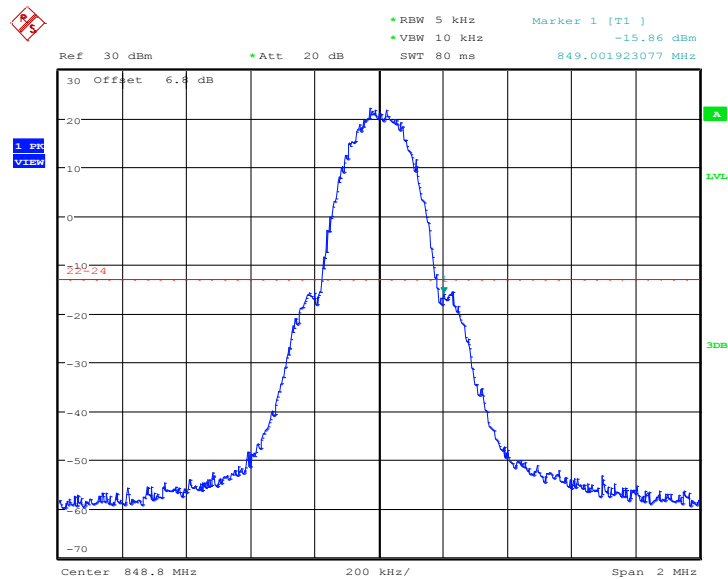


Date: 24.JAN.2017 09:14:52



Date: 24.JAN.2017 04:12:05


GPRS 1900

LOW BAND EDGE BLOCK-A (PCS-1900)-Channel 512

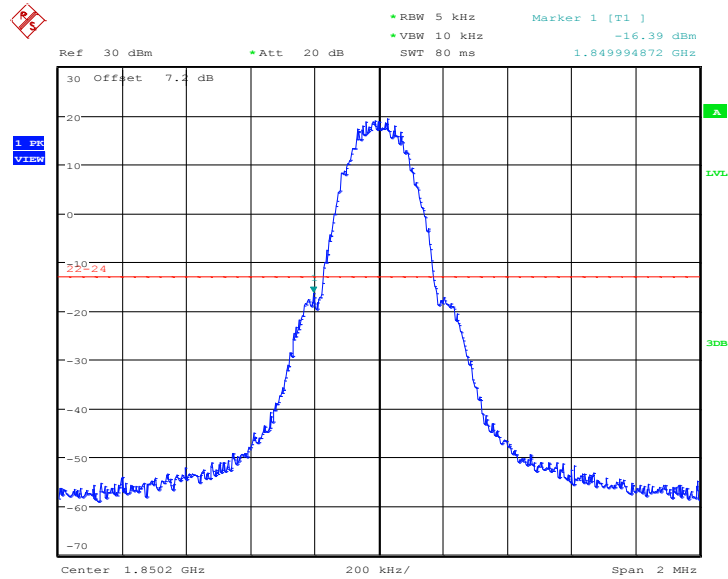

Date: 24.JAN.2017 04:40:07


HIGH BAND EDGE BLOCK-C (PCS-1900) -Channel 810

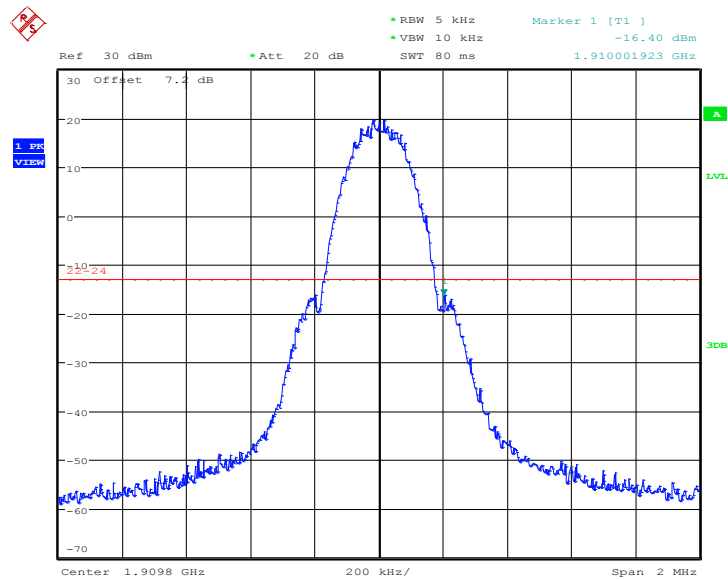

Date: 24.JAN.2017 04:41:26




EGPRS 1900-8PSK LOW BAND EDGE BLOCK-A (PCS-1900)-Channel 512

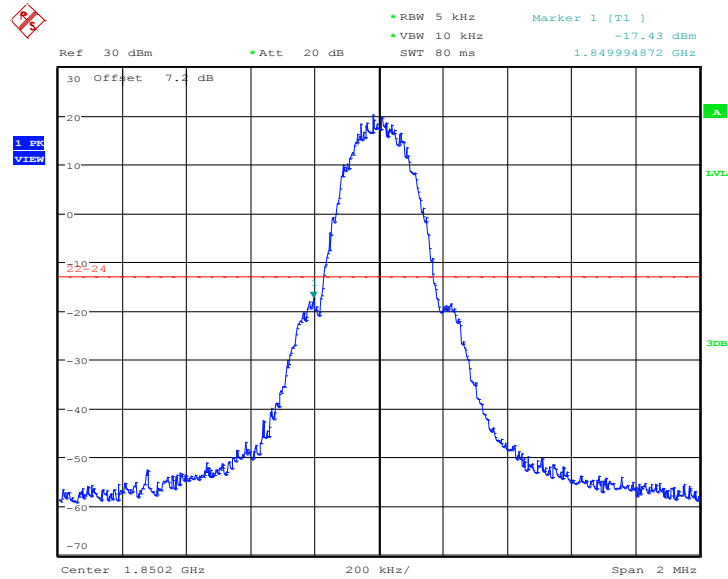

Date: 24.JAN.2017 05:01:56

HIGH BAND EDGE BLOCK-C (PCS-1900) –Channel 810

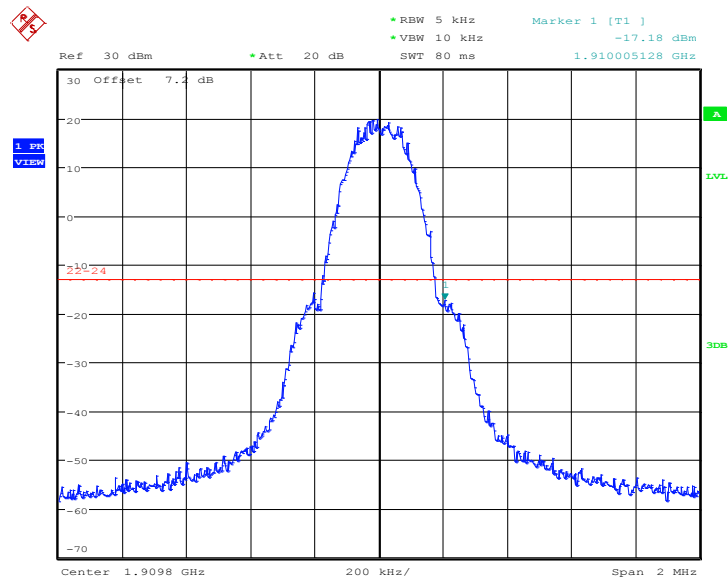

Date: 24.JAN.2017 05:00:58

A.7 CONDUCTED SPURIOUS EMISSION

A.7.1 Measurement Method

The following steps outline the procedure used to measure the conducted emissions from the EUT.

1. Determine frequency range for measurements: The spectrum should be investigated from the lowest radio frequency generated in the equipment up to at least the 10th harmonic of the carrier frequency. For the mobile station equipment tested, this equates to a frequency range of 13 MHz to 9 GHz, data taken from 10 MHz to 25 GHz.
2. Determine EUT transmit frequencies: below outlines the band edge frequencies pertinent to conducted emissions testing.
3. According to KDB 971168, the applicable rule part specifies the reference bandwidth for measuring unwanted emission levels (typically, 100 kHz if the authorized frequency band/block is at or below 1 GHz and 1 MHz if the authorized frequency band/block is above 1 GHz)

GSM850 Transmitter

Channel	Frequency (MHz)
128	824.2
190	836.6
251	848.8

PCS1900 Transmitter

Channel	Frequency (MHz)
512	1850.2
661	1880.0
810	1909.8

A. 7.2 Measurement Limit

The specification that emissions shall be attenuated below the transmitter power (P) by at least $43 + 10 \log (P)$ dB, translates in the relevant power range (1 to 0.001 W) to -13 dBm. At 1 W the specified minimum attenuation becomes 43 dB and relative to a 30 dBm (1 W) carrier becomes a limit of -13 dBm. At 0.001 W (0 dBm) the minimum attenuation is 13 dB, which again yields a limit of -13 dBm. In this way a translation of the specification from relative to absolute terms is carried out.


A. 7.3 Measurement result

GSM850

Channel 128: 30MHz – 1GHz

Spurious emission limit –13dBm.


NOTE: peak above the limit line is the carrier frequency.

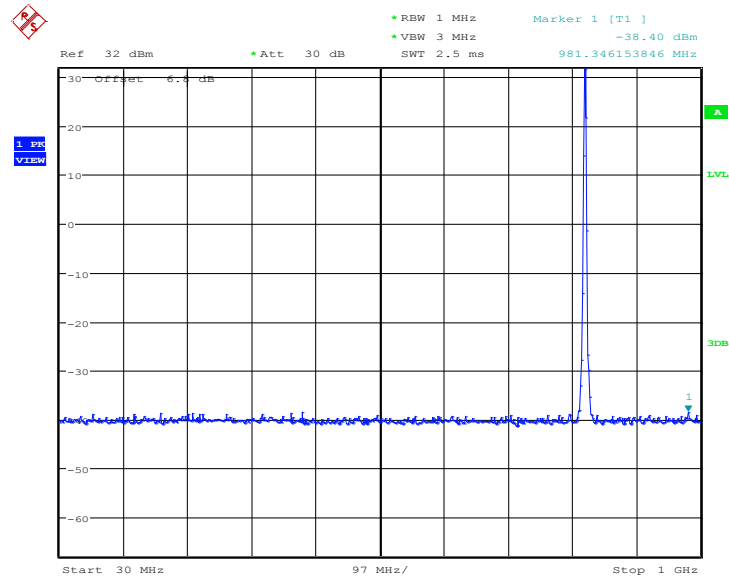

Date: 24.JAN.2017 10:04:11

Channel 128: 1GHz – 2.5GHz


Spurious emission limit –13dBm.

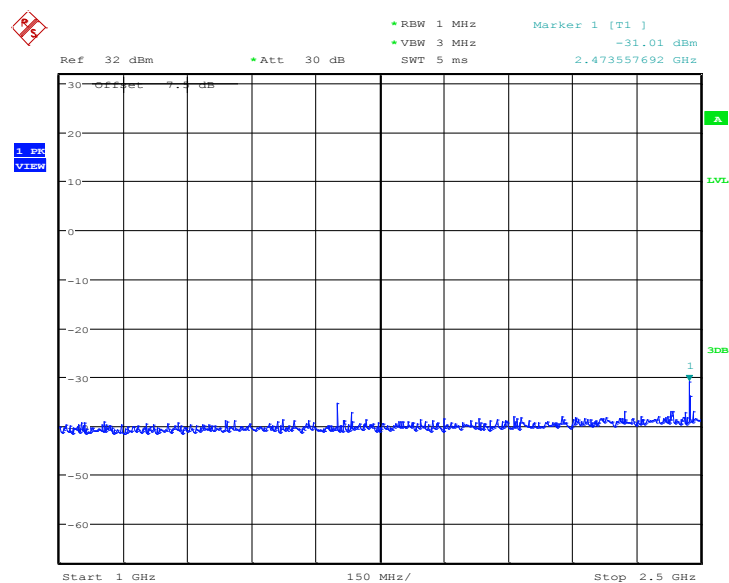

Date: 24.JAN.2017 10:10:16




Channel 128: 2.5GHz – 7.5GHz
Spurious emission limit –13dBm.

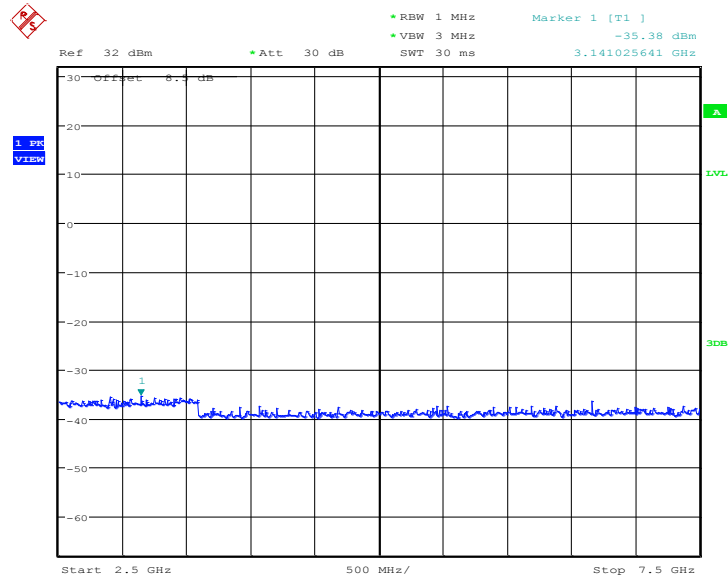

Date: 24.JAN.2017 10:11:23

Channel 128: 7.5GHz –10GHz
Spurious emission limit –13dBm.

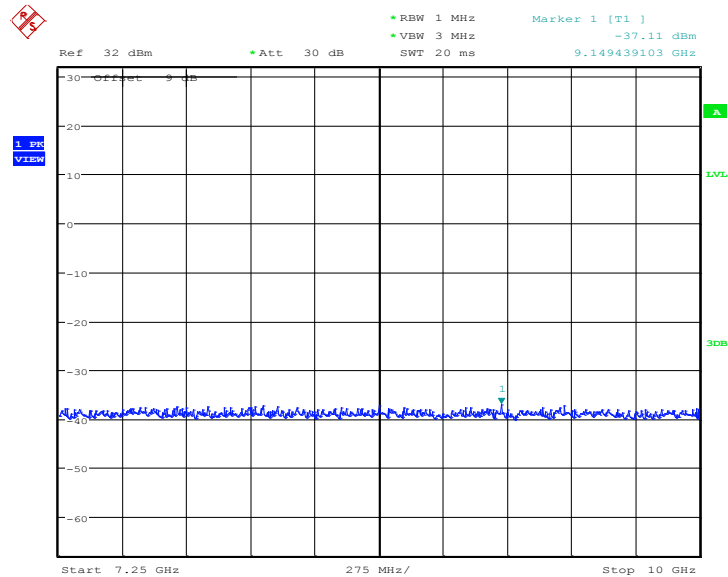


Date: 24.JAN.2017 10:14:10

Channel 190: 30MHz – 1GHz

Spurious emission limit –13dBm


NOTE: peak above the limit line is the carrier frequency.

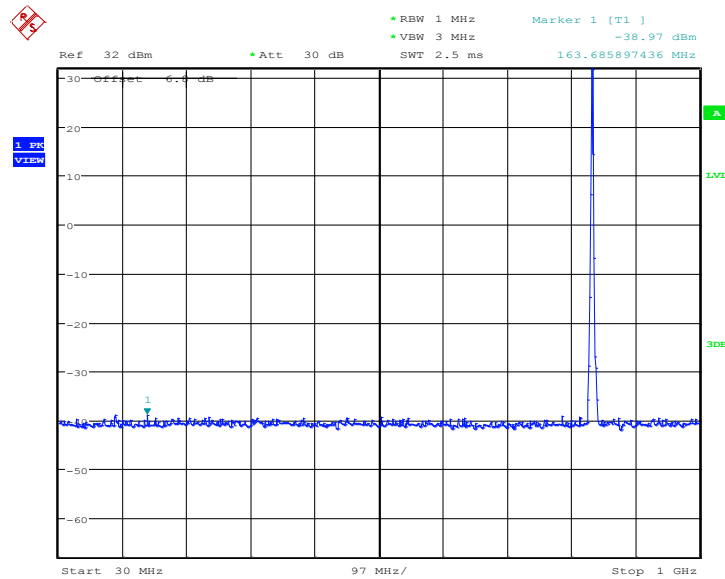

Date: 24.JAN.2017 10:05:00


Channel 190: 1GHz –2.5GHz

Spurious emission limit –13dBm

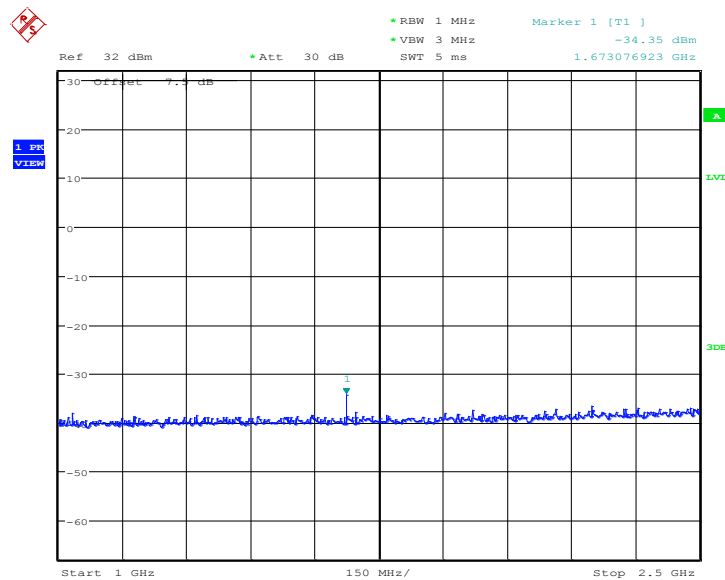


Date: 24.JAN.2017 10:09:53

Channel 190: 2.5GHz –7.5GHz
Spurious emission limit –13dBm

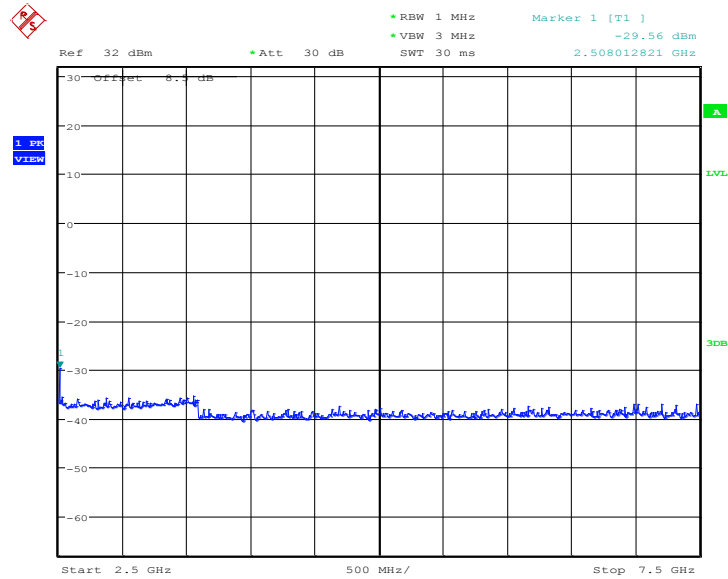

Date: 24.JAN.2017 10:11:58

Channel 190: 7.5GHz –10GHz
Spurious emission limit –13dBm

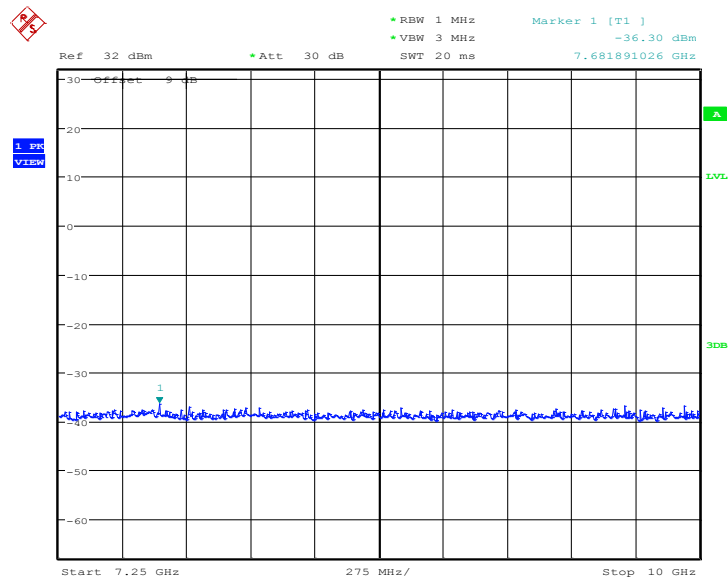


Date: 24.JAN.2017 10:13:49

Channel 251: 30MHz – 1GHz

Spurious emission limit –13dBm.


NOTE: peak above the limit line is the carrier frequency.

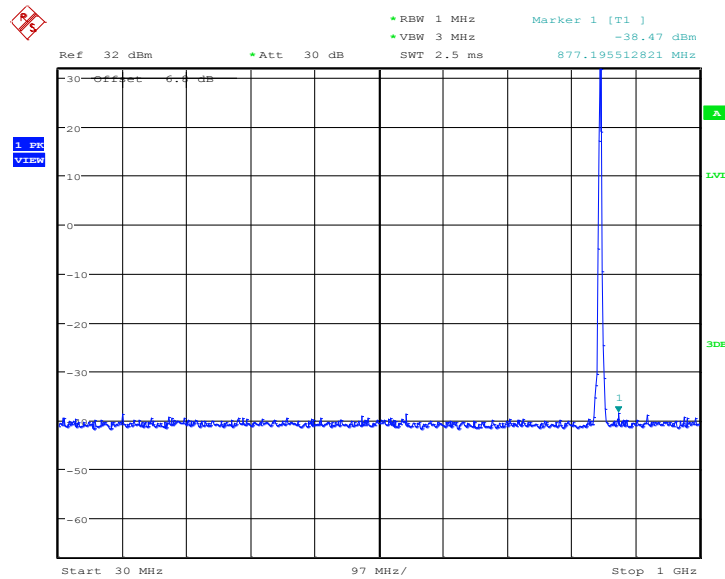

Date: 24.JAN.2017 10:05:44


Channel 251: 1GHz – 2.5GHz

Spurious emission limit –13dBm.

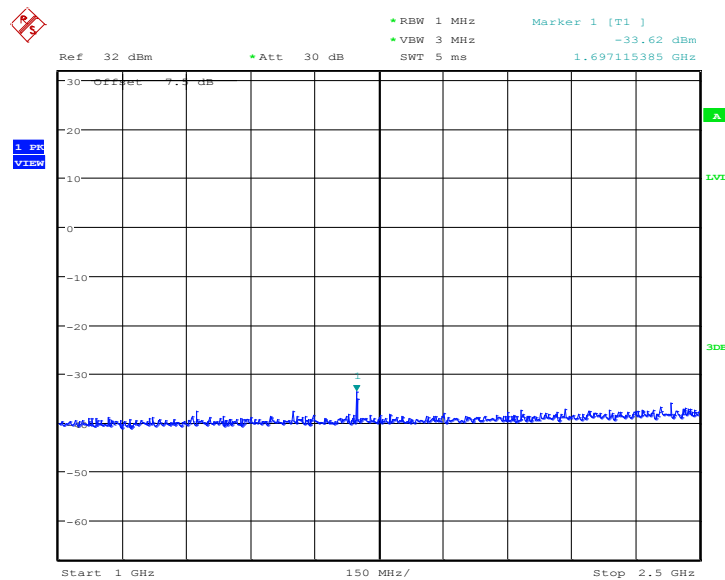


Date: 24.JAN.2017 10:08:43

Channel 251: 2.5GHz – 7.5GHz
Spurious emission limit –13dBm.

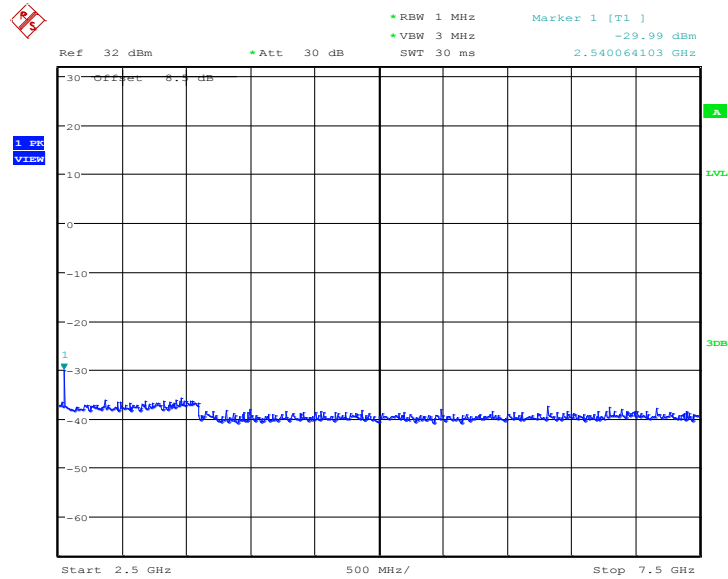

Date: 24.JAN.2017 10:12:22

Channel 251: 7.5GHz – 10GHz
Spurious emission limit –13dBm.

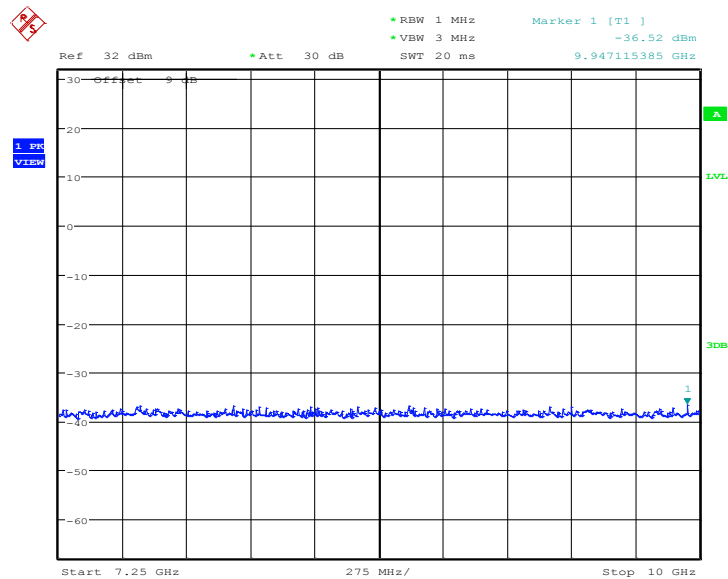


Date: 24.JAN.2017 10:13:12



PCS1900

Channel 512: 30MHz – 1GHz

Spurious emission limit –13dBm.

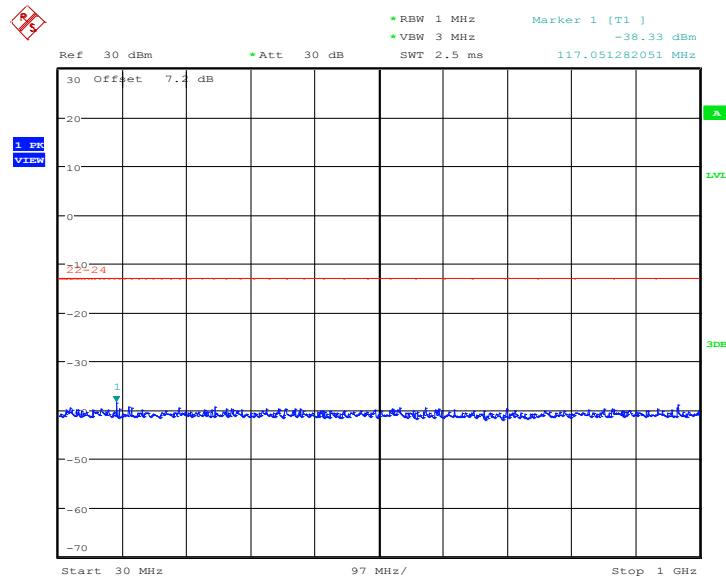


Date: 24.JAN.2017 04:14:30

Channel 512: 1GHz – 2.5GHz

Spurious emission limit –13dBm.


NOTE: peak above the limit line is the carrier frequency.

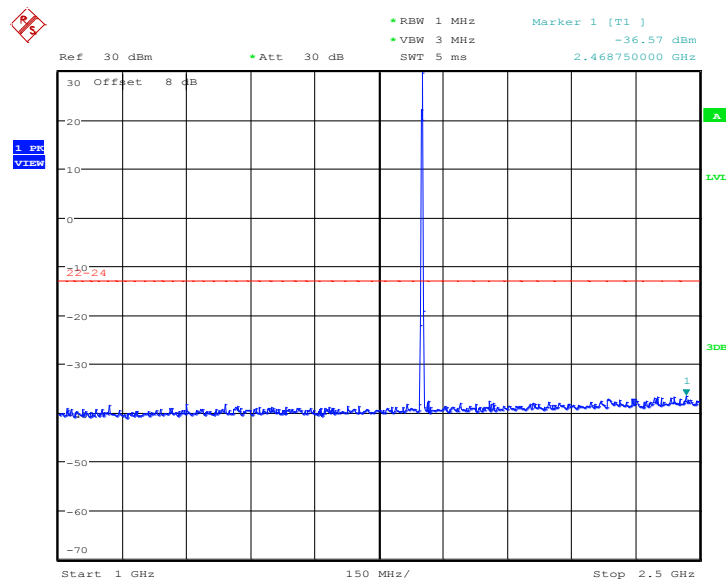

Date: 24.JAN.2017 04:19:49




Channel 512: 2.5GHz – 7.5GHz
Spurious emission limit –13dBm.

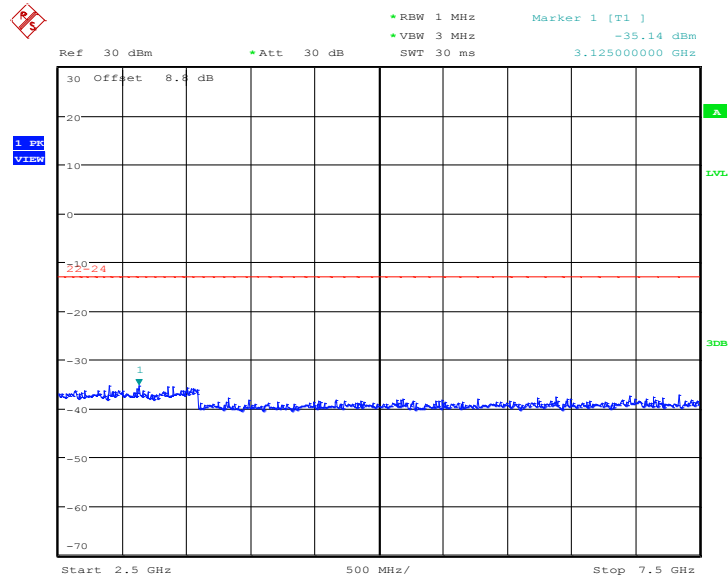

Date: 24.JAN.2017 04:20:36


Channel 512: 7.5GHz –10GHz
Spurious emission limit –13dBm.

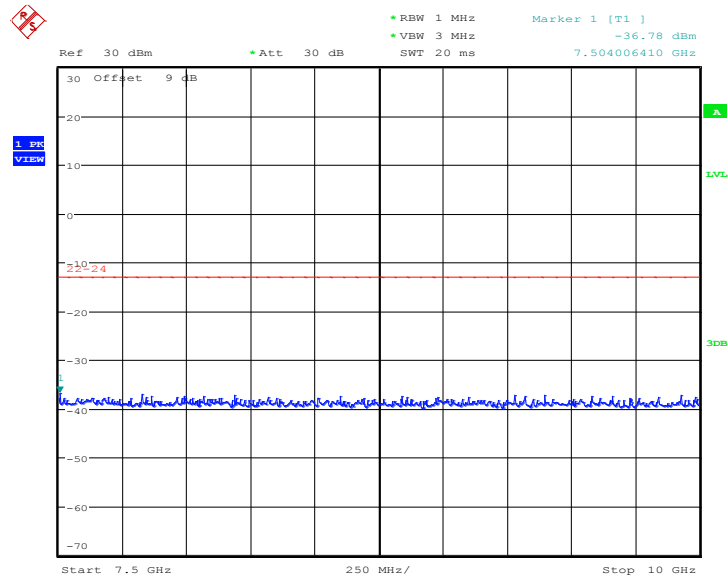

Date: 24.JAN.2017 04:24:42

Channel 512: 10GHz –15GHz


Spurious emission limit –13dBm.

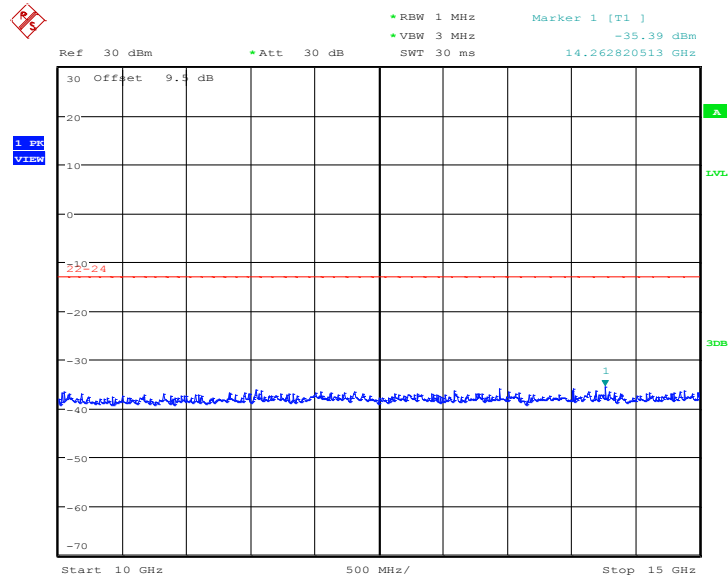

Date: 24.JAN.2017 04:25:22


Channel 512: 15GHz –20GHz

Spurious emission limit –13dBm.

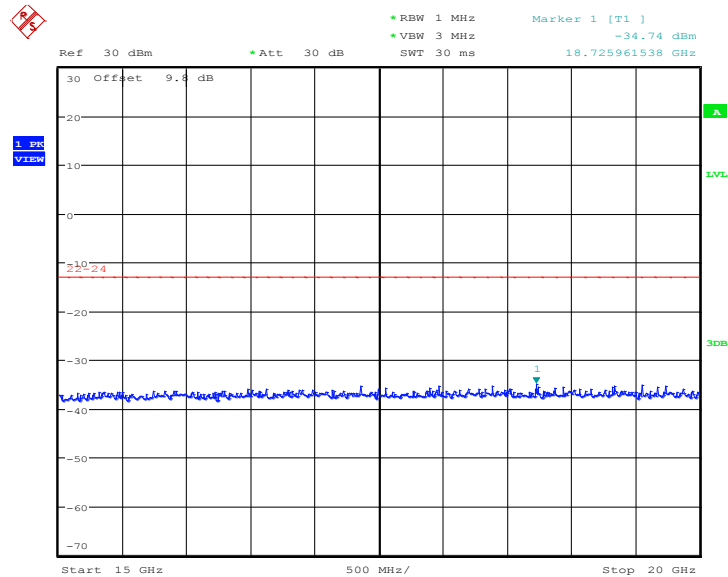

Date: 24.JAN.2017 04:30:32


Channel 661: 30MHz – 1GHz
Spurious emission limit –13dBm

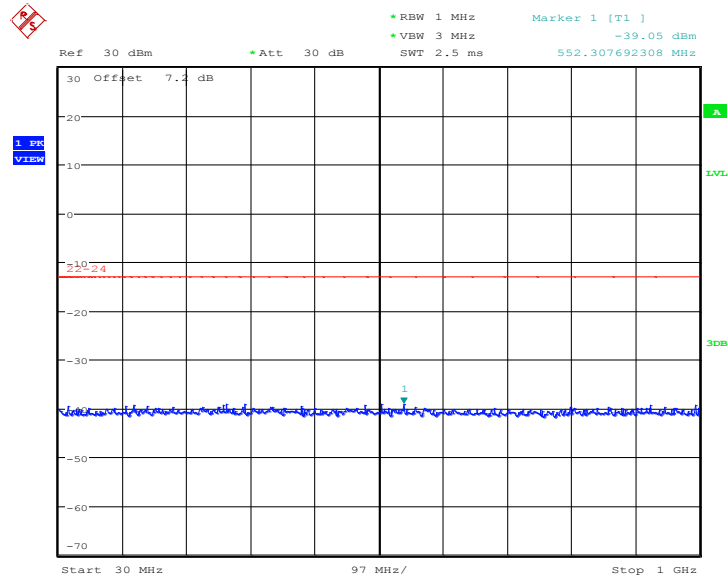

Date: 24.JAN.2017 04:15:35

Channel 661: 1GHz –2.5GHz
Spurious emission limit –13dBm


NOTE: peak above the limit line is the carrier frequency.

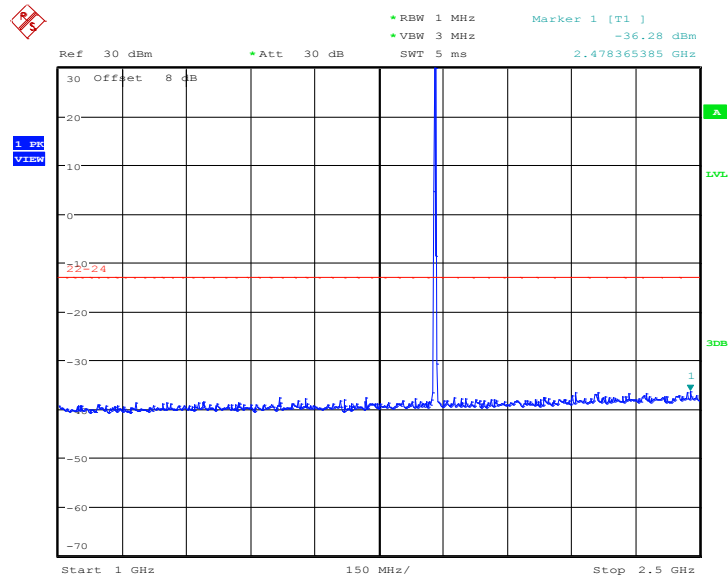

Date: 24.JAN.2017 04:18:47




Channel 661: 2.5GHz –7.5GHz
Spurious emission limit –13dBm

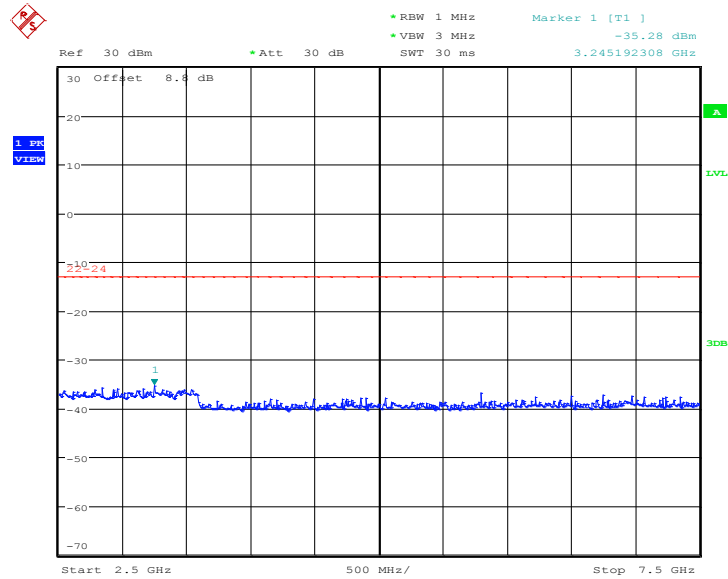


Date: 24.JAN.2017 04:21:12

Channel 661: 7.5GHz –10GHz
Spurious emission limit –13dBm

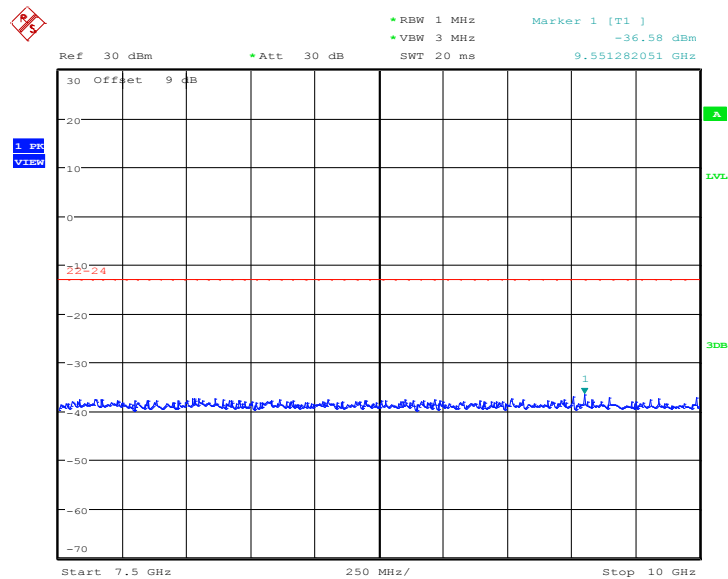

Date: 24.JAN.2017 04:24:09



Spurious emission limit -13dBm .




Spurious emission limit -13dBm .



Channel 810: 30MHz – 1GHz

Spurious emission limit –13dBm.

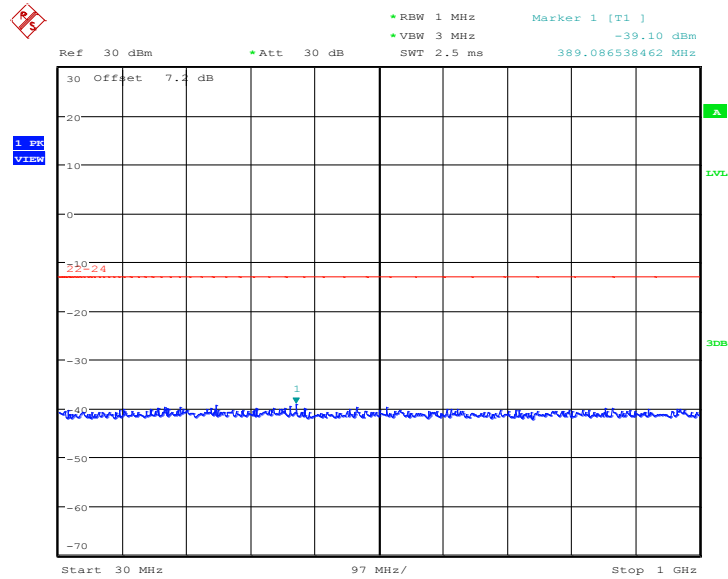


Date: 24.JAN.2017 04:16:10

Channel 810: 1GHz – 2.5GHz


Spurious emission limit –13dBm.

NOTE: peak above the limit line is the carrier frequency.

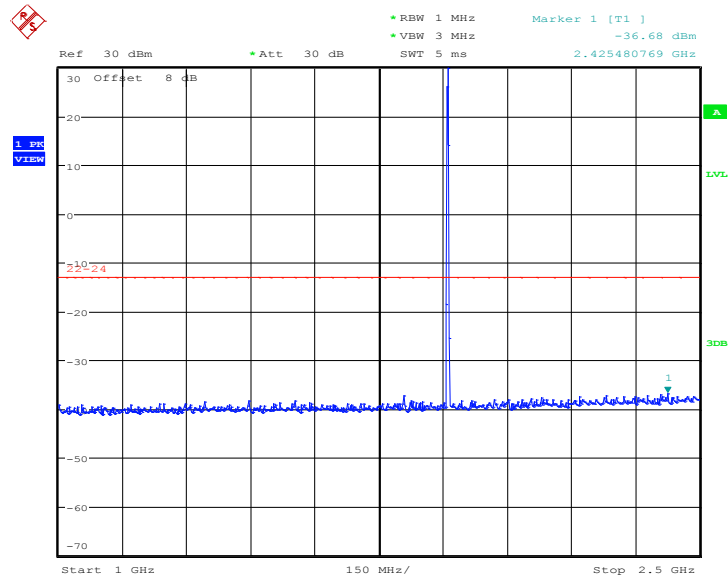


Date: 24.JAN.2017 04:17:15

Channel 810: 2.5GHz – 7.5GHz
Spurious emission limit –13dBm.

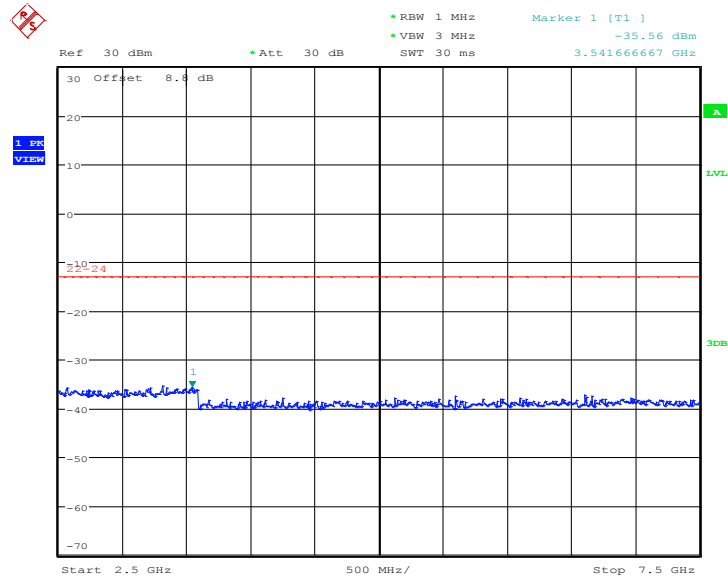

Date: 24.JAN.2017 04:22:15

Channel 810: 7.5GHz – 10GHz
Spurious emission limit –13dBm.

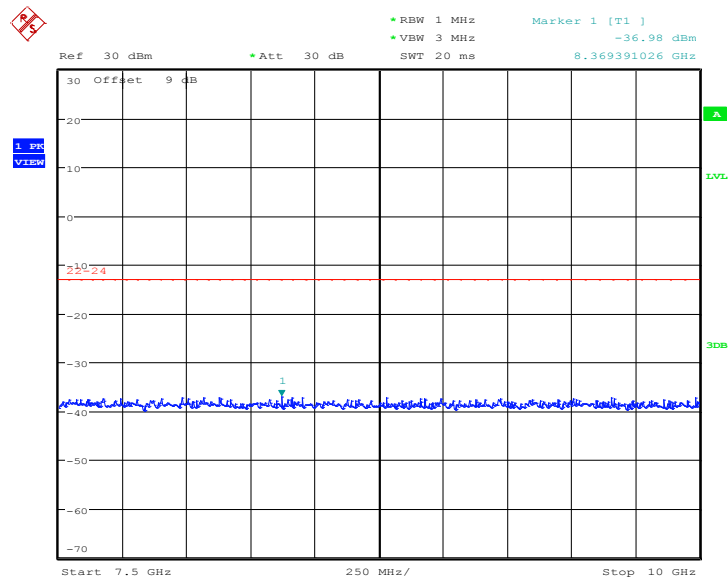


Date: 24.JAN.2017 04:23:33



Channel 810: 10GHz –15GHz


Spurious emission limit –13dBm.

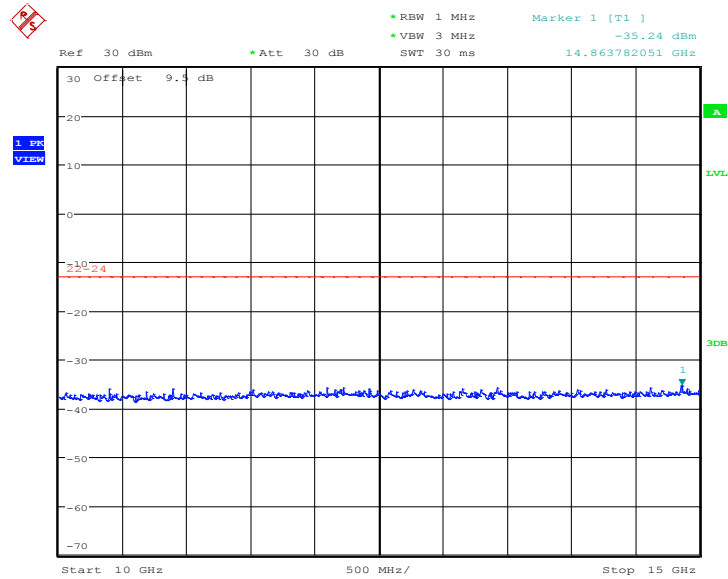

Date: 24.JAN.2017 04:28:46

Channel 810: 15GHz –20GHz

Spurious emission limit –13dBm.

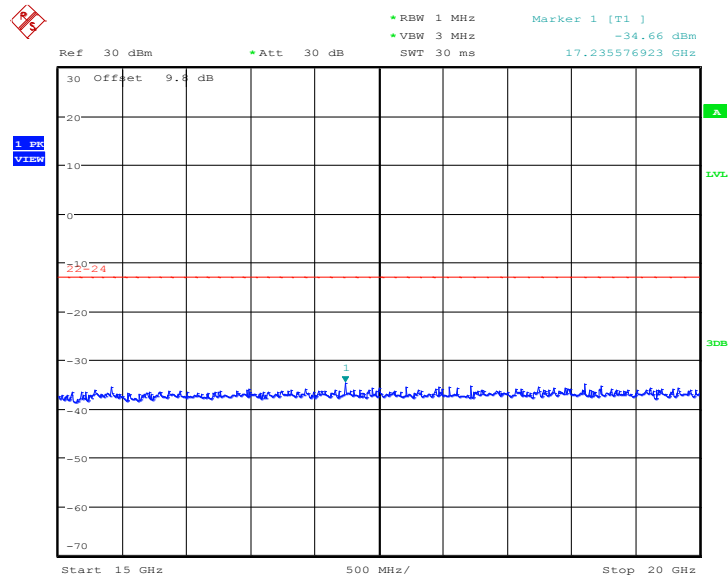

Date: 24.JAN.2017 04:29:30

A.8 PEAK-TO-AVERAGE POWER RATIO

Reference

RSS 132, RSS133

According to RSS 132 and 133, the transmitter's peak-to-average power ratio (PAPR) shall not exceed 13 dB for more than 0.1% of the time using a signal corresponding to the highest PAPR during periods of continuous transmission.

According to KDB 971168:

- a) Refer to instrument's analyzer instruction manual for details on how to use the power statistics/CCDF function;
- b) Set resolution/measurement bandwidth $\geq$ signal's occupied bandwidth;
- c) Set the number of counts to a value that stabilizes the measured CCDF curve;
- d) Set the measurement interval to 1 ms
- e) Record the maximum PAPR level associated with a probability of 0.1%

A.8.1 Measurement limit

not exceed 13 dB

A.8.2 Measurement results

	Frequency(MHz)	PAPR(dB)
GSM850	836.6	7.45
GPRS850	836.6	7.49
EGPRS850(8PSK)	836.6	7.55
PCS1900	1880.0	7.51
GPRS1900	1880.0	7.48
EGPRS1900(8PSK)	1880.0	7.49

A.9 RECEIVER RADIATION EMISSION

A.9.1 Method of Measurement

The measurement procedure in ANSI C64.4-2003 is used. The EUT is placed on a 80cm height non-conductive table locating on the center of turntable. From 30MHz-1GHz, the measurement distance is 10m. For frequency range above 1GHz, the measurement distance is 3m.

The EUT is measured with travel charger and the operating mode is idle without CMU200's signaling.

A.9.2 Method of Measurement


Frequency of Emission (MHz)	Limit (dB μ V/m)	Measurement Distance (m)
30-88	30	10
88-216	33.5	10
216-960	36	10
960-1000	44	10
>1000	54	3

A. 9.3 Measurement results

IF bandwidth: 120 kHz

Idle Mode: 30MHz-1GHz


Full Spectrum

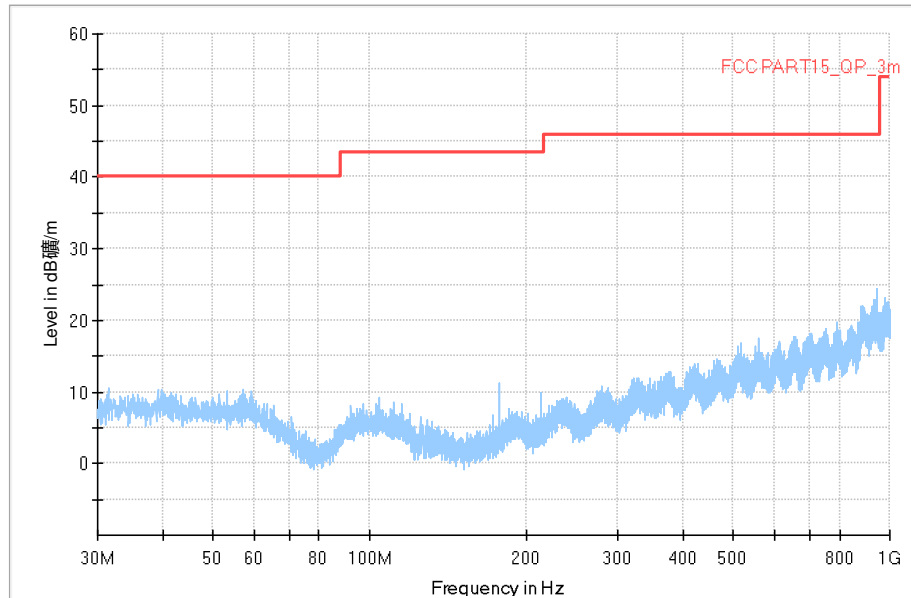

RBW / VBW 1 MHz

Idle Mode: 1GHz-18GHz

Full Spectrum

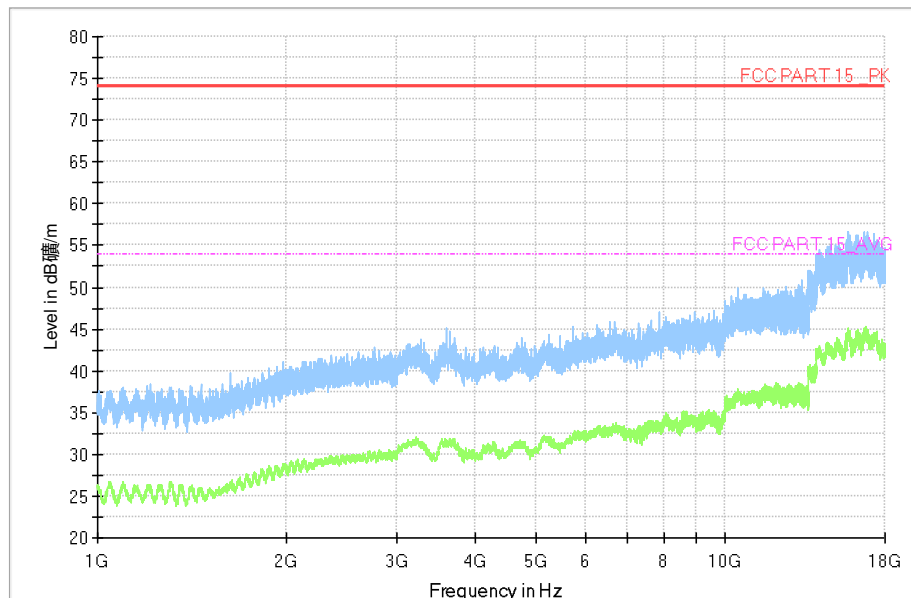

END OF REPORT